


FCC Part 15B Compliance Test Report

Test Report no.:	Cph_FCC_0514_09.doc	Date of Report:	05-04-2005
Number of pages:	10	Customer's Contact person:	Thomas Reitmayer
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-76 (HW: 3851, V.4), Battery; BL-4C, Headset; HS-6, AC-Charger; AC-3		
FCC ID:	PPIRM-76	IC:	661U-RM76
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		

Date and signature for the contents:

05-04-2005



Allan F. Henriksen
Test Engineer

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	March 29 th 2005
Testing completed	April 5 th 2005
The customer's contact person	Thomas Reitmayer
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	V4 - white
Document name	\\satcc01nmp\\tcc_salo\\Projects\\RM-76\\results\\emc\\FCC\\Cph_FCC_0514_09.doc

1.1. EUT and Accessory Information

The EUT is a tri-band (GSM 900, 1800 and 1900) mobile phone with EGPRS, a camera and FM Radio. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-76	004400/63/177317/1	3851		3.03	28923
Battery	BL-4C	067038610717244311	-	-	-	28933
Headset	HS-6	175	2.1	2.2	2.2	28767
Charger	AC-3	0675370409049 M02601 0000224	1.1	0.3	-	28736

1.2. Summary of Test Results

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (9)	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 1900 Test results	5
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)	6
3.1. Test setup	6
3.2. Test method and limit	6
3.3. GSM 1900 Test results	7
4. Test Equipment.....	9
4.1. Conducted measurements	9
4.2. Radiated measurements	9

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-76 Dut # 28923 + BL-4C Dut # 28933
Accessories with DUT numbers	AC-3 Dut # 28736 + HS-6 Dut # 28767
Operation Voltage V / Hz	230 VAC / 50 Hz
Result	Passed
Remarks	FM Radio ON
Temp °C / Humidity RH % / Air Pressure mBar	21.6°C / 38.0 %RH 1018.8 mBar
Date of measurements	05-04-2005
Measured by	Allan F. Henriksen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [\mu V] = U_{RX} + A_{CORRECTIONS}$$


Where U_{RX} is receiver reading and $A_{CORRECTIONS}$ is combined correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range / MHz	Quasi peak limit / dBμV	Average limit / dBμV
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 1900 Test results

RX mode, channel 661

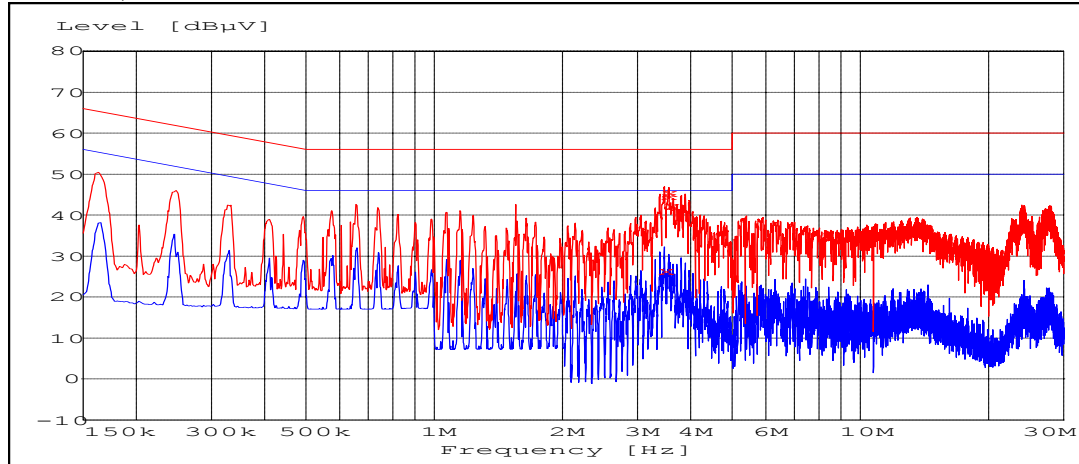


Quasi peak (RBW: 9 kHz)

Frequency / MHz	Level / dBμV	Line	Result
3.470000	26.50	L1	Passed
3.515000	44.70	N	Passed
3.525000	45.60	N	Passed
3.577500	42.40	N	Passed

3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RM-76 dut#28923
Accessories with DUT numbers	BL-4C dut#28933, AC-3 dut#28736, HS-6 dut#28767
Operation Voltage V / Hz	230 VAC / 50 Hz
Result	Passed
Remarks	None
Temp °C / Humidity RH % / Air Pressure mbar	20.6°C / 36.5 %RH / 1032mbar
Date of measurements	April 1 st 2005
Measured by	Jesper Nielsen

3.1. Test setup

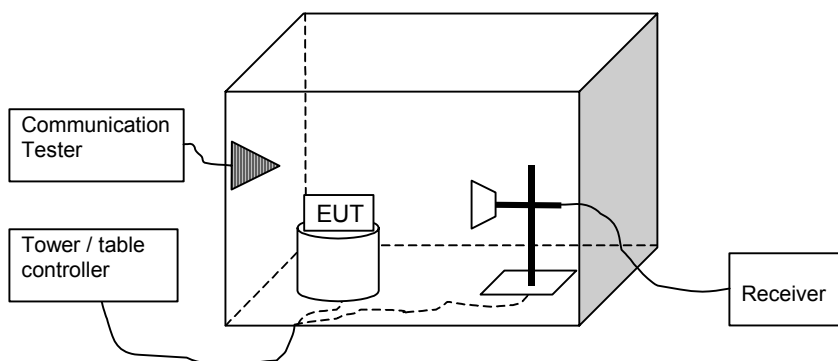

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m below 3 GHz and 1.6 m above that.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{CORRECTIONS}$$

Where U_{RX} is receiver reading and $A_{CORRECTIONS}$ is combined correction factor including cable loss, antenna factor and preamplifier gain ($A_{CORRECTIONS} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range / MHz	Quasi peak limit / dBμV/m	Average limit / dBμV/m	Peak limit / dBμV/m
30 - 230	40	-	-
230 - 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 1900 Test results

RX mode, channel 661 – phone open

Quasi peak (RBW: 120 kHz)

Frequency / MHz	Level / dBμV/m	Level / μV/m	A _{CORRECTION} / dB	Polarisation	Result
36.633467	35.80	61.66	-15.10	VERTICAL	Passed
69.119840	11.90	3.94	-25.10	VERTICAL	Passed
84.208216	36.40	66.07	-23.10	HORIZONTAL	Passed
104.208617	33.70	48.42	-22.30	HORIZONTAL	Passed
928.857715	18.60	8.51	-6.70	VERTICAL	Passed

Peak (RBW: 1 MHz)

Frequency / MHz	Level / dBμV/m	Level / μV/m	A _{CORRECTION} / dB	Polarisation	Result
3916.841683	39.74	97.05	7.80	HORIZONTAL	Passed
7840.179359	46.14	202.77	13.20	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency / MHz	Level / dBμV/m	Level / μV/m	A _{CORRECTION} / dB	Polarisation	Result
2490.979960	36.10	63.83	9.00	VERTICAL	Passed
2905.311623	39.00	89.13	12.20	VERTICAL	Passed
3919.841683	28.04	25.23	7.80	HORIZONTAL	Passed
6702.900802	37.14	71.94	11.40	VERTICAL	Passed
6945.895792	40.14	101.62	11.50	VERTICAL	Passed
7475.443888	31.24	36.48	13.10	HORIZONTAL	Passed
7840.179359	32.64	42.85	13.20	HORIZONTAL	Passed

RX mode, channel 661 – phone closed

Quasi peak (RBW: 120 kHz)

Frequency / MHz	Level / dB μ V/m	Level / μ V/m	A _{CORRECTION} / dB	Polarisation	Result
36.733467	31.40	37.15	-15.10	VERTICAL	Passed
84.208216	35.40	58.88	-23.10	HORIZONTAL	Passed
104.208617	33.00	44.67	-22.30	HORIZONTAL	Passed

Peak (RBW: 1 MHz)

Frequency / MHz	Level / dB μ V/m	Level / μ V/m	A _{CORRECTION} / dB	Polarisation	Result
3919.839679	42.54	133.97	7.80	HORIZONTAL	Passed
3919.841683	41.44	118.03	7.80	VERTICAL	Passed

Average (RBW: 1 MHz)

Frequency / MHz	Level / dB μ V/m	Level / μ V/m	A _{CORRECTION} / dB	Polarisation	Result
2495.489980	36.10	63.83	9.00	VERTICAL	Passed
2501.000000	36.00	63.10	9.00	VERTICAL	Passed
2906.813627	38.90	88.10	12.10	VERTICAL	Passed
3919.839679	28.64	27.04	7.80	HORIZONTAL	Passed
3923.341683	26.84	21.98	7.80	VERTICAL	Passed
6945.891784	40.14	101.62	11.50	VERTICAL	Passed
7467.437876	31.24	36.48	13.10	HORIZONTAL	Passed
7823.139279	32.44	41.88	13.40	HORIZONTAL	Passed

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	15B,15C,22,24
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz- 4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C