

FCC MPE Report

Applicant : LITE-ON TECHNOLOGY CORP.
Product Name : IEEE 802.11 a/b/g/n/ac and Bluetooth 5.0 Module
Trade Name : AzureWave
Model Number : AW-CM467-SUR, AW-CM467-SUR-I, AW-CM467-USB,
AW-CM467-USB-I
Applicable Standard : 47 CFR § 2.1091
Received Date : Oct. 19, 2023
Issued Date : Oct. 30, 2023

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Approved By :



Table of Contents

1.	General Information.....	4
2.	Description of Equipment under Test (EUT).....	6
3.	RF Exposure Limit.....	8
4.	RF Exposure Assessment.....	9
5.	Maximum Transmitting Mode Evaluation	11
6.	Result.....	11
7.	Conclusion	11

Revision History

<i>Rev.</i>	<i>Issued Date</i>	<i>Description</i>	<i>Revised by</i>
00	Oct. 30, 2023	Initial Issue	Abby Hsu

1. General Information

1.1 Reference Applicable Standard

Standard	Description	Version
IEEE C95.1	American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 KHz to 100 GHz, New York.	1992
47 CFR § 2.1091	Radiofrequency radiation exposure evaluation: mobile devices.	-
47 CFR § 1.1310	Radiofrequency radiation exposure limits.	-

1.2 Testing Location

Test Facilities

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.
 Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan
 Website: <https://www.atl.com.tw>
 Telephone: +886-3-271-0188
 Fax: +886-3-271-0190
 E-mail: infoEETW@eurofins.com

Test Site Location

- No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan
- No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

Laboratory Accreditation

Location	TAF	FCC	ISED
No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan	Accreditation No.: 1330	Designation No.: TW0010	Company No.: 7381A CAB ID: TW1330
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan	Accreditation No.: 1330	Designation No.: TW0034	Company No.: 28922 CAB ID: TW1330

2. Description of Equipment under Test (EUT)

Applicant	LITE-ON TECHNOLOGY CORP. Bldg. C, 90, Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.		
Product Name	IEEE 802.11 a/b/g/n/ac and Bluetooth 5.0 Module		
Trade Name	AzureWave		
Model Number	AW-CM467-SUR, AW-CM467-SUR-I, AW-CM467-USB, AW-CM467-USB-I		
FCC ID	PPQ-CM467		
Use Distance	20 cm		
Antenna Information	Type	Gain	
	PCB Antenna	WLAN 2.4 GHz	4.04 dBi
		WLAN 5.2 GHz	2.08 dBi
		WLAN 5.3 GHz	2.22 dBi
		WLAN 5.6 GHz	2.42 dBi
WLAN 5.8 GHz		2.37 dBi	
Module Name	AzureWave, AW-CM467-SUR, AW-CM467-SUR-I, AW-CM467-USB, AW-CM467-USB-I		

Note:

The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

EUT Modify Description :

Modify Description: 1.Add Antenna: PCB Antenna 2.Add Host Main model: M2-UM188-ETK3ER(RFID), M2-UM188-ETK3EP(POS) Add Host Series model: M2-UK188-ETK3ER(RFID), M2-UK188-ETK3EP(POS). After the evaluation, retest of all test items is not required.

2.1 RF Specification

Wi-Fi 2.4G				
Support type:	<input checked="" type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n	<input type="checkbox"/> 802.11ax
Support bandwidth:	<input checked="" type="checkbox"/> 20 MHz	<input type="checkbox"/> 40 MHz		
Wi-Fi 5G				
Operation Band:	<input checked="" type="checkbox"/> U-NII-1	<input checked="" type="checkbox"/> U-NII-2A	<input checked="" type="checkbox"/> U-NII-2C	<input checked="" type="checkbox"/> U-NII-3
	<input type="checkbox"/> U-NII-5			
Support type:	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n	<input checked="" type="checkbox"/> 802.11ac	<input type="checkbox"/> 802.11ax
Support bandwidth:	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 40 MHz	<input checked="" type="checkbox"/> 80 MHz	<input type="checkbox"/> 160 MHz

3. RF Exposure Limit

For devices that operate at larger distances from persons, where there are minimal RF coupling interactions between a device and the user or nearby persons, RF exposure compliance using maximum permissible exposure (MPE) limits is applied. The limits for MPE is listed as below:

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824 / f	2.19 / f	(180 / f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F / 1,500	30
1,500-100,000	-	-	1.0	30
Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1,842 / f	4.89 / f	(900 / f ²)*	6
30-300	61.4	0.163	1.0	6
300-1,500	-	-	F / 300	6
1,500-100,000	-	-	5	6


f = frequency in MHz. * = Plane-wave equivalent power density.

4. RF Exposure Assessment

4.1 Exemption Evaluation

Exemption evaluation was performed according to the appendix A and B in KDB447498 D04.

The General Sequence for Determination of Procedure demonstrated in Figure A.1 of KDB447498 D04 was applied.

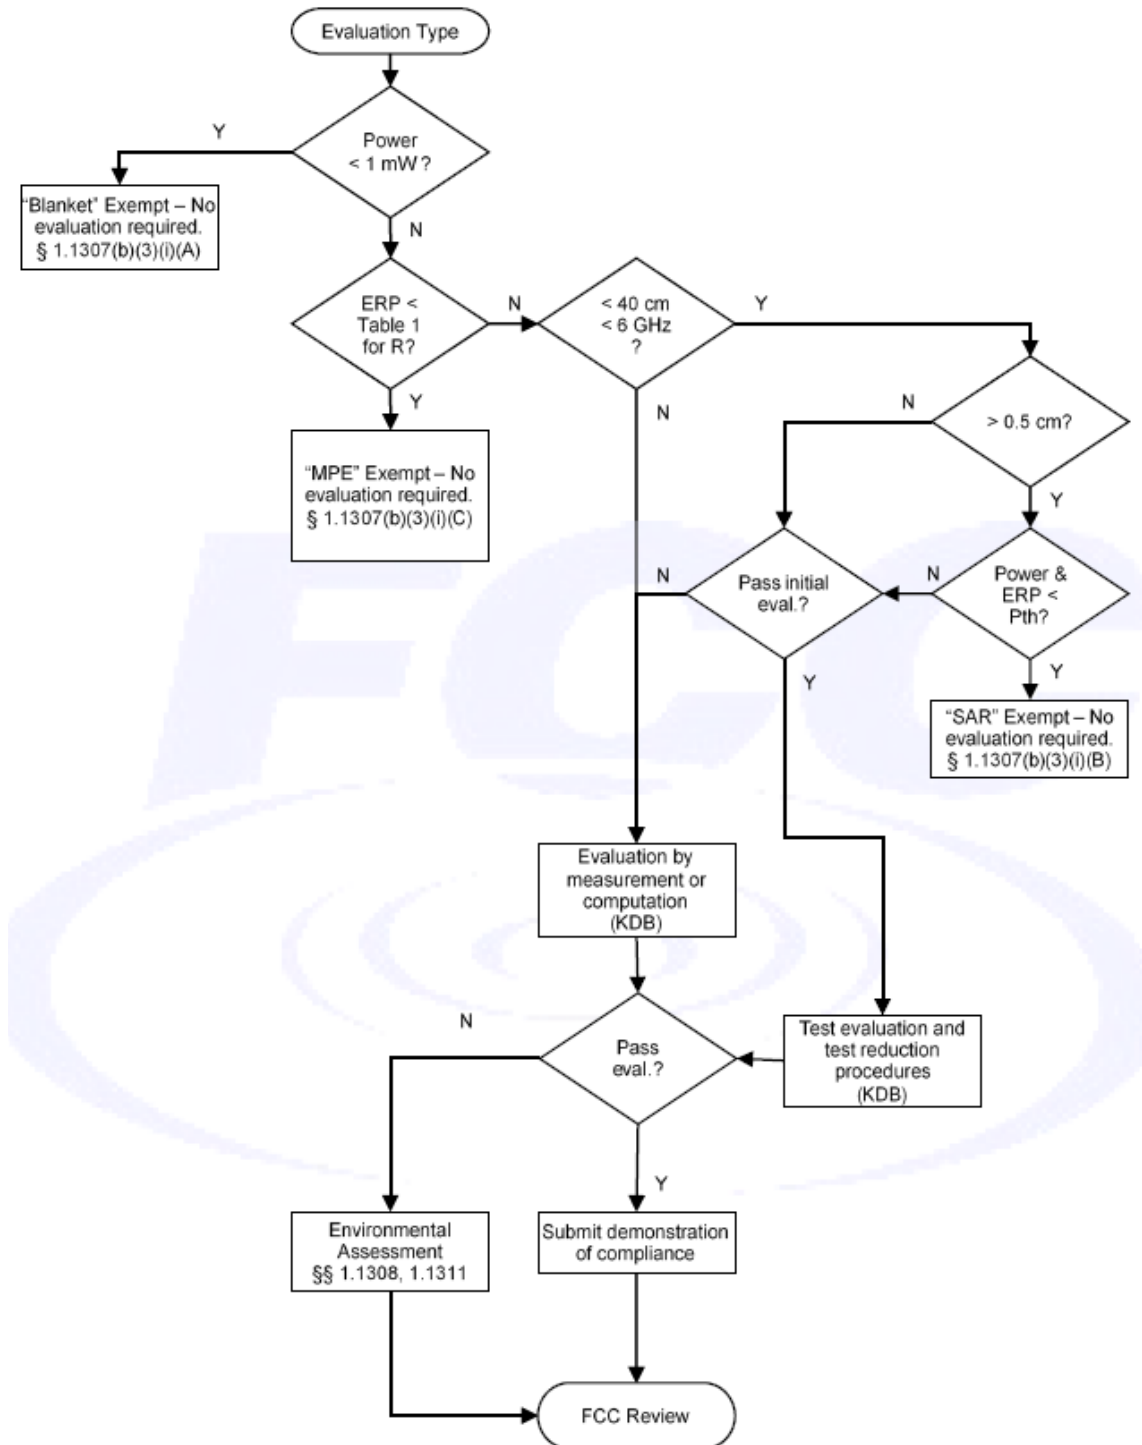

4.2 Human Exposure Assessment

Due to the design and installation of this product, it is not possible to conduct SAR evaluation. This is because client either manufactures or supplies the antenna(s) that will be used in the installation of this product. Therefore, this product will be evaluated as a mobile device per 47 CFR § 1.1310 titled "Radiofrequency radiation exposure limits", generally referred to as MPE limits.

In 47 CFR § 2.1091, paragraph (b) defines a mobile device as "a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 cm is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons."

Exposure evaluation

$$S_{eirp} = \frac{EIRP}{4\pi d^2} = \frac{PG}{4\pi d^2} (W / m^2)$$

Where

S: is the input power (W);

G: is the antenna gain;

d : is the distance between antennas and evaluation point (m).

5. Maximum Transmitting Mode Evaluation

Antenna transmission description

WLAN 2.4 GHz : 1TX (Diversity)
WLAN 5 GHz : 1TX (Diversity)

6. Result

Band	Frequency (MHz)	MAX Conducted Power (dBm) [P]	ANT Gain (dBi)	Numeric Gain [G]	Power with Duty cycle (mW) [P]x[G]	Power Density (mW/cm ²) [S]	Standalone Limit (mW/cm ²)	Evaluated / Exposure Limit
WLAN 2.4 GHz	2412 - 2472	17.22	4.04	2.54	133.92	0.03	1.00	0.03
WLAN 5.2 GHz	5150 - 5250	19.16	2.08	1.61	132.69	0.03	1.00	0.03
WLAN 5.3 GHz	5250 - 5350	19.34	2.22	1.67	143.46	0.03	1.00	0.03
WLAN 5.6 GHz	5470 - 5725	19.02	2.42	1.75	139.65	0.03	1.00	0.03
WLAN 5.8 GHz	5725 - 5850	19.34	2.37	1.73	148.61	0.03	1.00	0.03

Note:

1. The calculation uses the minimum distance defined by the regulations of 20 cm, which is more conservative than the actual use distance of the product.
2. The maximum power and gain were applied to evaluate MPE.

MAX MPE: 0.03 mW/cm²

Simultaneous Transmitting :

Note.

- 1.WLAN/BT result are referred to report No.USSC236154001.
- 2.RFID result is referred to BV CPS report No. MFBHLU-WTW-P2301187

WWAN+WLAN 2.4 GHz + RFID

WWAN+WLAN 5 GHz + RFID

TER: 0.21+0.03+0.51=0.75

7. Conclusion

The result shows that this device is compliance with the exposure limits in 47 CFR §1.1310.

***** End of Report *****