




**Test Mode** | Mode 1, Band 4


Test Mode : 1TX 11a CH157 6Mbps  
 Voltage : From Adapter(AC 120V/60Hz)  
 Pol : Vertical

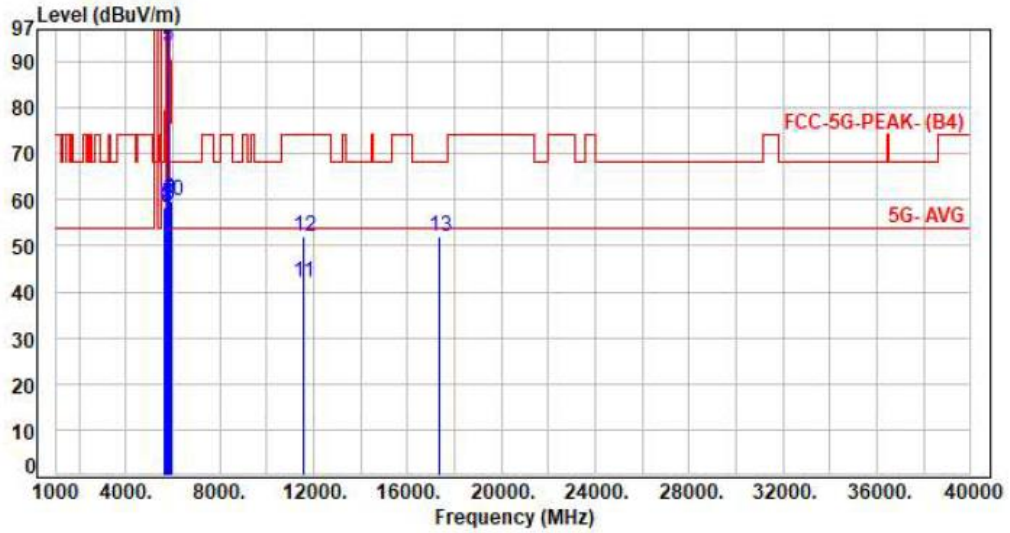

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 0.31        | 57.92          | 58.23          | 68.20          | -9.97       | Peak     | 114         | 317           | P   |
| 2   | 5700.00         | 0.61        | 58.17          | 58.78          | 105.20         | -46.42      | Peak     | 114         | 317           | P   |
| 3   | 5720.00         | 0.64        | 57.64          | 58.28          | 110.80         | -52.52      | Peak     | 114         | 317           | P   |
| 4   | 5725.00         | 0.66        | 57.81          | 58.47          | 122.20         | -63.73      | Peak     | 114         | 317           | P   |
| 5   | 5785.00         | 0.70        | 92.71          | 93.41          | 200.00         | -106.59     | Average  | 114         | 317           | P   |
| 6   | 5785.00         | 0.70        | 103.33         | 104.03         | 200.00         | -95.97      | Peak     | 114         | 317           | P   |
| 7   | 5850.00         | 0.80        | 59.06          | 59.86          | 122.20         | -62.34      | Peak     | 114         | 317           | P   |
| 8   | 5855.00         | 0.79        | 58.39          | 59.18          | 110.80         | -51.62      | Peak     | 114         | 317           | P   |
| 9   | 5875.00         | 0.80        | 59.29          | 60.09          | 105.20         | -45.11      | Peak     | 114         | 317           | P   |
| 10  | 5925.00         | 0.80        | 58.77          | 59.57          | 68.20          | -8.63       | Peak     | 114         | 317           | P   |
| 11  | 11570.00        | 5.45        | 36.50          | 41.95          | 54.00          | -12.05      | Average  | 100         | 252           | P   |
| 12  | 11570.00        | 5.45        | 46.39          | 51.84          | 74.00          | -22.16      | Peak     | 100         | 252           | P   |
| 13  | 17355.00        | 5.46        | 46.64          | 52.10          | 68.20          | -16.10      | Peak     | 100         | 154           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor




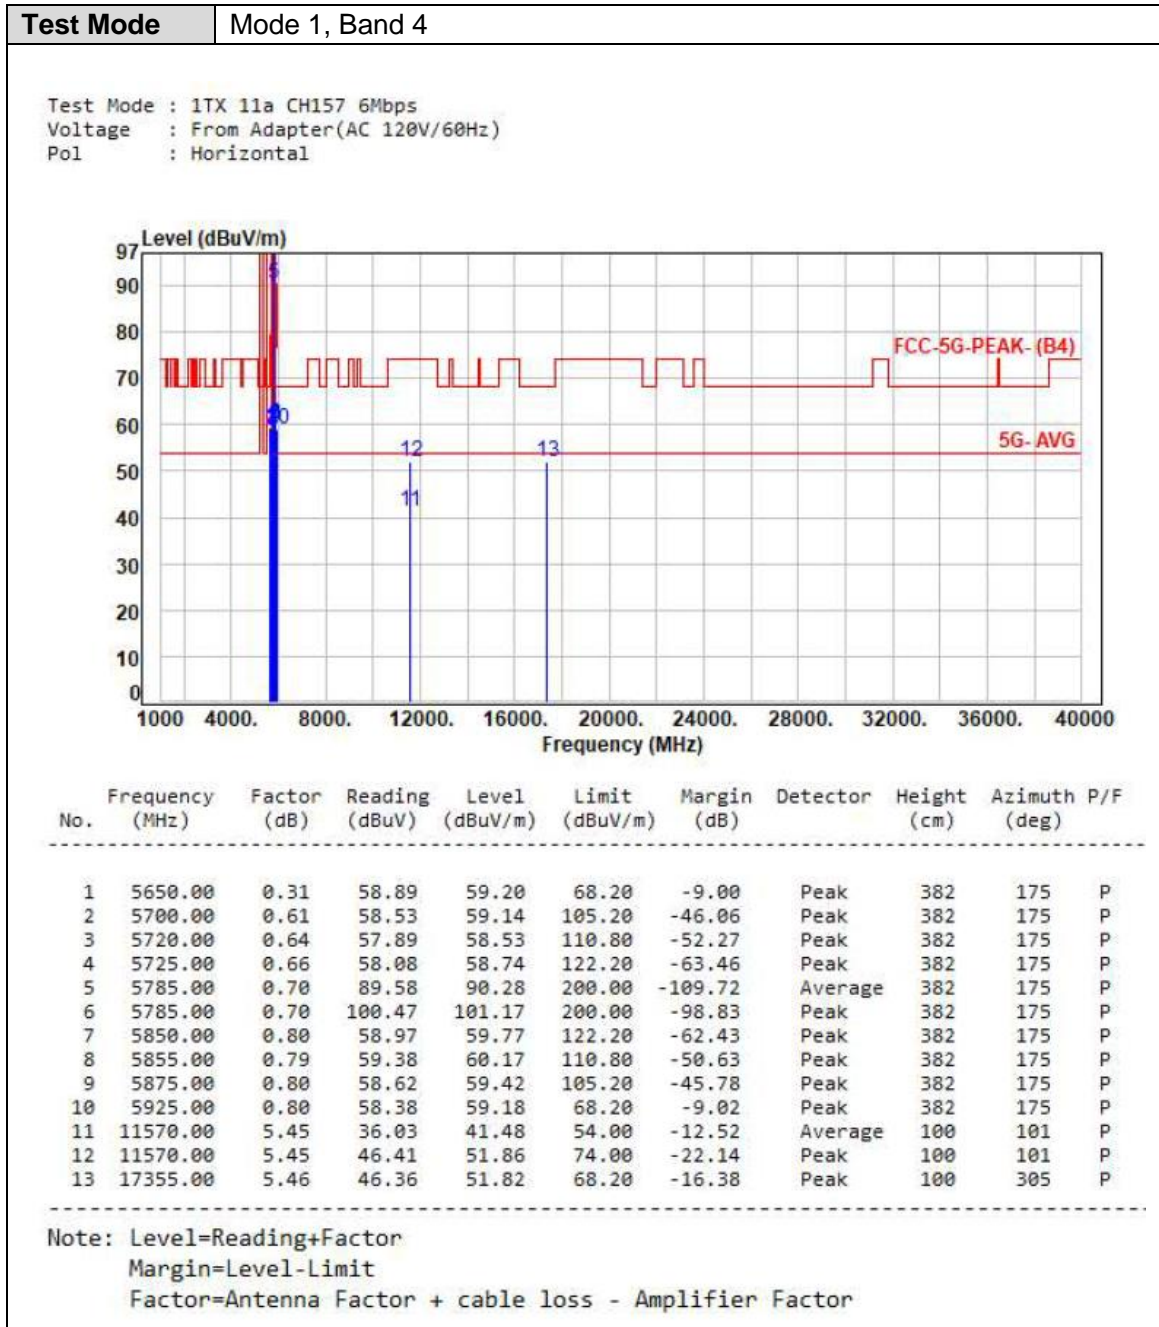



Test Mode | Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

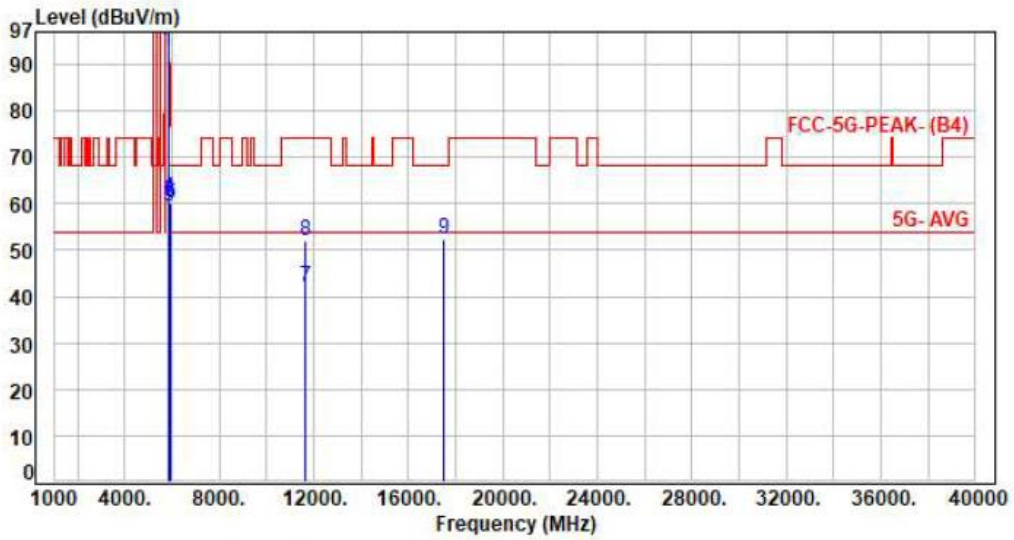

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 0.75        | 92.14          | 92.89          | 200.00         | -107.11     | Average  | 100         | 316           | P   |
| 2   | 5825.00         | 0.75        | 101.87         | 102.62         | 200.00         | -97.38      | Peak     | 100         | 316           | P   |
| 3   | 5850.00         | 0.80        | 59.87          | 60.67          | 122.20         | -61.53      | Peak     | 100         | 316           | P   |
| 4   | 5855.00         | 0.79        | 60.47          | 61.26          | 110.80         | -49.54      | Peak     | 100         | 316           | P   |
| 5   | 5875.00         | 0.80        | 58.59          | 59.39          | 105.20         | -45.81      | Peak     | 100         | 316           | P   |
| 6   | 5925.00         | 0.80        | 59.22          | 60.02          | 68.20          | -8.18       | Peak     | 100         | 316           | P   |
| 7   | 11650.00        | 5.42        | 36.70          | 42.12          | 54.00          | -11.88      | Average  | 100         | 254           | P   |
| 8   | 11650.00        | 5.42        | 46.48          | 51.90          | 74.00          | -22.10      | Peak     | 100         | 254           | P   |
| 9   | 17475.00        | 5.50        | 46.74          | 52.24          | 68.20          | -15.96      | Peak     | 100         | 151           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor

