



FCC RADIO TEST REPORT

Applicant : LITE-ON Technology Corp.
Address : Bldg. C, 90, Chien 1 Rd., Chung-Ho, New Taipei City,
 23585, Taiwan
Equipment : Access Point
Model No. : WP8722, WP8722-BT
Trade Name : LITE-ON
FCC ID : PPQ-WP8722

I HEREBY CERTIFY THAT :

The sample was received on Dec. 27, 2019 and the testing was completed on Mar. 10, 2020 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	13
4.1 Antenna Construction and Directional Gain	13
5. Test of AC Power Line Conducted Emission	14
5.1 Test Limit	14
5.2 Test Procedures	14
5.3 Typical Test Setup	15
5.4 Test Result and Data.....	16
5.5 Test Photographs	20
6. Test of Radiated Spurious Emission.....	22
6.1 Test Limit	22
6.2 Test Procedures	22
6.3 Typical Test Setup	23
6.4 Test Result and Data (9KHz ~ 30MHz)	25
6.5 Test Result and Data (30MHz ~ 1GHz).....	25
6.6 Test Result and Data (1GHz ~ 25GHz).....	29
6.7 Restricted Bands of Operation	53
6.8 Test Photographs (30MHz ~ 1GHz)	54
6.9 Test Photographs (1GHz ~ 25GHz)	56
7. Test of Conducted Spurious Emission	58
7.1 Test Limit	58
7.2 Test Procedure	58
7.3 Test Setup Layout	58
7.4 Test Result and Data.....	58
8. On Time, Duty Cycle and Measurement methods	75
8.1 Test Limit	75
8.2 Test Procedure	75
8.3 Test Setup Layout	75
8.4 Test Result and Data.....	75
9. 6dB Bandwidth Measurement Data.....	77
9.1 Test Limit	77
9.2 Test Procedures	77
9.3 Test Setup Layout	77



9.4	Test Result and Data	77
10.	Maximum Peak and Average Output Power	82
10.1	Test Limit	82
10.2	Test Procedures	82
10.3	Test Setup Layout	82
10.4	Test Result and Data	83
11.	Power Spectral Density	84
11.1	Test Limit	84
11.2	Test Procedures	84
11.3	Test Setup Layout	84
11.4	Test Result and Data	84
12.	Radio Frequency Exposure	89
12.1	Applicable Standards	89
12.2	EUT Specification	89
12.3	Test Results	90
12.4	Calculation	90
12.5	Maximum Permissible Exposure	91



History of this test report



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak and Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has lowered the uncertainty risk of test equipment, environment, and staff technicians according to ISO-IEC17025. Therefore we define test result as compliant when it complies with the standard without further evaluation of test result uncertainty.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD1912251).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment

Frequency Range	802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5725-5850MHz
Modulation Type	802.11b: CCK, DQPSK, DBPSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	PIFA Antenna
Antenna Gain	2400-2483.5MHz: ANT A: 4.6dBi, ANT B: 4.5dBi 5150-5250MHz: ANT A: 5.1dBi, ANT B: 5.3dBi 5725-5850MHz: ANT A: 5.1dBi, ANT B: 5.3dBi

Note: For more details, please refer to the User's manual of the EUT.

Difference description

Model No.	Remark
WP8722	
WP8722-BT	Market segmentation.

Antenna list:

Antenna Number	Brand Name	Model Name	Ant. Type	Connector	Support	Max Peak Gain	Antenna Gain includes Cable loss
2G1	Walsin	RFMTA340705IMAB901	Dipole	U.FL	WIFI	2.4G: 4.6dBi	Yes
2G2	Walsin	RFMTA340716IMAB901	Dipole	U.FL	WIFI	2.4G: 4.5dBi	Yes
5G1	Walsin	RFMTA400817IM5B901	Dipole	U.FL	WIFI	5G: 5.1dBi	Yes
5G2	Walsin	RFMTA400808IM5B901	Dipole	U.FL	WIFI	5G: 5.3dBi	Yes
2G1	LYNwave	ALX20M-052AA0-00	Dipole	U.FL	WIFI	2.4G: 4.6dBi	Yes
2G2	LYNwave	ALX20M-052AA0-01	Dipole	U.FL	WIFI	2.4G: 4.5dBi	Yes
5G1	LYNwave	ALX20M-092AA0-00	Dipole	U.FL	WIFI	5G: 5.1dBi	Yes
5G2	LYNwave	ALX20M-092AA0-01	Dipole	U.FL	WIFI	5G: 5.3dBi	Yes



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels marked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Remote workstation and EUT for RF test. The Remote workstation included Notebook.
- c. An executive program, "ART2-GUI ver. 2.3" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps), Power from Adapter
2	802.11g (6Mbps), Power from Adapter
3	802.11n HT20 (6.5Mbps), Power from Adapter
4	802.11n HT40 (13.5Mbps), Power from Adapter
5	802.11b (1Mbps), Power from PoE
6	802.11g (6Mbps), Power from PoE
7	802.11n HT20 (6.5Mbps), Power from PoE
8	802.11n HT40 (13.5Mbps), Power from PoE

caused "Test Mode 2, 6" generated the worst case, it was reported as the final data.

Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps), Power from Adapter
2	802.11g (6Mbps), Power from Adapter
3	802.11n HT20 (6.5Mbps), Power from Adapter
4	802.11n HT40 (13.5Mbps), Power from Adapter
5	802.11b (1Mbps), Power from PoE
6	802.11g (6Mbps), Power from PoE
7	802.11n HT20 (6.5Mbps), Power from PoE
8	802.11n HT40 (13.5Mbps), Power from PoE

caused "Test Mode 2, 6" generated the worst case, it was reported as the final data.

Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 1~4" generated the worst case, they were reported as the final data.



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Adapter	APD	WB-12G12FU	1.5m / NS	N/A
RJ45 Cable	N/A	N/A	1.2m / NS	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Adapter	APD	WB-12G12FU	1.5m / NS	N/A
POE	Bluewave	JS-100GT	N/A	N/A
RJ45 Cable	N/A	N/A	15m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Adapter	APD	WB-12G12FU	1.5m / NS	N/A
POE	Bluewave	JS-100GT	N/A	N/A
RJ45 Cable	N/A	N/A	1.2m / NS	N/A
RJ45 Cable	N/A	N/A	1.2m / NS	N/A



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881				
	FCC	TW1079, TW1439			
	IC	4934E-1, 4934E-2			
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz			
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz				
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.				

Test Item	Test Site	Finish Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2020/03/09	22°C / 63%	Nick Guan
Radiated Emissions	3M02-NK	2020/03/10	24°C / 56%	Vic Yeh
AC Power Line Conducted Emission	CON01-NK	2020/02/29	22°C / 49%	Leon Huang

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±1.60dB
Radiated Spurious Emission(9KHz~30MHz)	±3.405dB
Radiated Spurious Emission(30MHz~1GHz)	±5.326dB
Radiated Spurious Emission(1GHz~25GHz)	±5.918dB
Conducted Spurious Emission	±2.156dB
6dB Bandwidth	±4.401%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.41%
Peak Output Power(Conducted Power Meter)	±1.31dB
Dwell Time	±0.11%
Power Spectral Density	±2.146dB
Duty Cycle	±0.17%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2019/09/24	2020/09/23
Bilog Antenna	Schwarzbeck	VULB9168	369	2019/03/29	2020/03/28
Active Loop Antenna	EMCO	6507	40855	2019/05/24	2020/05/23
Horn Antenna	EMCO	3115	31589	2019/04/01	2020/03/31
Horn Anrenna	EMCO	3116	31974	2019/09/17	2020/09/16
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2019/05/14	2020/05/13
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2019/07/22	2020/07/21
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Preamplifier	EM Electronics corp.	EM330	60660	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2019/09/20	2020/09/19
Preamplifier	Agilent	8449B	3008A01954	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2019/11/07	2020/11/06
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2019/04/09	2020/04/08
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2019/09/20	2020/09/19
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805443/4	2019/05/20	2020/05/19
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805796/4	2019/05/20	2020/05/19
Cable-8m(1G-40G)	HUBER SUHNER	SUCOFLEX 100	805795/4	2019/05/20	2020/05/19
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2019/07/22	2020/07/21
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2019/08/02	2020/08/01
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Attenuator	KEYSIGHT	8491B	MY39250703	2019/09/12	2020/09/11
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2019/08/28	2020/08/27
Power Meter	Anritsu	ML2495A	1224005	2019/04/11	2020/04/10
Power Sensor	Anritsu	MA2411B	1207295	2019/04/09	2020/04/08



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2019/09/16	2020/09/15
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2019/03/15	2020/03/14
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2019/03/12	2020/03/11
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2019/03/14	2020/03/13
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	2.4GHz: ANT A: 4.6 dBi ; ANT B: 4.5 dBi 5150MHz-5250MHz: ANT A: 5.1 dBi ; ANT B: .5.3 dBi 5725MHz-5850MHz: ANT A: 5.1 dBi ; ANT B: 5.3 dBi

2412-2462MHz
For Power directional gain= $G_{ant} = 4.6 \text{ dBi}$ For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ = 7.56 (dBi)
5150MHz -5250MHz
For Power directional gain= $G_{ant} = 5.3 \text{ dBi}$ For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ = 8.21 (dBi)
5725MHz -5850MHz
For Power directional gain= $G_{ant} = 5.3 \text{ dBi}$ For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ = 8.21 (dBi)



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

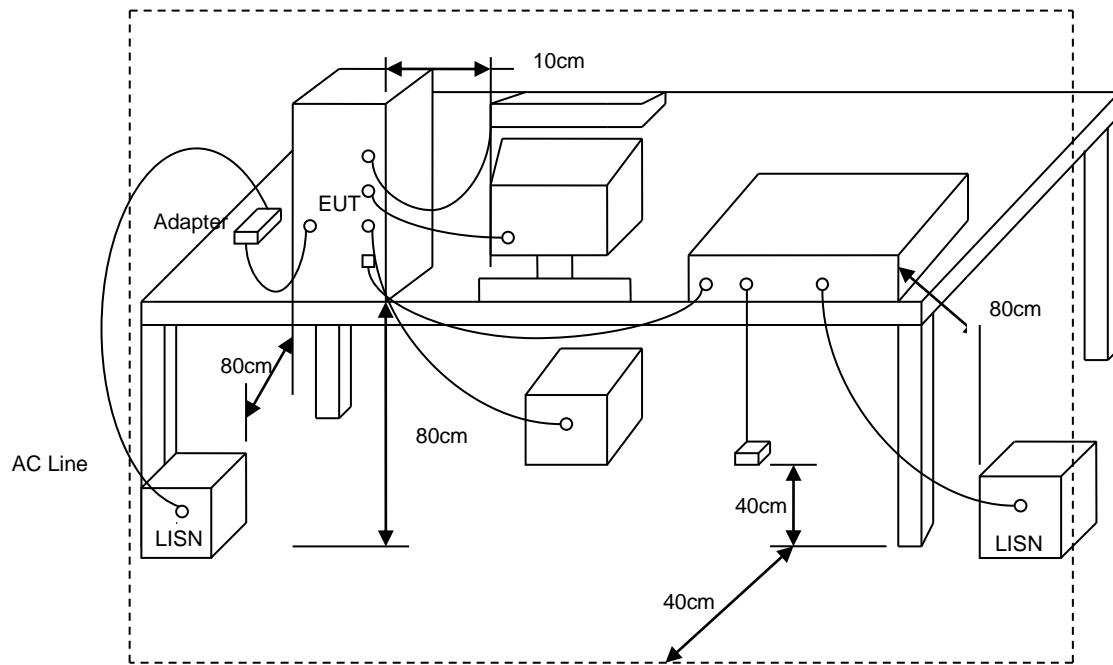



5.4 Test Result and Data

Power :	AC 120V / 60Hz	Pol/Phase :	LINE
Test Mode :	Mode 2, CH06	:	

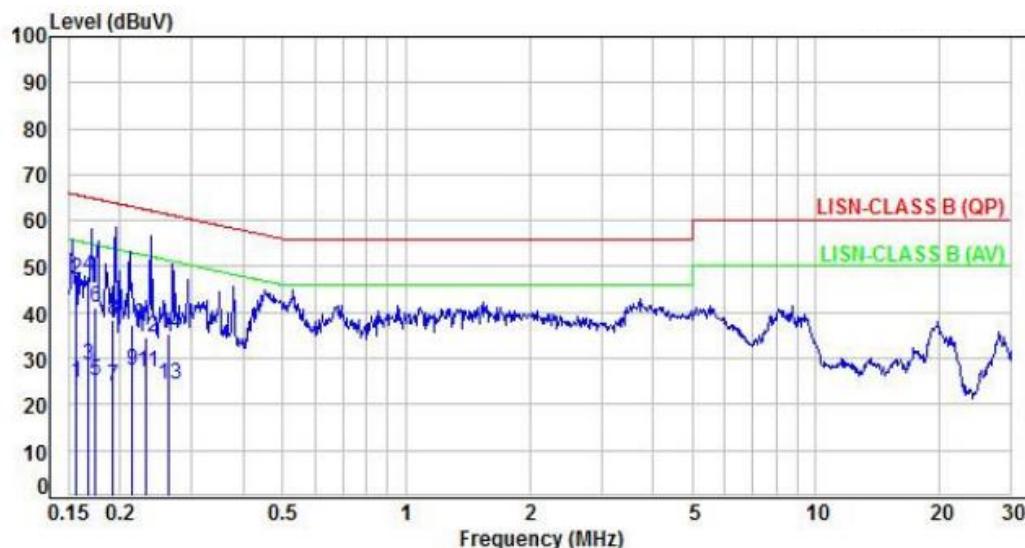


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.92	14.94	24.86	55.66	-30.80	Average	P
2	0.16	9.92	37.18	47.10	65.66	-18.56	QP	P
3	0.17	9.92	18.71	28.63	55.12	-26.49	Average	P
4	0.17	9.92	37.93	47.85	65.12	-17.27	QP	P
5	0.17	9.92	15.05	24.97	54.73	-29.76	Average	P
6	0.17	9.92	31.08	41.00	64.73	-23.73	QP	P
7	0.19	9.92	13.93	23.85	53.96	-30.11	Average	P
8	0.19	9.92	28.55	38.47	63.96	-25.49	QP	P
9	0.21	9.92	17.35	27.27	53.03	-25.76	Average	P
10	0.21	9.92	27.15	37.07	63.03	-25.96	QP	P
11	0.23	9.92	17.09	27.01	52.36	-25.35	Average	P
12	0.23	9.92	24.60	34.52	62.36	-27.84	QP	P
13	0.26	9.92	14.42	24.34	51.35	-27.01	Average	P
14	0.26	9.92	25.33	35.25	61.35	-26.10	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 120V / 60Hz	Pol/Phase :	NEUTRAL
Test Mode :	Mode 2, CH06	:	

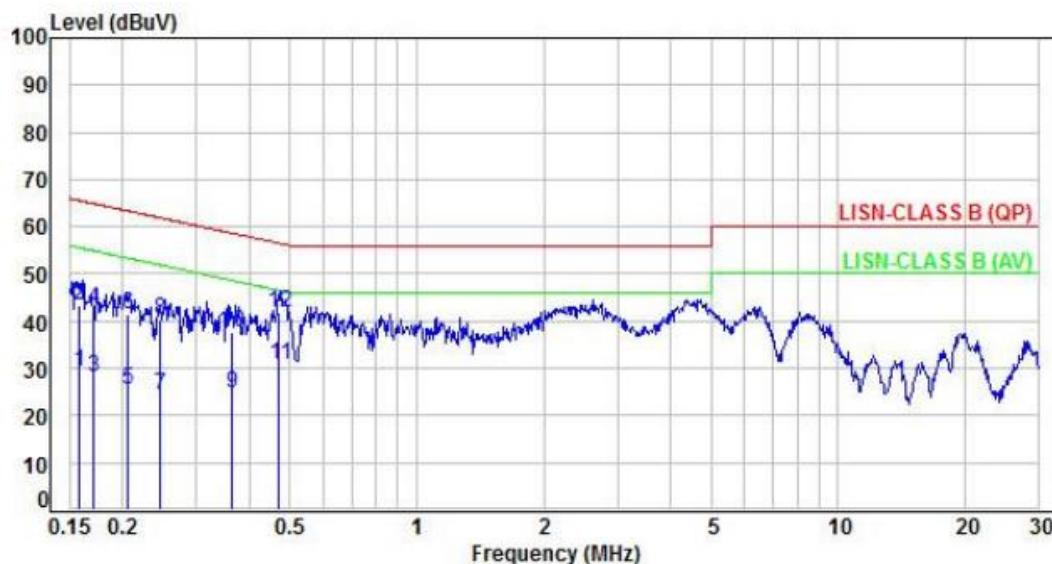

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.95	19.24	29.19	55.58	-26.39	Average	P
2	0.16	9.95	33.54	43.49	65.58	-22.09	QP	P
3	0.17	9.95	18.17	28.12	54.91	-26.79	Average	P
4	0.17	9.95	32.60	42.55	64.91	-22.36	QP	P
5	0.21	9.95	15.34	25.29	53.37	-28.08	Average	P
6	0.21	9.95	31.68	41.63	63.37	-21.74	QP	P
7	0.25	9.95	14.49	24.44	51.89	-27.45	Average	P
8	0.25	9.95	30.19	40.14	61.89	-21.75	QP	P
9	0.36	9.96	14.78	24.74	48.65	-23.91	Average	P
10	0.36	9.96	27.57	37.53	58.65	-21.12	QP	P
11	0.47	9.96	20.85	30.81	46.49	-15.68	Average	P
12	0.47	9.96	31.70	41.66	56.49	-14.83	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 120V / 60Hz	Pol/Phase :	LINE
Test Mode :	Mode 6, CH06	:	

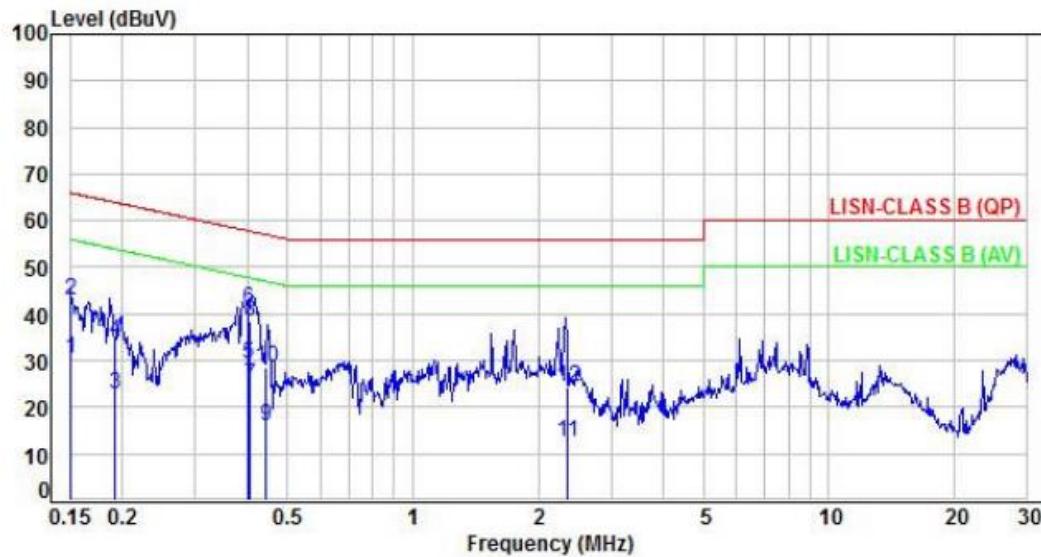

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.92	20.33	30.25	56.00	-25.75	Average	P
2	0.15	9.92	32.98	42.90	66.00	-23.10	QP	P
3	0.19	9.92	12.93	22.85	53.93	-31.08	Average	P
4	0.19	9.92	24.37	34.29	63.93	-29.64	QP	P
5	0.40	9.94	19.19	29.13	47.86	-18.73	Average	P
6	0.40	9.94	31.24	41.18	57.86	-16.68	QP	P
7	0.41	9.94	14.80	24.74	47.73	-22.99	Average	P
8	0.41	9.94	28.43	38.37	57.73	-19.36	QP	P
9	0.44	9.94	5.98	15.92	46.99	-31.07	Average	P
10	0.44	9.94	18.48	28.42	56.99	-28.57	QP	P
11	2.34	10.02	2.59	12.61	46.00	-33.39	Average	P
12	2.34	10.02	14.22	24.24	56.00	-31.76	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 120V / 60Hz	Pol/Phase :	NEUTRAL
Test Mode :	Mode 6, CH06	:	

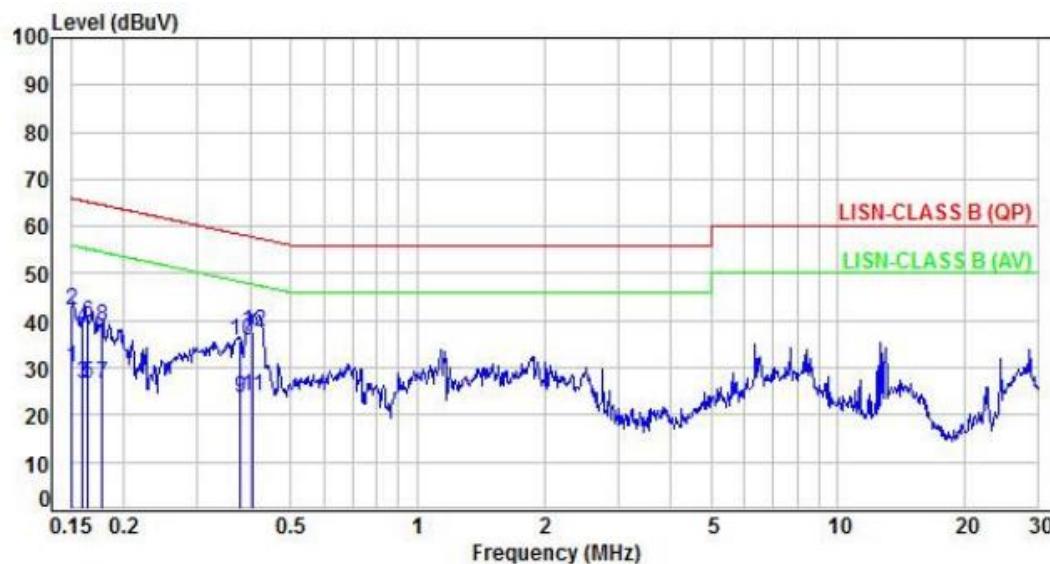

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.95	19.97	29.92	55.99	-26.07	Average	P
2	0.15	9.95	32.07	42.02	65.99	-23.97	QP	P
3	0.16	9.95	16.65	26.60	55.51	-28.91	Average	P
4	0.16	9.95	28.51	38.46	65.51	-27.05	QP	P
5	0.16	9.95	16.58	26.53	55.27	-28.74	Average	P
6	0.16	9.95	29.64	39.59	65.27	-25.68	QP	P
7	0.18	9.95	16.75	26.70	54.62	-27.92	Average	P
8	0.18	9.95	28.71	38.66	64.62	-25.96	QP	P
9	0.38	9.96	13.57	23.53	48.30	-24.77	Average	P
10	0.38	9.96	25.63	35.59	58.30	-22.71	QP	P
11	0.41	9.96	14.14	24.10	47.73	-23.63	Average	P
12	0.41	9.96	27.80	37.76	57.73	-19.97	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

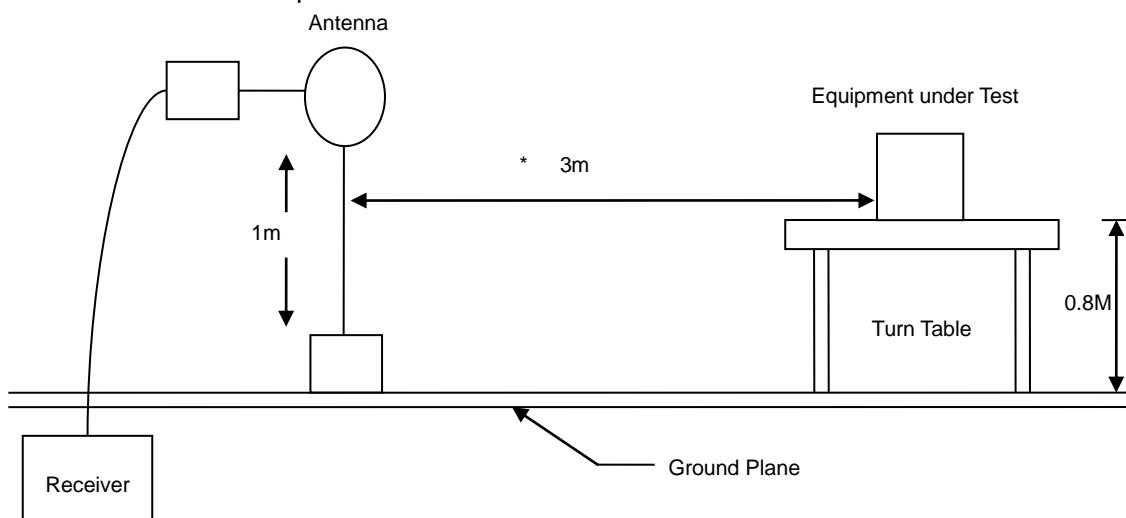

30MHz- 1GHz Test Setup

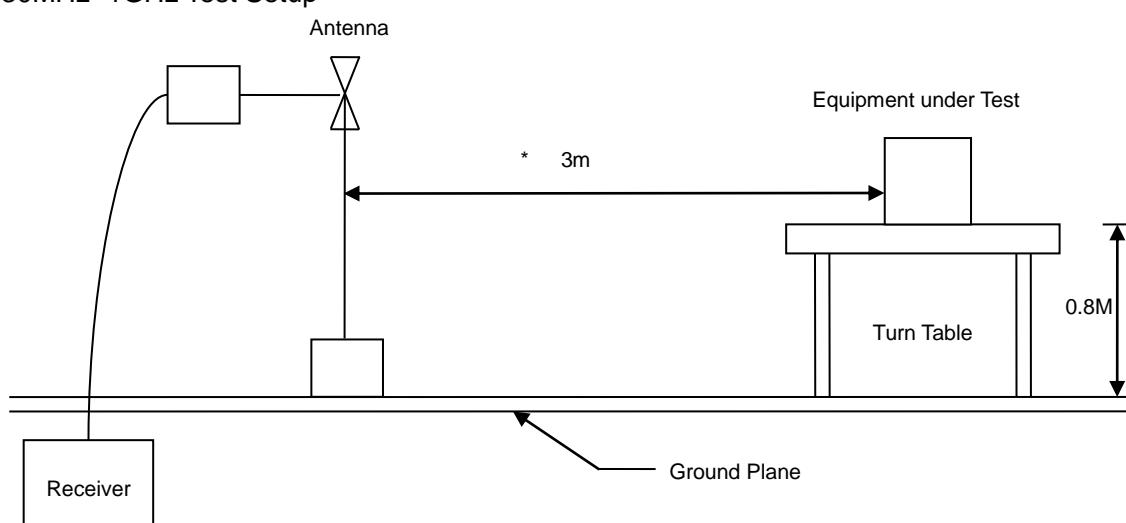

Above 1GHz Test Setup

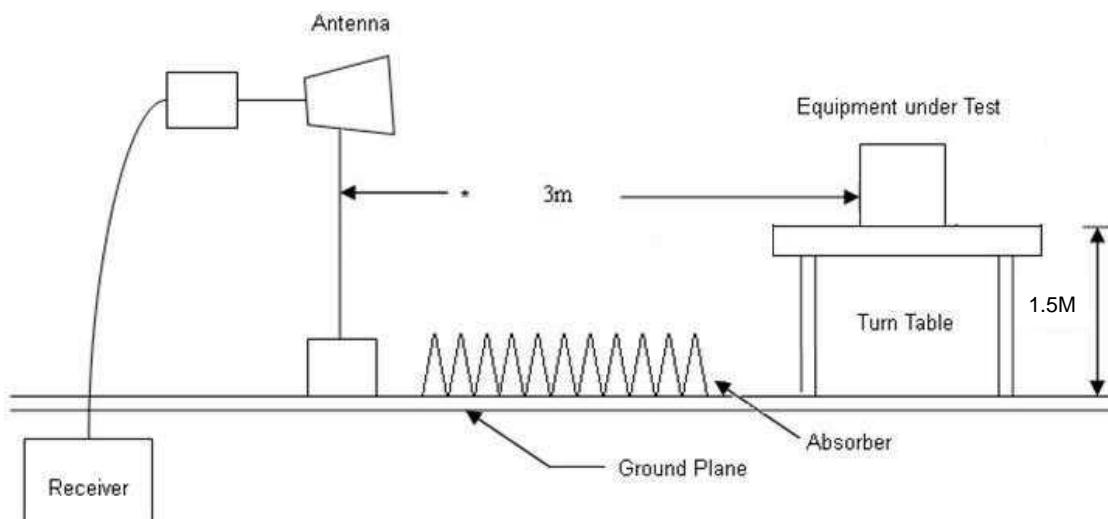




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH06	:	

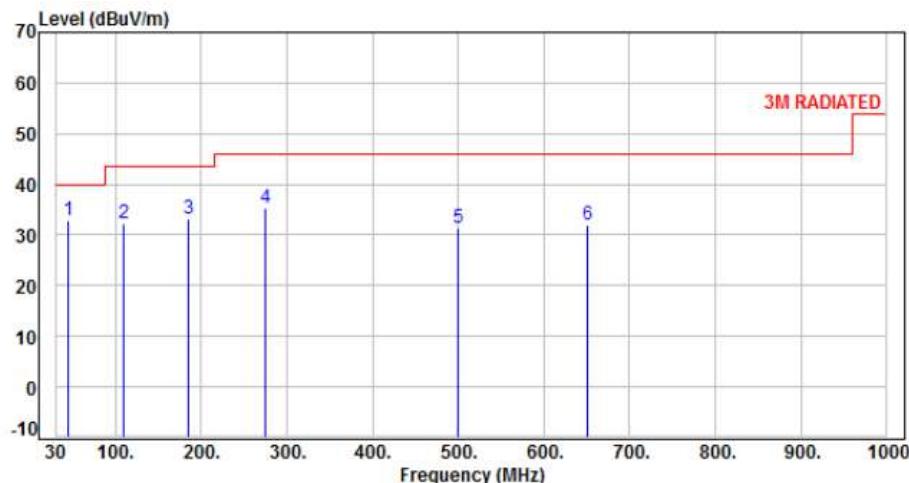

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	45.52	-9.33	42.17	32.84	40.00	-7.16	Peak	100	0	P
2	109.54	-12.50	44.68	32.18	43.50	-11.32	Peak	100	0	P
3	185.20	-11.29	44.47	33.18	43.50	-10.32	Peak	100	0	P
4	274.44	-9.21	44.54	35.33	46.00	-10.67	Peak	100	0	P
5	499.48	-3.59	34.99	31.40	46.00	-14.60	Peak	100	0	P
6	650.80	-0.63	32.63	32.00	46.00	-14.00	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH06	:	

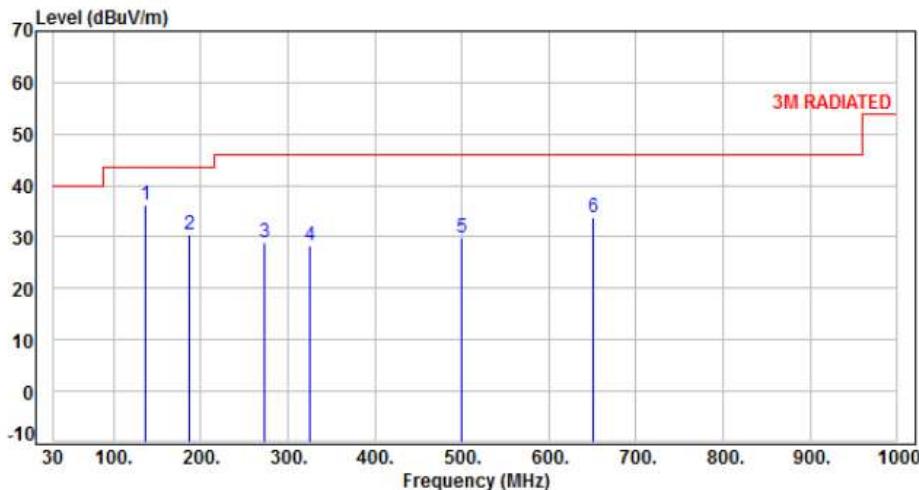

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	136.70	-10.15	46.27	36.12	43.50	-7.38	Peak	100	0	P
2	187.14	-11.39	41.83	30.44	43.50	-13.06	Peak	100	0	P
3	272.50	-9.31	38.26	28.95	46.00	-17.05	Peak	100	0	P
4	324.88	-7.63	35.89	28.26	46.00	-17.74	Peak	100	0	P
5	499.48	-3.59	33.32	29.73	46.00	-16.27	Peak	100	0	P
6	650.80	-0.63	34.47	33.84	46.00	-12.16	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 6, CH06	:	

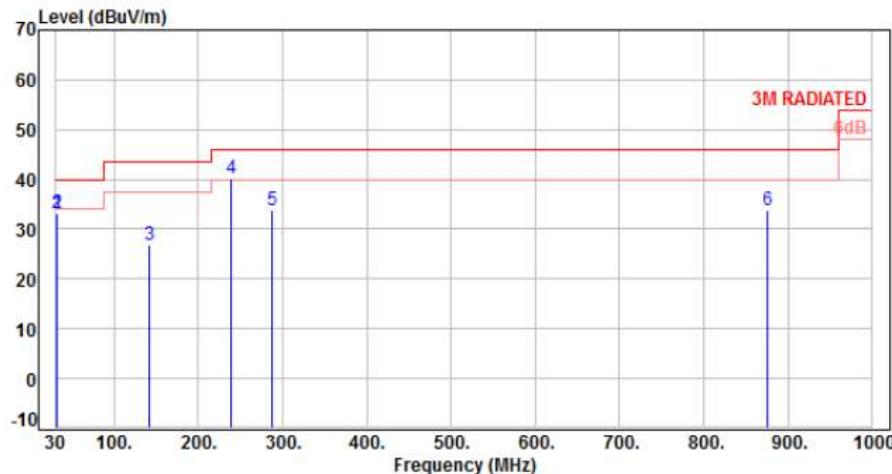


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	31.94	-10.25	43.43	33.18	40.00	-6.82	Peak	100	0	P
2	31.94	-10.25	43.43	33.18	40.00	-6.82	Peak	100	0	P
3	142.52	-9.67	36.54	26.87	43.50	-16.63	Peak	100	0	P
4	239.52	-10.60	50.67	40.07	46.00	-5.93	Peak	100	0	P
5	288.02	-8.86	42.57	33.71	46.00	-12.29	Peak	100	0	P
6	875.84	2.97	30.79	33.76	46.00	-12.24	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 6, CH06	:	

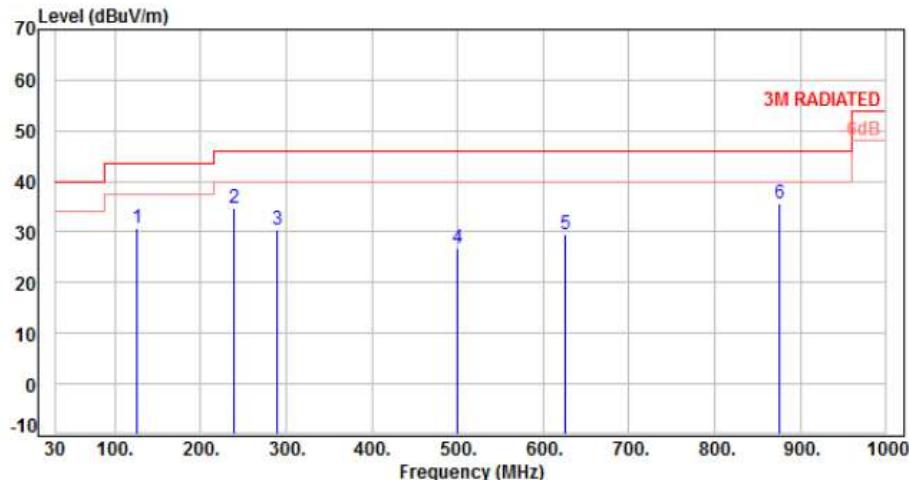

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)	P/F
1	125.86	-11.23	42.11	30.88	43.50	-12.62	Peak	100	0	P
2	239.41	-10.60	45.16	34.56	46.00	-11.44	Peak	100	0	P
3	288.51	-8.85	39.44	30.59	46.00	-15.41	Peak	100	0	P
4	499.63	-3.59	30.26	26.67	46.00	-19.33	Peak	100	0	P
5	625.85	-0.71	30.17	29.46	46.00	-16.54	Peak	100	0	P
6	875.16	2.97	32.52	35.49	46.00	-10.51	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH01	:	

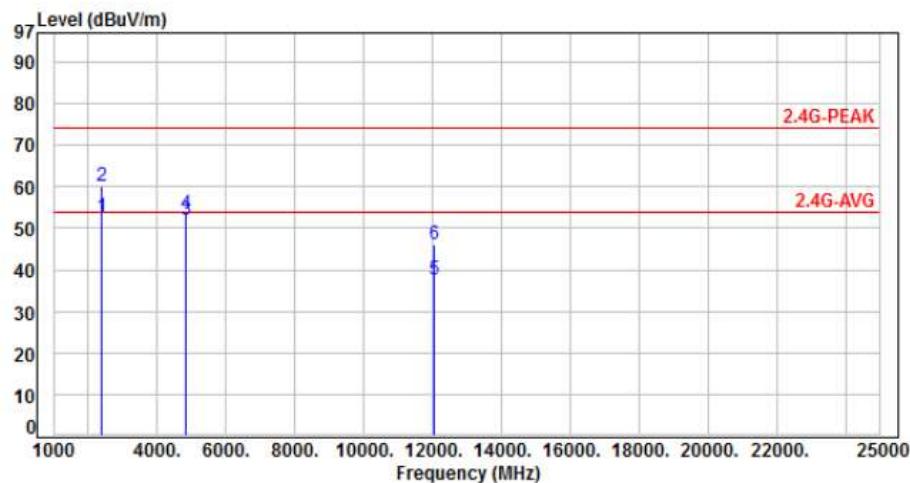

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	71.21	52.74	54.00	-1.26	Average	376	148	P
2	2390.00	-18.47	78.67	60.20	74.00	-13.80	Peak	376	148	P
3	4824.00	-12.33	64.17	51.84	54.00	-2.16	Average	100	137	P
4	4824.00	-12.33	65.84	53.51	74.00	-20.49	Peak	100	137	P
5	12060.00	-3.91	41.36	37.45	54.00	-16.55	Average	381	87	P
6	12060.00	-3.91	49.98	46.07	74.00	-27.93	Peak	381	87	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH01	:	

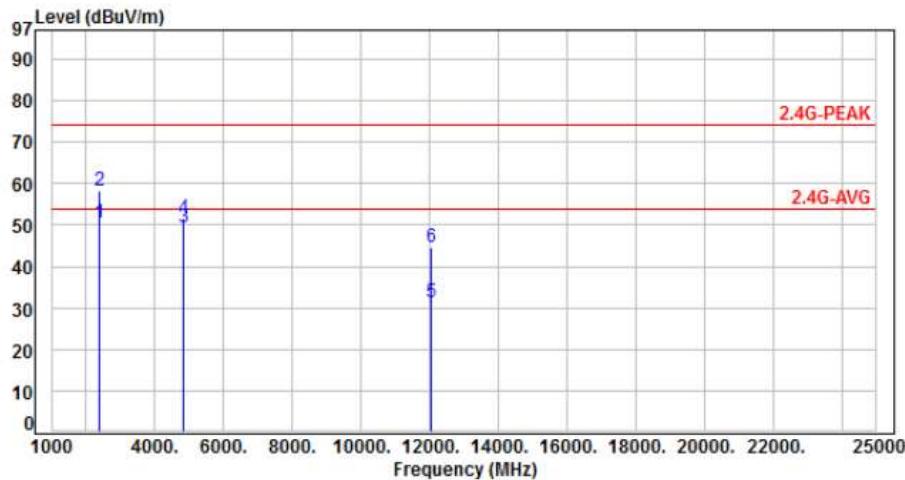

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	69.01	50.54	54.00	-3.46	Average	122	228	P
2	2390.00	-18.47	76.77	58.30	74.00	-15.70	Peak	122	228	P
3	4824.00	-12.33	61.89	49.56	54.00	-4.44	Average	393	280	P
4	4824.00	-12.33	63.85	51.52	74.00	-22.48	Peak	393	280	P
5	12060.00	-3.91	35.26	31.35	54.00	-22.65	Average	100	228	P
6	12060.00	-3.91	48.52	44.61	74.00	-29.39	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH06	:	

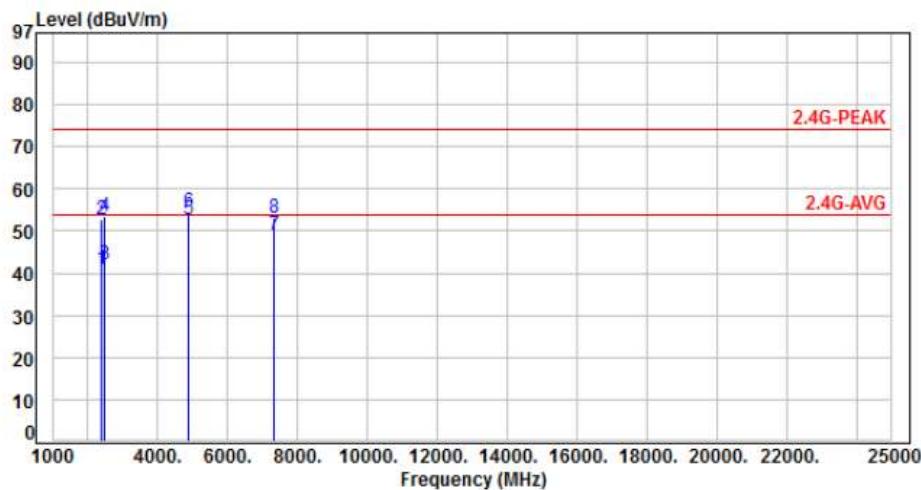

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	59.44	40.97	54.00	-13.03	Average	364	147	P
2	2390.00	-18.47	71.27	52.80	74.00	-21.20	Peak	364	147	P
3	2483.50	-18.15	60.19	42.04	54.00	-11.96	Average	364	147	P
4	2483.50	-18.15	71.51	53.36	74.00	-20.64	Peak	364	147	P
5	4874.00	-12.17	64.95	52.78	54.00	-1.22	Average	100	139	P
6	4874.00	-12.17	66.66	54.49	74.00	-19.51	Peak	100	139	P
7	7311.00	-8.14	57.17	49.03	54.00	-4.97	Average	352	329	P
8	7311.00	-8.14	61.21	53.07	74.00	-20.93	Peak	352	329	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH06	:	

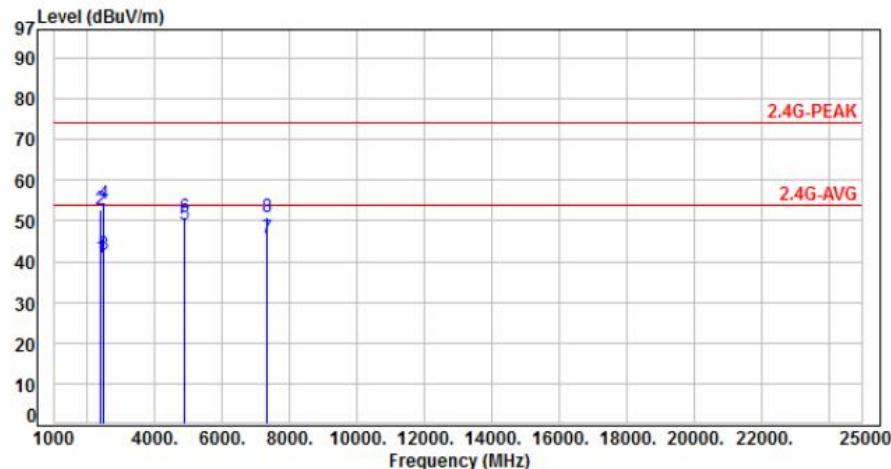

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	59.39	40.92	54.00	-13.08	Average	125	229	P
2	2390.00	-18.47	71.37	52.90	74.00	-21.10	Peak	125	229	P
3	2483.50	-18.15	59.89	41.74	54.00	-12.26	Average	125	229	P
4	2483.50	-18.15	72.30	54.15	74.00	-19.85	Peak	125	229	P
5	4874.00	-12.17	61.22	49.05	54.00	-4.95	Average	376	295	P
6	4874.00	-12.17	63.12	50.95	74.00	-23.05	Peak	376	295	P
7	7311.00	-8.14	54.05	45.91	54.00	-8.09	Average	345	336	P
8	7311.00	-8.14	59.19	51.05	74.00	-22.95	Peak	345	336	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH11	:	

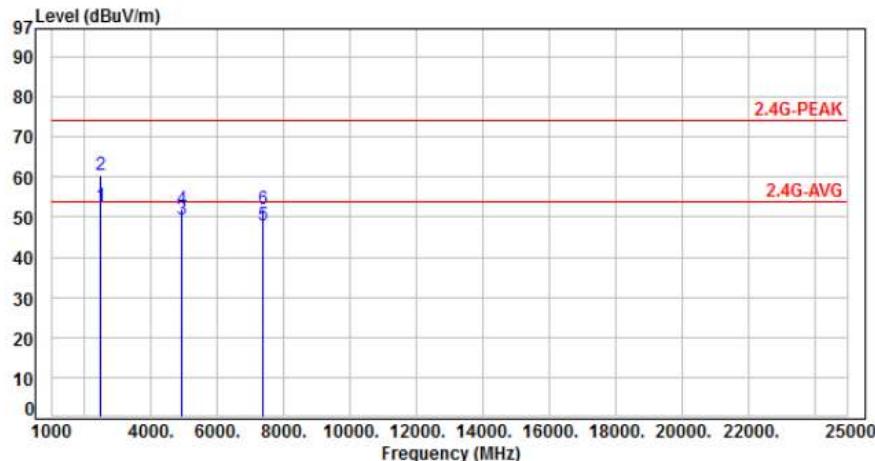


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	70.90	52.75	54.00	-1.25	Average	282	153	P
2	2483.50	-18.15	78.54	60.39	74.00	-13.61	Peak	282	153	P
3	4924.00	-12.06	61.38	49.32	54.00	-4.68	Average	103	139	P
4	4924.00	-12.06	63.88	51.82	74.00	-22.18	Peak	103	139	P
5	7386.00	-8.05	55.99	47.94	54.00	-6.06	Average	388	299	P
6	7386.00	-8.05	60.19	52.14	74.00	-21.86	Peak	388	299	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH11	:	

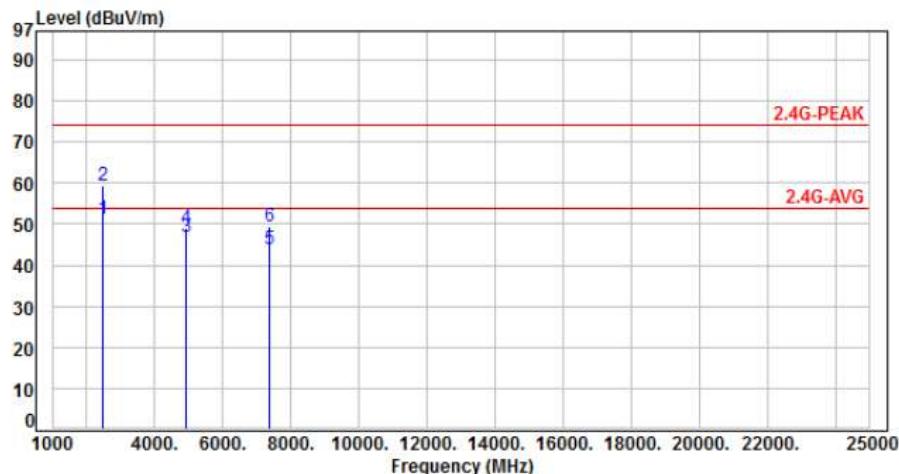


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	69.38	51.23	54.00	-2.77	Average	120	226	P
2	2483.50	-18.15	77.67	59.52	74.00	-14.48	Peak	120	226	P
3	4924.00	-12.06	58.80	46.74	54.00	-7.26	Average	397	291	P
4	4924.00	-12.06	61.14	49.08	74.00	-24.92	Peak	397	296	P
5	7386.00	-8.05	51.99	43.94	54.00	-10.06	Average	333	335	P
6	7386.00	-8.05	57.45	49.40	74.00	-24.60	Peak	333	335	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH01	:	

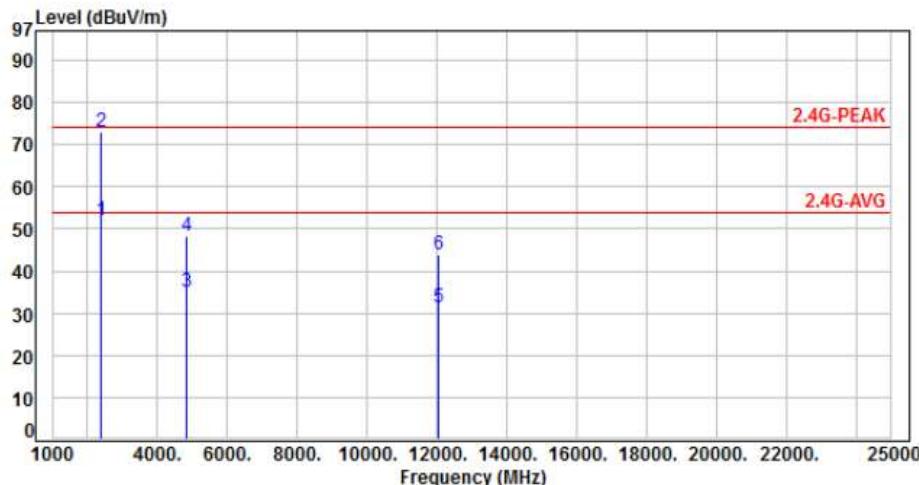


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	70.36	51.89	54.00	-2.11	Average	275	22	P
2	2390.00	-18.47	91.32	72.85	74.00	-1.15	Peak	275	22	P
3	4824.00	-12.33	47.37	35.04	54.00	-18.96	Average	100	227	P
4	4824.00	-12.33	60.74	48.41	74.00	-25.59	Peak	100	227	P
5	12060.00	-3.91	35.10	31.19	54.00	-22.81	Average	100	118	P
6	12060.00	-3.91	47.90	43.99	74.00	-30.01	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH01	:	

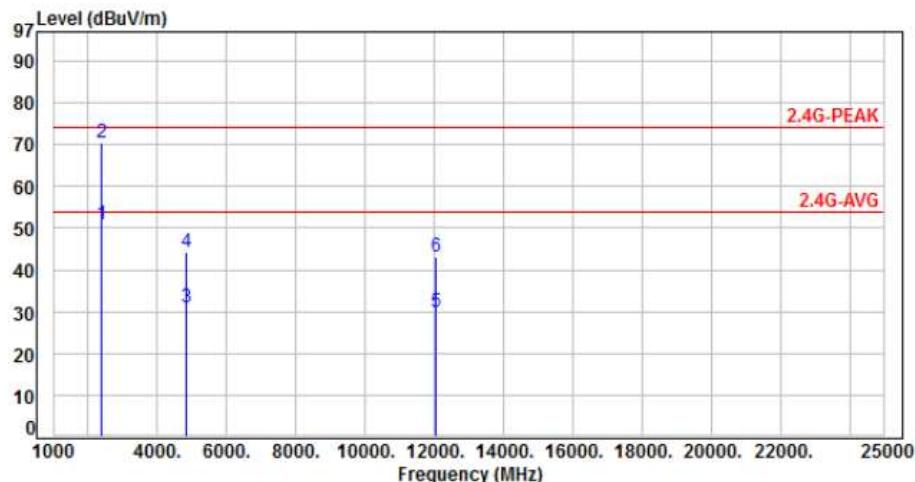

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	69.51	51.04	54.00	-2.96	Average	232	346	P
2	2390.00	-18.47	89.01	70.54	74.00	-3.46	Peak	232	346	P
3	4824.00	-12.33	43.21	30.88	54.00	-23.12	Average	389	277	P
4	4824.00	-12.33	56.46	44.13	74.00	-29.87	Peak	389	277	P
5	12060.00	-3.91	33.82	29.91	54.00	-24.09	Average	100	303	P
6	12060.00	-3.91	46.90	42.99	74.00	-31.01	Peak	100	303	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH06	:	

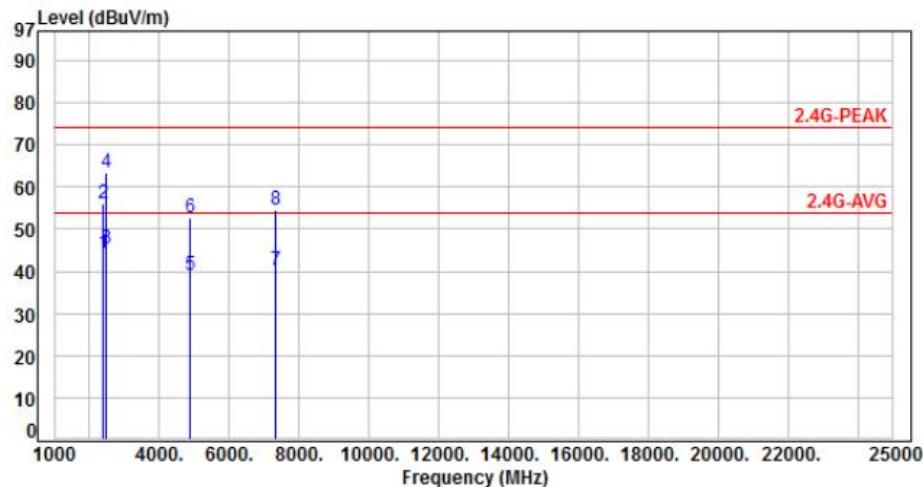

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	62.63	44.16	54.00	-9.84	Average	275	22	P
2	2390.00	-18.47	74.61	56.14	74.00	-17.86	Peak	275	22	P
3	2483.50	-18.15	63.41	45.26	54.00	-8.74	Average	275	22	P
4	2483.50	-18.15	81.66	63.51	74.00	-10.49	Peak	275	22	P
5	4874.00	-12.17	51.22	39.05	54.00	-14.95	Average	100	136	P
6	4874.00	-12.17	64.73	52.56	74.00	-21.44	Peak	100	136	P
7	7311.00	-8.14	48.39	40.25	54.00	-13.75	Average	396	155	P
8	7311.00	-8.14	62.64	54.50	74.00	-19.50	Peak	396	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH06	:	

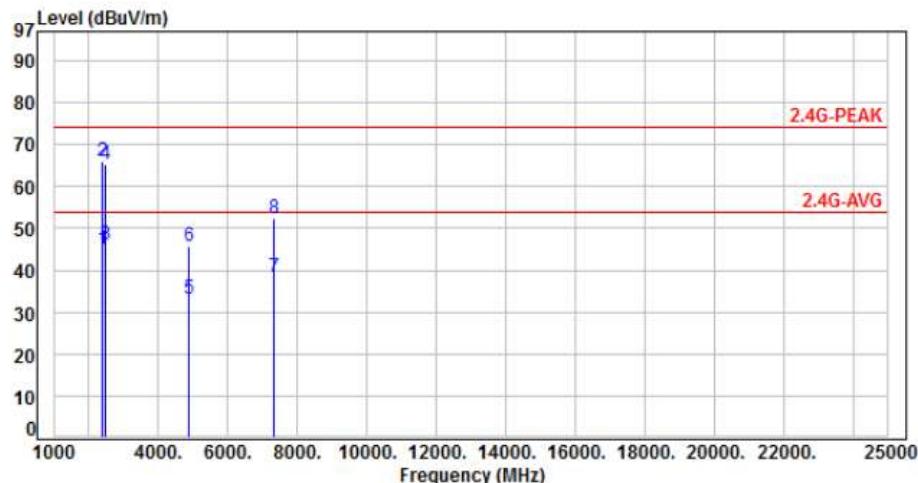

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	63.53	45.06	54.00	-8.94	Average	270	339	P
2	2390.00	-18.47	84.37	65.90	74.00	-8.10	Peak	270	339	P
3	2483.50	-18.15	64.37	46.22	54.00	-7.78	Average	270	339	P
4	2483.50	-18.15	83.50	65.35	74.00	-8.65	Peak	270	339	P
5	4874.00	-12.17	45.26	33.09	54.00	-20.91	Average	392	234	P
6	4874.00	-12.17	58.06	45.89	74.00	-28.11	Peak	392	234	P
7	7311.00	-8.14	46.49	38.35	54.00	-15.65	Average	352	336	P
8	7311.00	-8.14	60.66	52.52	74.00	-21.48	Peak	358	249	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH11	:	

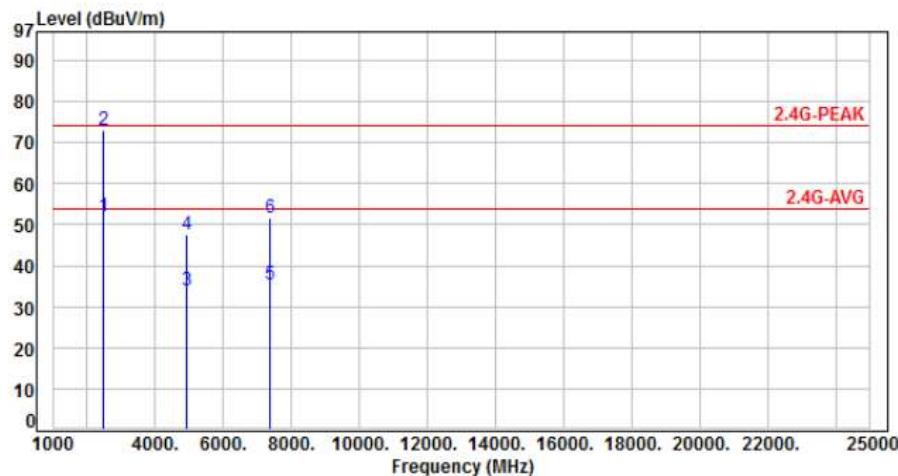

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	70.00	51.85	54.00	-2.15	Average	328	136	P
2	2483.50	-18.15	91.02	72.87	74.00	-1.13	Peak	328	136	P
3	4924.00	-12.06	46.03	33.97	54.00	-20.03	Average	100	229	P
4	4924.00	-12.06	59.65	47.59	74.00	-26.41	Peak	100	229	P
5	7386.00	-8.05	43.47	35.42	54.00	-18.58	Average	387	132	P
6	7386.00	-8.05	59.69	51.64	74.00	-22.36	Peak	387	132	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH11	:	

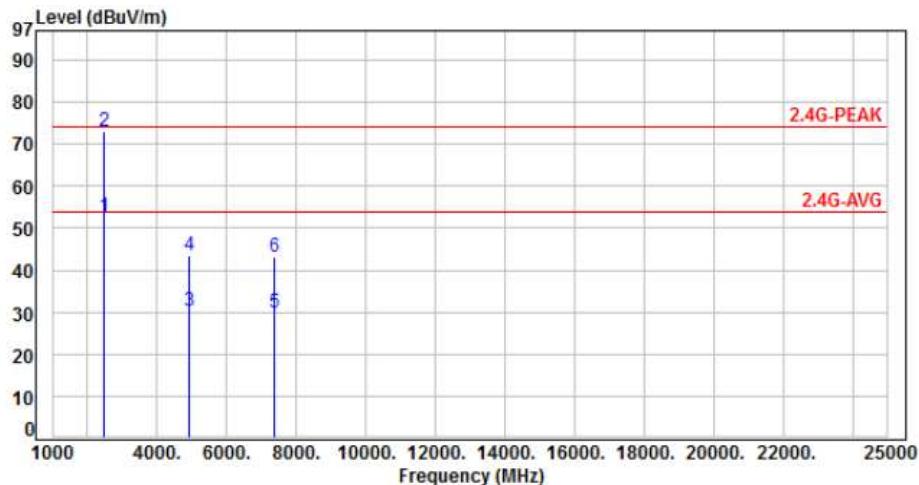


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	70.78	52.63	54.00	-1.37	Average	249	335	P
2	2483.50	-18.15	91.01	72.86	74.00	-1.14	Peak	249	335	P
3	4924.00	-12.06	42.16	30.10	54.00	-23.90	Average	386	274	P
4	4924.00	-12.06	55.67	43.61	74.00	-30.39	Peak	386	274	P
5	7386.00	-8.05	38.08	30.03	54.00	-23.97	Average	367	252	P
6	7386.00	-8.05	51.04	42.99	74.00	-31.01	Peak	367	252	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH01	:	

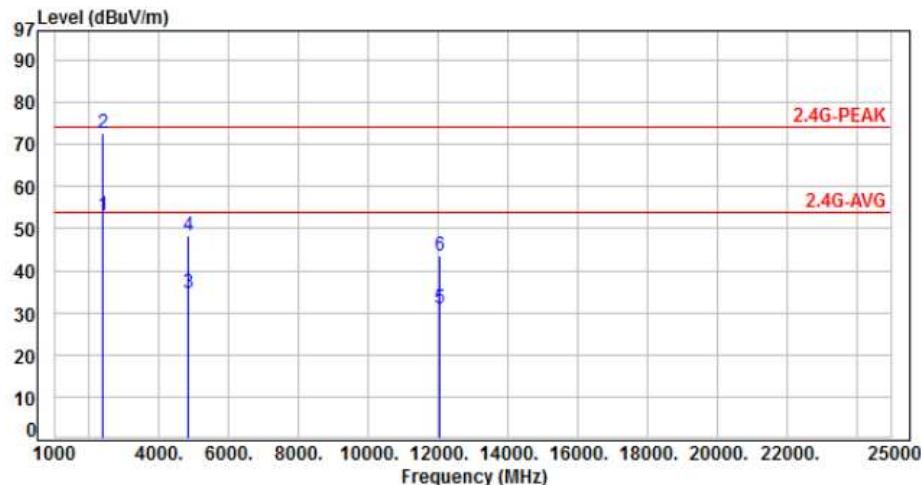

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	71.45	52.98	54.00	-1.02	Average	342	160	P
2	2390.00	-18.47	91.02	72.55	74.00	-1.45	Peak	342	160	P
3	4824.00	-12.33	47.15	34.82	54.00	-19.18	Average	100	236	P
4	4824.00	-12.33	60.47	48.14	74.00	-25.86	Peak	100	236	P
5	12060.00	-3.91	34.86	30.95	54.00	-23.05	Average	100	122	P
6	12060.00	-3.91	47.46	43.55	74.00	-30.45	Peak	100	122	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH01	:	

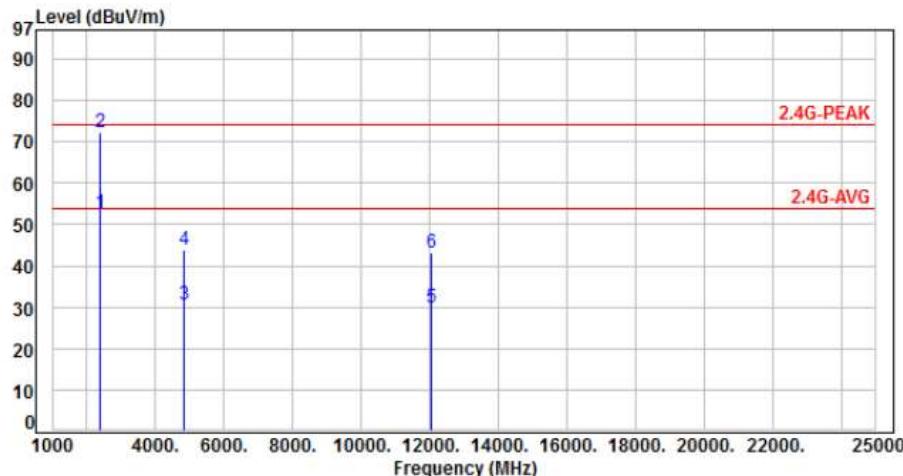

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	71.26	52.79	54.00	-1.21	Average	240	181	P
2	2390.00	-18.47	90.90	72.43	74.00	-1.57	Peak	240	181	P
3	4824.00	-12.33	43.11	30.78	54.00	-23.22	Average	382	264	P
4	4824.00	-12.33	56.21	43.88	74.00	-30.12	Peak	382	264	P
5	12060.00	-3.91	33.76	29.85	54.00	-24.15	Average	100	311	P
6	12060.00	-3.91	47.05	43.14	74.00	-30.86	Peak	100	311	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH06	:	

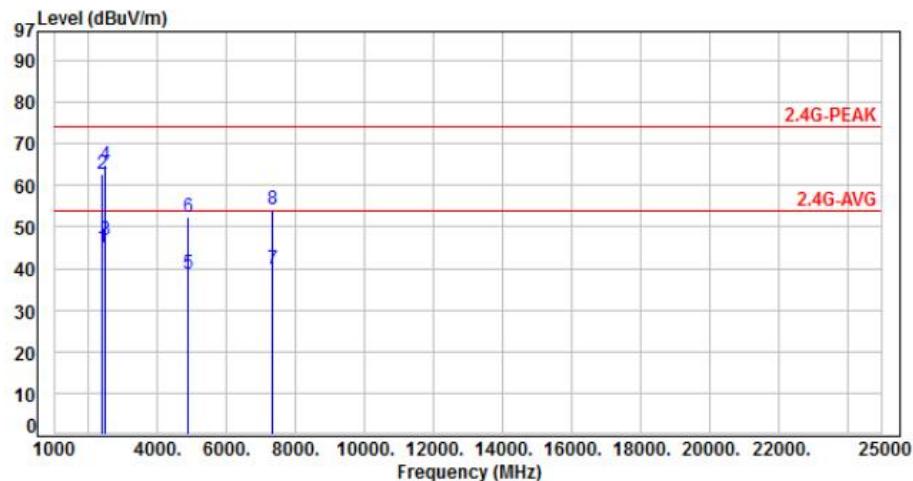

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	63.30	44.83	54.00	-9.17	Average	311	164	P
2	2390.00	-18.47	81.32	62.85	74.00	-11.15	Peak	311	164	P
3	2483.50	-18.15	65.11	46.96	54.00	-7.04	Average	311	145	P
4	2483.50	-18.15	83.00	64.85	74.00	-9.15	Peak	311	145	P
5	4874.00	-12.17	51.06	38.89	54.00	-15.11	Average	100	132	P
6	4874.00	-12.17	64.58	52.41	74.00	-21.59	Peak	100	132	P
7	7311.00	-8.14	48.15	40.01	54.00	-13.99	Average	392	148	P
8	7311.00	-8.14	62.46	54.32	74.00	-19.68	Peak	392	148	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH06	:	

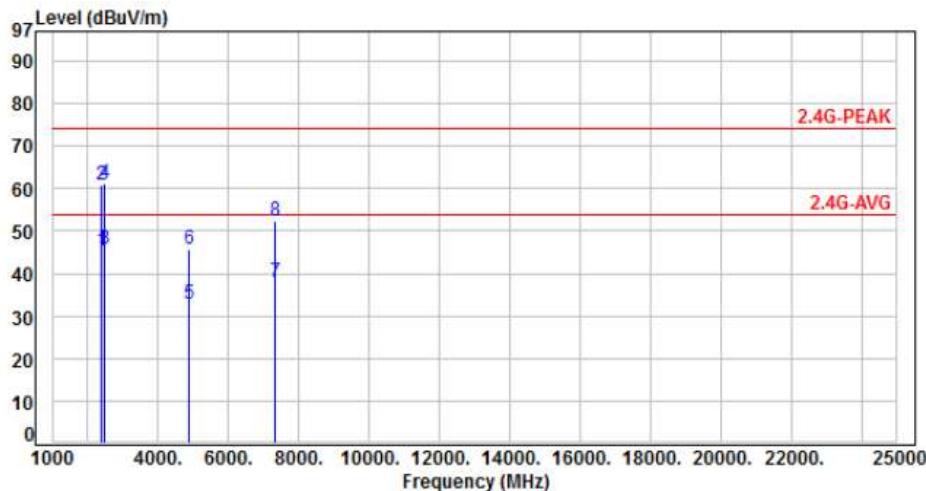

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	63.91	45.44	54.00	-8.56	Average	229	342	P
2	2390.00	-18.47	79.41	60.94	74.00	-13.06	Peak	229	342	P
3	2483.50	-18.15	64.01	45.86	54.00	-8.14	Average	229	342	P
4	2483.50	-18.15	79.50	61.35	74.00	-12.65	Peak	229	342	P
5	4874.00	-12.17	45.02	32.85	54.00	-21.15	Average	396	241	P
6	4874.00	-12.17	57.85	45.68	74.00	-28.32	Peak	396	241	P
7	7311.00	-8.14	46.28	38.14	54.00	-15.86	Average	336	342	P
8	7311.00	-8.14	60.52	52.38	74.00	-21.62	Peak	336	342	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH11	:	

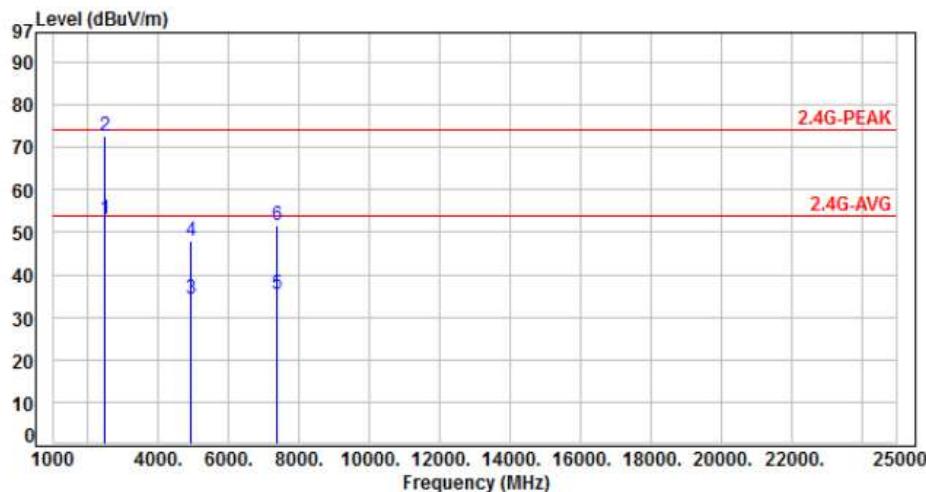

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	71.10	52.95	54.00	-1.05	Average	317	149	P
2	2483.50	-18.15	90.90	72.75	74.00	-1.25	Peak	317	149	P
3	4924.00	-12.06	46.26	34.20	54.00	-19.80	Average	100	225	P
4	4924.00	-12.06	60.03	47.97	74.00	-26.03	Peak	100	225	P
5	7386.00	-8.05	43.57	35.52	54.00	-18.48	Average	383	142	P
6	7386.00	-8.05	59.76	51.71	74.00	-22.29	Peak	383	142	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH11	:	

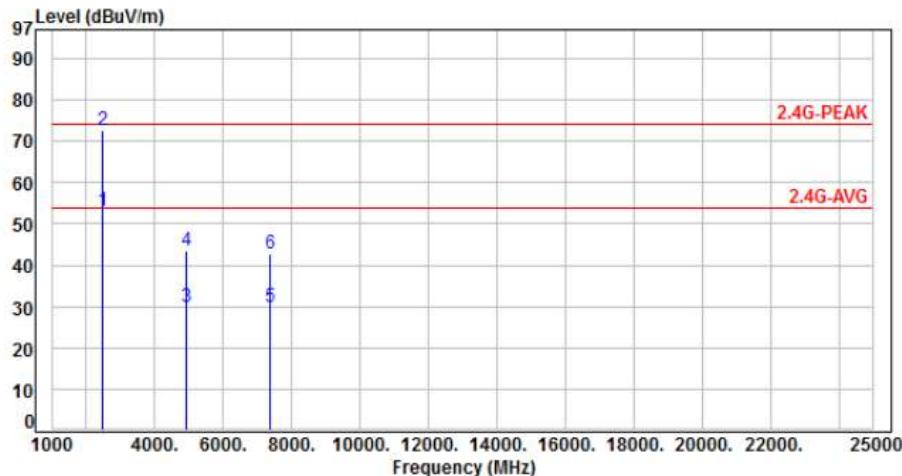


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	71.14	52.99	54.00	-1.01	Average	196	332	P
2	2483.50	-18.15	90.80	72.65	74.00	-1.35	Peak	196	332	P
3	4924.00	-12.06	41.86	29.80	54.00	-24.20	Average	383	288	P
4	4924.00	-12.06	55.49	43.43	74.00	-30.57	Peak	383	288	P
5	7386.00	-8.05	37.86	29.81	54.00	-24.19	Average	362	249	P
6	7386.00	-8.05	50.86	42.81	74.00	-31.19	Peak	362	249	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH03	:	

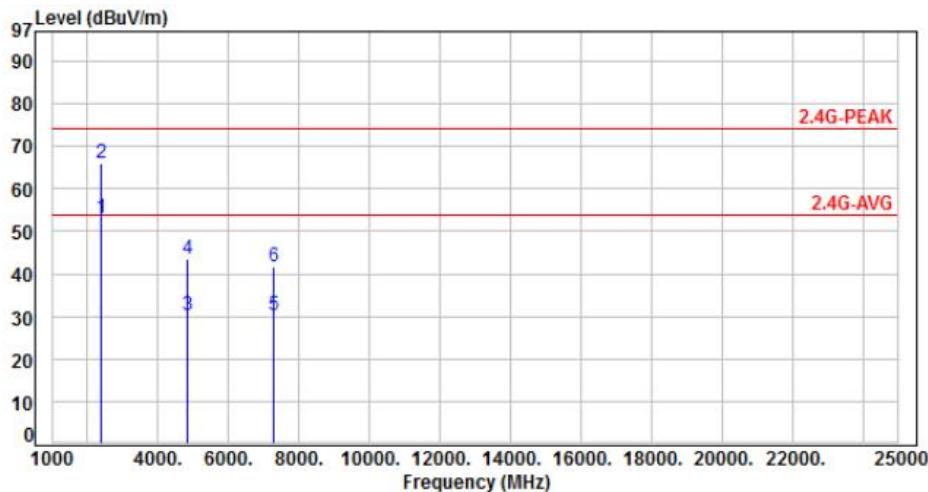

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	71.46	52.99	54.00	-1.01	Average	330	153	P
2	2390.00	-18.47	84.36	65.89	74.00	-8.11	Peak	330	153	P
3	4844.00	-12.25	42.59	30.34	54.00	-23.66	Average	100	240	P
4	4844.00	-12.25	55.89	43.64	74.00	-30.36	Peak	100	240	P
5	7266.00	-8.36	38.74	30.38	54.00	-23.62	Average	390	220	P
6	7266.00	-8.36	49.98	41.62	74.00	-32.38	Peak	390	220	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH03	:	

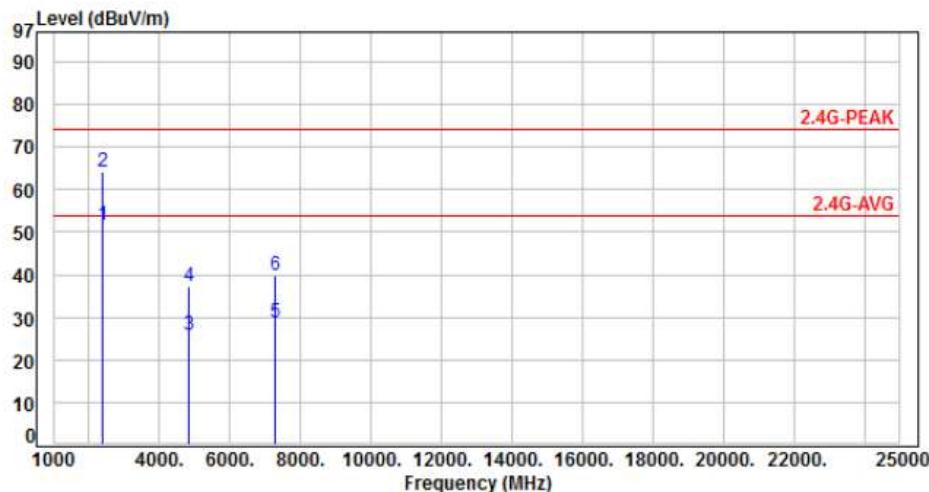

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	2390.00	-18.47	70.29	51.82	54.00	-2.18	Average	240	182 P
2	2390.00	-18.47	82.78	64.31	74.00	-9.69	Peak	240	182 P
3	4844.00	-12.25	38.15	25.90	54.00	-28.10	Average	389	46 P
4	4844.00	-12.25	49.64	37.39	74.00	-36.61	Peak	389	46 P
5	7266.00	-8.36	37.16	28.80	54.00	-25.20	Average	328	345 P
6	7266.00	-8.36	48.27	39.91	74.00	-34.09	Peak	328	345 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH06	:	

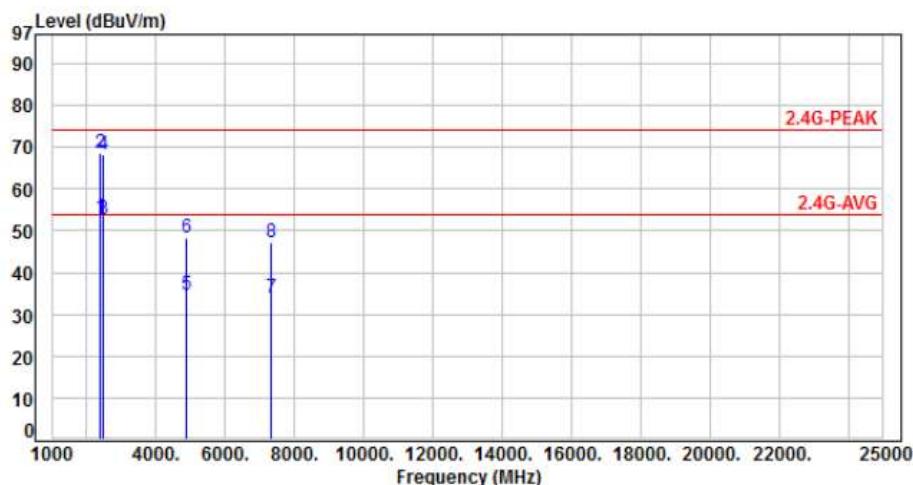

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	71.46	52.99	54.00	-1.01	Average	372	143	P
2	2390.00	-18.47	87.18	68.71	74.00	-5.29	Peak	372	143	P
3	2483.50	-18.15	71.00	52.85	54.00	-1.15	Average	372	51	P
4	2483.50	-18.15	86.36	68.21	74.00	-5.79	Peak	372	51	P
5	4874.00	-12.17	46.75	34.58	54.00	-19.42	Average	100	133	P
6	4874.00	-12.17	60.53	48.36	74.00	-25.64	Peak	100	133	P
7	7311.00	-8.14	41.97	33.83	54.00	-20.17	Average	100	216	P
8	7311.00	-8.14	55.22	47.08	74.00	-26.92	Peak	100	216	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH06	:	

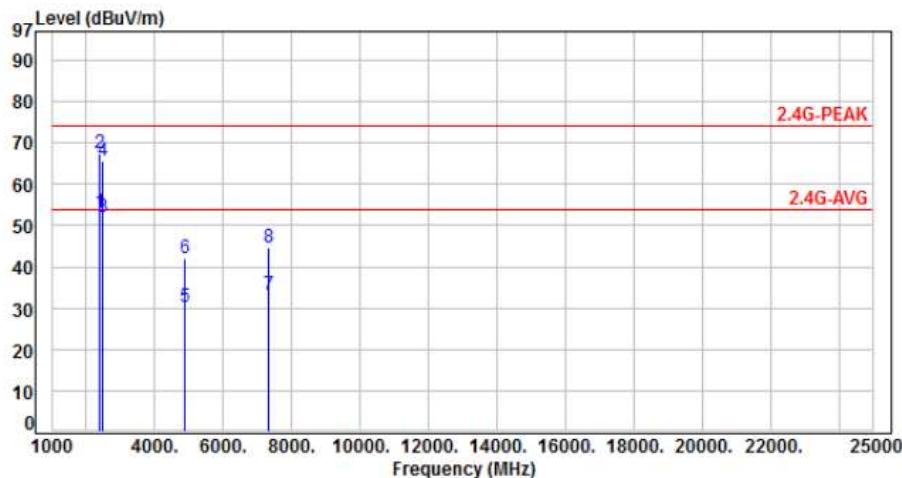

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.47	71.41	52.94	54.00	-1.06	Average	393	184	P
2	2390.00	-18.47	85.81	67.34	74.00	-6.66	Peak	393	184	P
3	2483.50	-18.15	70.05	51.90	54.00	-2.10	Average	281	184	P
4	2483.50	-18.15	83.88	65.73	74.00	-8.27	Peak	281	184	P
5	4874.00	-12.17	42.39	30.22	54.00	-23.78	Average	382	49	P
6	4874.00	-12.17	54.31	42.14	74.00	-31.86	Peak	382	49	P
7	7311.00	-8.14	41.47	33.33	54.00	-20.67	Average	100	341	P
8	7311.00	-8.14	52.67	44.53	74.00	-29.47	Peak	100	341	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH09	:	

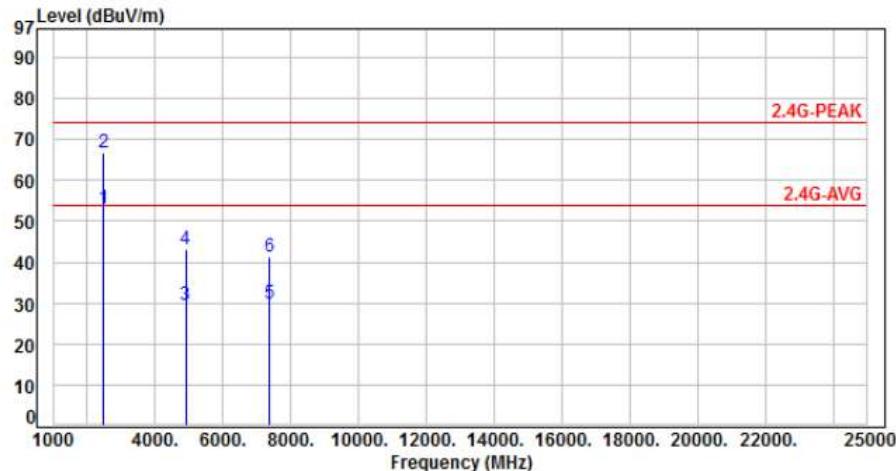

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	71.14	52.99	54.00	-1.01	Average	312	142	P
2	2483.50	-18.15	84.78	66.63	74.00	-7.37	Peak	312	142	P
3	4904.00	-12.10	41.48	29.38	54.00	-24.62	Average	100	231	P
4	4904.00	-12.10	55.20	43.10	74.00	-30.90	Peak	100	231	P
5	7356.00	-8.12	37.89	29.77	54.00	-24.23	Average	100	197	P
6	7356.00	-8.12	49.36	41.24	74.00	-32.76	Peak	100	197	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH09	:	

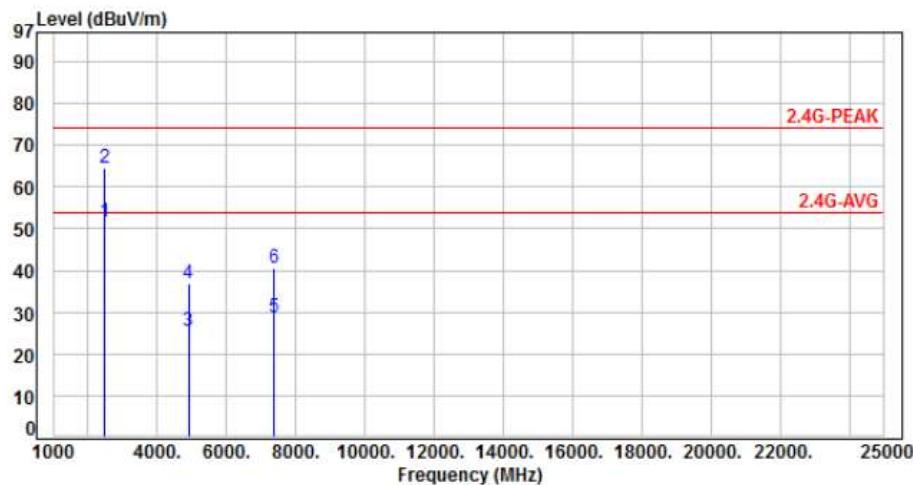

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.15	69.80	51.65	54.00	-2.35	Average	355	171	P
2	2483.50	-18.15	82.70	64.55	74.00	-9.45	Peak	355	171	P
3	4904.00	-12.10	37.45	25.35	54.00	-28.65	Average	386	55	P
4	4904.00	-12.10	48.86	36.76	74.00	-37.24	Peak	386	55	P
5	7356.00	-8.12	37.06	28.94	54.00	-25.06	Average	100	340	P
6	7356.00	-8.12	48.55	40.43	74.00	-33.57	Peak	100	340	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

**: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below –20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

7.3 Test Setup Layout

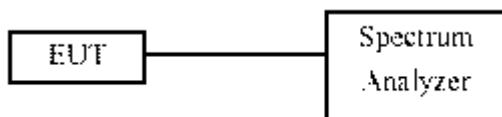


7.4 Test Result and Data

Note: Test plots refers to the following pages.








ANT A

Modulation Type: 802.11b, CH 01

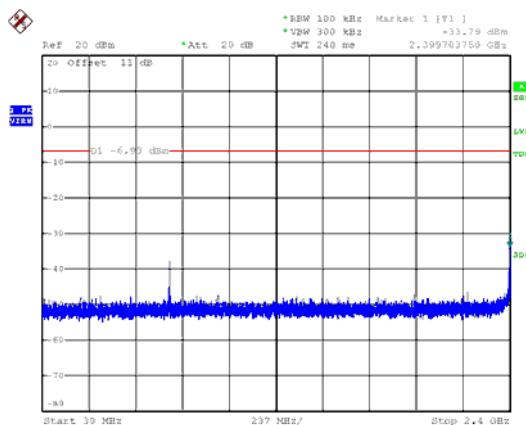




Modulation Type: 802.11b, CH 06

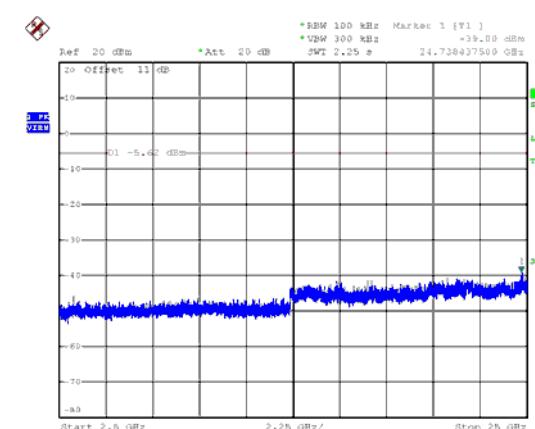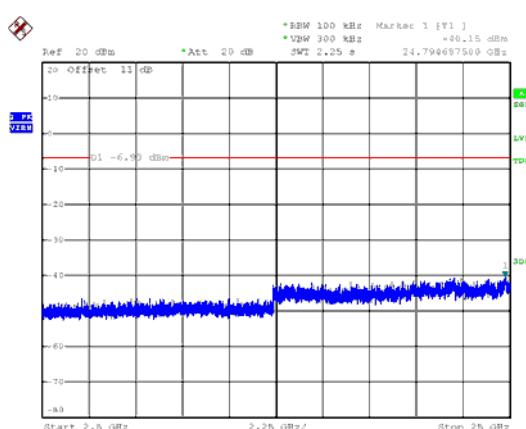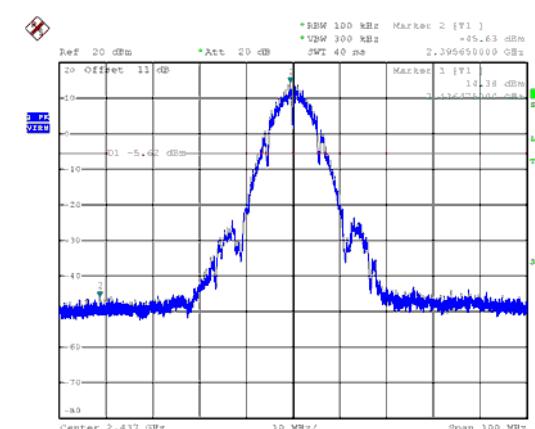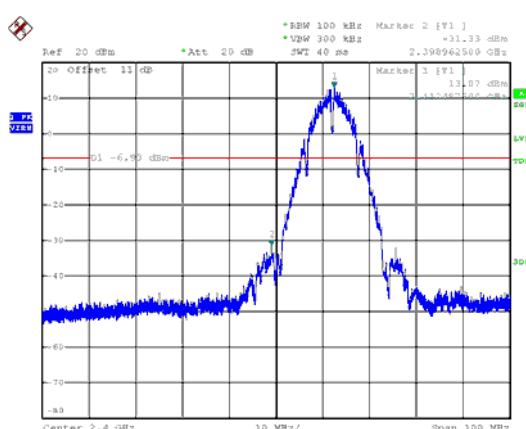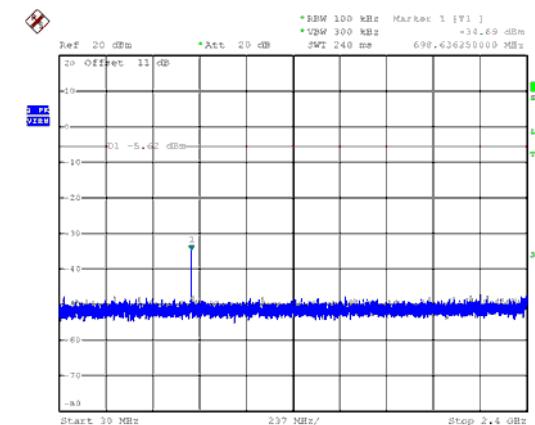



ANT A


Modulation Type: 802.11b, CH 11

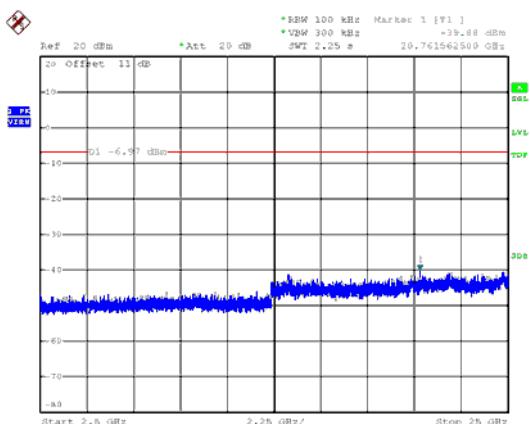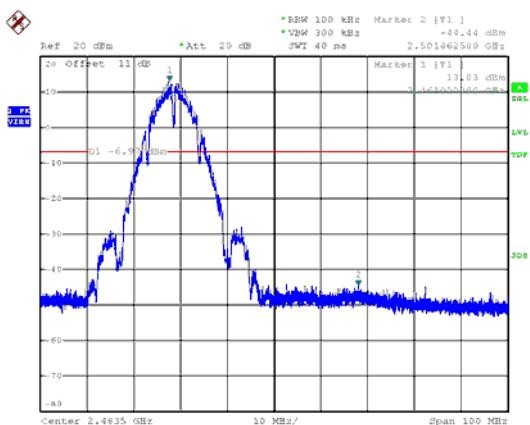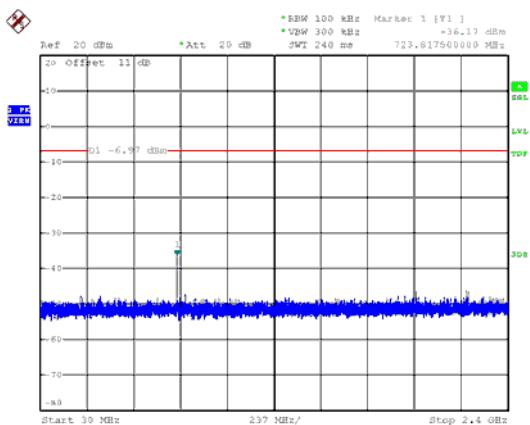








ANT A

Modulation Type: 802.11g, CH 01

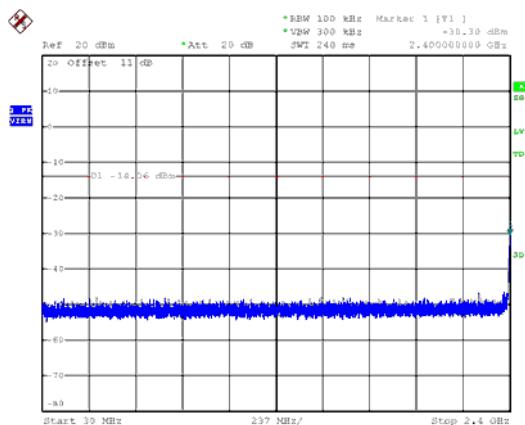




Modulation Type: 802.11g, CH 06

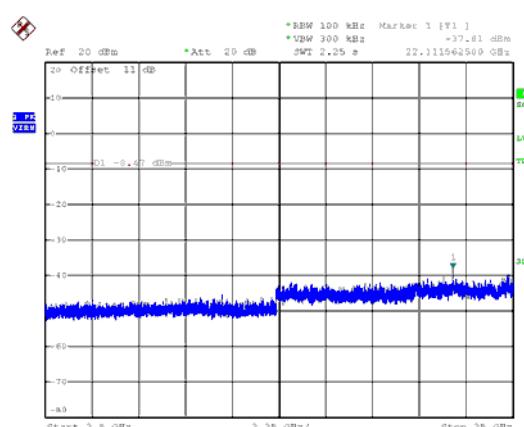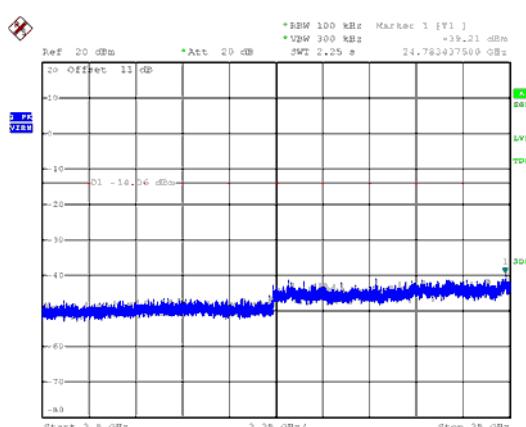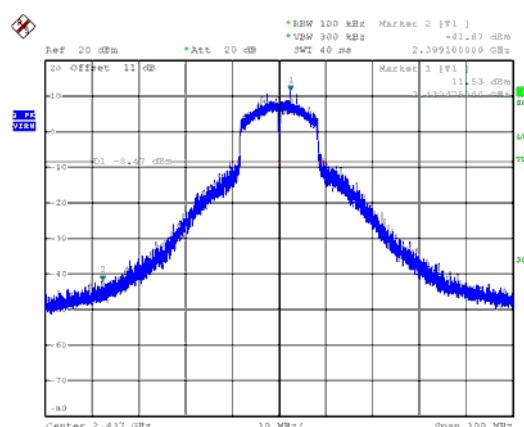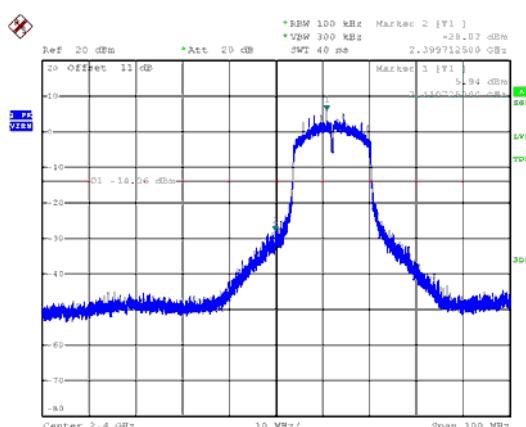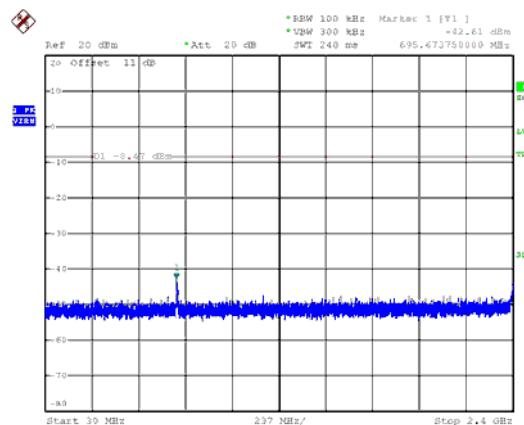



ANT A


Modulation Type: 802.11g, CH 11

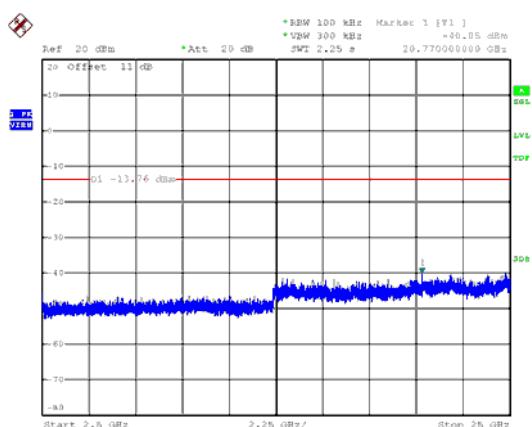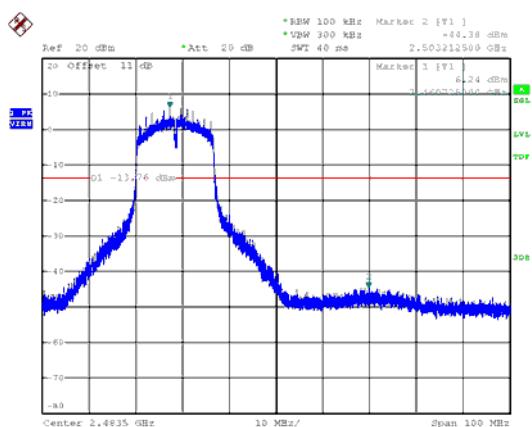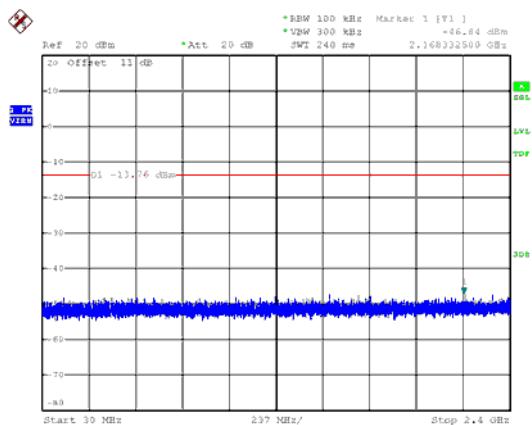








ANT A

Modulation Type: 802.11n HT20, CH01

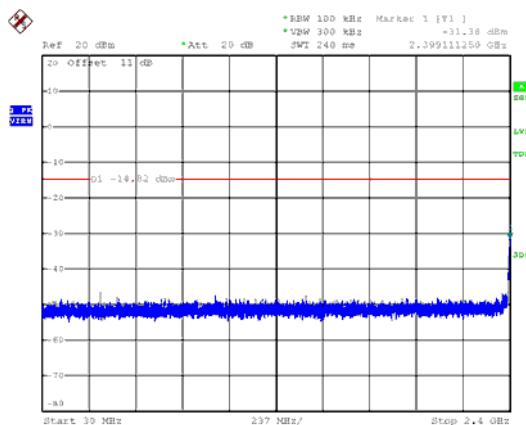




Modulation Type: 802.11n HT20, CH06

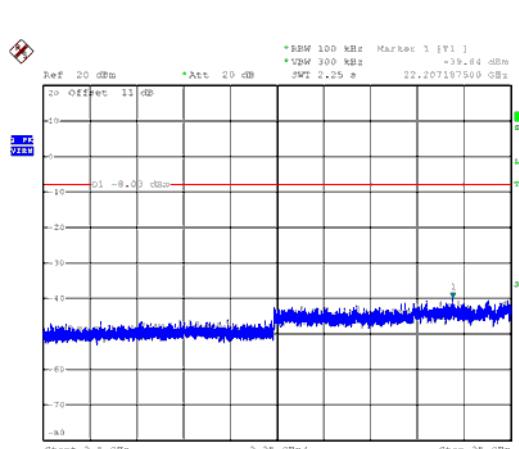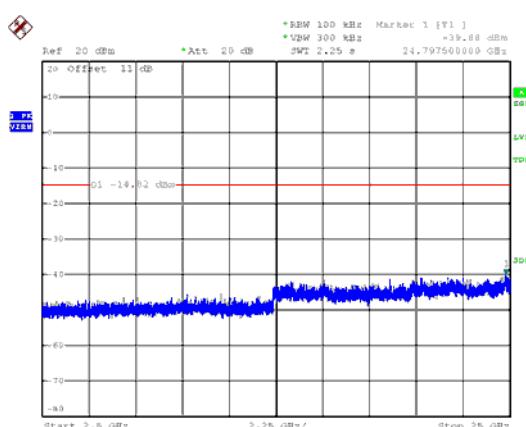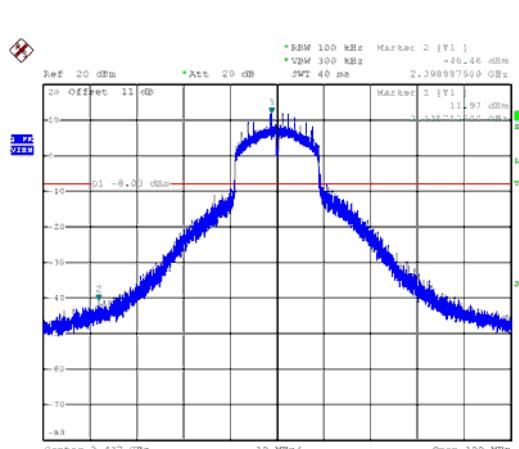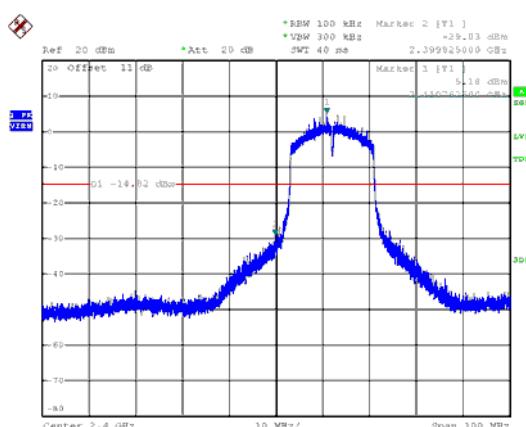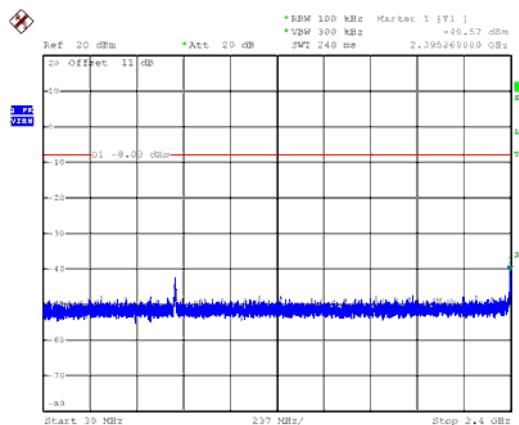



ANT A


Modulation Type: 802.11n HT20, CH11

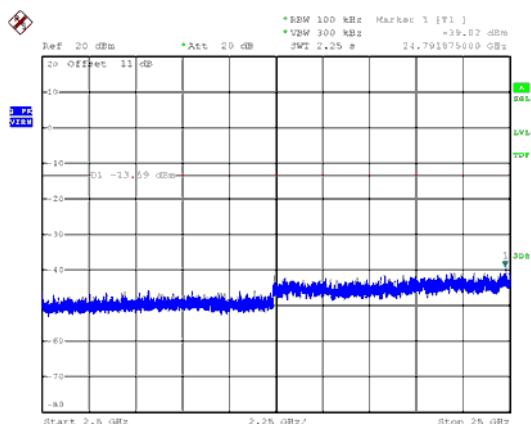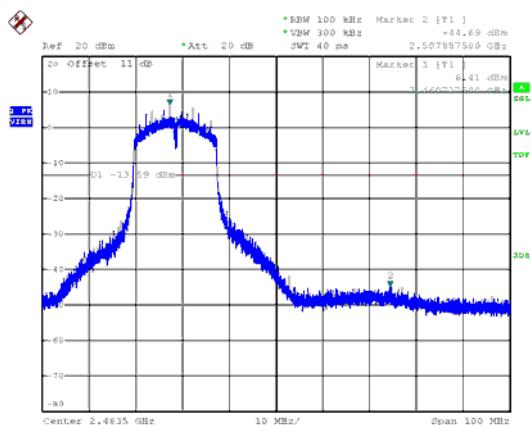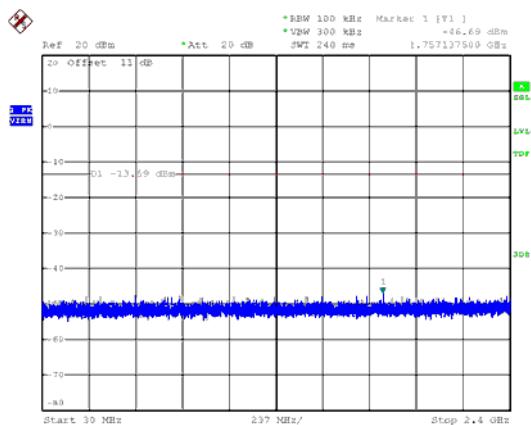








ANT A

Modulation Type: 802.11n HT40, CH03

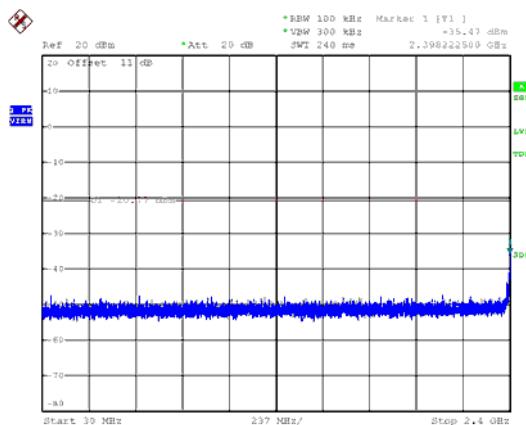




Modulation Type: 802.11n HT40, CH06

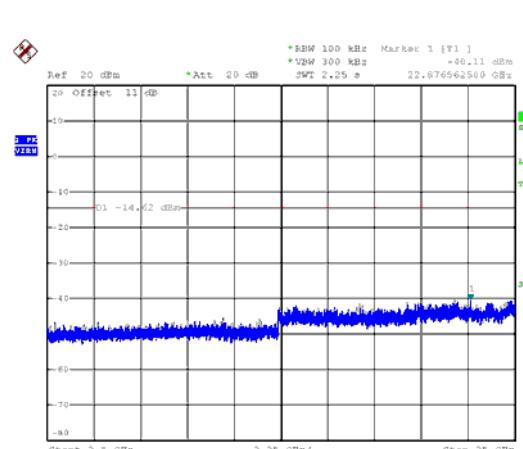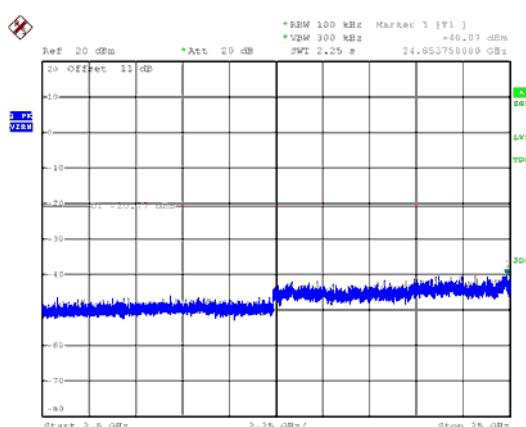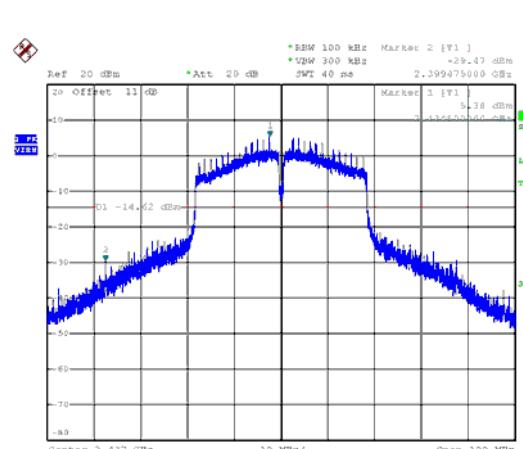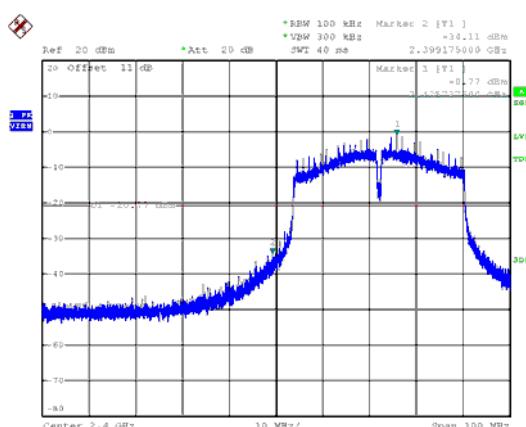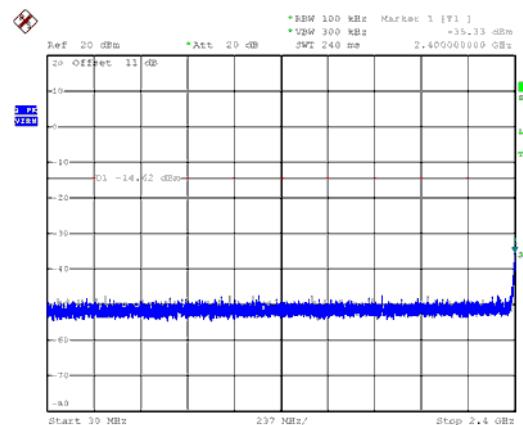



ANT A


Modulation Type: 802.11n HT40, CH09

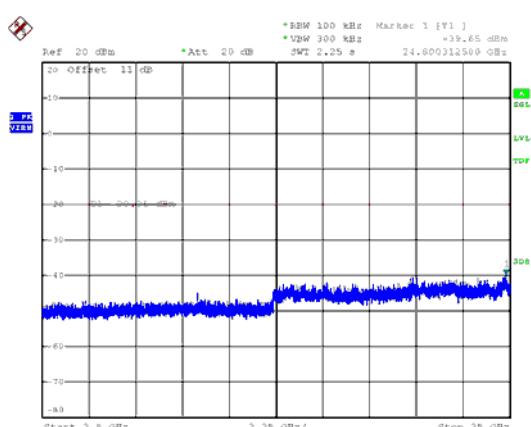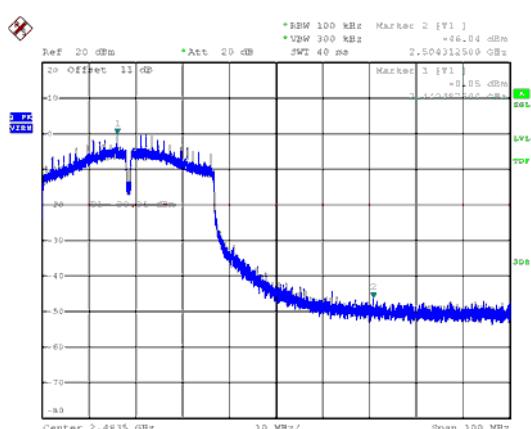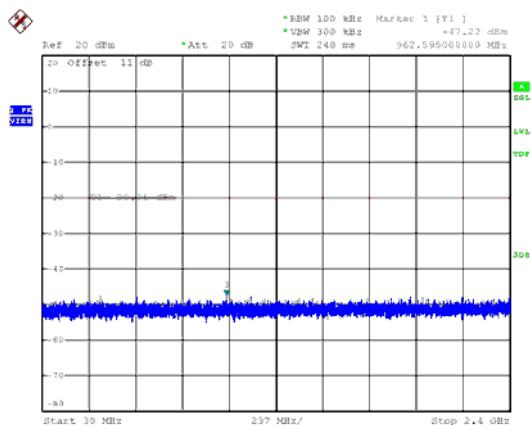








ANT B

Modulation Type: 802.11b, CH 01

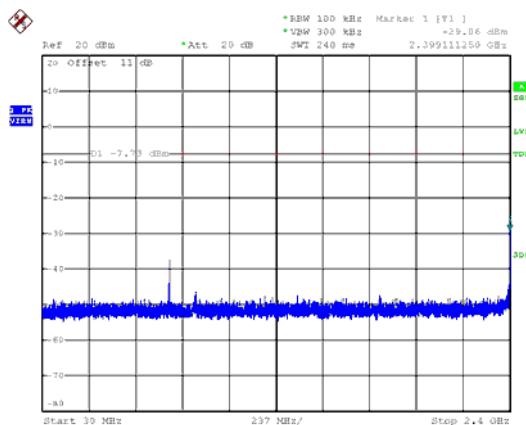




Modulation Type: 802.11b, CH 06

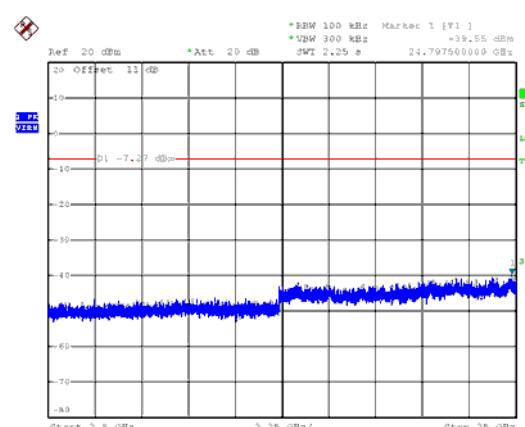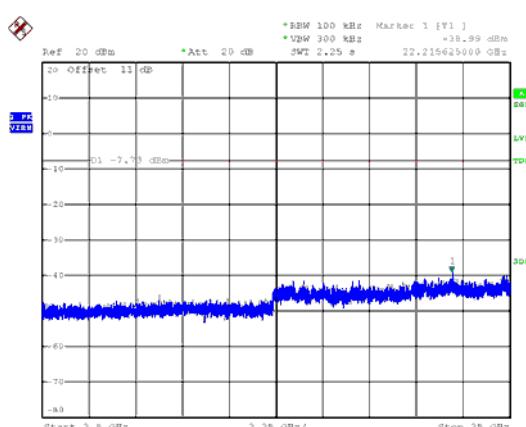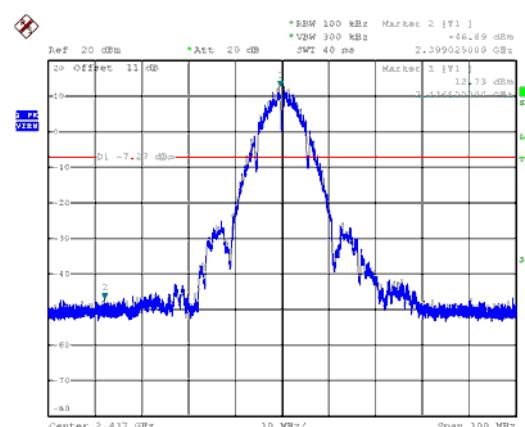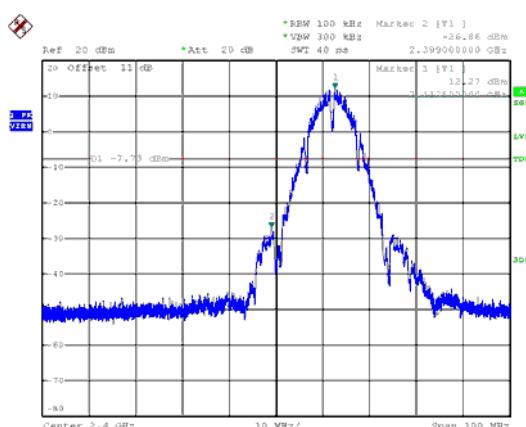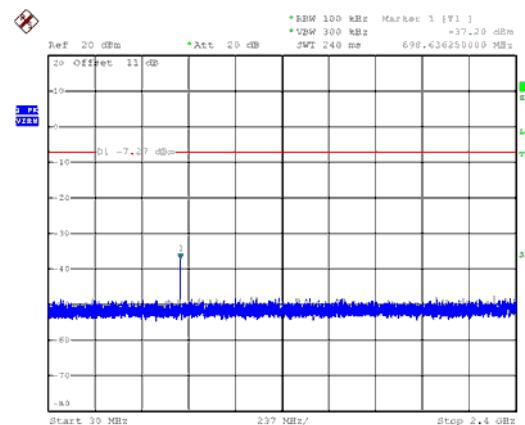



ANT B


Modulation Type: 802.11b, CH 11

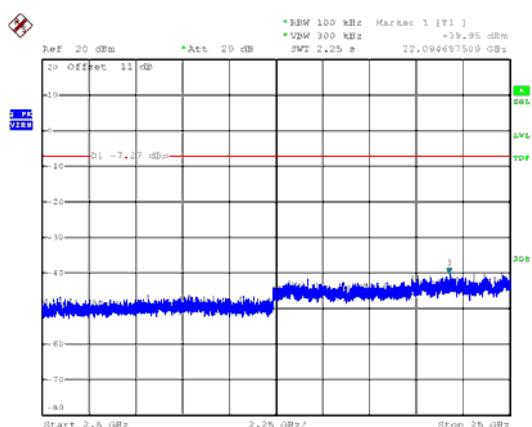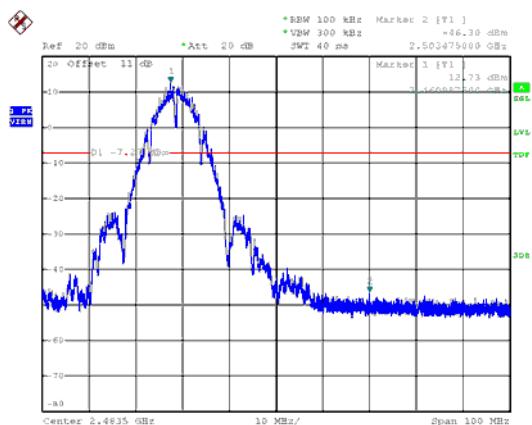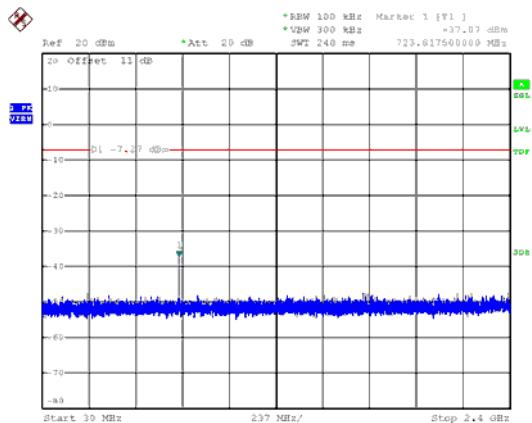








ANT B

Modulation Type: 802.11g, CH 01

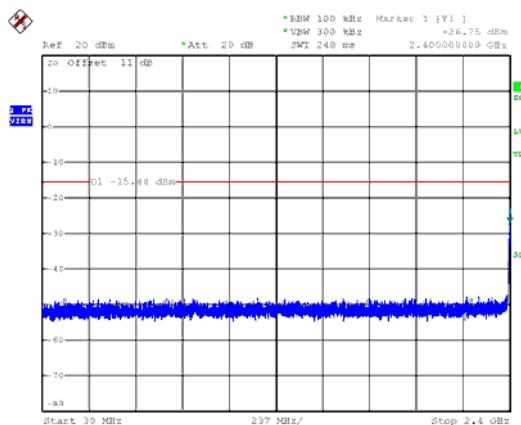




Modulation Type: 802.11g, CH 06

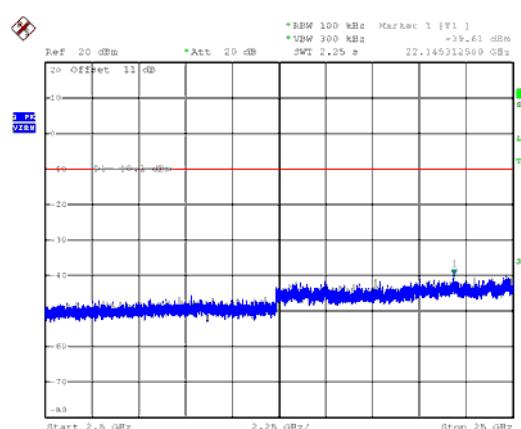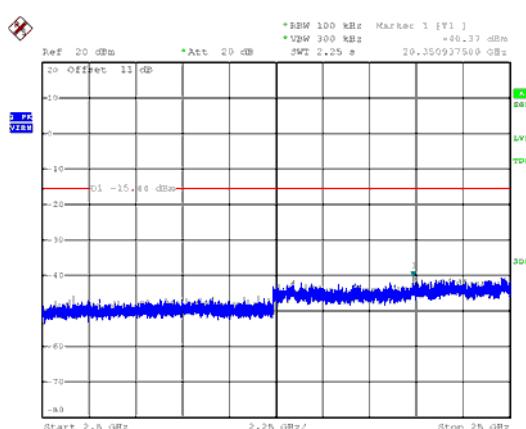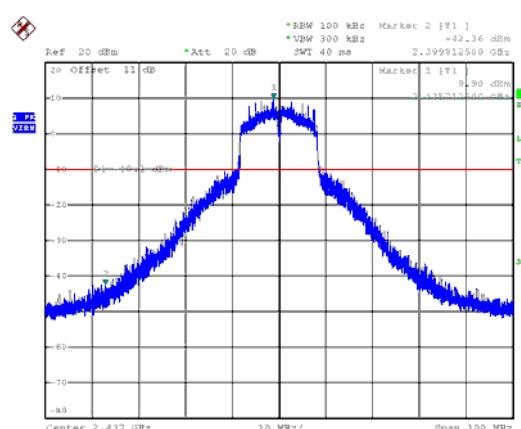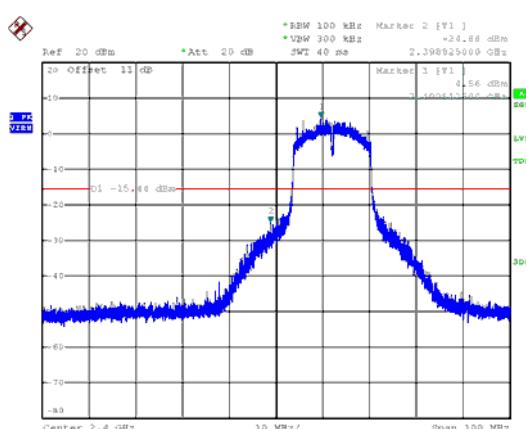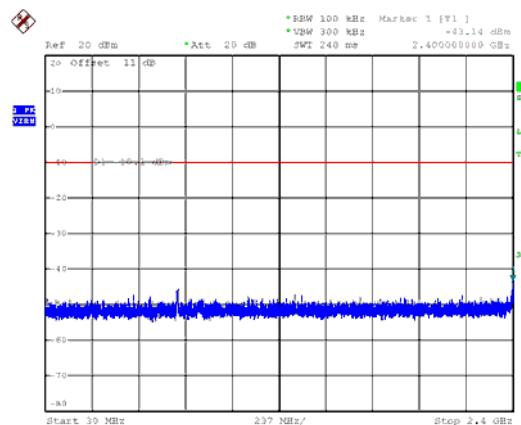



ANT B


Modulation Type: 802.11g, CH 11

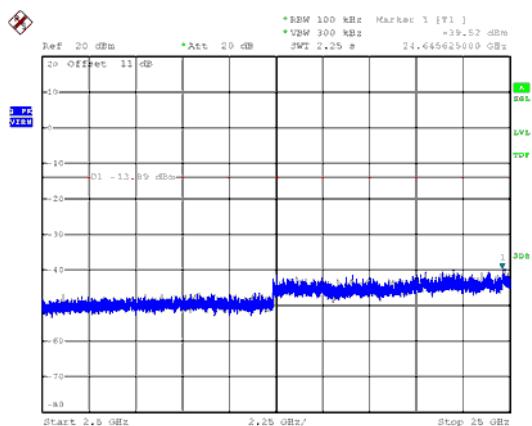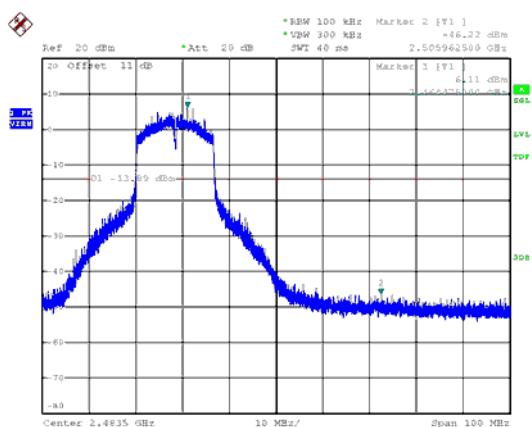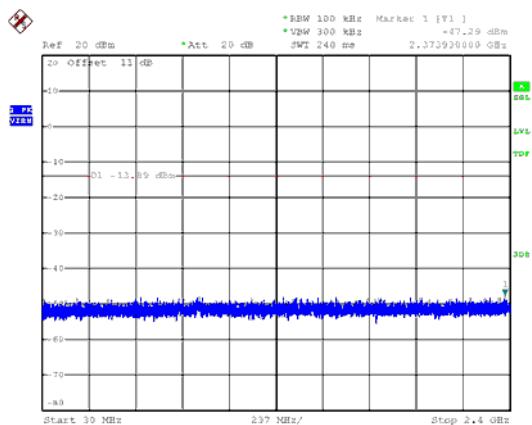








ANT B

Modulation Type: 802.11n HT20, CH01

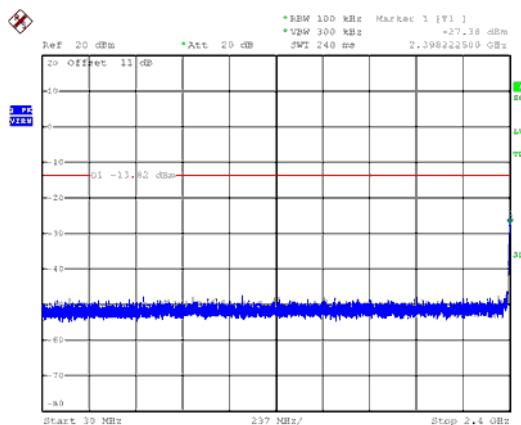




Modulation Type: 802.11n HT20, CH06

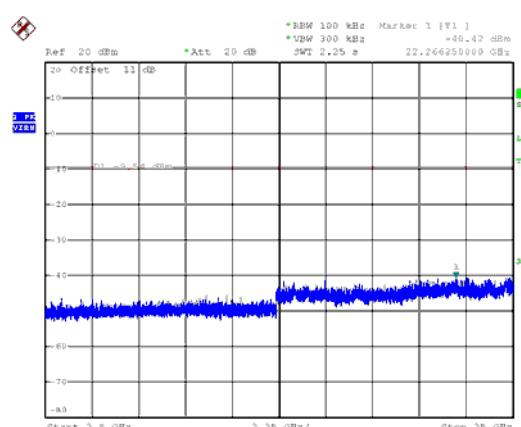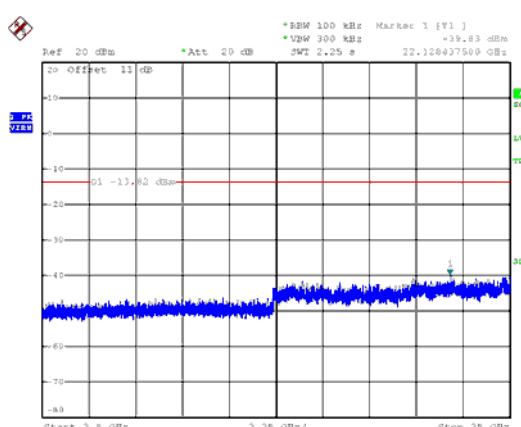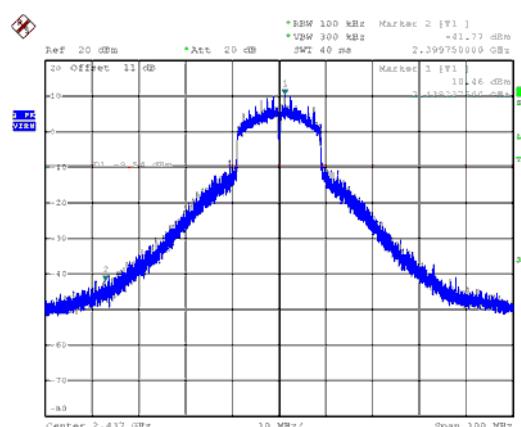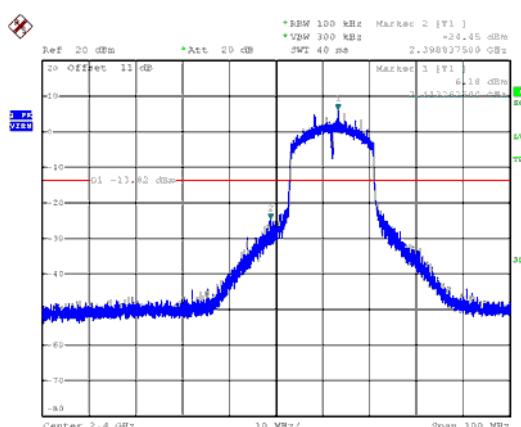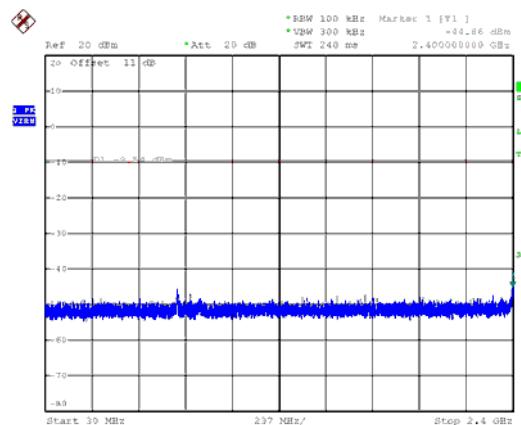



ANT B


Modulation Type: 802.11n HT20, CH11

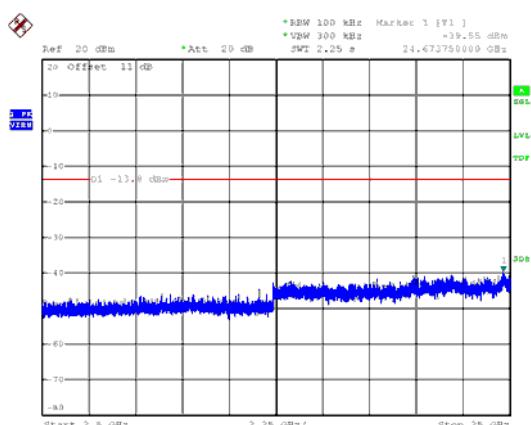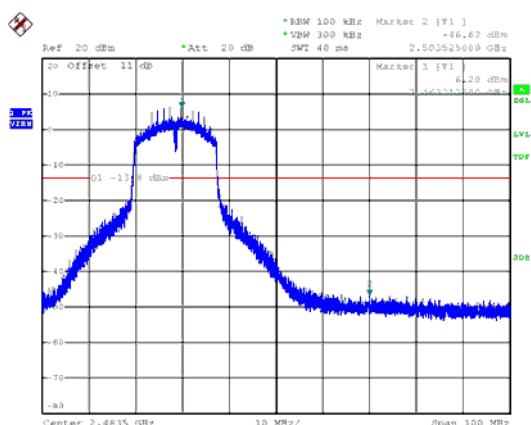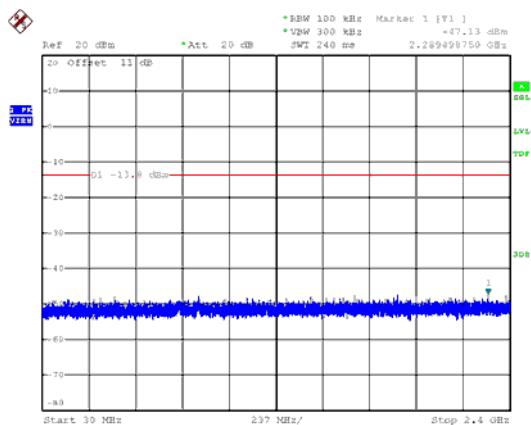








ANT B

Modulation Type: 802.11n HT40, CH03

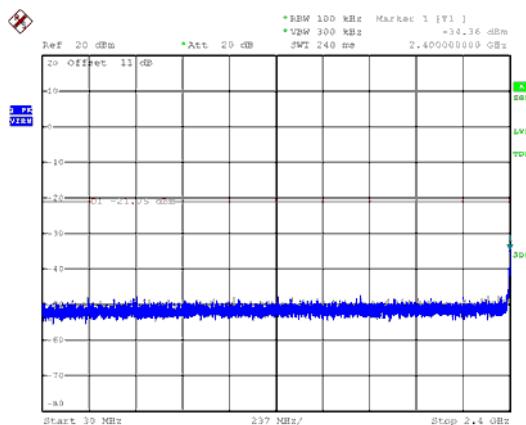




Modulation Type: 802.11n HT40, CH06

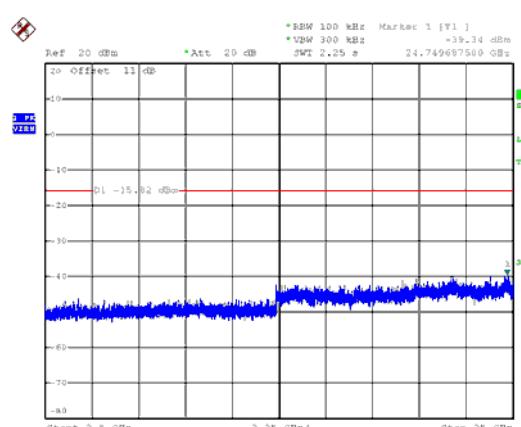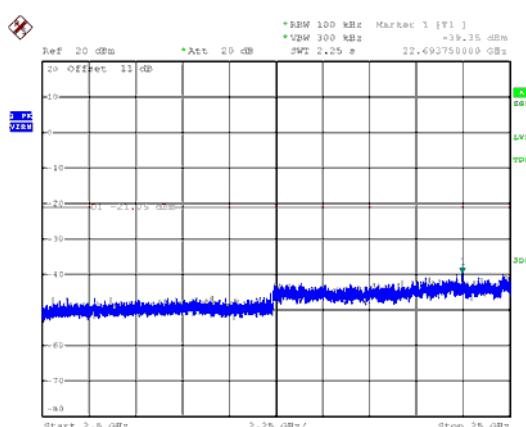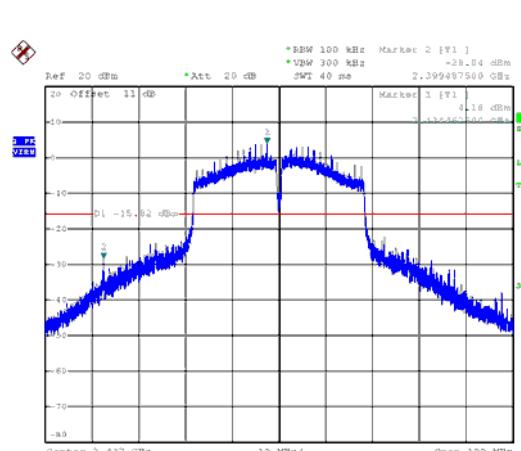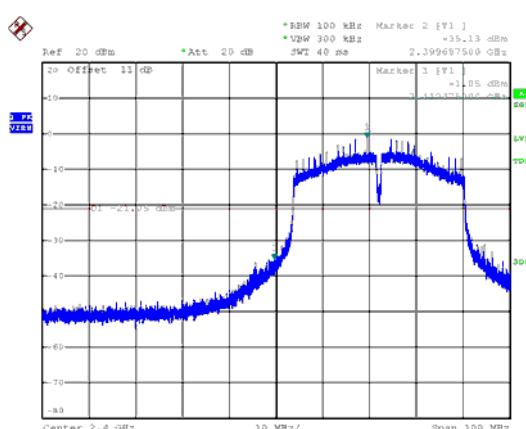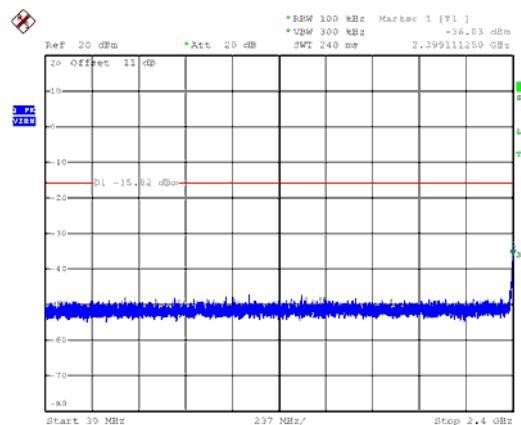



ANT B

Modulation Type: 802.11n HT40, CH09

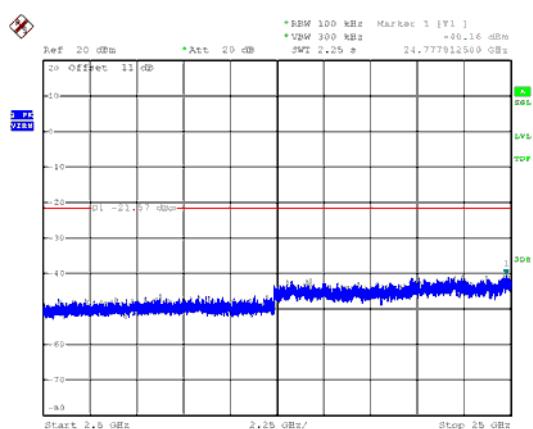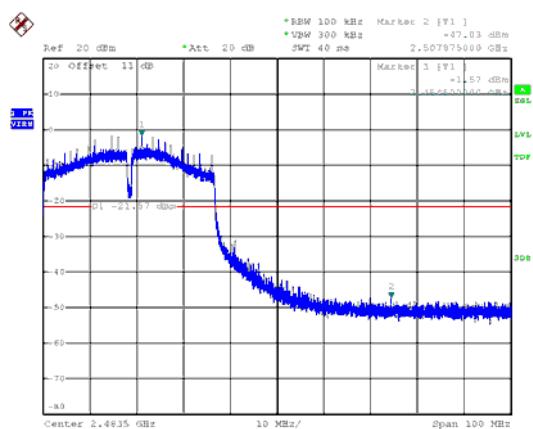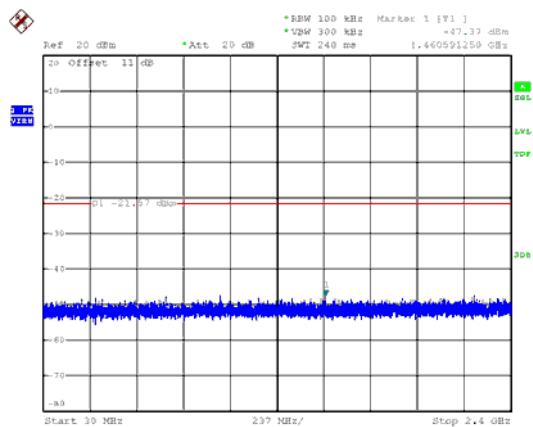



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout



8.4 Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b,1M	100.00	100.00	100.00%
11g,6M	2.05	2.09	98.26%
11n HT20	1.91	1.94	98.13%
11n HT40	0.94	0.97	96.87%




Modulation Type: 802.11b (1Mbps)




Modulation Type: 802.11g (6Mbps)

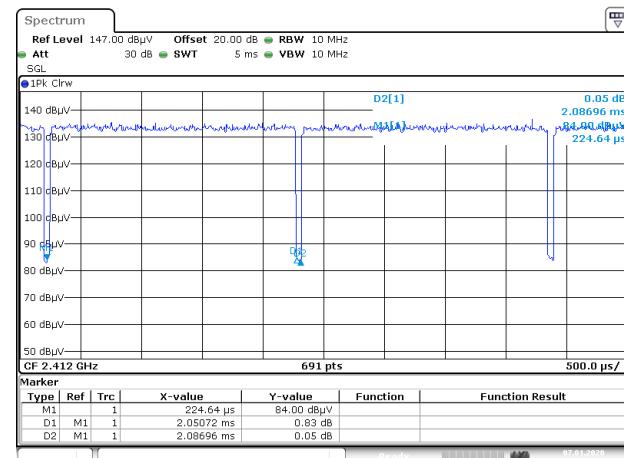

Modulation Type: 802.11n HT20 (6.5Mbps)

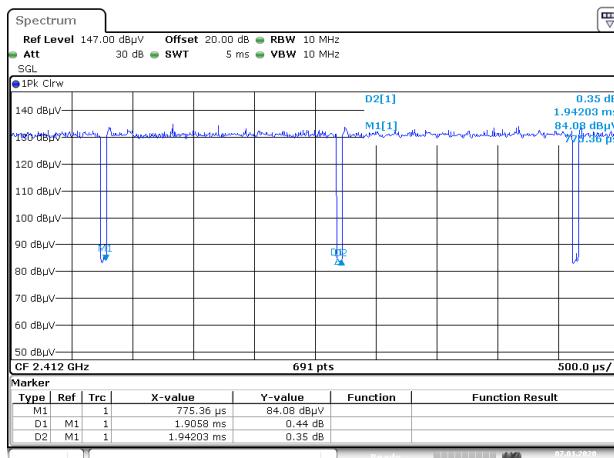

Modulation Type: 802.11n HT40 (13.5Mbps)

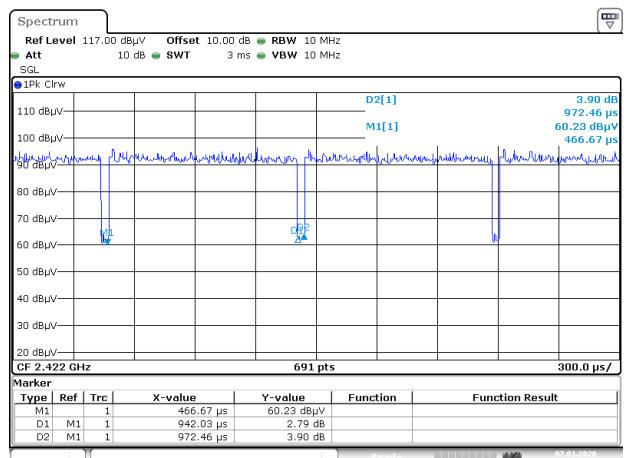



9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout

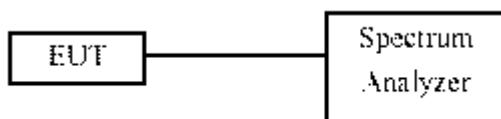


9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT A	ANT B	
11b	1	2412	7.05	6.55	0.5
	6	2437	6.60	7.05	0.5
	11	2462	6.55	7.10	0.5
11g	1	2412	15.50	15.00	0.5
	6	2437	13.85	15.05	0.5
	11	2462	15.10	15.05	0.5
11n HT20	1	2412	14.15	15.10	0.5
	6	2437	15.10	13.15	0.5
	11	2462	15.10	15.10	0.5
11n HT40	3	2422	31.30	32.50	0.5
	6	2437	27.50	30.00	0.5
	9	2452	32.60	31.30	0.5




ANT A


Modulation Type: 802.11b
CH01

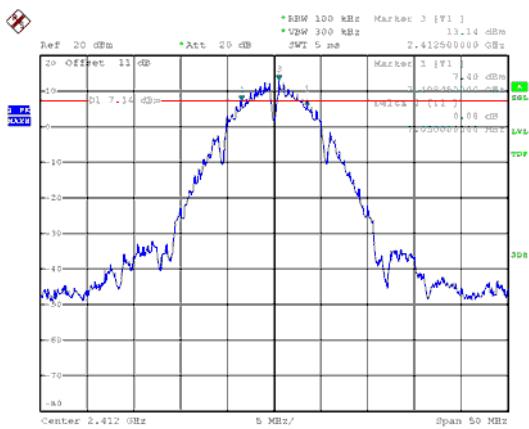


Modulation Type: 802.11g
CH01

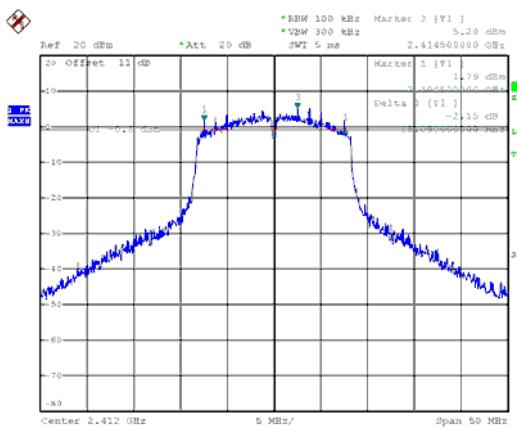


CH06

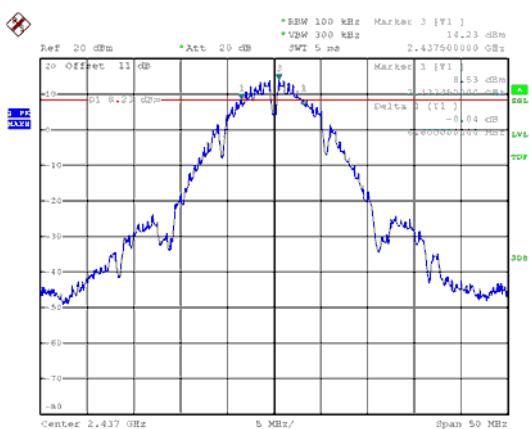


CH06

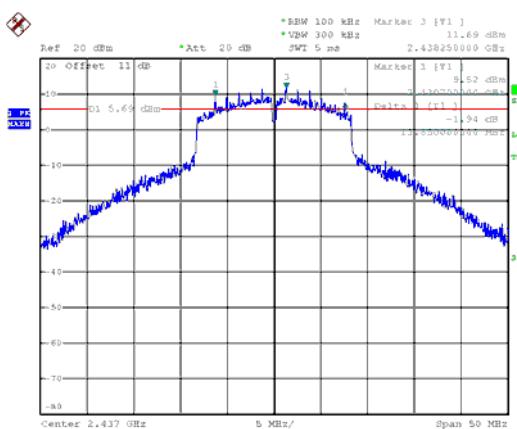

CH11

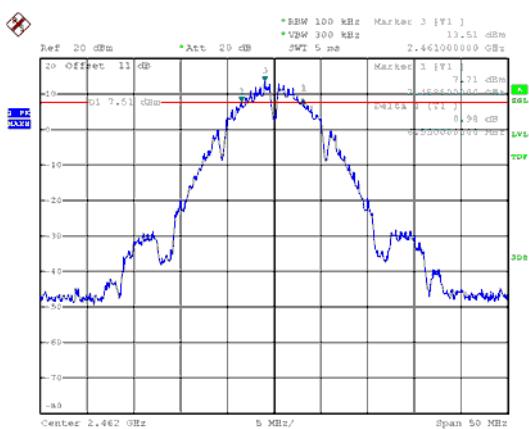


CH11

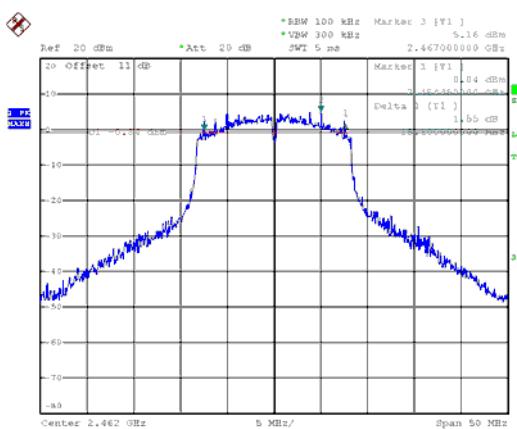




ANT A


Modulation Type: 802.11n HT20
CH01

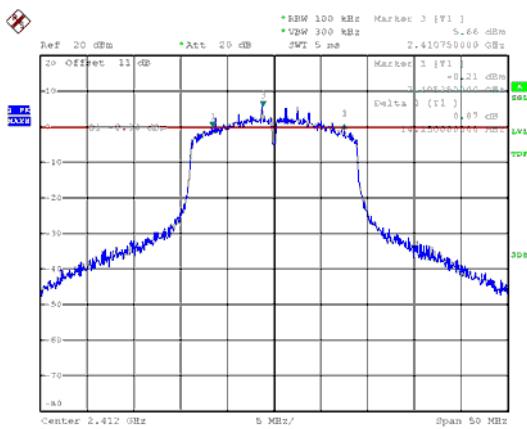


Modulation Type: 802.11n HT40
CH03

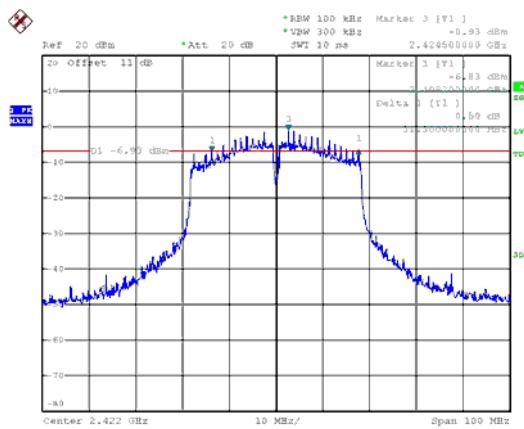


CH06

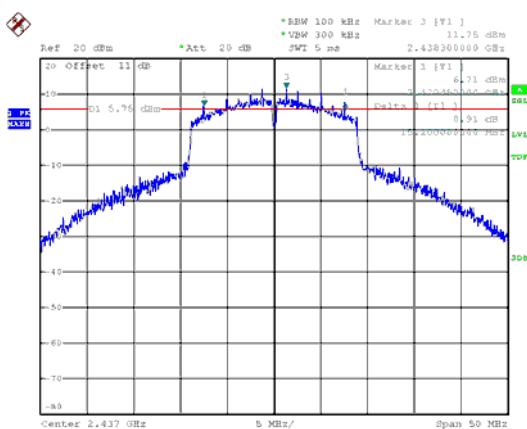


CH06

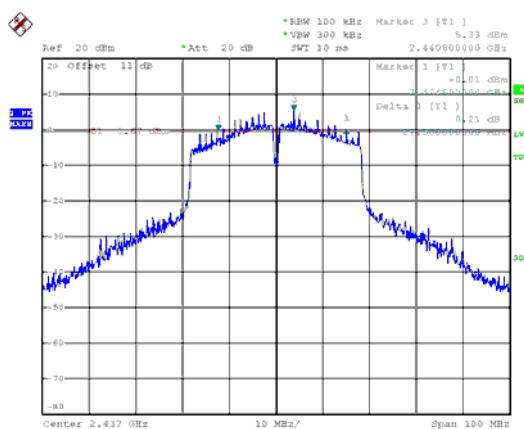

CH11


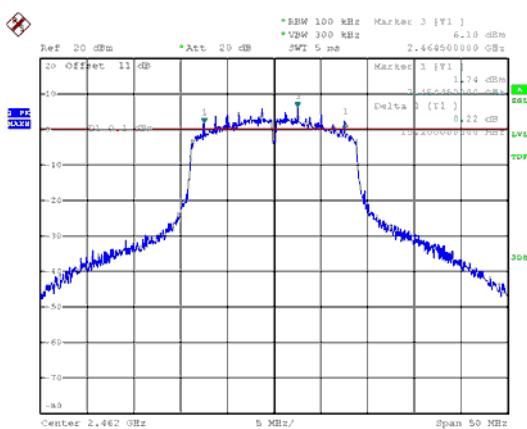


CH09

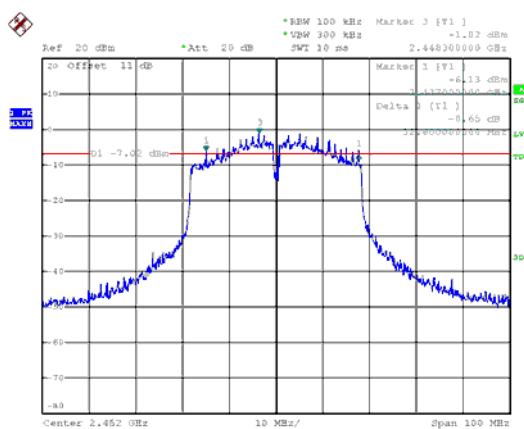





ANT B

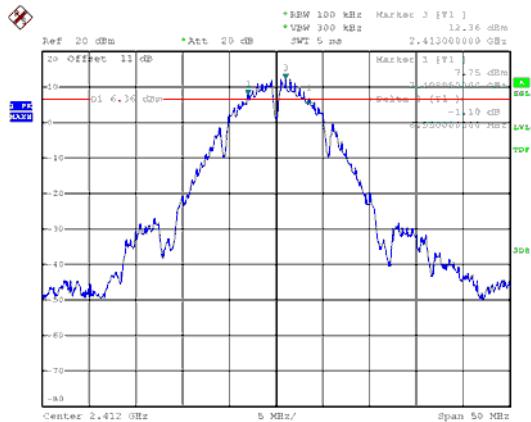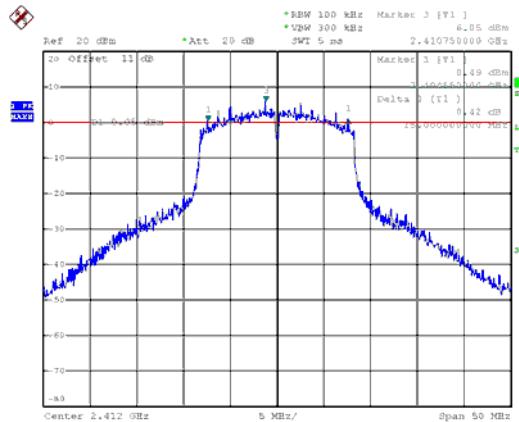Modulation Type: 802.11b
CH01Modulation Type: 802.11g
CH01


CH06

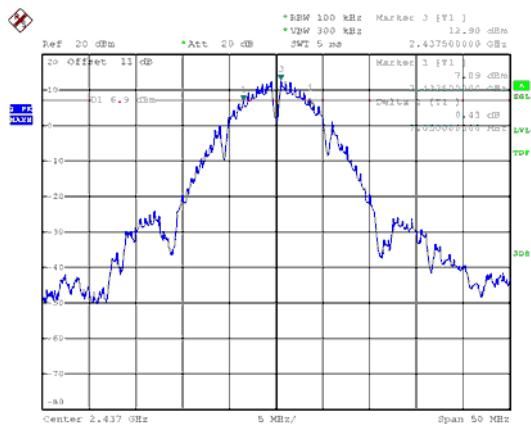


CH06

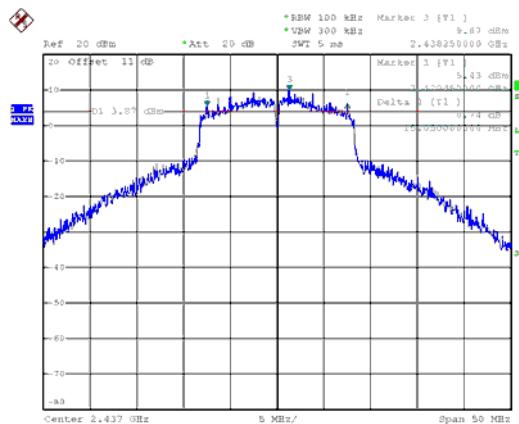

CH11

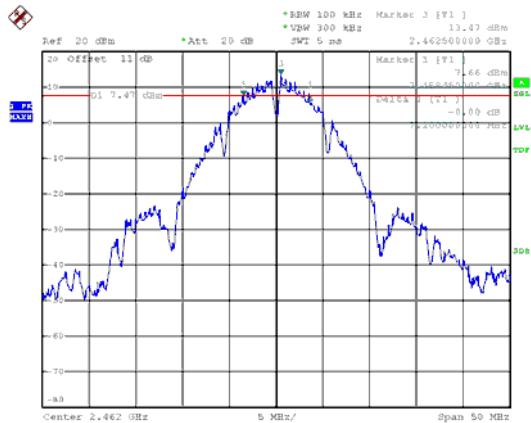


CH11

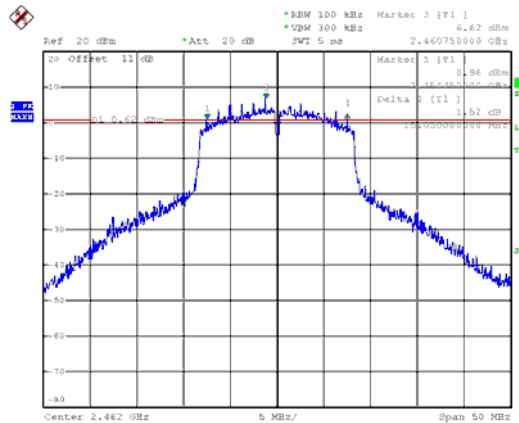


ANT B


Modulation Type: 802.11n HT20
CH01

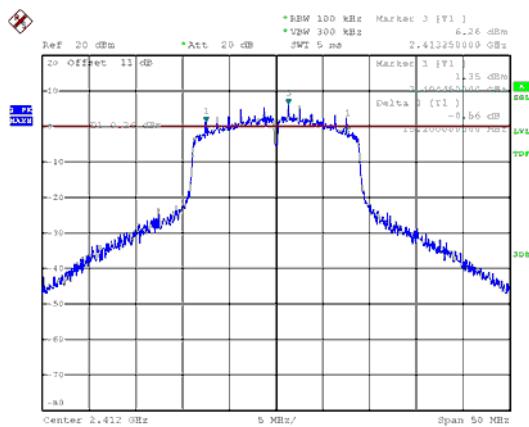


Modulation Type: 802.11n HT40
CH03

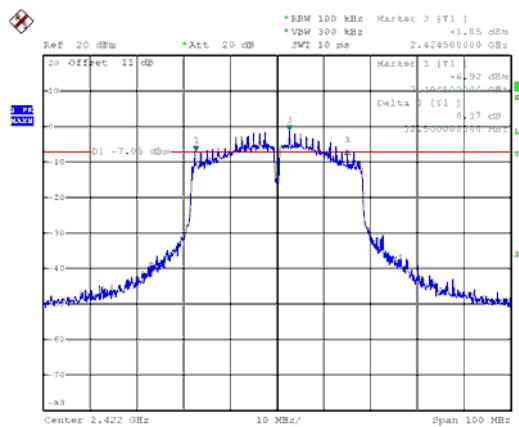


CH06

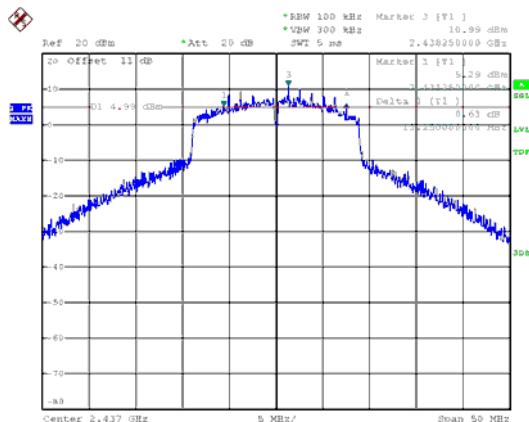


CH06

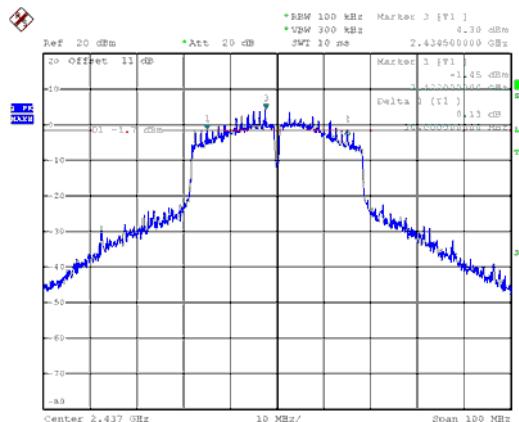

CH11

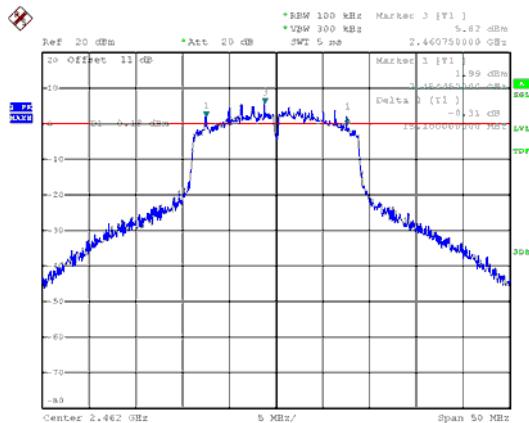

CH09

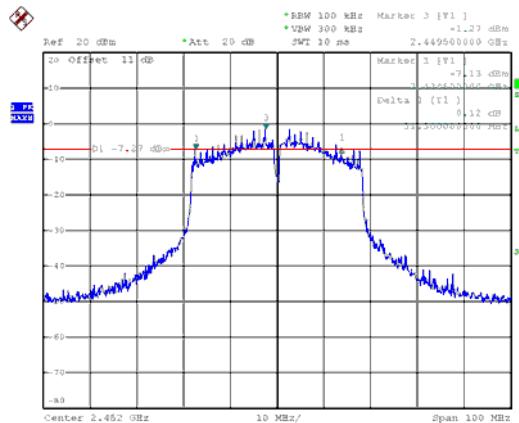



10. Maximum Peak and Average Output Power

10.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout

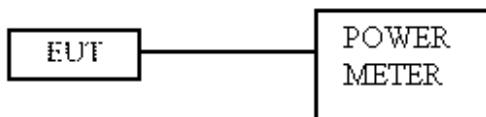



10.4 Test Result and Data

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(peak) output power (dBm)		Total PK power (dBm)	Total PK power (mW)	Power Limit (dBm)
				ANT A	ANT B			
21	11b	1	2412	23.67	23.70	26.70	467.232	30.00
21		6	2437	25.41	24.11	27.82	605.168	30.00
21		11	2462	24.03	24.34	27.20	524.574	30.00
16.5	11g	1	2412	23.92	23.61	26.78	476.219	30.00
21		6	2437	26.86	25.65	29.31	852.571	30.00
16		11	2462	24.16	24.05	27.12	514.713	30.00
16.5	11n HT20	1	2412	23.78	23.37	26.59	456.051	30.00
21		6	2437	26.85	25.64	29.30	850.610	30.00
16		11	2462	24.14	23.74	26.95	496.010	30.00
11	11n HT40	3	2422	18.85	18.96	21.92	155.441	30.00
16		6	2437	24.51	23.15	26.89	489.026	30.00
10		9	2452	20.13	18.82	22.53	179.247	30.00

Power Set	Modulation Mode	Channel	Frequency (MHz)	Conducted(average) output power (dBm)		Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT A	ANT B			
21	11b	1	2412	20.74	20.97	23.87	243.603	NA
21		6	2437	22.68	21.46	25.12	325.312	NA
21		11	2462	21.38	21.71	24.56	285.656	NA
16.5	11g	1	2412	16.48	16.76	19.63	91.887	NA
21		6	2437	22.21	21.24	24.76	299.387	NA
16		11	2462	17.03	17.36	20.21	104.916	NA
16.5	11n HT20	1	2412	16.36	16.45	19.42	87.408	NA
21		6	2437	22.23	21.18	24.75	298.329	NA
16		11	2462	16.91	17.22	20.08	101.814	NA
11	11n HT40	3	2422	11.54	11.81	14.69	29.427	NA
16		6	2437	17.98	16.82	20.45	110.890	NA
10		9	2452	12.72	11.52	15.17	32.897	NA

Note: Average power is for reference only.



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

11.3 Test Setup Layout


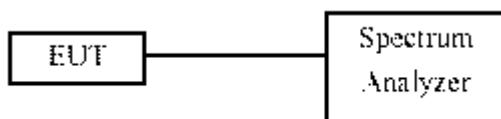


11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A	ANT B				
11b	1	2412	-1.48	-1.96	1.30	0.00	1.30	6.44
	6	2437	-0.9	-1.43	1.85	0.00	1.85	6.44
	11	2462	-1.3	-1.82	1.46	0.00	1.46	6.44
11g	1	2412	-8.28	-7.59	-4.91	0.00	-4.91	6.44
	6	2437	-1.45	-4.08	0.44	0.00	0.44	6.44
	11	2462	-7.17	-7.99	-4.55	0.00	-4.55	6.44
11n HT20	1	2412	-7.26	-8.79	-4.95	0.00	-4.95	6.44
	6	2437	-2.7	-3.69	-0.16	0.00	-0.16	6.44
	11	2462	-8.12	-8.24	-5.17	0.00	-5.17	6.44
11n HT40	3	2422	-15.93	-16.9	-13.38	0.00	-13.38	6.44
	6	2437	-8.2	-10.91	-6.34	0.00	-6.34	6.44
	9	2452	-14.5	-16.59	-12.41	0.00	-12.41	6.44




ANT A

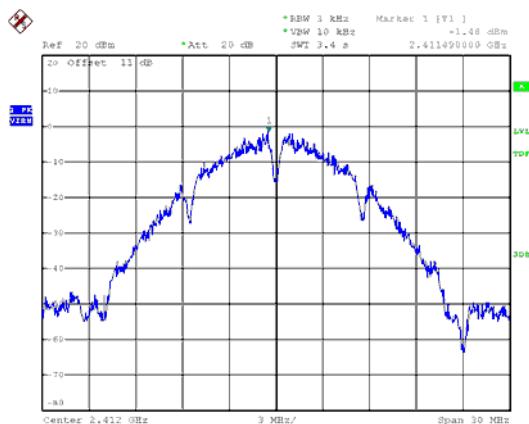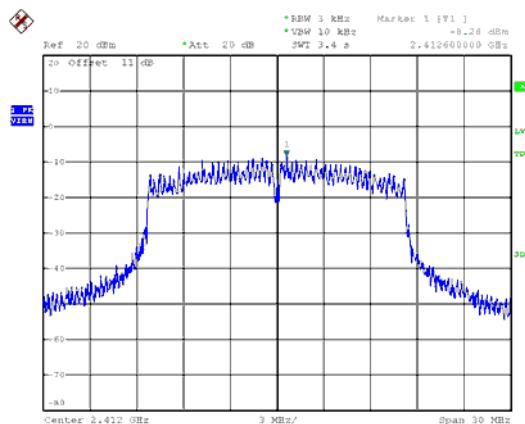Modulation Type: 802.11b
CH01Modulation Type: 802.11g
CH01


CH06

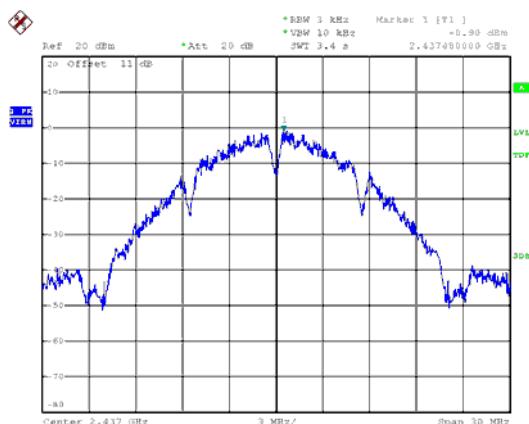


CH06

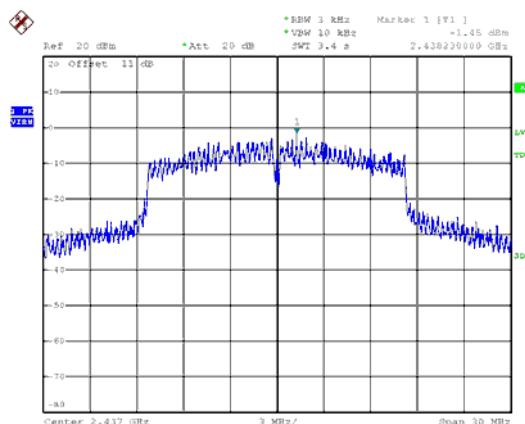

CH11


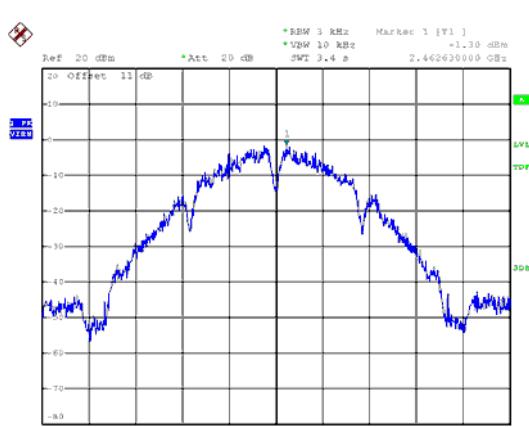


CH11

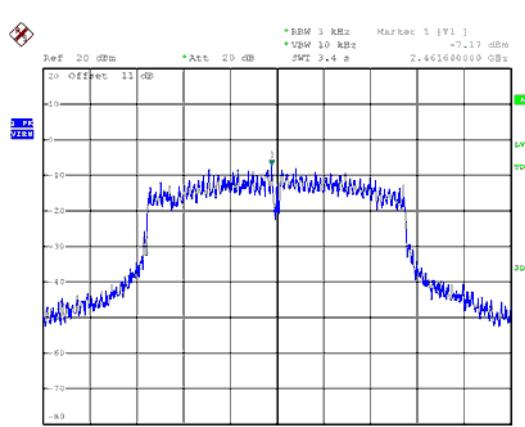





ANT A

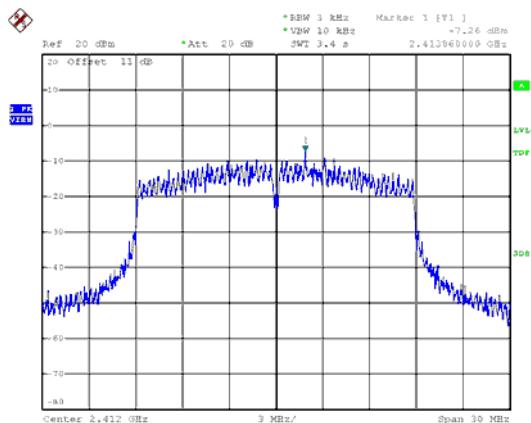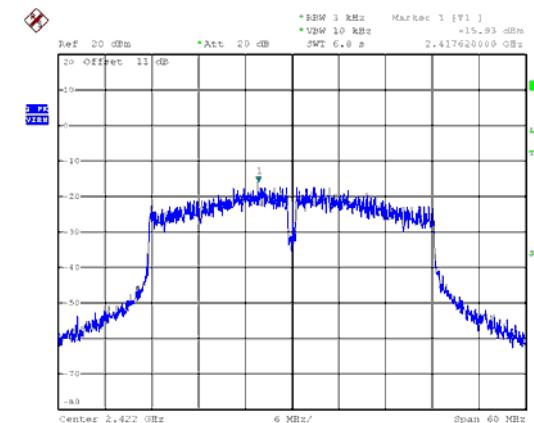Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

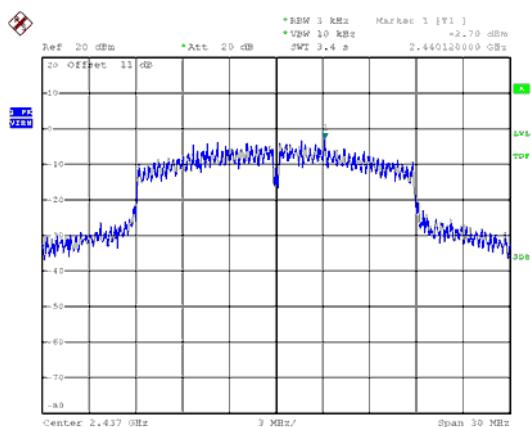


CH06

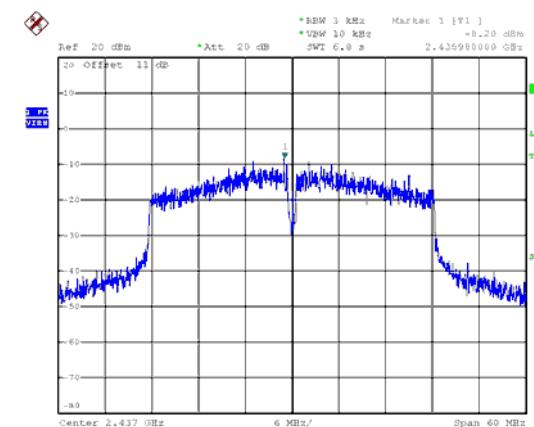

CH11


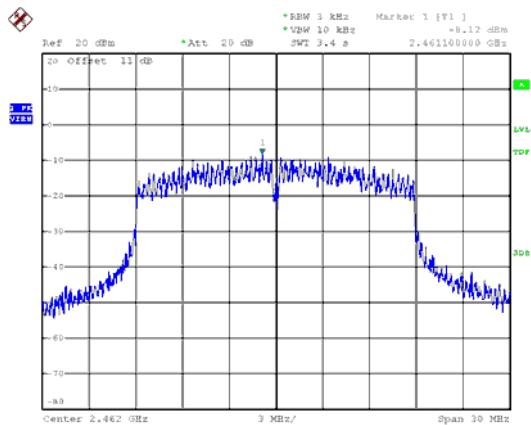


CH09

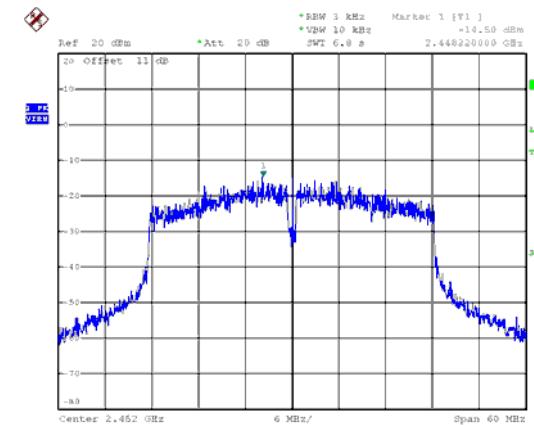





ANT B

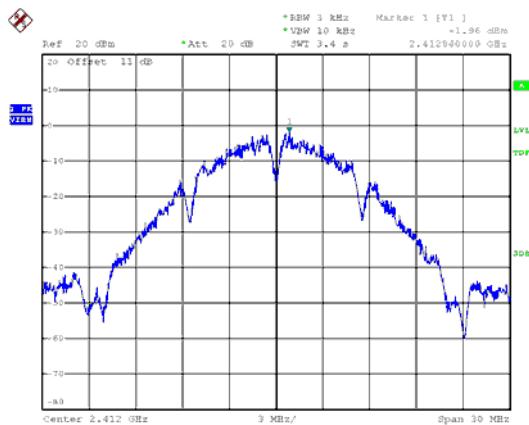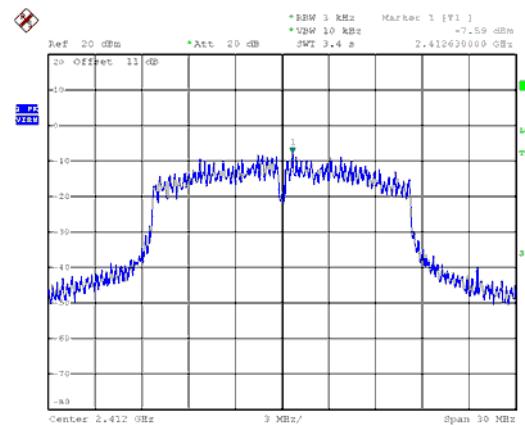Modulation Type: 802.11b
CH01Modulation Type: 802.11g
CH01


CH06

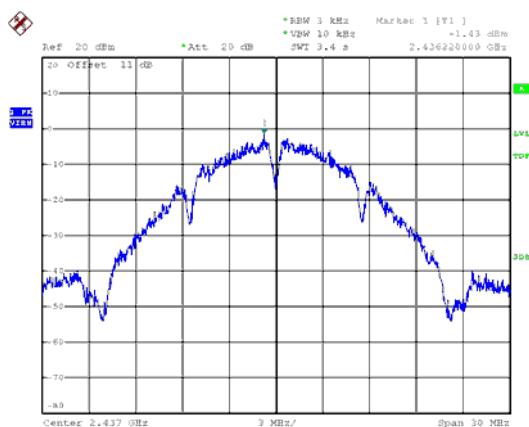


CH06

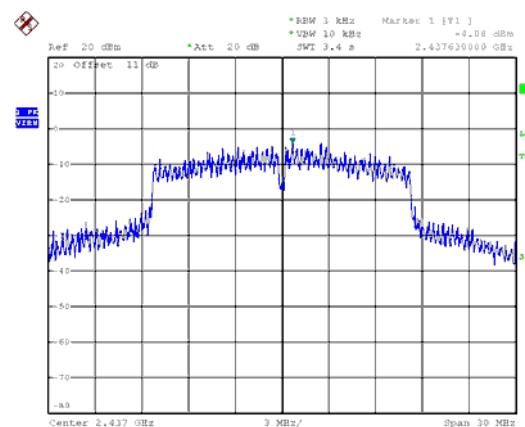

CH11

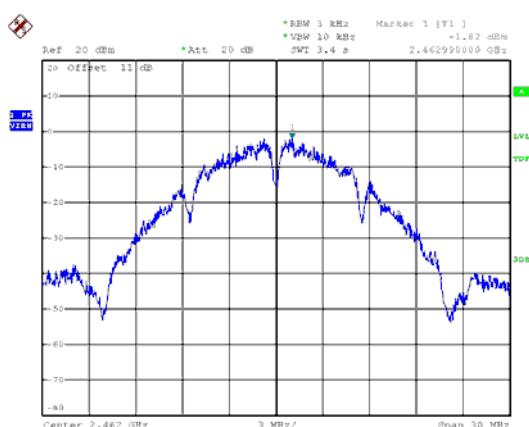


CH11

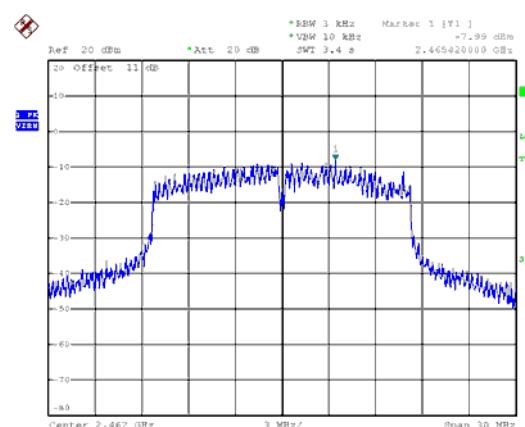




ANT B


Modulation Type: 802.11n HT20
CH01

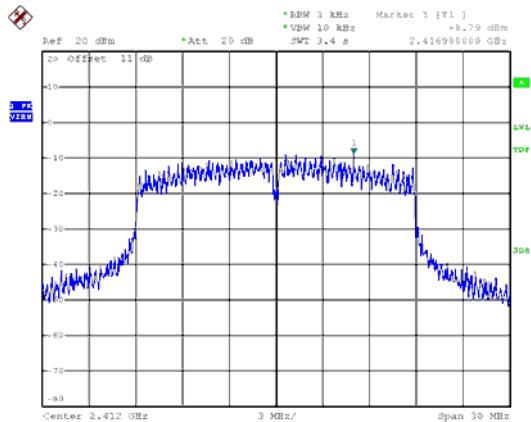


Modulation Type: 802.11n HT40
CH03

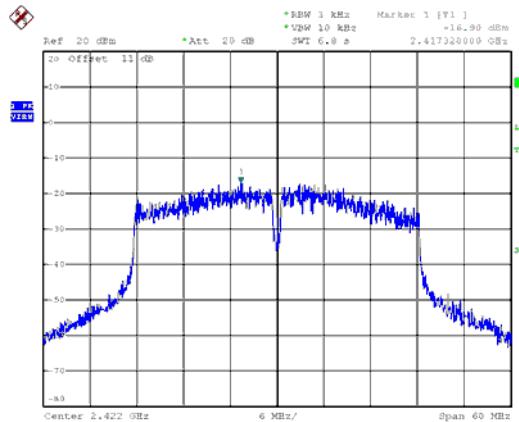


CH06

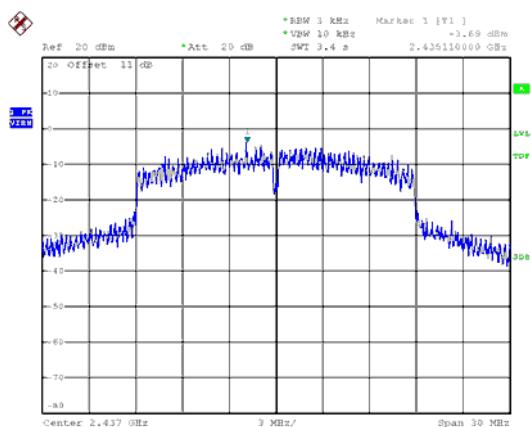

CH06

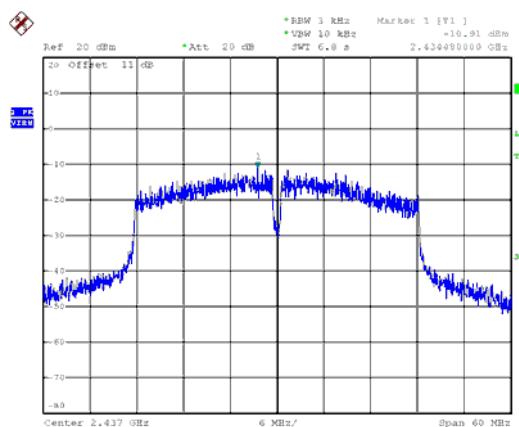

CH11

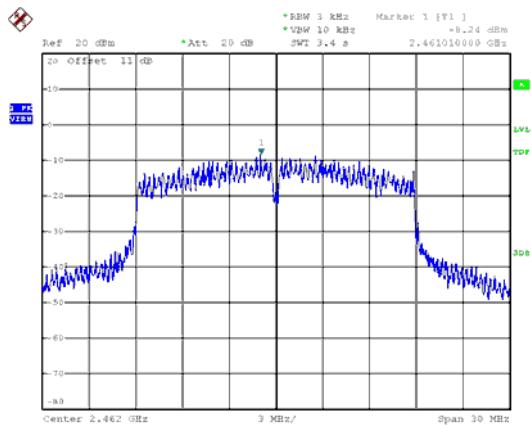

CH09

