



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15B

TEST REPORT

For

HONG KONG IPRO TECHNOLOGY CO., LIMITED

12/F 3 LOCKHART ROAD WANCHAI HK

FCC ID: PQ4IPROA5MINI


Report Type: Original Report	Product Type: Mobile Phone
Report Number: RDG200727013-00B	
Report Date: 2020-08-18	
Reviewed By: Ivan Cao Assistant Manager	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

General Information.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
DECLARATIONS.....	4
System Test Configuration.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENT LIST.....	7
ENVIRONMENTAL CONDITIONS.....	7
Summary of Test Results.....	8
FCC Part 15B §15.107 – Conducted emissions	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST DATA	10
FCC Part 15B §15.109 – Radiated emissions	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile Phone
EUT Model:		A5mini
Highest Operation Frequency:		2480 MHz
Rated Input Voltage:		DC 3.7V from battery or DC 5V from Adapter
Adapter Information	Input:	100Vac-240Vac 50/60Hz 0.15A
	Output:	5.0Vdc 500mA
Serial Number:		RDG200727013-RF-S2
EUT Received Date:		2020.07.28
EUT Received Status:		Good

Objective

This report is prepared on behalf of **HONG KONG IPRO TECHNOLOGY CO.,LIMITED** in accordance with FCC Part 15B Part 2, Part J, and Part 15, Subpart A and B of the Federal Communications Commission's rules.

The objective is to determine the compliance of EUT with: FCC Part 15B.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E PCE submissions with FCC ID: PQ4IPROA5MINI
 FCC Part 15C DSS submissions with FCC ID: PQ4IPROA5MINI

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~13GHz: 5.23 dB
Temperature	±1°C
Humidity	±5%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in downloading mode.

EUT Exercise Software

The software "Winthrax.exe" was used during test.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	293

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	No	1.8	USB Port of Laptop	Keyboard
USB Cable	Yes	No	1.0	Adapter	EUT
Earphone	No	No	1.2	EUT	Earphone

Block Diagram of Test Setup

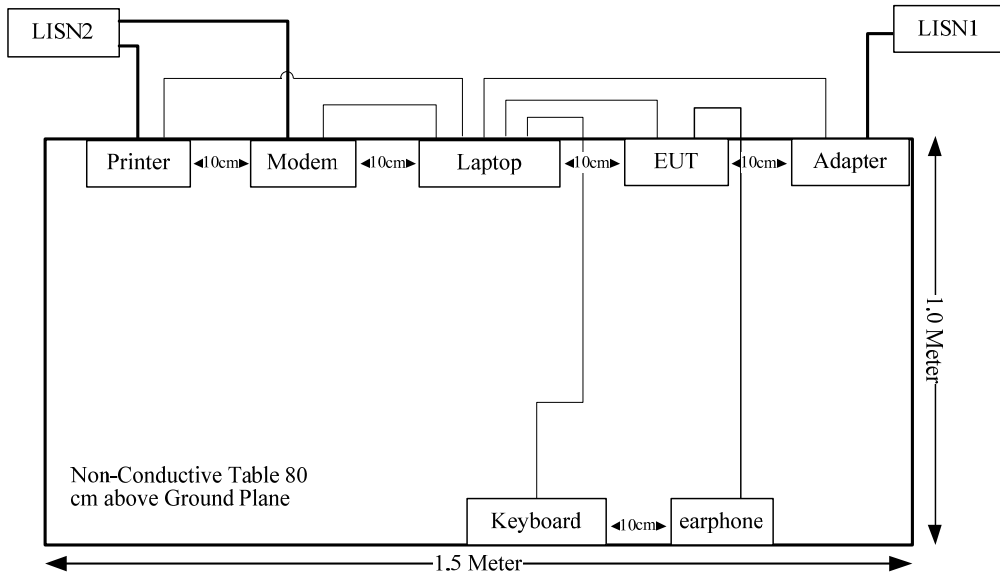

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions					
R&S	LISN	ENV 216	101614	2019-09-12	2020-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A
R&S	L.I.S.N	ESH2-Z5	892107/021	2019-09-05	2020-09-05
Spurious Emissions					
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Item:	Conducted emissions	Radiated emissions (Below 1GHz)	Radiated emissions (Above 1GHz)
Temperature:	26.5 °C	28.1°C	28.1 °C
Relative Humidity:	58%	40%	35%
ATM Pressure:	100.5kPa	100.5kPa	101kPa
Tester:	Barry Yang	Michel Zhang	Carlos
Test Date:	2020-08-01	2020-08-10	2020-08-14


SUMMARY OF TEST RESULTS

FCC Part 15B

Clause	Description of Test	Test Result
§15.107	Conducted emissions	Compliance
§15.109	Radiated emissions	Compliance

FCC PART 15B §15.107 – CONDUCTED EMISSIONS

EUT Setup

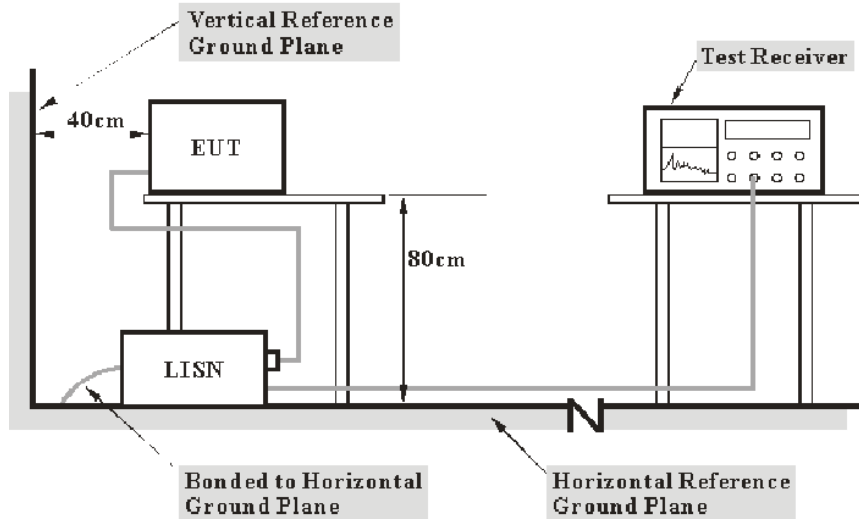

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter or EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT. The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result (QuasiPeak or Average) = Meter Reading + Corr.

Note:

Corr. = Cable loss + Factor of coupling device

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


Margin = Limit – Result

Test Data

Test mode: Downloading

Test Result: Compliance, *Please refer to following table and plots:*


AC120V, 60 Hz, Line:

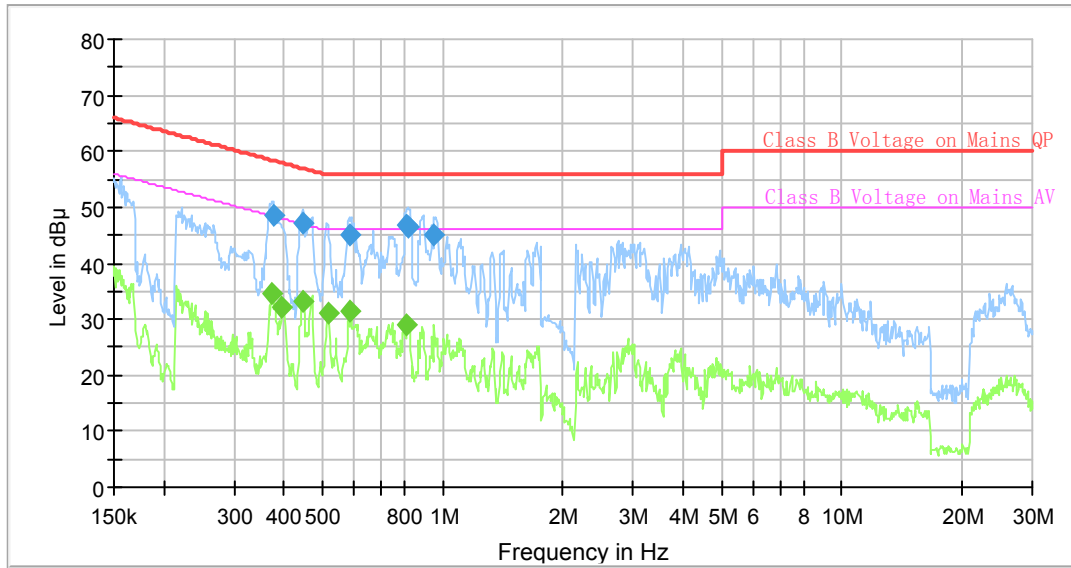

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.371804	---	34.70	48.46	13.76	9.000	L1	9.7
0.375532	48.64	---	58.38	9.74	9.000	L1	9.7
0.396710	---	32.07	47.92	15.85	9.000	L1	9.7
0.444931	47.32	---	56.97	9.65	9.000	L1	9.7
0.447156	---	33.03	46.93	13.90	9.000	L1	9.7
0.514172	---	31.06	46.00	14.94	9.000	L1	9.7
0.585364	45.05	---	56.00	10.95	9.000	L1	9.7
0.585364	---	31.48	46.00	14.52	9.000	L1	9.7
0.813554	46.68	---	56.00	9.32	9.000	L1	9.7
0.813554	---	28.94	46.00	17.06	9.000	L1	9.7
0.817621	46.59	---	56.00	9.41	9.000	L1	9.7
0.949586	45.09	---	56.00	10.91	9.000	L1	9.7

AC120V, 60 Hz, Neutral:

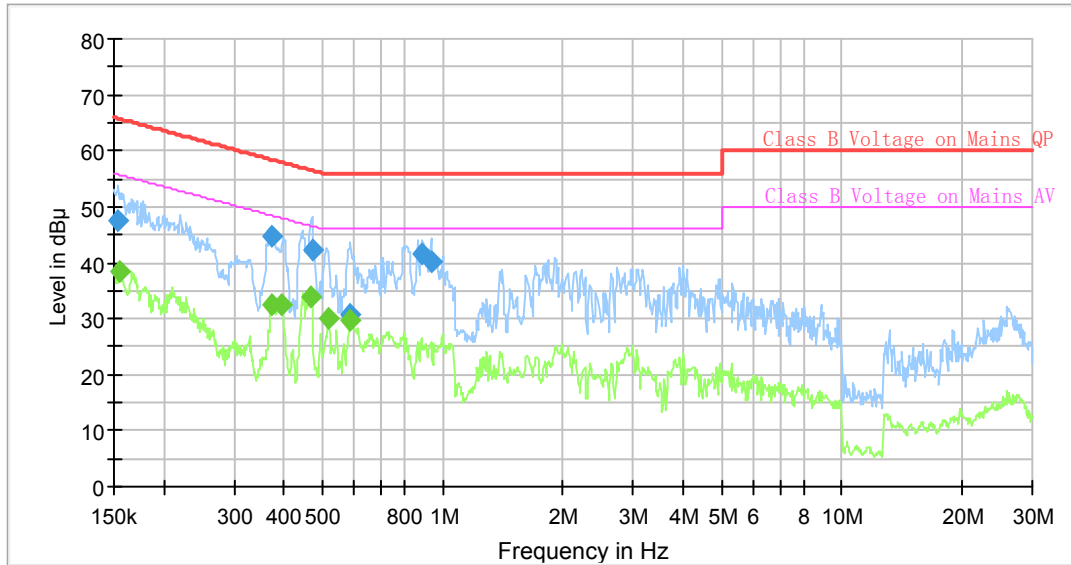


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.153788	47.60	---	65.79	18.19	9.000	N	9.7
0.154557	---	38.55	55.75	17.20	9.000	N	9.7
0.373663	---	32.64	48.42	15.78	9.000	N	9.6
0.373663	44.71	---	58.42	13.71	9.000	N	9.6
0.392773	---	32.37	48.00	15.63	9.000	N	9.6
0.465358	---	33.85	46.60	12.75	9.000	N	9.6
0.470023	42.28	---	56.51	14.23	9.000	N	9.6
0.516743	---	29.91	46.00	16.09	9.000	N	9.6
0.588291	30.62	---	56.00	25.38	9.000	N	9.6
0.588291	---	29.72	46.00	16.28	9.000	N	9.6
0.889970	41.67	---	56.00	14.33	9.000	N	9.6
0.935483	40.08	---	56.00	15.92	9.000	N	9.6


FCC PART 15B §15.109 – RADIATED EMISSIONS

EUT Setup

Below 1GHz:

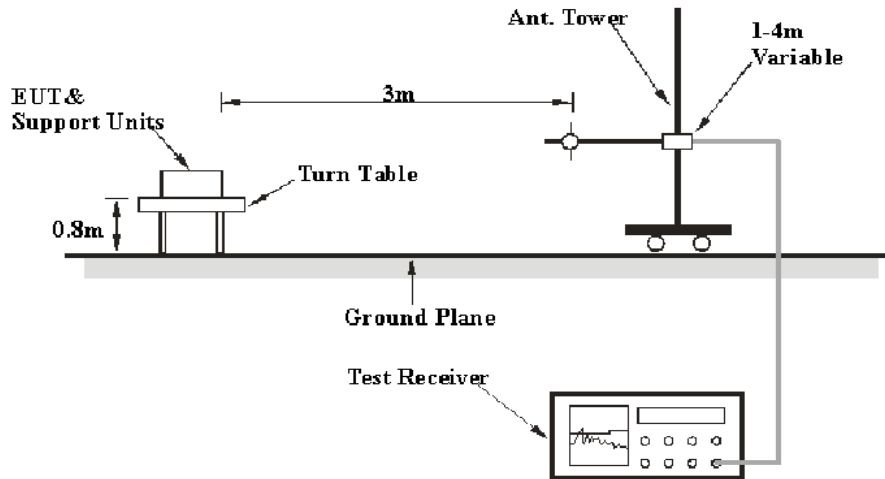

Above 1GHz:

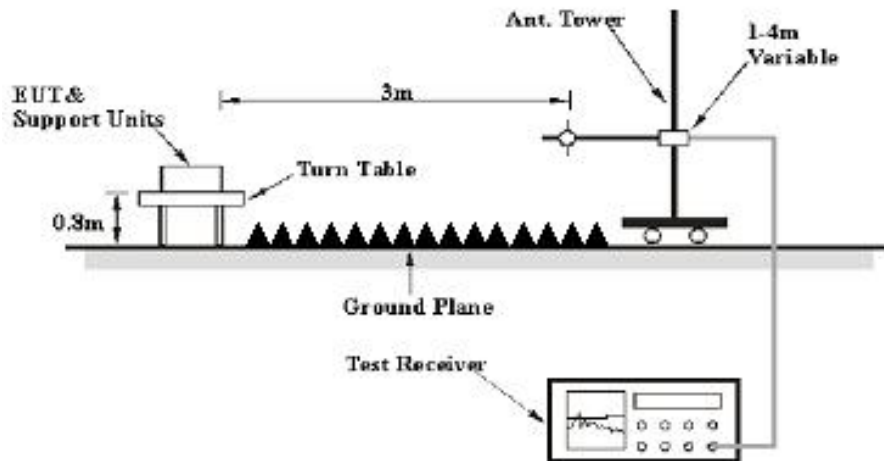

The radiated emission tests were performed at the 3 meters distance, above 1GHz were performed at the 3 meters, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Meter Reading + Corrected

Corrected = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

Test Data


Please refer to following table and plots:

Test Mode: Downloading

1) 30MHz-1GHz:

Horizontal:


80.0 dB μ V/m

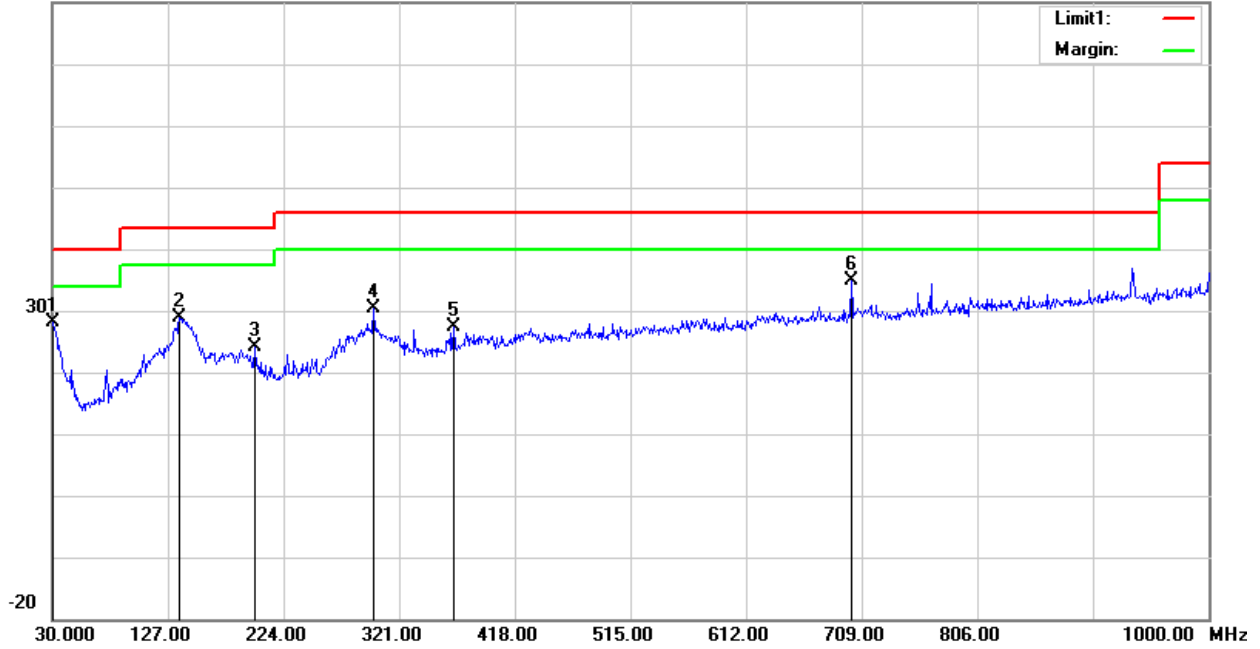

No.	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	30.0000	26.77	peak	1.46	28.23	40.00	11.77
2	136.7000	34.35	peak	-5.45	28.90	43.50	14.60
3	199.7500	30.01	peak	-5.83	24.18	43.50	19.32
4	299.6600	34.14	peak	-3.69	30.45	46.00	15.55
5	366.5900	30.02	peak	-2.72	27.30	46.00	18.70
6	700.2700	32.22	peak	2.59	34.81	46.00	11.19

Vertical:

80.0 dBuV/m

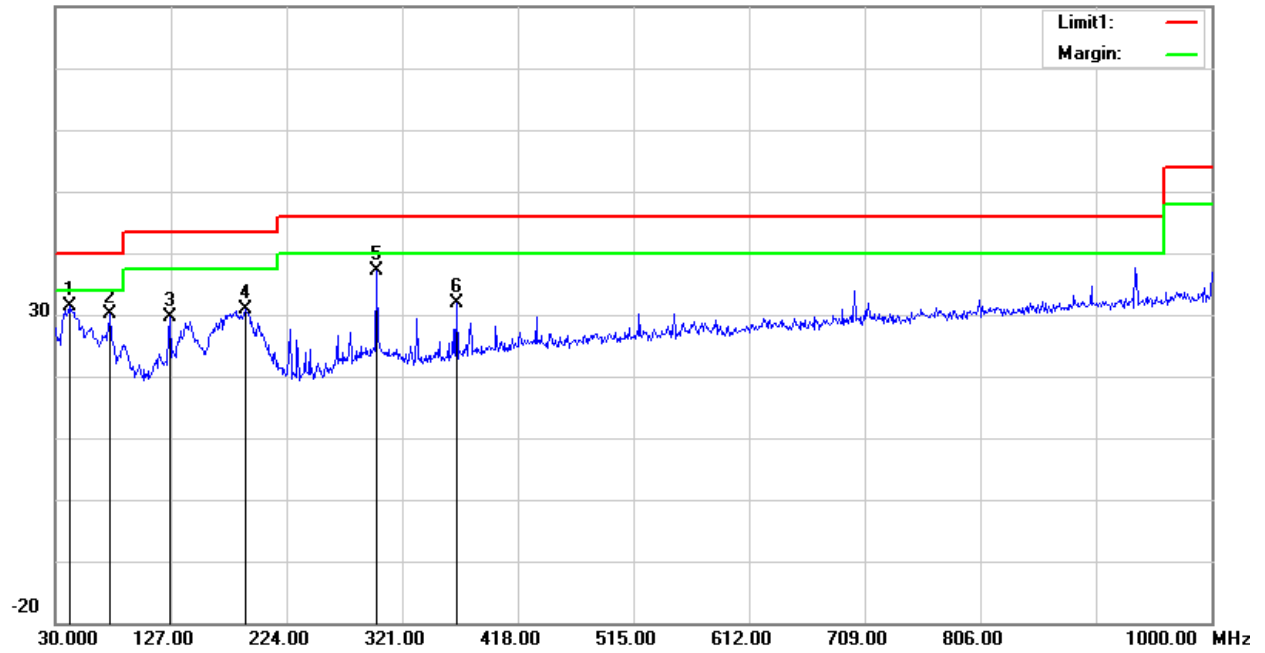


No.	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	41.6400	38.54	peak	-7.16	31.38	40.00	8.62
2	75.5900	41.42	peak	-11.27	30.15	40.00	9.85
3	126.0300	34.57	peak	-4.86	29.71	43.50	13.79
4	190.0500	37.85	peak	-7.00	30.85	43.50	12.65
5	299.6600	40.79	peak	-3.69	37.10	46.00	8.90
6	366.5900	34.56	peak	-2.72	31.84	46.00	14.16

2) 1GHz-13GHz:

Horizontal:


100.0 dB μ V/m

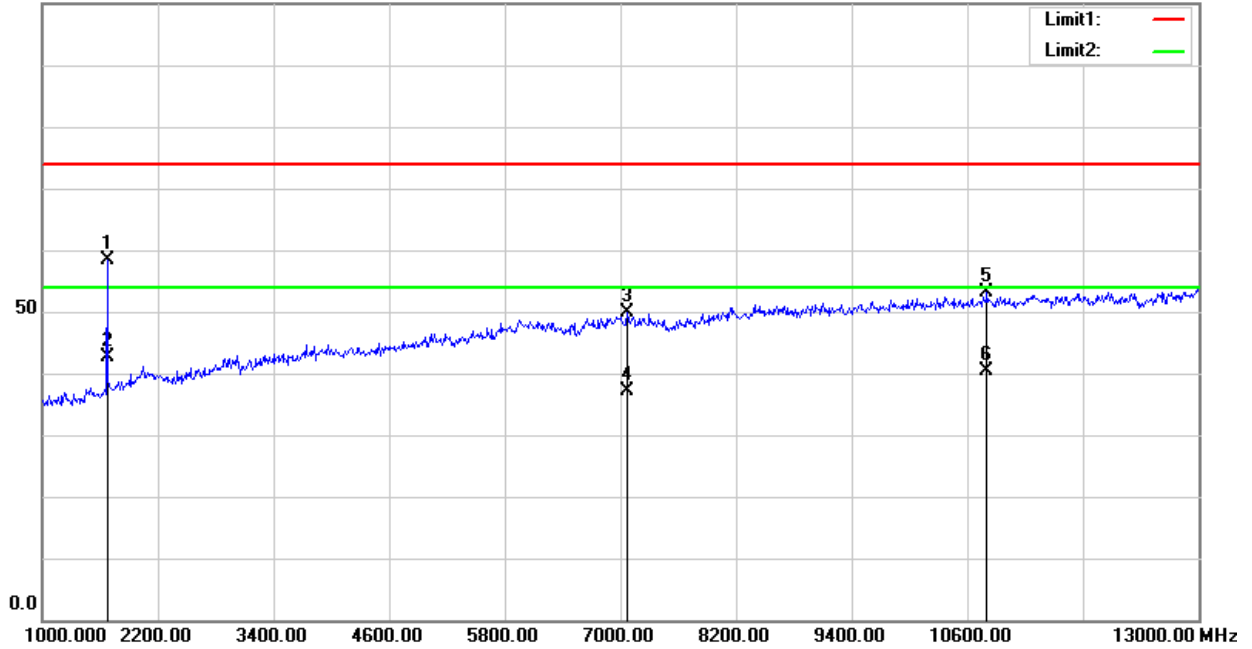

No.	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	1672.000	56.59	peak	1.73	58.32	74.00	15.68
2	1672.000	40.87	AVG	1.73	42.60	54.00	11.40
3	7072.000	34.90	peak	14.98	49.88	74.00	24.12
4	7072.000	22.13	AVG	14.98	37.11	54.00	16.89
5	10804.000	33.71	peak	19.42	53.13	74.00	20.87
6	10804.000	21.03	AVG	19.42	40.45	54.00	13.55

Vertical:

100.0 dBuV/m

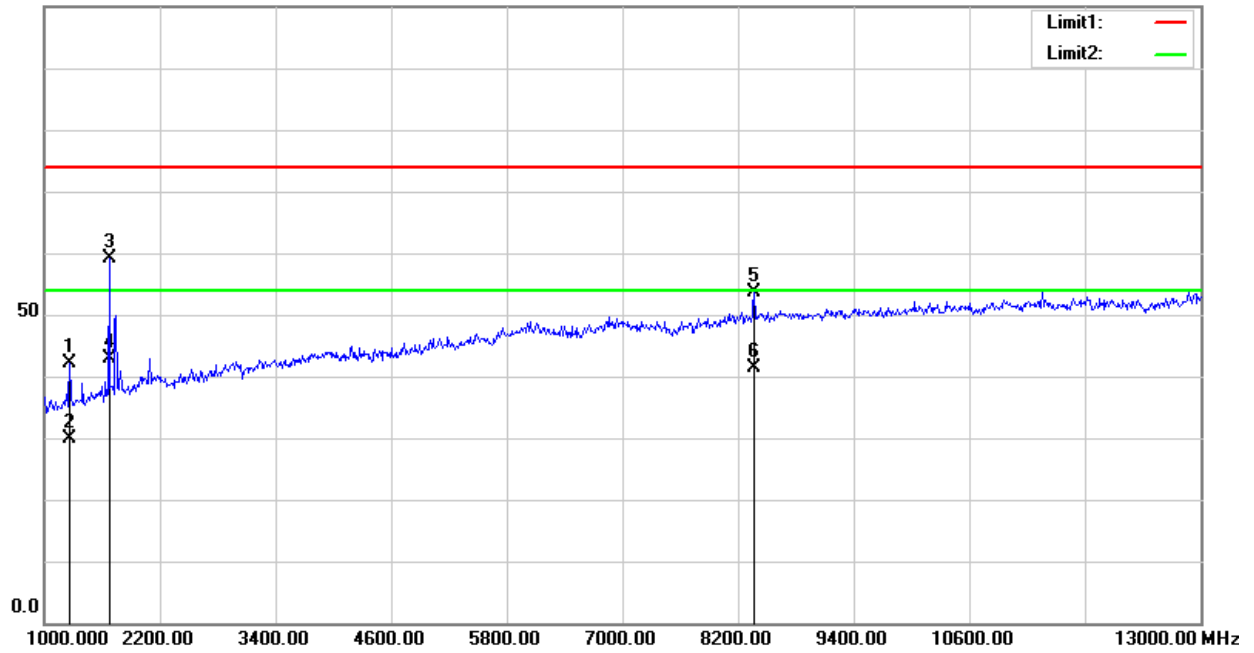

No.	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	1264.000	42.37	peak	-0.16	42.21	74.00	31.79
2	1264.000	30.01	AVG	-0.16	29.85	54.00	24.15
3	1672.000	57.30	peak	1.73	59.03	74.00	14.97
4	1672.000	41.20	AVG	1.73	42.93	54.00	11.07
5	8368.000	37.42	peak	16.23	53.65	74.00	20.35
6	8368.000	25.12	AVG	16.23	41.35	54.00	12.65

*****END OF REPORT*****