

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

WIRELESS SUBWOOFER

MODEL No.: 8 inch wireless subwoofer

TRADE MARK: SINCLAIR AUDIO

FCC ID: PQA-TV2-SUB

REPORT NO: KAD121031049E

ISSUE DATE: November 01, 2012

Prepared for

**JAM INDUSTRIES LTD.
21000 Trans Canada Highway, Baie D'Urfe Quebec H9X 4B7 Canada**

Prepared by

**DONGGUAN EMTEK CO., LTD.
No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

VERIFICATION OF COMPLIANCE

Applicant:	JAM INDUSTRIES LTD. 21000 Trans Canada Highway, Baie D'Urfe Quebec H9X 4B7 Canada
Manufacturer:	JAM INDUSTRIES LTD. 21000 Trans Canada Highway, Baie D'Urfe Quebec H9X 4B7 Canada
Product Description:	WIRELESS SUBWOOFER
Trade Mark:	SINCLAIR AUDIO
Model Number:	8 inch wireless subwoofer
Serial Number:	N/A
File Number:	KAD121031049E
Date of Test:	August 17, 2012 to November 01, 2012

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Approved By



Sam Lv / Q.A. Manager
DONGGUAN EMTEK CO., LTD.

Table of Contents

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION.....	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3	TEST METHODOLOGY	5
1.4	SPECIAL ACCESSORIES	5
1.5	EQUIPMENT MODIFICATIONS	5
1.6	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	LIMITATION	7
2.5	CONFIGURATION OF TESTED SYSTEM	11
3.	SUMMARY OF TEST RESULTS	12
4.	DESCRIPTION OF TEST MODES	13
5.	CONDUCTED EMISSIONS TEST	14
5.1	MEASUREMENT PROCEDURE:.....	14
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.3	MEASUREMENT EQUIPMENT USED:	14
5.4	MEASUREMENT RESULT:.....	14
5.5	CONDUCTED MEASUREMENT PHOTOS:	17
6.	RADIATED EMISSION TEST	18
6.1	MEASUREMENT PROCEDURE	18
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
6.3	MEASUREMENT EQUIPMENT USED:	20
6.4	MEASUREMENT RESULT	20
6.5	RADIATED MEASUREMENT PHOTOS:.....	26
7.	CHANNEL SEPARATION TEST	27
7.1	MEASUREMENT PROCEDURE	27
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
7.3	MEASUREMENT EQUIPMENT USED:	27
7.4	MEASUREMENT RESULTS:.....	27
8.	20DB BANDWIDTH TEST	30
8.1	MEASUREMENT PROCEDURE	30
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
8.3	MEASUREMENT EQUIPMENT USED:	30

8.4	MEASUREMENT RESULTS:.....	30
9.	QUANTITY OF HOPPING CHANNEL TEST.....	33
9.1	MEASUREMENT PROCEDURE.....	33
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	33
9.3	MEASUREMENT EQUIPMENT USED:	33
9.4	MEASUREMENT RESULTS:.....	33
10.	TIME OF OCCUPANCY (DWELL TIME) TEST	34
10.1	TEST DESCRIPTION.....	34
10.2	TEST REQUIREMENTS / LIMITS.....	34
10.3	TEST RESULTS:	34
11.	M AX IMUM PEAK OUTPUT POWER TEST	37
11.1	MEASUREMENT PROCEDURE.....	37
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	37
11.3	MEASUREMENT EQUIPMENT USED:	37
11.4	MEASUREMENT RESULTS:.....	38
12.	BAND EDGE TEST.....	40
12.1	MEASUREMENT PROCEDURE.....	40
12.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	40
12.3	MEASUREMENT EQUIPMENT USED:	40
12.4	MEASUREMENT RESULTS:.....	41
13.	ANTENNA APPLICATION.....	43
13.1	ANTENNA REQUIREMENT	43
13.2	RESULT	43
14.	RF EXPOSURE EVALUATION	44
14.1	FRIIS TRANSMISSION FORMULA: $PD=(P_{OUT}*G)/(4*\pi*R^2)$	44
14.2	MEASUREMENT RESULT.....	44

1. GENERAL INFORMATION

1.1 Product Description

The JAM INDUSTRIES LTD. Model: 8 inch wireless subwoofer (referred to as the EUT in this report) The EUT is an short range, lower power, WIRELESS SUBWOOFER designed as an Input Device. It is designed by way of utilizing the following modulation achieves the system operating.

The EUT has a RF module, a major technical descriptions of EUT are described as following:

Technical Specifications	RF Module
Operation Frequency	2404-2479 MHz
Modulation	FSK
Number of Channel	16
Channel space	5 MHz
Rated RF Output Power	-6.69dBm
Antenna Type	Metal antenna
Antenna GAIN	2dBi
Input Rating	AC 120V/60Hz

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: PQA-TV2-SUB filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and FCC Public Notice DA 00-705.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab. : Accredited by FCC, Aug. 18, 2011
The Certificate Number is 247565.

Accredited by Industry Canada, January 13, 2011
The Certificate Number is 9444A

Name of Firm : DONGGUAN EMTEK CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
	902-928	<250	>250	NA	NA
	2400-2483.5	NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	15	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()”is all channel’s average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	/
0.490-1.705	24000/F(kHz)	30	/
1.705-30.0	30	30	/
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\mu\text{V/m})$
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A($\text{dB}\mu\text{V/m}$)(at 3m)		Class B($\text{dB}\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	WIRELESS SUBWOOFER	SINCLAIR AUDIO	8 inch wireless subwoofer	PQA-TV2-SUB	N/A	<i>EUT</i>

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§ 15.247(a)(1)	Channel Separation test	Compliant
§ 15.247(a)(1)	20dB Bandwidth	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§ 15.247(b)	Max Peak output Power test	Compliant
§ 15.247(d)	Band edge test	Compliant
§ 15.207	AC Power Conducted Emission	Compliant
§ 15.247(d), § 15.209	Radiated Emission	Compliant
§ 15.203	Antenna Requirement	Compliant
§ 1.1310	RF Exposure	Compliant

4. Description of test modes

The EUT (WIRELESS SUBWOOFER) has been tested under normal operating condition. This EUT is a wireless system, Let EUT transmits at every channel with highest power, only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed. The operating modes of the EUTs used for testing are described as follows:

RF Module:


Channel	Frequency(MHz)
1	2404
9	2444
16	2479

5. Conducted Emissions Test

5.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)

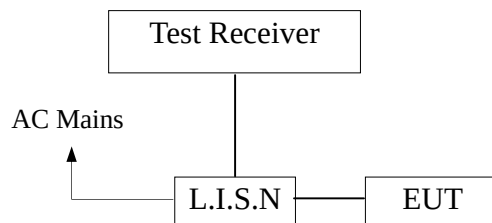

5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	100018	05/29/2012	05/28/2013
L.I.S.N	Rohde & Schwarz	ENV216	100017	05/29/2012	05/28/2013
RF Switching Unit	CDS	RSU-M2	38401	05/29/2012	05/28/2013

5.4 Measurement Result:

Pass.
Please refer to the following data.


Conducted Emission Measurement

File :8 inch wireless subwoofer
80.0 dBuV

Data :#1

Date: 12/10/15/

Time: 10/55/35

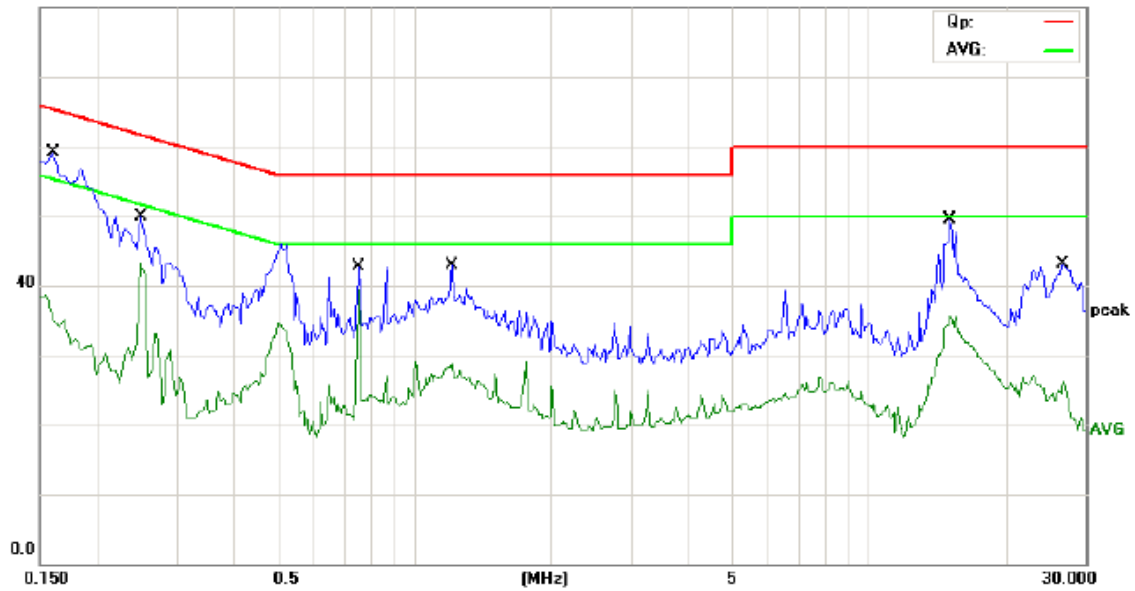

Site site #1

Phase: L1

Temperature: 25

Limit: (CE)FCC PART 15 class C_QP

Power: AC 120V/60Hz

Humidity: 50 %

EUT: WIRELESS SUBWOOFER

M/N:

Mode: TX

Note: M/N:8 inch wireless subwoofer

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1600	53.19	0.00	53.19	65.46	-12.27	QP	
2		0.1600	38.77	0.00	38.77	55.46	-16.69	AVG	
3		0.2500	40.40	0.00	40.40	61.76	-21.36	QP	
4		0.2500	43.27	0.00	43.27	51.76	-8.49	AVG	
5		0.7550	38.50	0.00	38.50	56.00	-17.50	QP	
6	*	0.7550	39.58	0.00	39.58	46.00	-6.42	AVG	
7		1.2100	41.87	0.00	41.87	56.00	-14.13	QP	
8		1.2100	28.66	0.00	28.66	46.00	-17.34	AVG	
9		15.1000	36.60	0.00	36.60	60.00	-23.40	QP	
10		15.1000	35.80	0.00	35.80	50.00	-14.20	AVG	
11		26.7500	40.06	0.00	40.06	60.00	-19.94	QP	
12		26.7500	26.30	0.00	26.30	50.00	-23.70	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.


Conducted Emission Measurement

File :8 inch wireless subwoofer

Data :#2

Date: 12/10/15/

Time: 11/00/13

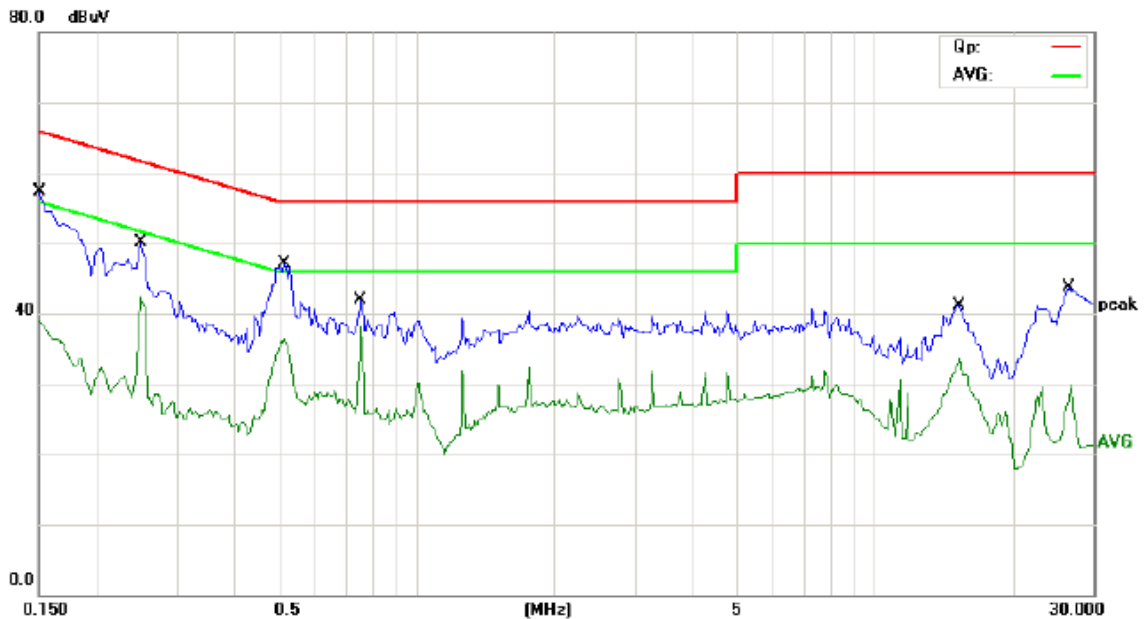

Site site #1

Phase: **N**

Temperature: 25

Limit: (CE)FCC PART 15 class C_QP

Power: AC 120V/60Hz

Humidity: 50 %

EUT: WIRELESS SUBWOOFER

M/N:

Mode: TX

Note: M/N:8 inch wireless subwoofer

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	53.38	0.00	53.38	66.00	-12.62	QP	
2		0.1500	39.00	0.00	39.00	56.00	-17.00	AVG	
3		0.2500	48.18	0.00	48.18	61.76	-13.58	QP	
4		0.2500	42.37	0.00	42.37	51.76	-9.39	AVG	
5		0.5150	45.15	0.00	45.15	56.00	-10.85	QP	
6		0.5150	36.29	0.00	36.29	46.00	-9.71	AVG	
7		0.7550	38.94	0.00	38.94	56.00	-17.06	QP	
8	*	0.7550	38.15	0.00	38.15	46.00	-7.85	AVG	
9		15.1455	38.09	0.00	38.09	60.00	-21.91	QP	
10		15.1455	33.61	0.00	33.61	50.00	-16.39	AVG	
11		26.4250	40.72	0.00	40.72	60.00	-19.28	QP	
12		26.4250	29.99	0.00	29.99	50.00	-20.01	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

5.5 Conducted Measurement Photos:




6. Radiated Emission Test

6.1 Measurement Procedure


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. For range 9KHz~30MHz, The measured value is really too low to be recorded.

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

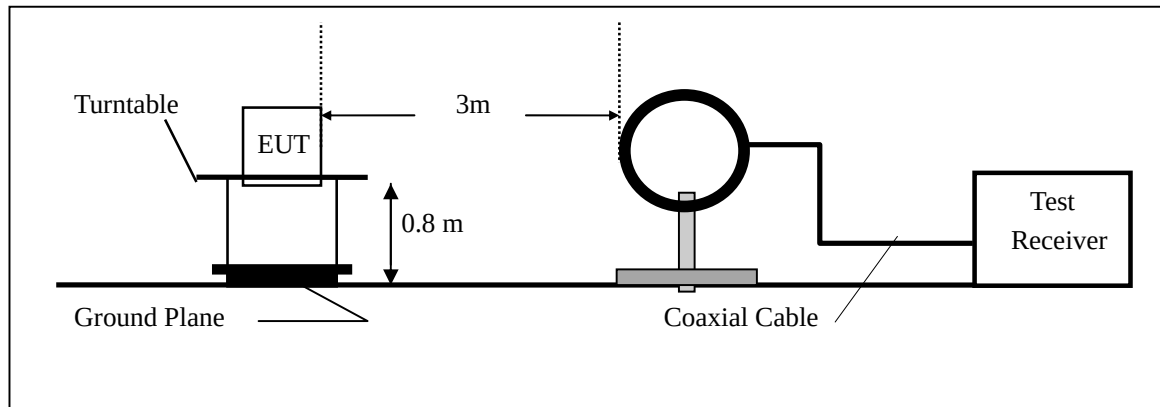

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

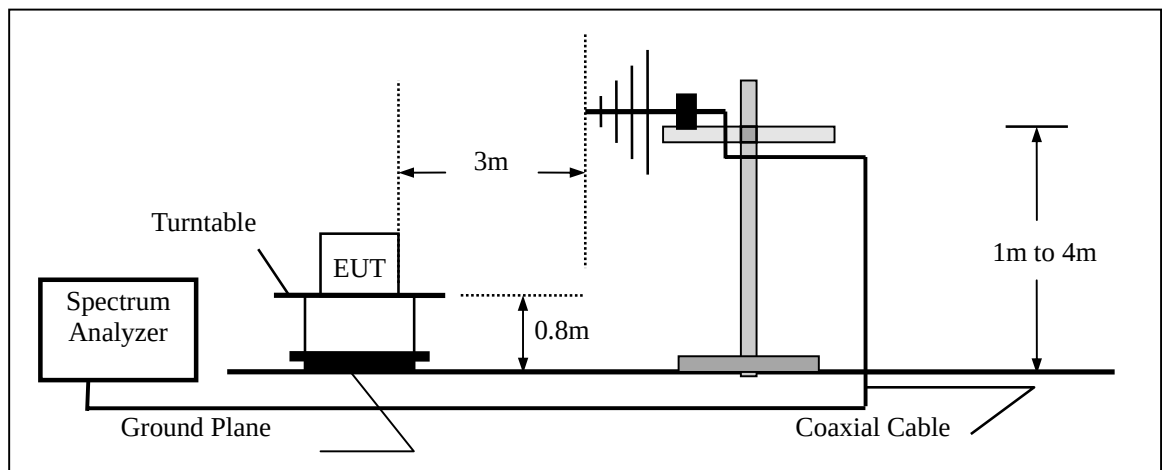

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

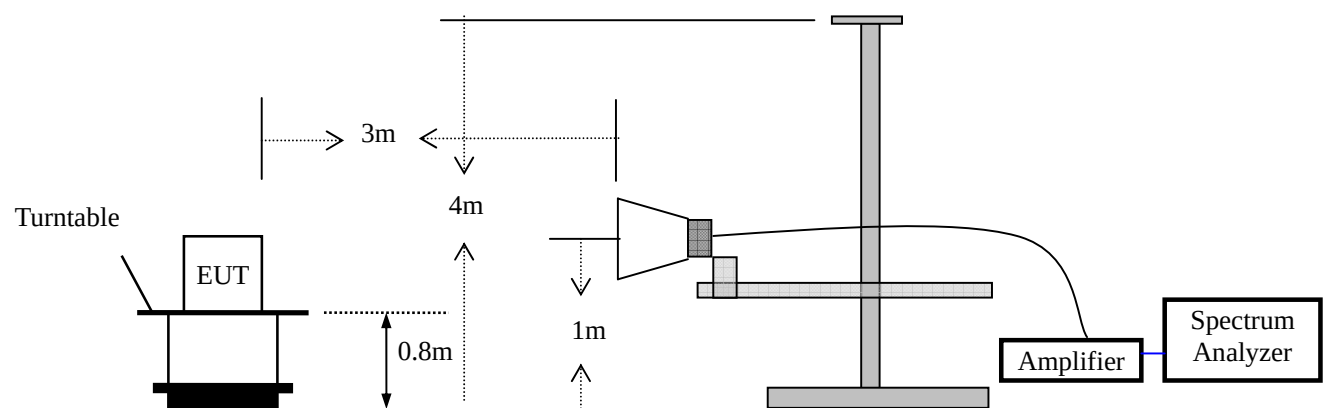

6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2012	05/28/2013
Spectrum Analyzer	HP	E4407B	839840481	05/29/2012	05/28/2013
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/29/2012	05/28/2013
Pre-Amplifier	HP	8447D	2944A07999	05/29/2012	05/28/2013
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2012	05/28/2013
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2012	05/28/2013
Horn Antenna	Electro-Metrics	EM-6961	103314	05/29/2012	05/28/2013
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2012	05/28/2013

6.4 Measurement Result

Operation Mode: TX Mode (CH1: 2404MHz) Test Date : October 22, 2012
Frequency Range: 30~1000MHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBUV/m)	Limit 3m (dBUV/m)	Margin (dB)	Note
34.850	V	34.62	40.00	-5.38	PK
43.050	V	36.52	40.00	-3.48	PK
46.660	V	36.57	40.00	-3.43	PK
55.220	V	35.84	40.00	-4.16	PK
61.040	V	35.23	40.00	-4.77	PK
85.290	V	35.91	40.00	-4.09	PK
30.000	H	25.12	40.00	-14.88	PK
42.610	H	25.76	40.00	-14.24	PK
54.250	H	28.26	40.00	-11.74	PK
62.010	H	26.37	40.00	-13.63	PK
78.500	H	34.46	40.00	-5.54	PK
84.400	H	35.92	40.00	-4.08	PK

Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH9: 2444MHz) Test Date : October 22, 2012
Frequency Range: 30~1000MHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
31.150	V	34.25	40.00	-5.75	PK
46.150	V	36.44	40.00	-3.56	PK
46.790	V	34.09	40.00	-5.91	PK
52.020	V	35.17	40.00	-4.83	PK
64.040	V	35.35	40.00	-4.65	PK
89.120	V	35.67	40.00	-4.33	PK
32.000	H	25.24	40.00	-14.76	PK
41.580	H	27.58	40.00	-12.42	PK
54.660	H	28.19	40.00	-11.81	PK
62.370	H	26.05	40.00	-13.95	PK
78.290	H	34.22	40.00	-5.78	PK
86.170	H	35.78	40.00	-4.22	PK

Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH16: 2479MHz) Test Date : October 22, 2012
Frequency Range: 30~1000MHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
34.110	V	34.69	40.00	-5.31	PK
43.250	V	36.41	40.00	-3.59	PK
48.070	V	34.45	40.00	-5.55	PK
51.220	V	35.38	40.00	-4.62	PK
65.940	V	35.21	40.00	-4.79	PK
89.110	V	35.58	40.00	-4.42	PK
34.100	H	25.09	40.00	-14.91	PK
42.510	H	27.51	40.00	-12.49	PK
58.660	H	28.19	40.00	-11.81	PK
63.380	H	26.74	40.00	-13.26	PK
76.210	H	34.12	40.00	-5.88	PK
85.170	H	35.66	40.00	-4.34	PK

Note: (1) All Readings are Peak Value.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH1: 2404MHz) Test Date : October 22, 2012
Frequency Range: 1-25GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2400	V	58.77	46.95	74	54	-15.23	-7.05
4808	V	60.00	47.41	74	54	-14.00	-6.59
7212	V	58.74	46.36	74	54	-15.26	-7.64
9616	V	60.23	47.54	74	54	-13.77	-6.46
12020	V	58.36	47.09	74	54	-15.64	-6.91
2400	H	58.46	47.88	74	54	-15.54	-6.12
4808	H	58.58	46.95	74	54	-15.42	-7.05
7212	H	59.34	47.75	74	54	-14.66	-6.25
9616	H	59.11	49.00	74	54	-14.89	-5.00
12020	H	56.45	45.22	74	54	-17.55	-8.78

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH9: 2444MHz) Test Date : October 22, 2012
Frequency Range: 1-25GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4888	V	59.43	44.34	74	54	-14.57	-9.66
7332	V	59.66	46.77	74	54	-14.34	-7.23
9776	V	58.28	44.56	74	54	-15.72	-9.44
12220	V	60.45	44.33	74	54	-13.55	-9.67
4888	H	59.99	44.55	74	54	-14.01	-9.45
7332	H	59.46	44.68	74	54	-14.54	-9.32
9776	H	59.08	45.19	74	54	-14.92	-8.81
12220	H	60.04	46.26	74	54	-13.96	-7.74

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(3) The average measurement was not performed when the peak measured data under the limit of average detection.



Operation Mode: TX Mode (CH16: 2479MHz) Test Date : October 22, 2012
Frequency Range: 1-25GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2483.5	V	60.14	45.36	74	54	-13.86	-8.64
4958	V	59.77	47.18	74	54	-14.23	-6.82
7437	V	59.64	46.55	74	54	-14.36	-7.45
9916	V	60.23	44.69	74	54	-13.77	-9.31
12395	V	58.13	45.72	74	54	-15.87	-8.28
2483.5	H	59.28	44.30	74	54	-14.72	-9.70
4958	H	58.46	47.57	74	54	-15.54	-6.43
7437	H	59.87	44.66	74	54	-14.13	-9.34
9916	H	58.30	44.92	74	54	-15.70	-9.08
12395	H	60.26	46.29	74	54	-13.74	-7.71

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

6.5 Radiated Measurement Photos:

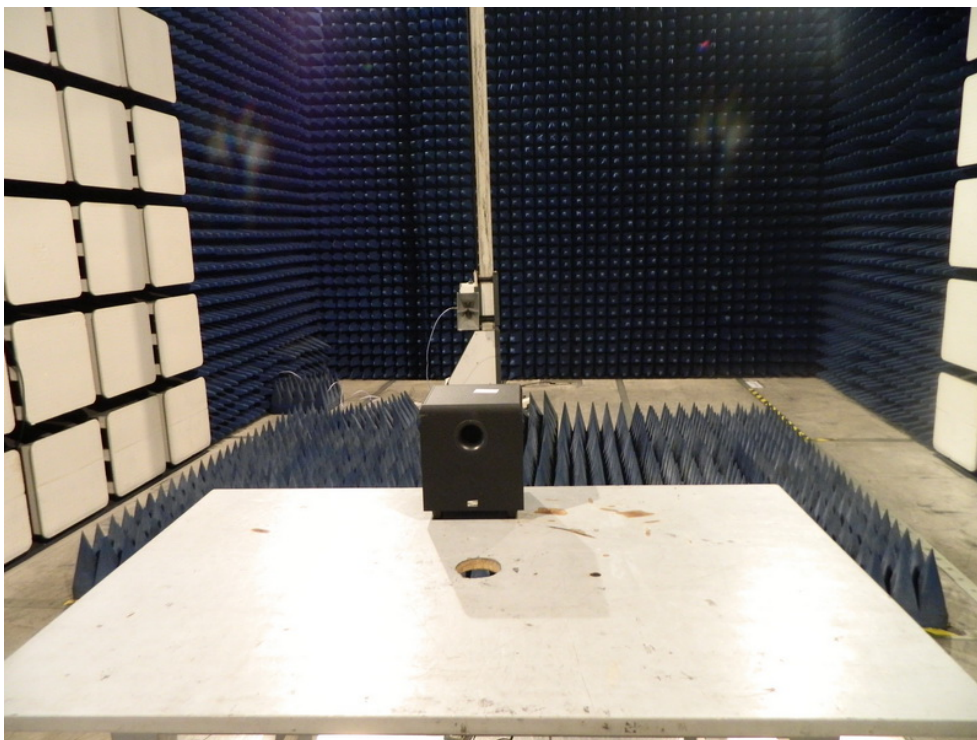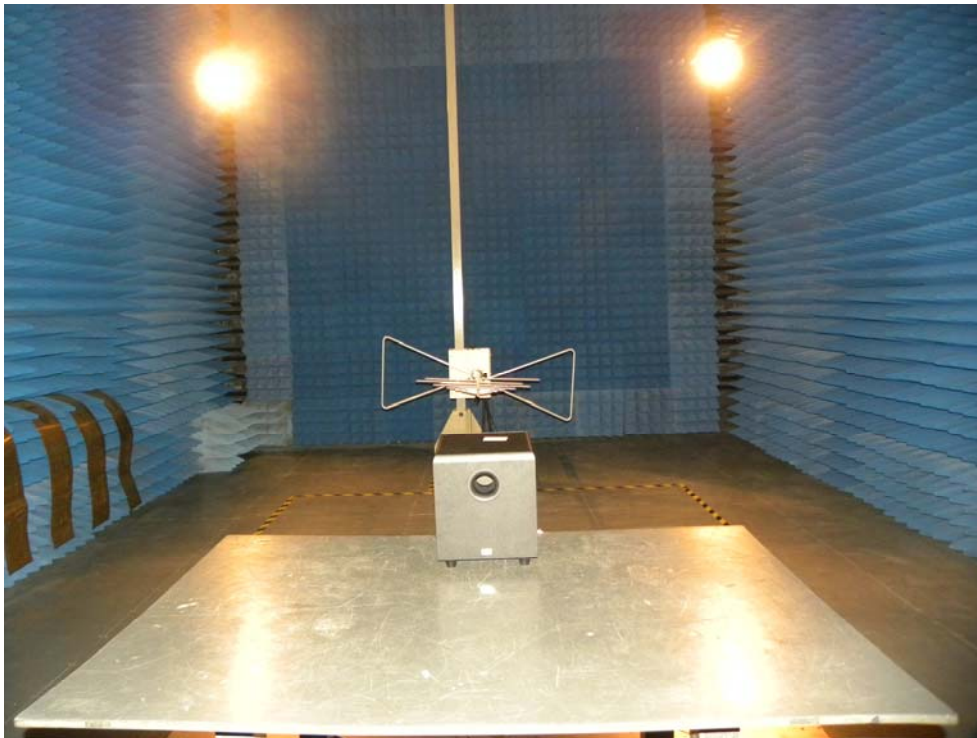


7. Channel Separation test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:


Same as 6.3 Radiated Emission Measurement.


7.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 21, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
1	2404	4910	>3080
9	2444	5060	>2980
16	2479	5060	>2980

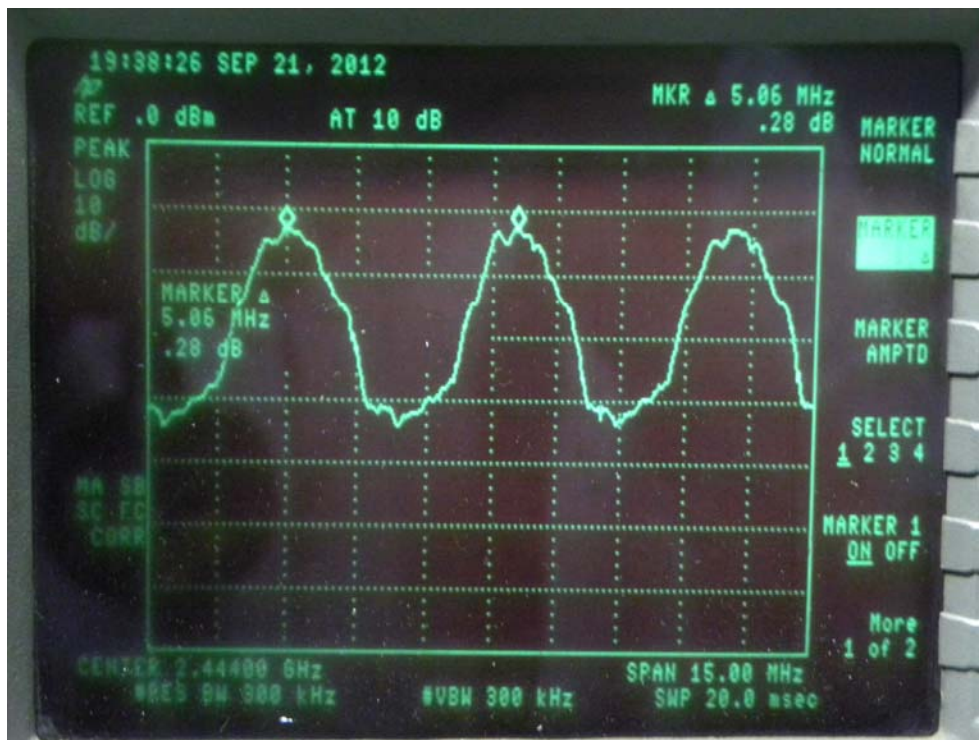

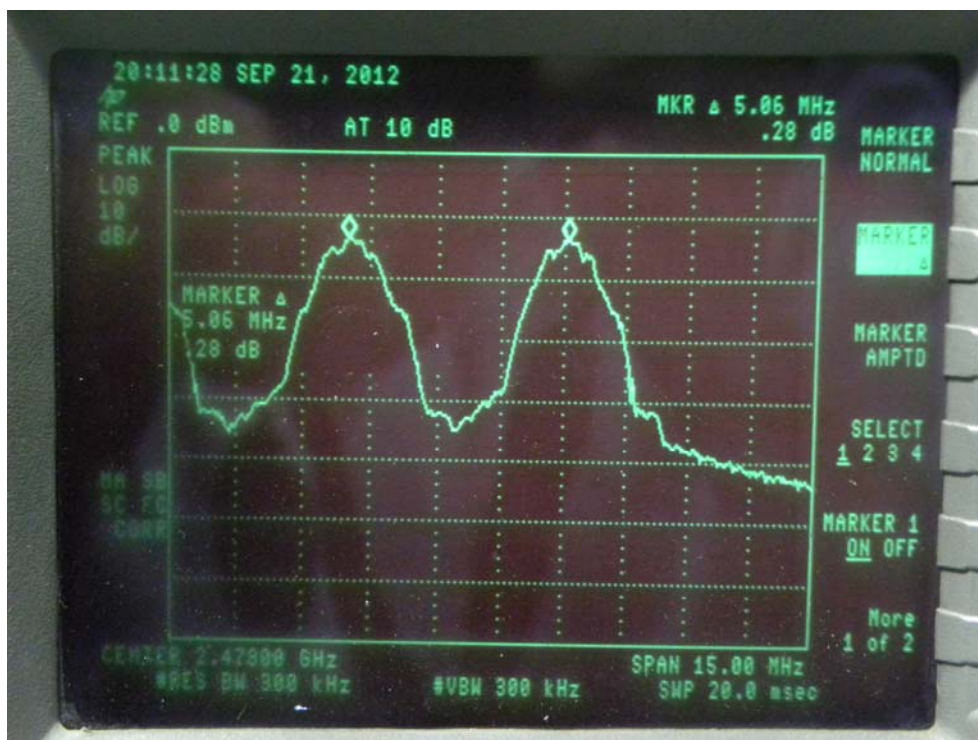


8. 20dB Bandwidth test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:



Same as 6.3 Radiated Emission Measurement.


8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 21, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2404	3080
9	2444	2980
16	2479	2980

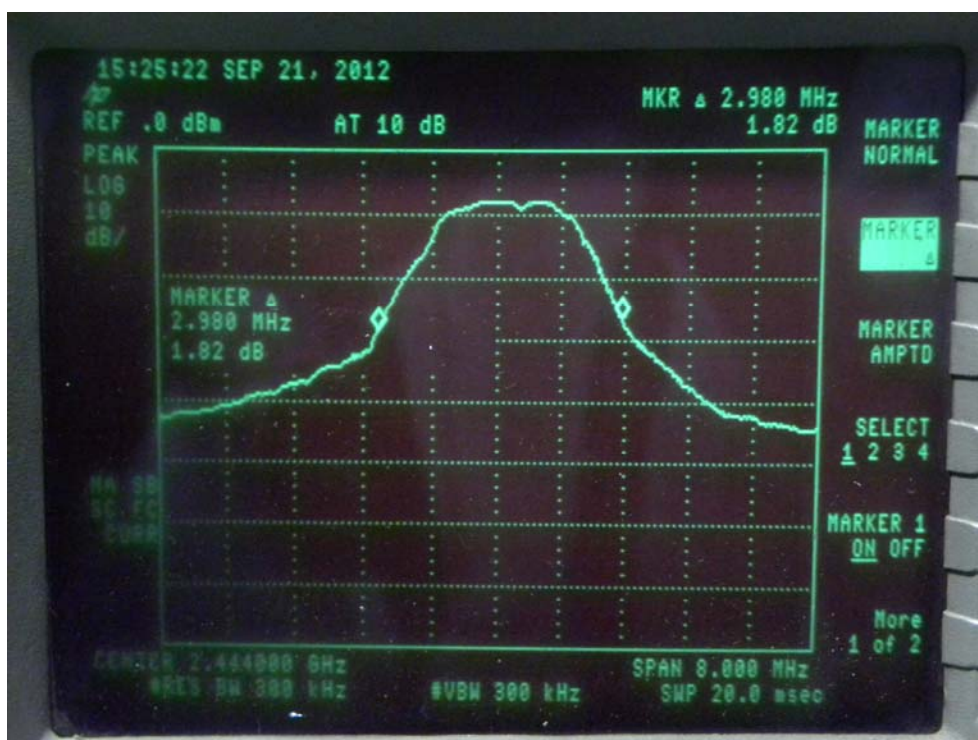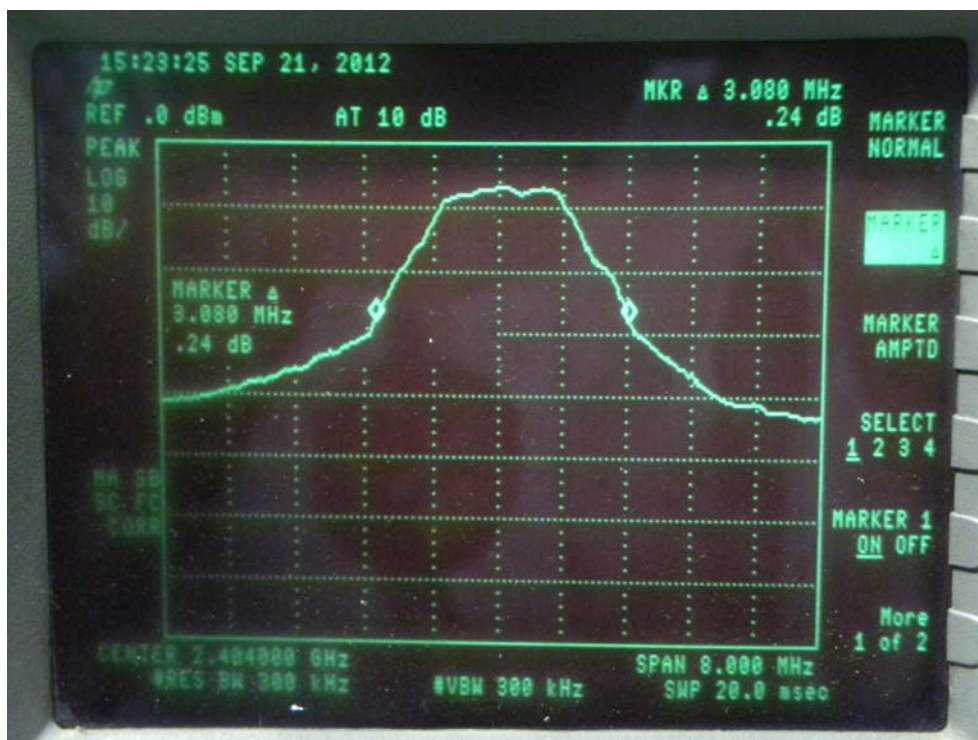

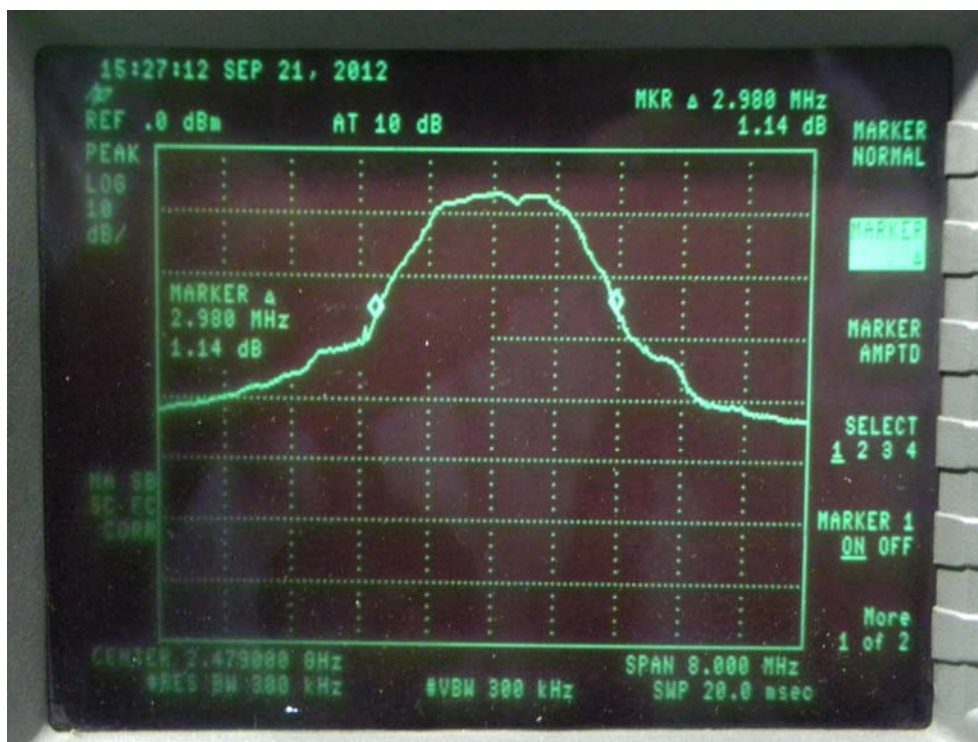


9. Quantity of Hopping Channel Test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:


Same as 6.3 Radiated Emission Measurement.

9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 21, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2404-2479	16	> 15

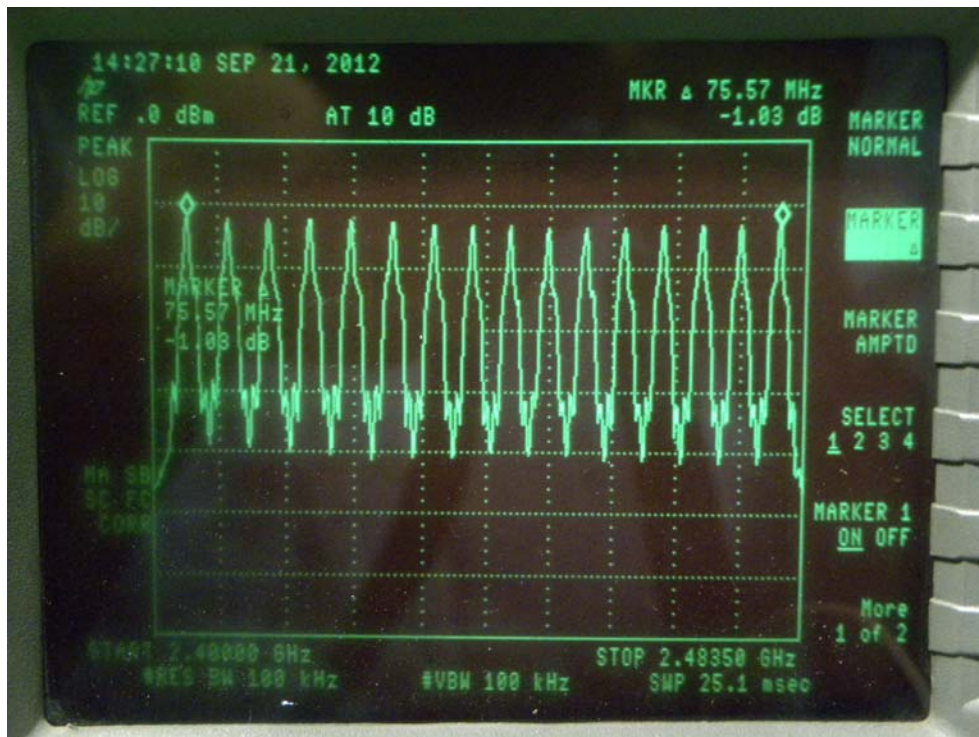

10. Time of Occupancy (Dwell Time) test

10.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable.

- known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.



10.2 Test Requirements / Limits


FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Refer to attached data chart.

10.3 Test Results:

Channel Number	Time slot length (ms)	Number of transmission within 6.4s (16 Hopping*0.4s)	Dwell time(ms)
CH1	0.604	5	3.02
CH9	0.604	5	3.02
CH16	0.604	5	3.02

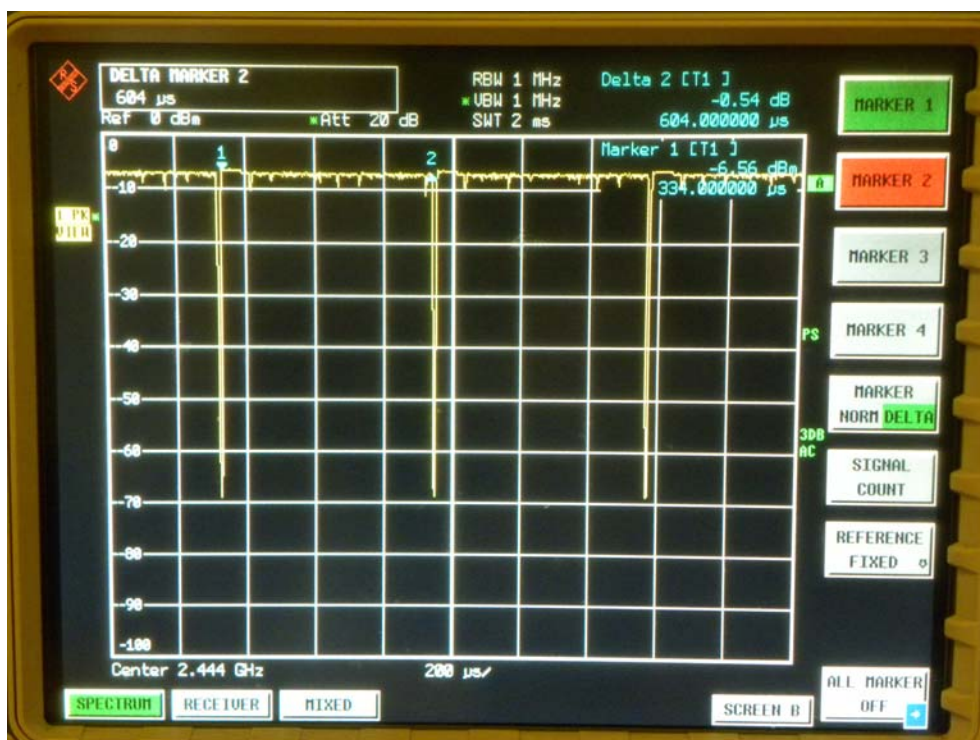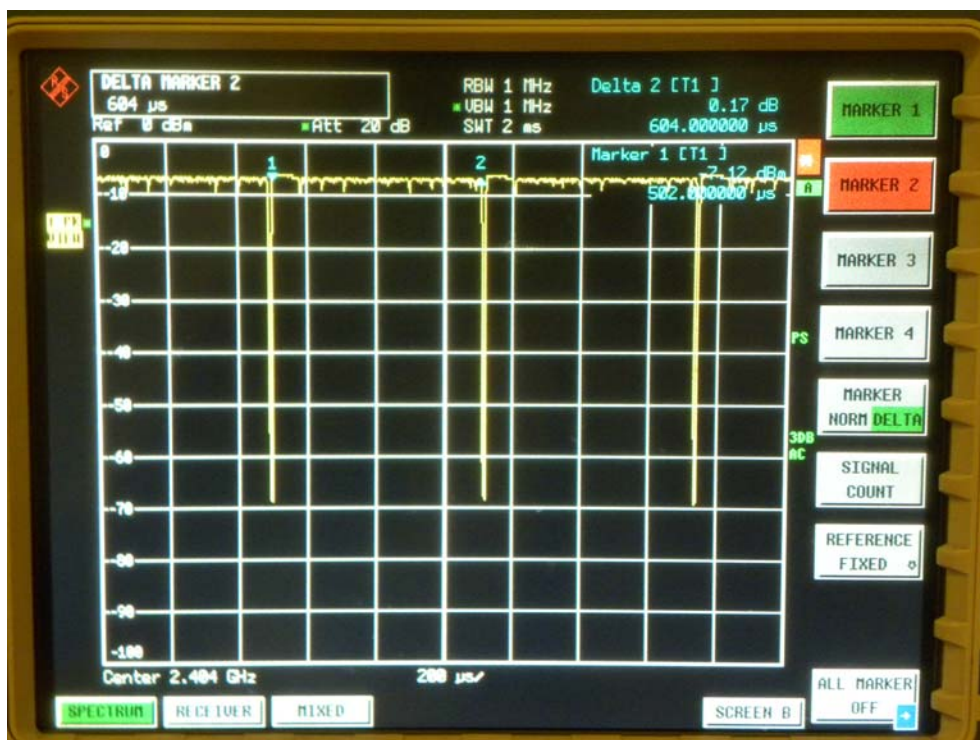

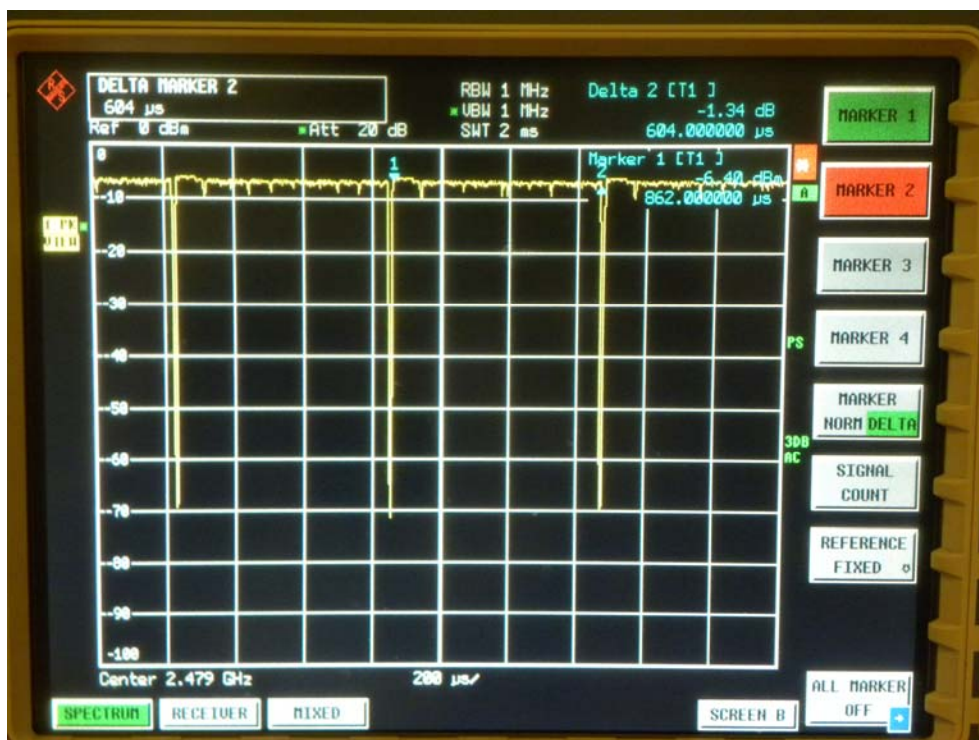


11. MAXIMUM PEAK OUTPUT POWER TEST

11.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2012	05/28/2013



11.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 21, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2404	0.155	-8.10	125	PASS
9	2444	0.151	-8.22	125	PASS
16	2479	0.214	-6.69	125	PASS

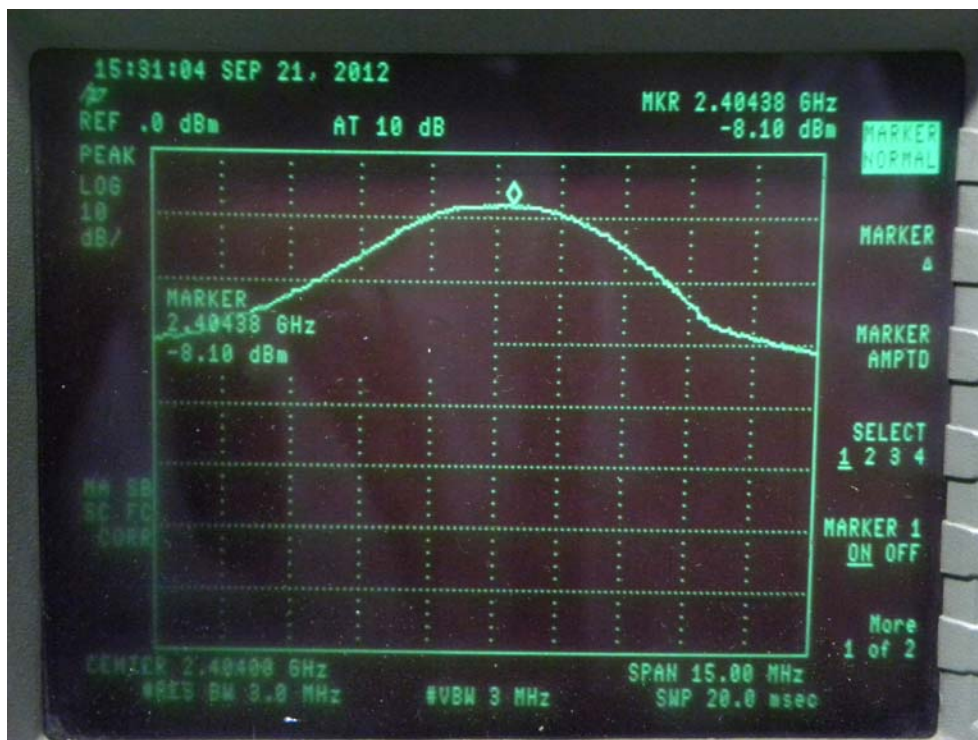

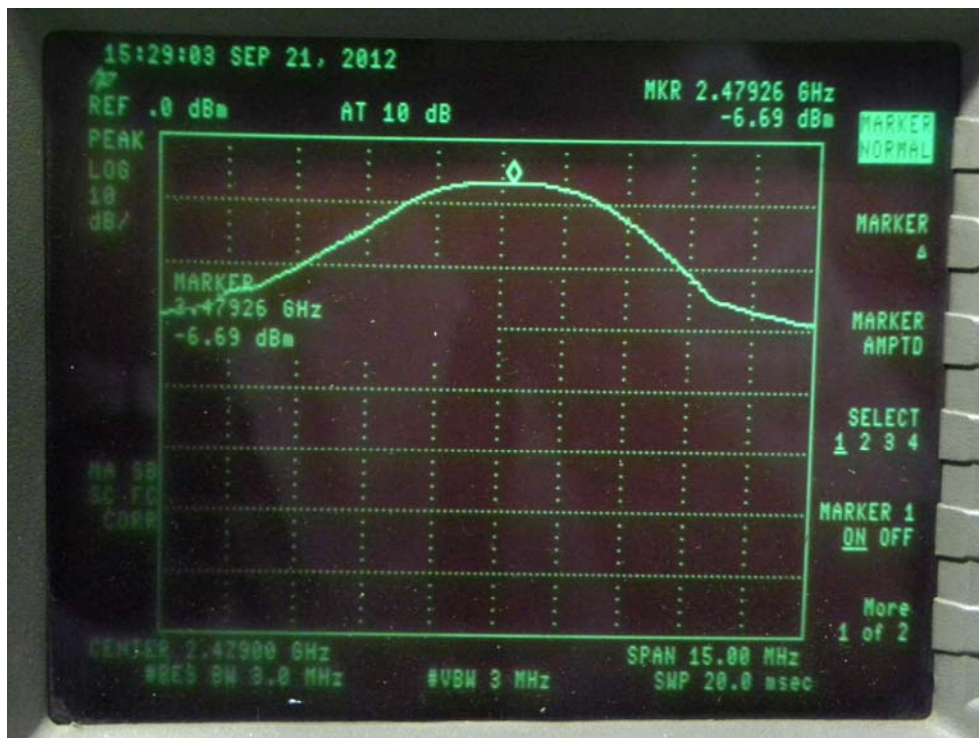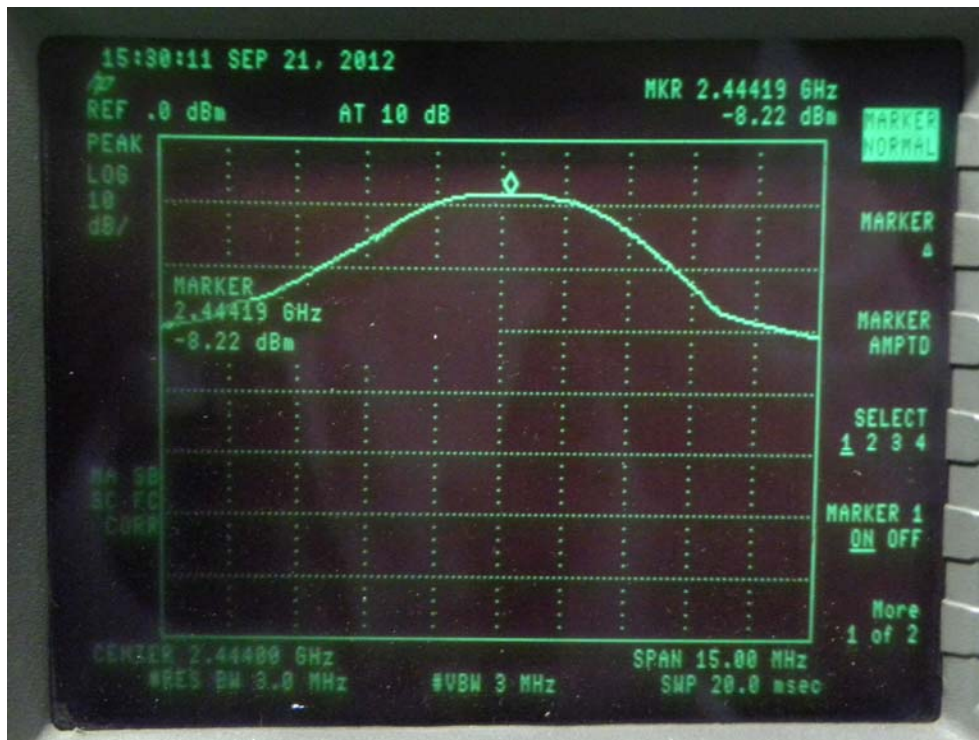

12. Band EDGE test

12.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

12.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Set-up.

12.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 21, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %



1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	-8.76	-37.66	28.90	>20dBc
>2483.5	-7.11	-34.93	27.82	>20dBc

2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	53.22	45.21	74.00	54.00
>2483.5	V	55.19	46.36	74.00	54.00

Remark: The results of Horizontal polarization and Vertical polarization are same.

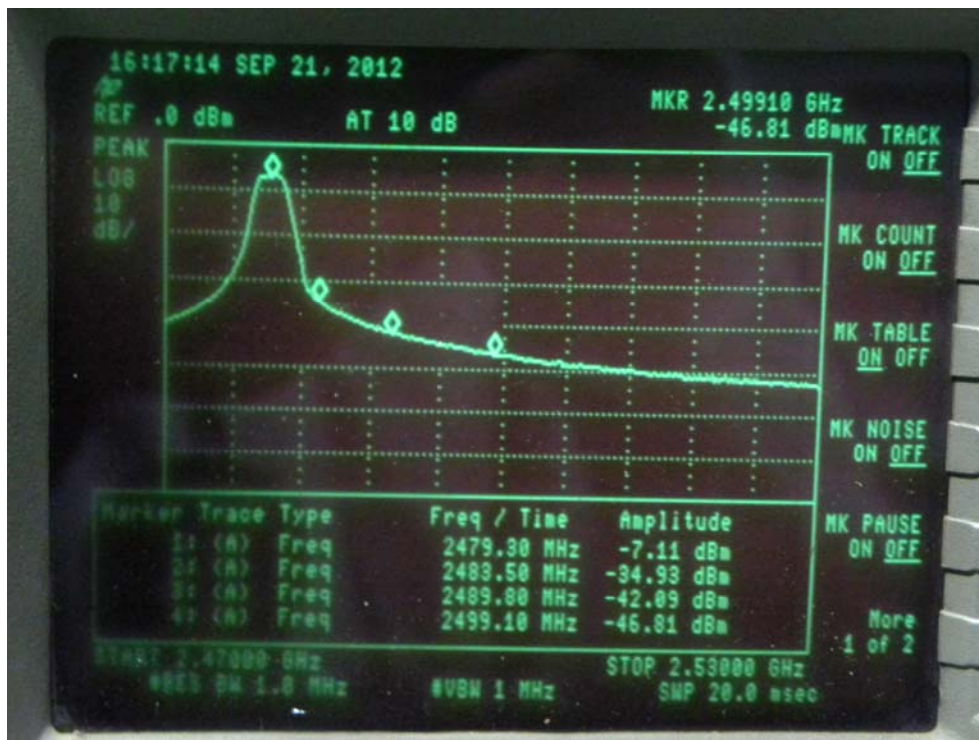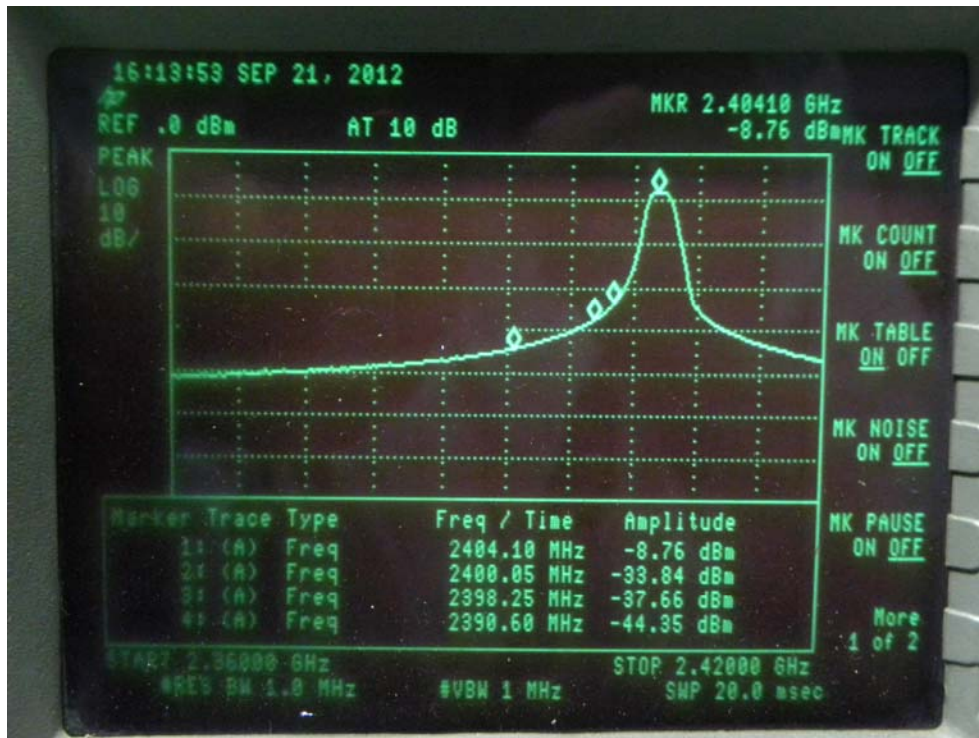

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 2dBi and meets the requirement.

14. RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm ²)	Average Time
(A) Limits for Occupational/Control Exposures				
300-1500	--	--	F/300	6
1500-100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300-1500	--	--	F/1500	6
1500-100000	--	--	1	30

14.1 Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = Power density in mW/cm²

P_{out} =output power to antenna in Mw

G = gain of antenna in linear scale

π =3.1416

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1mW/cm². If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

14.2 Measurement Result.

Channel number	Channel Frequency (MHz)	Output Peak power (mW)	Antenna Gain (dBi)	Power density at 20cm (mW/ cm ²)	Power density Limits (mW/cm ²)
1	2404	0.155	2	4.89e-05	1
9	2444	0.151	2	4.76e-05	1
16	2479	0.214	2	6.75e-05	1