



RF TEST REPORT



Report No.: FCC/IC_SAR_SL15071501-SLX-015
 Supersede Report No.:





Applicant	Philips Medical Systems
Host Product Name	IntelliVue MX40
Host Model No.	MX40-WL3
Module Product Name	SDIO Wireless Module
Module Model No.	PH-SDMAN
Test Standard	47CFR 2.1093, IEEE C95.1-2005 RSS 102 Issue 5.0, IEEE 1528: 2013, IEC 62209-2: 2010
Test Method	IEEE 1528: 2013, IEC 62209-2: 2010 KDB 447498 D01 General RF Exposure Guidance v06 KDB 248227 D01 802.11 Wi-Fi SAR v02r02 KDB 865664 D01 SAR Measurement 100MHz to 6 GHz v01r04 KDB 941225 D06 Hot Spot SAR v02r01
FCC ID	PQC-MX40WL3
IC ID	3549B-MX40WL3
Date of test	11/02/2015-11/11/2015
Issue Date	12/01/2015
Test Result	Pass Fail
Equipment complied with the specification	<input checked="" type="checkbox"/>
Equipment did not comply with the specification	<input type="checkbox"/>
 Arthur Tie Test Engineer	
 Nima Molaei Engineer Reviewer	

This test report may be reproduced in full only

Issued By:
SIEMIC Laboratories
 775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:    

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom

CONTENTS

1 REPORT REVISION HISTORY.....5

2 EXECUTIVE SUMMARY6

3 CUSTOMER INFORMATION6

4 TEST SITE INFORMATION.....6

5 MODIFICATION.....6

6 EUT INFORMATION.....7

6.1 EUT Description7

6.2 Radio Description7

6.3 EUT Photos - External.....8

6.4 EUT Photos - Internal.....9

6.5 EUT Test Setup Photos.....11

7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION12

7.1 Supporting Equipment.....12

7.2 Test Software Description.....12

8 SETUP AND TEST CONFIGURATION CONSIDERATION13

9 TEST SUMMARY15

10 SAR INTRODUCTION16

Introduction.....16

SAR Definition16

11 SAR MEASUREMENT SETUP.....17

Dosimetric Assessment System17

Measurement System Diagram17

SAM Phantom.....19

Device Holder19

Data Evaluation20

SAR Evaluation – Peak Spatial - Average.....21

SAR Evaluation – Peak SAR.....21

Extrapolation.....21

Definition of Reference Points.....22

Test Configuration – Positioning for Cheek / Touch23

Test Configuration – Positioning for Ear / 15° Tilt24

Test Position – Body Worn Configurations24

12 MEASUREMENT UNCERTAINTY25

13 LIQUID VALIDATION27

Liquid Validation.....27

14 SYSTEM VALIDATION AND SYSTEM VERIFICATION29

14.1 System Validation.....29

14.2 System Verification.....31

15	OUTPUT POWER MEASUREMENT RESULTS	32
16	SAR TEST RESULTS.....	35
17	SYSTEM PERFORMANCE PLOTS	39
18	SAR TEST PLOTS	43
	ANNEX A. TEST INSTRUMENT	100
	ANNEX B. SIEMIC ACCREDITATION	101
	ANNEX C. PROBE CALIBRATION REPORT	103
	ANNEX D. DIPOLES CALIBRATION REPOR.....	115
	ANNEX E. WAVEGUIDE CALIBRATION REPORT	126

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC/IC_SAR_SL15071501-SLX-015	Original	Original	12/01/2015

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Philips Medical Systems
Product: SDIO Wireless Module
Model: PH-SDMAN

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance as a spot check with the Stipulated Standard listed on 1st page. The derived result is summarized in following table,

Rated, Measured conducted RF output Power and SAR	:	Mode	Highest 10g SAR
		802.11b (2.4GHz)	1.046 w/kg(body)
		802.11n-40 (5 GHz)	1.173 w/kg(body)

3 Customer information

Applicant Name	Philips Medical Systems
Applicant Address	3000 Minuteman Road, Andover, MA 01810-1099
Manufacturer Name	Philips Medical Systems
Manufacturer Address	3000 Minuteman Road, Andover, MA 01810-1099

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Host Product Name	IntelliVue MX40
Host Model No.	MX40-WL3
Module Product Name	SDIO Wireless Module
Module Model No.	PH-SDMAN
Trade Name	Philips Medical Systems
Serial No.	US018Z2159
Input Power	N/A
Power Adapter Manu/Model	100-240VAC
Power Adapter SN	N/A
Hardware version	N/A
Software version	N/A
Date of EUT received	08/10/2015
Equipment Class/ Category	DTS/UNII / Portable device
Clock Frequencies	N/A
Port/Connectors	N/A

Additional EUT Information

Any variants of the primary device? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, please list the different models & differences:
Accessories (Sold with device): Power adapter
The device uses configuration: <input type="checkbox"/> Handheld Device <input checked="" type="checkbox"/> Body worn Device <input type="checkbox"/> Held to ear <input type="checkbox"/> Data Grip
Is the device being sold with multiple antenna options? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Power Adaptor: <input type="checkbox"/> With DC Adaptor <input checked="" type="checkbox"/> With AC Adaptor
Battery Configuration: <input type="checkbox"/> Fixed Battery <input checked="" type="checkbox"/> Removable/Swappable

6.2 Radio Description

Radio Type	802.11b	802.11g	802.11a	802.11n-20M	802.11n-40M
Operating Frequency	2412-2462MHz	2412-2462MHz	5180-5240MHz 5260-5320MHz 5500-5700MHz 5725-5825MHz	2412-2462MHz 5180-5240MHz 5240-5320MHz 5500-5700MHz 5725-5825MHz	2422-2452MHz 5190-5230MHz 5270-5310MHz 5510-5670MHz 5755-5795MHz
Modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	5MHz	5MHz	20MHz	5MHz(2.4GHz), 20MHz (5GHz)	40MHz
Number of Channels	11	11	19	11(2.4GH) 19 (5GHz)	7(2.4GH) 9(5GHz)
Antenna Type	Embedded PCB				
Antenna Gain	1.4dBi (for 2.4GHz), 4.5dBi (for 5GHz)				
Antenna Connector Type	U.FL				
Note	EUT only has one Antenna and there is no simultaneous transmitting				

6.3 EUT Photos - External



Front View



Rear View



Left View



Right View



Top View



Bottom View

6.4 EUT Photos - Internal




Top view screen display




Bottom view screen display



EUT-RF Board Top View

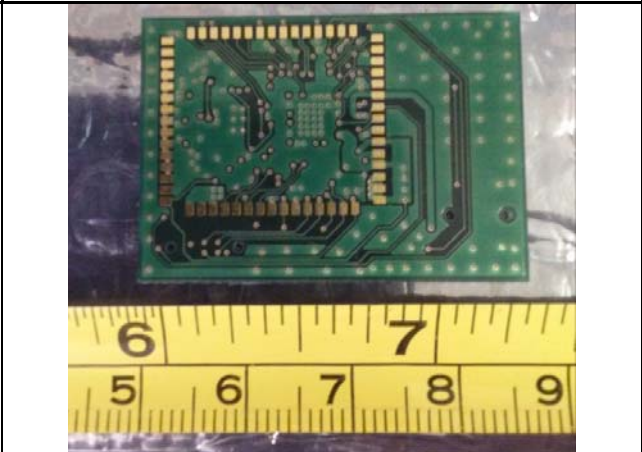


EUT-RF Board Bottom View

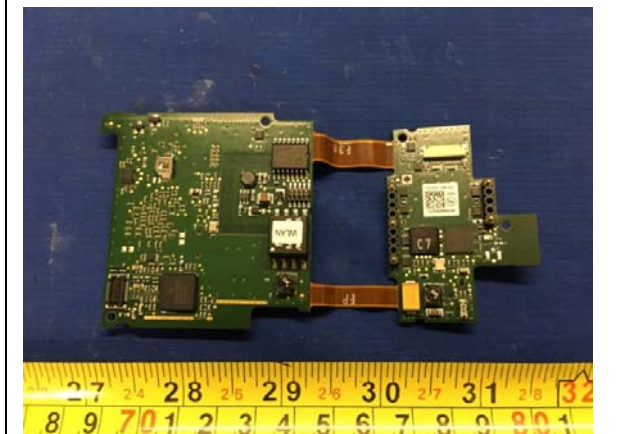


Board 1 - Top View



Board 1 - Bottom View

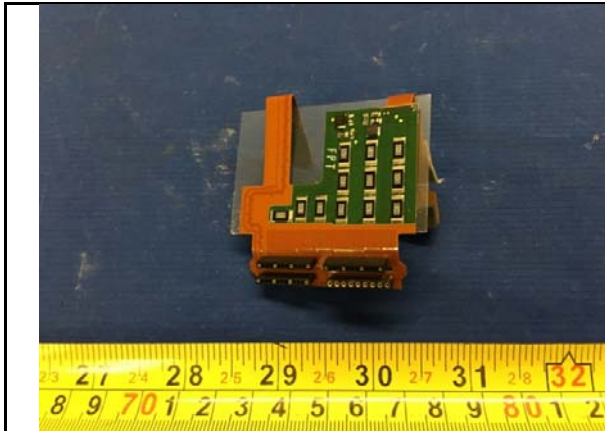


Board 2 - Top View

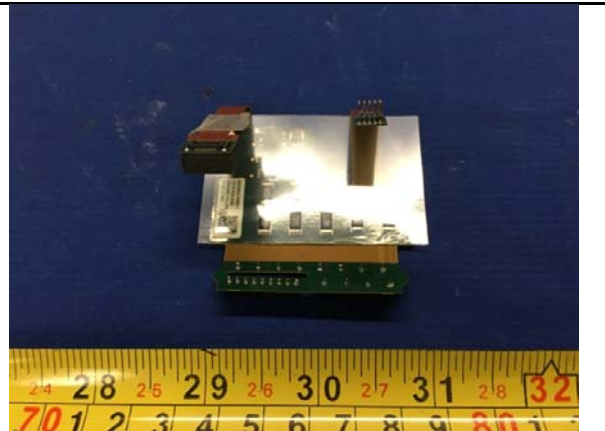

Board 2 - Bottom View



Antenna - Top View

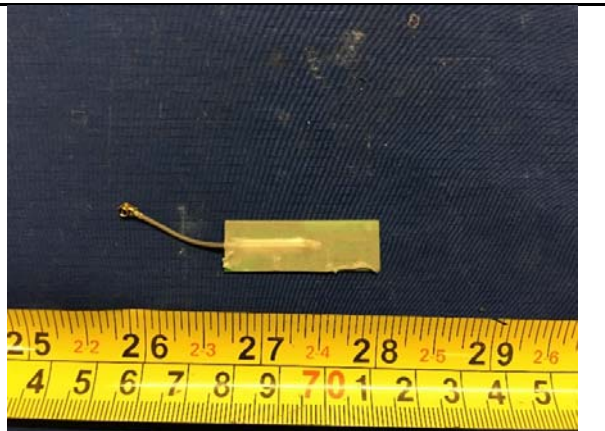

Antenna - Bottom View



Battery - Top View



Battery - Bottom View

6.5 EUT Test Setup Photos



7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment



Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	Latitude E6530	N/a	Dell	-

7.2 Test Software Description

Test Item	Software	Description
RF Testing	Cygwin Terminal	Set the EUT to transmit continuously in different test mode

8 Setup and Test Configuration Consideration



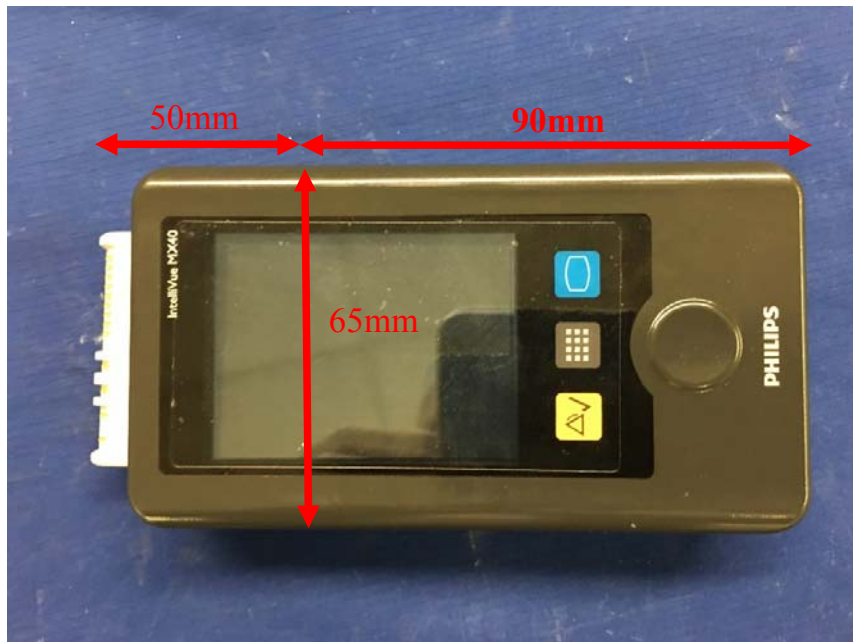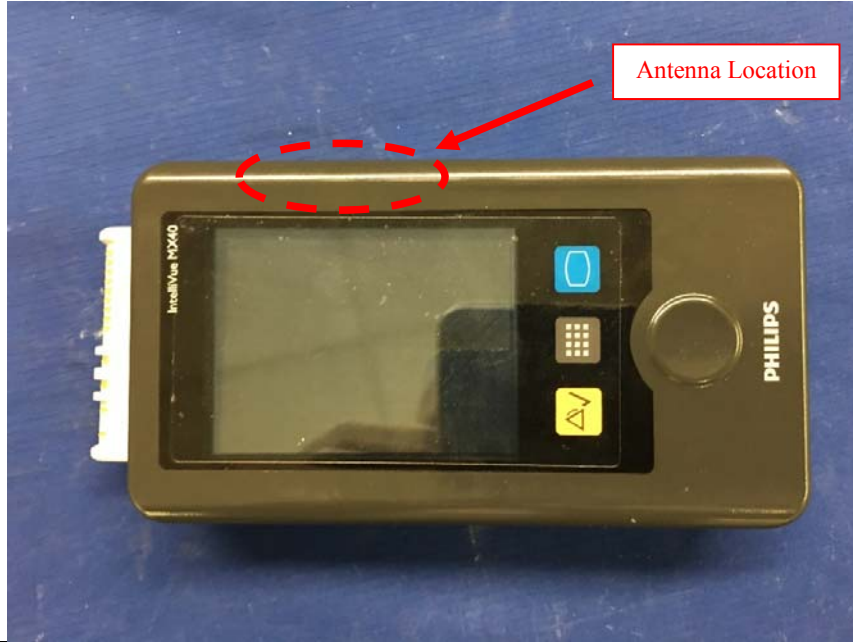

Radio & Antenna Location



Remark:

SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode SAR.

EUT Test Position for SAR

	
<p>Test Position-1 (LCD-Up with 5mm distance)</p>	<p>Test Position-2 (LCD-Down with 0mm distance)</p>
	
<p>Test Position-3 (Left Side with 5mm distance)</p>	<p>Test Position-4 (Right Side with 5mm distance)</p>
<p>Note: Test Position 2 was tested at 0mm distance to consider worse case as a normal usage.</p>	

9 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
SAR	FCC	OET Bulletin 65 Supplement C	IEEE	Std 1528-2013, FCC KDBs	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

10 SAR Introduction

Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:


- σ = conductivity of the tissue (S/m)
- ρ = mass density of the tissue (kg/m³)
- E = RMS electric field strength (V/m)

11 SAR Measurement Setup

Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

Measurement System Diagram

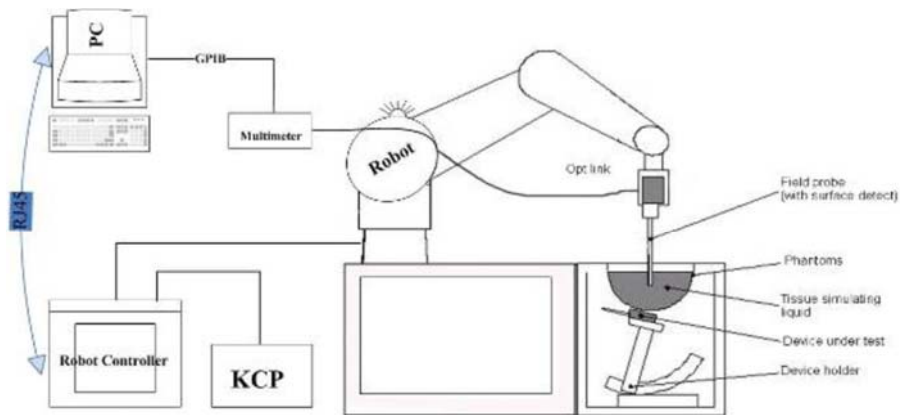

The OPENSAR system for performing compliance tests consist of the following items:

- A standard high precision 6-axis robot (KUKA) with controller and software.
- KUKA Control Panel (KCP).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A computer operating Windows XP.
- OPENSAR software.
- Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM phantom enabling testing left-hand right-hand and body usage.
- The Position device for handheld EUT.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles to validate the proper functioning of the system.

EPGO259 Probe

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$.



It is connected to the KRC box on the robot arm and provides an automatic detection of the phantom surface. The 3D file of the phantom is include in OpenSAR software. The Video Positioning System allow the system to take the automatic reference and to move the probe safely and accurately on the phantom.

Parameter	Description
Frequency Range	100 MHz to 6 GHz
Linearity	0.25 dB (100 MHz to 6 GHz)
Directivity	0.25 dB in brain tissue (rotation around probe axis) 0.5 dB in brain tissue (rotation normal probe axis)
Dynamic Range Linearity	0.001W/kg to > 100W/kg
Surface	0.25 dB
Dimensions Overall length	0.2 mm repeatability in air and liquids
Tip length	330 mm
Body diameter	16 mm
Tip diameter	8 mm
Distance from probe tip to dipole centers	2.6 mm
	<1.5 mm

E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in SAR standard with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 0.8 GHz, and in a waveguide above 0.8 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. E-field correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue.

SAM Phantom

The SAM Phantom SAM29 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1.

The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions (H x L x W): 810 x 1000 x 500 mm

Liquid is filled to at least 15mm from the bottom of Phantom.



Device Holder

In combination with the Generic Twin Phantom V3.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [10]. To produce the worst-case condition. (the hand absorbs antenna output power), the hand is omitted during the tests.



Data Evaluation

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

Probe Parameters	- Sensitivity	Norm _i
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device Parameter	- Frequency	f
	- Crest factor	cf
Media Parameters	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can either be found in the component documents or are imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \frac{cf}{dcp_i}$$

Where V_i = Compensated signal of channel i ($i = x, y, z$)
 U_i = Input signal of channel i ($i = x, y, z$)
 cf = Crest factor of exciting field (DASY parameter)
 dcp_i = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \frac{V_i}{\text{Norm}_i \cdot \text{ConvFi}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \frac{a_{xi} + a_{zi} f + a_{zi} f^2}{f}$$

Where V_i = Compensated signal of channel i ($i = x, y, z$)
 Norm_i = Sensor sensitivity of channel i ($i = x, y, z$)
 $\mu\text{V}/(\text{V/m})^2$ for E0field Probes
 ConvFi = Sensitivity enhancement in solution
 a_{xi} = Sensor sensitivity factors for H-field probes
 f = Carrier frequency (GHz)
 E_i = Electric field strength of channel i in V/m
 H_i = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \frac{\sigma}{\rho \cdot 1000}$$

where SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{\text{pwe}} = \frac{E_{\text{tot}}^2}{3770} \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

where P_{pwe} = Equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

SAR Evaluation – Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered on the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

SAR Evaluation – Peak SAR

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such as:

- Maximum search
- Extrapolation
- Boundary correction
- Peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

Device Reference Points


Definition of Reference Points

Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

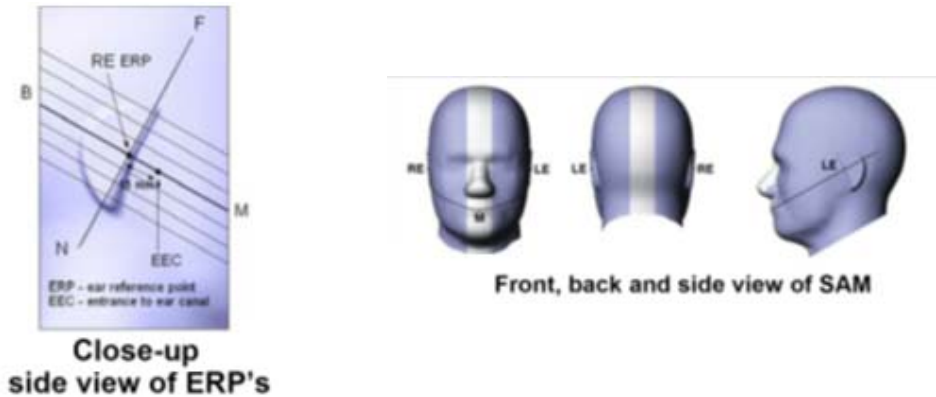

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is then located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at its top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point.

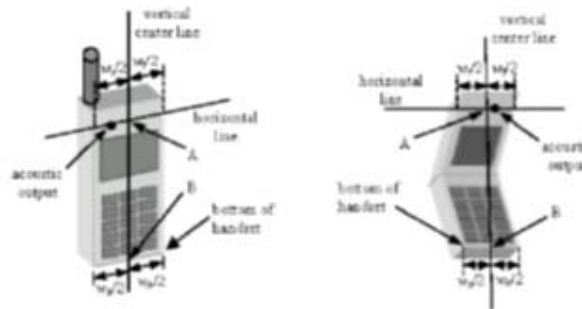

Handset Vertical Center & Horizontal Line Reference Points


Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom



Front, Side and Top View of Cheek/Touch Position

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.



Side view w/ relevant markings

Test Configuration – Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position”:

1. While maintaining the orientation of the device, retract the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).



**Test
Body**

Front, Side and Top View of Ear/15° Tilt Position

**Position –
Worn**

Configurations


Body-worn operating configurations are tested with the accessories attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then, when multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacing are documented.

Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

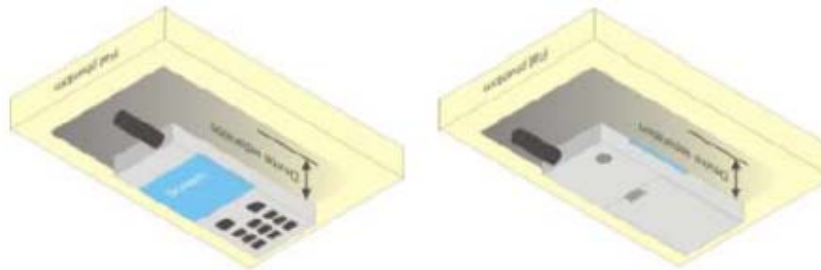

12 Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below:

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) Standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) K is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B -sum-by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

Uncertainty Budget of COMOSAR for frequency range 300 MHz to 6 GHz

Uncertainty Component	Tolerances %	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Uncertainty 1g(%)	Uncertainty 10g(%)
Measurement System Related							
Probe Calibration	6	N	1	1	1	6	6
Axial Isotropy	3	R	$\sqrt{3}$	$\sqrt{(1-Cp)}$	$\sqrt{(1-Cp)}$	1.22474	1.22474
Hemispherical Isotropy	4	R	$\sqrt{3}$	\sqrt{Cp}	\sqrt{Cp}	1.63299	1.63299
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.57735	0.57735
Linearity	5	R	$\sqrt{3}$	1	1	2.88675	2.88675
System Detection Limits	1	R	$\sqrt{3}$	1	1	0.57735	0.57735
Readout Electronics	0.5	N	1	1	1	0.5	0.5
Response Time	0.2	R	$\sqrt{3}$	1	1	0.11547	0.11547
Integration Time	2	R	$\sqrt{3}$	1	1	1.1547	1.1547
RF Ambient Conditions	3	R	$\sqrt{3}$	1	1	1.73205	1.73205
Probe Positioner Mechanical Tolerances	2	R	$\sqrt{3}$	1	1	1.1547	1.1547
Probe Positioning with respect to Phantom Shell	1	R	$\sqrt{3}$	1	1	0.57735	0.57735
Extrapolation, Interpolation and integration Algorithms for Max. SAR Evaluation.	1.5	R	$\sqrt{3}$	1	1	0.86603	0.86603
Test Sample Related							
Test Sample Positioning	1.5	N	1	1	1	1.5	1.5
Device Holder Uncertainty	5	N	1	1	1	5	5
Output Power Variation – SAR Drift measurement	3	R	$\sqrt{3}$	1	1	1.73205	1.73205
Phantom and Tissue Parameters Related							
Phantom Uncertainty (Shape and thickness Tolerances)	4	R	$\sqrt{3}$	1	1	2.3094	2.394
Liquid Conductivity – deviation from target value	5	R	$\sqrt{3}$	0.64	0.43	1.84752	1.2413
Liquid Conductivity – Measurement Uncertainty	2.5	N	1	0.64	0.43	1.6	1.075
Liquid Permittivity – deviation from target value	3	R	$\sqrt{3}$	0.6	0.49	1.03923	0.8487
Liquid Permittivity – Measurement Uncertainty	2.5	N	1	0.6	0.49	1.5	1.225
Combined Standard Uncertainty						9.66051 %	9.52428 %
Expanded Standard Uncertainty (K=2 , confidence 95%)						18.9346 %	18.6676 %

13 Liquid Validation

Liquid Validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.



Liquid depth \geq 15cm

IEEE SCC-34/SC-2 P1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency MHz	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

Note: ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$

Liquid Validation Result:

Liquid type/ Band(MHz)	Measured Date	Parameters	Measured	Target	Deviation (%)	Limit (%)
2450 Body	11/03/2015	Permittivity	51.48	52.70	-2.31	±5.00
		Conductivity	1.94	1.95	-0.71	±5.00
5200 Body	11/05/2015	Permittivity	48.89	49.01	-0.25	±5.00
		Conductivity	5.48	5.30	3.39	±5.00
5600 Body	11/05/2015	Permittivity	48.59	48.47	0.24	±5.00
		Conductivity	6.01	5.77	4.17	±5.00
5800 Body	11/05/2015	Permittivity	48.00	48.20	-0.41	±5.00
		Conductivity	6.24	6.00	3.96	±5.00

14 System Validation and System Verification

14.1 System Validation

The system validation procedure evaluates the system against reference SAR values and the performance of the probe, readout electronics, and software. The test setup utilizes a flat phantom and a reference dipole.

Thus, the system validation process does not include data scatter due to the use of anthropomorphic phantoms or uncertainty due to handset positioning variability. System validation should be performed annually, or when a new system is put into operation, or whenever modifications have been made to the system, such as a new software release, different readout electronics or different types of probes. The probe used in the test system to be validated should be properly calibrated.

System validation provides a means of system-level validation. The test system utilizes a flat phantom and a reference dipole. Thus, system validation verifies the system accuracy against its specifications but does not include the uncertainty due to the use of anthropomorphic phantoms, nor does it include the uncertainty due to handset positioning variability. This test is performed annually (e.g., after probe calibration), before measurements related to inter laboratory comparison and every time modifications have been made to the system, such as a new software release, different readout electronics, and for different types of probes.

System Validation procedure is at below,

- a) **SAR evaluation:** A complete 1 g or 10 g averaged SAR measurement is performed. The reference dipole input power is adjusted to produce a 1 g averaged SAR value falling in the range of 0.4–10 W/kg. The 1 g or 10 g averaged SAR is measured at frequencies in reference table within the range to be used in compliance tests. The results are normalized to 1 W forward input power and compared with the reference SAR values shown in reference value. The differences from the reference values should be less than the tolerance specified for the SAR measurement system by the manufacturer or designer, i.e., within the expanded uncertainty for the system validation.
- b) **Extrapolation routine:** Local SAR values are measured along a vertical axis directly above the reference dipole feed-point using the same test grid-point spacing as used for handset SAR evaluations. This measurement is repeated along another vertical axis with a 2 cm transverse offset from the reference dipole feed-point. SAR values at the phantom surface are extrapolated and compared with the numerical values given in reference table. The difference from the reference values should be less than the tolerance specified for the SAR measurement system by the manufacturer or designer, i.e., within the expanded uncertainty for system validation.
- c) **Probe linearity:** The measurement in step a) is repeated using different reference dipole input power levels. The power levels are selected for each frequency to produce 1 g averaged SAR values of approximately 10 W/kg, 2 W/kg, and 0.4 W/kg. The measured SAR values are normalized to 1 W forward input power and compared with the 1 W normalized value from step a). The difference between these values should be less than the tolerance specified for the SAR measurement system by the manufacturer or designer, i.e., within the expanded uncertainty for the linearity component.
- d) **Modulation response:** The measurements in step a) are repeated with pulse-modulated signals having a duty factor of 0.1 and pulse repetition rate of 10 Hz. The power is adjusted to produce a 1 g-averaged SAR of approximately 8 W/kg with the pulse modulated signal (corresponding to a peak spatial-average SAR of approximately 80 W/kg). The measured SAR values are normalized to 1 W forward input power and duty factor of 1, and compared with the 1 W normalized values from step a). The difference between these values should be less than the tolerance specified for the SAR measurement system by the manufacturer or designer, i.e., within the expanded uncertainty for system validation.
- e) **System offset:** The measurements in step a) are repeated with a reference dipole input forward power that produces a 1 g or 10 g averaged SAR of approximately 0.05 W/kg. The measured SAR values are normalized to 1 W forward input power and compared with the 1 W normalized values from step a). The difference between these values should be less than the tolerance specified for the SAR measurement system by the manufacturer or designer, i.e., within the expanded uncertainty for system validation.
- f) **Probe axial isotropy:** The center point of the probe's sensors is placed directly above the reference dipole center at a measurement distance of approximately 5–10 mm from the phantom inner surface. The probe (or reference dipole, if precise rotations are supported by the dipole fixture) is rotated around its axis $\pm 180^\circ$ in steps no larger than 15° . The maximum and minimum SAR readings are recorded. The difference between these values should be less than the tolerance specified for the SAR measurement system by the manufacturer or designer, i.e., within the expanded uncertainty for the axial isotropy component.

Numerical reference SAR values (W/kg) for reference dipole and flat phantom

Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) ^a
300	3.0	2.0	4.4	2.1
450	4.9	3.3	7.2	3.2
835	9.5	6.2	4.1	4.9
900	10.8	6.9	16.4	5.4
1450	29.0	16.0	50.2	6.5
1800	38.1	19.8	69.5	6.8
1900	39.7	20.5	72.1	6.6
2000	41.1	21.1	74.6	6.5
2450	52.4	24.0	104.2	7.7
3000	63.8	25.7	140.2	9.5


System Validation Status

Frequency (MHz)	Temp (°C)	Humidity (%)	Validation Date	Probe SN	Validation Cycle	Validation Due
835	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
900	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
1800	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
1900	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
2000	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
2450	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
5200	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
5400	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
5600	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016
5800	22	58	Oct 23rd, 2015	27/14 EPGO259	1 year	Oct 23rd, 2016

14.2 System Verification

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

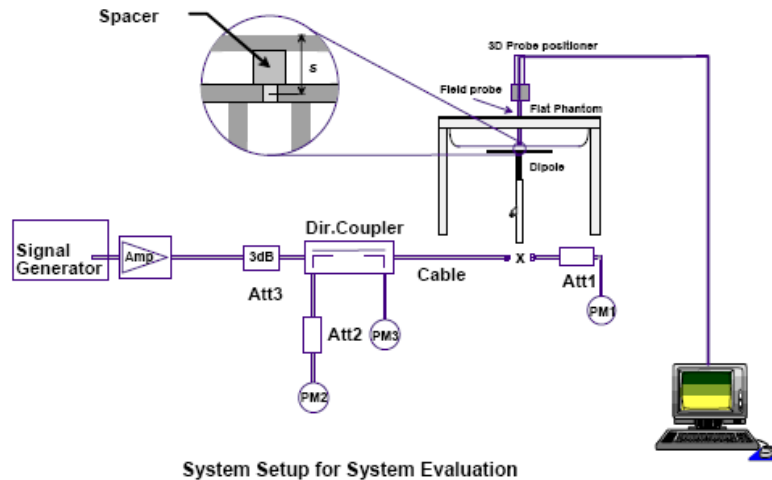

Note: Equipment description


1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

System Verification Results

Test Date	Test Condition		Freq. (MHz)	Target (W/kg)	Input Power (dBm)	Measured (W/kg)	1W Normalized SAR10g (W/kg)	Delta (%)	Limit (%)
11/03/2015	Temp (°C)	22	2450	52.4	20	5.430	54.30	3.6	±10.00
	Humidity (%)	48							
	ATM (mbar)	1019							
11/05/2015	Temp (°C)	22	5200	159.00	20	15.78	157.80	-0.75	±10.00
	Humidity (%)	51							
	ATM (mbar)	1019							
11/05/2015	Temp (°C)	22	5600	173.80	20	17.651	176.51	1.56	±10.00
	Humidity (%)	51							
	ATM (mbar)	1019							
11/05/2015	Temp (°C)	22	5800	181.20	20	18.52	185.20	2.21	±10.00
	Humidity (%)	51							
	ATM (mbar)	1019							

15 Output Power Measurement Results

Requirement(s):

Spec	Item	Requirement	Applicable
-	-	Time averaged conducted output power to be measured	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p><u>Measurement using an Average Power Meter (PM)</u></p> <p>Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p> <ul style="list-style-type: none"> - Connect EUT's RF output power to power meter - Set EUT to be continuous transmission mode - Measurement the average output power using power meter and record the result <p>Repeat above steps for different test channel and other modulation type.</p>		
Test Date	11/03/2015	Environmental condition	Temperature 22°C Relative Humidity 55% Atmospheric Pressure 1008mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Output Power measurement result

802.11b - 2.4GHz

Mode	Description	Measured Power (dBm)	Declared (dBm)	Tune-up Low (dBm)	Tune-up High (dBm)
11b	11b @ 2412 MHz, 1Mbps data rate	12.01	13	10.5	15
11b	11b @ 2437 MHz, 1Mbps data rate	12.49	13	10.5	15
11b	11b @ 2462 MHz, 1Mbps data rate	12.57	13	10.5	15

802.11g - 2.4GHz

Mode	Description	Measured Power (dBm)	Declared (dBm)	Tune-up Low (dBm)	Tune-up High (dBm)
11g	11b @ 2412 MHz, 1Mbps data rate	12.27	13	10.5	15
11g	11b @ 2437 MHz, 1Mbps data rate	11.78	13	10.5	15
11g	11b @ 2462 MHz, 1Mbps data rate	12.31	13	10.5	15

802.11HT20 – 2.4GHz

Mode	Description	Measured Power (dBm)	Declared (dBm)	Tune-up Low (dBm)	Tune-up High (dBm)
11n-20M	11n-20M @ 2412 MHz, MCS0 data rate	9.95	11	8.5	13
11n-20M	11n-20M @ 2437 MHz, MCS0 data rate	10.27	11	8.5	13
11n-20M	11n-20M @ 2462 MHz, MCS0 data rate	10.29	11	8.5	13

802.11na - 5.2GHz

Mode	Description	Measured Power (dBm)	Declared (dBm)	Tune-up Low (dBm)	Tune-up High (dBm)
11a	11n-20M @ 5180 MHz, MCS0 data rate	13.12	14	11.5	16
11a	11n-20M @ 5260 MHz, MCS0 data rate	13.71	14	11.5	16
11a	11n-20M @ 5320 MHz, MCS0 data rate	13.24	14	11.5	16
11a	11n-20M @ 5550 MHz, MCS0 data rate	13.58	14	11.5	16
11a	11n-20M @ 5580 MHz, MCS0 data rate	13.87	14	11.5	16
11a	11n-20M @ 5700 MHz, MCS0 data rate	13.24	14	11.5	16
11a	11n-20M @ 5745 MHz, MCS0 data rate	12.70	13	10.5	15
11a	11n-20M @ 5785 MHz, MCS0 data rate	12.43	13	10.5	15
11a	11n-20M @ 5825 MHz, MCS0 data rate	12.78	13	10.5	15

802.11HT20 - 5.5GHz

Mode	Description	Measured Power (dBm)	Declared (dBm)	Tune-up Low (dBm)	Tune-up High (dBm)
11n-20M	11n-20M @ 5180 MHz, MCS0 data rate	12.15	13	10.5	15
11n-20M	11n-20M @ 5260 MHz, MCS0 data rate	12.83	14	11.5	16
11n-20M	11n-20M @ 5320 MHz, MCS0 data rate	13.63	14	11.5	16
11n-20M	11n-20M @ 5500 MHz, MCS0 data rate	13.33	14	11.5	16
11n-20M	11n-20M @ 5580 MHz, MCS0 data rate	13.62	14	11.5	16
11n-20M	11n-20M @ 5700 MHz, MCS0 data rate	13.58	14	11.5	16
11n-20M	11n-20M @ 5745 MHz, MCS0 data rate	12.87	13	10.5	15
11n-20M	11n-20M @ 5785 MHz, MCS0 data rate	12.20	13	10.5	15
11n-20M	11n-20M @ 5825 MHz, MCS0 data rate	12.63	13	10.5	15

802.11HT40 - 5.6GHz

Mode	Description	Measured Power (dBm)	Declared (dBm)	Tune-up Low (dBm)	Tune-up High (dBm)
11n-40M	11n-40M @ 5310 MHz, MCS0 data rate	11.68	11.5	9	13.5
11n-40M	11n-40M @ 5550 MHz, MCS0 data rate	13.77	14	11.5	16
11n-40M	11n-40M @ 5755 MHz, MCS0 data rate	13.03	13	11.5	16

16 SAR Test Results

Requirement(s):

Spec	Item	Requirement	Applicable
IEEE 1528: 2013	1	SAR limit for devices used by the General public (Uncontrolled Environment) in localized Head and Trunk is 1.6 W/kg	<input checked="" type="checkbox"/>
	2	SAR limit for Controlled Use Devices (Controlled Environment) in localized Head and Trunk is 8 W/kg	<input type="checkbox"/>
Test Method	IEEE 1528: 2013 IEC 62209-2: 2010 447498 D01 General RF Exposure Guidance v05r02 248227 SAR measurement procedures for 802.11 a/b/g v01r02 KDB 865664 SAR Measurement Requirements for 3 to 6 GHz v01r03		
Test Setup	Refer to Section 6: SAR Measurement Setup		
Test Procedure	<p>Steps:</p> <ol style="list-style-type: none"> 1. Use client test software to set EUT transmit RF power in cont-TX mode in the highest power channel 2. Measure output power through spectrum analyzer 3. Place the DUT in the positions selected 4. Set scan area, grid size and other setting on the SATIMO software 5. Make SAR measurement for the selected highest output power channel at each testing position 6. Find out the position with highest SAR result 7. Measure additional SAR for other modes at the highest SAR position <p>SAR measurement system will proceed the following basic steps:</p> <ol style="list-style-type: none"> 1. Initial power reference measurement 2. Area Scan 3. Zoom Scan 4. Power drift measurement 		
Test Date	11/02/2015-11/11/2015	Environmental condition	Temperature 22oC Relative Humidity 55% Atmospheric Pressure 1008mbar
Remark	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode SAR. So SAR is not required for Left, Top and Bottom sides.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes N/A

SAR Measurement for 2.4GHz result to determine the worst case position configuration (0 mm distance)

Freq Band	Freq (MHz)	Position	Distance	Rated Max Power (dBm)	Measured Output Power (dBm)	Raw SAR 1g(W/kg)	Crest factor	Power Drift (%)	Scaled SAR (Tune-up & Duty Cycle) (W/kg)	1g SAR Limit (W/kg)
802.11-b	2412	LCD-Down	0mm	15	12.01	0.1028	1	4.17	0.205	1.6
	2437	LCD-Down	0mm	15	12.45	0.0801	1	-1.48	0.144	1.6
	2462	LCD-Down	0mm	15	12.69	0.0544	1	-1.05	0.093	1.6
	2412	Right	0mm	15	12.01	0.5253	1	0.810	1.046	1.6
	2437	Right	0mm	15	12.45	0.5202	1	-0.05	0.936	1.6
	2462	Right	0mm	15	12.69	0.4916	1	-0.79	0.837	1.6
	2437	LCD-Up	0mm	15	12.45	0.0350	1	-4.27	0.063	1.6
	2437	Left	0mm	15	12.45	0.0092	1	-1.01	0.017	1.6
802.11-g	2412	LCD-Down	0mm	15	12.27	0.1056	1	-0.81	0.198	1.6
	2437	LCD-Down	0mm	15	11.87	0.0657	1	-2.21	0.135	1.6
	2462	LCD-Down	0mm	15	12.48	0.0425	1	-3.25	0.076	1.6
	2412	Right	0mm	15	12.27	0.5459	1	0.09	1.024	1.6
	2437	Right	0mm	15	11.87	0.4429	1	-0.87	0.911	1.6
	2462	Right	0mm	15	12.48	0.4319	1	-0.79	0.772	1.6
	2437	LCD-Up	0mm	15	11.87	0.0379	1	1.92	0.078	1.6
802.11-HT20-2.4G	2412	LCD-Down	0mm	13	10.35	0.0488	1	3.88	0.090	1.6
	2437	Right	0mm	13	9.95	0.3427	1	-0.57	0.692	1.6
	2462	Right	0mm	13	10.35	0.3320	1	-0.97	0.611	1.6
	2412	Right	0mm	13	10.50	0.2952	1	-0.10	0.525	1.6
	2437	LCD-Up	0mm	13	10.35	0.0277	1	3.08	0.051	1.6

SAR Measurement for 5GHz result based on worse case position

Freq Band	Freq (MHz)	Position	Distance	Rated Max Power (dBm)	Measured Output Power (dBm)	Raw SAR 1g(W/kg)	Crest factor	Power Drift (%)	Scaled SAR (Tune-up & Duty Cycle) (W/kg)	1g SAR Limit (W/kg)
802.11-a	5180	LCD-Down	0mm	16	13.12	0.0656	1	-2.57	0.127	1.6
	5180	Right	5mm	16	13.12	0.3771	1	-1.31	0.732	1.6
	5200	LCD-Down	0mm	16	13.20	0.1373	1	-1.22	0.262	1.6
	5200	Right	5mm	16	13.20	0.3890	1	-3.01	0.741	1.6
	5200	LCD-Up	5mm	16	13.20	0.1349	1	4.67	0.257	1.6
	5240	LCD-Down	0mm	16	13.72	0.1703	1	-1.43	0.288	1.6
	5240	Right	5mm	16	13.72	0.4838	1	-4.22	0.818	1.6
	5260	LCD-Down	0mm	16	13.71	0.1644	1	-2.59	0.279	1.6
	5260	Right	5mm	16	13.71	0.4680	1	-4.39	0.793	1.6
	5300	LCD-Down	0mm	16	13.26	0.1952	1	1.83	0.367	1.6
	5300	Right	5mm	16	13.26	0.6218	1	1.16	1.169	1.6
	5300	LCD-Up	5mm	16	13.26	0.1798	1	1.31	0.338	1.6
	5320	LCD-Down	0mm	16	13.24	0.2083	1	-2.00	0.393	1.6
	5320	Right	5mm	16	13.24	0.6215	1	-0.41	1.173	1.6
	5500	LCD-Down	0mm	16	13.58	0.1905	1	-3.68	0.333	1.6
	5500	Right	5mm	16	13.58	0.5904	1	-2.8	1.031	1.6
	5560	LCD-Down	0mm	16	13.87	0.2112	1	-1.83	0.345	1.6
	5560	Right	5mm	16	13.87	0.7013	1	-2.66	1.145	1.6
	5560	LCD-Up	5mm	16	13.87	0.1741	1	-2.32	0.284	1.6
	5700	LCD-Down	0mm	15	13.24	0.2382	1	-3.29	0.357	1.6
5700	Right	5mm	15	13.24	0.7184	1	-4.11	1.077	1.6	


	5785	LCD-Down	0mm	15	12.43	0.2247	1	-0.98	0.406	1.6
	5785	Right	5mm	15	12.43	0.615	1	-4.61	1.111	1.6
802.11- HT20-5G	5200	LCD-Down	0mm	16	12.17	0.1229	1	2.94	0.297	1.6
	5200	Right	5mm	16	12.17	0.3131	1	-3.25	0.756	1.6
	5300	LCD-Down	0mm	16	13.19	0.1682	1	-1.19	0.321	1.6
	5300	Right	5mm	16	13.19	0.5517	1	-1.45	1.054	1.6
	5560	LCD-Down	0mm	16	13.62	0.1988	1	0.08	0.344	1.6
	5560	Right	5mm	16	13.62	0.6712	1	-1.25	1.161	1.6
	5785	LCD-Down	0mm	15	12.20	0.1672	1	0.08	0.319	1.6
	5785	Right	5mm	15	12.20	0.601	1	-1.25	1.145	1.6
802.11- HT40- 5.5G	5310	LCD-Down	0mm	13.5	11.68	0.1305	1	-0.59	0.198	1.6
	5310	Right	5mm	13.5	11.68	0.4026	1	-1.39	0.612	1.6
	5550	LCD-Down	0mm	16	13.77	0.1932	1	0.28	0.323	1.6
	5550	Right	5mm	16	13.77	0.6946	1	-3.28	1.161	1.6
	5755	LCD-Down	0mm	16	13.03	0.0798	1	-1.06	0.158	1.6
	5755	Right	5mm	16	13.03	0.5133	1	-1.8	1.017	1.6

Note: LCD-Down position (back touch) was used as 0mm to consider worse position as normal usage.


17 System Performance Plots

Test specification:	System Verification			
Environ Conditions:	Temp(oC):	23	Result:	Pass
	Humidity (%):	58		
	Atmospheric(mPa):	1009		
Mains Power:	N/A			
Test Date:	11/03/2015			
Tested by:	Arthur Tie			
Remarks:	System Validation, dipole, CW signal, duty cycle =1			


Frequency (MHz)	2450.000000
Relative permittivity (real part)	51.48
Conductivity (S/m)	1.94
Transmission Duty Factor	1.00
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	2.84
Highest Extrapolated SAR (W/Kg)	3.242
SAR 1g (W/Kg)	5.43
Peak SAR Location	0mm(x), -18mm(y), 4mm(z)

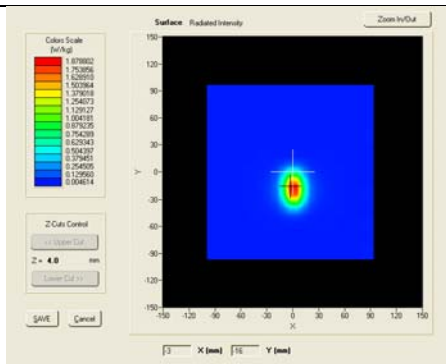

SURFACE SAR

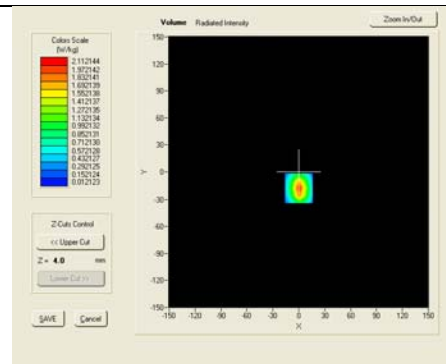


VOLUME SAR

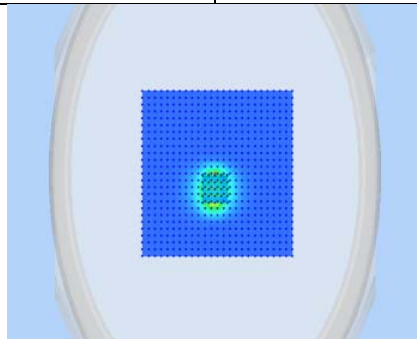


3D View

Test specification:	System Validation				
Environ Conditions:	Temp(oC):	23	Result:	Pass	
	Humidity (%):	58			
	Atmospheric(mPa):	1009			
Mains Power:	N/A				
Test Date:	11/05/2015				
Tested by:	Arthur Tie				
Remarks:	System Validation, dipole, CW signal, duty cycle =1				


Frequency (MHz)	5200.000000
Relative permittivity (real part)	48.89
Conductivity (S/m)	5.48
Transmission Duty Factor	1.00
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	4 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	3.74
Highest Extrapolated SAR (W/Kg)	9.41
SAR 1g (W/Kg)	15.78
Peak SAR Location	-2mm(x),0mm(y),4mm(z)

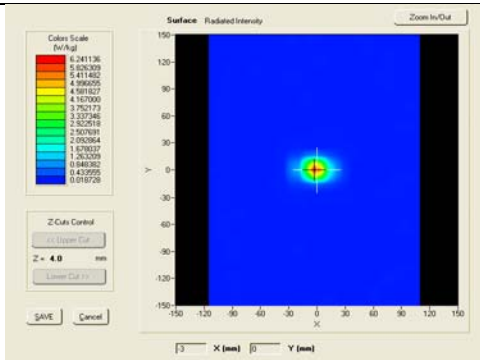

SURFACE SAR

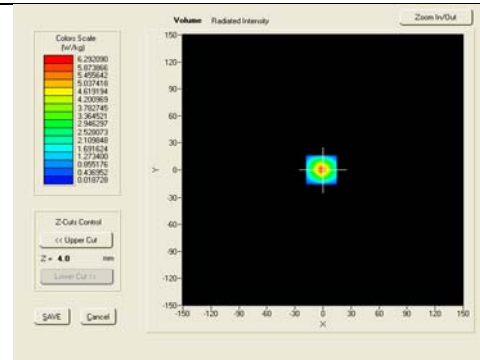


VOLUME SAR

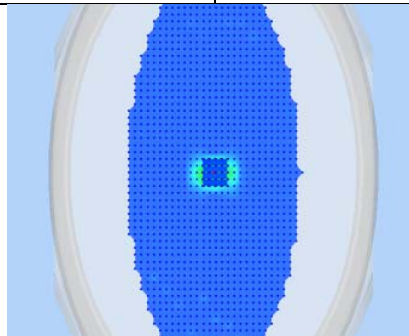


3D View

Test specification:	System Validation				
Environ Conditions:	Temp(oC):	23	Result:	Pass	
	Humidity (%):	58			
	Atmospheric(mPa):	1009			
Mains Power:	N/A				
Test Date:	11/05/2015				
Tested by:	Arthur Tie				
Remarks:	System Validation, dipole, CW signal, duty cycle =1				


Frequency (MHz)	5600.000000
Relative permittivity (real part)	48.59
Conductivity (S/m)	6.01
Transmission Duty Factor	1.00
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	4 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-4.09
Highest Extrapolated SAR (W/Kg)	28.621
SAR 1g (W/Kg)	17.651
Peak SAR Location	21mm(x),22mm(y),4mm(z)

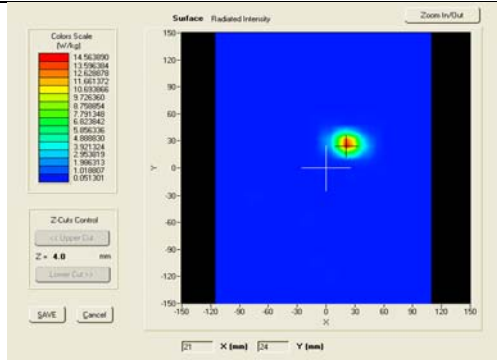

SURFACE SAR

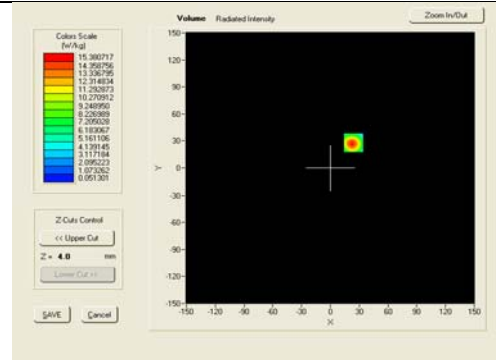


VOLUME SAR

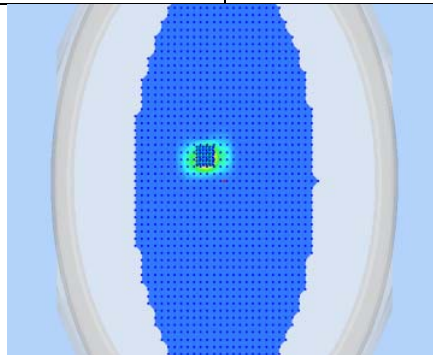


3D View

Test specification:	System Validation				
Environ Conditions:	Temp(oC):	23	Result:	Pass	
	Humidity (%):	58			
	Atmospheric(mPa):	1009			
Mains Power:	N/A				
Test Date:	11/05/2015				
Tested by:	Arthur Tie				
Remarks:	System Validation, dipole, CW signal, duty cycle =1				


Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.00
Conductivity (S/m)	6.24
Transmission Duty Factor	1.00
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.65
Area Scan Resolution	4 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	2.93
Highest Extrapolated SAR (W/Kg)	33.182
SAR 1g (W/Kg)	18.52
Peak SAR Location	21mm(x),22mm(y),4mm(z)

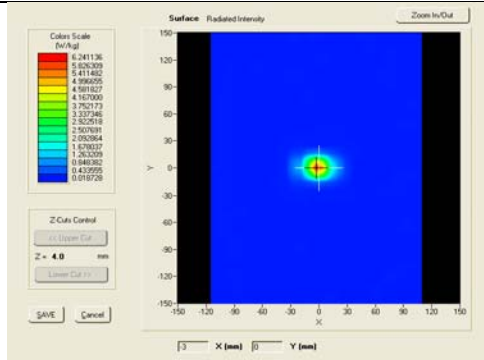

SURFACE SAR

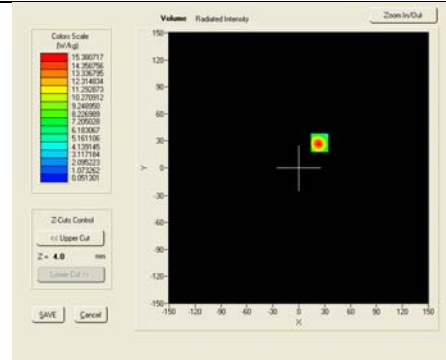

VOLUME SAR

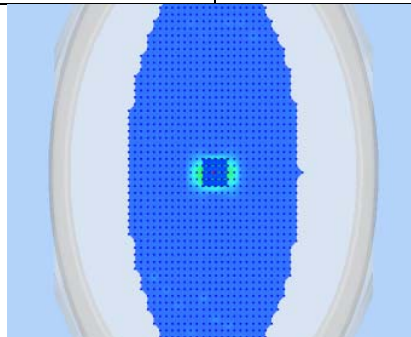


3D View


18 SAR Test Plots

Test specification:	Plane_Body_Low_LCD-Down_11b_0mm		
Environ Conditions:	Temp(oC): 21.4	Result:	Pass
	Humidity(%): 45		
	Atmospheric(mPa): 1210.4		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2412.000000 (Channel 1)
Relative permittivity (real part)	52.016
Conductivity (S/m)	1.920
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	4.17
Highest Extrapolated SAR (W/Kg)	0.2039
SAR 1g (W/Kg)	0.1028
Peak SAR Location	8mm(x), -32mm(y), 4mm(z)

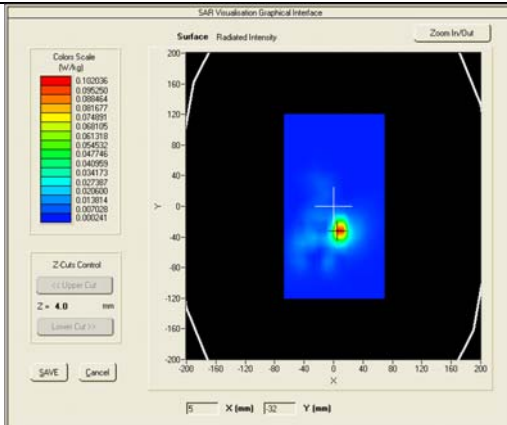

SURFACE SAR

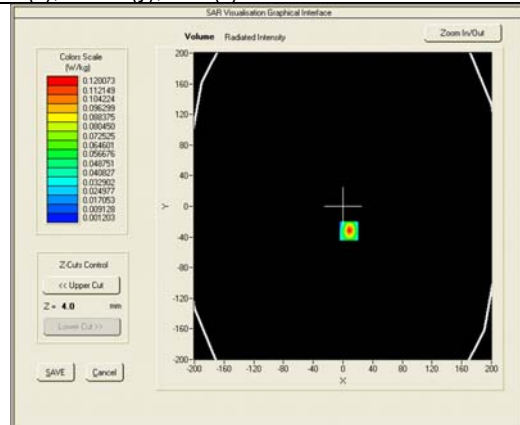


VOLUME SAR

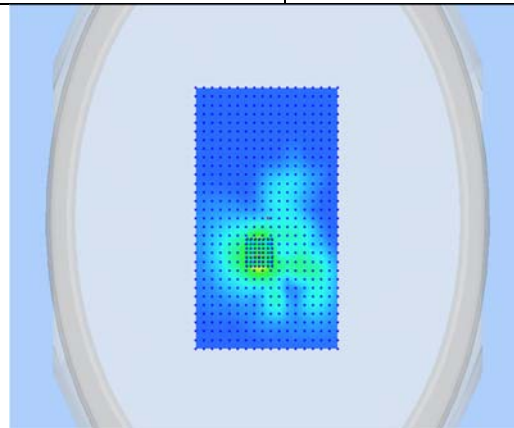


3D View Plot

Test specification:	Plane_Body_Middle_LCD-Down_11b_0mm		
Environ Conditions:	Temp(oC):	21.4	Result: Pass
	Humidity(%):	45	
	Atmospheric(mPa):	1210.4	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	51.48
Conductivity (S/m)	1.94
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.480
Highest Extrapolated SAR (W/Kg)	0.1553
SAR 1g (W/Kg)	0.0801
Peak SAR Location	8mm(x), -31mm(y), 4mm(z)

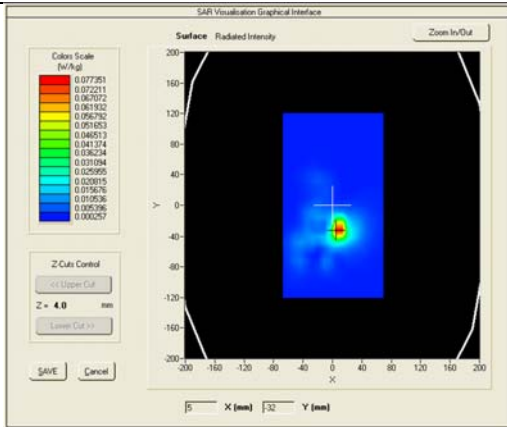

SURFACE SAR

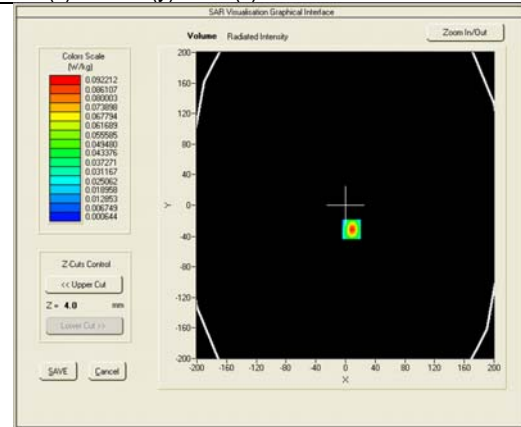


VOLUME SAR

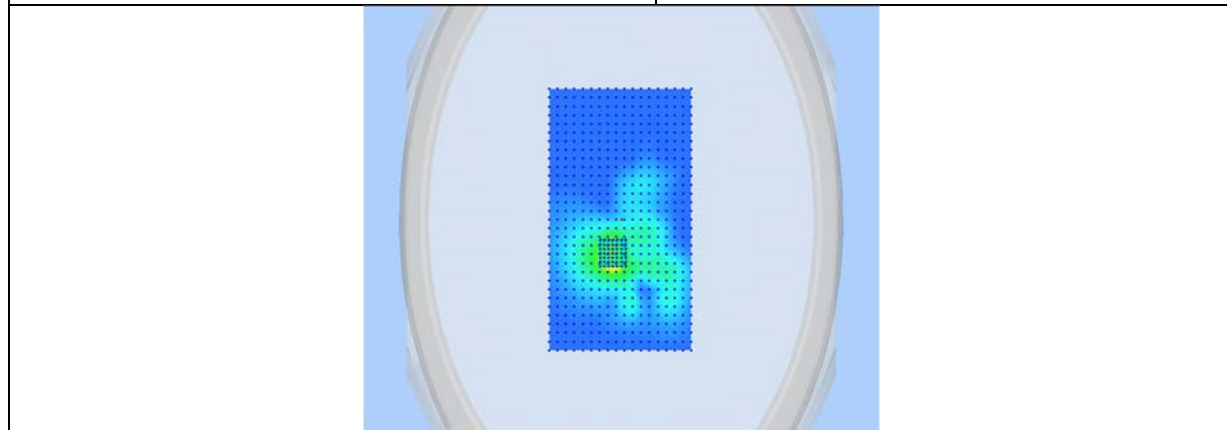


3D View Plot

Test specification:	Plane_Body_High_LCD-Down_11b_0mm		
Environ Conditions:	Temp(oC):	21.4	Result: Pass
	Humidity(%):	45	
	Atmospheric(mPa):	1210.4	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2462.000000 (Channel 11)
Relative permittivity (real part)	51.330
Conductivity (S/m)	1.98
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.050
Highest Extrapolated SAR (W/Kg)	0.1057
SAR 1g (W/Kg)	0.0544
Peak SAR Location	11mm(x),-31mm(y),4mm(z)

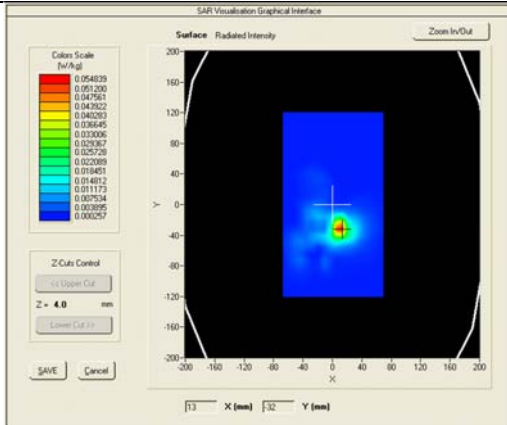

SURFACE SAR

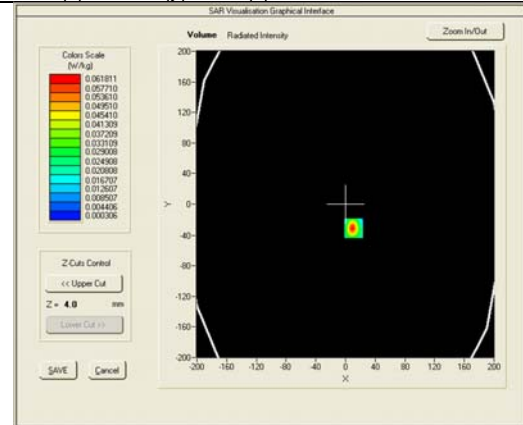


VOLUME SAR

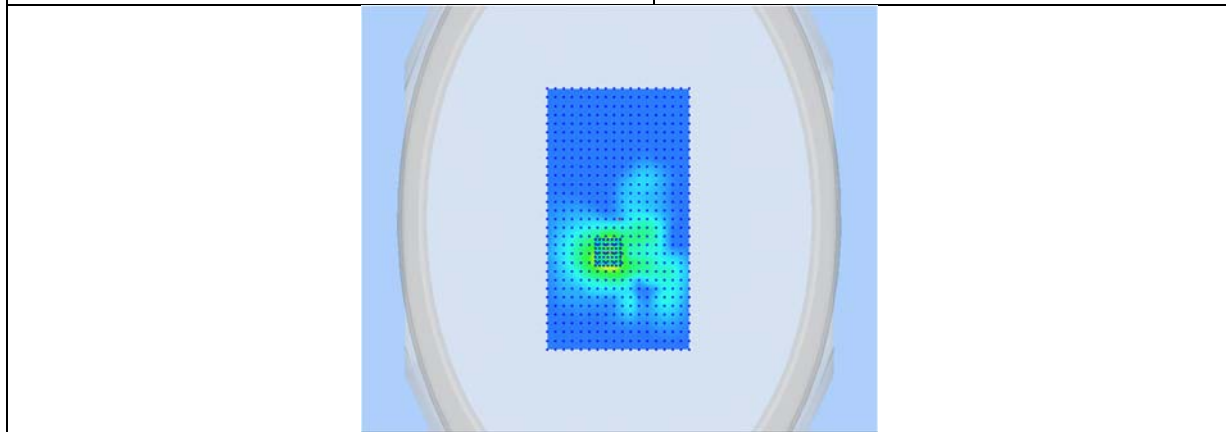


3D View Plot


Test specification:	Plane_Body_Low_RIGHT_802.11b_0mm		
Environ Conditions:	Temp(oC): 21.4	Result:	Pass
	Humidity(%): 45		
	Atmospheric(mPa): 1210.4		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			
Frequency (MHz)	2412.000000 (Channel 1)		
Relative permittivity (real part)	52.016		
Conductivity (S/m)	1.920		
Transmission Duty Factor	1.0		
Probe SN	2715_EPGO259		
Conversion Factor (dB)	2.7		
Area Scan Resolution	8 mm		
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm		
Zoom Scan Size	24x24x24 mm		
Measurement Drifts (%)	0.810		
Highest Extrapolated SAR (W/Kg)	1.1056		
SAR 1g (W/Kg)	0.5253		
Peak SAR Location	-9mm(x),17mm(y),4mm(z)		

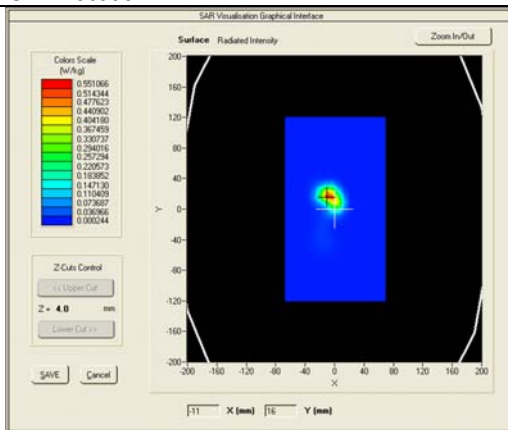

SURFACE SAR

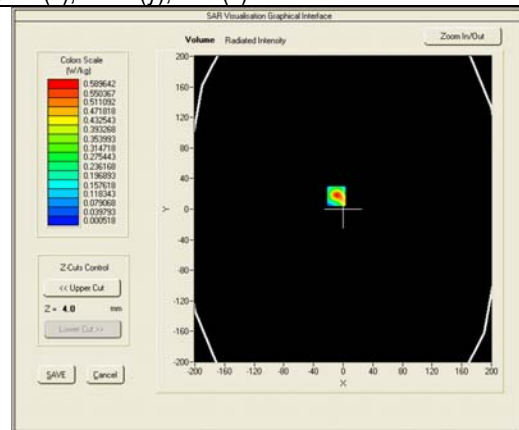


VOLUME SAR

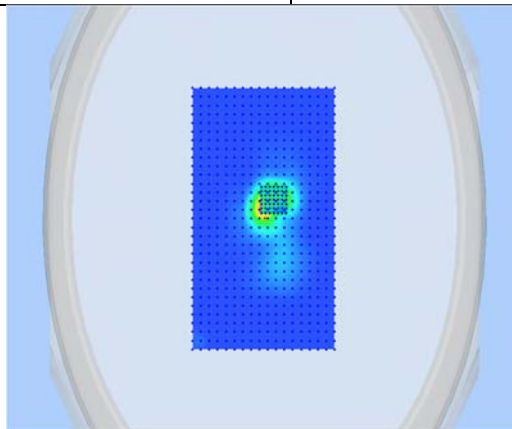


3D View Plot

Test specification:	Plane_Body_Middle_RIGHT_802.11b_0mm		
Environ Conditions:	Temp(oC): 21.4	Result:	Pass
	Humidity(%): 45		
	Atmospheric(mPa): 1210.4		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	51.48
Conductivity (S/m)	1.94
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.050
Highest Extrapolated SAR (W/Kg)	1.0988
SAR 1g (W/Kg)	0.5202
Peak SAR Location	-10mm(x),17mm(y),4mm(z)

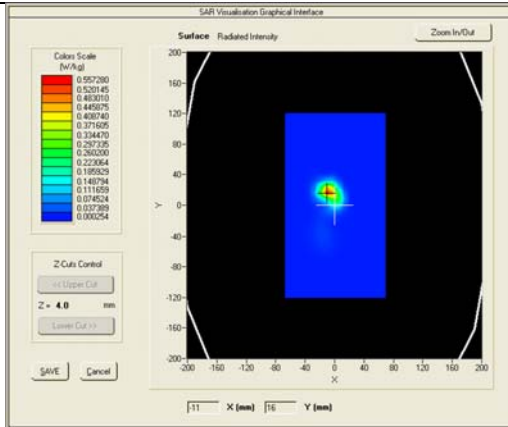

SURFACE SAR

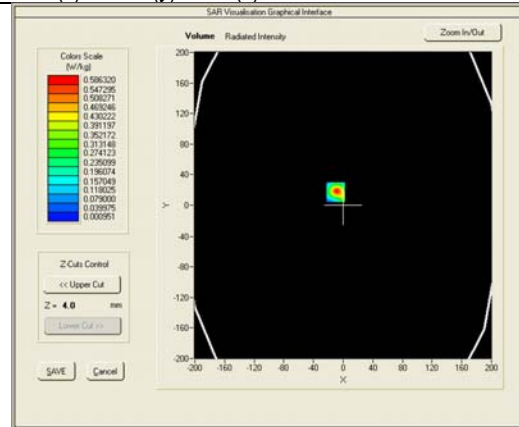


VOLUME SAR

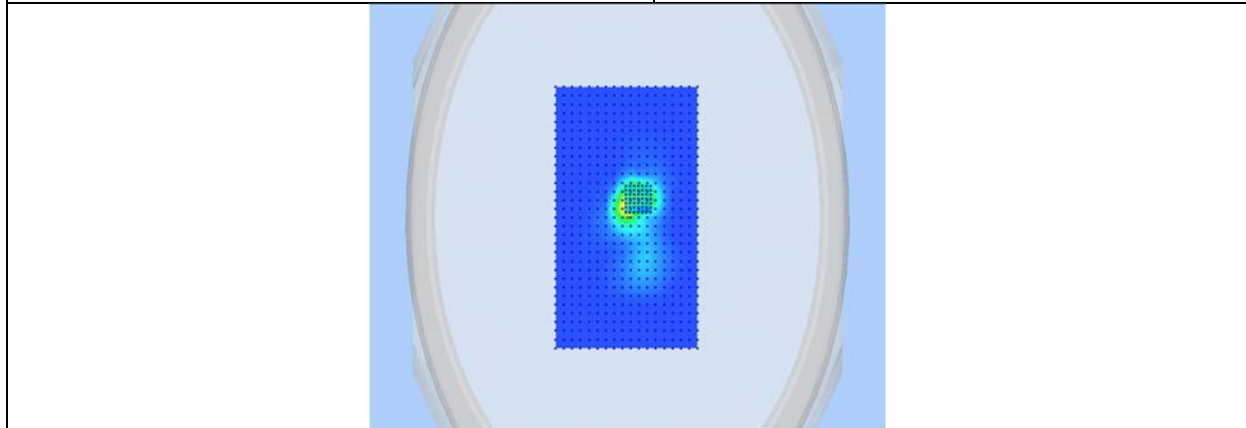


3D View Plot


Test specification:	Plane_Body_High_RIGHT_802.11b_0mm		
Environ Conditions:	Temp(oC): 21.4	Result:	Pass
	Humidity(%): 45		
	Atmospheric(mPa): 1210.4		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			
Frequency (MHz)	2462.000000 (Channel 11)		
Relative permittivity (real part)	51.330		
Conductivity (S/m)	1.98		
Transmission Duty Factor	1.0		
Probe SN	2715_EPGO259		
Conversion Factor (dB)	2.7		
Area Scan Resolution	8 mm		
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm		
Zoom Scan Size	24x24x24 mm		
Measurement Drifts (%)	-0.790		
Highest Extrapolated SAR (W/Kg)	1.0426		
SAR 1g (W/Kg)	0.4916		
Peak SAR Location	-9mm(x),18mm(y),4mm(z)		

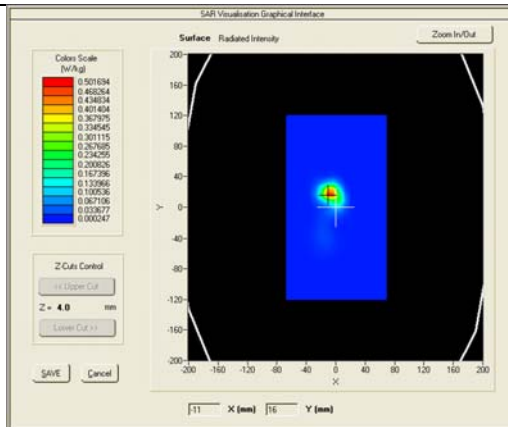

SURFACE SAR

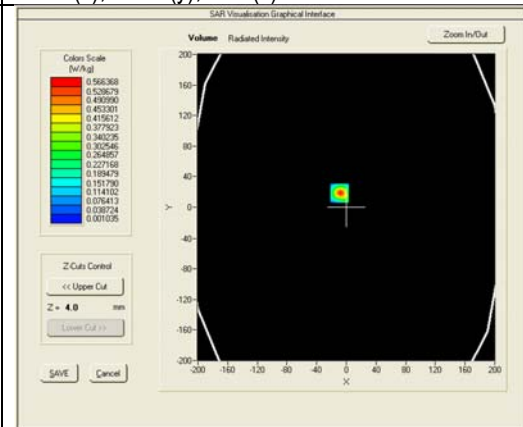


VOLUME SAR

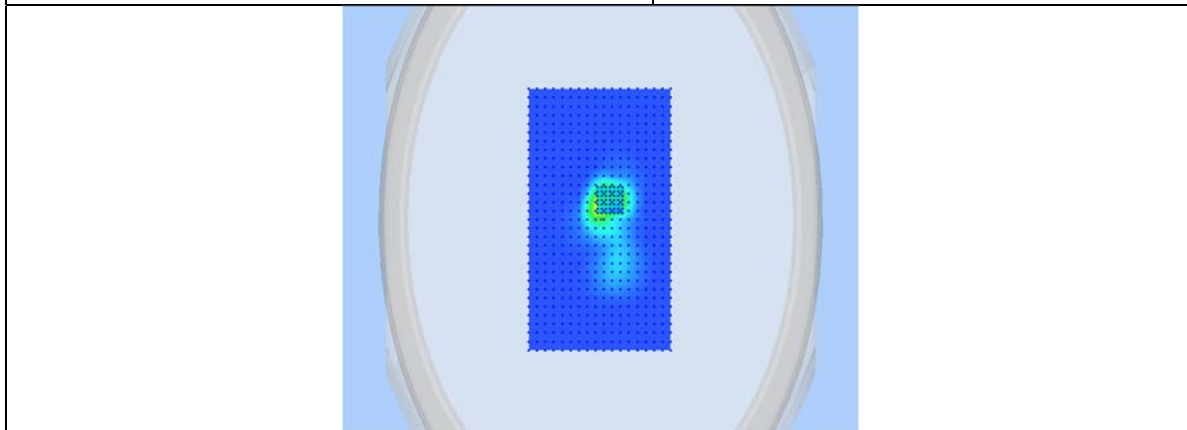


3D View Plot

Test specification:	Plane_Body_Middle_LCD_UP_802.11b_0mm		
Environ Conditions:	Temp(oC): 21.4	Result:	Pass
	Humidity(%): 45		
	Atmospheric(mPa): 1210.4		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	51.320
Conductivity (S/m)	1.931
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-4.270
Highest Extrapolated SAR (W/Kg)	0.0656
SAR 1g (W/Kg)	0.0350
Peak SAR Location	22mm(x),23mm(y),4mm(z)

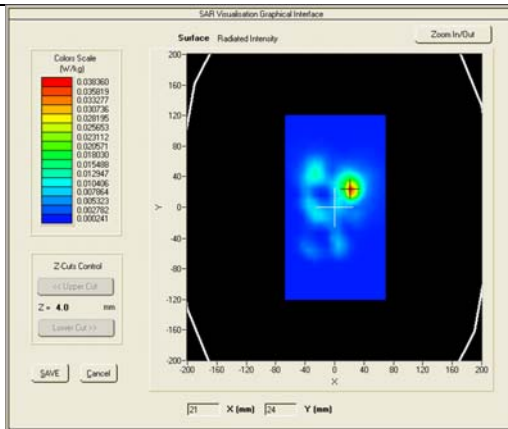

SURFACE SAR

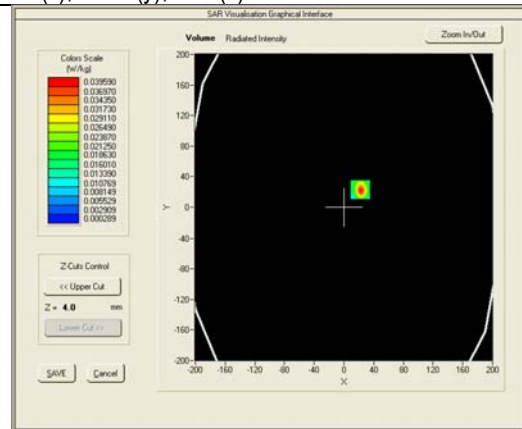


VOLUME SAR

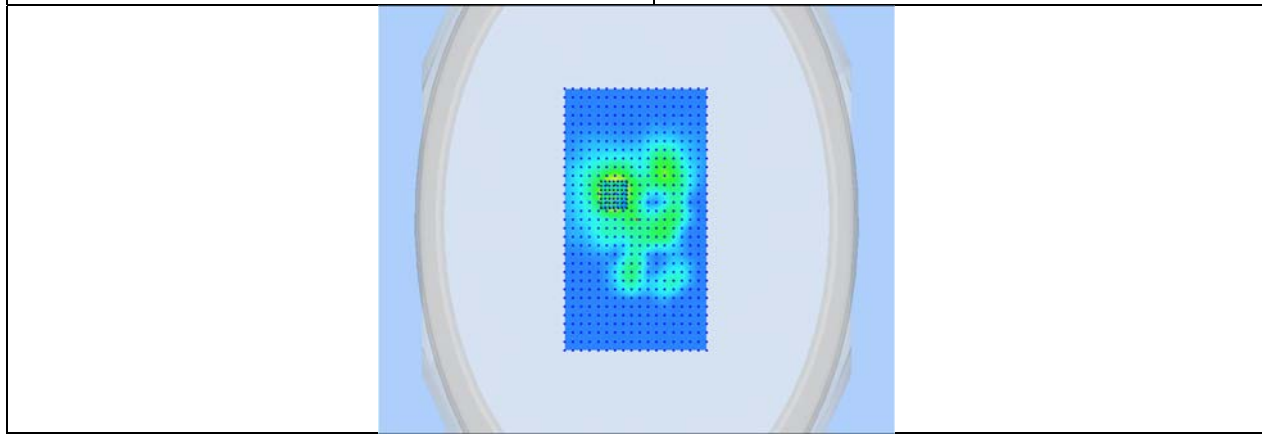


3D View Plot

Test specification:	Plane_Body_High_LEFT_802.11b_0mm		
Environ Conditions:	Temp(oC): 21.4	Result:	Pass
	Humidity(%): 45		
	Atmospheric(mPa): 1210.4		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2462.000000 (Channel 11)
Relative permittivity (real part)	51.330
Conductivity (S/m)	1.98
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.010
Highest Extrapolated SAR (W/Kg)	0.0169
SAR 1g (W/Kg)	0.0092
Peak SAR Location	-9mm(x),7mm(y),4mm(z)

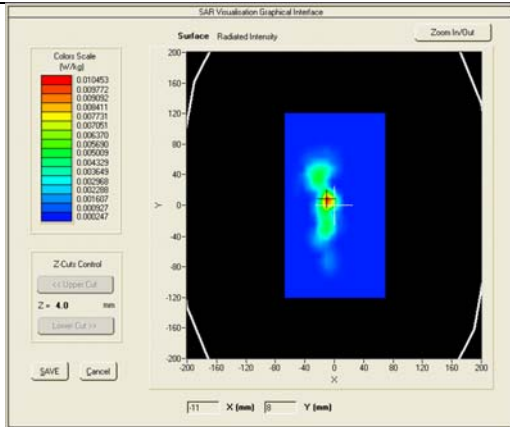

SURFACE SAR

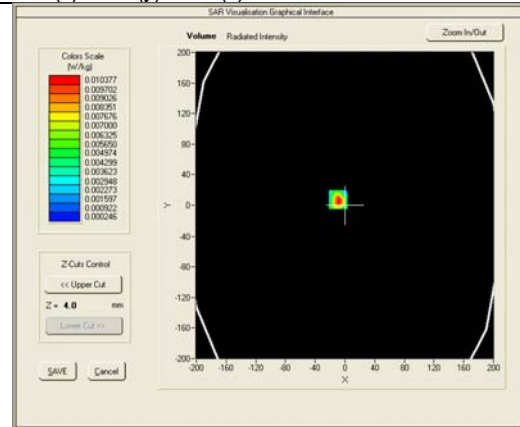


VOLUME SAR

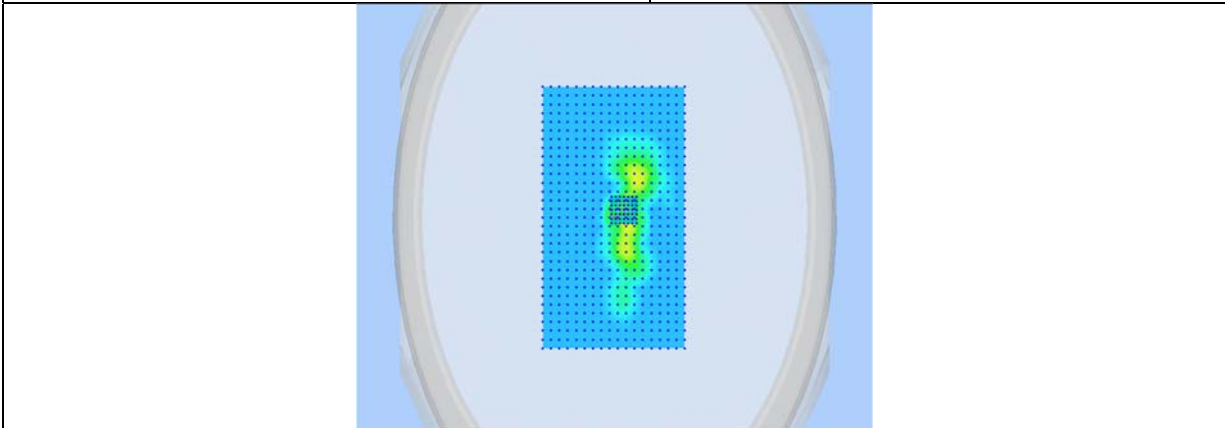


Test specification:	Plane_Body_Low_LCD-Down_11g_0mm		
Environ Conditions:	Temp(oC): 20.7	Result:	Pass
	Humidity(%): 43.9		
	Atmospheric(mPa): 1012.3		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2412.000000 (Channel 1)
Relative permittivity (real part)	52.913
Conductivity (S/m)	1.949
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.810
Highest Extrapolated SAR (W/Kg)	0.2055
SAR 1g (W/Kg)	0.1056
Peak SAR Location	10mm(x), -32mm(y), 4mm(z)

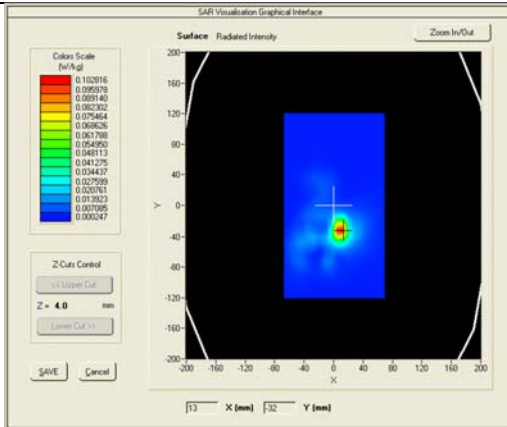

SURFACE SAR

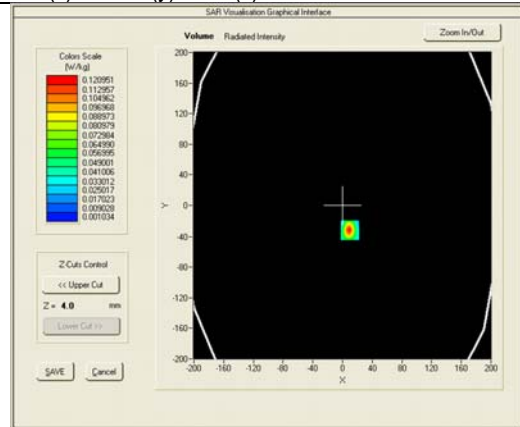


VOLUME SAR

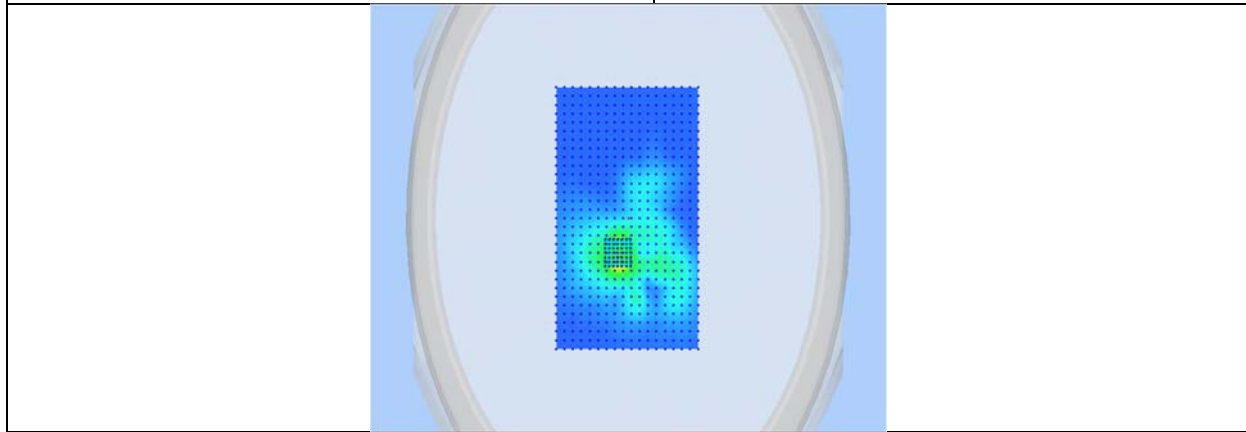


3D View Plot

Test specification:	Plane_Body_Middle_LCD-Down_11g_0mm		
Environ Conditions:	Temp(oC):	20.7	Result: Pass
	Humidity(%):	43.9	
	Atmospheric(mPa):	1012.3	
Mains Power:	N/A		Result: Pass
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	52.828
Conductivity (S/m)	1.958
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.210
Highest Extrapolated SAR (W/Kg)	0.1289
SAR 1g (W/Kg)	0.0657
Peak SAR Location	8mm(x), -31mm(y), 4mm(z)

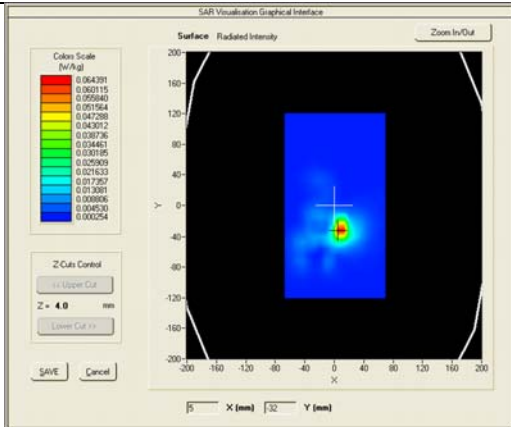

SURFACE SAR

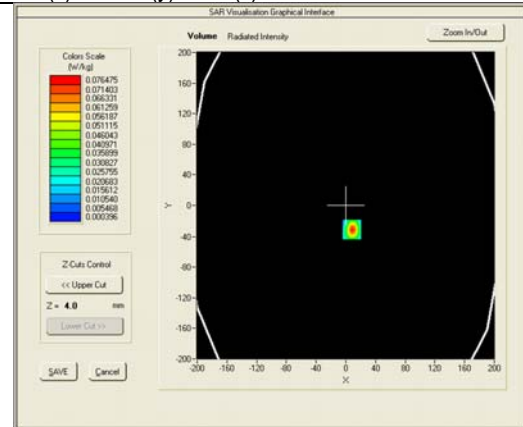


VOLUME SAR

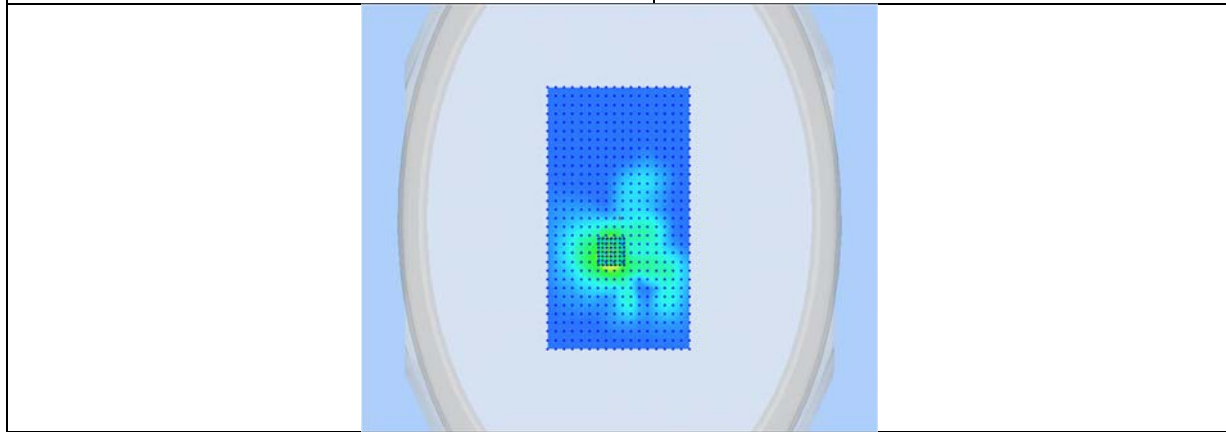


3D View Plot

Test specification:	Plane_Body_High_LCD-Down_11g_0mm		
Environ Conditions:	Temp(oC):	20.7	Result: Pass
	Humidity(%):	43.9	
	Atmospheric(mPa):	1012.3	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2462.000000 (Channel 11)
Relative permittivity (real part)	52.465
Conductivity (S/m)	1.963
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-3.250
Highest Extrapolated SAR (W/Kg)	0.0829
SAR 1g (W/Kg)	0.0425
Peak SAR Location	11mm(x),-31mm(y),4mm(z)

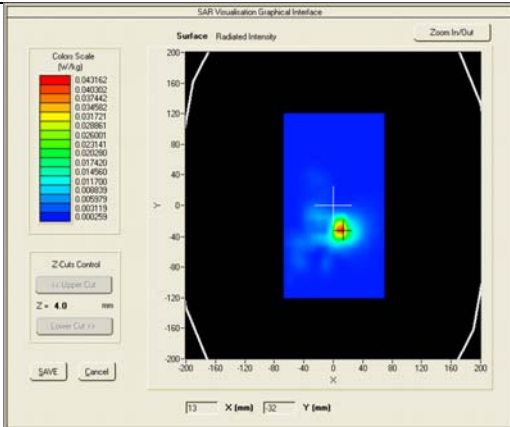

SURFACE SAR

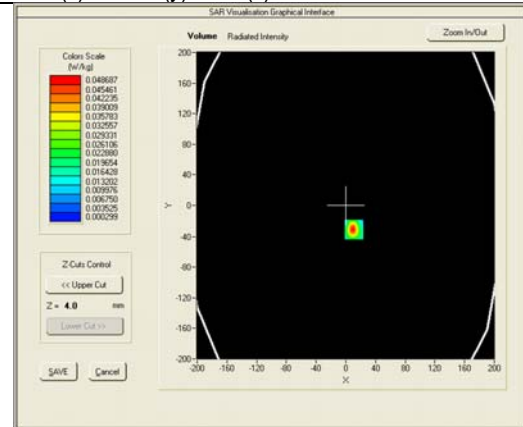


VOLUME SAR

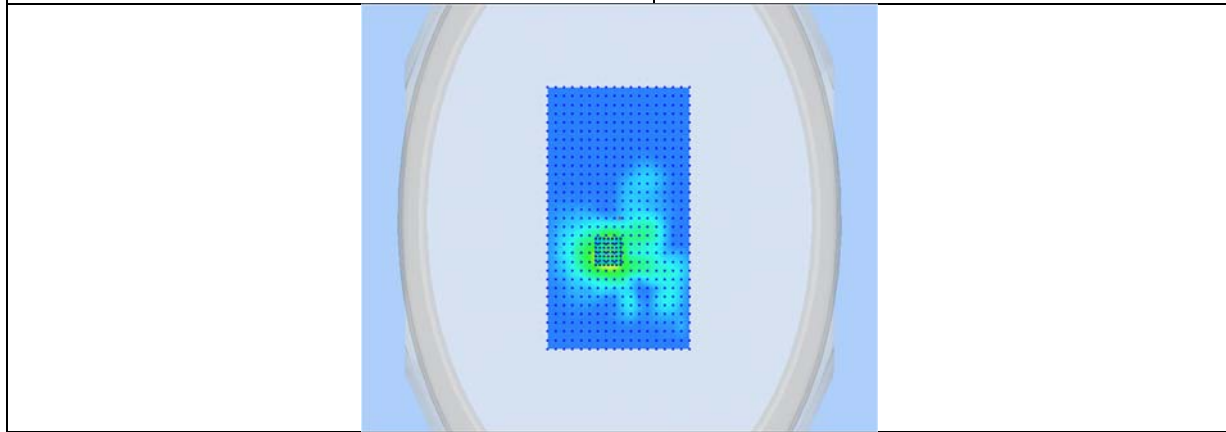


3D View Plot

Test specification:	Plane_Body_Low_RIGHT_802.11g_0mm		
Environ Conditions:	Temp(oC):	20.7	Result: Pass
	Humidity(%):	43.9	
	Atmospheric(mPa):	1012.3	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2412.000000 (Channel 1)
Relative permittivity (real part)	52.913
Conductivity (S/m)	1.949
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	0.090
Highest Extrapolated SAR (W/Kg)	1.1789
SAR 1g (W/Kg)	0.5459
Peak SAR Location	-9mm(x), 17mm(y), 4mm(z)

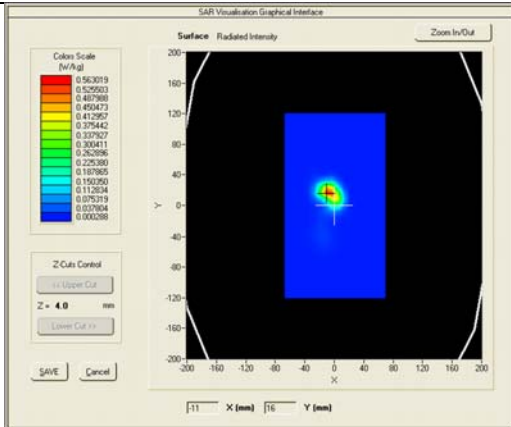

SURFACE SAR

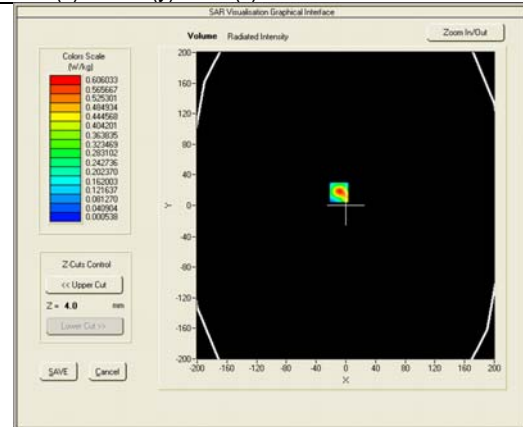


VOLUME SAR

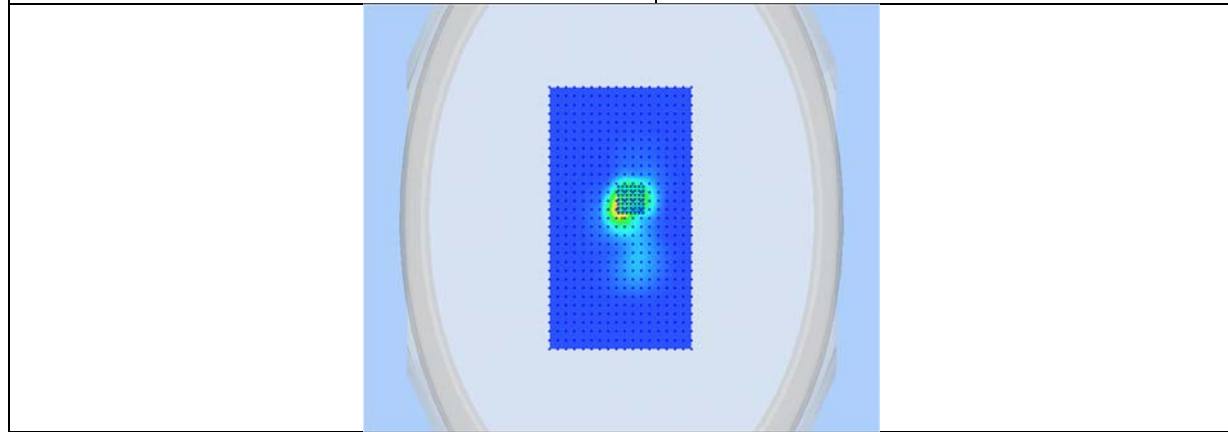


3D View Plot

Test specification:	Plane_Body_Middle_RIGHT_802.11g_0mm		
Environ Conditions:	Temp(oC): 20.7	Result:	Pass
	Humidity(%): 43.9		
	Atmospheric(mPa): 1012.3		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	52.828
Conductivity (S/m)	1.958
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.870
Highest Extrapolated SAR (W/Kg)	0.9574
SAR 1g (W/Kg)	0.4429
Peak SAR Location	-10mm(x), 17mm(y), 4mm(z)

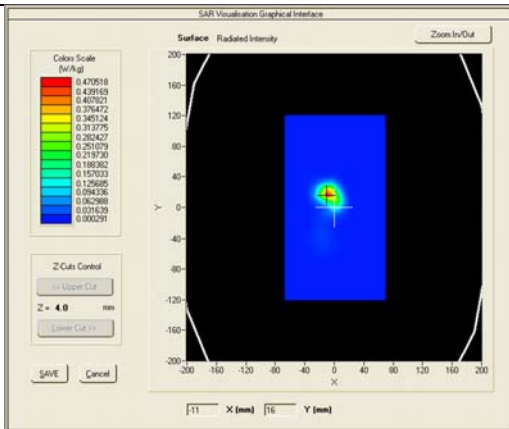

SURFACE SAR

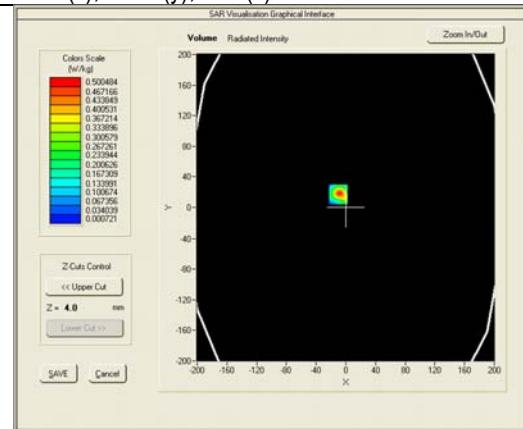


VOLUME SAR

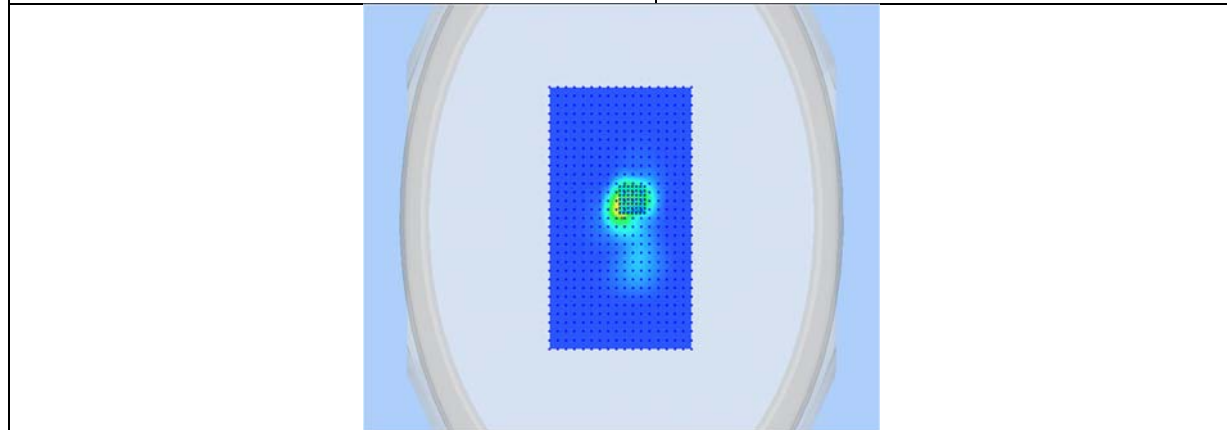


3D View Plot

Test specification:	Plane_Body_High_RIGHT_802.11g_0mm		
Environ Conditions:	Temp(oC):	20.7	Result: Pass
	Humidity(%):	43.9	
	Atmospheric(mPa):	1012.3	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2462.000000 (Channel 11)
Relative permittivity (real part)	52.465
Conductivity (S/m)	1.963
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.790
Highest Extrapolated SAR (W/Kg)	0.9190
SAR 1g (W/Kg)	0.4319
Peak SAR Location	-10mm(x), 17mm(y), 4mm(z)

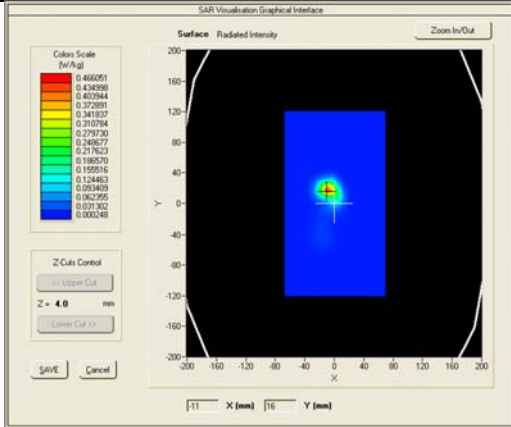

SURFACE SAR

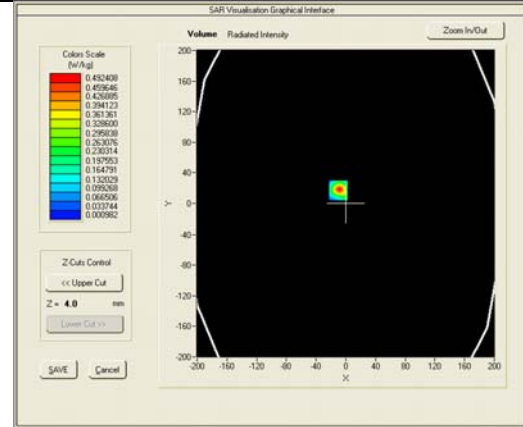


VOLUME SAR

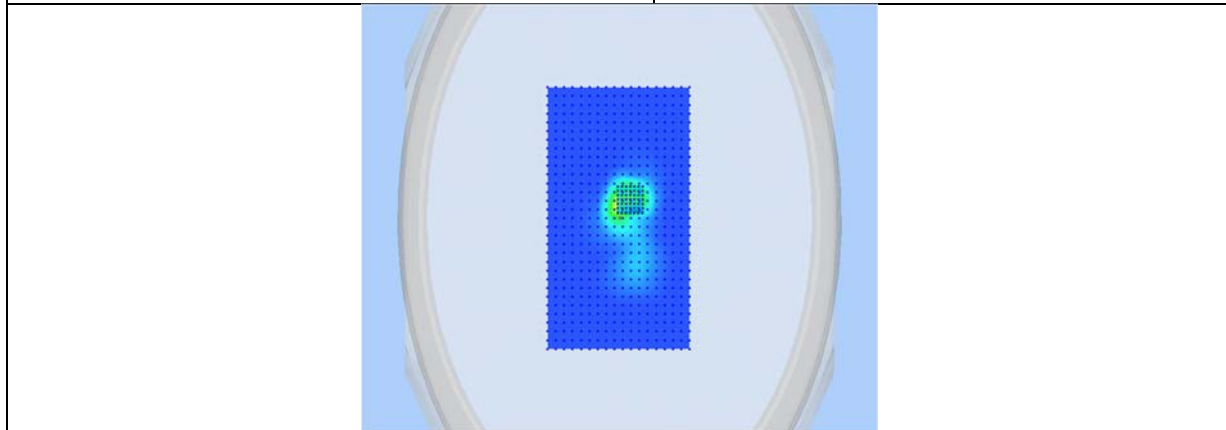


3D View Plot

Test specification:	Plane_Body_Middle_LCD-Up_11g_0mm		
Environ Conditions:	Temp(oC): 20.7	Result:	Pass
	Humidity(%): 43.9		
	Atmospheric(mPa): 1012.3		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	52.828
Conductivity (S/m)	1.958
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	1.920
Highest Extrapolated SAR (W/Kg)	0.0738
SAR 1g (W/Kg)	0.0379
Peak SAR Location	-59mm(x), -48mm(y), 4mm(z)

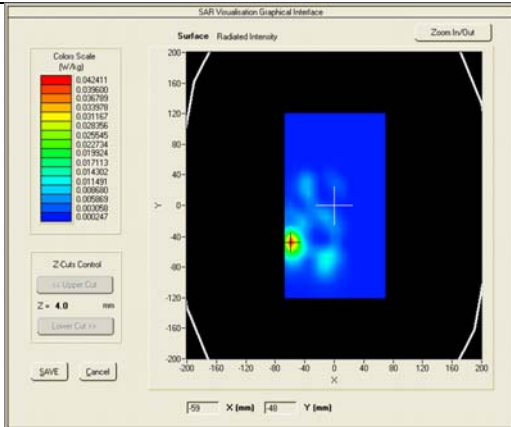

SURFACE SAR

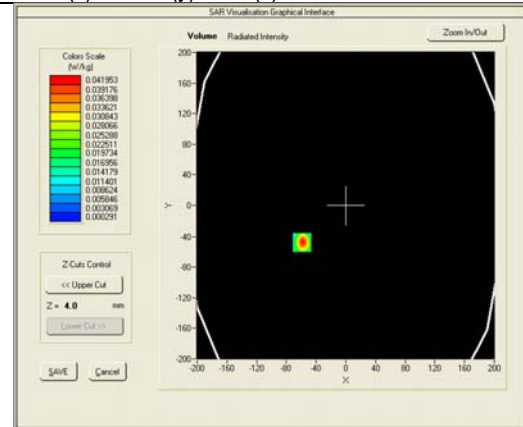


VOLUME SAR

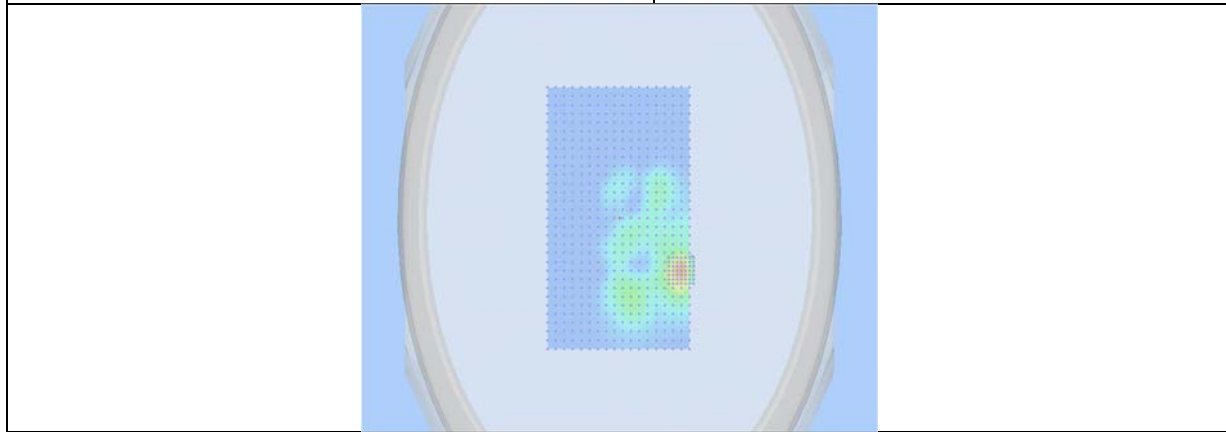


3D View Plot

Test specification:	Plane_Body_Middle_LCD-Down_11n-20_0mm		
Environ Conditions:	Temp(oC):	20.7	Result: Pass
	Humidity(%):	43.9	
	Atmospheric(mPa):	1012.3	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	52.828
Conductivity (S/m)	1.958
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	3.880
Highest Extrapolated SAR (W/Kg)	0.0967
SAR 1g (W/Kg)	0.0488
Peak SAR Location	10mm(x),-31mm(y),4mm(z)

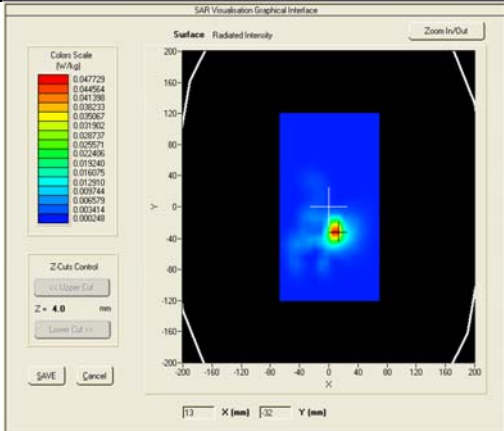

SURFACE SAR

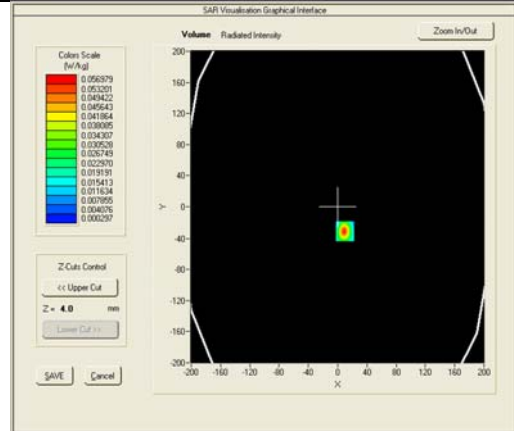


VOLUME SAR

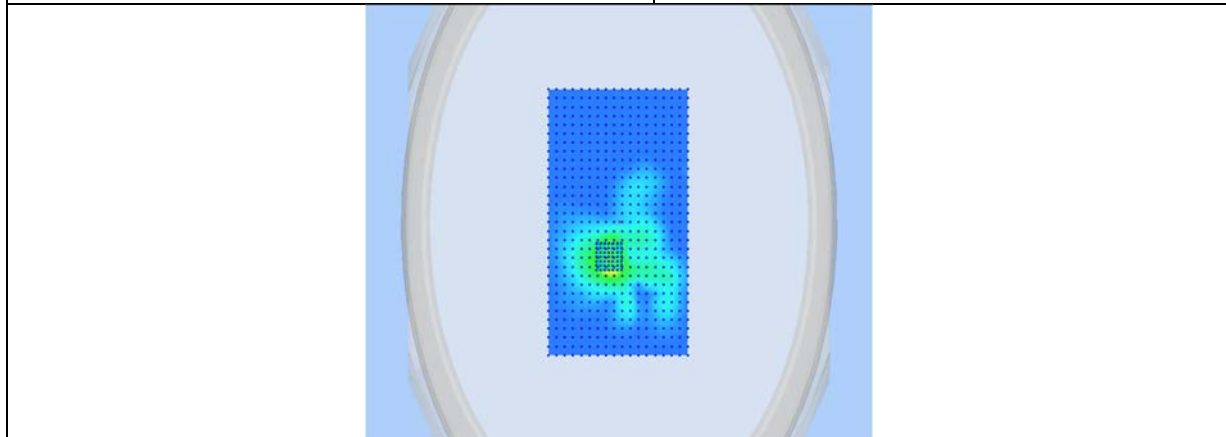


3D View Plot

Test specification:	Plane_Body_Low_RIGHT_802.11n-20_5mm		
Environ Conditions:	Temp(oC): 20.7	Result:	Pass
	Humidity(%): 43.9		
	Atmospheric(mPa): 1012.3		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2412.000000 (Channel 1)
Relative permittivity (real part)	52.913
Conductivity (S/m)	1.949
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.570
Highest Extrapolated SAR (W/Kg)	0.7203
SAR 1g (W/Kg)	0.3427
Peak SAR Location	-9mm(x), 17mm(y), 4mm(z)

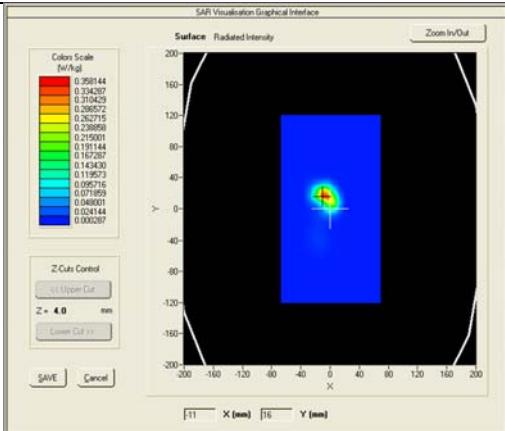

SURFACE SAR

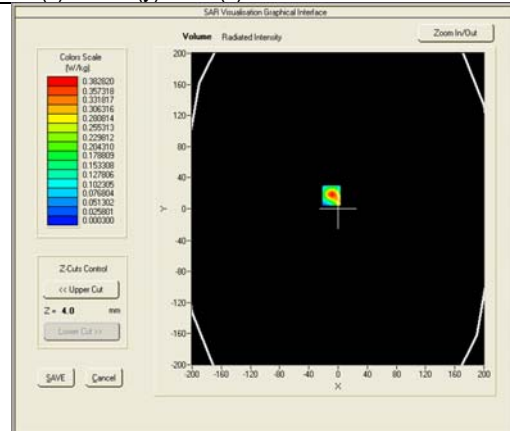


VOLUME SAR

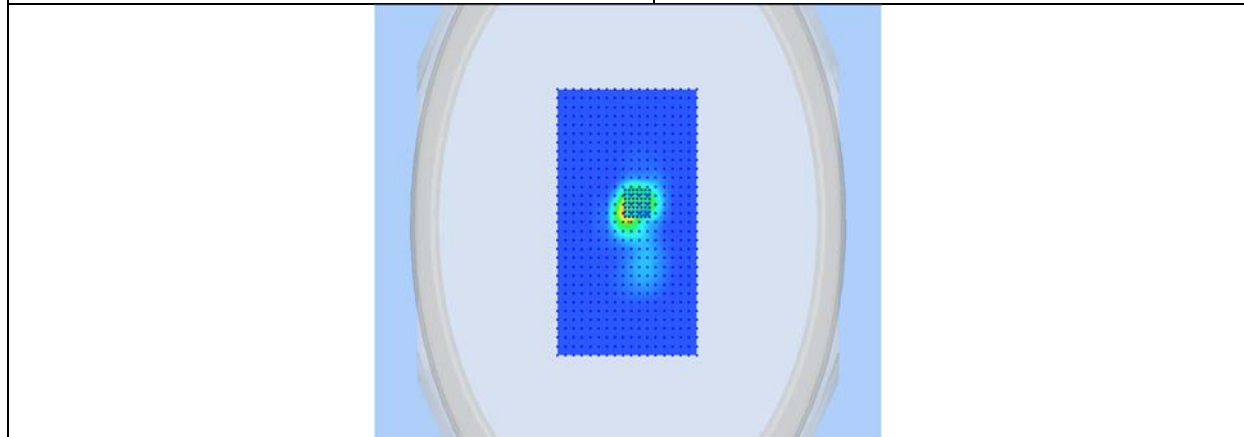


3D View Plot

Test specification:	Plane_Body_Middle_RIGHT_802.11n-20_5mm		
Environ Conditions:	Temp(oC): 20.7	Result:	Pass
	Humidity(%): 43.9		
	Atmospheric(mPa): 1012.3		
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	52.828
Conductivity (S/m)	1.958
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.970
Highest Extrapolated SAR (W/Kg)	0.7074
SAR 1g (W/Kg)	0.3320
Peak SAR Location	-10mm(x),17mm(y),4mm(z)

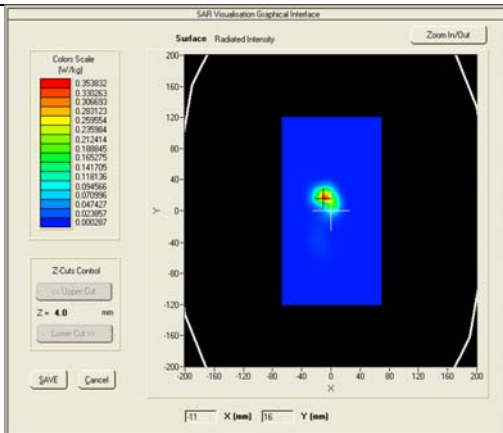

SURFACE SAR

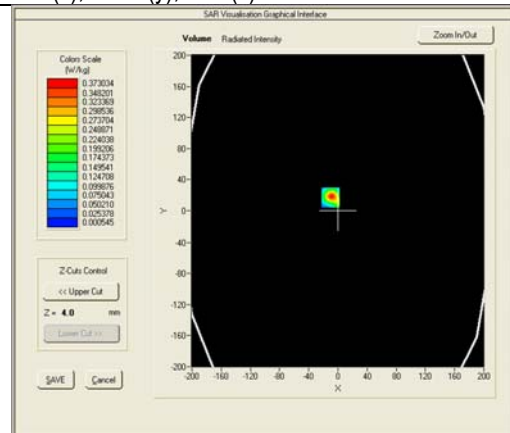


VOLUME SAR

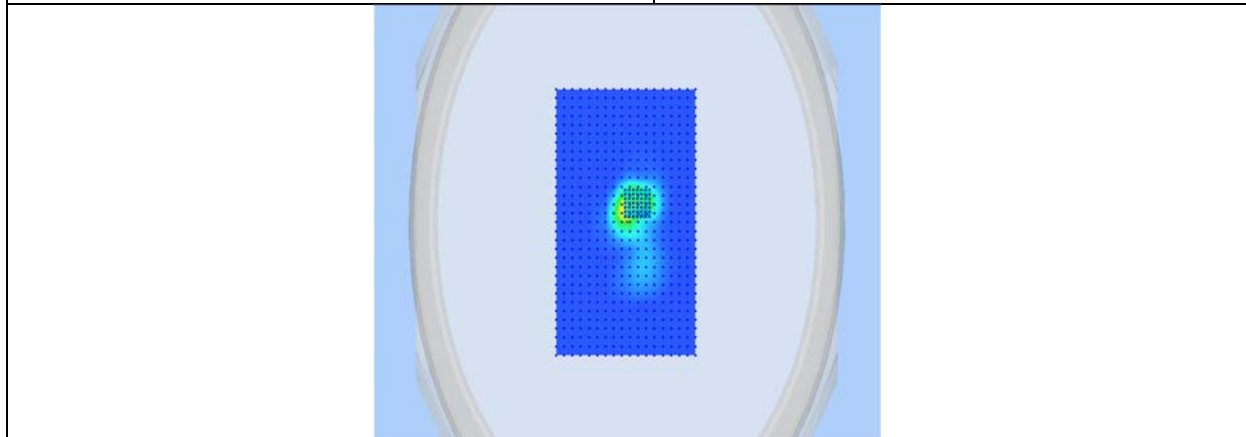


3D View Plot

Test specification:	Plane_Body_High_RIGHT_802.11n-20_5mm		
Environ Conditions:	Temp(oC):	20.7	Result: Pass
	Humidity(%):	43.9	
	Atmospheric(mPa):	1012.3	
Mains Power:	N/A		
Test Date:	11/03/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	2462.000000 (Channel 11)
Relative permittivity (real part)	52.465
Conductivity (S/m)	1.963
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.100
Highest Extrapolated SAR (W/Kg)	0.6316
SAR 1g (W/Kg)	0.2952
Peak SAR Location	-10mm(x), 17mm(y), 4mm(z)

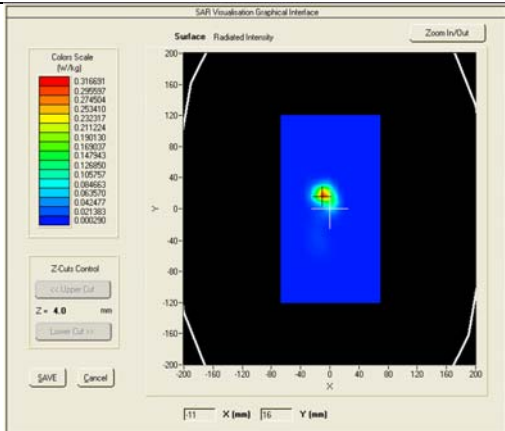

SURFACE SAR

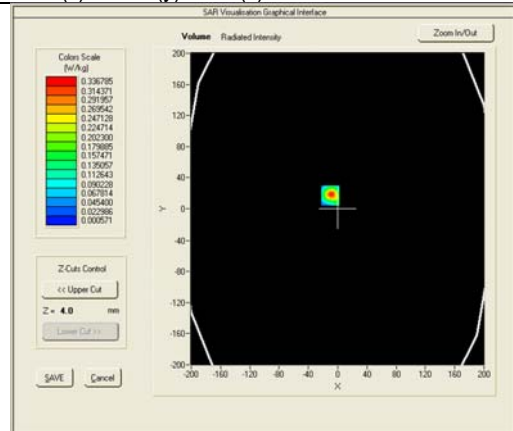


VOLUME SAR

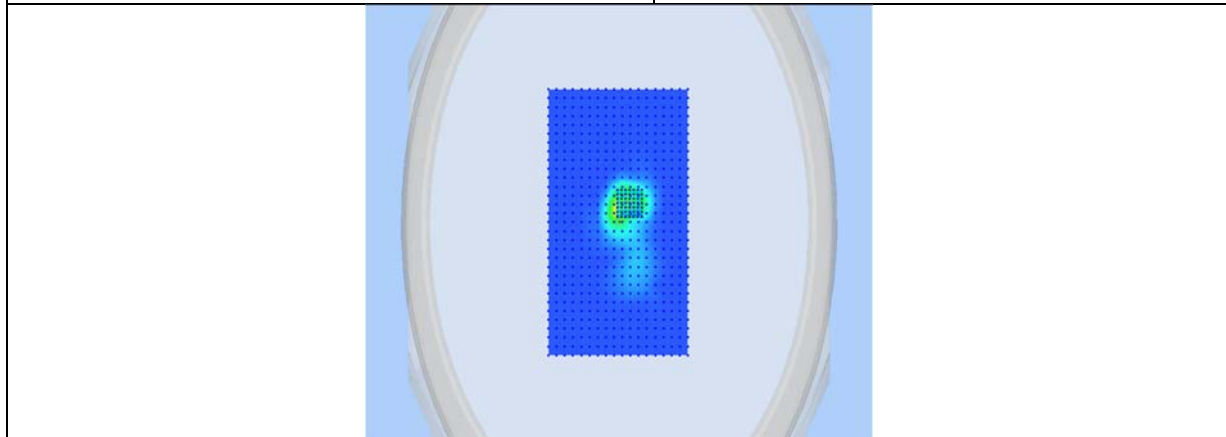


3D View Plot

Test specification:	Plane_Body_Middle_LCD-UP_11n-20_5mm			Result:	Pass
Environ Conditions:	Temp(oC):	20.7			
	Humidity(%):	43.9			
	Atmospheric(mPa):	1012.3			
Mains Power:	N/A				
Test Date:	11/03/2015				
Tested by:	Arthur Tie				
Remarks:					


Frequency (MHz)	2437.000000 (Channel 6)
Relative permittivity (real part)	52.828
Conductivity (S/m)	1.958
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.7
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	3.080
Highest Extrapolated SAR (W/Kg)	0.0615
SAR 1g (W/Kg)	0.0305
Peak SAR Location	10mm(x), -31mm(y), 4mm(z)

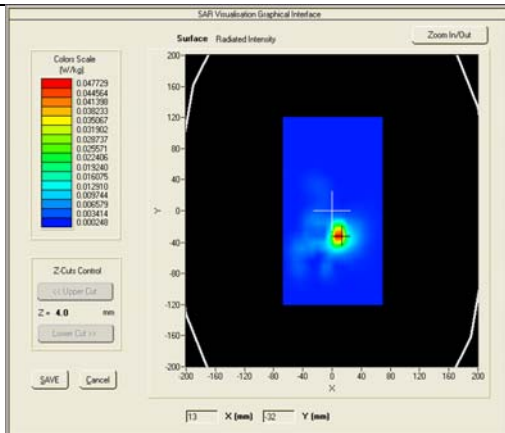

SURFACE SAR

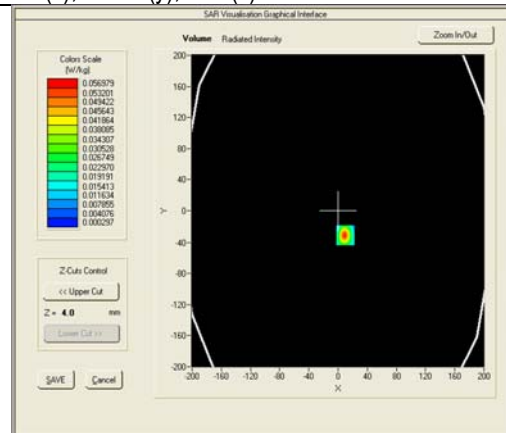


VOLUME SAR

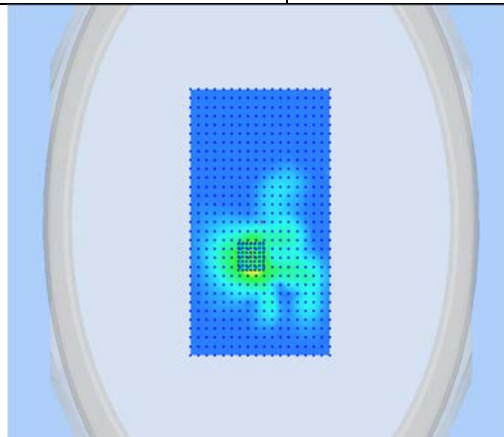

3D View Plot


Test specification:	Plane_Body_Low_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			

Frequency (MHz)	5180.000000 (Channel 36)
Relative permittivity (real part)	46.267
Conductivity (S/m)	5.548
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.570
Highest Extrapolated SAR (W/Kg)	0.0865
SAR 1g (W/Kg)	0.0656
Peak SAR Location	-11mm(x),16mm(y),4mm(z)

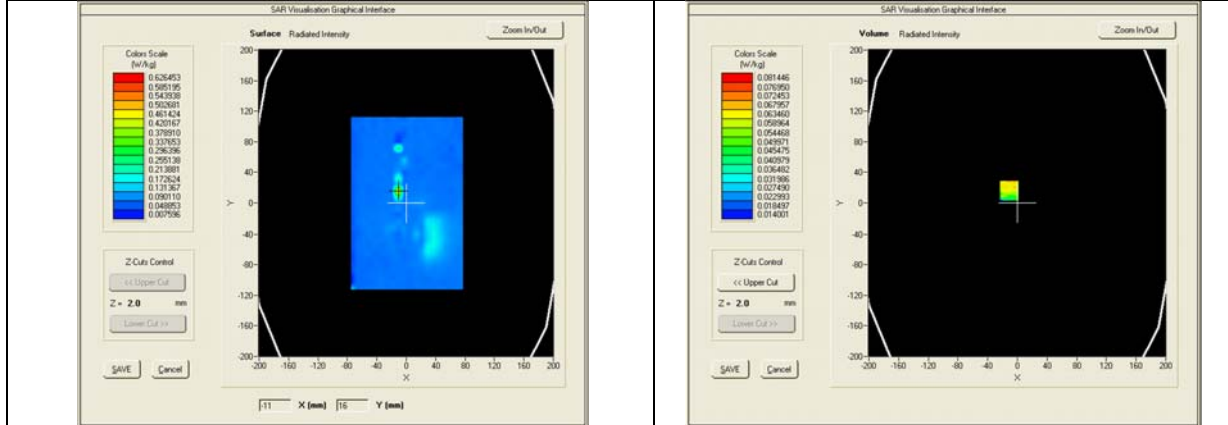

SURFACE SAR


VOLUME SAR

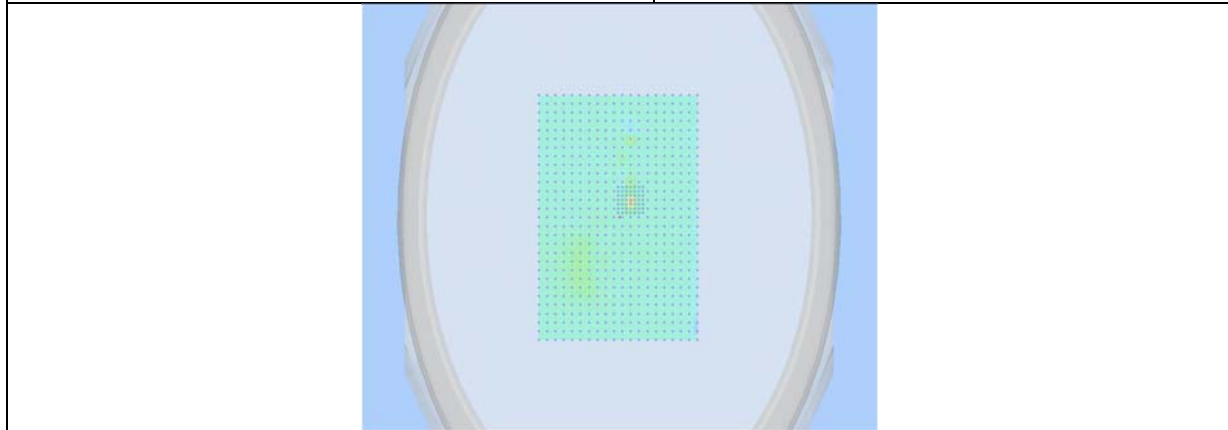


3D View Plot

Test specification:	Plane_Body_Low_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5180.000000 (Channel 36)
Relative permittivity (real part)	46.267
Conductivity (S/m)	5.548
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.310
Highest Extrapolated SAR (W/Kg)	1.0533
SAR 1g (W/Kg)	0.3771
Peak SAR Location	-5mm(x), -49mm(y), 4mm(z)

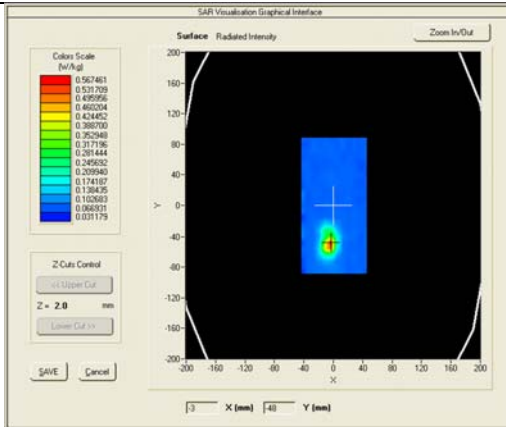

SURFACE SAR

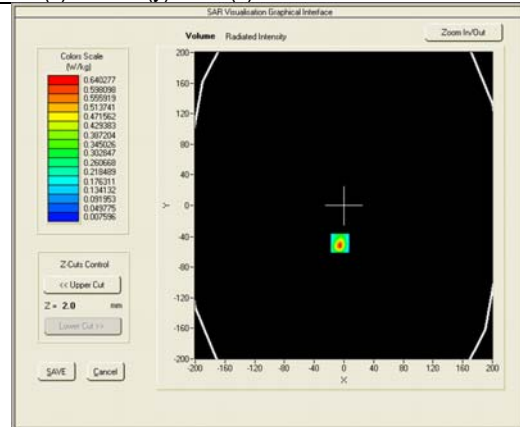


VOLUME SAR

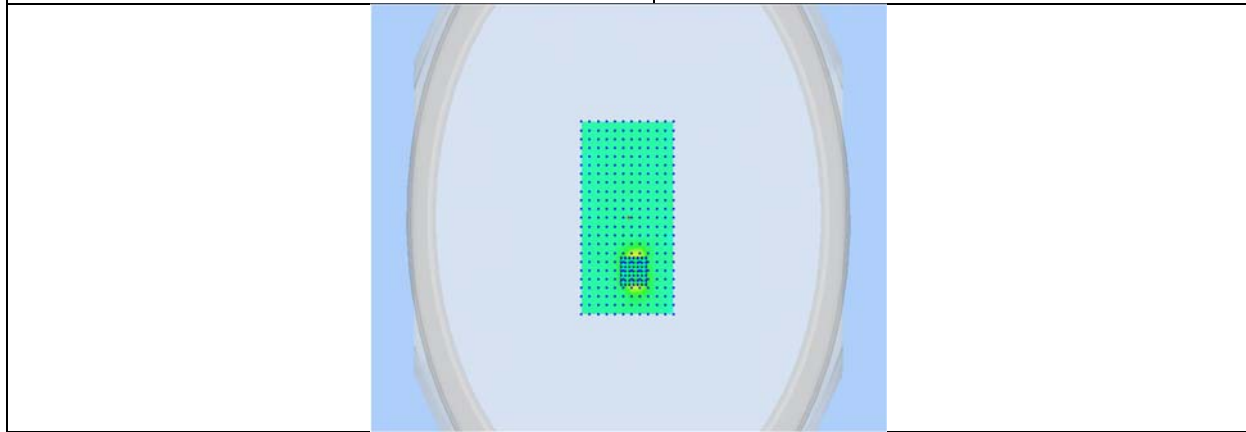


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5200.000000 (Channel 40)
Relative permittivity (real part)	46.176
Conductivity (S/m)	5.559
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.220
Highest Extrapolated SAR (W/Kg)	0.2851
SAR 1g (W/Kg)	0.1373
Peak SAR Location	45mm(x), -48mm(y), 4mm(z)

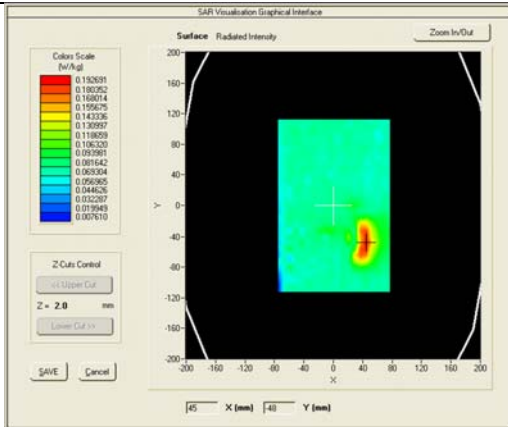

SURFACE SAR

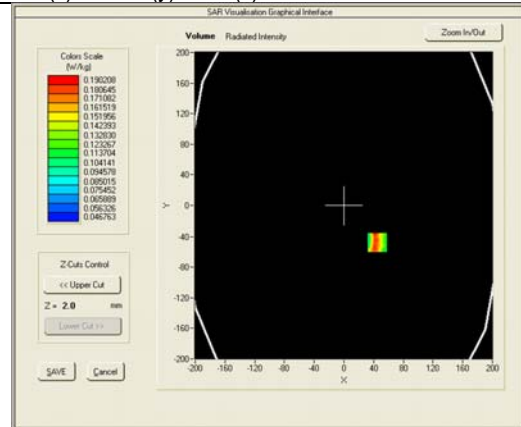


VOLUME SAR

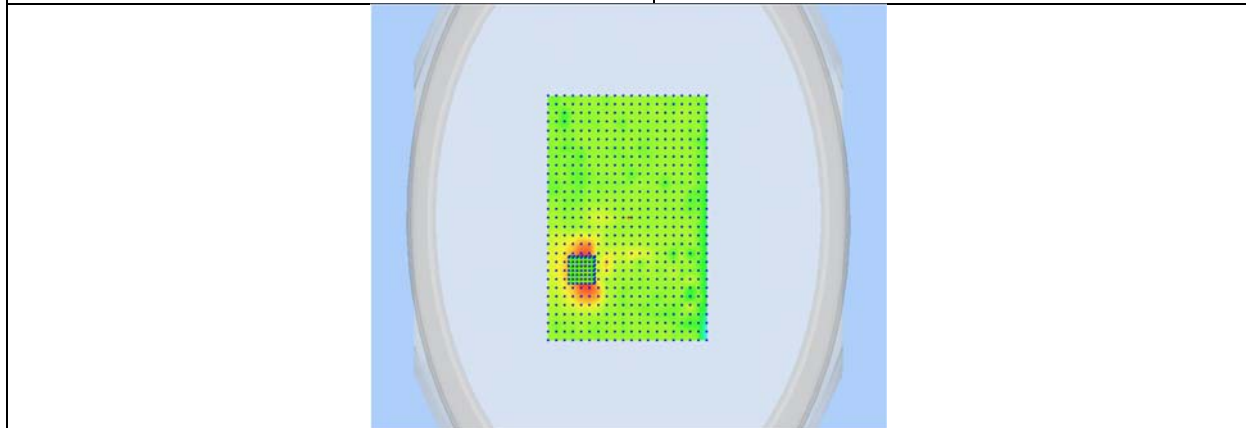


3D View Plot

Test specification:	Plane_Body_Middle_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5200.000000 (Channel 40)
Relative permittivity (real part)	46.176
Conductivity (S/m)	5.559
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-3.010
Highest Extrapolated SAR (W/Kg)	1.1108
SAR 1g (W/Kg)	0.3890
Peak SAR Location	-5mm(x), -49mm(y), 4mm(z)

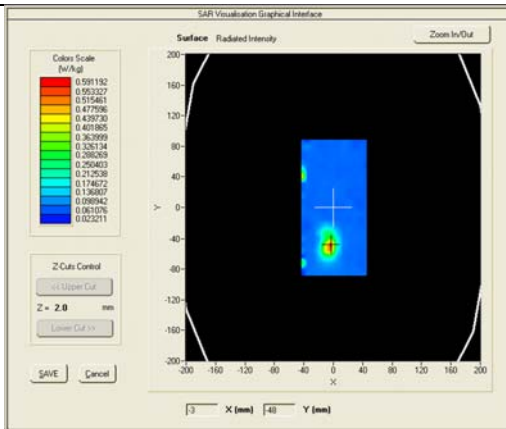

SURFACE SAR

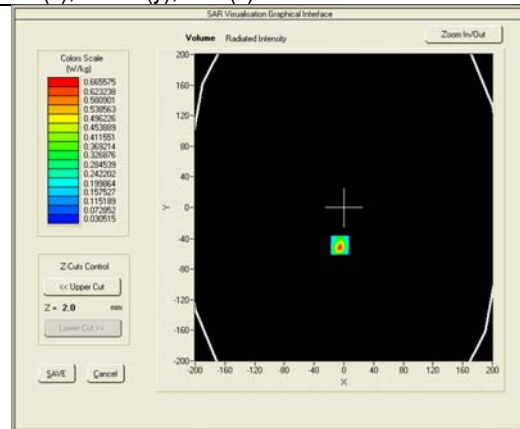


VOLUME SAR

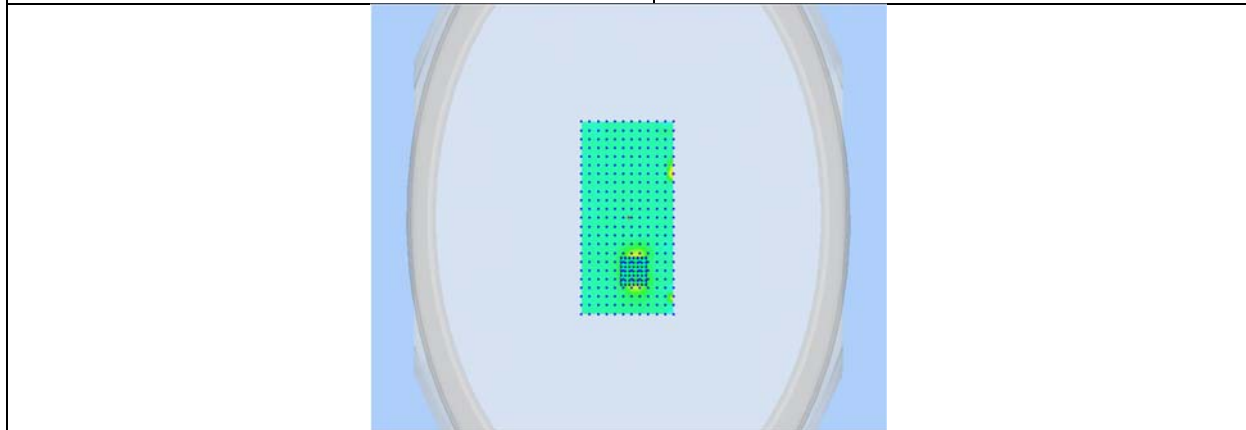


3D View Plot

Test specification:	Plane_Body_Middle_LCD_UP_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Result: Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5200.000000 (Channel 40)
Relative permittivity (real part)	46.176
Conductivity (S/m)	5.559
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	4.670
Highest Extrapolated SAR (W/Kg)	0.3091
SAR 1g (W/Kg)	0.1349
Peak SAR Location	-36mm(x), -48mm(y), 4mm(z)

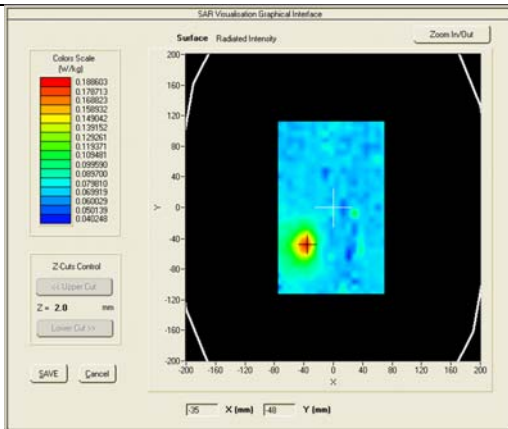

SURFACE SAR

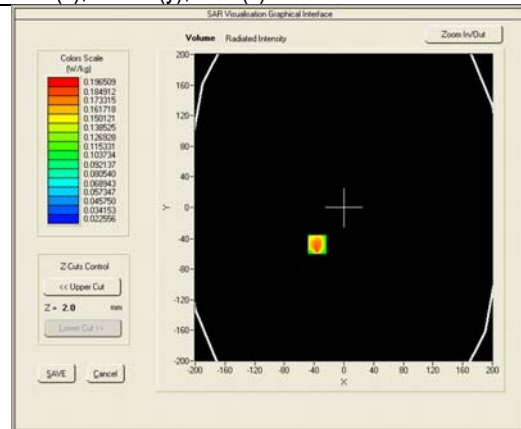


VOLUME SAR

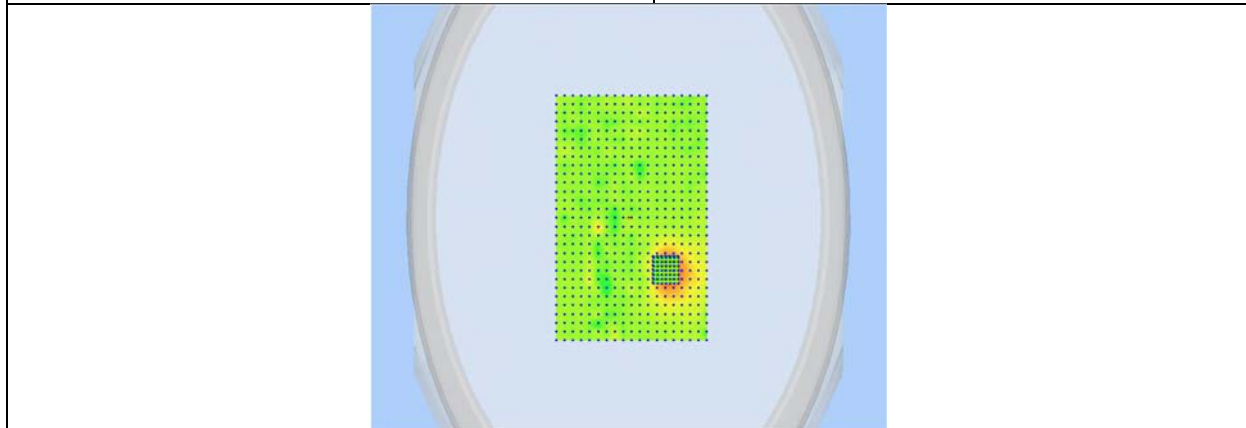


3D View Plot

Test specification:	Plane_Body_High_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5240.000000 (Channel 48)
Relative permittivity (real part)	46.117
Conductivity (S/m)	5.629
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.430
Highest Extrapolated SAR (W/Kg)	0.4119
SAR 1g (W/Kg)	0.1703
Peak SAR Location	44mm(x), -55mm(y), 4mm(z)

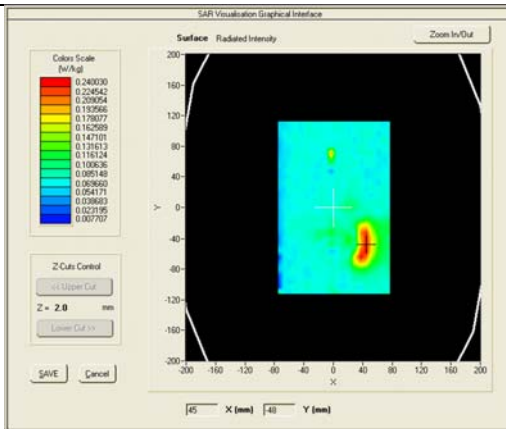

SURFACE SAR

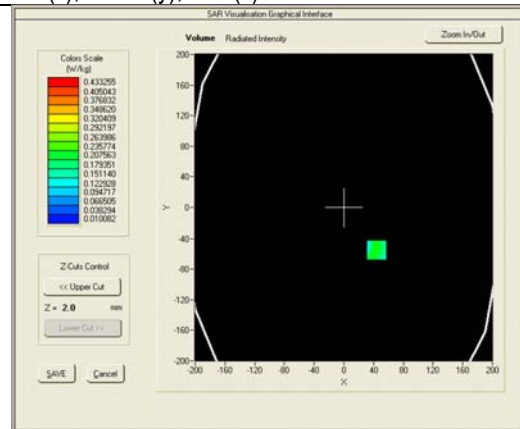


VOLUME SAR

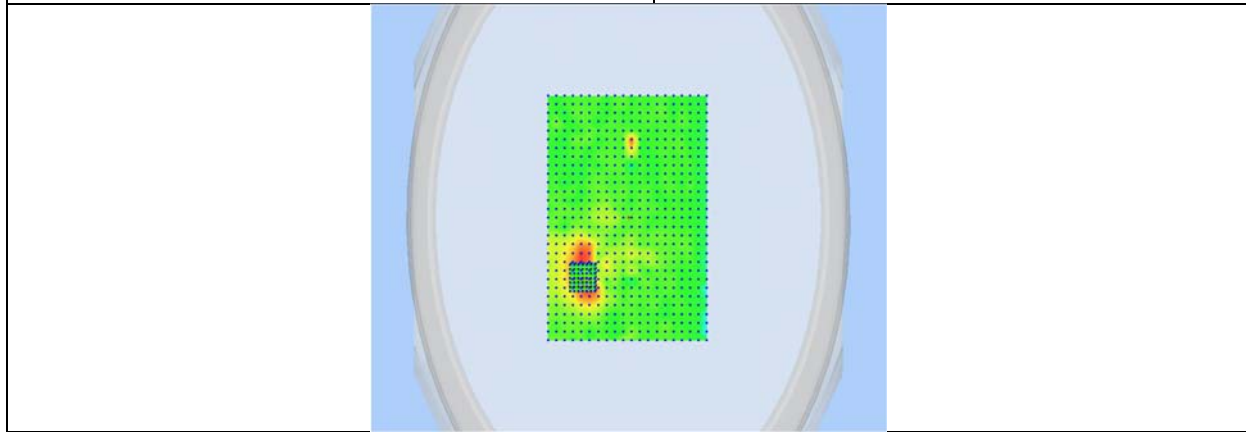


3D View Plot

Test specification:	Plane_Body_High_Right_11a_5mm			Result:	Pass
Environ Conditions:	Temp(oC):	23			
	Humidity (%):	58			
	Atmospheric(mPa):	1009			
Mains Power:	N/A				
Test Date:	11/05/2015				
Tested by:	Arthur Tie				
Remarks:					


Frequency (MHz)	5240.000000 (Channel 48)
Relative permittivity (real part)	46.117
Conductivity (S/m)	5.629
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-4.220
Highest Extrapolated SAR (W/Kg)	1.4017
SAR 1g (W/Kg)	0.4838
Peak SAR Location	-5mm(x), -50mm(y), 4mm(z)

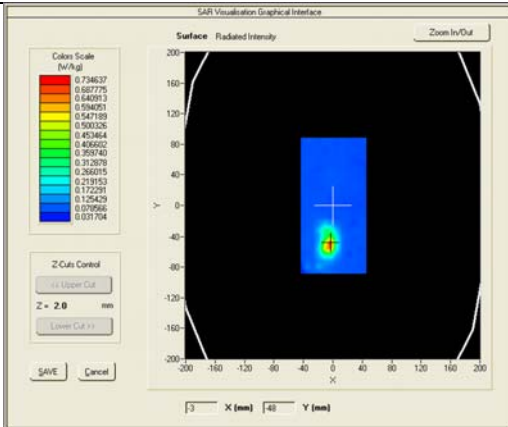

SURFACE SAR

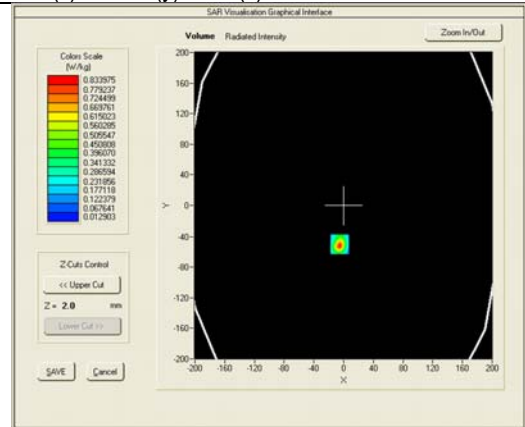


VOLUME SAR

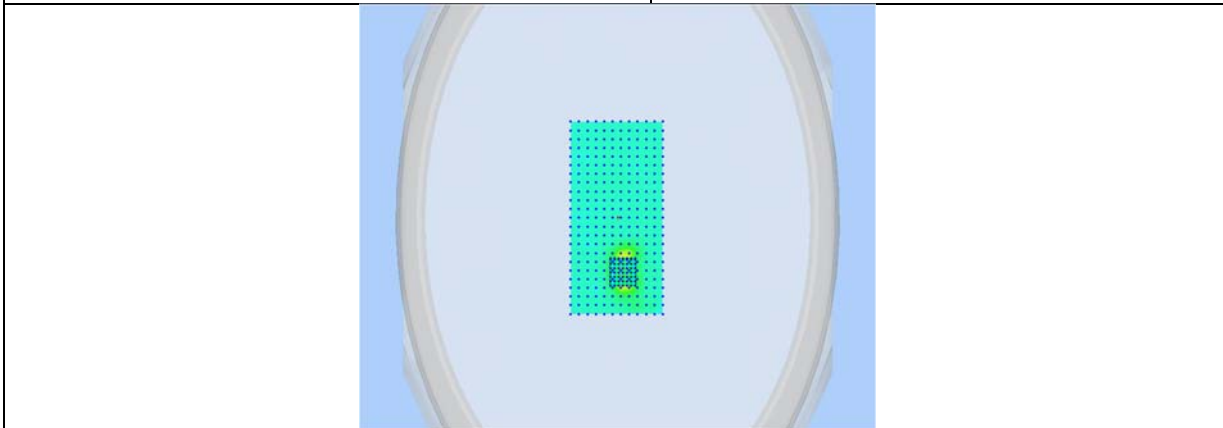


3D View Plot

Test specification:	Plane_Body_Low_LCD_Down_11a_0mm			Result:	Pass
Environ Conditions:	Temp(oC):	23			
	Humidity(%):	58			
	Atmospheric(mPa):	1009			
Mains Power:	N/A				
Test Date:	11/05/2015				
Tested by:	Arthur Tie				
Remarks:					


Frequency (MHz)	5260.000000 (Channel 52)
Relative permittivity (real part)	46.088
Conductivity (S/m)	5.665
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.590
Highest Extrapolated SAR (W/Kg)	0.3868
SAR 1g (W/Kg)	0.1644
Peak SAR Location	39mm(x), -62mm(y), 4mm(z)

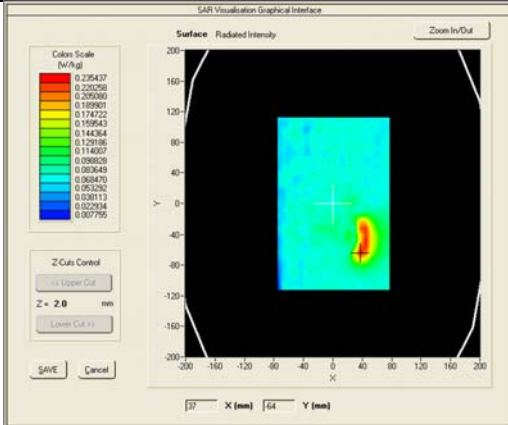

SURFACE SAR

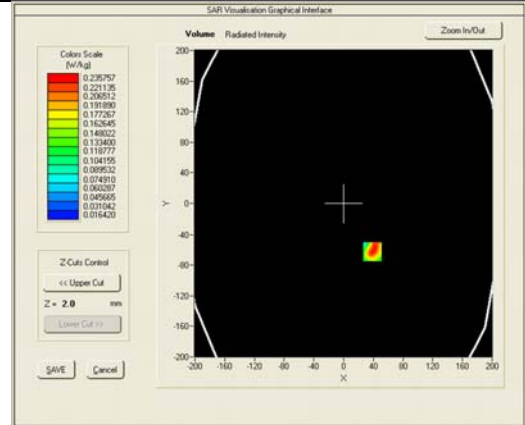


VOLUME SAR

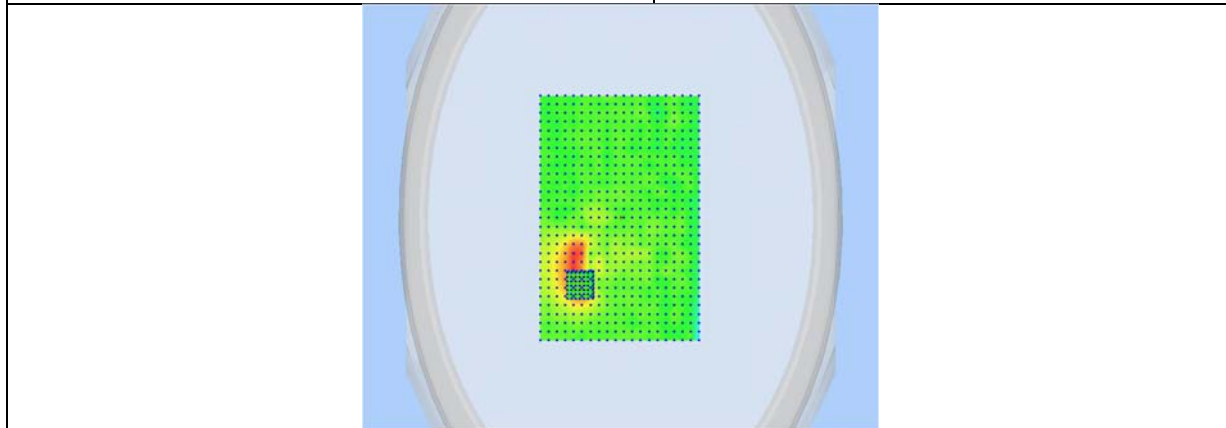


3D View Plot

Test specification:	Plane_Body_Low_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5260.000000 (Channel 52)
Relative permittivity (real part)	46.088
Conductivity (S/m)	5.665
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-4.390
Highest Extrapolated SAR (W/Kg)	1.3667
SAR 1g (W/Kg)	0.4680
Peak SAR Location	-5mm(x), -50mm(y), 4mm(z)

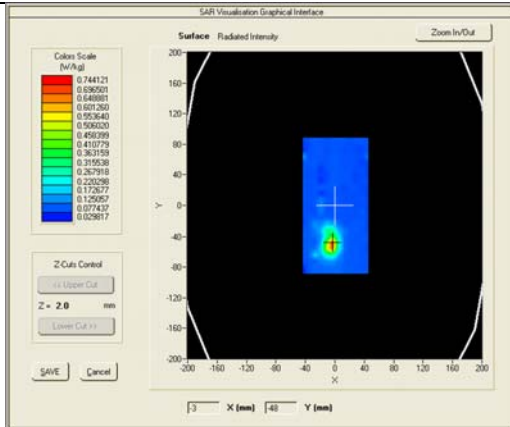

SURFACE SAR

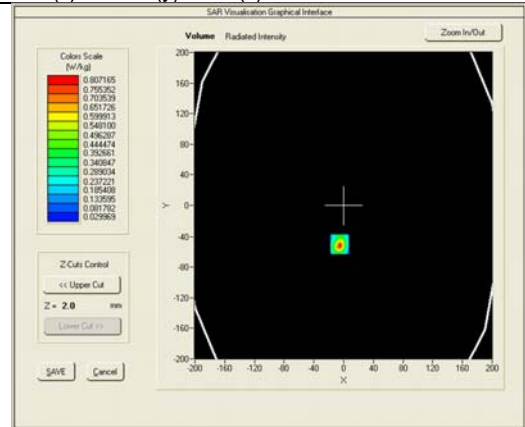


VOLUME SAR

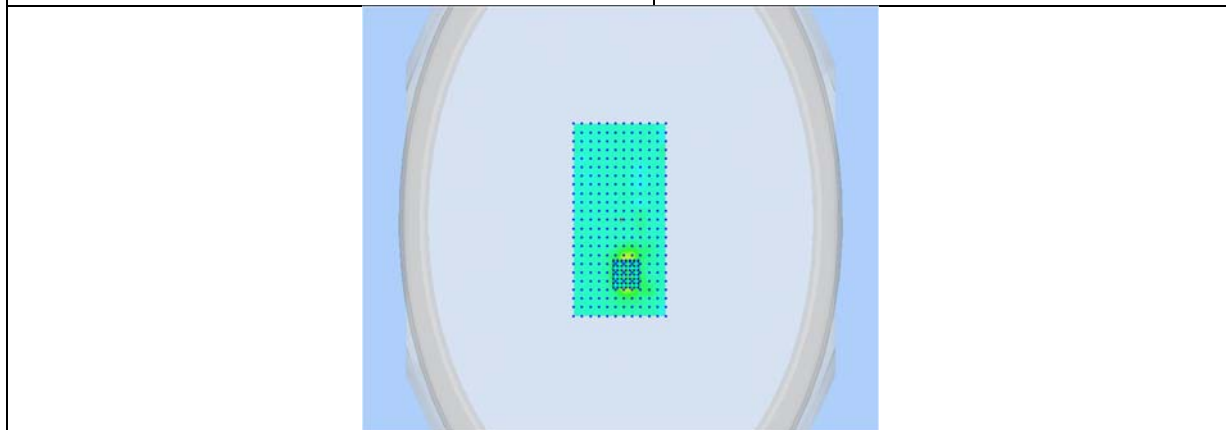


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5300.000000 (Channel 60)
Relative permittivity (real part)	46.029
Conductivity (S/m)	5.736
Transmission Duty Factor	1.0
Probe SN	2715_EPG0259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	1.830
Highest Extrapolated SAR (W/Kg)	0.4527
SAR 1g (W/Kg)	0.1952
Peak SAR Location	38mm(x), -63mm(y), 4mm(z)

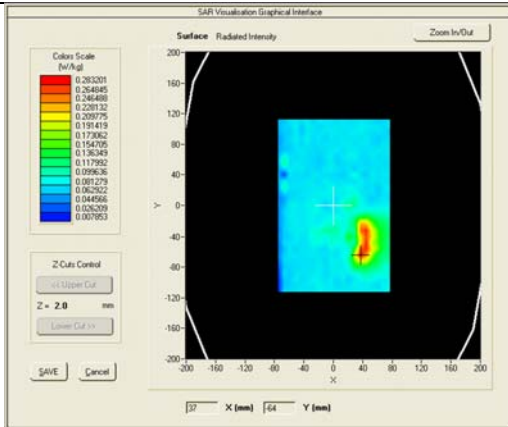

SURFACE SAR

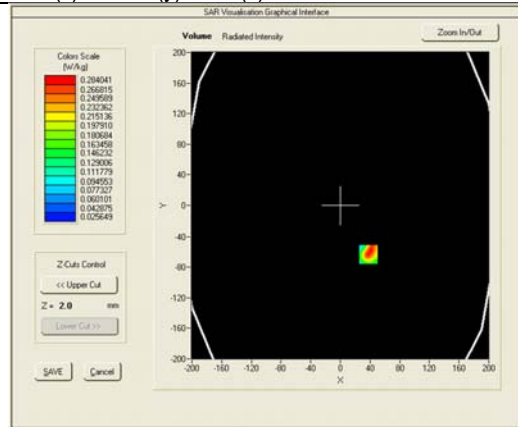


VOLUME SAR

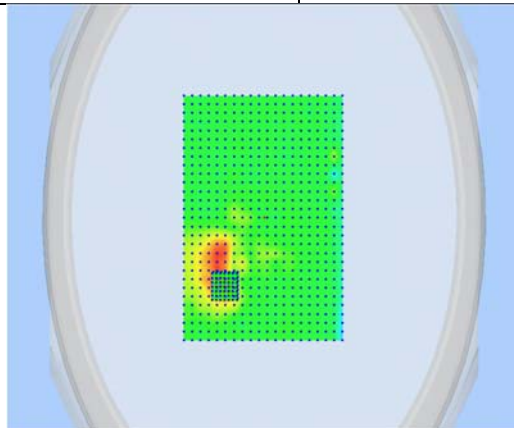


3D View Plot

Test specification:	Plane_Body_Middle_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5300.000000 (Channel 60)
Relative permittivity (real part)	46.029
Conductivity (S/m)	5.736
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	1.160
Highest Extrapolated SAR (W/Kg)	1.8686
SAR 1g (W/Kg)	0.6218
Peak SAR Location	-5mm(x), -50mm(y), 4mm(z)

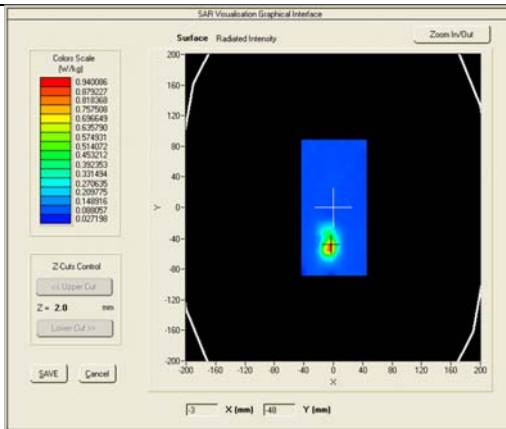

SURFACE SAR

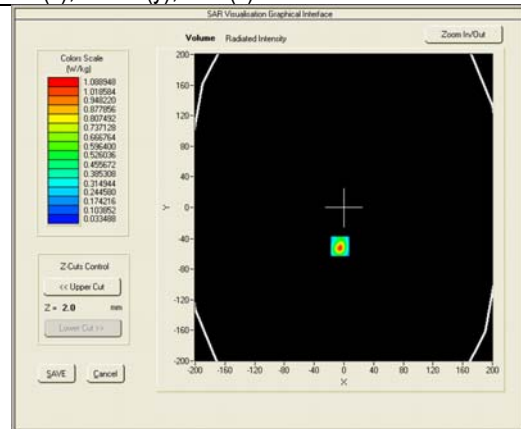


VOLUME SAR

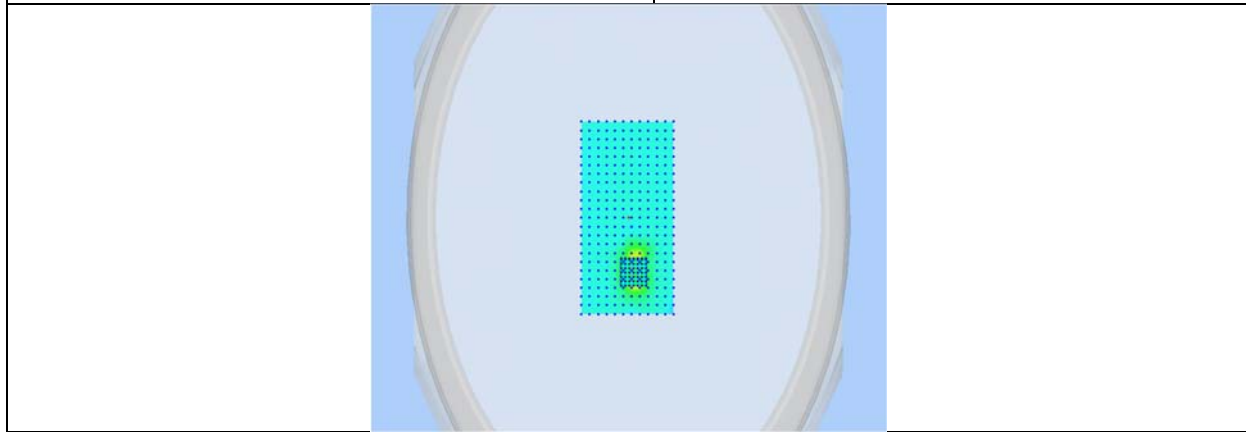


3D View Plot

Test specification:	Plane_Body_Middle_LCD_UP_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5300.000000 (Channel 60)
Relative permittivity (real part)	46.029
Conductivity (S/m)	5.736
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	1.310
Highest Extrapolated SAR (W/Kg)	0.4099
SAR 1g (W/Kg)	0.1798
Peak SAR Location	-36mm(x), -49mm(y), 4mm(z)

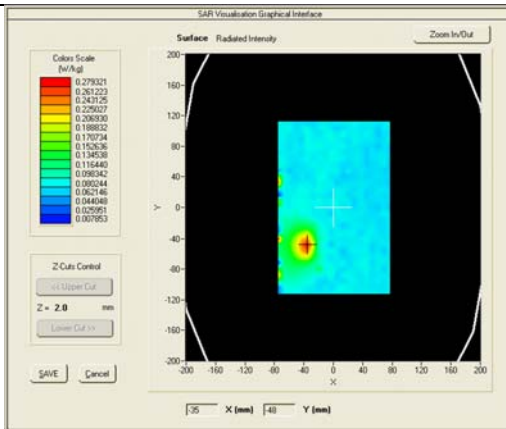

SURFACE SAR

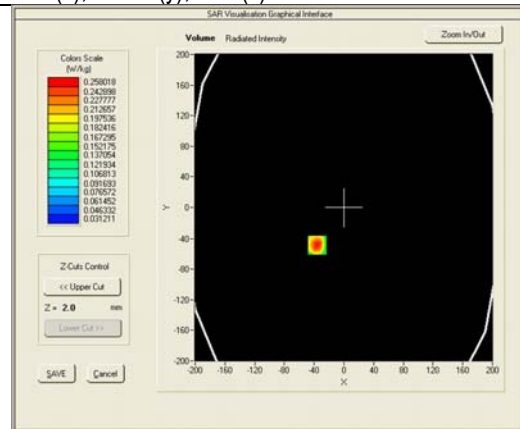


VOLUME SAR

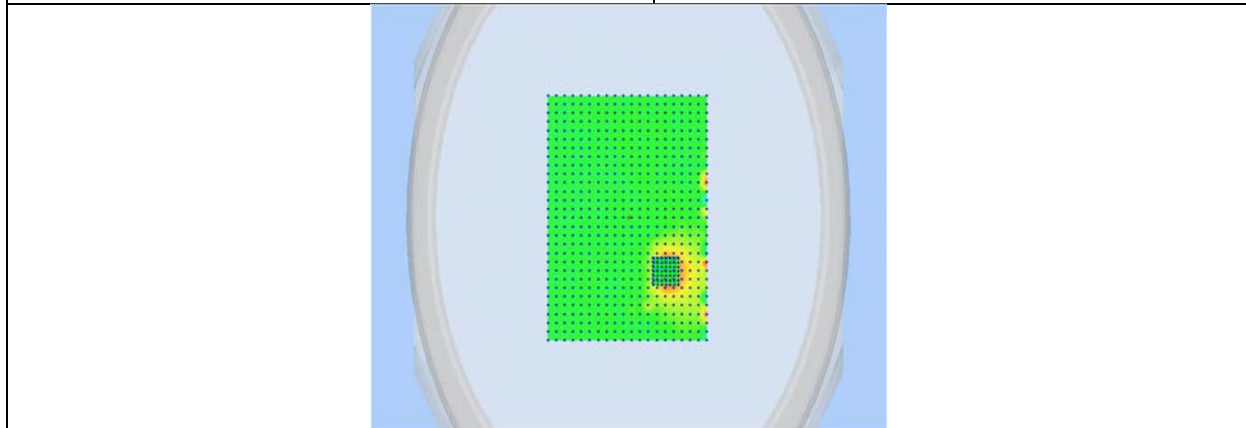


3D View Plot

Test specification:	Plane_Body_High_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5320.000000 (Channel 64)
Relative permittivity (real part)	45.965
Conductivity (S/m)	5.766
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.63
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.000
Highest Extrapolated SAR (W/Kg)	0.4699
SAR 1g (W/Kg)	0.2083
Peak SAR Location	39mm(x), -62mm(y), 4mm(z)

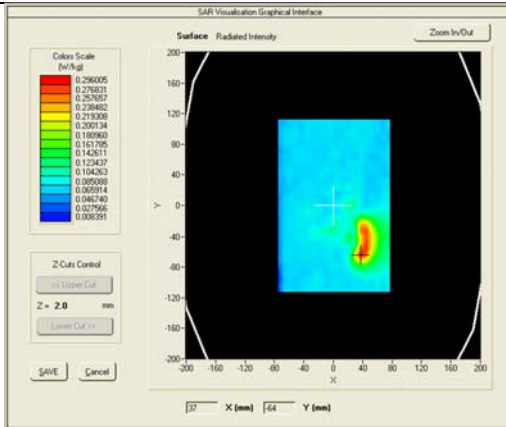

SURFACE SAR

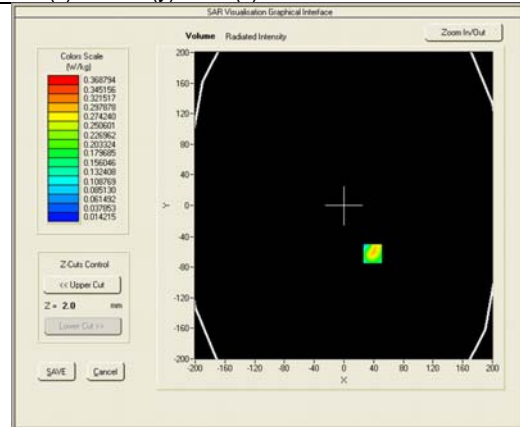


VOLUME SAR

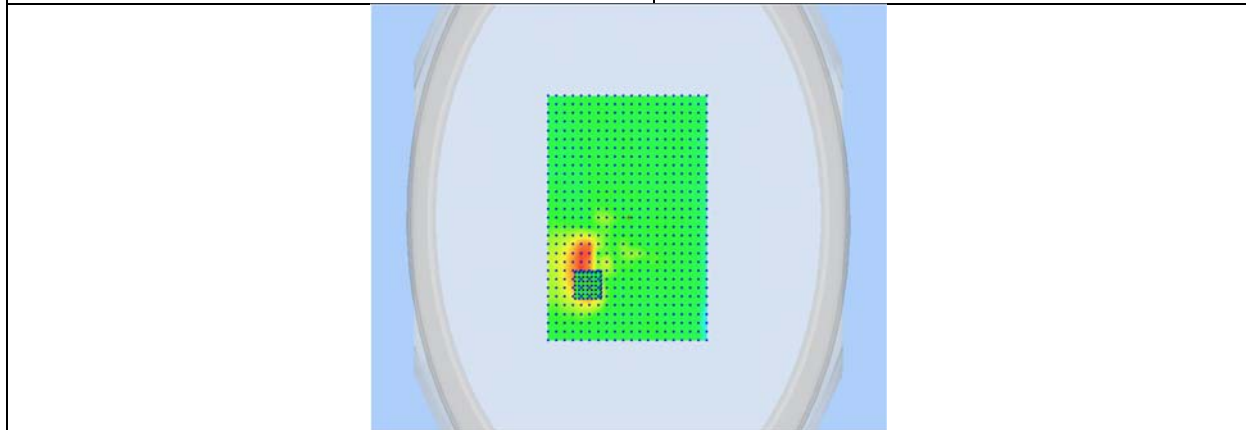


3D View Plot

Test specification:	Plane_Body_High_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5320.000000 (Channel 64)
Relative permittivity (real part)	45.965
Conductivity (S/m)	5.766
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.63
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.410
Highest Extrapolated SAR (W/Kg)	2.2737
SAR 1g (W/Kg)	0.6215
Peak SAR Location	-5mm(x), -51mm(y), 4mm(z)

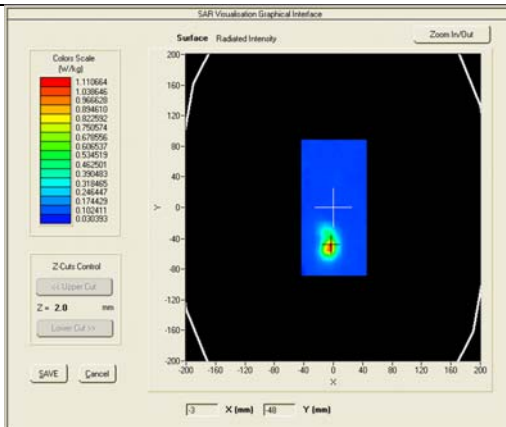

SURFACE SAR

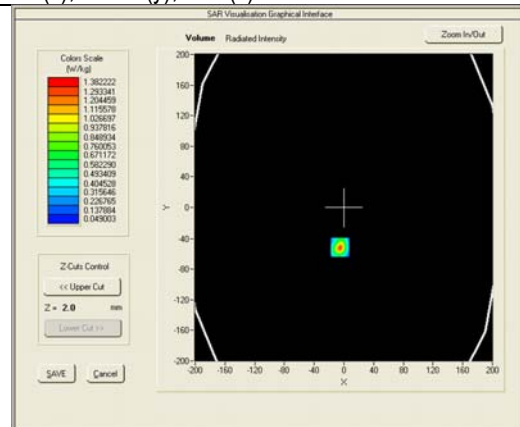


VOLUME SAR

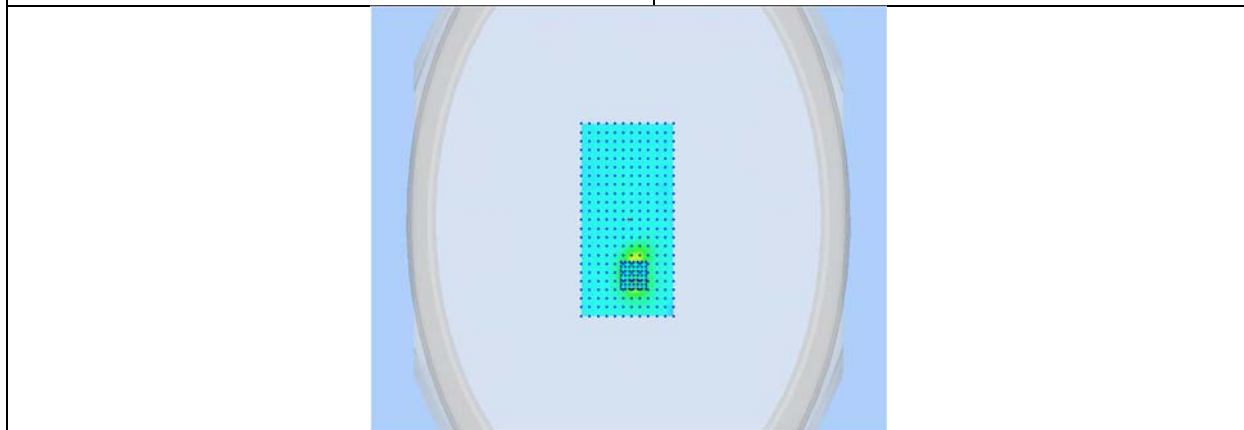


3D View Plot

Test specification:	Plane_Body_Low_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5500.000000 (Channel 100)
Relative permittivity (real part)	45.155
Conductivity (S/m)	6.036
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.63
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-3.680
Highest Extrapolated SAR (W/Kg)	0.4767
SAR 1g (W/Kg)	0.1905
Peak SAR Location	38mm(x), -63mm(y), 4mm(z)

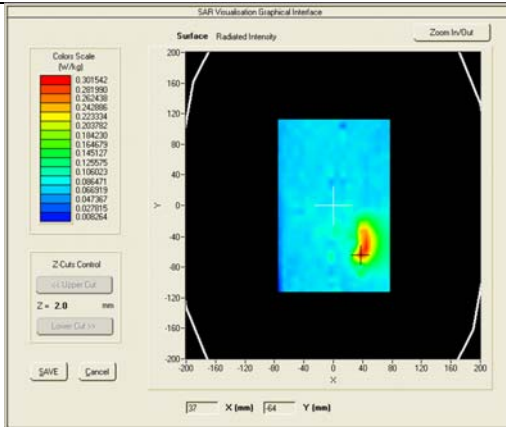

SURFACE SAR

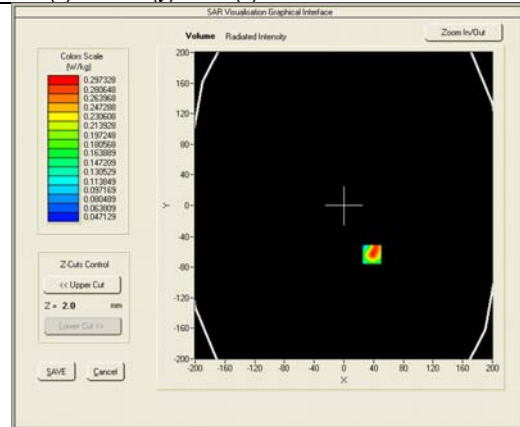


VOLUME SAR

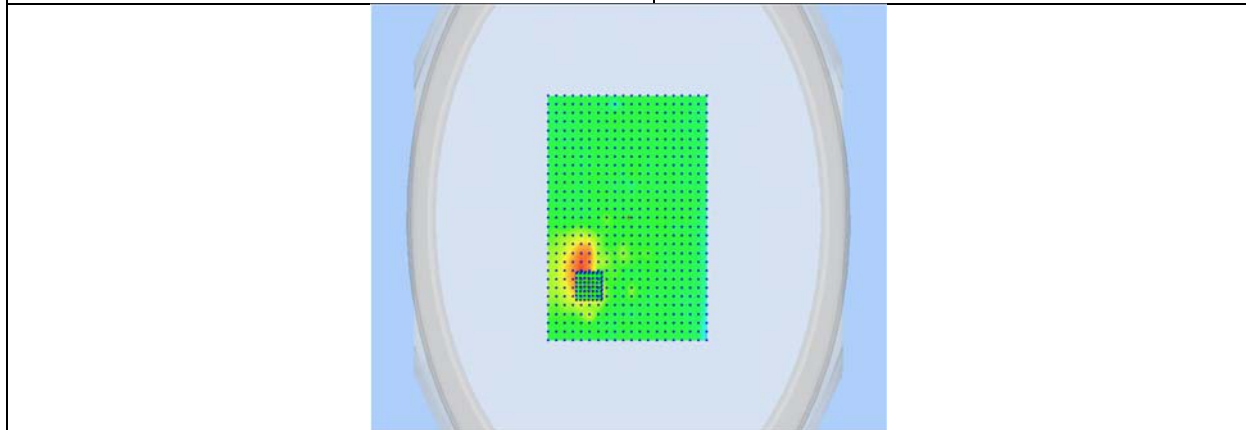


3D View Plot

Test specification:	Plane_Body_Low_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5500.000000 (Channel 100)
Relative permittivity (real part)	45.155
Conductivity (S/m)	6.036
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.63
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.800
Highest Extrapolated SAR (W/Kg)	2.3615
SAR 1g (W/Kg)	0.5904
Peak SAR Location	-5mm(x), -54mm(y), 4mm(z)

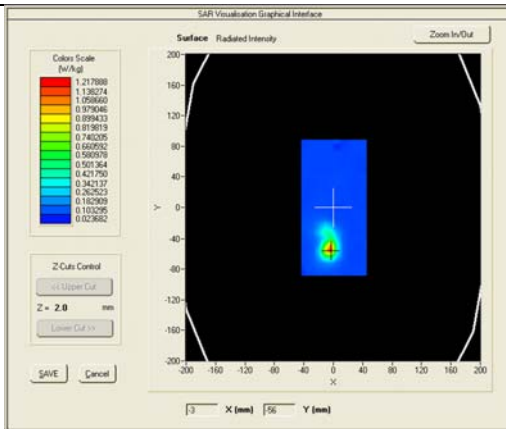

SURFACE SAR

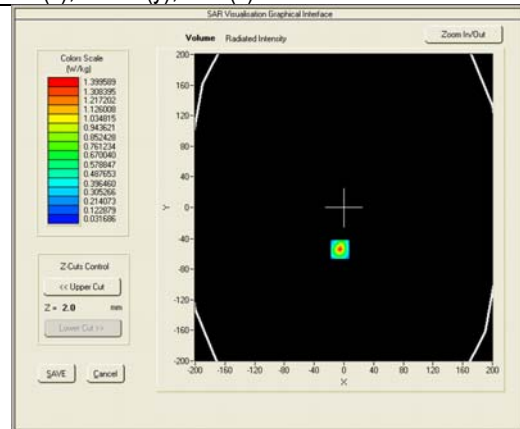


VOLUME SAR

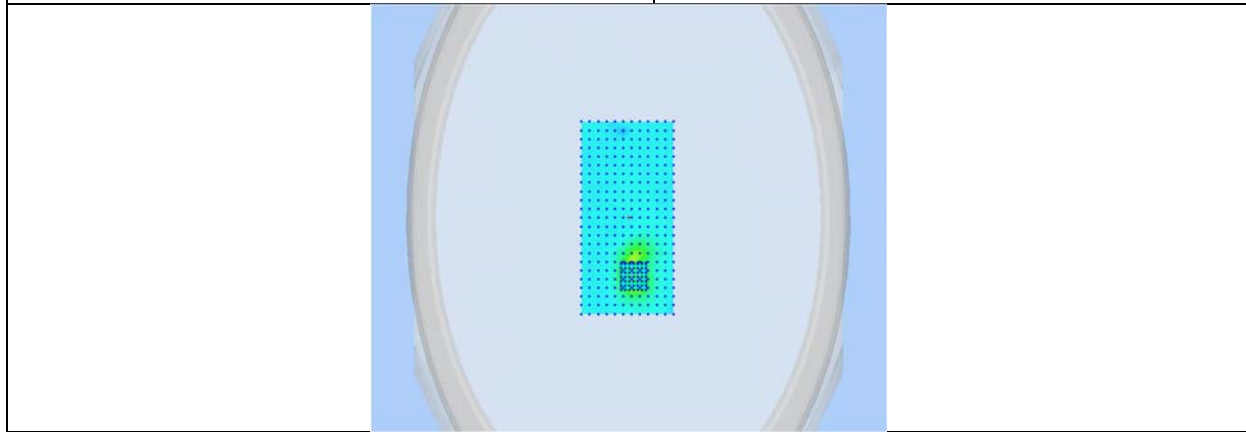


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5560.000000 (Channel 112)
Relative permittivity (real part)	44.971
Conductivity (S/m)	6.173
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.830
Highest Extrapolated SAR (W/Kg)	0.4927
SAR 1g (W/Kg)	0.2112
Peak SAR Location	38mm(x), -64mm(y), 4mm(z)

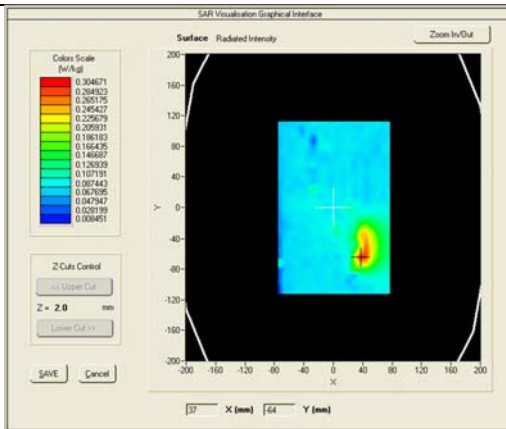

SURFACE SAR

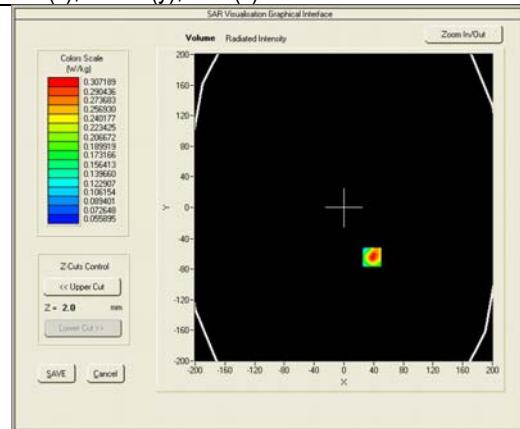


VOLUME SAR

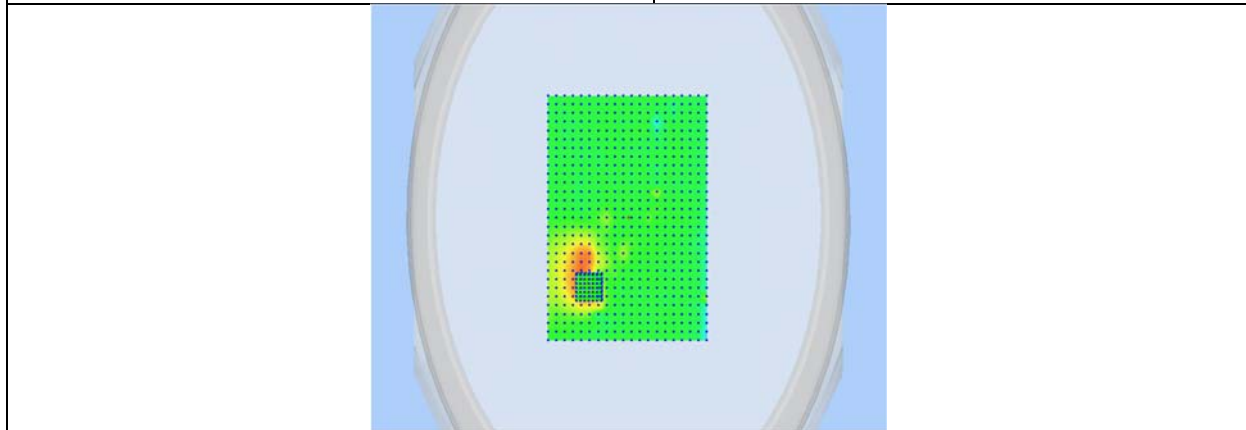


3D View Plot

Test specification:	Plane_Body_Middle_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5560.000000 (Channel 112)
Relative permittivity (real part)	44.971
Conductivity (S/m)	6.173
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.660
Highest Extrapolated SAR (W/Kg)	2.2189
SAR 1g (W/Kg)	0.7013
Peak SAR Location	-5mm(x), -55mm(y), 4mm(z)

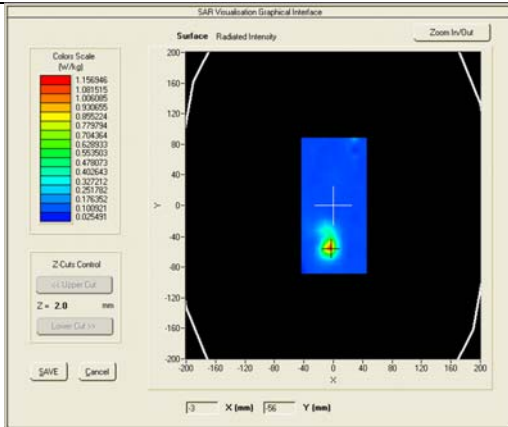

SURFACE SAR

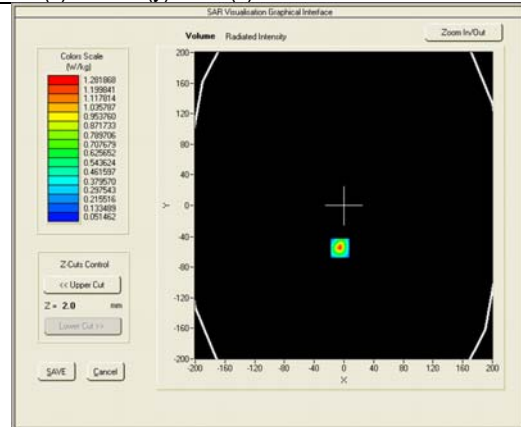


VOLUME SAR

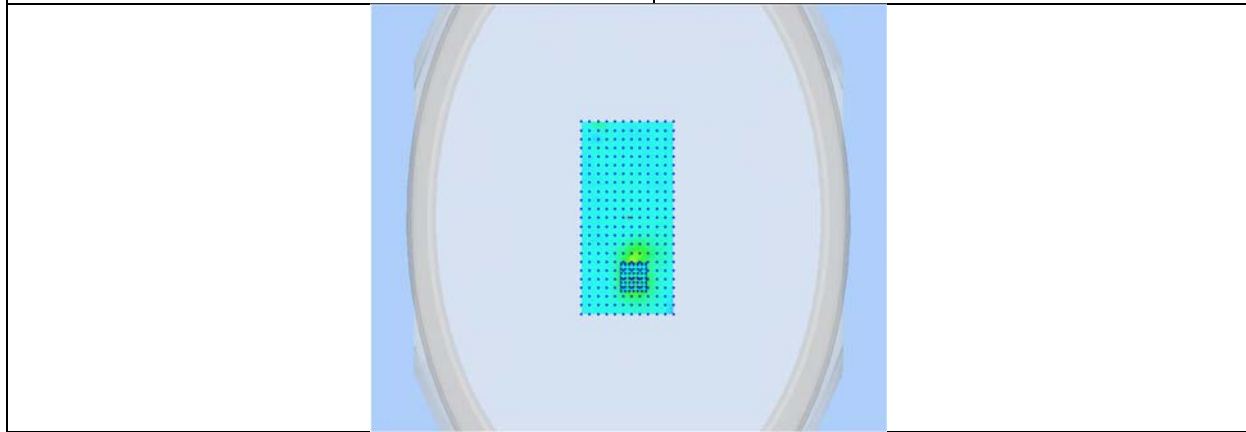


3D View Plot

Test specification:	Plane_Body_Middle_LCD_UP_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5560.000000 (Channel 112)
Relative permittivity (real part)	44.971
Conductivity (S/m)	6.173
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-2.320
Highest Extrapolated SAR (W/Kg)	0.3923
SAR 1g (W/Kg)	0.1741
Peak SAR Location	-36mm(x),-53mm(y),4mm(z)

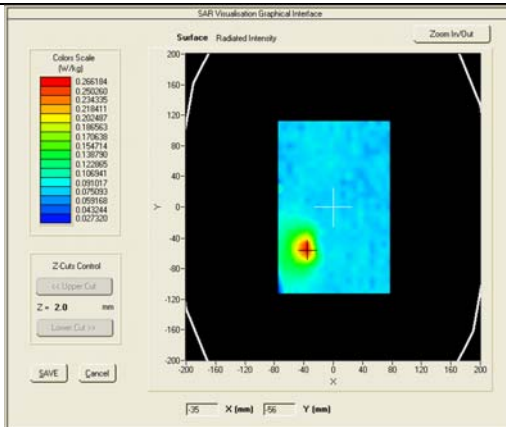

SURFACE SAR

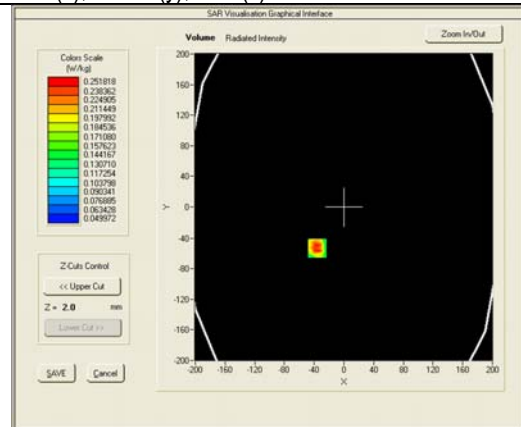


VOLUME SAR

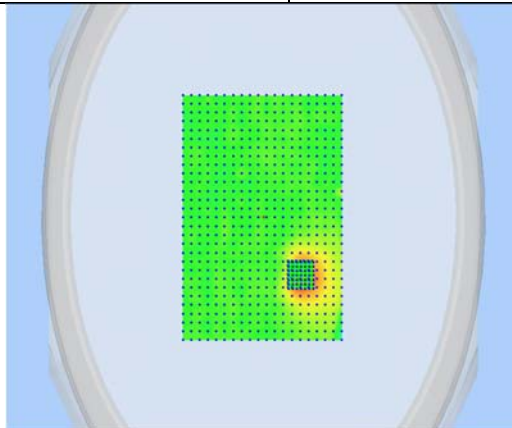


3D View Plot

Test specification:	Plane_Body_High_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5700.000000 (Channel 140)
Relative permittivity (real part)	44.662
Conductivity (S/m)	6.427
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-3.290
Highest Extrapolated SAR (W/Kg)	0.5849
SAR 1g (W/Kg)	0.2382
Peak SAR Location	38mm(x), -65mm(y), 4mm(z)

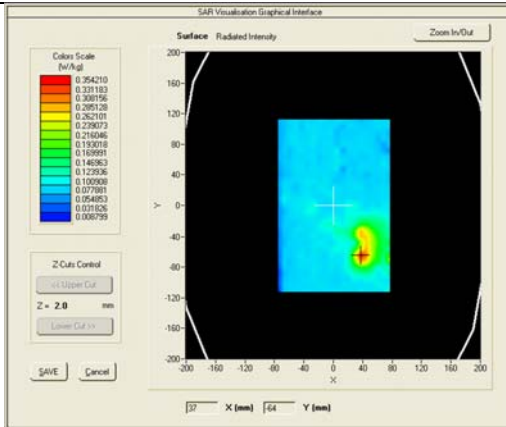

SURFACE SAR

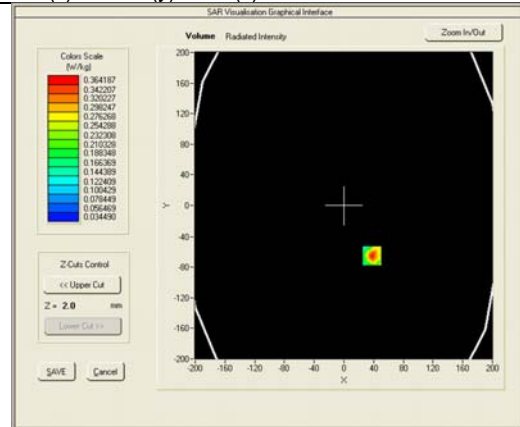


VOLUME SAR

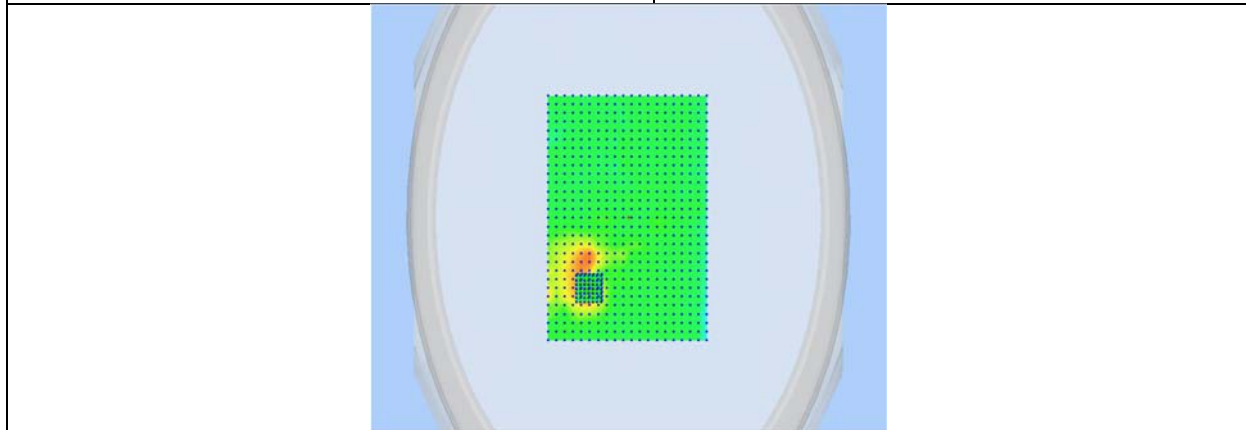


3D View Plot

Test specification:	Plane_Body_High_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5700.000000 (Channel 140)
Relative permittivity (real part)	44.662
Conductivity (S/m)	6.427
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-4.110
Highest Extrapolated SAR (W/Kg)	2.2829
SAR 1g (W/Kg)	0.7184
Peak SAR Location	-5mm(x), -55mm(y), 4mm(z)

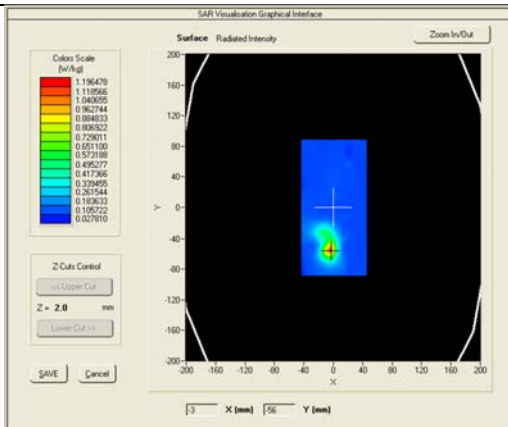

SURFACE SAR

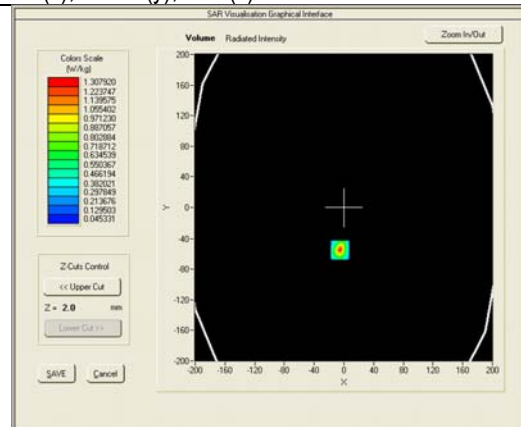


VOLUME SAR

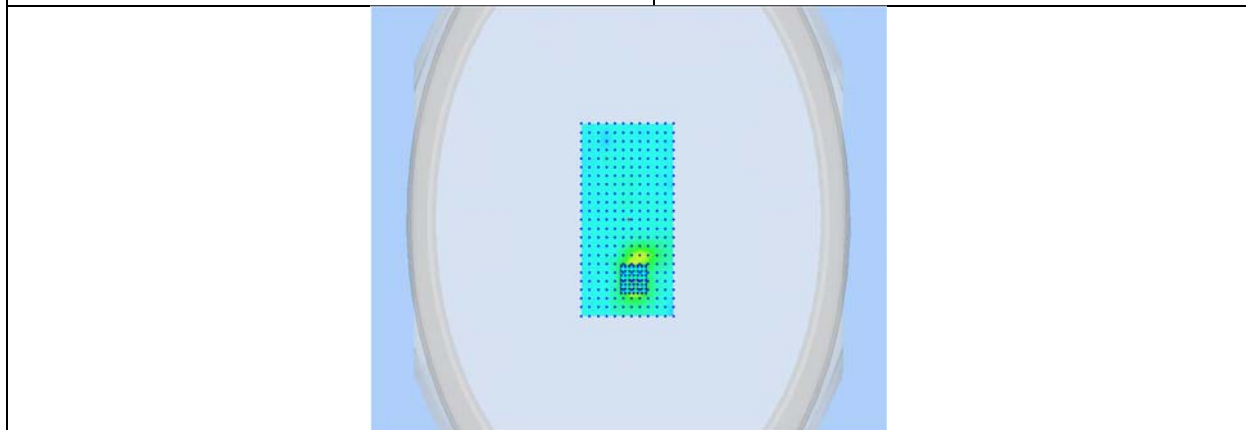


3D View Plot

Test specification:	Plane_Body_High_LCD_Down_11a_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5785.000000 (Channel 157)
Relative permittivity (real part)	48.00
Conductivity (S/m)	6.24
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.65
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.98
Highest Extrapolated SAR (W/Kg)	0.7123
SAR 1g (W/Kg)	0.2247
Peak SAR Location	41mm(x), -35mm(y), 4mm(z)

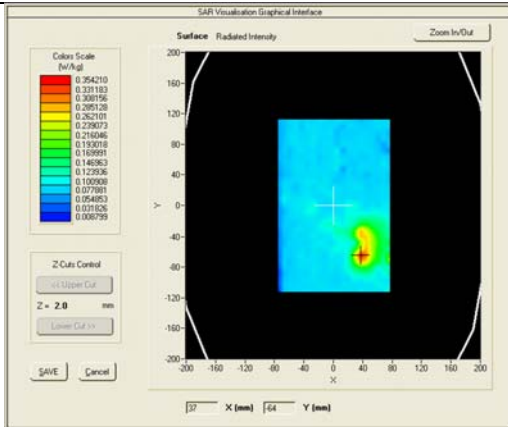

SURFACE SAR

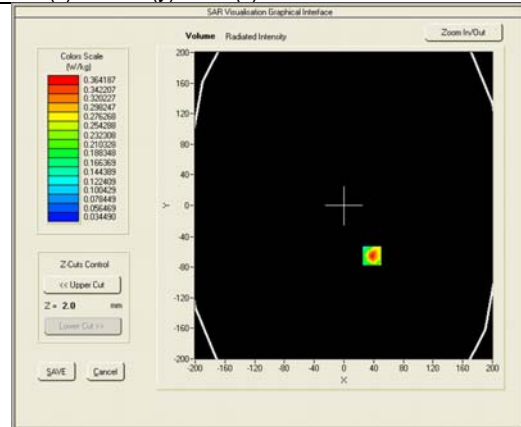


VOLUME SAR

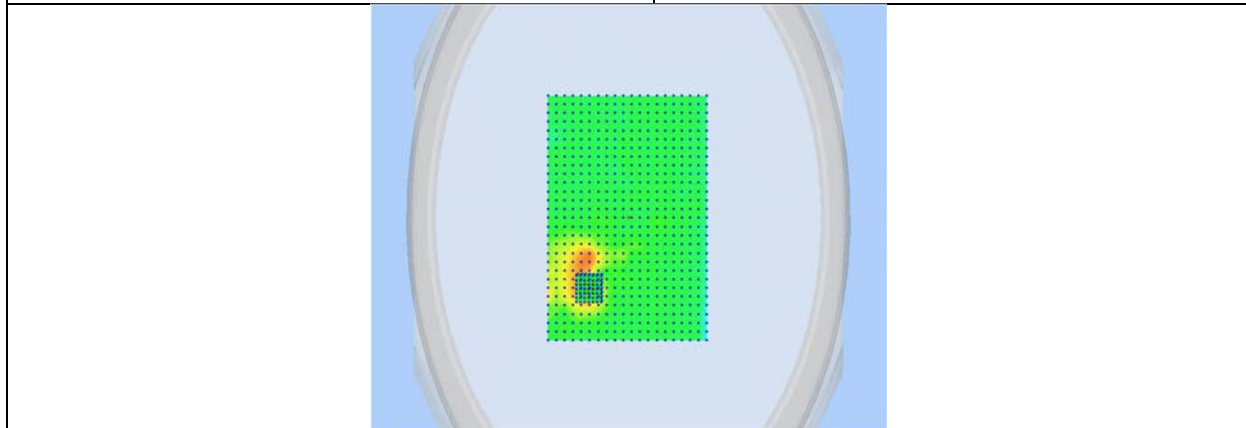

3D View Plot


Test specification:	Plane_Body_High_Right_11a_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			

Frequency (MHz)	5785.000000 (Channel 157)
Relative permittivity (real part)	48.00
Conductivity (S/m)	6.24
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.65
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-4.610
Highest Extrapolated SAR (W/Kg)	2.1225
SAR 1g (W/Kg)	0.615
Peak SAR Location	-15mm(x),-45mm(y),4mm(z)

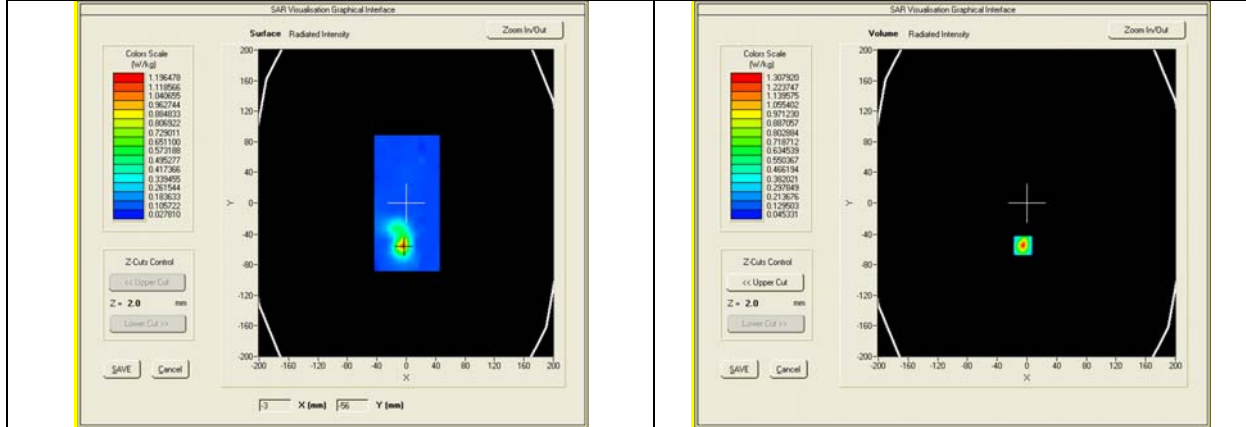

SURFACE SAR


VOLUME SAR

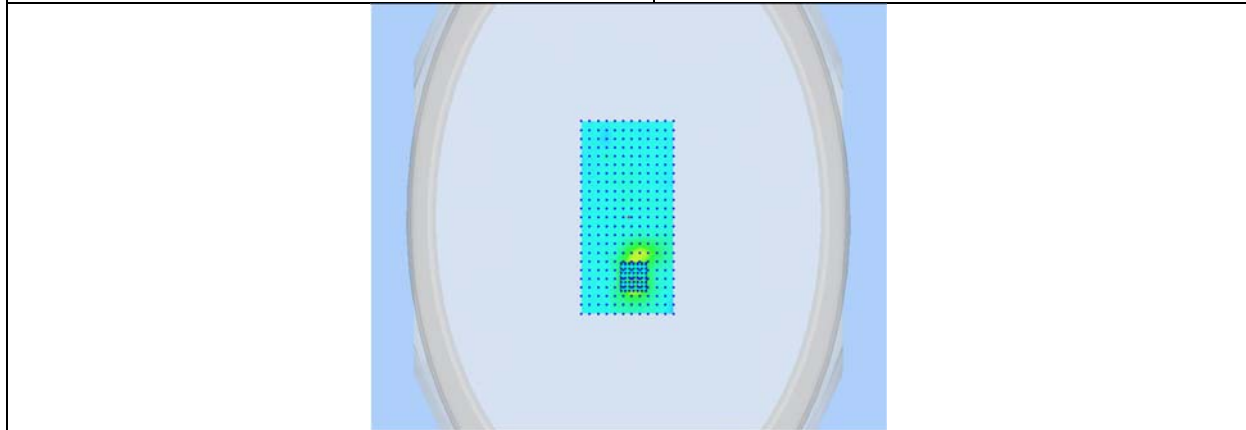


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n20_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5200.000000 (Channel 40)
Relative permittivity (real part)	46.176
Conductivity (S/m)	5.559
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	2.940
Highest Extrapolated SAR (W/Kg)	0.2560
SAR 1g (W/Kg)	0.1229
Peak SAR Location	45mm(x),-47mm(y),4mm(z)

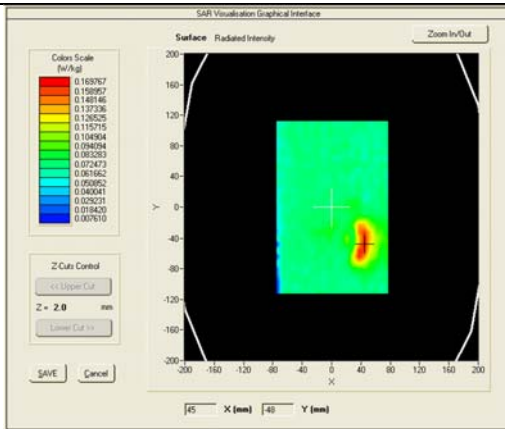

SURFACE SAR

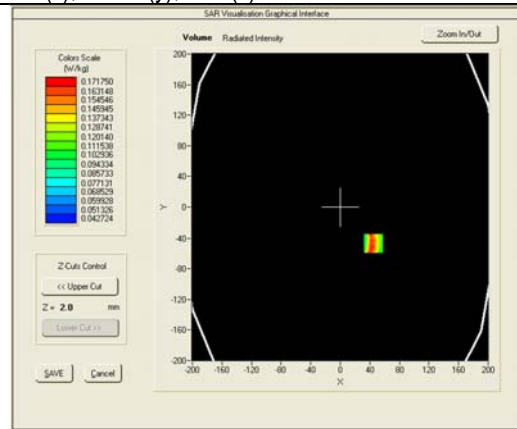


VOLUME SAR

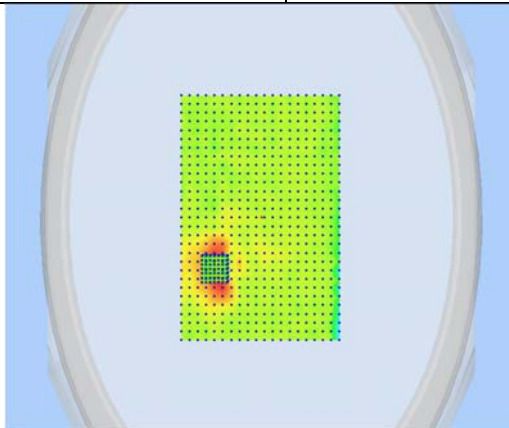


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n-20_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5200.000000 (Channel 40)
Relative permittivity (real part)	46.176
Conductivity (S/m)	5.559
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-3.250
Highest Extrapolated SAR (W/Kg)	0.8618
SAR 1g (W/Kg)	0.3131
Peak SAR Location	-5mm(x),-49mm(y),4mm(z)

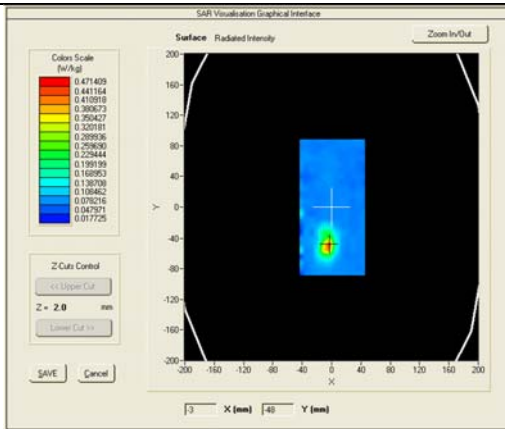

SURFACE SAR

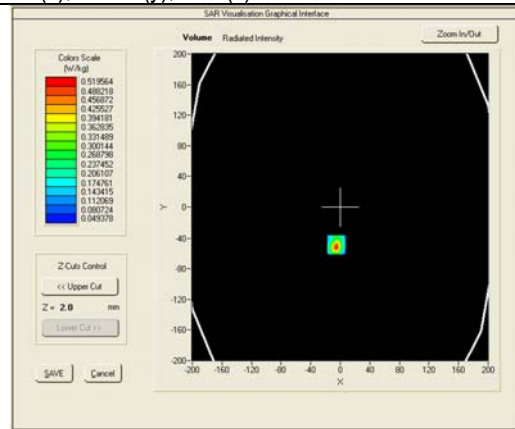


VOLUME SAR

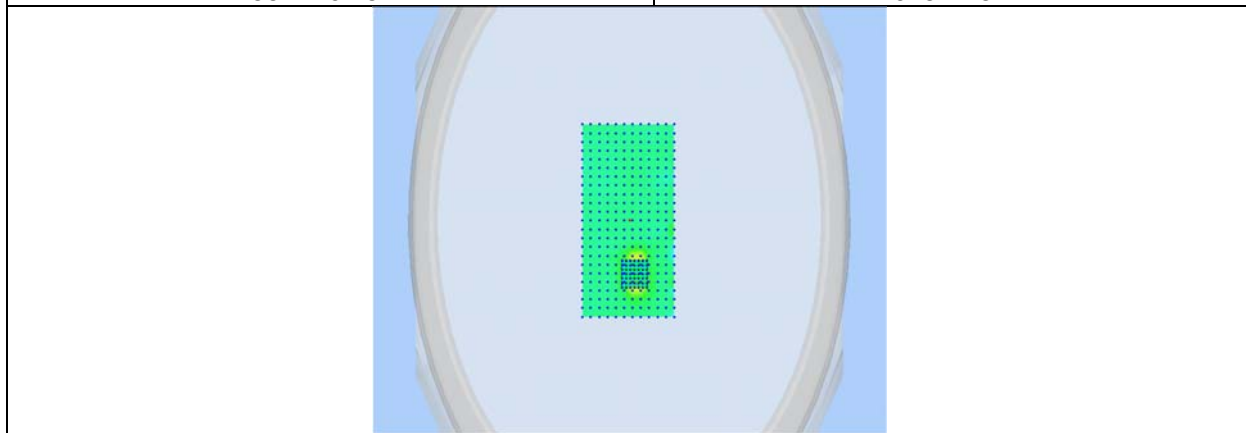


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n20_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		


Remarks:	
Frequency (MHz)	5300.000000 (Channel 60)
Relative permittivity (real part)	46.029
Conductivity (S/m)	5.736
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.190
Highest Extrapolated SAR (W/Kg)	0.3737
SAR 1g (W/Kg)	0.1682
Peak SAR Location	39mm(x), -62mm(y), 4mm(z)

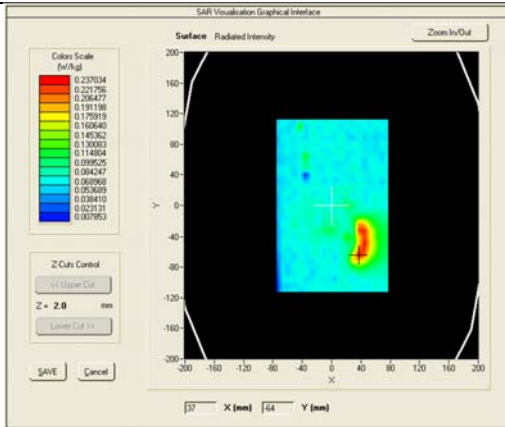

SURFACE SAR

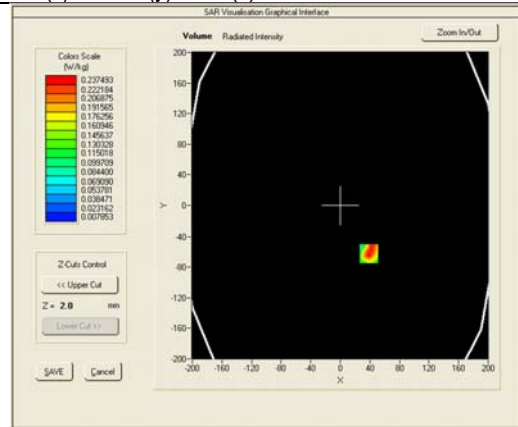


VOLUME SAR

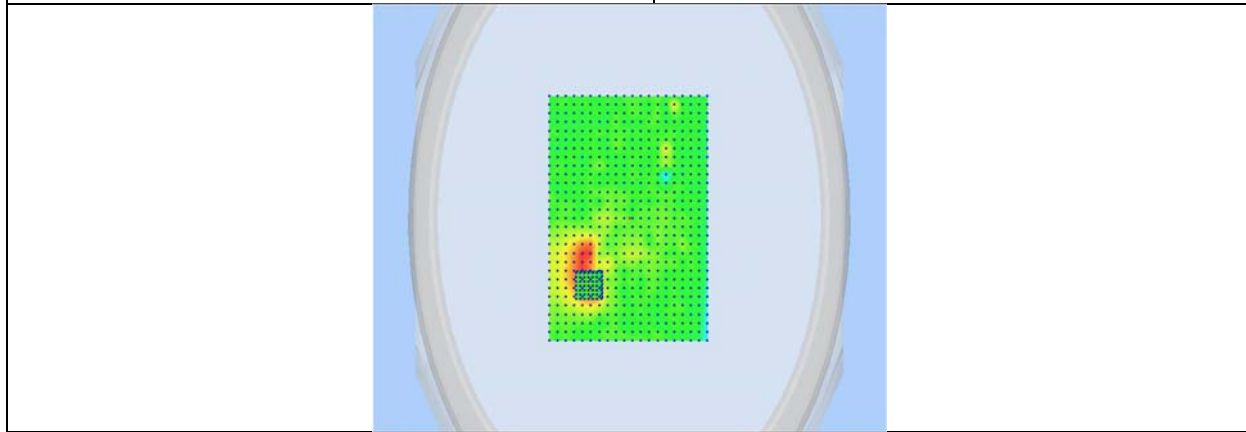


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n20_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5300.000000 (Channel 60)
Relative permittivity (real part)	46.029
Conductivity (S/m)	5.736
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.39
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.450
Highest Extrapolated SAR (W/Kg)	1.6350
SAR 1g (W/Kg)	0.5517
Peak SAR Location	-5mm(x), -50mm(y), 4mm(z)

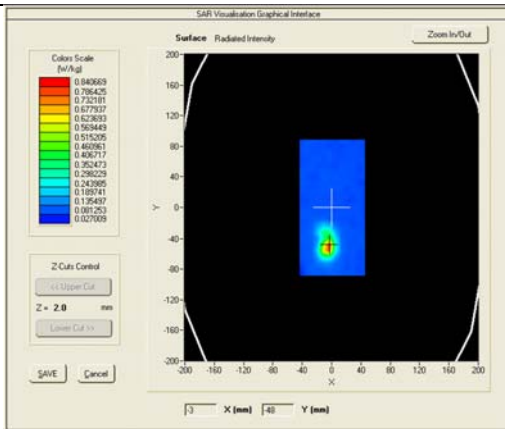

SURFACE SAR

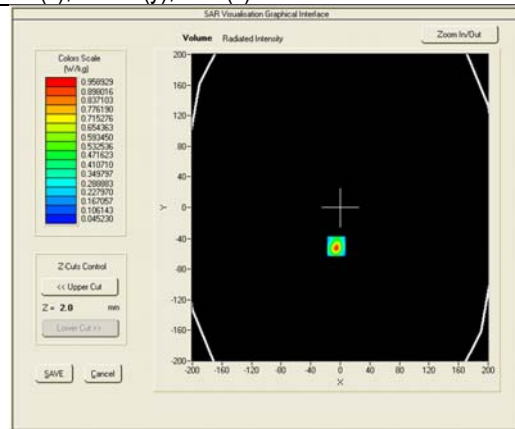


VOLUME SAR

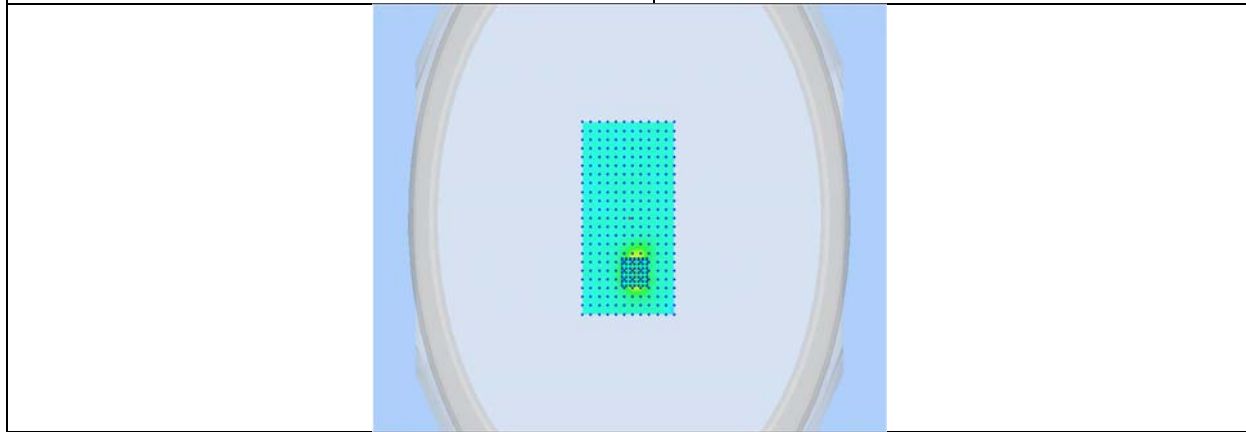


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n20_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5560.000000 (Channel 112)
Relative permittivity (real part)	44.971
Conductivity (S/m)	6.173
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	0.080
Highest Extrapolated SAR (W/Kg)	0.4677
SAR 1g (W/Kg)	0.1988
Peak SAR Location	38mm(x), -64mm(y), 4mm(z)

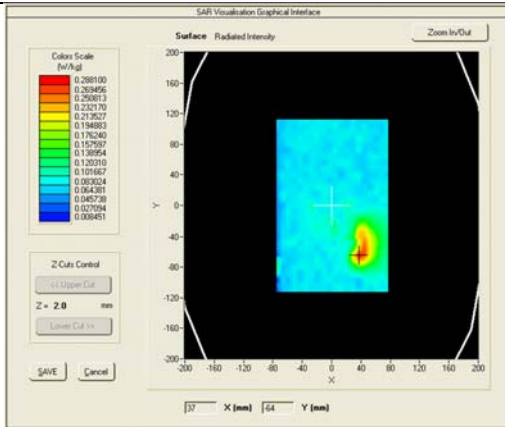

SURFACE SAR

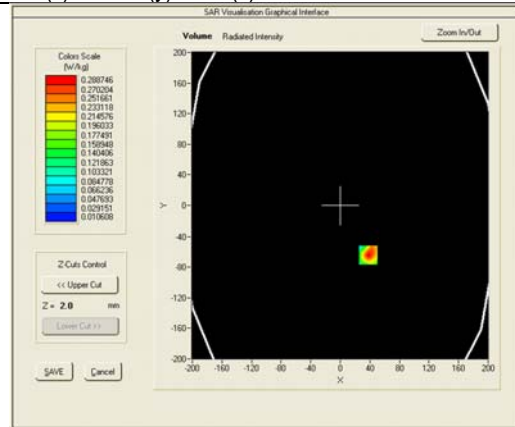


VOLUME SAR

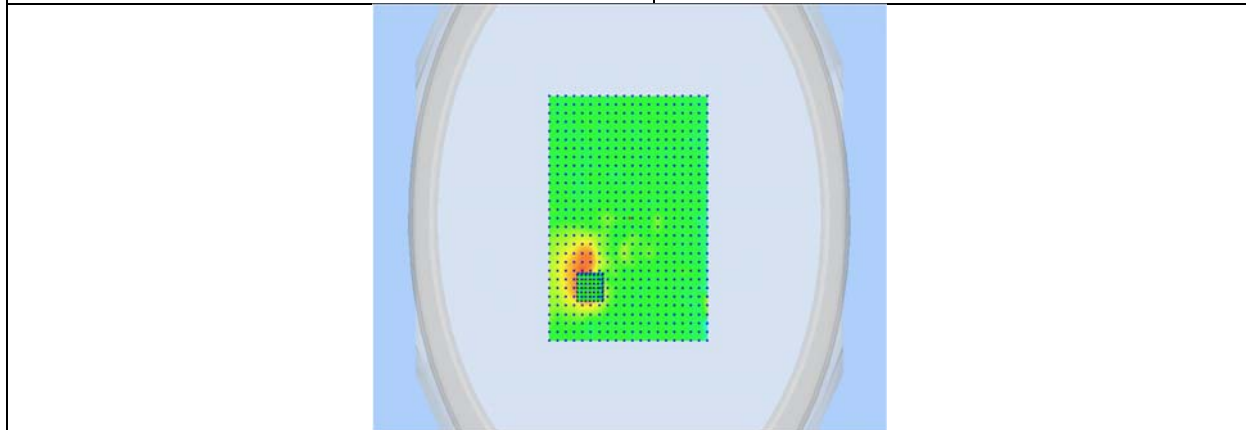


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n20_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5560.000000 (Channel 112)
Relative permittivity (real part)	44.971
Conductivity (S/m)	6.173
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.250
Highest Extrapolated SAR (W/Kg)	2.1409
SAR 1g (W/Kg)	0.6712
Peak SAR Location	-5mm(x), -55mm(y), 4mm(z)

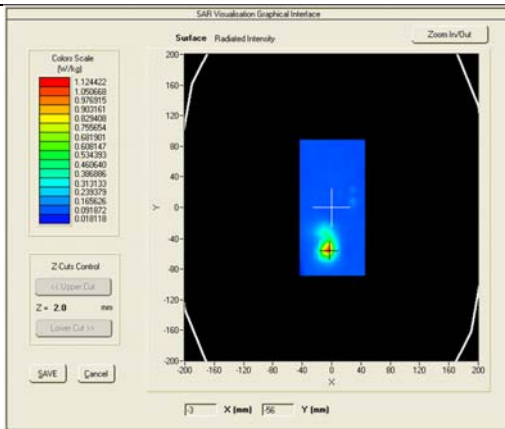

SURFACE SAR

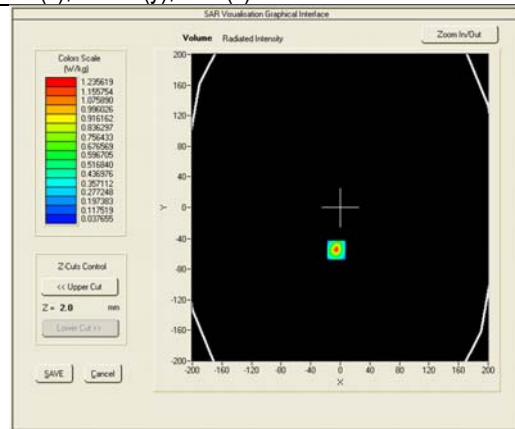


VOLUME SAR

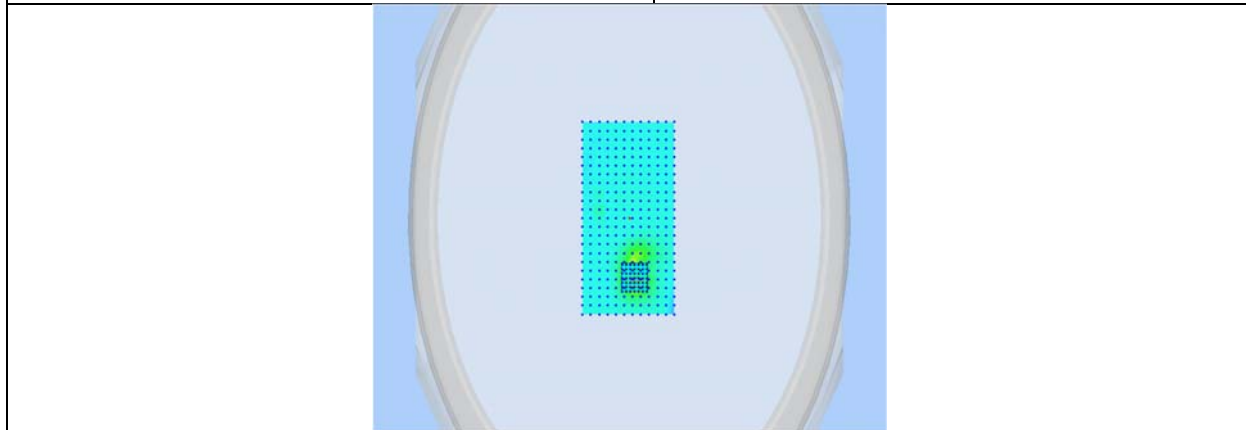


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n20_0mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5785.000000 (Channel 157)
Relative permittivity (real part)	48.00
Conductivity (S/m)	6.24
Transmission Duty Factor	1.0
Probe SN	2715_EPG0259
Conversion Factor (dB)	2.65
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	0.080
Highest Extrapolated SAR (W/Kg)	0.5677
SAR 1g (W/Kg)	0.1672
Peak SAR Location	38mm(x), -64mm(y), 4mm(z)

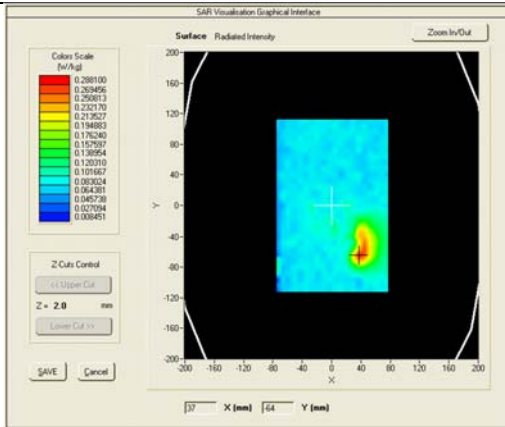

SURFACE SAR

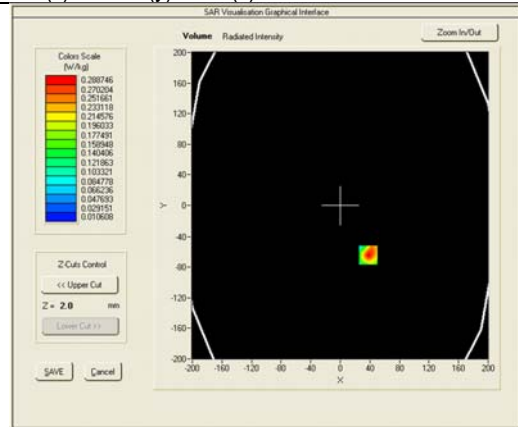


VOLUME SAR

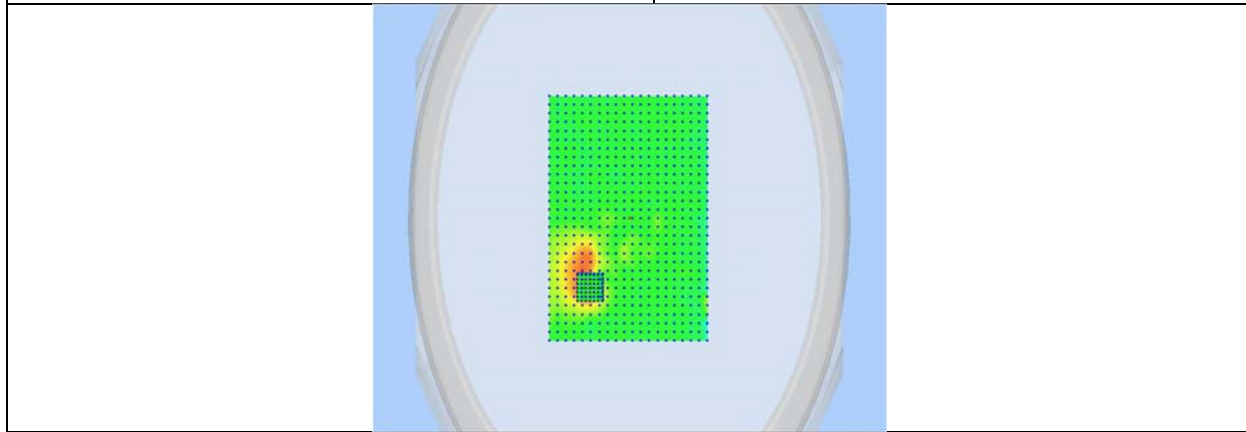


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n20_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity (%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5785.000000 (Channel 157)
Relative permittivity (real part)	48.00
Conductivity (S/m)	6.24
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.65
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.250
Highest Extrapolated SAR (W/Kg)	2.257
SAR 1g (W/Kg)	0.615
Peak SAR Location	-5mm(x),-55mm(y),4mm(z)

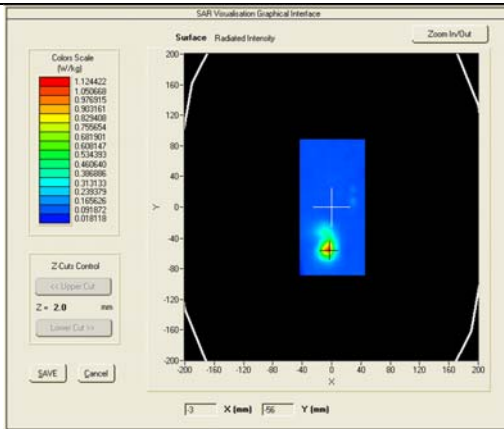

SURFACE SAR

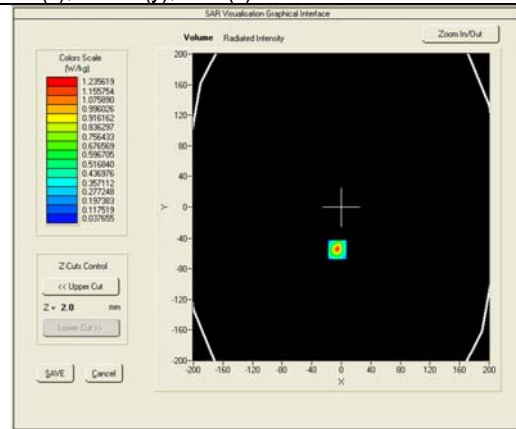


VOLUME SAR

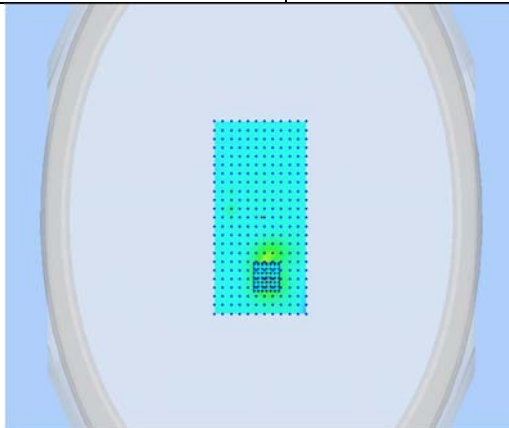


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n40_5310_0mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5310.000000 (Channel 62)
Relative permittivity (real part)	45.997
Conductivity (S/m)	5.751
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.63
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-0.590
Highest Extrapolated SAR (W/Kg)	0.2758
SAR 1g (W/Kg)	0.1305
Peak SAR Location	45mm(x),-48mm(y),4mm(z)

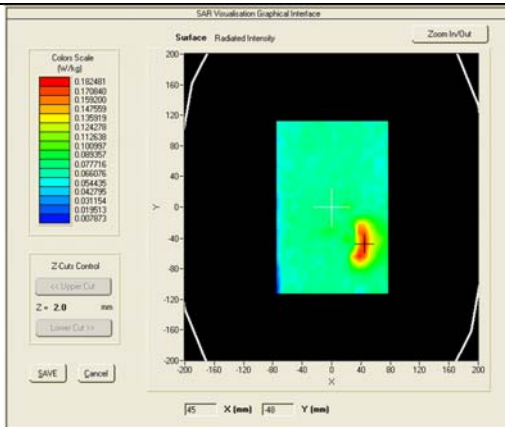

SURFACE SAR

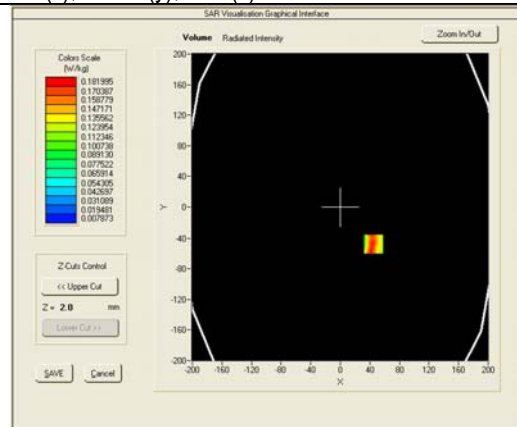


VOLUME SAR

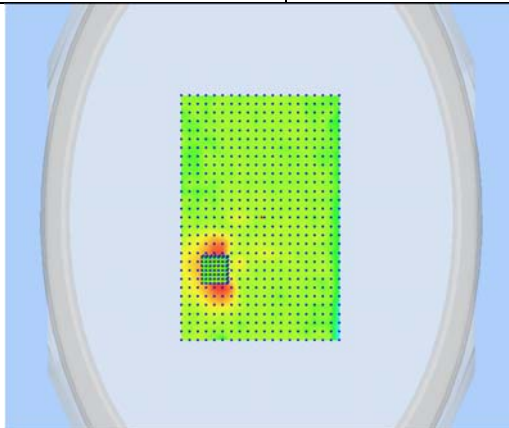


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n-40_5310_5mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5310.000000 (Channel 62)
Relative permittivity (real part)	45.997
Conductivity (S/m)	5.751
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.63
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.390
Highest Extrapolated SAR (W/Kg)	1.1438
SAR 1g (W/Kg)	0.4026
Peak SAR Location	-5mm(x),-50mm(y),4mm(z)

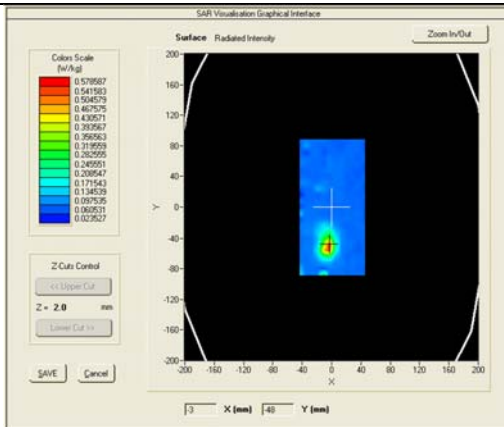

SURFACE SAR

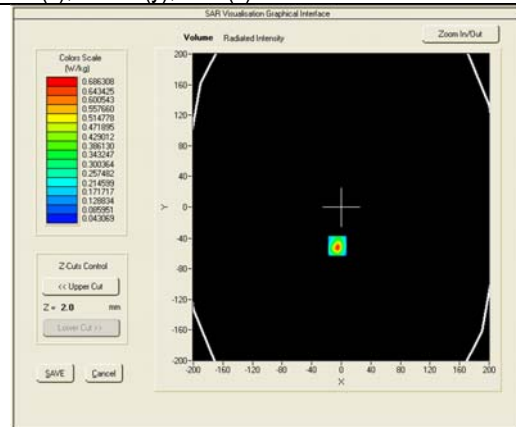


VOLUME SAR

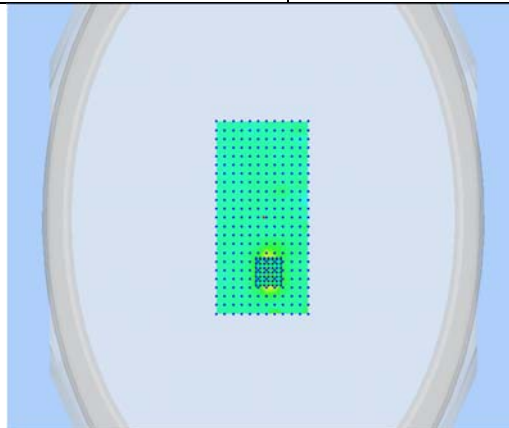


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n40_0mm		
Environ Conditions:	Temp(oC):	23	Result: Pass
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5550.000000 (Channel 110)
Relative permittivity (real part)	45.002
Conductivity (S/m)	6.150
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	0.280
Highest Extrapolated SAR (W/Kg)	0.4485
SAR 1g (W/Kg)	0.1932
Peak SAR Location	38mm(x), -64mm(y), 4mm(z)

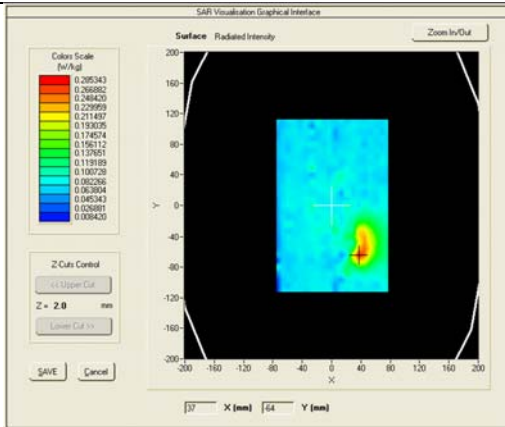

SURFACE SAR

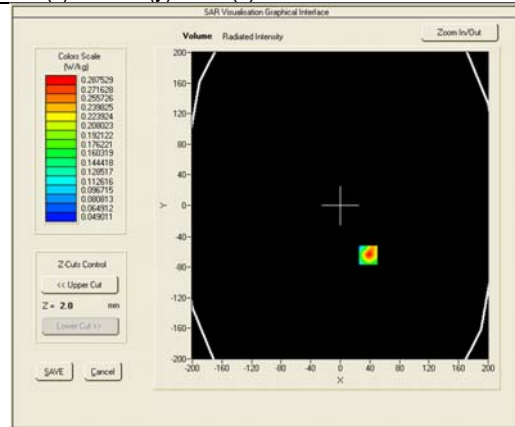


VOLUME SAR

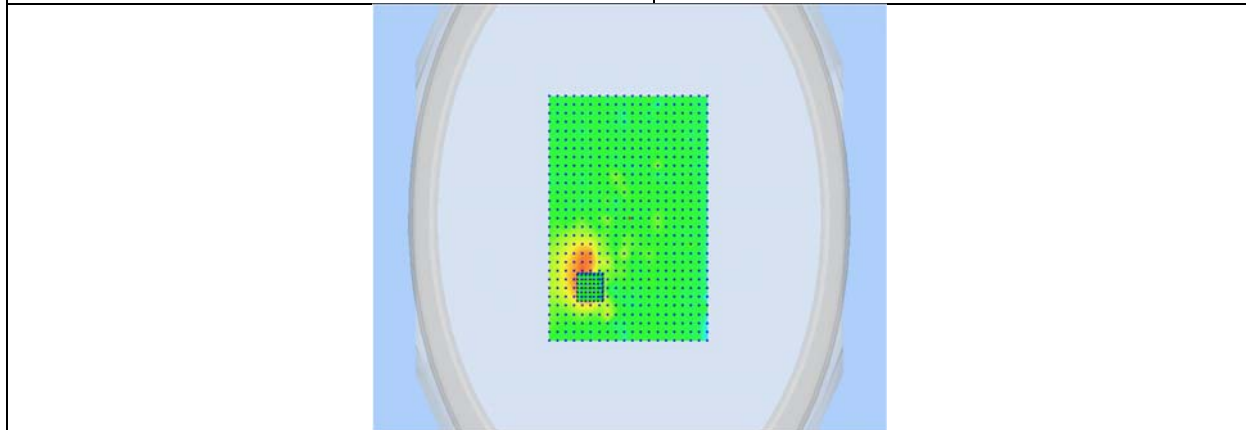


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n-40_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5550.000000 (Channel 110)
Relative permittivity (real part)	45.002
Conductivity (S/m)	6.150
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.71
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-3.280
Highest Extrapolated SAR (W/Kg)	2.1844
SAR 1g (W/Kg)	0.6946
Peak SAR Location	-5mm(x), -55mm(y), 4mm(z)

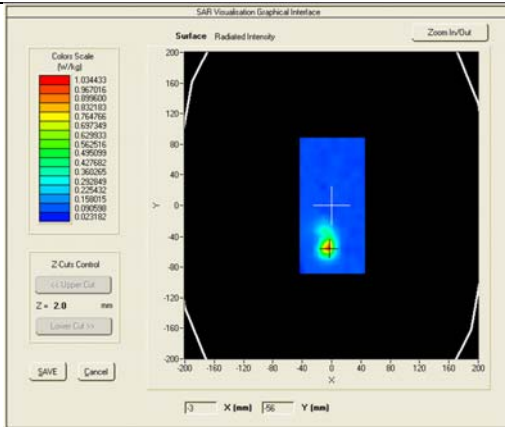

SURFACE SAR

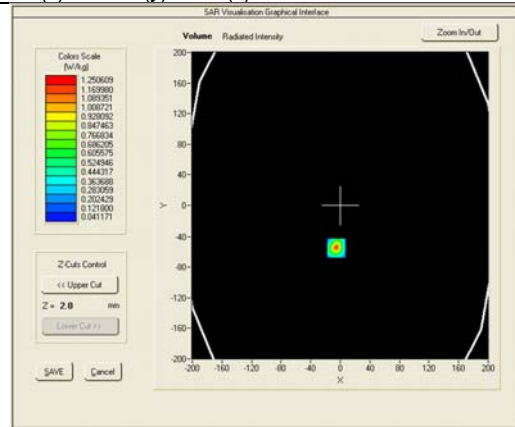


VOLUME SAR

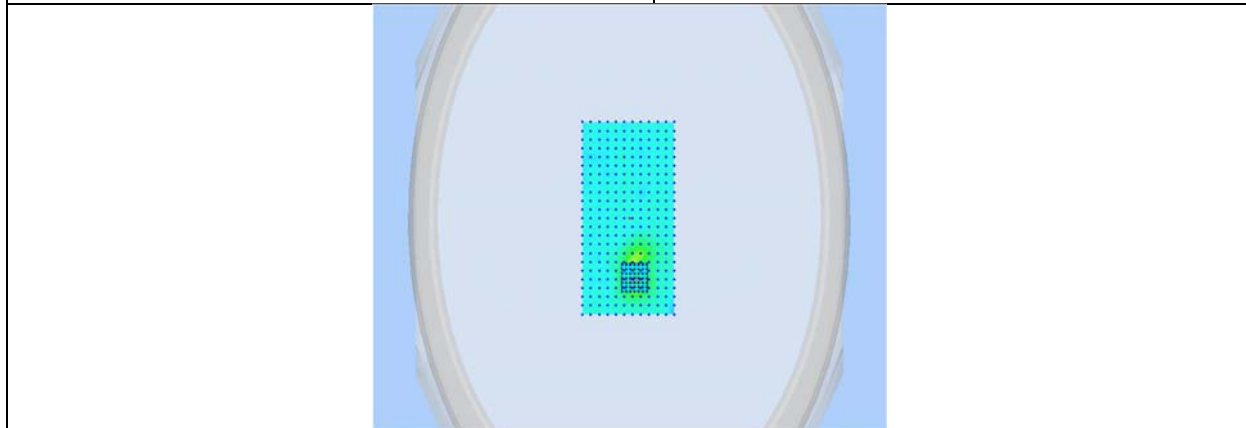


3D View Plot

Test specification:	Plane_Body_Middle_LCD_Down_11n40_0mm				
Environ Conditions:	Temp(oC):	23	Result:	Pass	
	Humidity(%):	58			
	Atmospheric(mPa):	1009			
Mains Power:	N/A				
Test Date:	11/05/2015				
Tested by:	Arthur Tie				
Remarks:					


Frequency (MHz)	5755.000000 (Channel 151)
Relative permittivity (real part)	44.465
Conductivity (S/m)	6.431
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.65
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.060
Highest Extrapolated SAR (W/Kg)	0.3015
SAR 1g (W/Kg)	0.0798
Peak SAR Location	69mm(x),32mm(y),4mm(z)

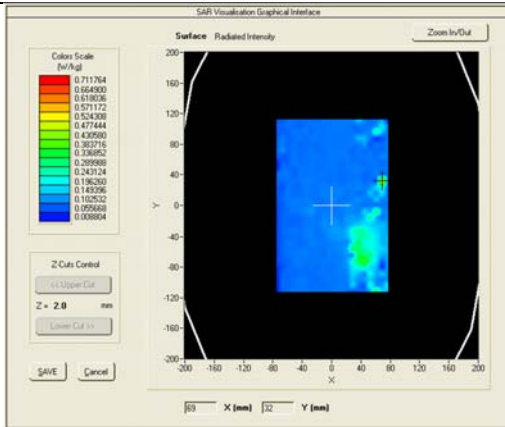

SURFACE SAR

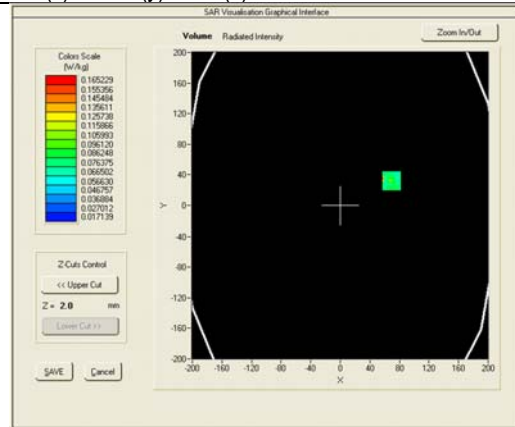


VOLUME SAR

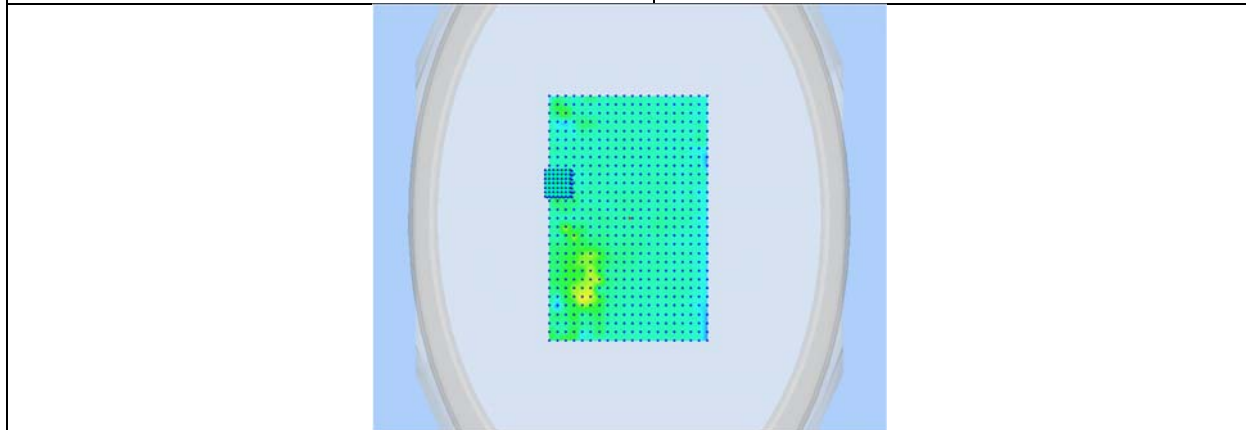


3D View Plot

Test specification:	Plane_Body_Middle_Right_11n-40_5mm		
Environ Conditions:	Temp(oC):	23	Result:
	Humidity(%):	58	
	Atmospheric(mPa):	1009	
Mains Power:	N/A		Pass
Test Date:	11/05/2015		
Tested by:	Arthur Tie		
Remarks:			


Frequency (MHz)	5755.000000 (Channel 110)
Relative permittivity (real part)	44.465
Conductivity (S/m)	6.431
Transmission Duty Factor	1.0
Probe SN	2715_EPGO259
Conversion Factor (dB)	2.65
Area Scan Resolution	8 mm
Zoom Scan Resolution	dx=4mm, dy=4mm, dz=2mm
Zoom Scan Size	24x24x24 mm
Measurement Drifts (%)	-1.800
Highest Extrapolated SAR (W/Kg)	1.5644
SAR 1g (W/Kg)	0.5133
Peak SAR Location	-5mm(x), -55mm(y), 4mm(z)

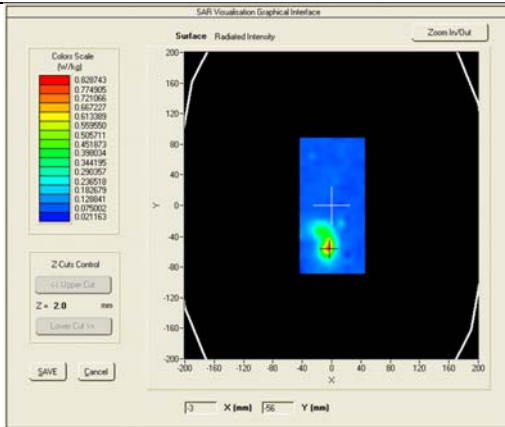

SURFACE SAR

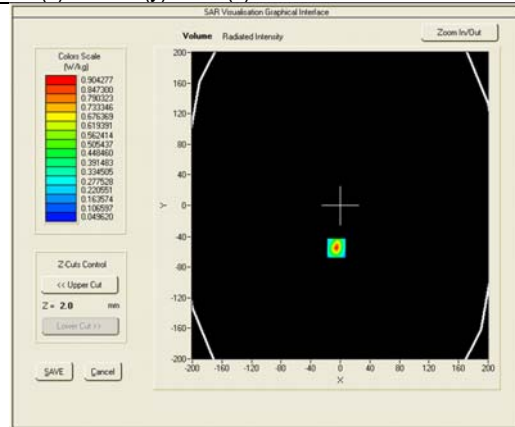

VOLUME SAR

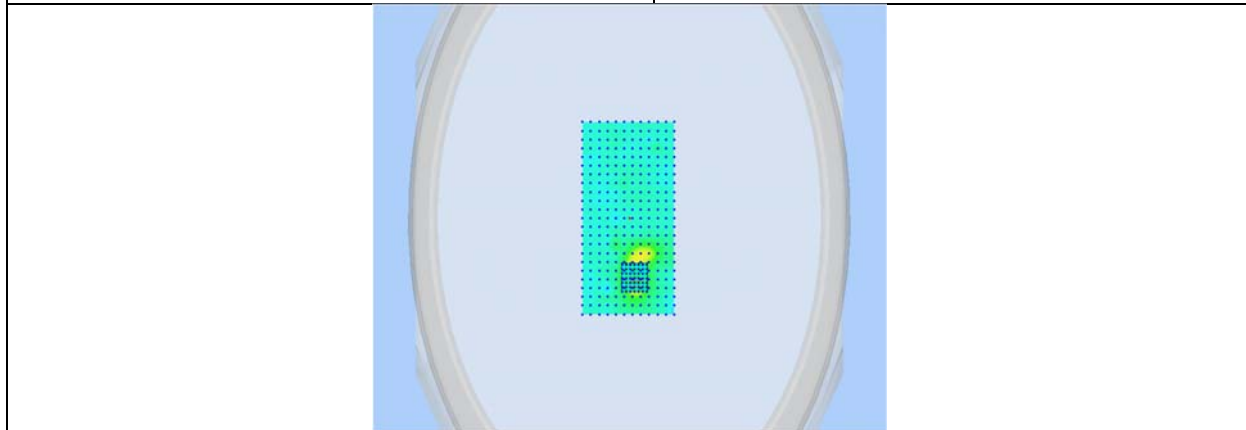
























3D View Plot

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
SAR						
P C	PV 3.06GHz	375052-AA1	N/A	N/A	N/A	<input checked="" type="checkbox"/>
MXG Vector Signal Generator	N5182A	MY47071065	04/06/2015	1 Year	04/06/2016	<input checked="" type="checkbox"/>
Multi-meter	Multi-meter 2000	1259033	09/18/2015	1 Year	09/18/2016	<input checked="" type="checkbox"/>
S-Parameter Network Analyzer	8753ES	US38161019	08/17/2015	1 Year	08/17/2016	<input checked="" type="checkbox"/>
E-field PROBE	EPGO 259	SN 27/15 EPGO259	07/08/2015	1 Year	07/08/2016	<input checked="" type="checkbox"/>
E-field PROBE	EP 204	SN 07/14 EP204	10/06/2015	1 Year	10/06/2016	<input checked="" type="checkbox"/>
DIPOLE 900	DIPOLE 900MHz	SN 31/10 DIPD134	10/06/2015	1 Year	10/06/2016	<input type="checkbox"/>
DIPOLE 1800	DIPOLE 2450MHz	SN 31/10 DIPF135	10/06/2015	1 Year	10/06/2016	<input type="checkbox"/>
DIPOLE 2000	DIPOLE 2000MHz	SN 31/10 DIPI137	10/06/2015	1 Year	10/06/2016	<input checked="" type="checkbox"/>
DIPOLE 2450	DIPOLE 2450MHz	SN 31/10 DIPJ138	10/06/2015	1 Year	10/06/2016	<input checked="" type="checkbox"/>
Wave Guide 5/6 GHz	Wave Guide 5/6GHz	SN 31/10 DIPWGA13	07/08/2015	1 Year	07/08/2016	<input checked="" type="checkbox"/>
COMOSAR Open Coaxial Probe	OCP36	SN 31/10 OCP36	07/08/2015	1 Year	07/08/2016	<input checked="" type="checkbox"/>
Communication Antenna	ANTA30	SN 31/10 ANTA30	N/A	N/A	N/A	<input type="checkbox"/>
Laptop POSITIONING DEVICE	LSH63	SN 31/10 LSH13	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Mobile Phone POSITIONING DEVICE	MSH63	SN 31/10 MSH63	N/A	N/A	N/A	<input checked="" type="checkbox"/>
DUMMY PROBE	None	SN 31/10	N/A	N/A	N/A	<input type="checkbox"/>
SAM PHANTOM	SAM77	SN 31/10 SAM77	N/A	N/A	N/A	<input type="checkbox"/>
Elliptic Phantom	ELL117	SN 31-10 ELL117	N/A	N/A	N/A	<input checked="" type="checkbox"/>
PHANTOM TABLE	N/A	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
6 AXIS ROBOT	KR5	949319	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Medium Power Solid State Amplifier (0.8~4.2GHz)	S41-25	M629-0408	N/A	N/A	N/A	<input type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p> <p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p> <p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2

Annex C. Probe Calibration Report



COMOSAR E-Field Probe Calibration Report

Ref : ACR.190.1.15.SATU.B

**SIEMIC TESTING AND CERTIFICATION
SERVICES**
775 MONTAGUE EXPRESSWAY
MILPITAS, CA 95035, USA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 27/15 EPG0259

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 07/08/2015

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.

Test report No.	FCC/IC_SAR_SL15071501-SLX-015
Page	105 of 139



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.190.1.15.SATUB

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	7/9/2015	<i>JL</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	7/9/2015	<i>JL</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	7/9/2015	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SIEMIC Testing and Certification Services

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	7/9/2015	Initial release
B	6/10/2015	Add 750MHz factor

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
 The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



TABLE OF CONTENTS

1 Device Under Test 4

2 Product Description 4

 2.1 General Information 4

3 Measurement Method 4

 3.1 Linearity 4

 3.2 Sensitivity 5

 3.3 Lower Detection Limit 5

 3.4 Isotropy 5

 3.5 Boundary Effect 5

4 Measurement Uncertainty 5

5 Calibration Measurement Results 6

 5.1 Sensitivity in air 6

 5.2 Linearity 7

 5.3 Sensitivity in liquid 7

 5.4 Isotropy 8

6 List of Equipment 10

Page: 3/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
 The information contained herein is to be used only for the purpose for which it is submitted and is not to
 be released in whole or part without written approval of MVG.*



1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 27/15 EPGO259
Product Condition (new / used)	New
Frequency Range of Probe	0.7 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.230 MΩ Dipole 2: R2=0.211 MΩ Dipole 3: R3=0.216 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
 The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%

Page: 5/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*