



## STC Test Report

**Date:** 2016-07-14

Page 1 of 25

**No.:** DMA000037

**Applicant:** Spin Master Toys Far East Ltd.  
Room 1113, 11th Floor, Chinachen Golden Plaza, 77 Mody  
Road, Tsim Sha Tsui East, Kowloon Hong Kong

**Manufacturer:** WAH SHING (Everwin Toys (Dongguan) Co., Ltd.),  
(Everfront Plastic and Electronics Manufacturing Co., Ltd.)

**Description of Sample(s):** Submitted sample(s) said to be  
Product: ARH RDC SW XL Millennim Falcn  
Brand Name: AIR HOGS  
Model Number: 44550TX  
FCC ID: PQN44550TX2G4

**Date Sample(s) Received:** 2016-07-04

**Date Tested:** 2016-07-08 to 2016-07-14

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in  
accordance with FCC 47CFR [Codes of Federal Regulations]  
Part 15: 2015 and ANSI C63.10: 2013 for FCC Certification.

**Conclusion(s):** The submitted product COMPLIED with the requirements of  
Federal Communications Commission [FCC] Rules and  
Regulations Part 15. The tests were performed in accordance  
with the standards described above and on Section 2.2 in this  
Test Report.

**Remark(s):** ---

  
LONG Yun Jian, Along  
Authorized Signatory  
ElectroMagnetic Compatibility Department  
For and on behalf of  
The Hong Kong Standards and Testing Centre Ltd.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# **STC Test Report**

**Date: 2016-07-14**

**Page 2 of 25**

**No.: DMA000037**

## **CONTENT:**

Cover	Page 1 of 25
Content	Page 2 of 25
<b><u>1.0</u></b>	<b><u>General Details</u></b>
1.1	Equipment Under Test [EUT] Page 3 of 25
1.2	Description of EUT Operation Page 3 of 25
1.3	Date of Order Page 3 of 25
1.4	Submitted Sample Page 3 of 25
1.5	Test Duration Page 3 of 25
1.6	Country of Origin Page 3 of 25
<b><u>2.0</u></b>	<b><u>Technical Details</u></b>
2.1	Investigations Requested Page 4 of 25
2.2	Test Standards and Results Summary Page 4 of 25
<b><u>3.0</u></b>	<b><u>Test Results</u></b>
3.1	Emission Page 5-16 of 25
3.2	Bandwidth Measurement Page 17-20 of 25
<b><u>Appendix A</u></b>	
List of Measurement Equipment	Page 21 of 25
<b><u>Appendix B</u></b>	
Photographs	Page 22-25 of 25

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

**Date: 2016-07-14**

**Page 3 of 25**

**No.: DMA000037**

### **1.0 General Details**

#### **1.1 Equipment Under Test [EUT]**

##### **Description of Sample(s)**

Product: ARH RDC SW XL Millennim Falcn  
Manufacturer: WAH SHING (Everwin Toys (Dongguan) Co., Ltd.),  
(Everfront Plastic and Electronics Manufacturing Co., Ltd.)  
Brand Name: AIR HOGS  
Model Number: 44550TX  
Rating: 6Vd.c. (AA battery \*4)

#### **1.2 Description of EUT Operation**

The Equipment Under Test (EUT) is a ARH RDC SW XL Millennim Falcn . The transceiver operating in the 2.4GHz ISM frequency band. The RF signal is modulated by IC, the type of modulation used is FSK.

#### **1.3 Date of Order**

2016-07-04

#### **1.4 Submitted Sample(s):**

1 Sample

#### **1.5 Test Duration**

2016-07-08 to 2016-07-14

#### **1.6 Country of Origin**

China

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 4 of 25

No.: DMA000037

### 2.0 Technical Details

#### **2.1 Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10: 2013 for FCC Certification.

The device was realized by test software.

#### **2.2 Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

**Date: 2016-07-14**

**Page 5 of 25**

**No.: DMA000037**

### **3.0 Test Results**

#### **3.1 Emission**

##### **3.1.1 Radiated Emissions**

Test Requirement:	FCC 47CFR 15.249 & FCC 47CFR 15.209
Test Method:	ANSI C63.10: 2013
Test Date:	2016-07-14
Mode of Operation:	TX mode

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 6 of 25

No.: DMA000037

### Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)

RBW: 10kHz  
VBW: 30kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold


30MHz – 1GHz (QP)

RBW: 120kHz  
VBW: 120kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

Above 1GHz (Pk & Av)

RBW: 1MHz  
VBW: 1MHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

### Test Setup:

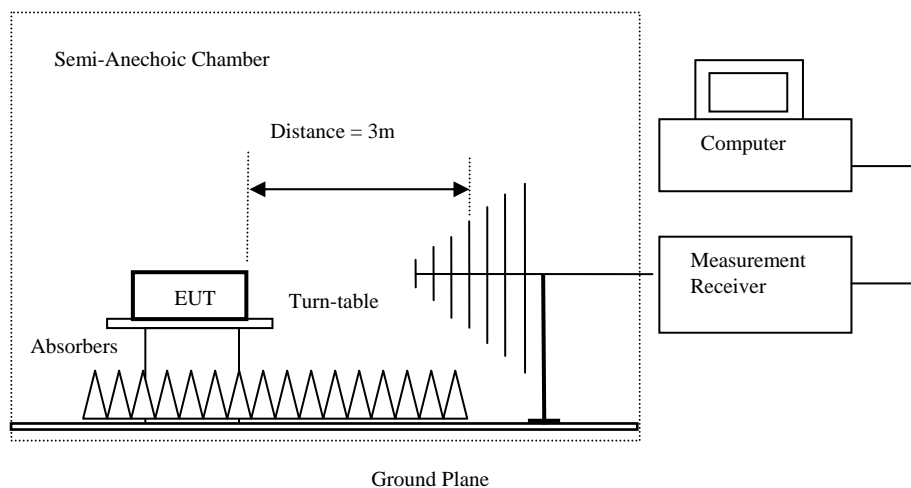

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 7 of 25

No.: DMA000037

### Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [microvolts/meter]	Field Strength of Harmonics Emission [microvolts/meter]
902-928	50,000 [Quasi-Peak]	500 [Average]
2400-2483.5	50,000 [Average]	500 [Average]

### Results of Tx mode (Lowest Frequency Channel-2408 MHz): Pass

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2408.00	57.8	36.8	94.6	53,703.2	500,000	Vertical
2408.00	53.6	36.4	90.0	31,622.8	500,000	Horizontal

Field Strength of Fundamental Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2408.00	34.0	36.8	70.8	3,467.4	50,000	Vertical
2408.00	31.7	36.4	68.1	2,541.0	50,000	Horizontal

Field Strength of Harmonics Emission Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
4816.0	14.8	41.5	56.3	653.1	5,000	Vertical
4816.0	12.8	42.4	55.2	575.4	5,000	Horizontal
7224.0	9.7	45.1	54.8	549.5	5,000	Vertical
7224.0	8.9	46.2	55.1	568.9	5,000	Horizontal
9632.0	7.6	48.0	55.6	602.6	5,000	Vertical
9632.0	7.1	48.8	55.9	623.7	5,000	Horizontal

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 8 of 25

No.: DMA000037

Field Strength of Harmonics Emission						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
4816.0	-1.3	41.5	40.2	102.3	500	Vertical
4816.0	-2.5	42.4	39.9	98.9	500	Horizontal
7224.0	-6.9	45.1	38.2	81.3	500	Vertical
7224.0	-9.1	46.2	37.1	71.6	500	Horizontal
9632.0	-9.6	48.0	38.4	83.2	500	Vertical
9632.0	-10.5	48.8	38.3	82.2	500	Horizontal

### Results of Tx mode (Middle Frequency Channel- 2440MHz): Pass

Field Strength of Fundamental Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2440.00	59.3	36.8	96.1	63,826.3	500,000	Vertical
2440.00	57.3	36.4	93.7	48,417.2	500,000	Horizontal

Field Strength of Fundamental Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2440.00	36.0	36.8	72.8	4,365.2	50,000	Vertical
2440.00	35.5	36.4	71.9	3,935.5	50,000	Horizontal

Field Strength of Harmonics Emission						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
4880.0	15.2	41.6	56.8	691.8	5,000	Vertical
4880.0	13.0	42.5	55.5	595.7	5,000	Horizontal
7320.0	9.4	45.2	54.6	537.0	5,000	Vertical
7320.0	8.4	46.3	54.7	543.3	5,000	Horizontal
9760.0	7.3	48.1	55.4	588.8	5,000	Vertical
9760.0	6.3	48.9	55.2	575.4	5,000	Horizontal

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report

Date: 2016-07-14

Page 9 of 25

No.: DMA000037

Field Strength of Harmonics Emission						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
4880.0	-2.3	41.6	39.3	92.3	500	Vertical
4880.0	-3.8	42.5	38.7	86.1	500	Horizontal
7320.0	-6.5	45.2	38.7	86.1	500	Vertical
7320.0	-8.5	46.3	37.8	77.6	500	Horizontal
9760.0	-9.2	48.1	38.9	88.1	500	Vertical
9760.0	-10.1	48.9	38.8	87.1	500	Horizontal

Results of Tx mode (Highest Frequency Channel – 2472MHz): Pass

Field Strength of Fundamental Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2472.00	59.3	36.8	96.1	63,826.3	500,000	Vertical
2472.00	56.3	36.4	92.7	43,151.9	500,000	Horizontal

Field Strength of Fundamental Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
2472.00	36.9	36.8	73.7	4,841.7	50,000	Vertical
2472.00	33.7	36.4	70.1	3,198.9	50,000	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 10 of 25

No.: DMA000037

Field Strength of Harmonics Emission Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
4944.0	15.7	41.4	57.1	716.1	5,000	Vertical
4944.0	13.7	42.7	56.4	660.7	5,000	Horizontal
7416.0	8.9	45.6	54.5	530.9	5,000	Vertical
7416.0	8.2	46.5	54.7	543.3	5,000	Horizontal
9988.0	6.5	48.6	55.1	568.9	5,000	Vertical
9988.0	5.7	49.7	55.4	588.8	5,000	Horizontal

Field Strength of Harmonics Emission Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V/m	Correction Factor dB $\mu$ V/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
4944.0	0.4	41.4	41.8	123.0	500	Vertical
4944.0	-1.8	42.7	40.9	110.9	500	Horizontal
7416.0	-7.3	45.6	38.3	82.2	500	Vertical
7416.0	-7.7	46.5	38.8	87.1	500	Horizontal
9988.0	-10.0	48.6	38.6	85.1	500	Vertical
9988.0	-10.8	49.7	38.9	88.1	500	Horizontal

Remarks:

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz-30MHz): 2.0dB

(30MHz -1GHz): 4.9dB

(1GHz -6GHz): 4.02dB

(6GHz -26.5GHz): 4.03dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# STC Test Report

Date: 2016-07-14

Page 11 of 25

No.: DMA000037

## Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V}/\text{m}$ ]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

## Results of TX mode (9kHz – 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

## Results of TX mode (30MHz – 1GHz): PASS

Horizontal

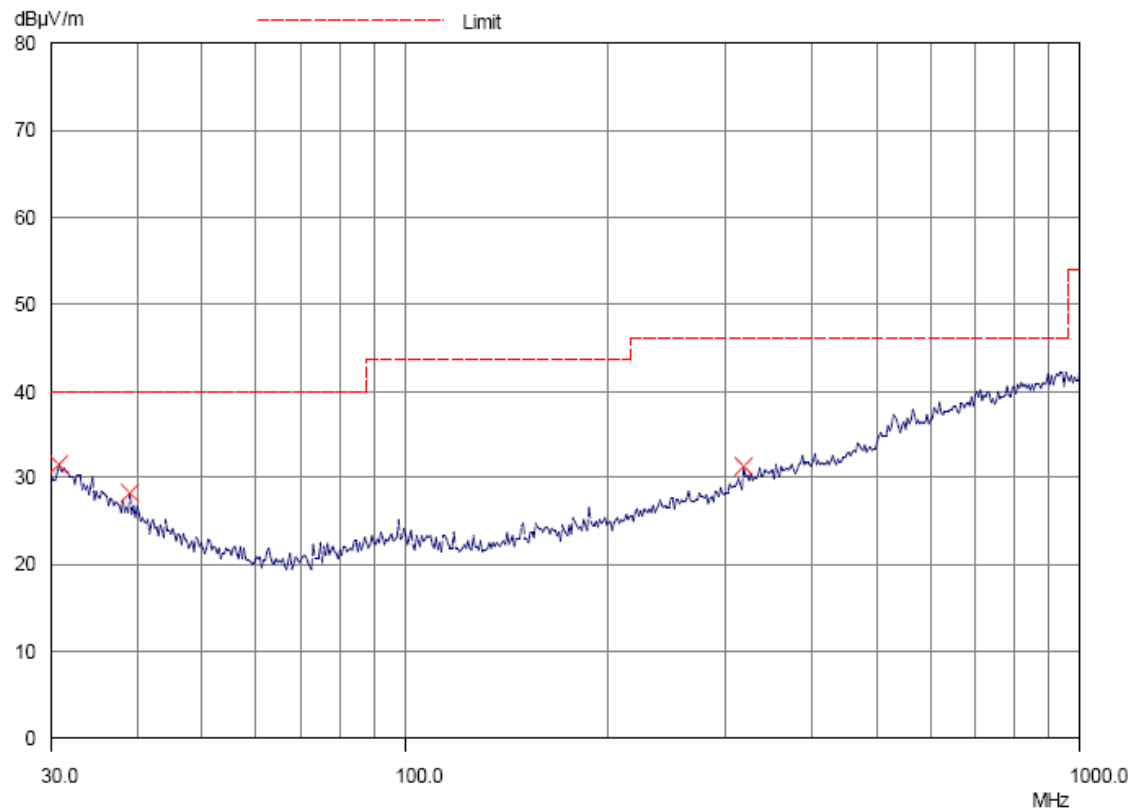

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 12 of 25

No.: DMA000037

Results of TX mode (30MHz – 1GHz): PASS

<b>Radiated Emissions</b>					
<b>Quasi-Peak</b>					
Emission Frequency MHz	E-Field Polarity	Level @3m dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Level @3m $\mu$ V/m	Limit @3m $\mu$ V/m
30.7	Horizontal	31.5	40.0	37.6	100
39.1	Horizontal	28.1	40.0	25.4	100
316.9	Horizontal	31.3	46.0	36.7	200

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# STC Test Report

Date: 2016-07-14

Page 13 of 25

No.: DMA000037

## Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V/m}$ ]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

## Results of TX mode (9kHz – 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

## Results of TX mode (30MHz – 1GHz): PASS

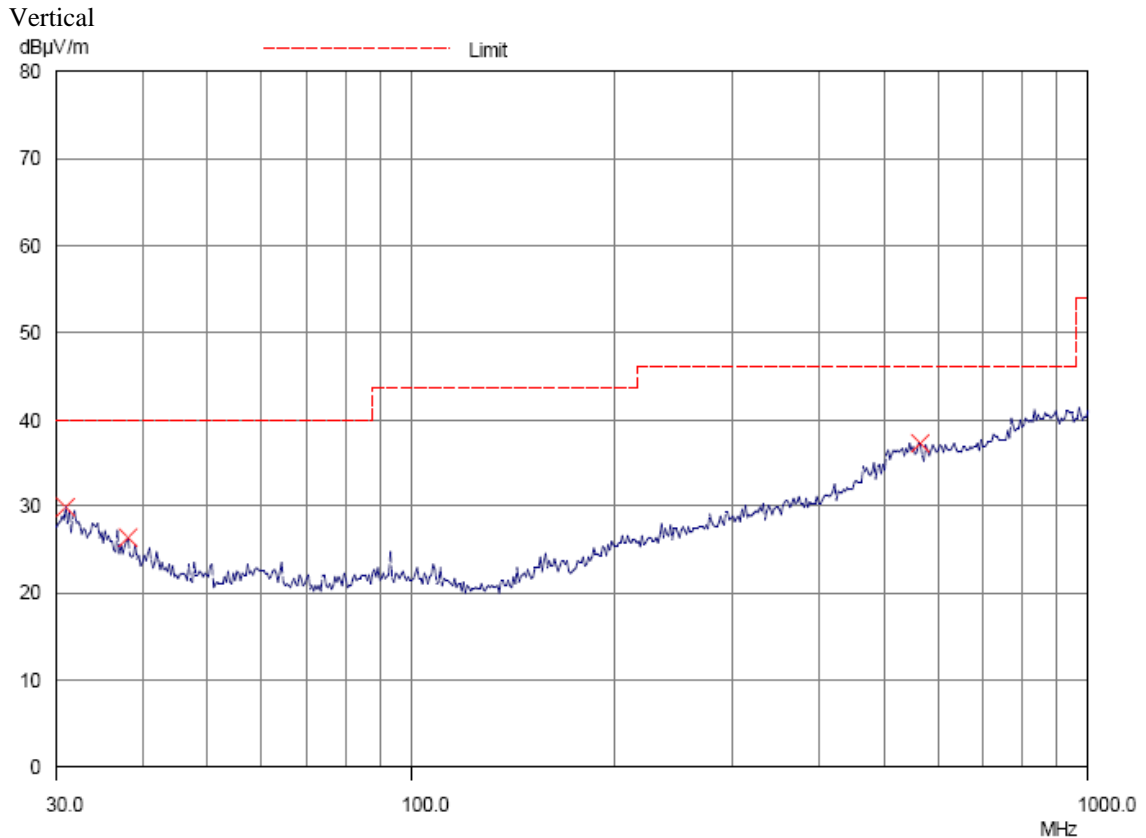

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 14 of 25

No.: DMA000037

Results of TX mode (30MHz – 1GHz): PASS

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Level @3m $\mu$ V/m	Limit @3m $\mu$ V/m
30.9	Vertical	29.8	40.0	30.9	100
38.3	Vertical	26.4	40.0	20.9	100
564.3	Vertical	37.3	46.0	73.3	200

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 15 of 25

No.: DMA000037

### RF Radiated Emissions Measurement:

#### Limit :

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

#### Result: RF Radiated Emissions (1GHz-26GHz)(worse data) (Lowest)

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2400.0	12.4	36.8	49.2	74.0	24.8	Vertical

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2400.0	1.3	36.8	38.1	54.0	15.9	Vertical

#### Result: RF Radiated Emissions(1GHz-26GHz)(worse data) (Highest)

Field Strength of Band-edge Compliance Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2483.5	9.7	36.4	46.1	74.0	27.9	Horizontal

Field Strength of Band-edge Compliance Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2483.5	0.8	36.4	37.2	54.0	16.8	Horizontal

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

**Date: 2016-07-14**

**Page 16 of 25**

**No.: DMA000037**

### **3.1.2 Antenna Requirement**

**Test Requirements: § 15.203**

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Wire antenna. There is no external antenna, the antenna gain = 0.5dBi. User is unable to remove or changed the Antenna.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## **STC Test Report**

**Date: 2016-07-14**

**Page 17 of 25**

**No.: DMA000037**

### **3.2 20dB Bandwidth of Fundamental Emission**

Test Requirement:	FCC 47 CFR 15.249
Test Method:	ANSI C63.10: 2013
Test Date:	2016-07-11
Mode of Operation:	Tx mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





# STC Test Report

Date: 2016-07-14


Page 19 of 25

No.: DMA000037

## Limits for 20dB Bandwidth of Fundamental Emission (Middle Frequency Channel):

Frequency Range [MHz]	20dB Bandwidth [MHz]
2440	4.67

## 20dB Bandwidth of Fundamental Emission

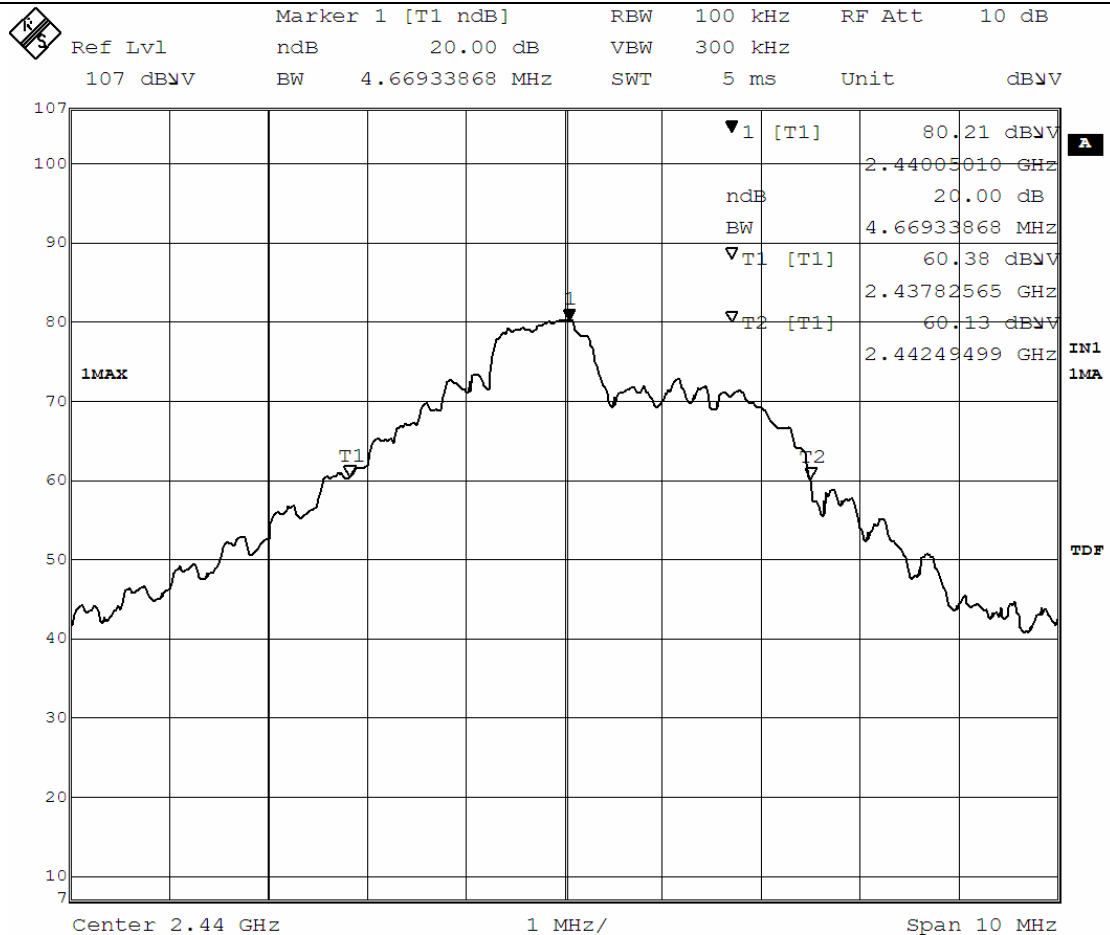

Date: 11.JUL.2016 05:59:22

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



# STC Test Report

Date: 2016-07-14


Page 20 of 25

No.: DMA000037

**Limits for 20dB Bandwidth of Fundamental Emission (High Frequency Channel):**

Frequency Range [MHz]	20dB Bandwidth [MHz]
2472	6.39

**20dB Bandwidth of Fundamental Emission**

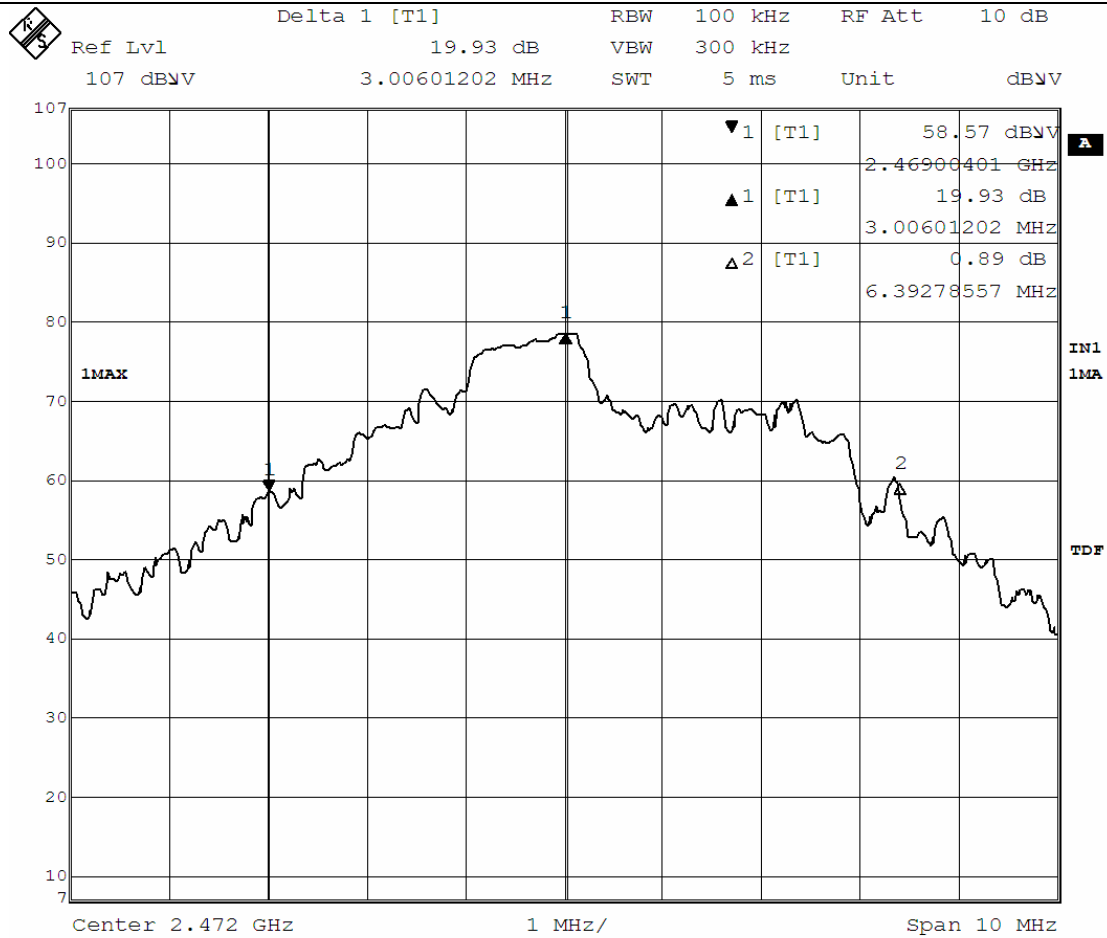

Date: 11.JUL.2016 04:15:16

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
 Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
 For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 21 of 25

No.: DMA000037

### Appendix A

#### List of Measurement Equipment

##### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM299	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3115	00114120	2016/04/27	2018/04/27
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Lindgren	FACT-3	--	2016/04/24	2017/04/24
EM355	Biconilog Antenna	ETS-Lindgren	3143B	00094856	2016/03/03	2018/03/03
EM229	EMI Test Receiver	R&S	ESIB40	100248	2016/06/01	2017/06/01
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2016/06/01	2017/06/01
EM145	EMI Test Receiver	R & S	ESCS 30	830245/021	2016/06/01	2017/06/01
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2016/03/16	2018/03/16
EM302	Precision Omnidirectional Dipole (1 – 6GHz)	Seibersdorf Laboratories	POD 16	161806/L	2016/05/11	2018/05/11
EM303	Precision Omnidirectional Dipole (6 – 18GHz)	Seibersdorf Laboratories	POD 618	6181908/L	2016/05/11	2018/05/11

##### Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	2015/10/22	2016/10/22
EM145	EMI Test Receiver	R & S	ESCS 30	830245/021	2016/06/01	2017/06/01
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2016/01/11	2017/01/11
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2012/02/03	2017/02/03
N/A	mEASUREMENT AND EVALUATION SOFTWARE	ROHDE & SCHWARZ	esib-k1	v1.20	n/a	n/a

Remarks:-

N/A Not Applicable or Not Available

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: hkstc@hkstc.org Homepage: www.stc-group.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date: 2016-07-14

Page 22 of 25

No.: DMA000037

### Appendix B

#### Photographs of EUT


**Front View of the product**




**Rear View of the product**




**Inside View of the product**

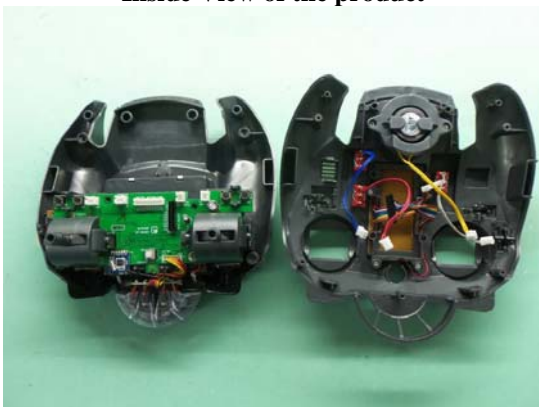

**Inner Circuit Top View**

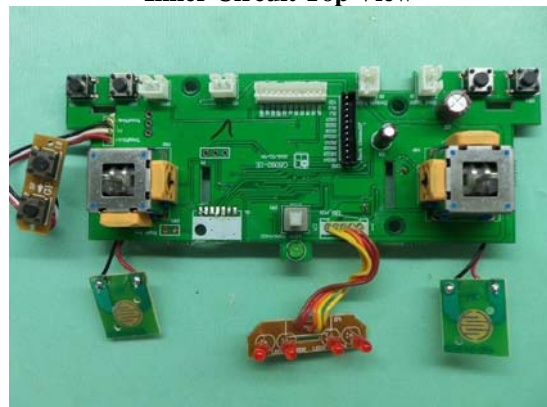

**Inner Circuit Bottom View**

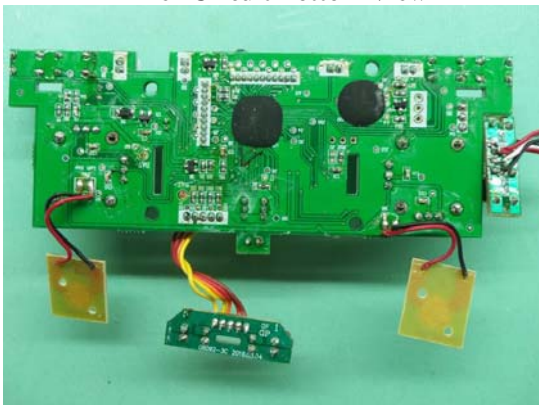

**Inner Circuit Top View**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2016-07-14

Page 23 of 25


No.: DMA000037

### Photographs of EUT


**Inner Circuit Bottom View**

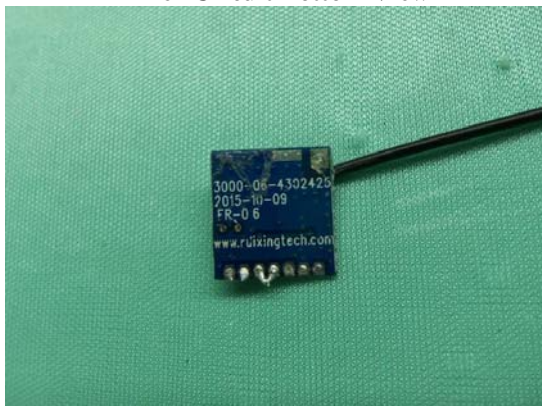

**Inner Circuit Top View**

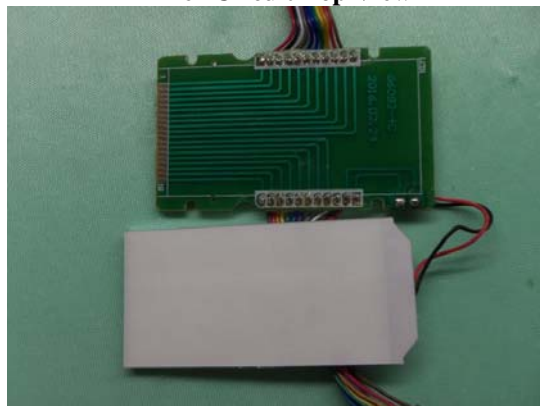

**Inner Circuit Bottom View**

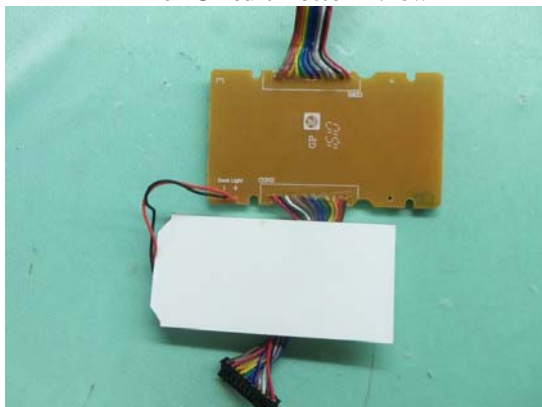

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date: 2016-07-14

Page 24 of 25

No.: DMA000037

### Photographs of EUT

**Measurement of Radiated Emission Test Set Up**

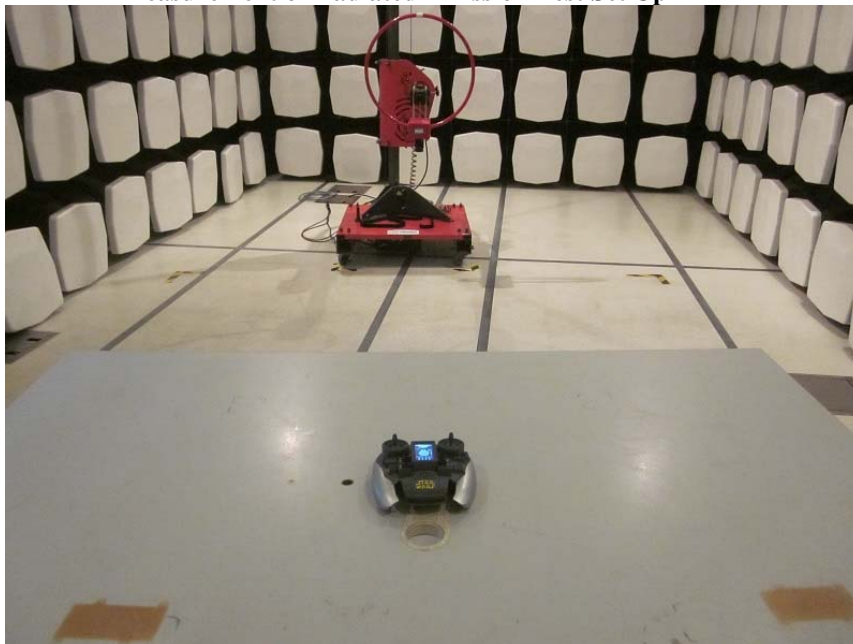

**Measurement of Radiated Emission Test Set Up**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## **STC Test Report**


**Date: 2016-07-14**

**Page 25 of 25**

**No.: DMA000037**

**Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**

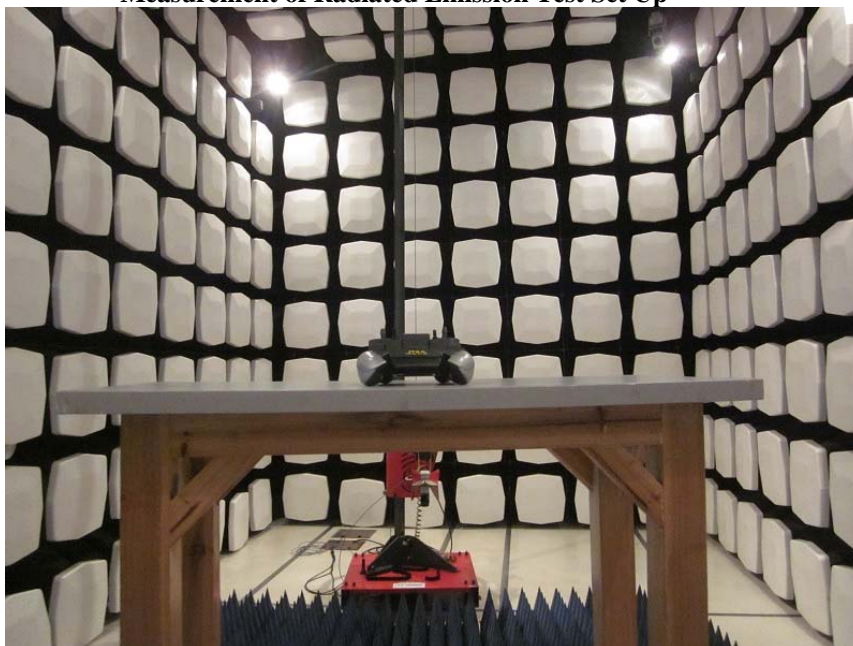

**\*\*\*\*\* End of Test Report \*\*\*\*\***

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org) Homepage: [www.stc-group.org](http://www.stc-group.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage