



Valued Quality, Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 - TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## TEST REPORT

Report No.: 14050128HKG-001R2

Spin Master Toys Far East Ltd.

Application  
For  
Certification  
(Original Grant)  
(FCC ID: PQN7260013M56)

Transmitter

This report supersedes previous report with report number 14050128HKG-001R1 dated July 18, 2014.

Prepared and Checked by:

Wong Kwok Yeung, Kenneth  
Lead Engineer

Approved by:

Chan Chi Hung, Terry  
Supervisor  
Date: August 04, 2014

This report shall not be reproduced, except in full.  
This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## GENERAL INFORMATION

|                           |   |
|---------------------------|---|
| Grantee:                  | Spin Master Toys Far East Ltd.  |
| Grantee Address:          | Room 1113, 11/F., Chinachem Golden Plaza,<br>77 Mody Road, Tsim Sha Tsui East,<br>Kowloon, Hong Kong. |
| Contact Person:           | Andy Wong   |
| Tel:                      | (852) 23013822  |
| Fax:                      | (852) 23011820  |
| e-mail:                   | andyw@spinmaster.com  |
| Manufacturer:             | Pacific Industries (Zhong Shan) Ltd.  |
| Manufacturer Address:     | Xincun Factory Area, Baishawan Industrial<br>Park, Eastern District, Zhong Shan, Guangdong, China     |
| Brand Name:               | Spin Master Toys  |
| Model:                    | 72600   |
| Additional Model:         | 1031553, 1032234, 1032974, 1033218, 1032641,<br>1032919   |
| Phantom No.:              | 20065763  |
| Type of EUT:              | Transmitter   |
| Description of EUT:       | GAB Chatsters Doll Gabby  |
| Serial Number:            | N/A   |
| FCC ID:                   | PQN7260013M56   |
| Date of Sample Submitted: | May 02, 2014  |
| Date of Test:             | May 02, 2014 to July 16, 2014   |
| Report No.:               | 14050128HKG-001R2   |
| Report Date:              | August 04, 2014   |
| Environmental Conditions: | Temperature: +10 to 40°C<br>Humidity: 10 to 90%   |

Report No.: 14050128HKG-001R2  
FCC ID: PQN7260013M56

i

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-ettsemko.com



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## SUMMARY OF TEST RESULT

| TEST SPECIFICATION                                | REFERENCE | RESULTS |
|---|-----------|---------|
| Transmitter Field Strength<br>Frequency Stability | 15.225    | Pass    |
| Radiated Emission in Restricted Bands             | 15.205    | Pass    |

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2012 Edition

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## Table of Contents

|     |  |    |
|-----|--|----|
| 1.0 | <b><u>General Description</u></b> .....          | 1  |
| 1.1 | Product Description .....                        | 1  |
| 1.2 | Related Submittal(s) Grants.....                 | 1  |
| 1.3 | Test Methodology .....                           | 1  |
| 1.4 | Test Facility .....                              | 2  |
| 2.0 | <b><u>System Test Configuration</u></b> .....    | 3  |
| 2.1 | Justification.....                               | 3  |
| 2.2 | EUT Exercising Software.....                     | 3  |
| 2.3 | Special Accessories .....                        | 3  |
| 2.4 | Measurement Uncertainty.....                     | 3  |
| 2.5 | Support Equipment List and Description.....      | 3  |
| 3.0 | <b><u>Emission Results</u></b> .....             | 3  |
| 3.1 | Field Strength Calculation.....                  | 3  |
| 3.2 | Radiated Emission Configuration Photograph ..... | 4  |
| 3.3 | Radiated Emission Data .....                     | 4  |
| 3.4 | Frequency Stability.....                         | 7  |
| 4.0 | <b><u>Equipment Photographs</u></b> .....        | 8  |
| 5.0 | <b><u>Product Labelling</u></b> .....            | 8  |
| 6.0 | <b><u>Technical Specifications</u></b> .....     | 8  |
| 7.0 | <b><u>Instruction Manual</u></b> .....           | 8  |
| 8.0 | <b><u>Miscellaneous Information</u></b> .....    | 9  |
| 8.1 | Measured Bandwidth.....                          | 9  |
| 8.2 | Discussion of Pulse Desensitization .....        | 10 |
| 8.3 | Calculation of Average Factor.....               | 10 |
| 8.4 | Emissions Test Procedures .....                  | 10 |
| 9.0 | <b><u>Equipment List</u></b> .....               | 12 |



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 1.0 General Description

### 1.1 Product Description

The equipment under test (EUT) is a transmitter for a Doll (RFID toy reader) operating at 13.56 MHz which is controlled by a crystal. The EUT is powered by 4 x AA size batteries. This product consists of a doll (RFID toy reader) and six interactive accessories (passive tags). The EUT have an ON/OFF switch, a head button, a lip button, two LCD displays and two touch buttons (on the eyeglasses). After switch on the EUT, it can give you a response (i.e. Dancing or singing) when you place the passive tags on the lip or you can play different modes by pressing different buttons. The EUT can also connect with iPad via 18kHz audio tone for game playing.

The Model: 1031553, 1032234, 1032974, 1033218, 1032641 and 1032919 are the same as the Model: 72600 in hardware aspect. The models are different in package only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

### 1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 1.4 Test Facility

The semi-anechoic chamber used to collect the radiated data is located at Workshop No.3 G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Shatin, N.T. Hong Kong. This test facility and site measurement data have been placed on file with the FCC.



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 2.0 **System Test Configuration**

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by new 4 x 1.5V AA Batteries.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.5 Support Equipment List and Description

6pcs passive tags (i.e. Phone, Cupcake, Drink, Dog, Lipstick and Eye Shadow)

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

- FS = Field Strength in dB $\mu$ V/m
- RR = RA - AG - AV in dB $\mu$ V
- LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

|                               |                      |
|-------------------------------|----------------------|
| RA = 52.0 dB $\mu$ V/m        |                      |
| AF = 7.4 dB                   | RR = 18.0 dB $\mu$ V |
| CF = 1.6 dB                   | LF = 9.0 dB          |
| AG = 29.0 dB                  |                      |
| AV = 5.0 dB                   |                      |
| FS = RR + LF                  |                      |
| FS = 18 + 9 = 27 dB $\mu$ V/m |                      |

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$





Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 67.815 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 11.1 dB



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Spin Master Toys Far East Ltd.  
Model: 72600  
Worst-Case Operating Mode: Transmitting

Date of Test: July 16, 2014

Table 1

**Radiated Emissions**  
**Pursuant to FCC Part 15 Section 15.225 Requirement**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Distance Factor (-dB) | Calculated at 30m (dBµV/m) | Limit at 30m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|-----------------------|----------------------------|-----------------------|-------------|
| V            | 13.563          | 40.9           | 0            | 10.8                | 51.7               | 40.0                  | 11.7                       | 84.0                  | -72.3       |
| V            | 27.126          | 18.3           | 0            | 9.5                 | 27.8               | 40.0                  | -12.2                      | 29.5                  | -41.7       |

| Polari- zation | Frequency (MHz) | Reading (dBµV) | Pre- Amp (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Limit at 3m (dBµV/m) | Margin (dB)  |
|----------------|-----------------|----------------|---------------|---------------------|--------------------|----------------------|--------------|
| V              | 40.689          | 33.9           | 16            | 10.0                | 27.9               | 40.0                 | -12.1        |
| V              | 54.252          | 32.6           | 16            | 11.0                | 27.6               | 40.0                 | -12.4        |
| V              | 67.815          | 36.9           | 16            | 8.0                 | 28.9               | 40.0                 | -11.1        |
| V              | 81.378          | 37.5           | 16            | 7.0                 | 28.5               | 40.0                 | -11.5        |
| V              | 94.941          | 34.5           | 16            | 11.0                | 29.5               | 43.5                 | -14.0        |
| <b>V</b>       | <b>108.504</b>  | <b>30.8</b>    | <b>16</b>     | <b>14.0</b>         | <b>28.8</b>        | <b>43.5</b>          | <b>-14.7</b> |
| V              | 122.067         | 31.6           | 16            | 14.0                | 29.6               | 43.5                 | -13.9        |
| <b>V</b>       | <b>135.630</b>  | <b>32.3</b>    | <b>16</b>     | <b>14.0</b>         | <b>30.3</b>        | <b>43.5</b>          | <b>-13.2</b> |

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Loop antenna is used for the emission below 30MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 3.4 Frequency Tolerance

**Data Table**  
**Frequency tolerance of Transmitter**  
**(Temperature Variation: -20°C to +50°C)**

| Operating frequency |                  | 13.562586MHz             |                     |           |
|---------------------|------------------|--------------------------|---------------------|-----------|
| Test Voltage (V)    | Temperature (°C) | Measured frequency (MHz) | Frequency error (%) | Limit (%) |
| 6.0                 | + 50             | 13.562674                | +0.00065            | ±0.01     |
|                     | + 40             | 13.562684                | +0.00072            | ±0.01     |
|                     | + 30             | 13.562608                | +0.00016            | ±0.01     |
|                     | + 20             | 13.562586                | 0                   | ±0.01     |
|                     | + 10             | 13.562581                | -0.000037           | ±0.01     |
|                     | 0                | 13.562570                | -0.00012            | ±0.01     |
|                     | - 10             | 13.562564                | -0.00016            | ±0.01     |
|                     | - 20             | 13.562516                | -0.00052            | ±0.01     |

We found that the EUT met the requirement of FCC Part 15 Section 15.225(e).



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

#### 5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

#### 6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

#### 7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




## 8.0 Miscellaneous Information

The miscellaneous information includes details of the test procedure and measured bandwidth.

### 8.1 Measured Bandwidth

The below plot shows the fundamental emission is confined in the specified band. The emission of the fundamental is 11.7dB $\mu$ V/m and it is below the limit of 50.5 dB $\mu$ V/m in the range of (13.410-13.553MHz) and (13.567-13.710MHz) and the limit of 40.5 dB $\mu$ V/m in the frequency range of (13.110-13.410MHz) and (13.710-14.010MHz). In the frequency range from 13.110-14.010MHz, we cannot find any emission higher than the fundamental emission. Therefore they meet the requirement of Section 15.225(a), (b), (c), & (d).

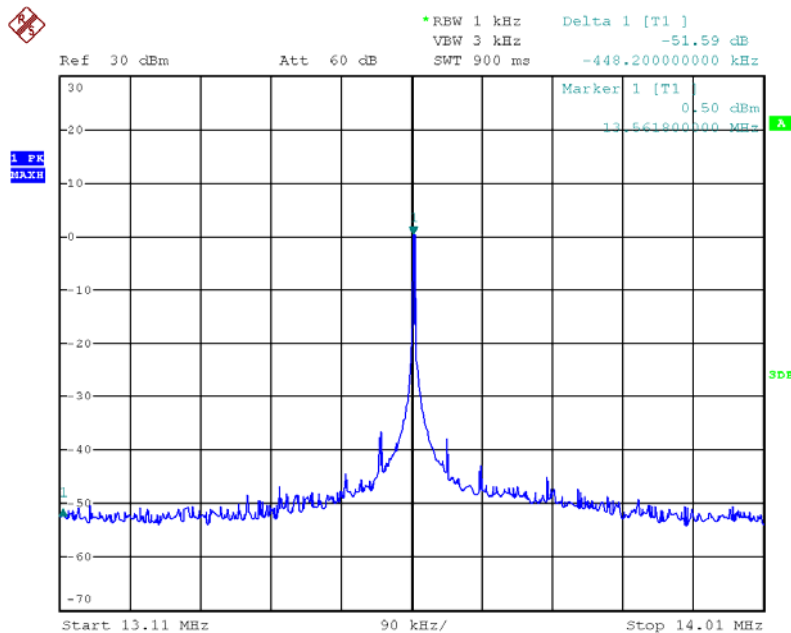



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

## 8.3 Calculation of Average Factor

The average factor is not applicable for this device as the transmitted signal is a continuously signal.

## 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.



Valued Quality. Delivered.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 (2009).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### 9.0 Equipment List

#### 1) Radiated Emissions Test

|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Equipment            | EMI Test Receiver | Biconical Antenna |
| Registration No.     | EW-2666           | EW-0571           |
| Manufacturer         | R&S               | EMCO              |
| Model No.            | ESCI7             | 3104C             |
| Calibration Date     | Jun. 20, 2013     | Nov. 01, 2013     |
| Calibration Due Date | Sep. 20, 2014     | May 01, 2015      |

|                      |                   |                             |
|----------------------|-------------------|-----------------------------|
| Equipment            | Spectrum Analyzer | Active Loop H-field Antenna |
| Registration No.     | EW-2466           | EW-0191                     |
| Manufacturer         | R&S               | EMCO                        |
| Model No.            | FSP30             | 6502                        |
| Calibration Date     | Aug. 04, 2013     | Jan. 30, 2013               |
| Calibration Due Date | Aug. 04, 2014     | Jul. 30, 2014               |

#### 2) Bandedge Measurement

|                      |                   |
|----------------------|-------------------|
| Equipment            | Spectrum Analyzer |
| Registration No.     | EW-3016           |
| Manufacturer         | R&S               |
| Model No.            | Spectrum Analyzer |
| Calibration Date     | Feb. 13, 2014     |
| Calibration Due Date | Feb. 13, 2015     |

END OF TEST REPORT