



FCC Part 74H C2PC Test Report

APPLICANT	ZAXCOM, INC.
	230 WEST PARKWAY, UNIT 9 POMPTON PLAINS N.J. 07444 USA
FCC ID	PR6ZMT
MODEL NUMBER	ZMT3.5, ZMT3.6
PRODUCT DESCRIPTION	POCKET TRANSMITTER
STANDARD APPLIED	CFR 47 Part 74
DATE SAMPLE RECEIVED	04/23/2018
DATE TESTED	08/09/2018
TESTED BY	Tim Royer
APPROVED BY	Franklin Rose
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
1178UT18TestReport	Rev1	Initial Issue	08/09/2018
1178UT18TestReport	Rev2	Re-tested PO and adjusted low end frequency	09/27/2018
1178UT18TestReport	Rev3	Updated current version of KDB's	10/02/2018

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	2
GENERAL INFORMATION	3
RESULTS SUMMARY	4
MODEL TYPES, SUMMARY	4
CHANGE(S) TO EUT, SUMMARY.....	4
RF POWER OUTPUT	5
TEST DATA: MEAN OUTPUT POWER MEASUREMENT TABLE	5
EMISSION MASK	6
TEST DATA: 470.05 MHZ EMISSION MASK PLOT.....	8
TEST DATA: 482.1 MHZ EMISSION MASK PLOT	9
TEST DATA: 512.1 MHZ EMISSION MASK PLOT	10
TEST DATA: 607.9 MHZ EMISSION MASK PLOT	11
STATEMENT OF MEASUREMENT UNCERTAINTY.....	12
EMC EQUIPMENT LIST	13

GENERAL REMARKS

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Tested by:



Name and Title	Tim Royer, Project Manager / EMC Testing Engineer
Date	08/08/2018

Reviewed and Approved by:



Name and Title	Franklin Rose, Project Manager / EMC Testing Technician
Date	08/10/2018

GENERAL INFORMATION

EUT Description	BELTPACK WIRELESS MICROPHONE
FCC ID	PR6ZMT
Model Number	ZMT3.5, ZMT3.6
Operating Frequency	Model ZMT3.5: 470.1 – 554.0 Model ZMT3.6: 512.0 – 607.9 MHz
Test Frequencies	Model ZMT3.5: 470.1, 482.1 Model ZMT3.6: 512.1, 607.9
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input type="checkbox"/> Pre-Production
	<input checked="" type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
Antenna Connector	BNC
Test Conditions	The temperature was 26°C Relative humidity of 50%.
Modification to the EUT	No Modification to EUT.
Test Exercise	The EUT was placed in continuous transmit and was operated in "Test Mode" for digital emissions tests.
Applicable Standards	FCC CFR 47 Part 2, & 74, KDB 971168 D01 V03R01, KDB 206256 D01 v02, ANSI/TIA 603-D:2010, ANSI C63.4 2014, ANSI C63.26 2015, ETSI EN 300-422-1 V1.4.2
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070

RESULTS SUMMARY

FCC Rule Part	Requirement	Test Item	Result
PART 2.1046(a), 74.861(e) (1) (ii), (iii)	Conducted Power	RF Power Output	PASS
PART 74.861(e)(7), ETSI EN 300-422-1 s. 8.3.2	Unwanted Emissions	Emission Mask	PASS

MODEL TYPES, SUMMARY

The device is manufactured in two models, the ZMT3.5 and ZMT3.6. The models are electrically identical, and differ only that they have been programmed with different frequency ranges.

CHANGE(S) TO EUT, SUMMARY

The changes to Part 74 H, specifically in the 600 MHz band have impact on the granted function of this device. In order to comply with the changes outlined in KDB 206256 D01 v02 and KDB 971168 D01 v03r01, this device has been tested to show compliance with the new rulings.

This device's hardware has not been altered; only the software/firmware settings have been changed in order to become compliant with the newly updated rules, as per KDB 206256, D01 v02 sections II and III. For more specific information, please see the updated Operational Description of the device.

Both models of this device previously granted on the following frequency bands:

Date of Grant: 01/23/2017

ZMT3.5 & ZMT3.6

482 – 608 MHz

614 – 697.9 MHz

And only the software has been altered to limit operation to:

ZMT3.5

470.1 – 554

ZMT3.6

512 – 607.9

RF POWER OUTPUT

Rule Part No.: 2.1046(a), 74.861(e) (1) (ii), (iii)

Requirement:

§74.861 Technical requirements.

(e) For low power auxiliary stations operating in the 600 MHz duplex gap and the bands allocated for TV broadcasting, the following technical requirements apply:


(1) The power may not exceed the following values.

(ii) 470-608 and 614-698: 250 mW conducted power

(iii) 600 MHz duplex gap: 20 mW EIRP

Procedure: KDB 971168 D01 Average Power Measurements section 5.2.1

Setup Diagram:

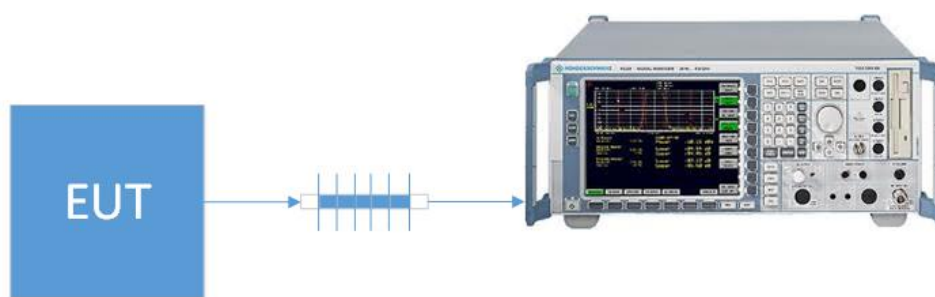

Test Data: Mean Output Power Measurement Table

Tuned Frequency (MHz)	Power Output		
	Level (dBm)	Level (mW)	Margin (mW)
470.1000	15.49	35.4	214.6
482.0000	15.06	32.1	217.9
512.0000	15.41	34.8	215.2
607.9000	15.30	33.9	216.1

EMISSION MASK

Rule Part No.: FCC CFR 47 PART 74.861(e)(7)

(7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

Requirement: ETSI EN 300 422-1 Section 8.3.2

- (c) Compliance for emission mask and spurious emission requirements shall be demonstrated using the applicable measurement procedures of ETSI EN 300 422-1. Compliance with the emission limits shall be demonstrated using a RMS Average detector. Emissions shall be investigated up to the 10th harmonic of the fundamental. All other technical requirements shall be demonstrated utilizing the procedures specified in ANSI C63.26,⁴ as applicable.

EMISSION MASK

8.3.2.2 Limits

The transmitter output spectrum shall be within the mask defined in figure 4. This mask may also be used for analogue.


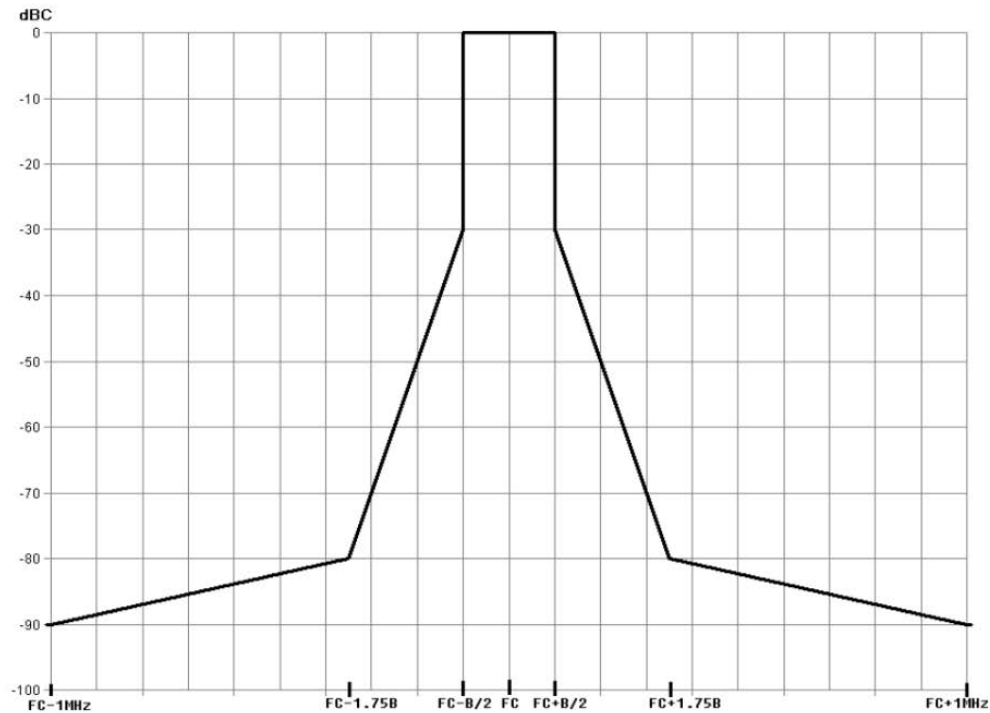


Figure 4: Spectrum mask for digital systems below 1 GHz


Procedure: ETSI EN 300 422-1 s. 8.3.2
KDB 971168 D01 Spurious Emissions at antenna term section 6
ANSI C63.26, 5.4.4 (using Test Setup from TIA 603-E 2.2.11, below)

Setup Diagram:

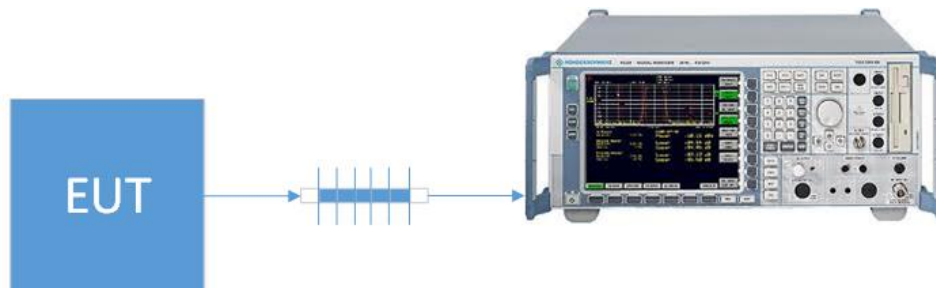

EMISSION MASK

Test Data: 470.1 MHz Emission Mask Plot

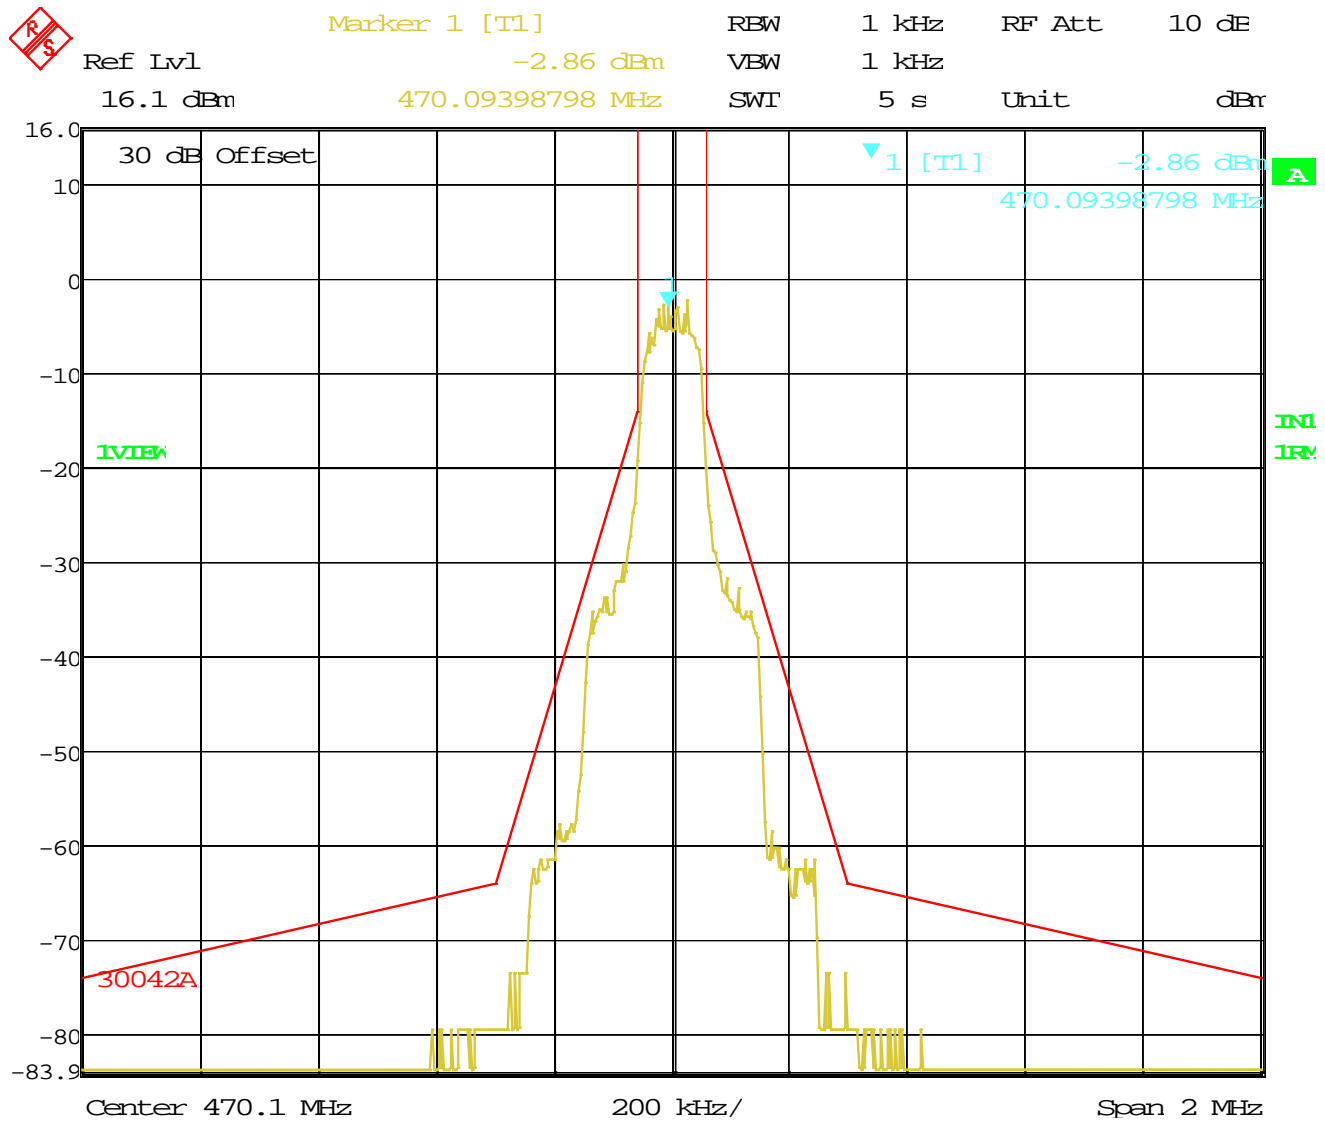


Date: 1.JAN.1997 03:12:36

EMISSION MASK

Test Data: 482.0 MHz Emission Mask Plot




Marker 1 [T1] RBW 1 kHz RF Att 10 dB
 Ref Lvl 4.34 dBm VBW 1 kHz
 18 dBm 482.19018036 MHz SWT 5 s Unit dBm

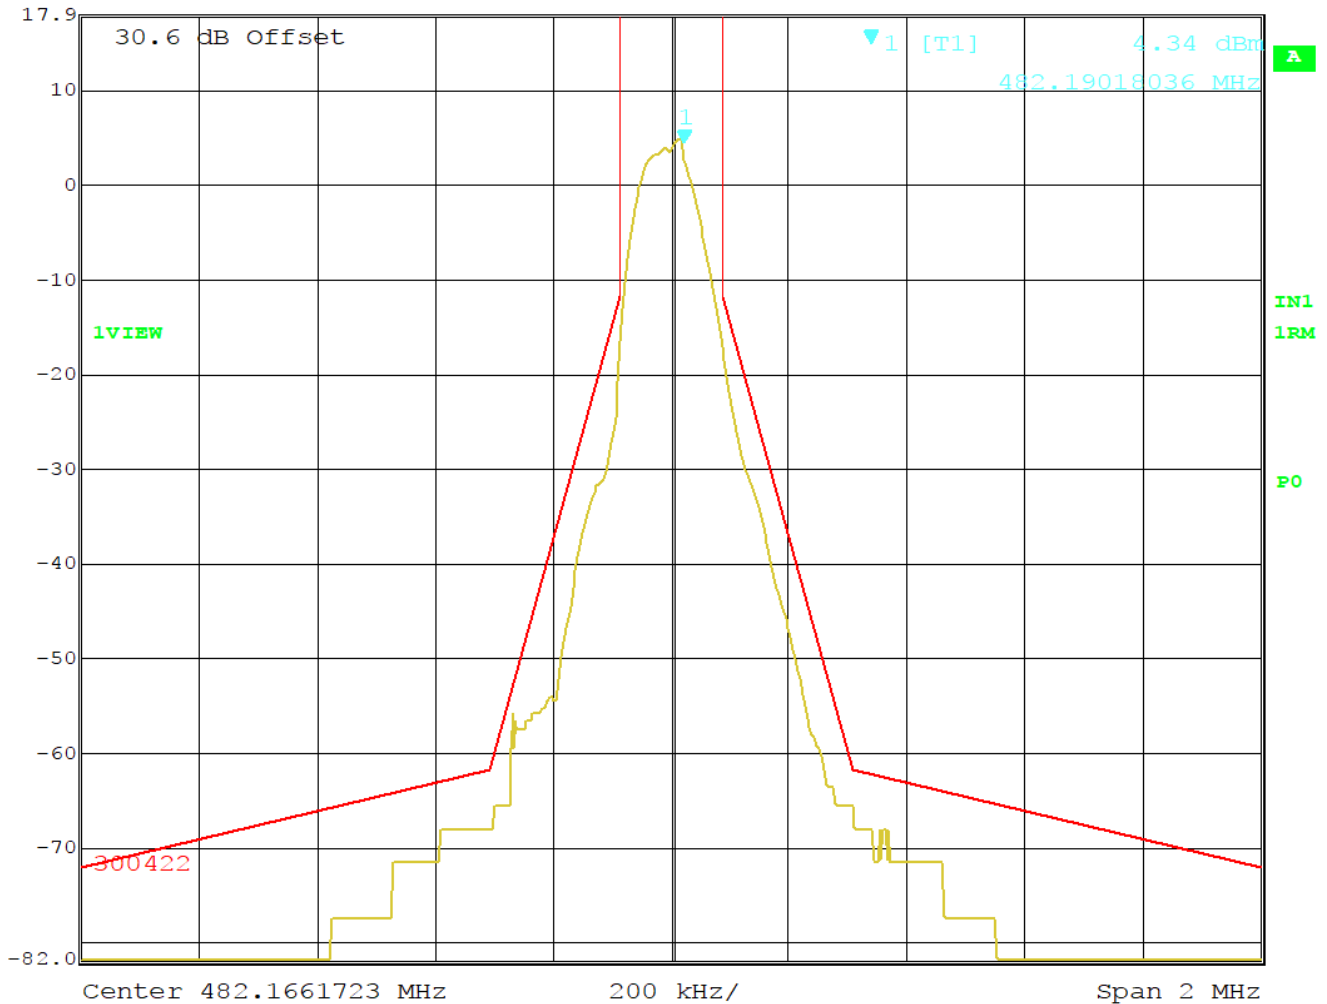

Date: 1.JAN.1997 04:57:37

EMISSION MASK

Test Data: 607.9 MHz Emission Mask Plot

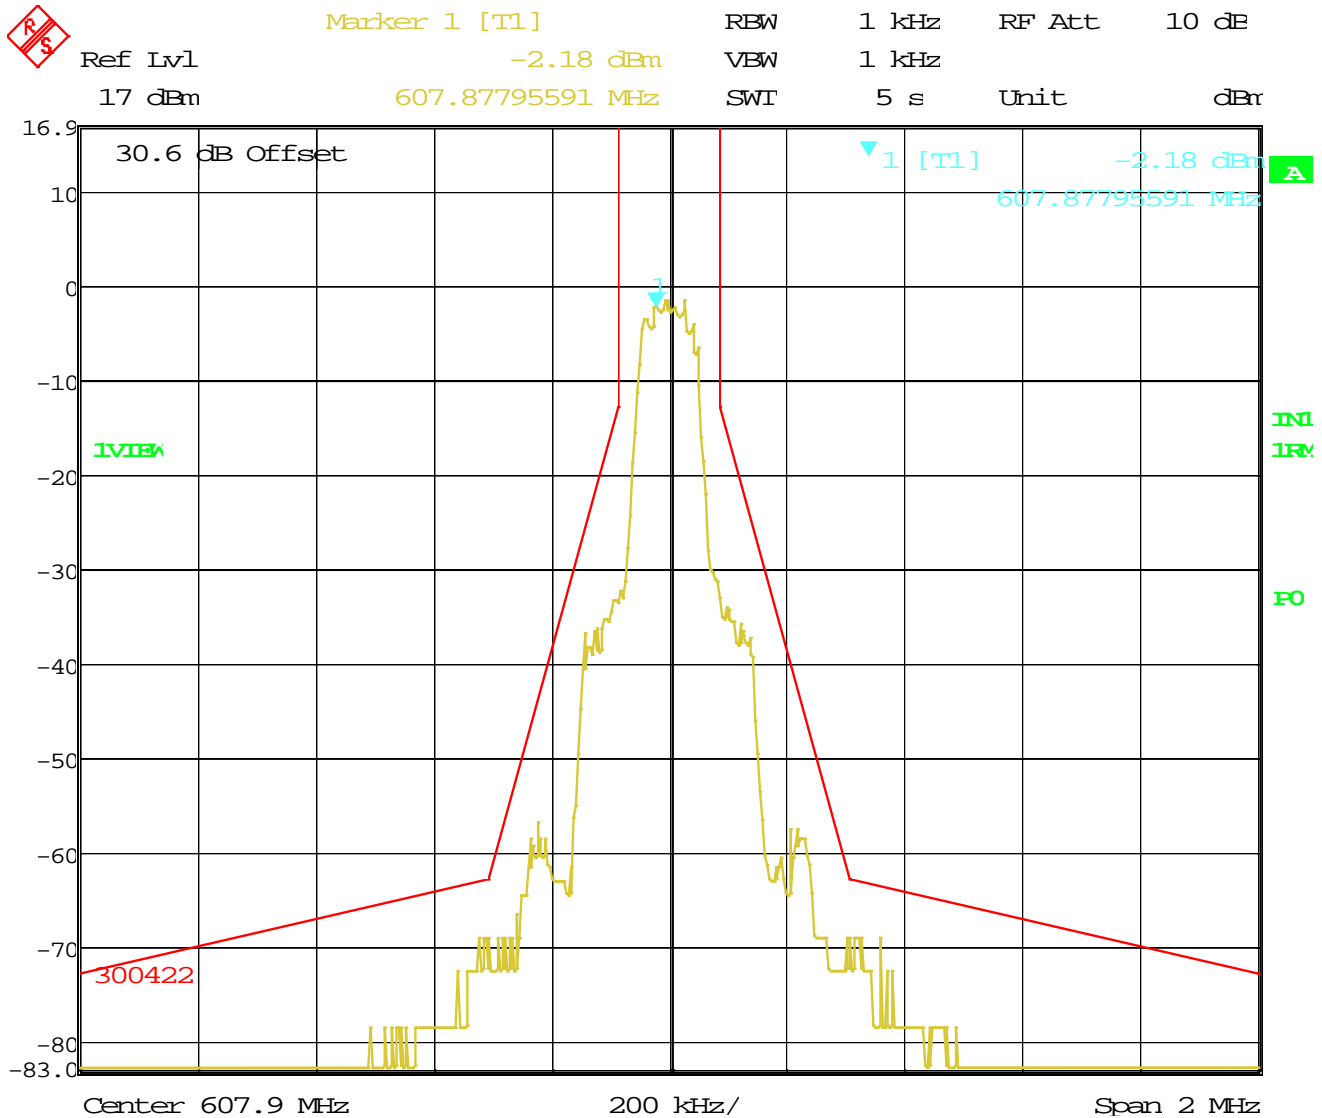

Date: 1.JAN.1997 05:04:44

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93 dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86 dB	
Occupied Bandwidth	$\pm 2.65\%$	
Audio Frequency Response	± 1.86 dB	
Modulation limiting	$\pm 1.88\%$	
Radiated RF Power	± 1.4 dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	$\pm 1.88\%$	
Within 6kHz and 25kHz of audio Freq.	$\pm 2.04\%$	
Rad Emissions Sub Meth up to 26.5GHz	± 2.14 dB	
Adjacent channel power	± 1.47 dB	(1)
Transient Frequency Response	$\pm 1.88\%$	
Temperature	$\pm 1.0^{\circ}$ C	(1)
Humidity	$\pm 5.0\%$	

Notes: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Sweep/Signal Generator	Anritsu	68369B	985112	11/08/17	11/08/19
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/16/16	08/16/18
Tunable Notch Filter 250-850 MHz	Eagle	TNF-200	250-850 MHz (#19)	01/19/17	11/19/19

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT