



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

BT Wireless Headset

Model: BH600; H7000; BT600

Trade Name: Acrox; hp

Issued to

**Acrox Technologies Co., Ltd.
4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan, R.O.C.**

Issued by

**Compliance Certification Services Inc.
No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township,
Taoyuan County 33841, Taiwan, R.O.C.**

TEL: 886-3-324-0332

FAX: 886-3-324-5235

<http://www.ccsrf.com>

service@ccsrf.com



Testing Laboratory
0363

Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.*



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 25, 2013	Initial Issue	ALL	Landy Huang



TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	EUT DESCRIPTION	5
3	TEST METHODOLOGY	6
3.1.	EUT CONFIGURATION	6
3.2.	EUT EXERCISE	6
3.3.	GENERAL TEST PROCEDURES	6
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5.	DESCRIPTION OF TEST MODES	8
4	INSTRUMENT CALIBRATION	9
4.1.	MEASUREMENT EQUIPMENT USED	9
4.2.	MEASUREMENT UNCERTAINTY	11
5	FACILITIES AND ACCREDITATIONS	12
5.1.	FACILITIES	12
5.2.	EQUIPMENT	12
5.3.	TABLE OF ACCREDITATIONS AND LISTINGS	13
6	SETUP OF EQUIPMENT UNDER TEST	14
6.1.	SETUP CONFIGURATION OF EUT	14
6.2.	SUPPORT EQUIPMENT	14
7	FCC PART 15.247 REQUIREMENTS	15
7.1.	20DB BANDWIDTH	15
7.2.	PEAK POWER	19
7.3.	AVERAGE POWER	21
7.4.	BAND EDGES MEASUREMENT	22
7.5.	FREQUENCY SEPARATION	31
7.6.	NUMBER OF HOPPING FREQUENCY	33
7.7.	TIME OF OCCUPANCY (DWELL TIME)	36
7.8.	SPURIOUS EMISSIONS	48
7.9.	POWERLINE CONDUCTED EMISSIONS	66
8	PHOTOGRAPHS OF TEST SETUP	69



1 TEST RESULT CERTIFICATION

Applicant: **Acrox Technologies Co., Ltd.**
4F., No.89, Minshan St., Neihu Dist., Taipei City 114,
Taiwan, R.O.C.

Manufacturer: **Acrox Technologies Co., Ltd.**
4F., No.89, Minshan St., Neihu Dist., Taipei City 114,
Taiwan, R.O.C.

Equipment Under Test: BT Wireless Headset

Trade Name: Acrox; hp

Model: BH600; H7000; BT600

Date of Test: June 11 ~ 21, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Stan Lin
Section Manager

Angel Hu
Section Manager



2 EUT DESCRIPTION

Product	BT Wireless Headset								
Trade Name	Acrox; hp								
Model Number	BH600; H7000; BT600								
Model Name Discrepancy	<p>1. All the model numbers (list on this report) are identical, just for marketing purpose only except Trade Name.</p> <table border="1"> <thead> <tr> <th>Model Number</th> <th>Trade Name</th> </tr> </thead> <tbody> <tr> <td>BH600</td> <td>Acrox</td> </tr> <tr> <td>BT600</td> <td>Acrox</td> </tr> <tr> <td>H7000</td> <td>hp</td> </tr> </tbody> </table> <p>2. Client consigns only one model sample (Model number: BH600) to test. Therefore testing Lab. just guarantees the units, which have been tested.</p>	Model Number	Trade Name	BH600	Acrox	BT600	Acrox	H7000	hp
Model Number	Trade Name								
BH600	Acrox								
BT600	Acrox								
H7000	hp								
EUT Power Rating	Power from PC								
Operating Frequency Range	2402 ~ 2480 MHz								
Transmit Power	5.42 dBm (0.0035W)								
Modulation Technique	GFSK; $\pi/4$ -DQPSK; 8DPSK								
Transmit Data Rate	GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps; 8DPSK for 3Mbps								
Number of Channels	79 Channels								
Antenna Specification	PCB Antenna / Gain: 2.0dBi								

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: PRDHS01 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3. GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5. DESCRIPTION OF TEST MODES

The EUT (model: BH600) had been tested under operating condition and had been reported as worst case on this test report.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

Following channels were selected for the for radiated emission testing only as listed below:

Tested Channel	Modulation Type	Packet Type	Date Rate
Low, Mid, High	GFSK	DH 5	1
Low, Mid, High	8DPSK	DH 5	3

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) with 1Mbps data rate was chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (X axis) and the worst case was recorded.



4 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.1. MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/13/2014
Spectrum Analyzer	Agilent	N9010A	MY52220817	02/22/2014
Power meter	Anritsu	ML2495A	1033009	08/19/2013
Power Sensor	Anritsu	MA2411B	0917221	08/19/2013

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/13/2014
Pre-Amplifier	HP	8447D	2944A06530	01/02/2014
Pre-Amplifier	EMEC	EM01M26G	060570	10/30/2013
Pre-Amplifier	MITEQ	AMF-6F-26040 0-40-8P	985646	08/06/2013
EMI Test Receiver	SCHAFFNER	SCR 3501	430	03/24/2014
Loop Antenna	EMCO	6502	2356	06/12/2014
Bilog Antenna	SCHWAZBECK	VULB9160	3084	09/26/2013
Horn Antenna	EMCO	3115	9602-4659	06/16/2014
Horn Antenna	EMCO	3116	00026370	10/07/2013
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. N.C.R = No Calibration Request.



Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101300	09/03/2013
LISN	R&S	ENV216	100069	06/16/2014
LISN	FCC	FCC-LISN-50/2 50-16-2-07	06013	12/04/2013
ISN	TESEQ	ISN-T8	30842	08/19/2013
Current Probe	FCC	F-35	506	07/23/2013
ISN	FCC	FCC-TLISN-T4- 02	20396	07/05/2013
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.



4.2. MEASUREMENT UNCERTAINTY

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028-1 [2] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 6 is based on such expansion factors.

Table 6: Maximum measurement uncertainty

Parameter	Uncertainty
RF frequency	$\pm 1 \cdot 10^{-5}$
Total RF power conducted	$\pm 1,5$ dB
RF power density, conducted	± 3 dB
Spurious emissions, conducted	± 3 dB
All emissions, radiated	± 6 dB
Humidity	± 5 %
Temperature	$\pm 1^{\circ}\text{C}$
DC and low frequency voltages	± 3 %
Powerline Conducted Emission	± 2.0518



5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, Taiwan, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.





Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 TESTING CERT #0824.01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-1930/1646
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS-Gen Issue 3	

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6 SETUP OF EQUIPMENT UNDER TEST

6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2. SUPPORT EQUIPMENT

For Conducted & Radiated Emission measurement (Above 1GHz):							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	M285	NU2503544	FCC DoC	LEO	Unshielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Test Jig	N/A	N/A	N/A	N/A	Unshielded, 0.1m	Shielded, 1.8m

For Radiated Emission measurement (Below 1GHz):							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	D400	0932RY	E2K24GBRL	DELL	Unshielded, 1.8m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	LCD Monitor	U2410	CN-OJ257M-72872 -99N-ODGL	FCC DoC	DELL	Shielded, 1.8m	Unshielded, 1.8m
3.	USB Mouse	MOA8BO	N/A	FCC DoC	DELL	Shielded, 2.0m	N/A

For Power line conducted emission measurement:							
No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	M285	NU2503544	FCC DoC	LEO	Unshielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	LCD Monitor	U2410	CN-OJ257M-72872 -99N-ODGL	FCC DoC	DELL	Shielded, 1.8m	Unshielded, 1.8m
3.	Modem	DM-1414	304012261	IFAXDM1414	ACEEX	Shielded, 1.8m	Unshielded, 1.8m

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7 FCC PART 15.247 REQUIREMENTS

7.1. 20DB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION

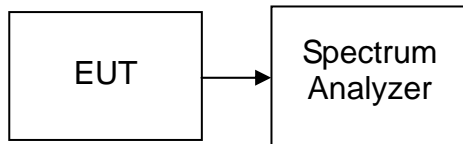

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted



Test Plot


GFSK Mode

20dB Bandwidth (CH Low)

Agilent

R L

Mkr1 940 kHz
-0.70 dB

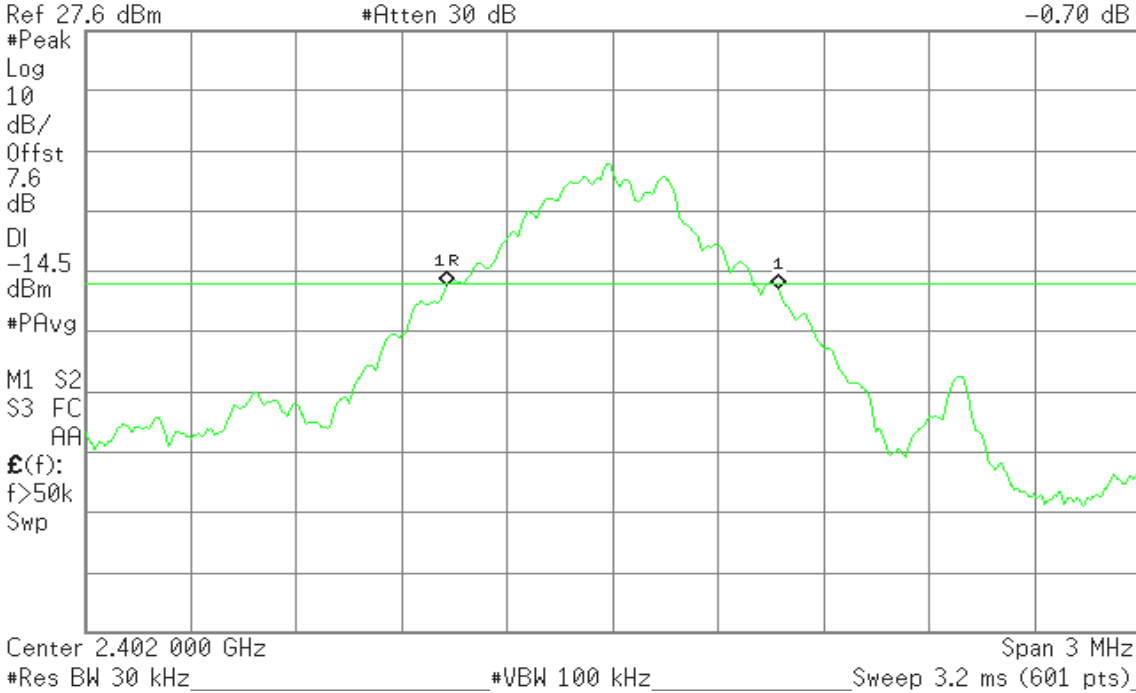


20dB Bandwidth (CH Mid)

Agilent

R L

Mkr1 935 kHz
-0.74 dB

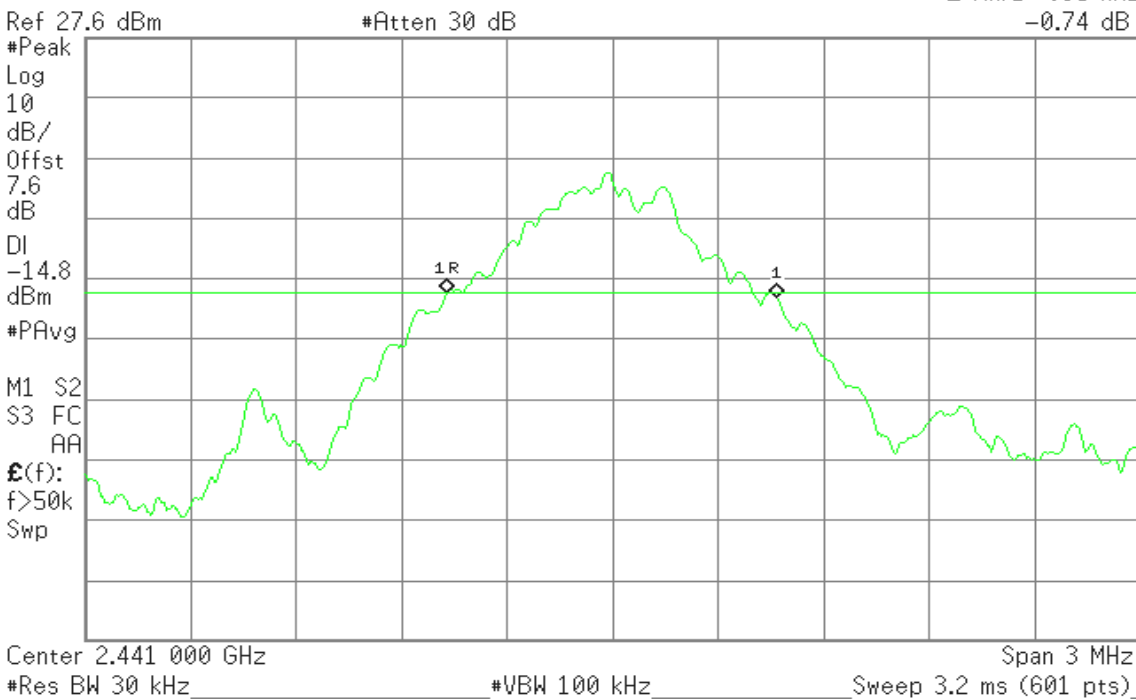




20dB Bandwidth (CH High)

Agilent

R L

Mkr1 940 kHz
-0.36 dB

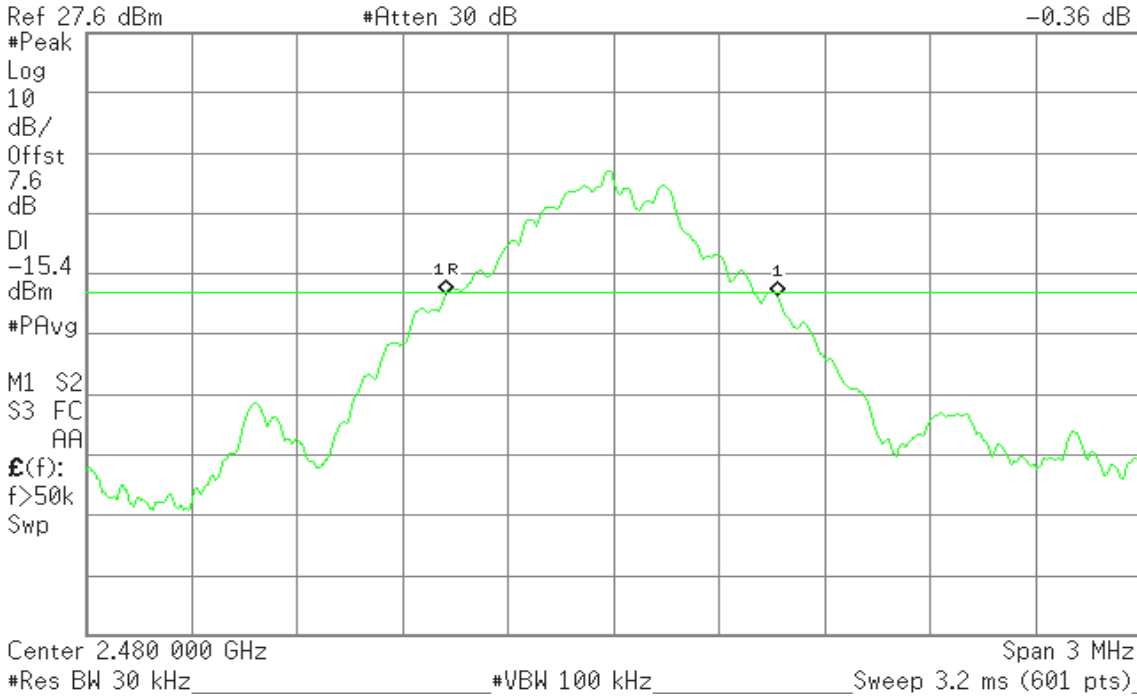


8DPSK Mode

20dB Bandwidth (CH Low)

Agilent

R L

Mkr1 1.275 MHz
-0.29 dB

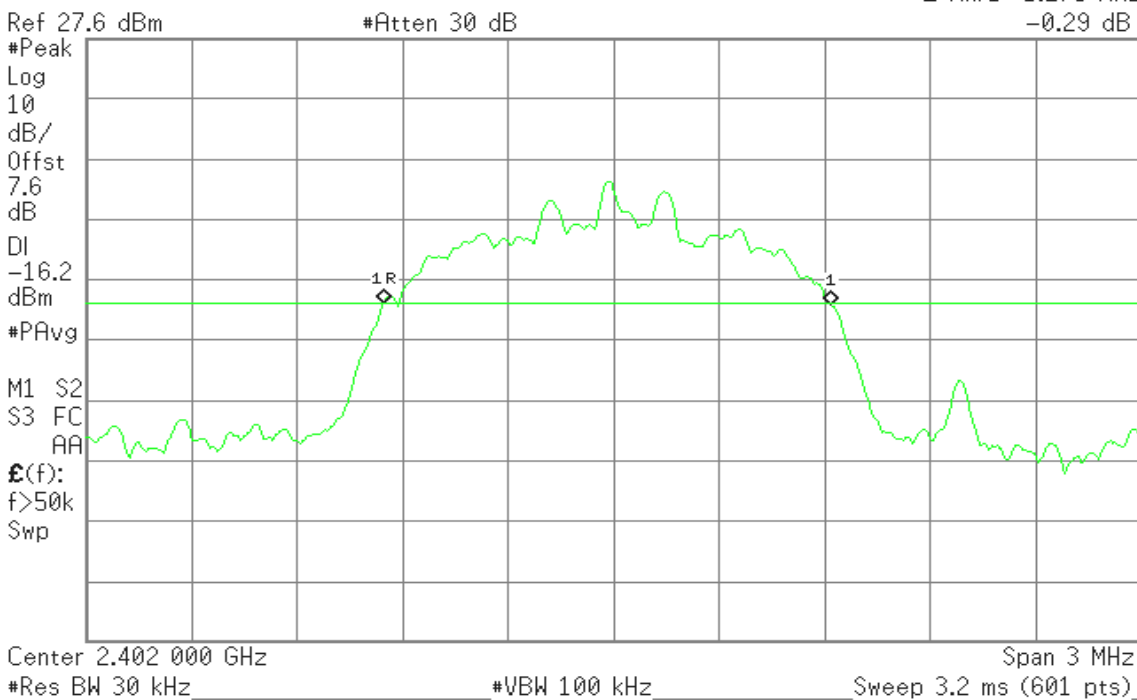




20dB Bandwidth (CH Mid)

Agilent

R L

Mkr1 1.260 MHz
-0.06 dB

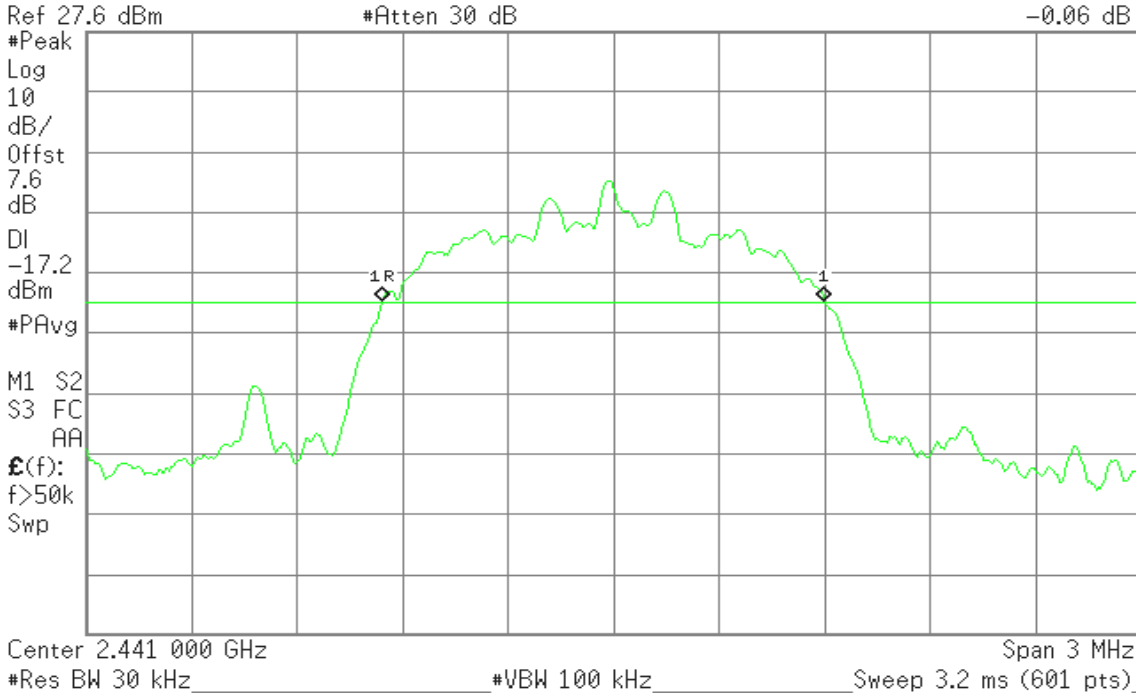


20dB Bandwidth (CH High)

Agilent

R L

Mkr1 1.260 MHz
-0.15 dB

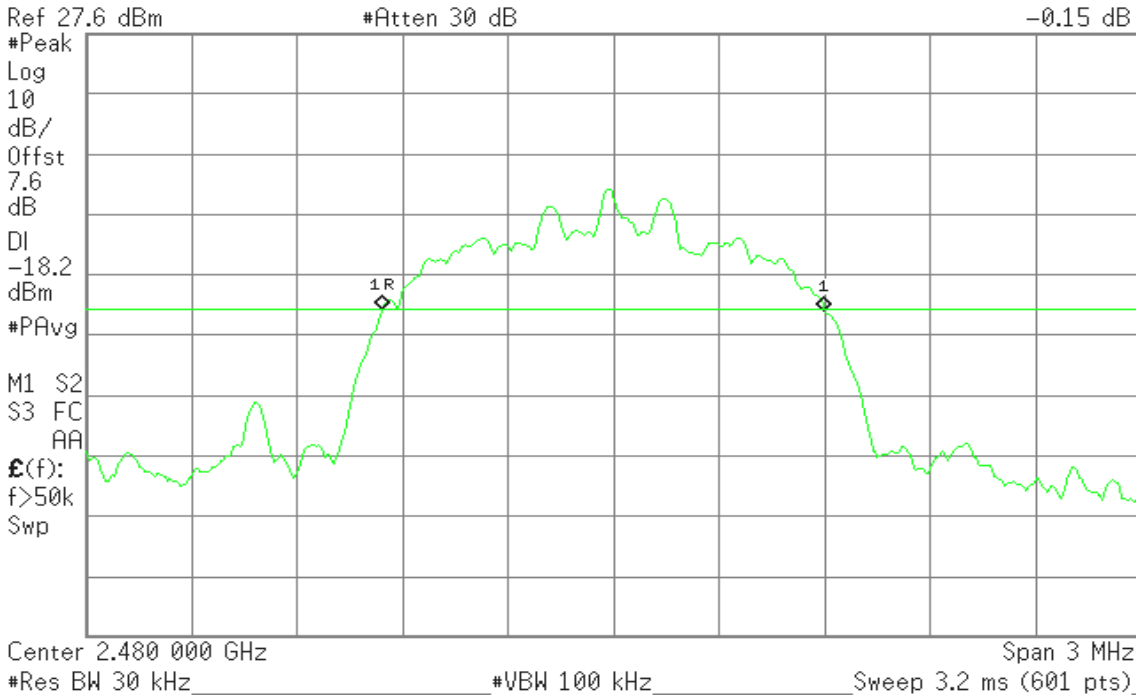




7.2. PEAK POWER

LIMIT

According to §15.247, the maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
3. According to §15.247(b) (4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST CONFIGURATION

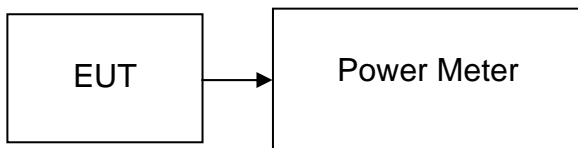

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted



TEST DATA

GFSK

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2402	5.42	0.0035	0.125	PASS
Mid	2441	5.05	0.0032		PASS
High	2480	4.58	0.0029		PASS

8DPSK

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2402	4.41	0.0028	0.125	PASS
Mid	2441	3.37	0.0022		PASS
High	2480	2.37	0.0017		PASS




7.3. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION

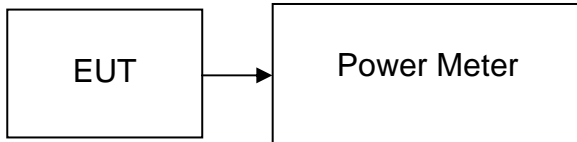

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

GFSK

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	3.88	0.0024
Mid	2441	3.42	0.0022
High	2480	3.07	0.0020

8DPSK

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	1.04	0.0013
Mid	2441	-0.15	0.0010
High	2480	-1.23	0.0008




7.4. BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

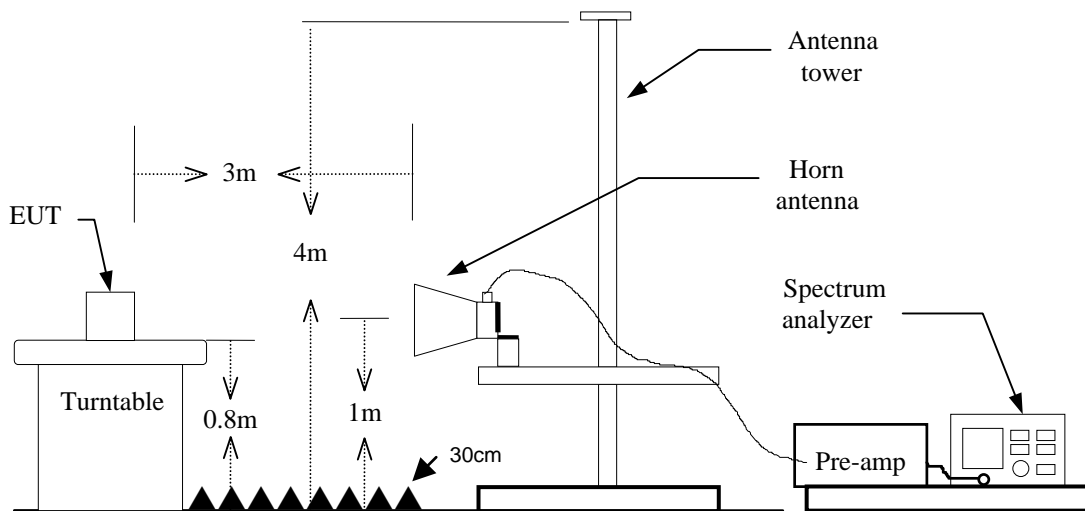

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=100ms
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

No non-compliance noted

TEST DATA

Refer to attach spectrum analyzer data chart.



Band Edges (Bluetooth GFSK / CH Low)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr3 2.385 37 GHz
44.95 dBµV/m

Ref 113 dBµV/m

#Atten 10 dB

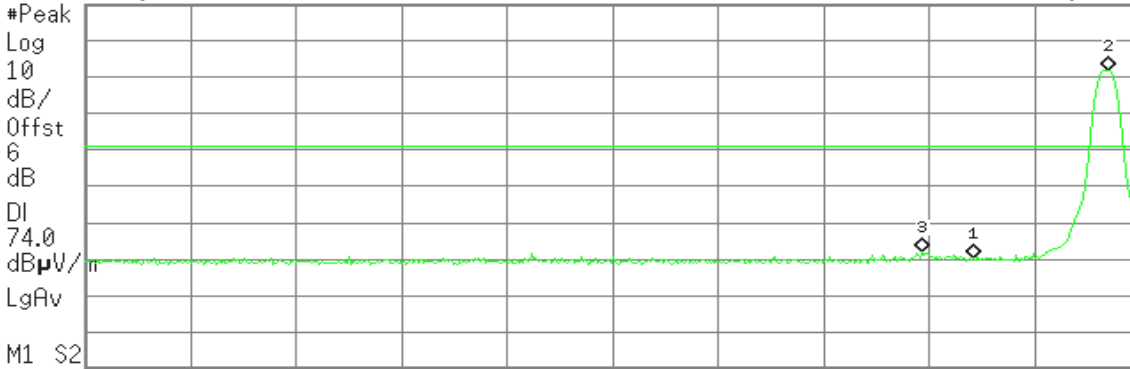

Start 2.310 00 GHz

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 00 GHz	43.20 dBµU/m
2	(1)	Freq	2.402 15 GHz	94.86 dBµU/m
3	(1)	Freq	2.385 37 GHz	44.95 dBµU/m

Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr2 2.401 99 GHz
82.05 dBµV/m

Ref 113 dBµV/m

#Atten 10 dB



Start 2.310 00 GHz ^

Stop 2.405 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 7.408 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 00 GHz	30.17 dBµU/m
2	(1)	Freq	2.401 99 GHz	82.05 dBµU/m
3	(1)	Freq	2.385 84 GHz	32.54 dBµU/m




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr2 2.402 15 GHz
93.21 dBµV/m

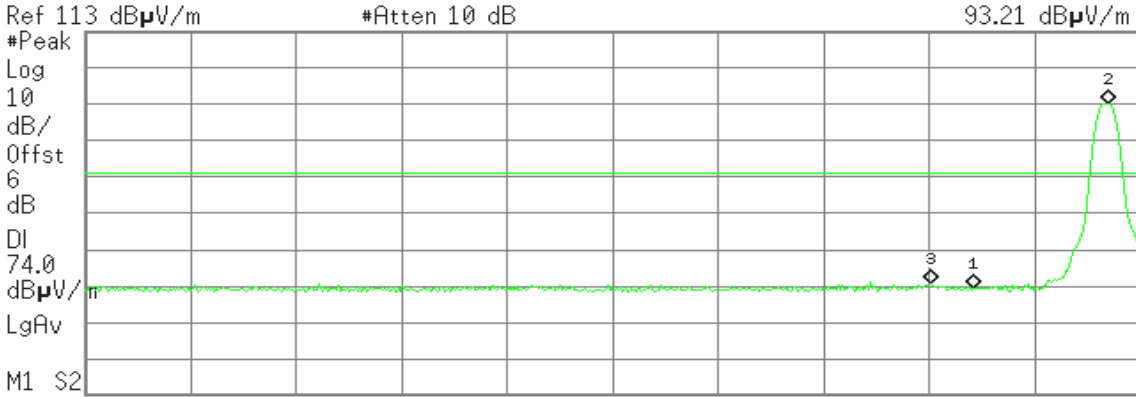

Ref 113 dBµV/m #Atten 10 dB

Start 2.310 00 GHz Stop 2.405 00 GHz

#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.398 00 GHz	42.28 dBµU/m
2	(1)	Freq	2.402 15 GHz	93.21 dBµU/m
3	(1)	Freq	2.386 16 GHz	43.57 dBµU/m


Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr3 2.386 00 GHz
31.72 dBµV/m

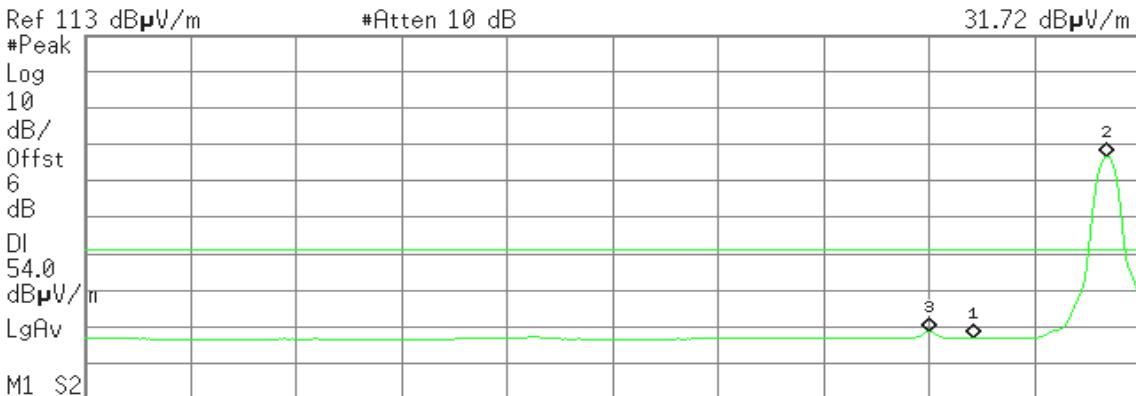

Ref 113 dBµV/m #Atten 10 dB

Start 2.310 00 GHz Stop 2.405 00 GHz

#Res BW 1 MHz #VBW 10 Hz Sweep 7.408 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.398 00 GHz	29.88 dBµU/m
2	(1)	Freq	2.401 99 GHz	79.82 dBµU/m
3	(1)	Freq	2.386 00 GHz	31.72 dBµU/m



Band Edges (Bluetooth GFSK / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.479 80 GHz
92.16 dBµV/m

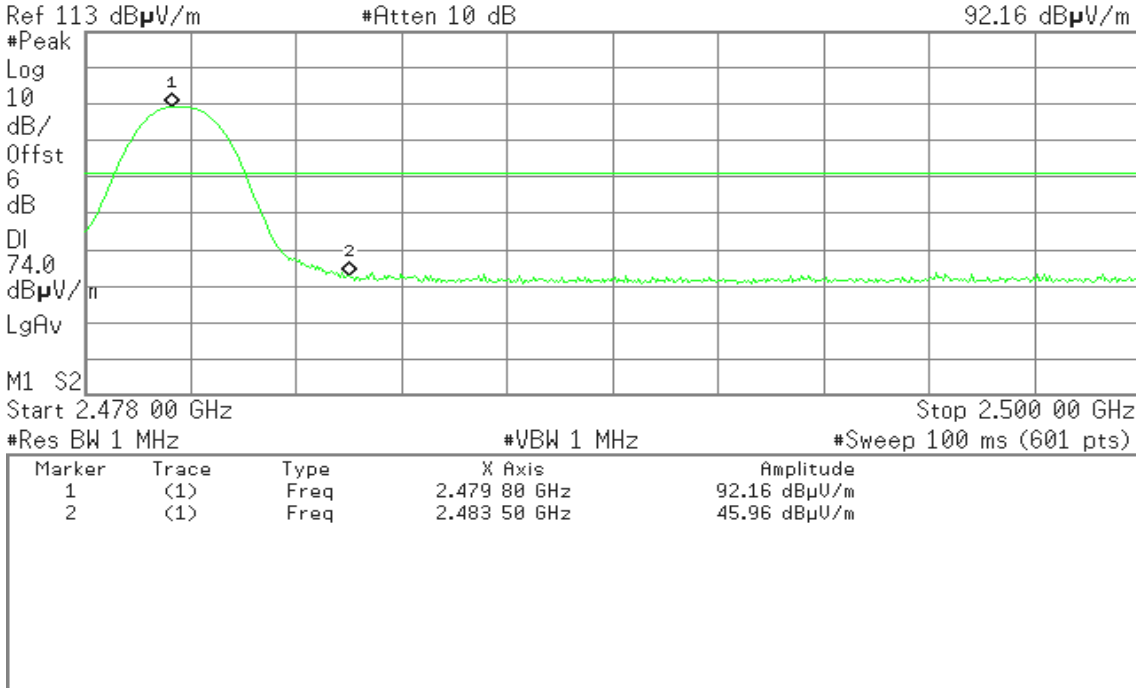


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.480 02 GHz
80.03 dBµV/m

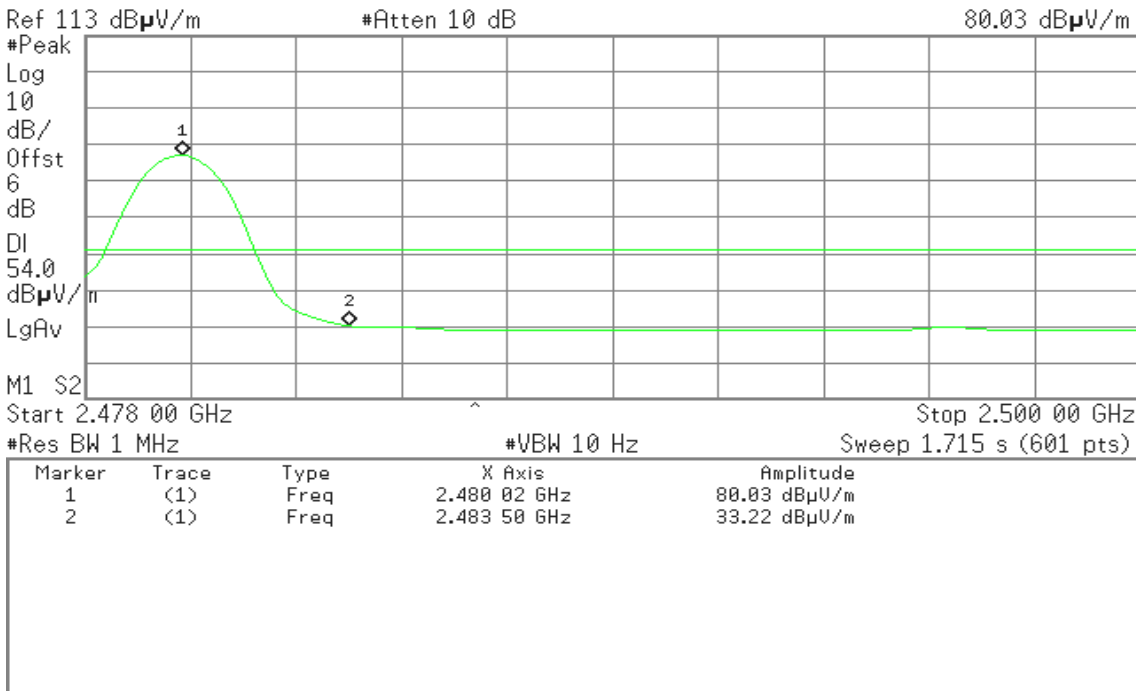




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 80 GHz
91.09 dBµV/m

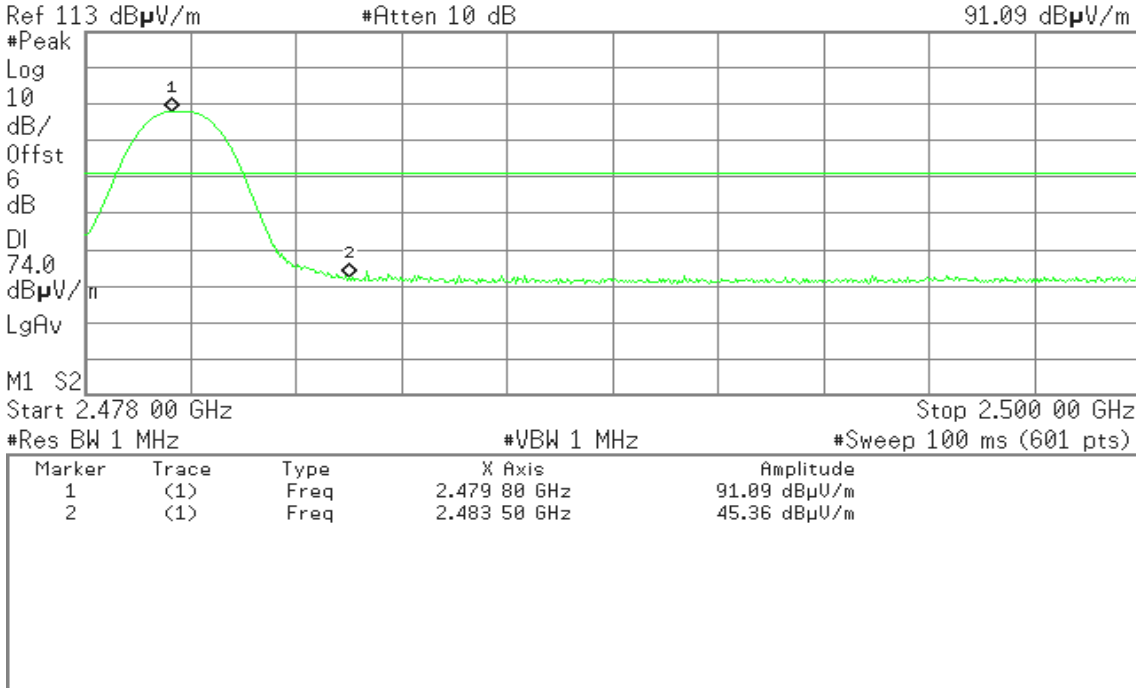


Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 98 GHz
78.92 dBµV/m

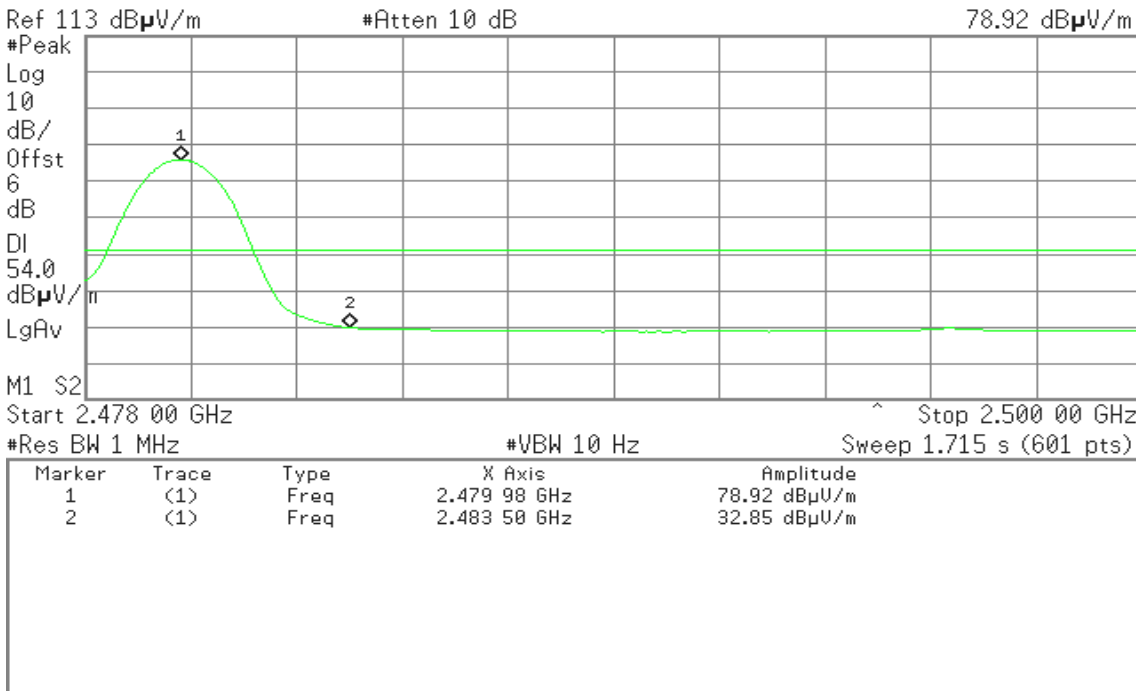



Band Edges (Bluetooth 8DPSK / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr2 2.401 99 GHz
93.20 dBµV/m

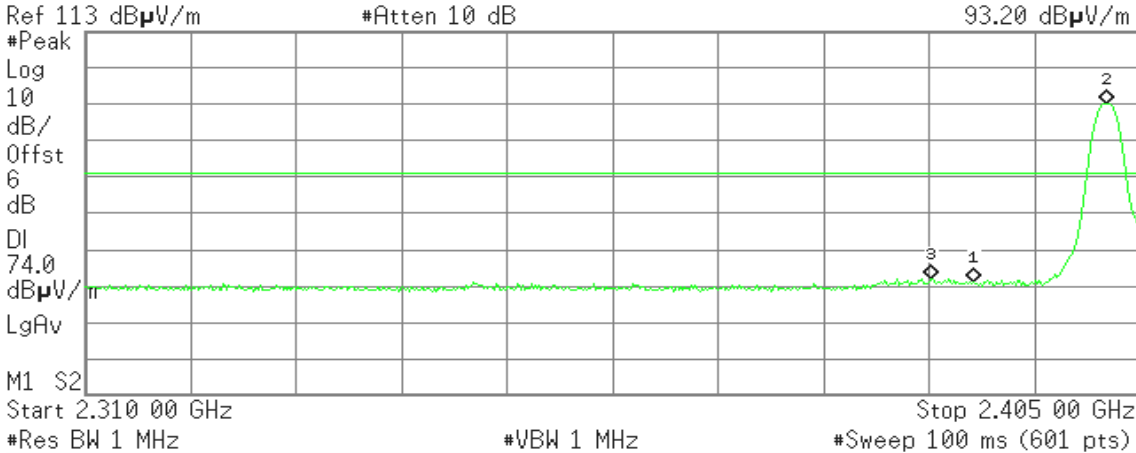

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.398 00 GHz	44.18 dBµU/m
2	(1)	Freq	2.401 99 GHz	93.20 dBµU/m
3	(1)	Freq	2.386 16 GHz	44.84 dBµU/m


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr2 2.401 99 GHz
78.73 dBµV/m

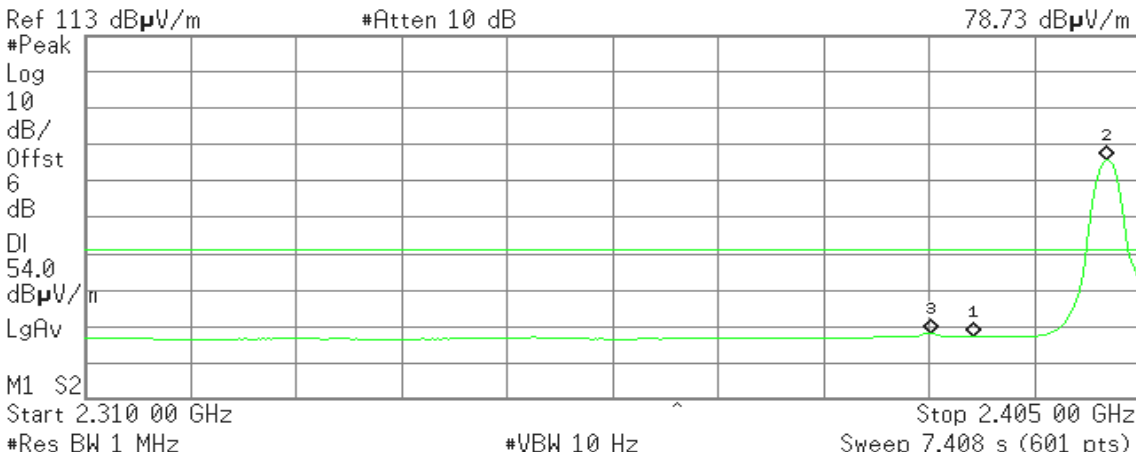

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.398 00 GHz	30.20 dBµU/m
2	(1)	Freq	2.401 99 GHz	78.73 dBµU/m
3	(1)	Freq	2.386 16 GHz	31.28 dBµU/m




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr2 2.401 99 GHz
92.14 dBµV/m

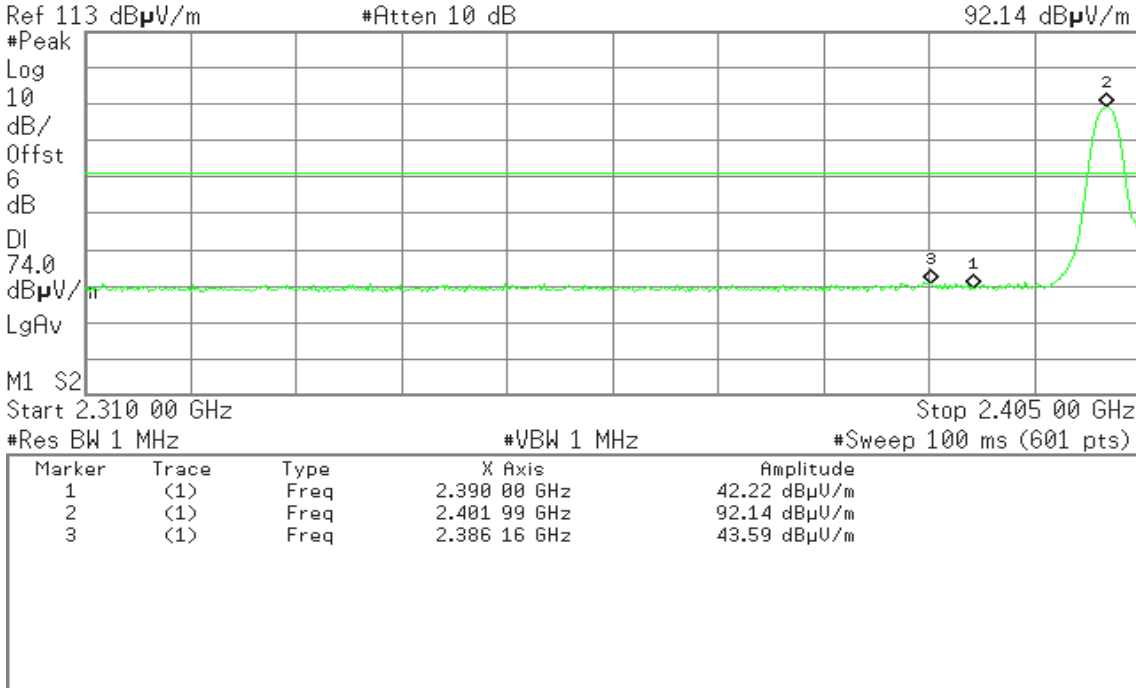


Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr2 2.401 99 GHz
77.63 dBµV/m

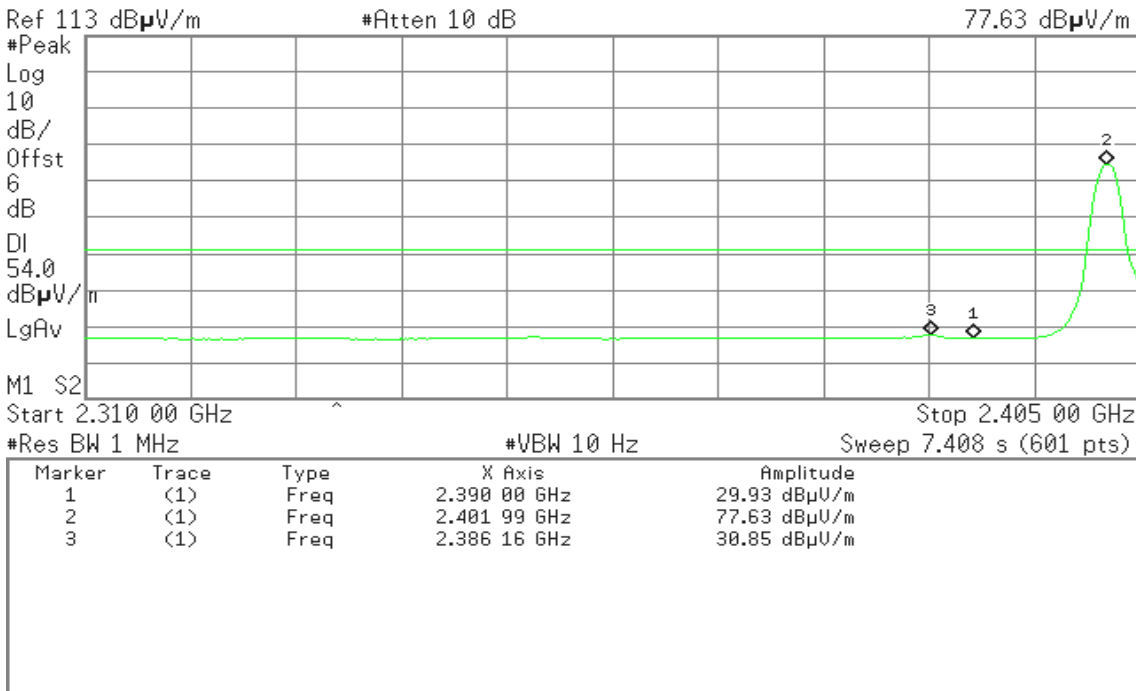



Band Edges (Bluetooth 8DPSK / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.479 94 GHz
90.25 dBµV/m

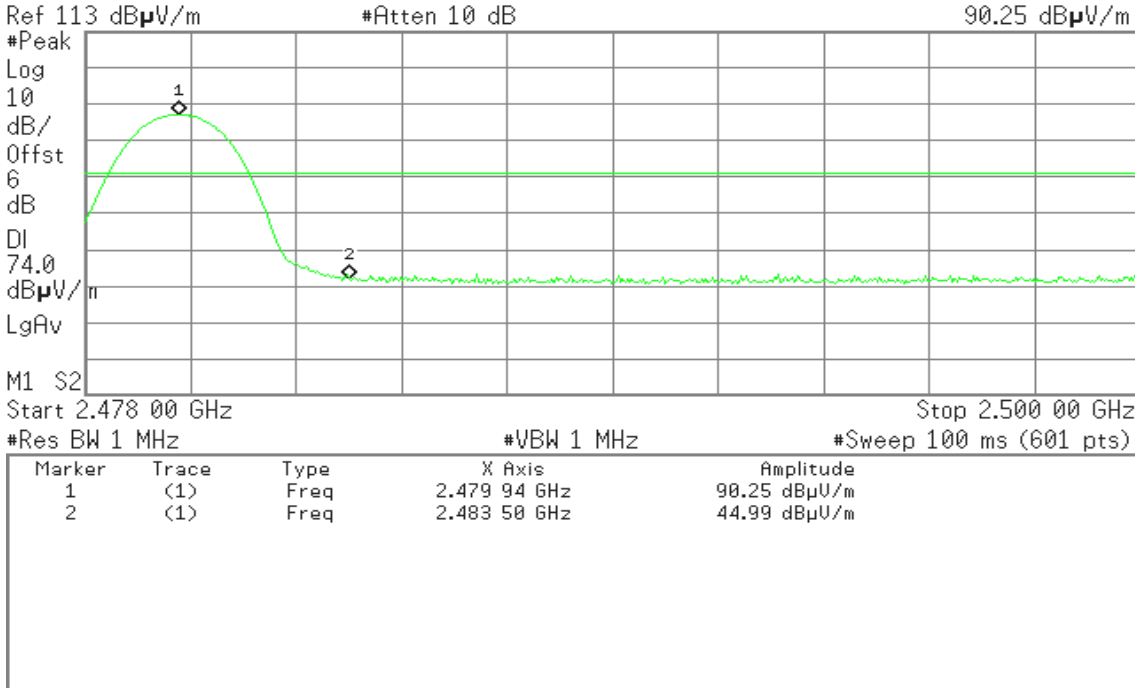


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.479 98 GHz
76.04 dBµV/m

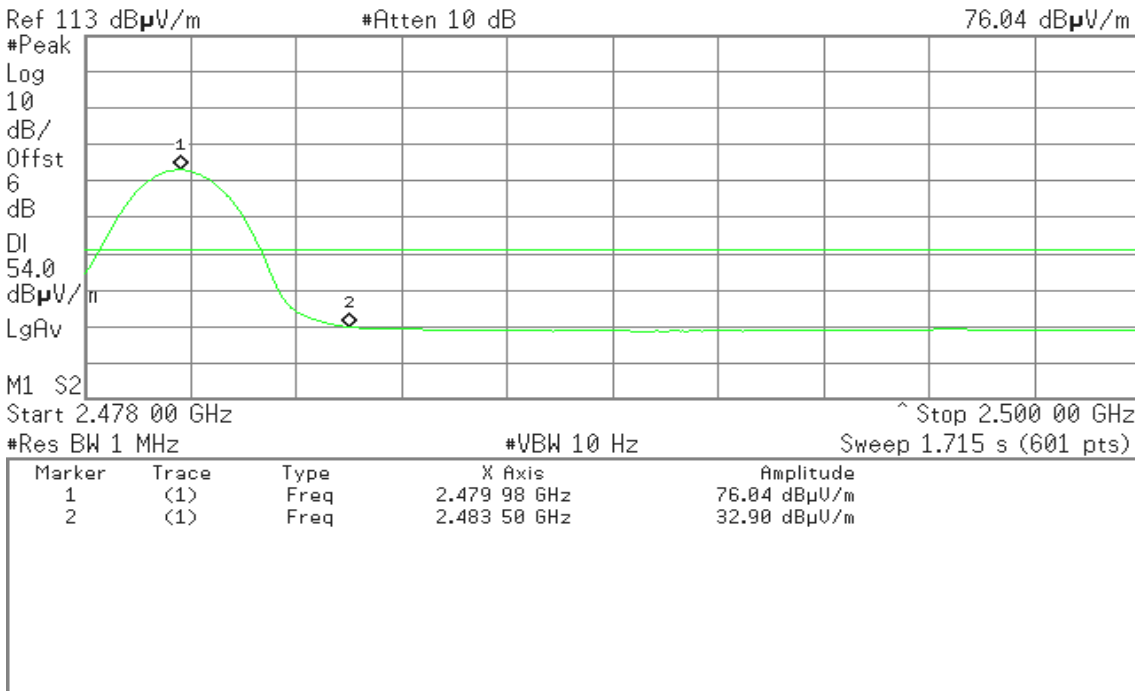




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.479 94 GHz
88.14 dBµV/m

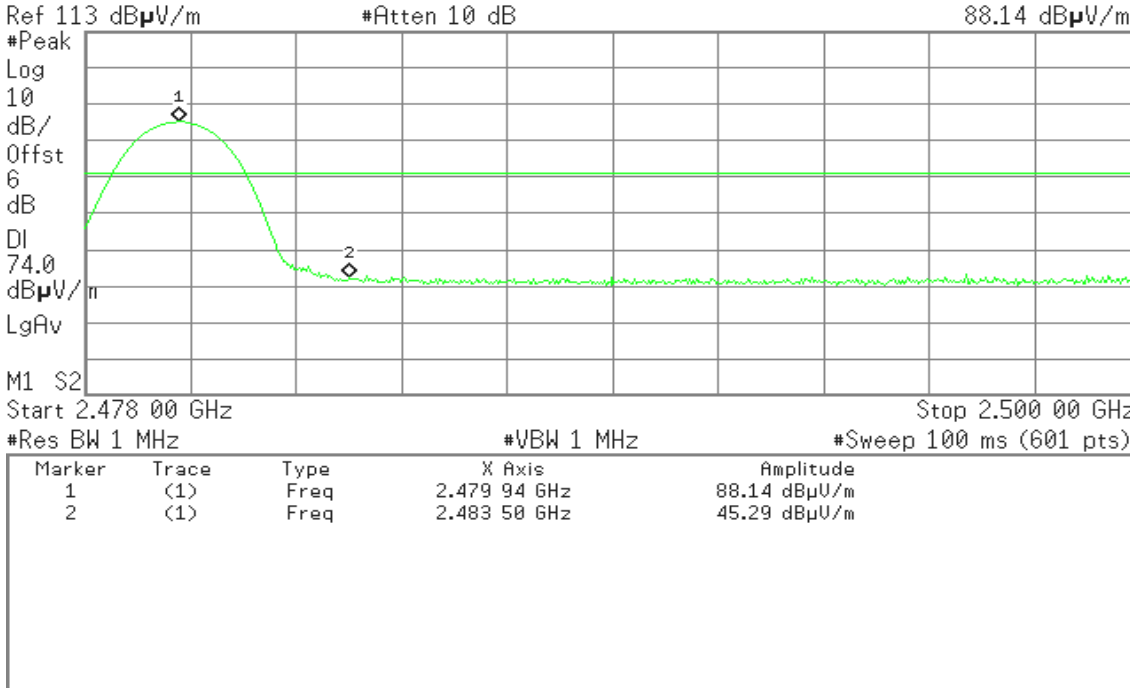


Detector mode: Average

Polarity: Horizontal

Agilent

R L

Mkr1 2.479 98 GHz
74.50 dBµV/m

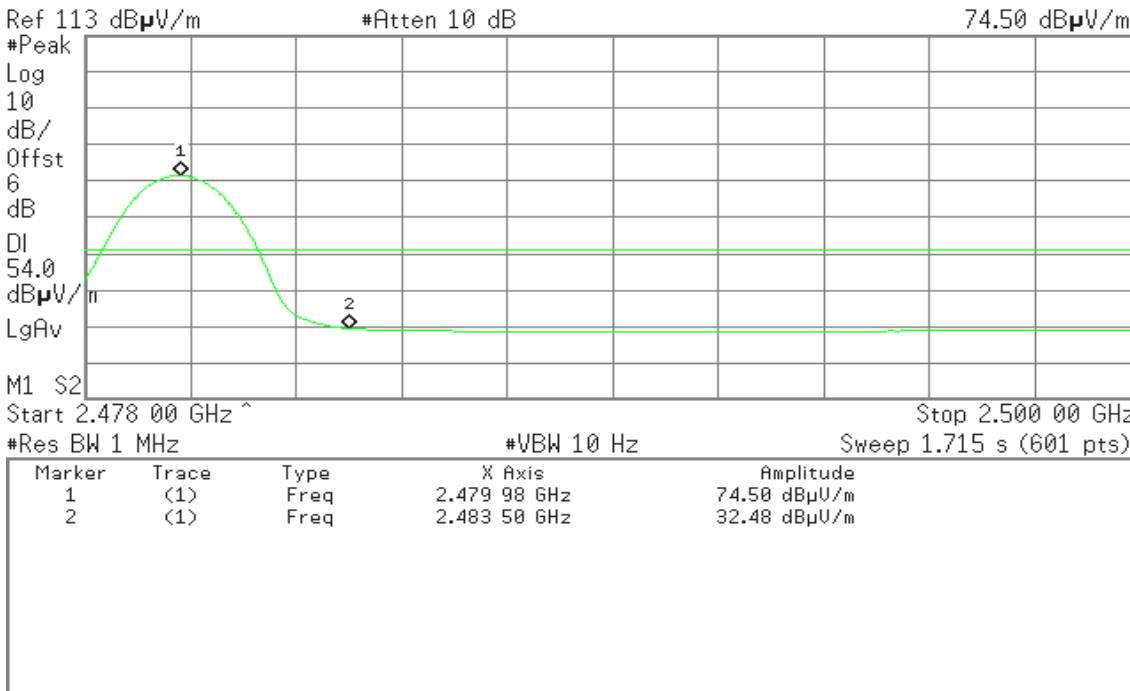




7.5. FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

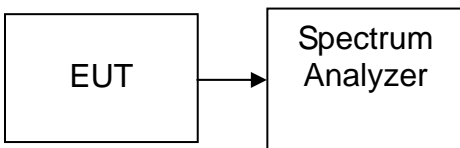

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

TEST DATA

GFSK

Channel Separation (MHz)	two-thirds of the 20 dB bandwidth	Channel Separation Limit	Result
1.00	626.67	> 20dB Bandwidth or two-thirds of the 20 dB bandwidth	Pass

8DPSK

Channel Separation (MHz)	two-thirds of the 20 dB bandwidth	Channel Separation Limit	Result
1.00	850	> 20dB Bandwidth or two-thirds of the 20 dB bandwidth	Pass



Test Plot

Measurement of Channel Separation

GFSK


Agilent

R T

Mkr2 2.440 985 GHz
5.23 dBm

Ref 27.6 dBm

#Atten 30 dB

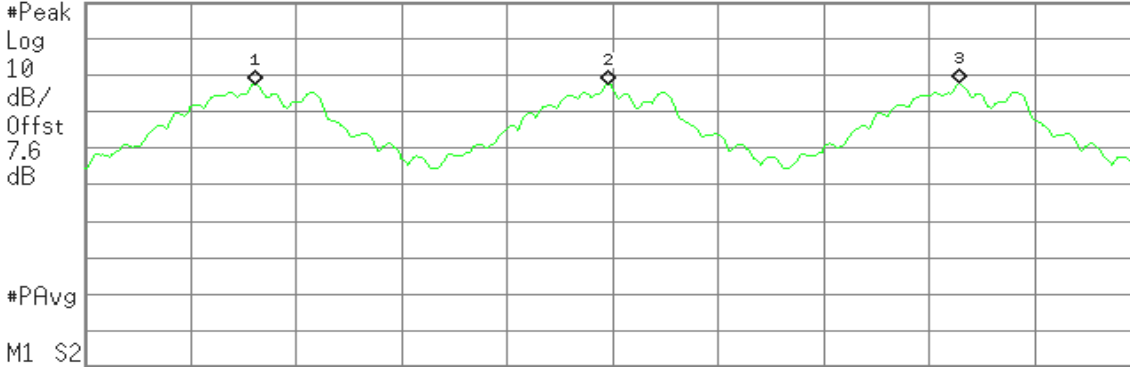

Center 2.441 000 GHz #VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.439 985 GHz	5.28 dBm
2	(1)	Freq	2.440 985 GHz	5.23 dBm
3	(1)	Freq	2.441 985 GHz	5.32 dBm

8DPSK


Agilent

R T

Mkr3 2.441 985 GHz
2.76 dBm

Ref 27.6 dBm

#Atten 30 dB

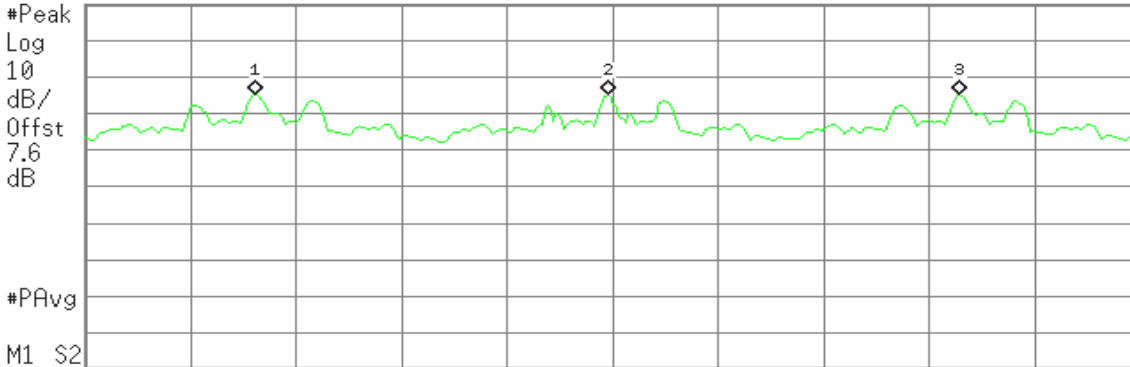

Center 2.441 000 GHz #VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.439 985 GHz	2.91 dBm
2	(1)	Freq	2.440 985 GHz	2.76 dBm
3	(1)	Freq	2.441 985 GHz	2.76 dBm




7.6. NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

TEST CONFIGURATION

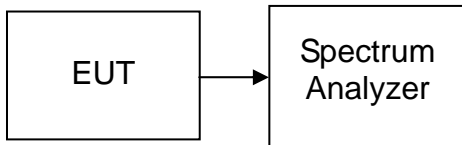

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

TEST DATA

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS



Test Plot


GFSK

Channel Number

2.4 GHz – 2.4415 GHz

* Agilent


R L

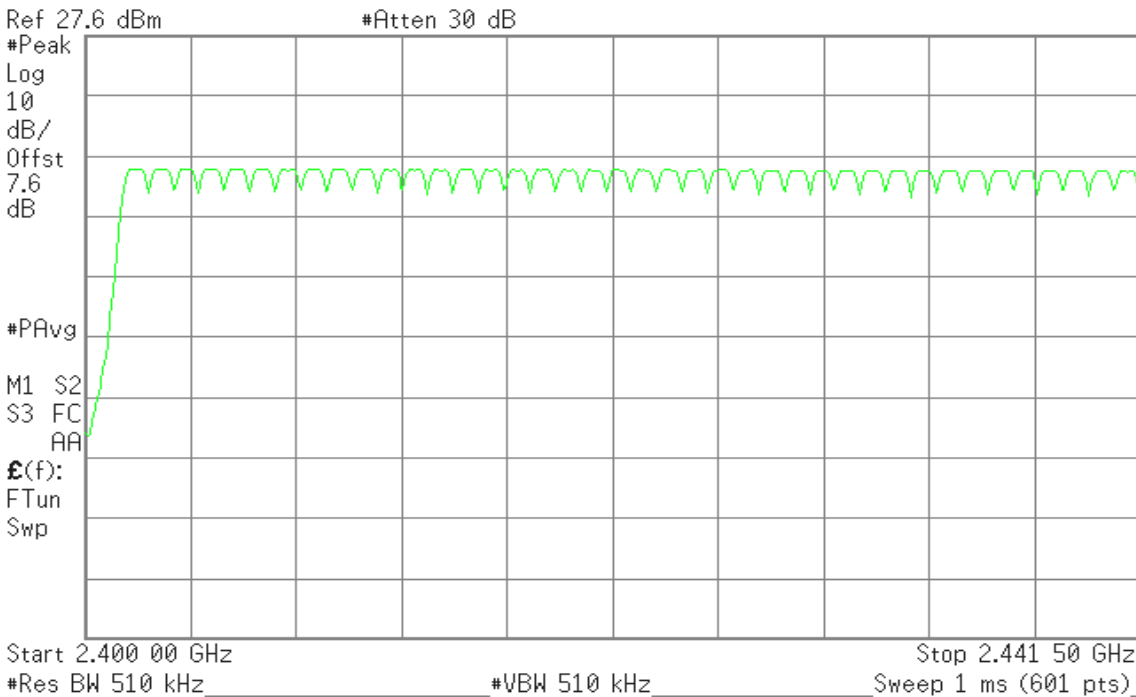

2.4415 GHz – 2.4835 GHz

* Agilent

R L

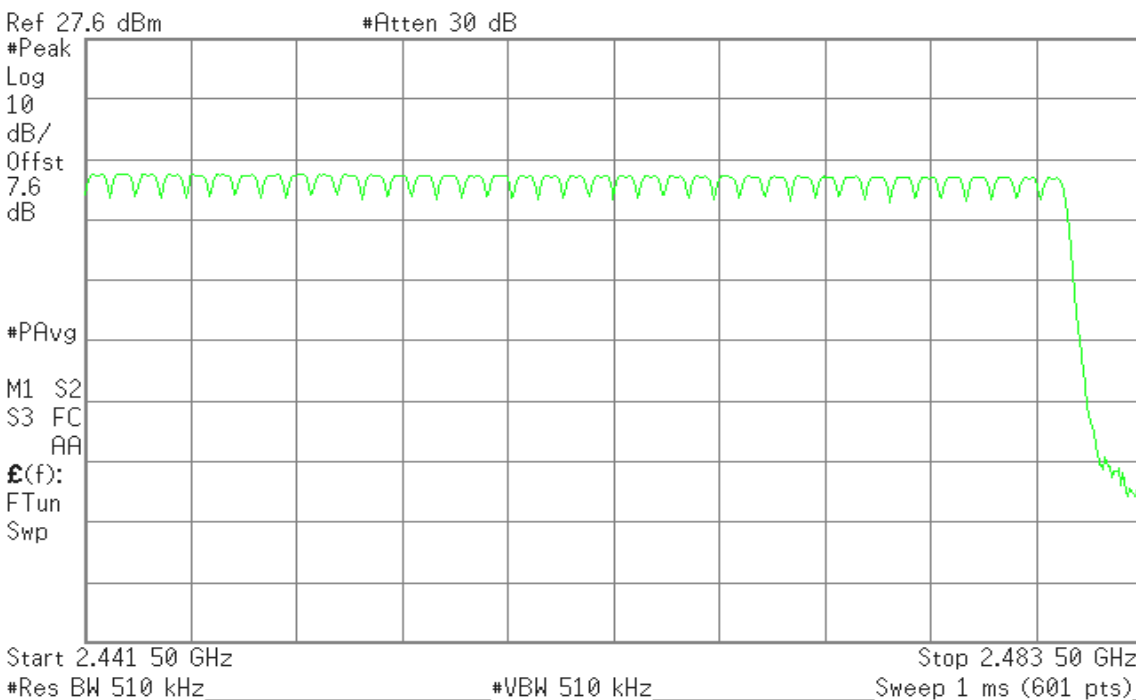




8DPSK

Channel Number

2.4 GHz – 2.4415 GHz

* Agilent


R L

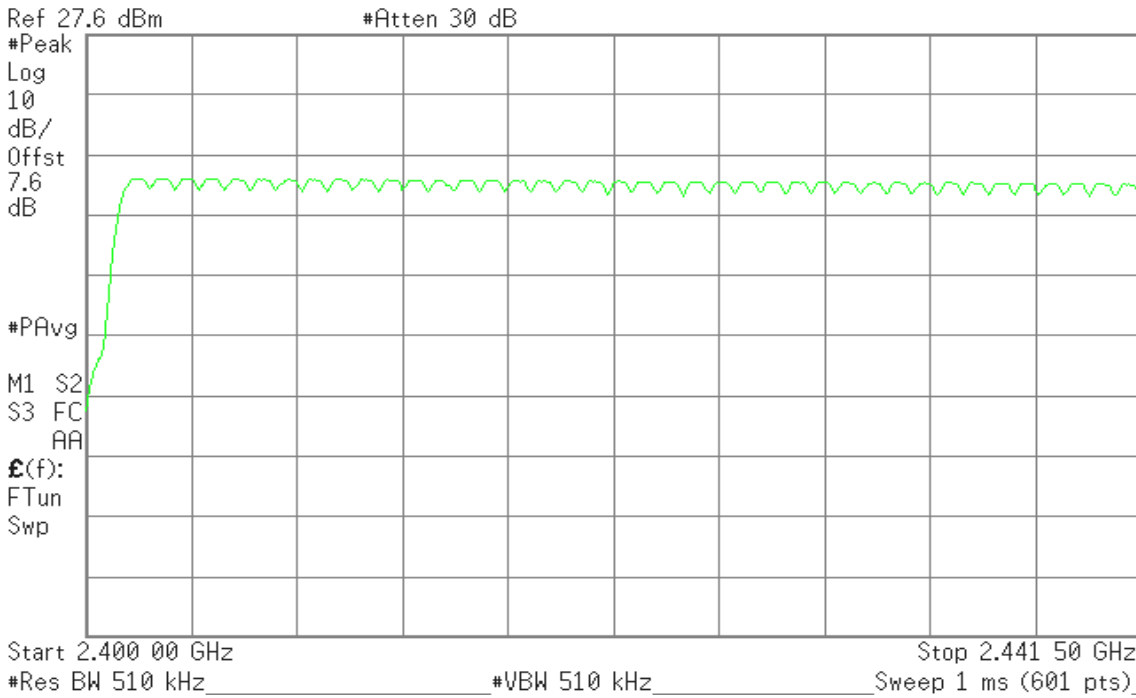

2.4415 GHz – 2.4835 GHz

* Agilent

R L

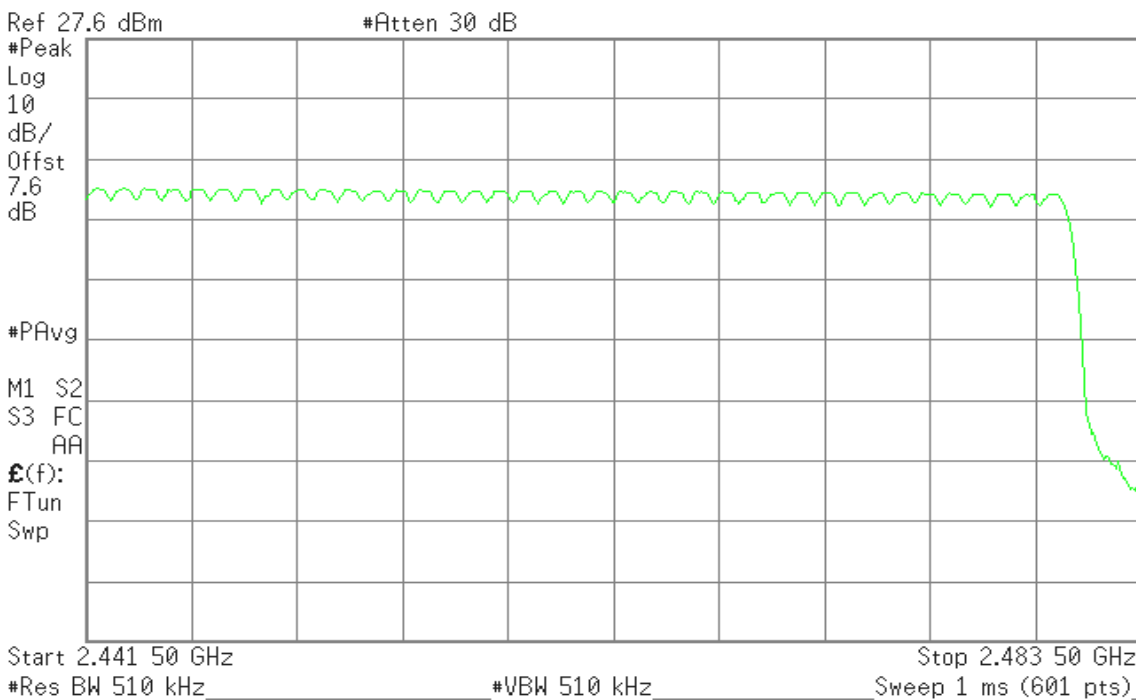




7.7. TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

TEST CONFIGURATION

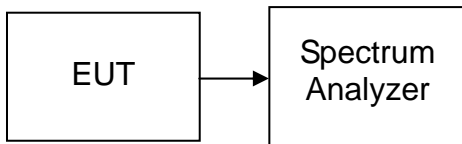

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = 10ms.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted



TEST DATA

GFSK

DH 1

CH Low: $0.4167 * (1600/2)/79 * 31.60 = 133.34$ (ms)

CH Mid: $0.4167 * (1600/2)/79 * 31.60 = 133.34$ (ms)

CH High: $0.4167 * (1600/2)/79 * 31.60 = 133.34$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.4167	133.34	31.60	400.00	PASS
Mid	0.4167	133.34	31.60		PASS
High	0.4167	133.34	31.60		PASS

DH 3

CH Low: $1.667 * (1600/4)/79 * 31.60 = 266.72$ (ms)

CH Mid: $1.667 * (1600/4)/79 * 31.60 = 266.72$ (ms)

CH High: $1.667 * (1600/4)/79 * 31.60 = 266.72$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.667	266.72	31.60	400.00	PASS
Mid	1.667	266.72	31.60		PASS
High	1.667	266.72	31.60		PASS

DH 5

CH Low: $2.917 * (1600/6)/79 * 31.60 = 311.15$ (ms)

CH Mid: $2.917 * (1600/6)/79 * 31.60 = 311.15$ (ms)

CH High: $2.917 * (1600/6)/79 * 31.60 = 311.15$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.917	311.15	31.60	400.00	PASS
Mid	2.917	311.15	31.60		PASS
High	2.917	311.15	31.60		PASS



8DPSK

DH 1

CH Low: $0.4333 * (1600/2)/79 * 31.60 = 138.66$ (ms)

CH Mid: $0.4333 * (1600/2)/79 * 31.60 = 138.66$ (ms)

CH High: $0.4333 * (1600/2)/79 * 31.60 = 138.66$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.4333	138.66	31.60	400.00	PASS
Mid	0.4333	138.66	31.60		PASS
High	0.4333	138.66	31.60		PASS

DH 3

CH Low: $1.683 * (1600/4)/79 * 31.60 = 269.28$ (ms)

CH Mid: $1.683 * (1600/4)/79 * 31.60 = 269.28$ (ms)

CH High: $1.683 * (1600/4)/79 * 31.60 = 269.28$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.683	269.28	31.60	400.00	PASS
Mid	1.683	269.28	31.60		PASS
High	1.683	269.28	31.60		PASS

DH 5

CH Low: $2.933 * (1600/6)/79 * 31.60 = 312.85$ (ms)

CH Mid: $2.933 * (1600/6)/79 * 31.60 = 312.85$ (ms)

CH High: $2.933 * (1600/6)/79 * 31.60 = 312.85$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.933	312.85	31.60	400.00	PASS
Mid	2.933	312.85	31.60		PASS
High	2.933	312.85	31.60		PASS



Test Plot

GFSK


DH 1

(CH Low)

Agilent

R L

Mkr1 416.7 μ s
-0.16 dB

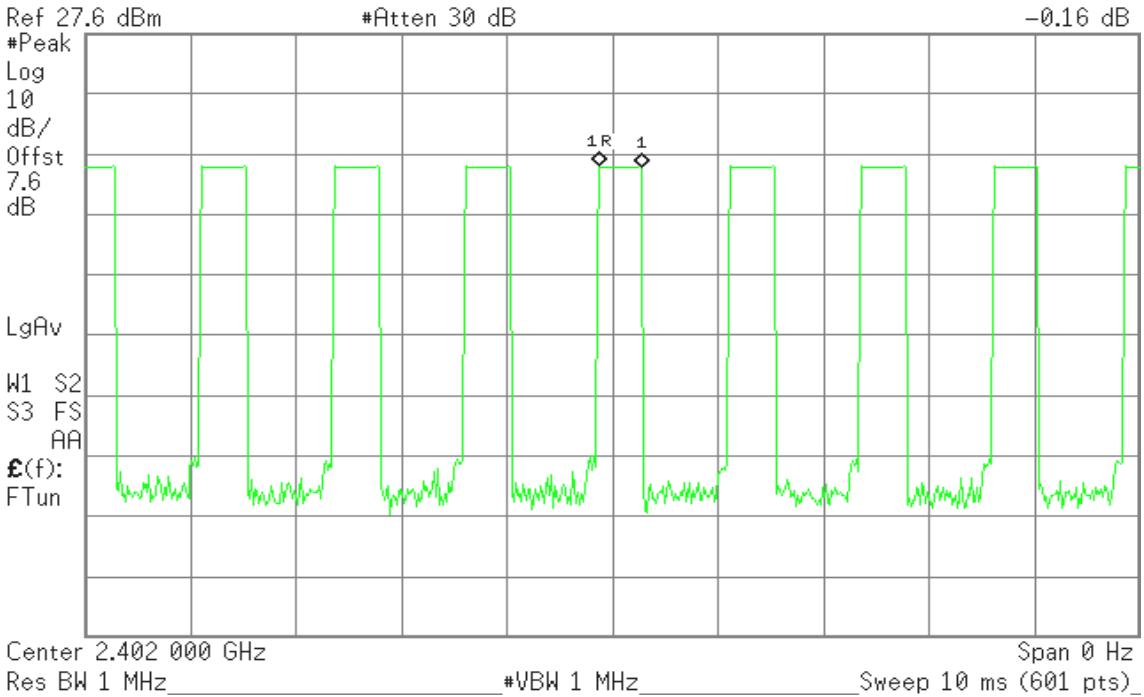


(CH Mid)

Agilent

R L

Mkr1 416.7 μ s
0.02 dB

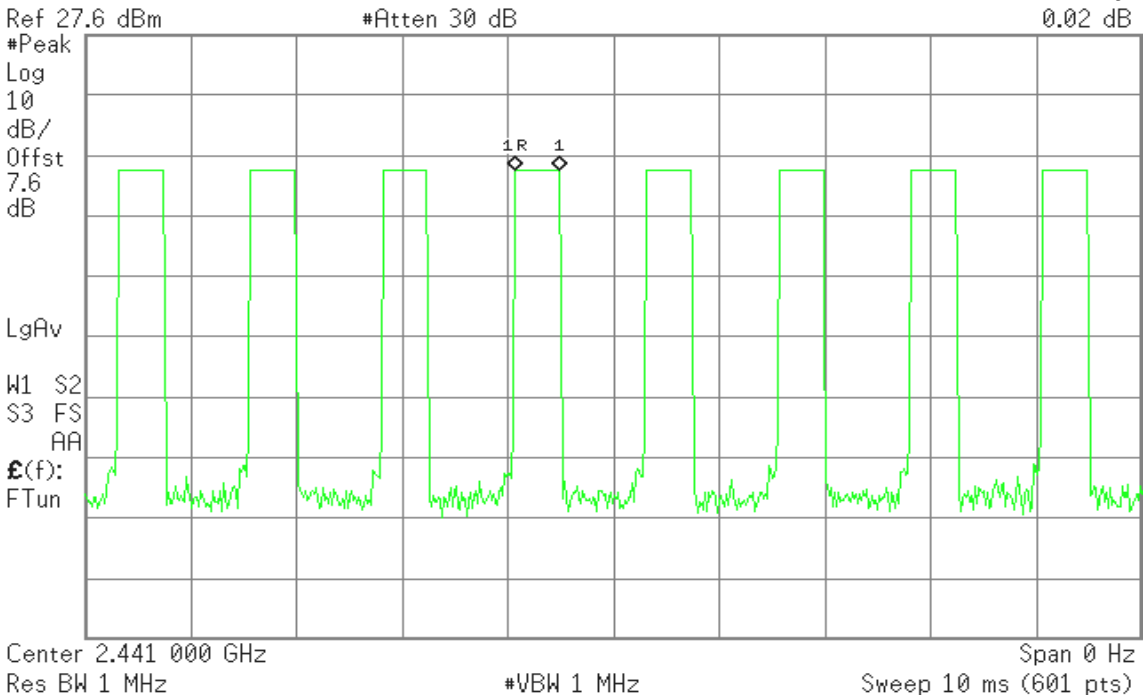




(CH High)

Agilent

R L

Mkr1 416.7 μ s
0.02 dB

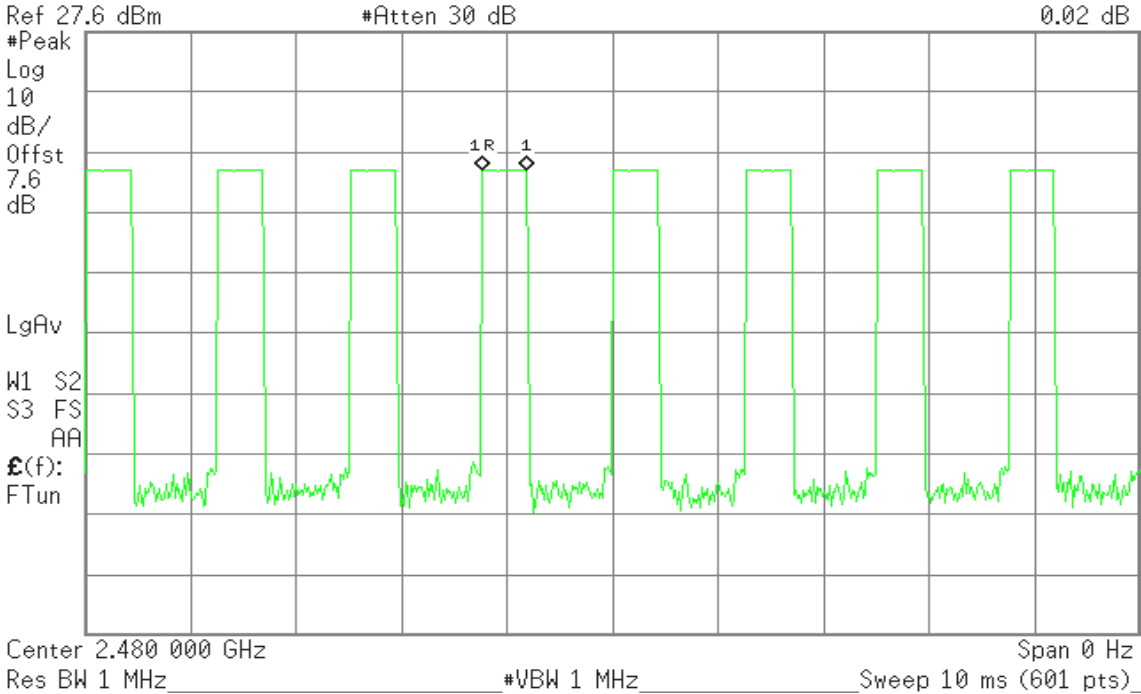


DH 3

(CH Low)

Agilent

R L

Mkr1 1.667 ms
-0.66 dB

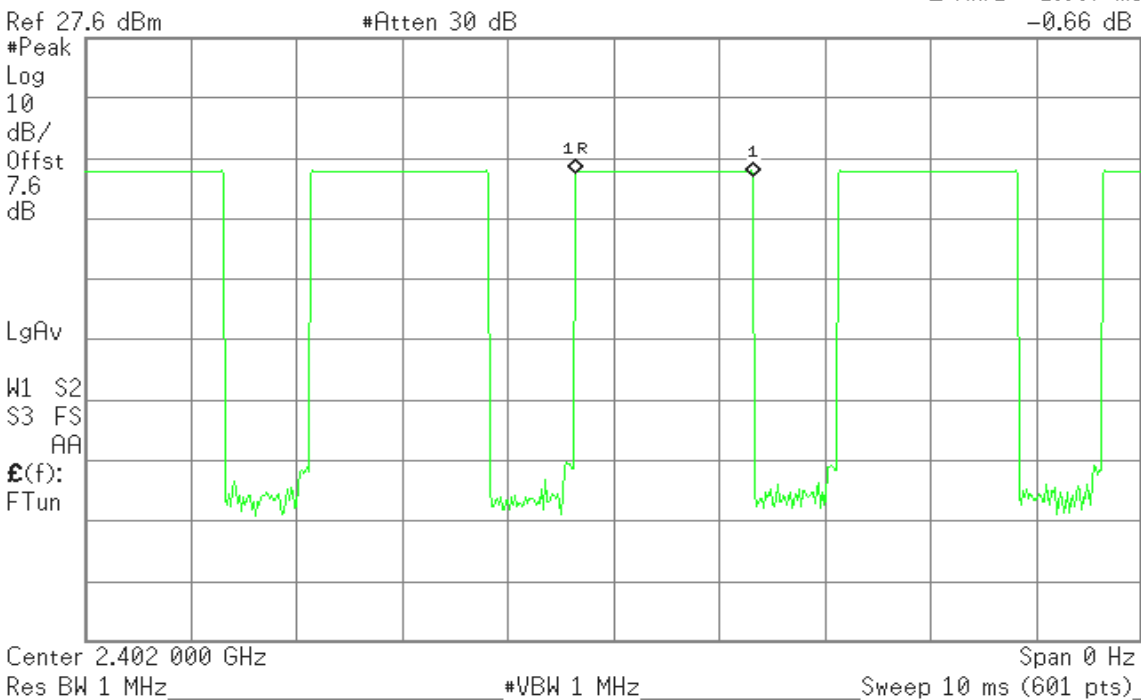




(CH Mid)

Agilent

R L

Mkr1 1.667 ms
-0.02 dB

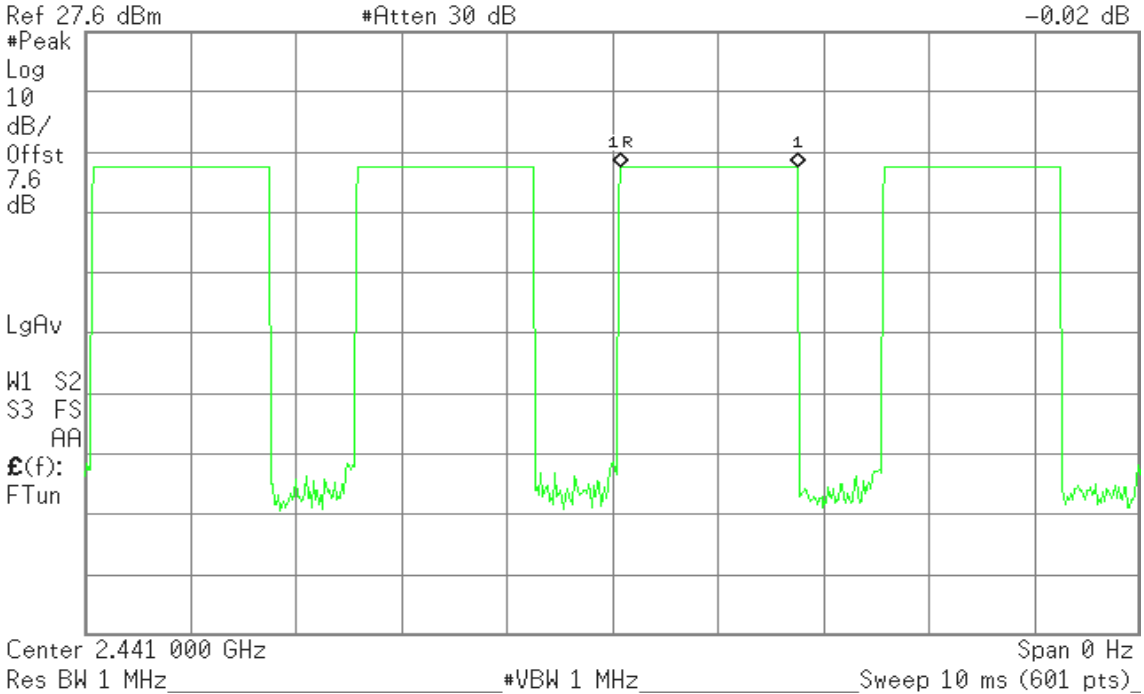


(CH High)

Agilent

R L

Mkr1 1.667 ms
-0.03 dB

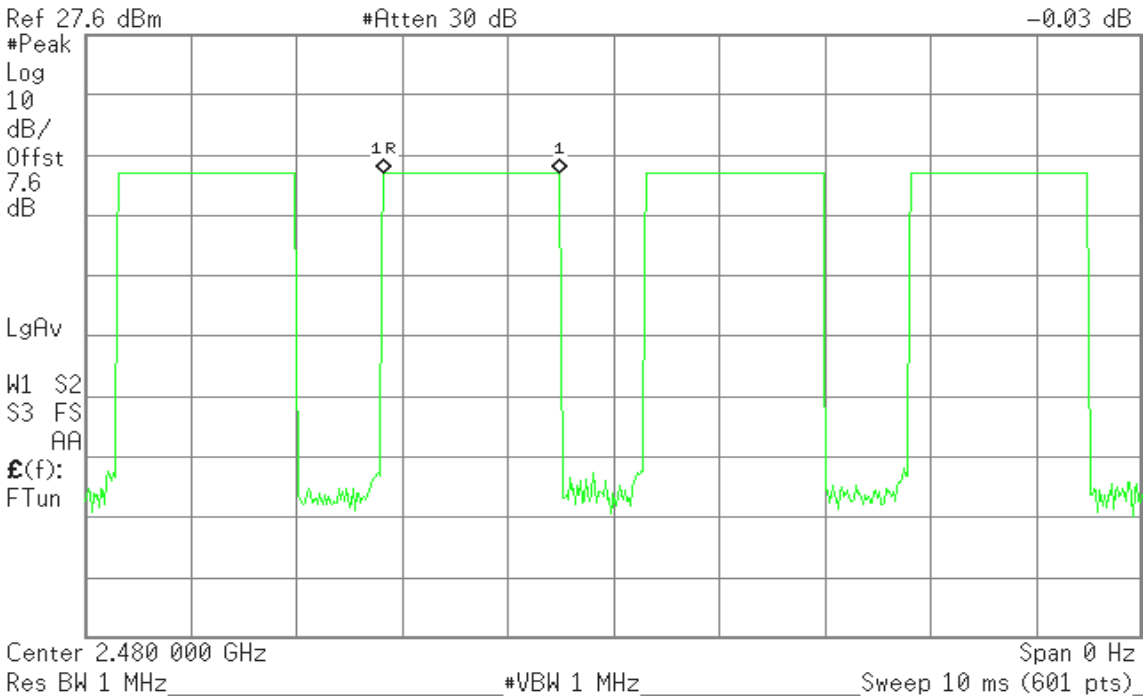




DH 5

(CH Low)

Agilent

R L

Mkr1 2.917 ms
0.00 dB

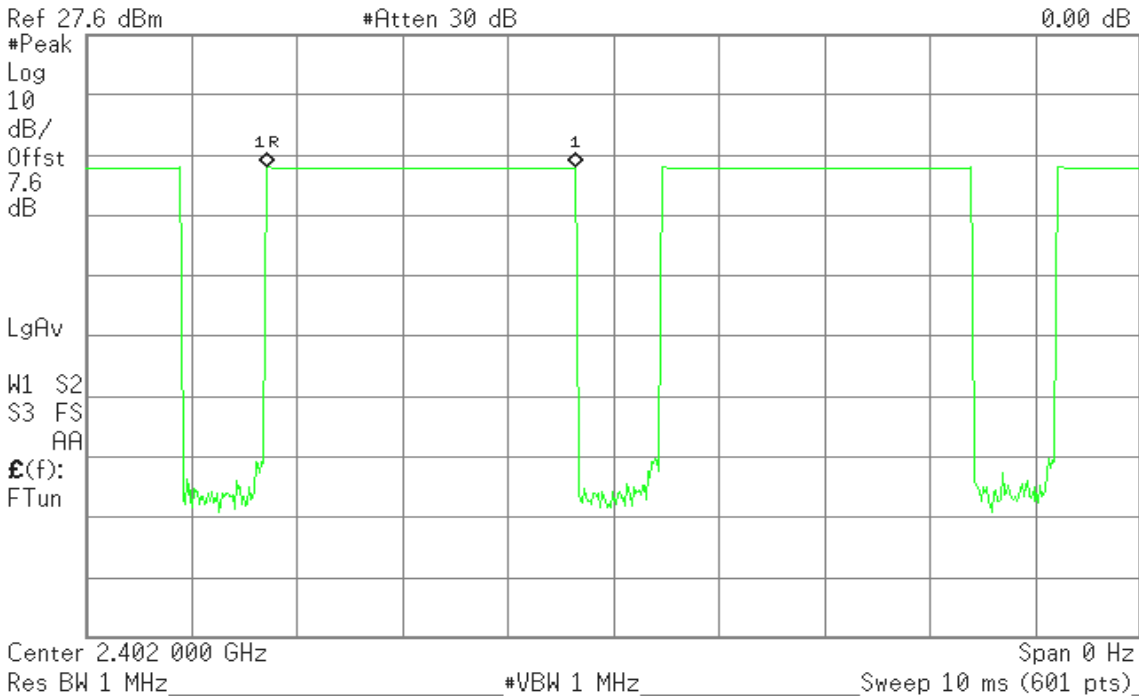


(CH Mid)

Agilent

R L

Mkr1 2.917 ms
0.12 dB

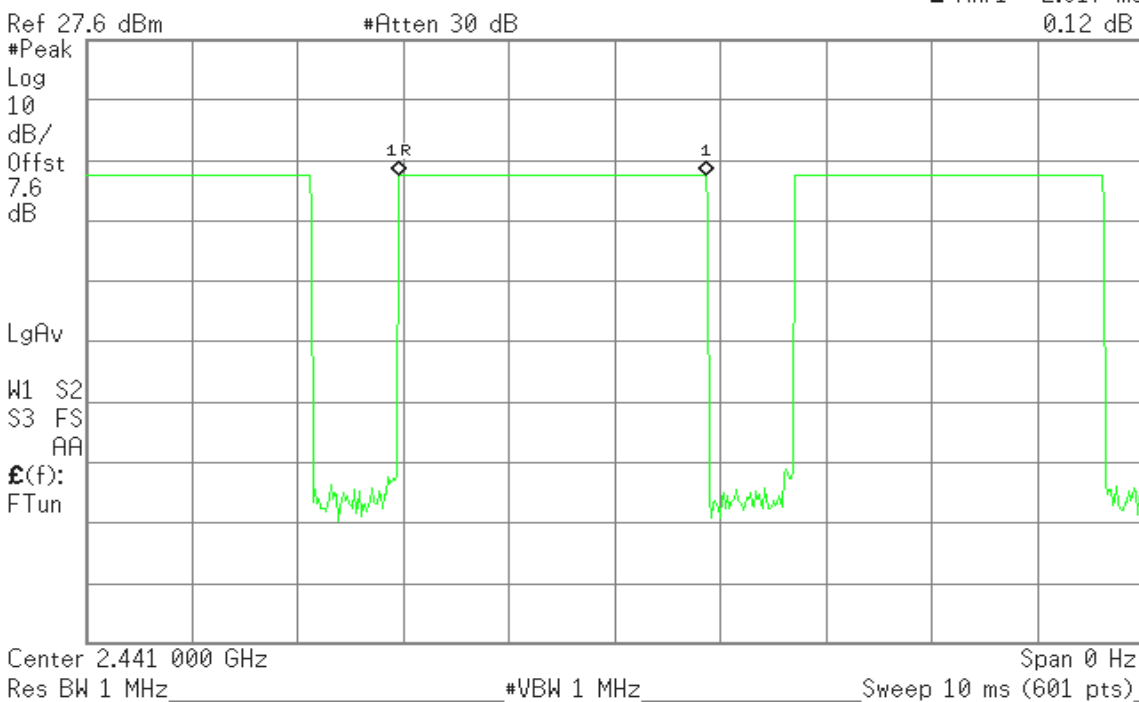




(CH High)

Agilent

R L

Δ Mkr1 2.917 ms
-2.00 dB

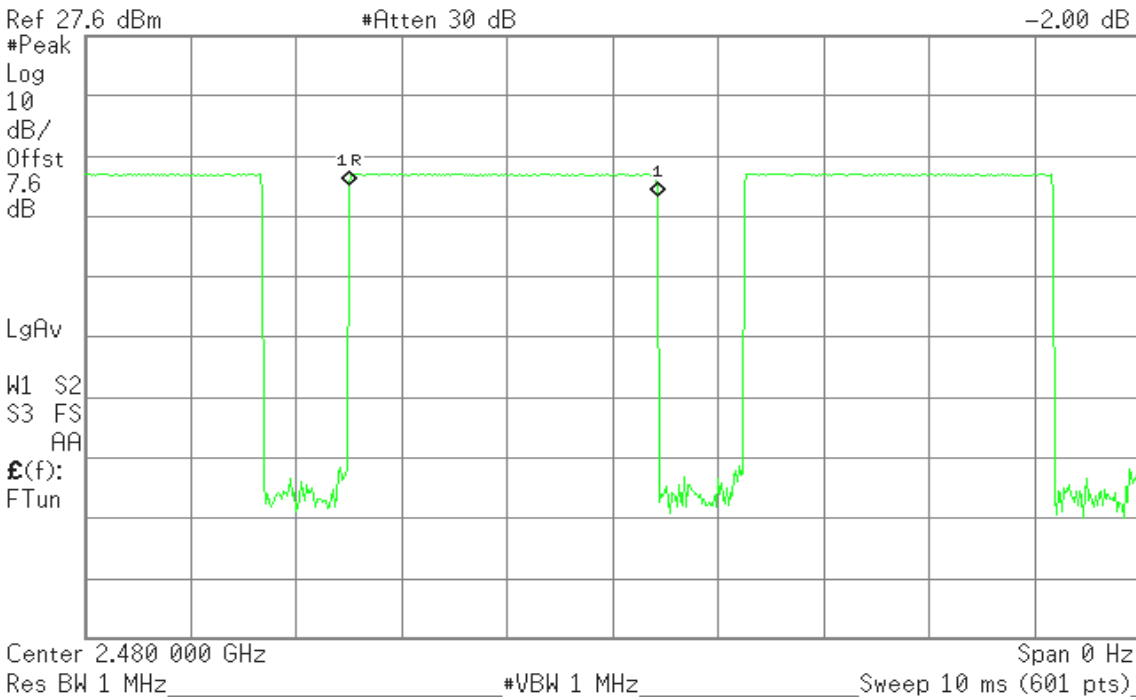

8DPSK


DH 1

(CH Low)

Agilent

R L

Δ Mkr1 433.3 μs
-0.98 dB

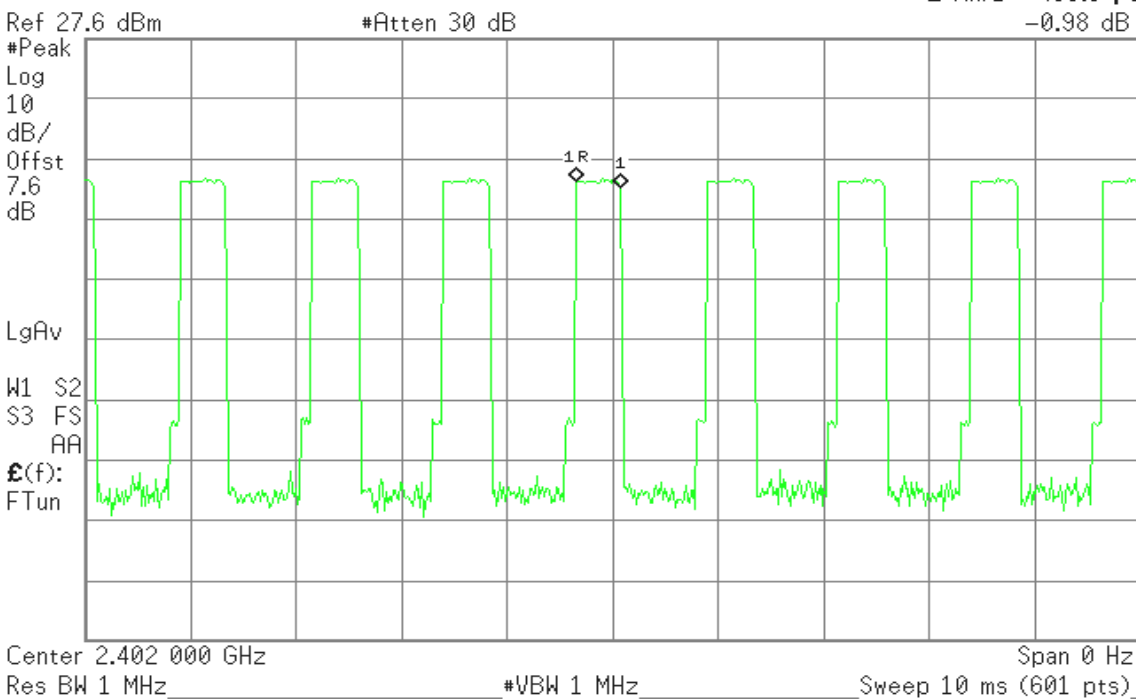




(CH Mid)

Agilent

R L

Mkr1 433.3 μ s
-1.23 dB

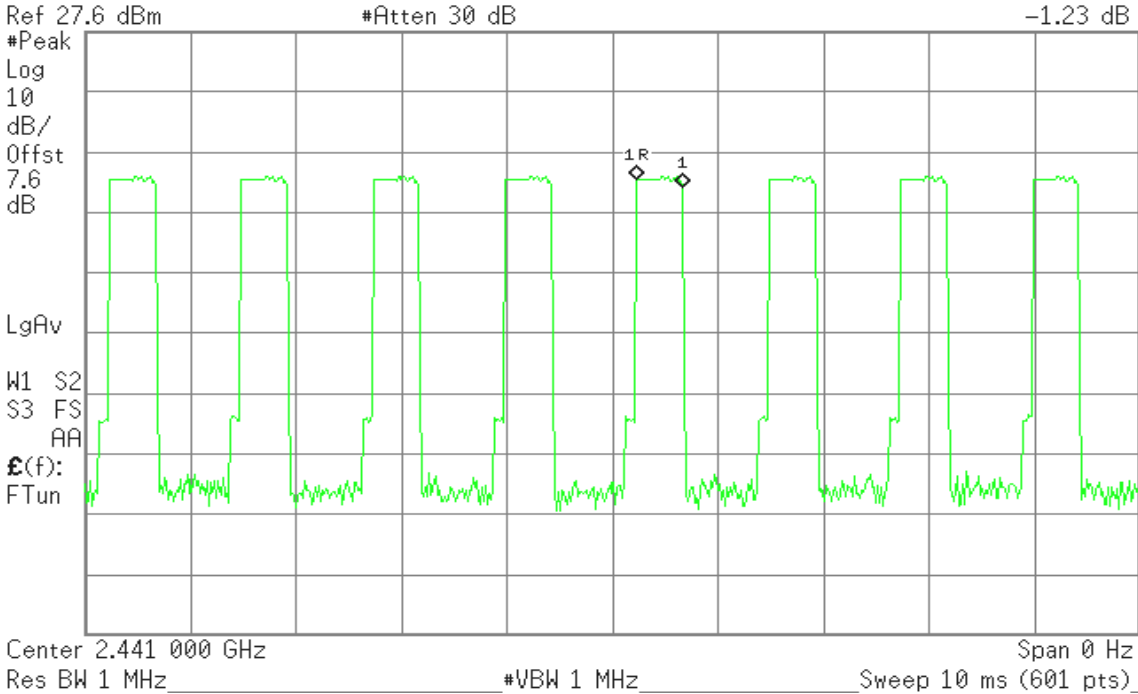


(CH High)

Agilent

R L

Mkr1 433.3 μ s
-1.23 dB

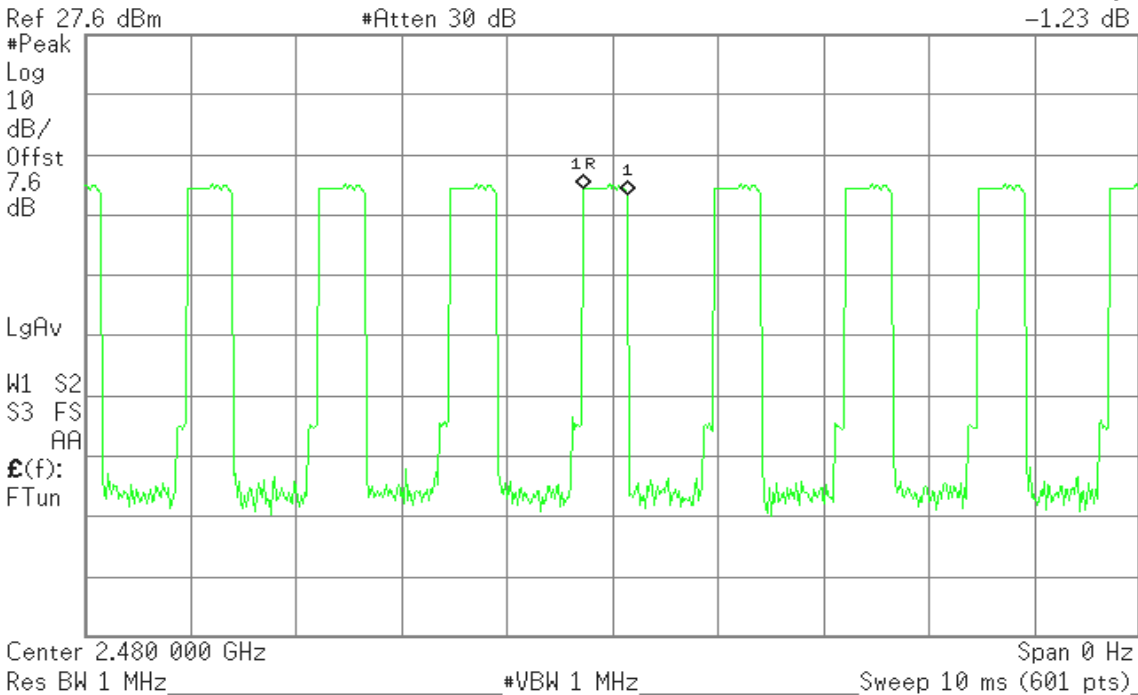




DH 3

(CH Low)

Agilent

R L

Mkr1 1.683 ms
-0.47 dB

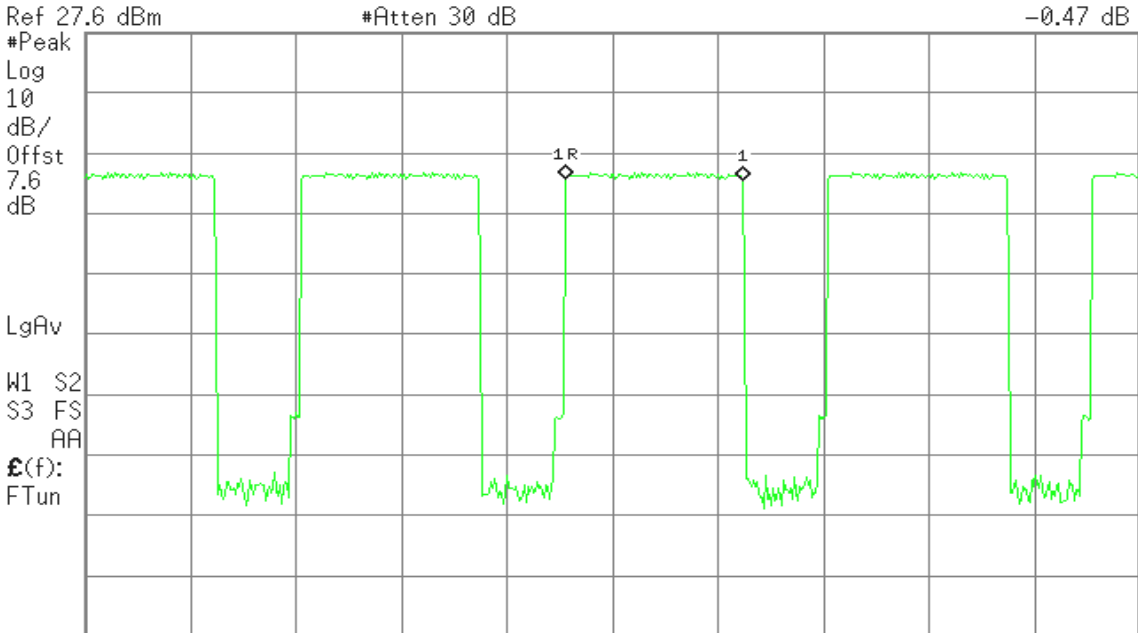


Center 2.402 000 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 10 ms (601 pts)

(CH Mid)

Agilent

R L

Mkr1 1.683 ms
-1.39 dB

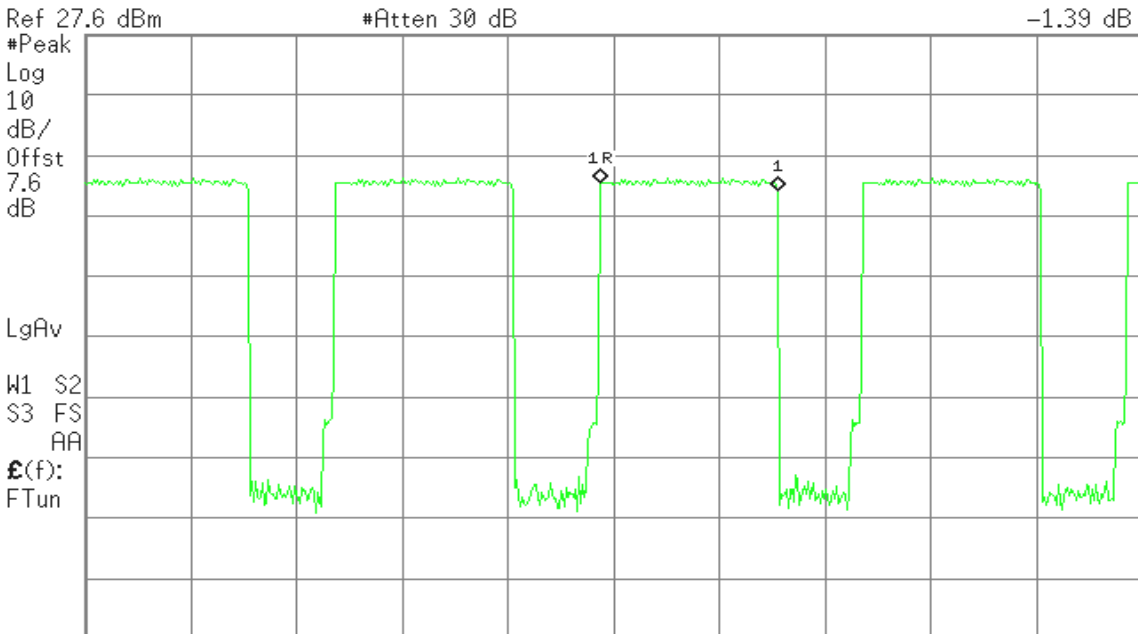

Center 2.441 000 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 10 ms (601 pts)




(CH High)

Agilent

R L

Mkr1 1.683 ms
-1.14 dB

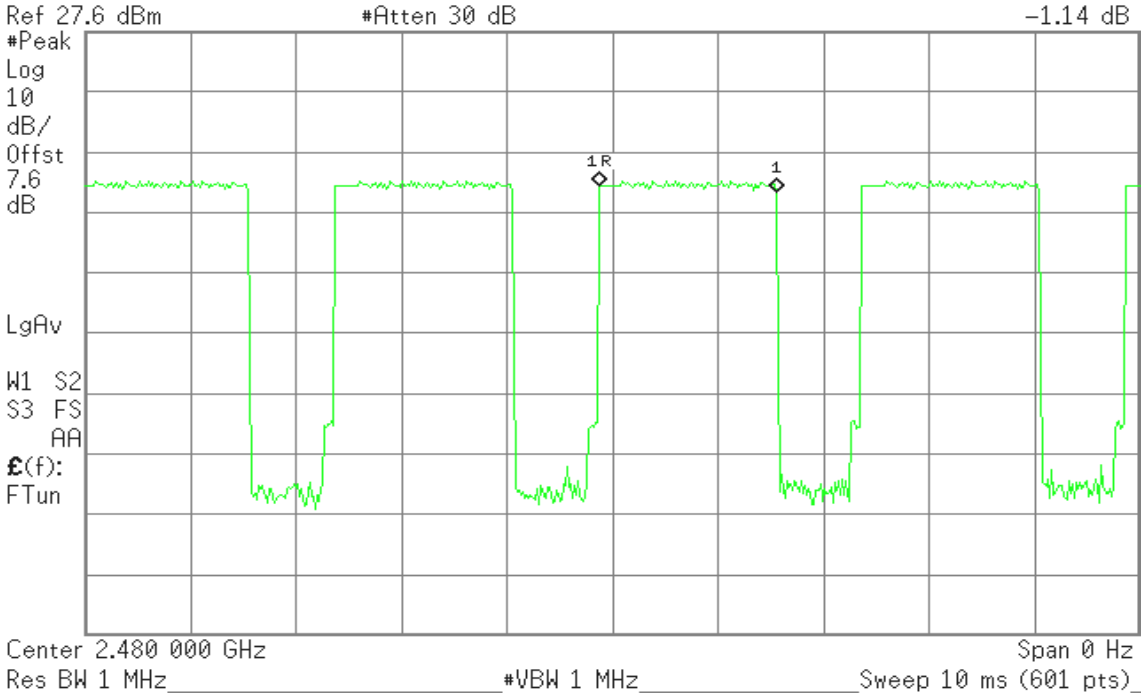


DH 5

(CH Low)

Agilent

R L

Mkr1 2.933 ms
-0.81 dB

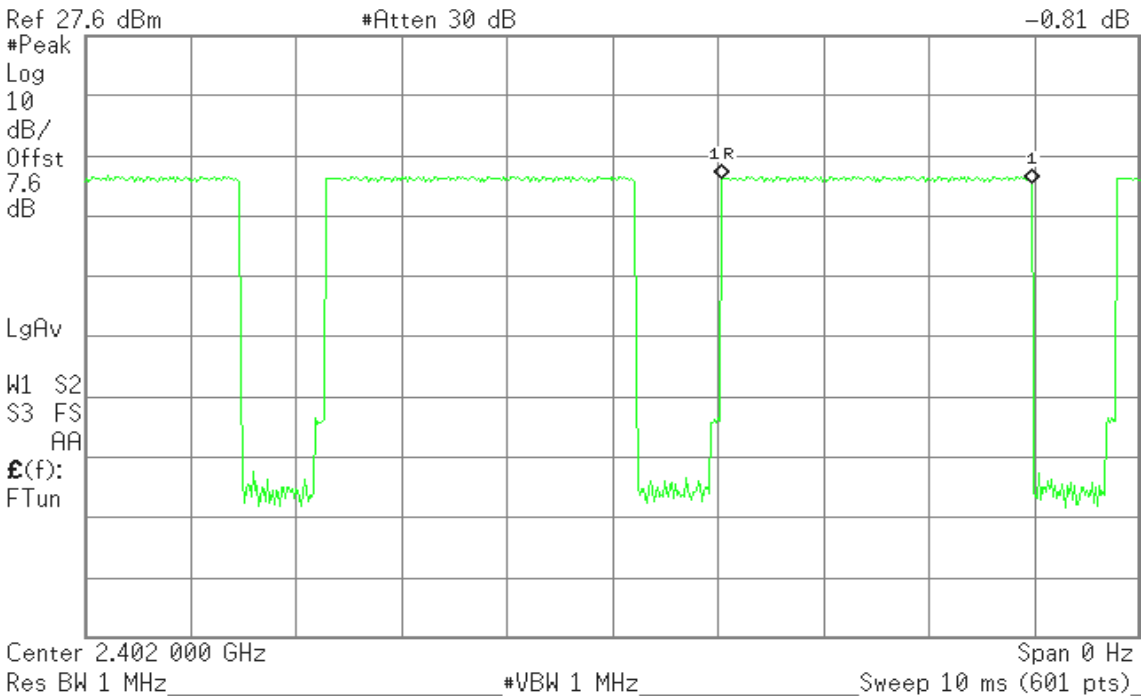




(CH Mid)

Agilent

R L

Mkr1 2.933 ms
-0.99 dB

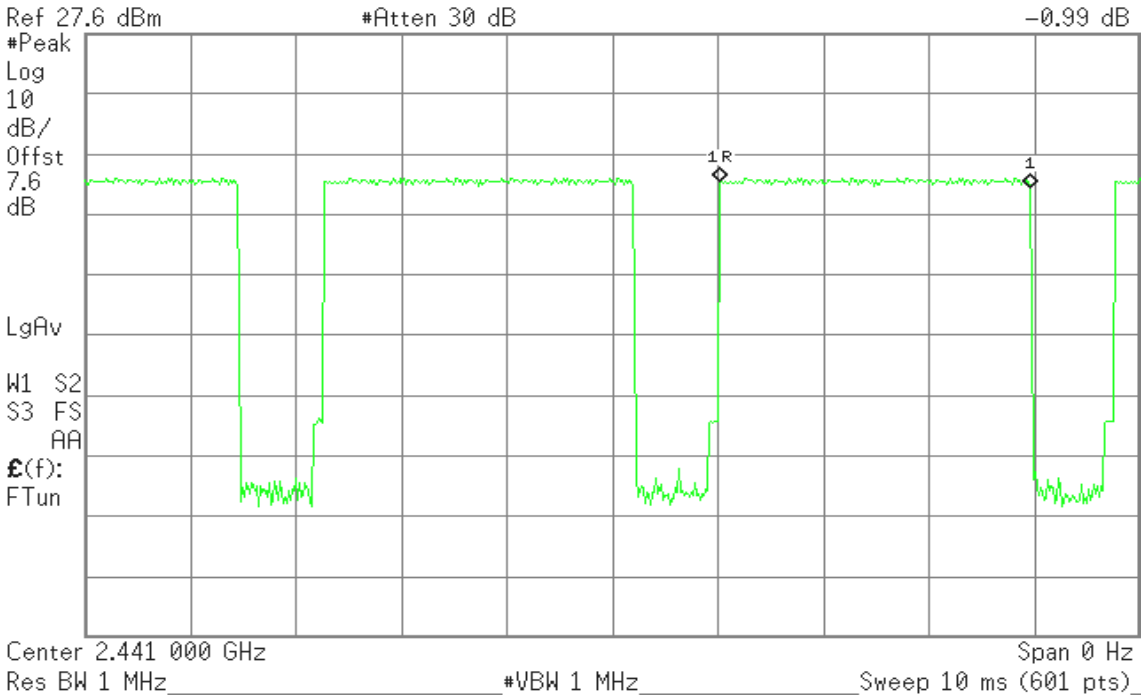


(CH High)

Agilent

R L

Mkr1 2.933 ms
-1.11 dB

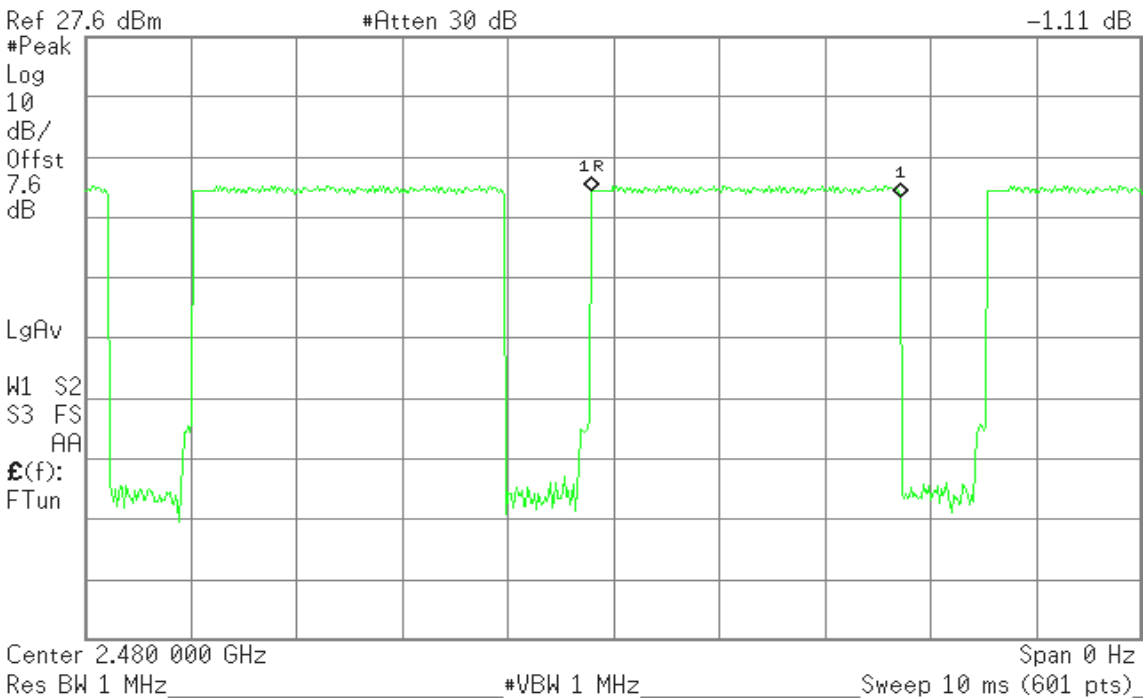




7.8. SPURIOUS EMISSIONS

7.8.1 Conducted Measurement

LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

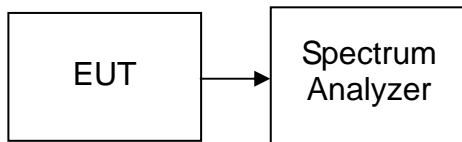

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

TEST DATA

Refer to attach spectrum analyzer data chart.




Test Plot

Conducted band-edge

GFSK / CH Low

Agilent


R L

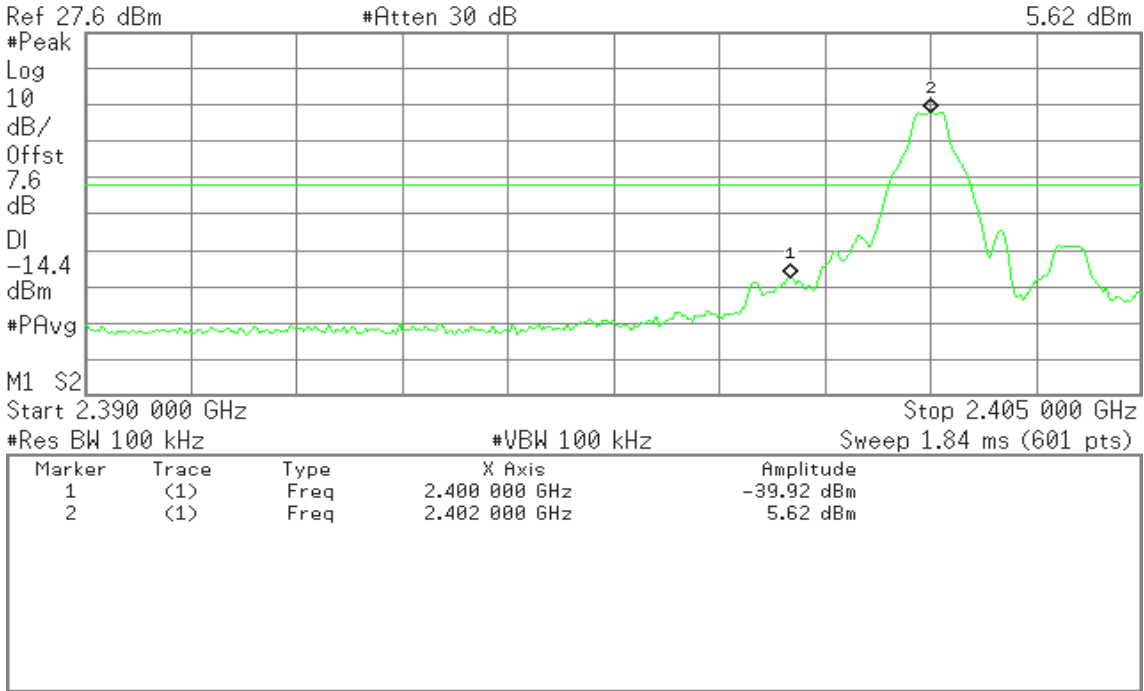

GFSK / CH High

Agilent

R L

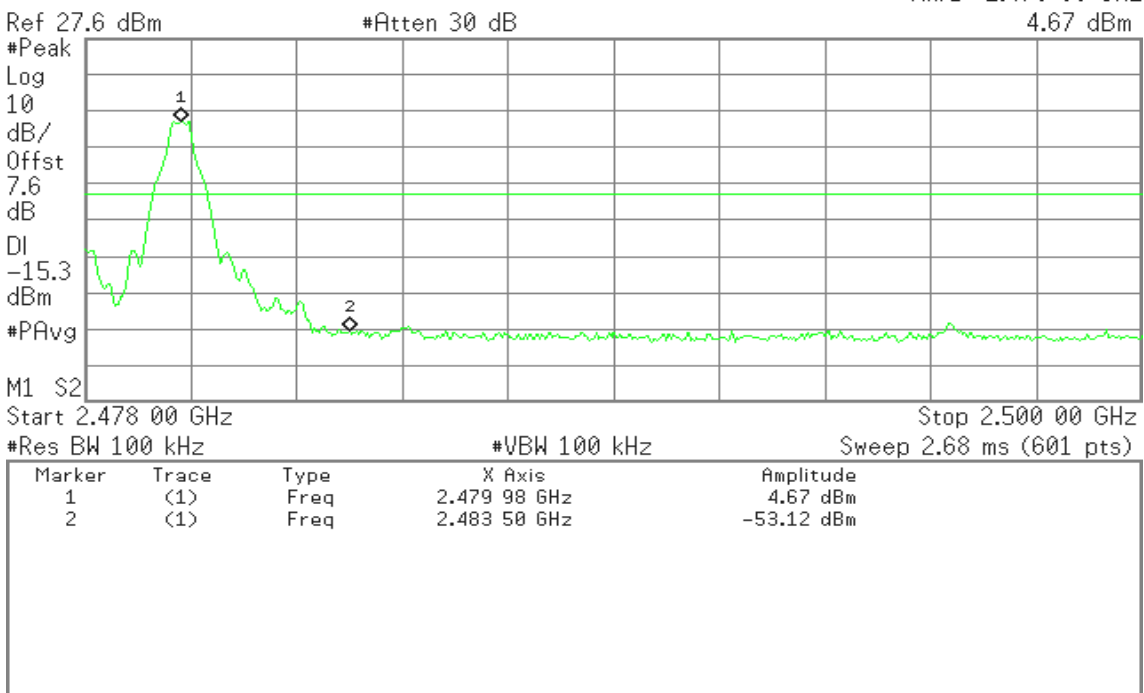




GFSK / Hopping On

Agilent

R L

Mkr2 2.402 00 GHz
5.59 dBm

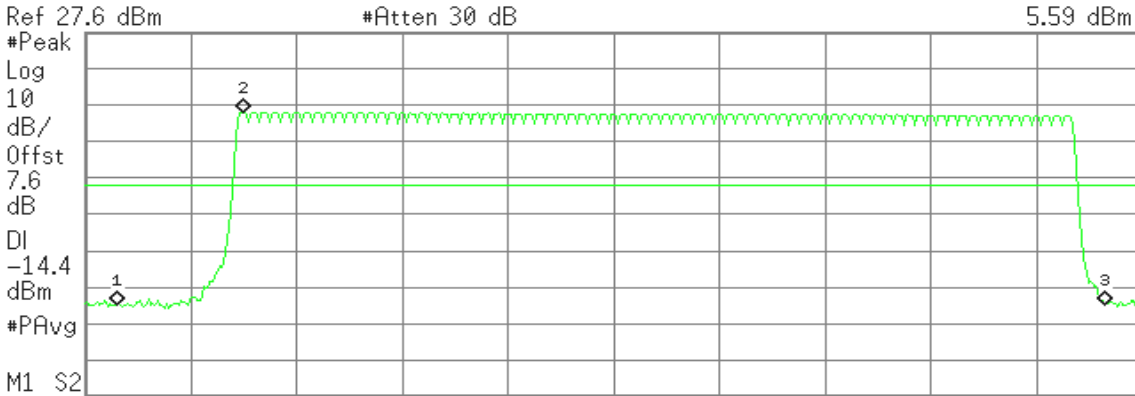

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 00 GHz	-47.42 dBm
2	(1)	Freq	2.402 00 GHz	5.59 dBm
3	(1)	Freq	2.483 50 GHz	-47.25 dBm

GFSK / Hopping Off

Agilent

R L

Mkr2 2.402 00 GHz
5.59 dBm



Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 00 GHz	-48.54 dBm
2	(1)	Freq	2.402 00 GHz	5.59 dBm
3	(1)	Freq	2.483 50 GHz	-47.25 dBm




8DPSK

GFSK / CH Low

Agilent


R L

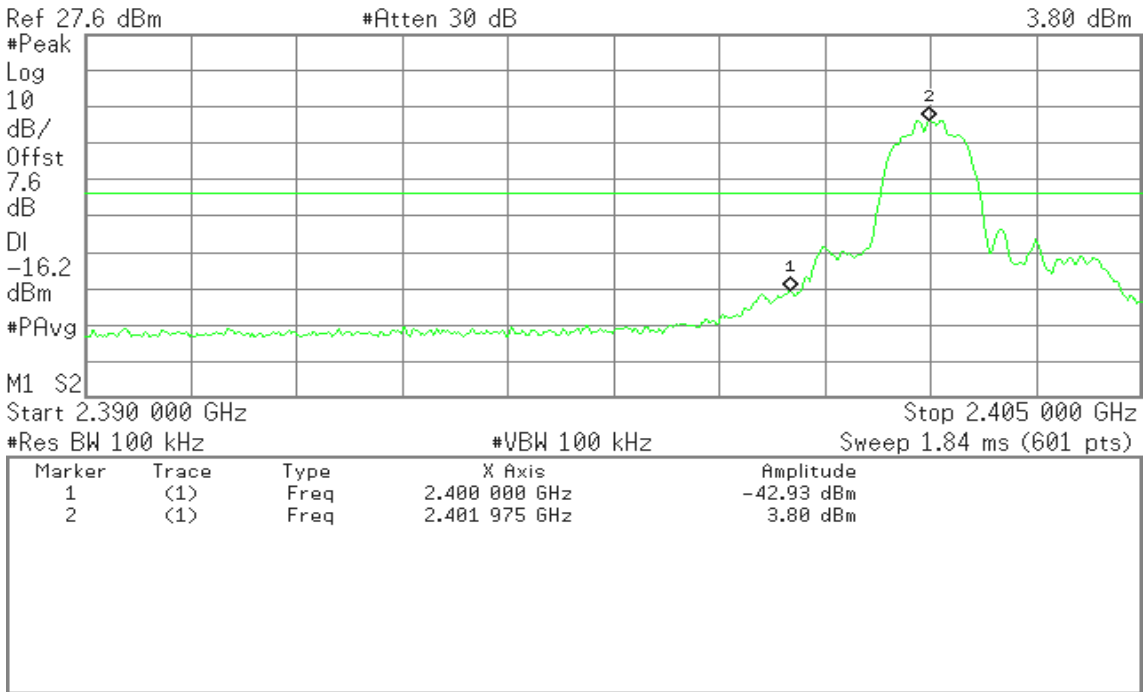

GFSK / CH High

Agilent

R L

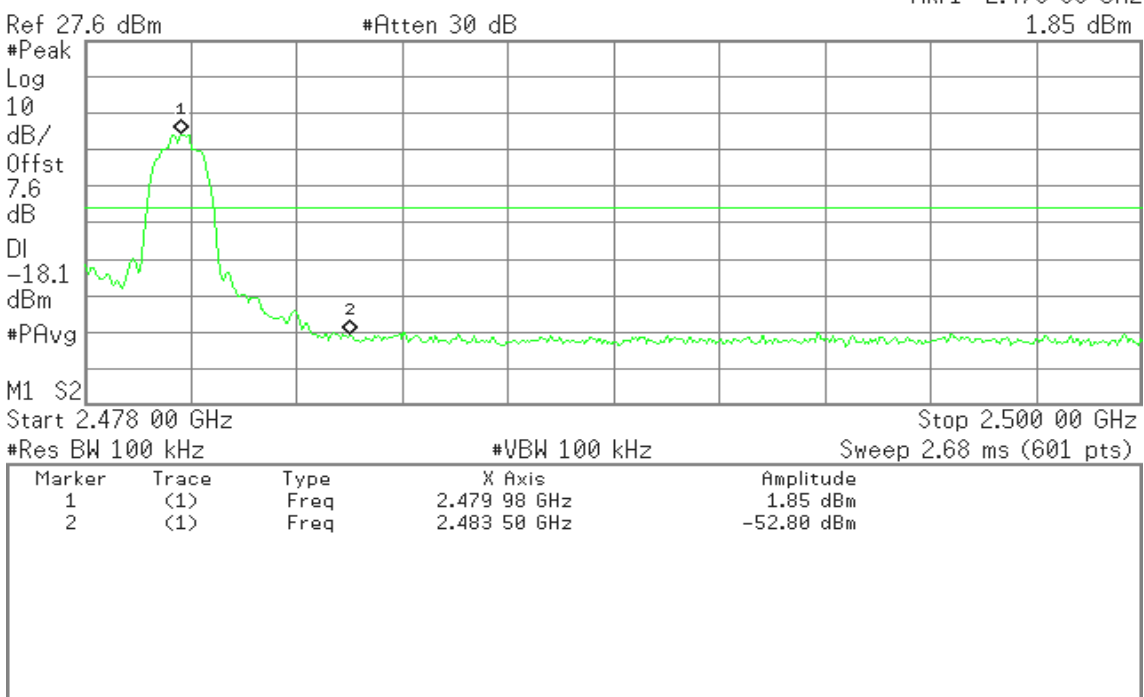




GFSK / Hopping On

Agilent

R L

Mkr3 2.483 50 GHz
-46.58 dBm

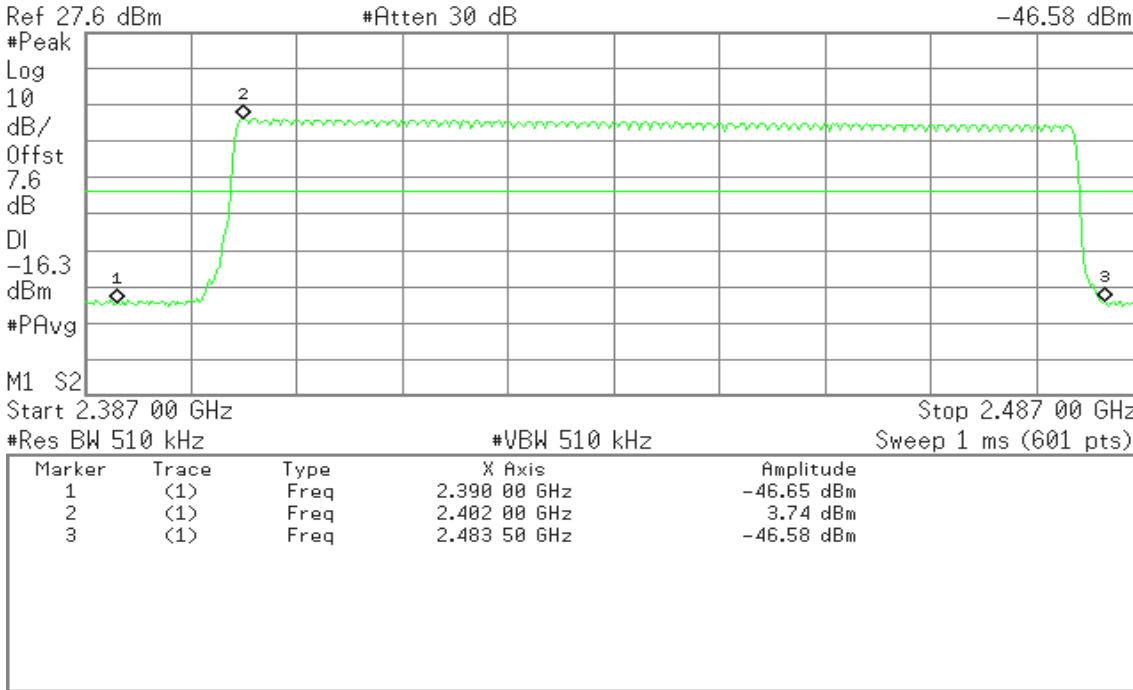


GFSK / Hopping Off

Agilent

R L

Mkr3 2.483 50 GHz
-47.63 dBm

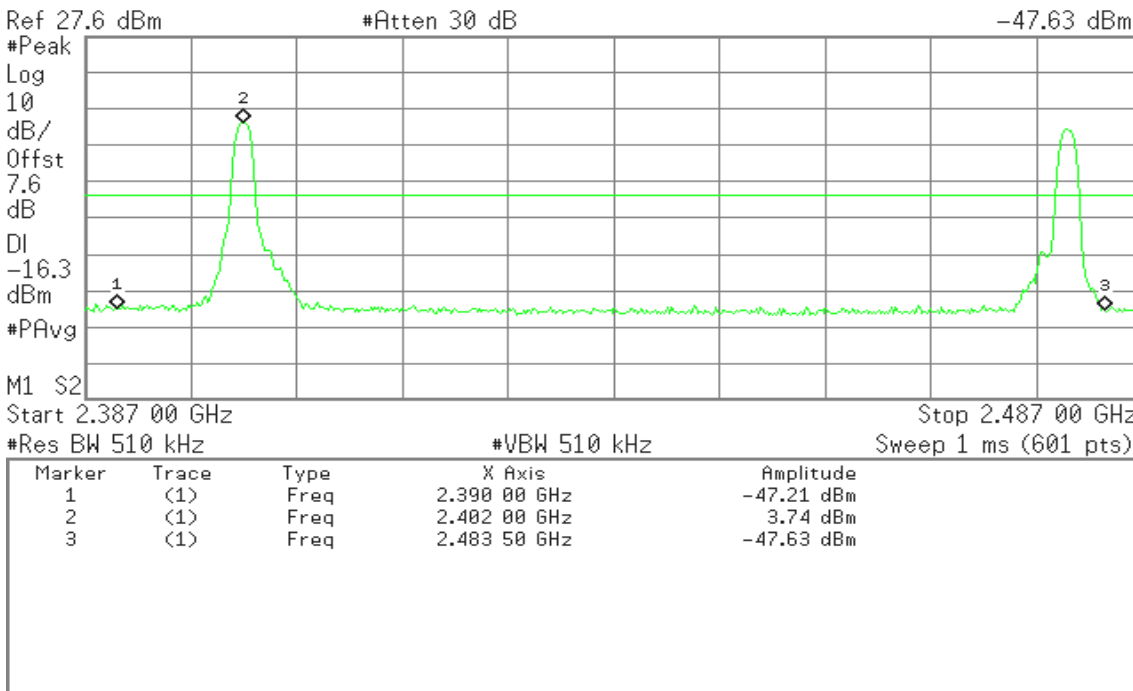




Spurious Emissions

GFSK / CH Low

Agilent

R L

Mkr1 2.41 GHz
5.43 dBm

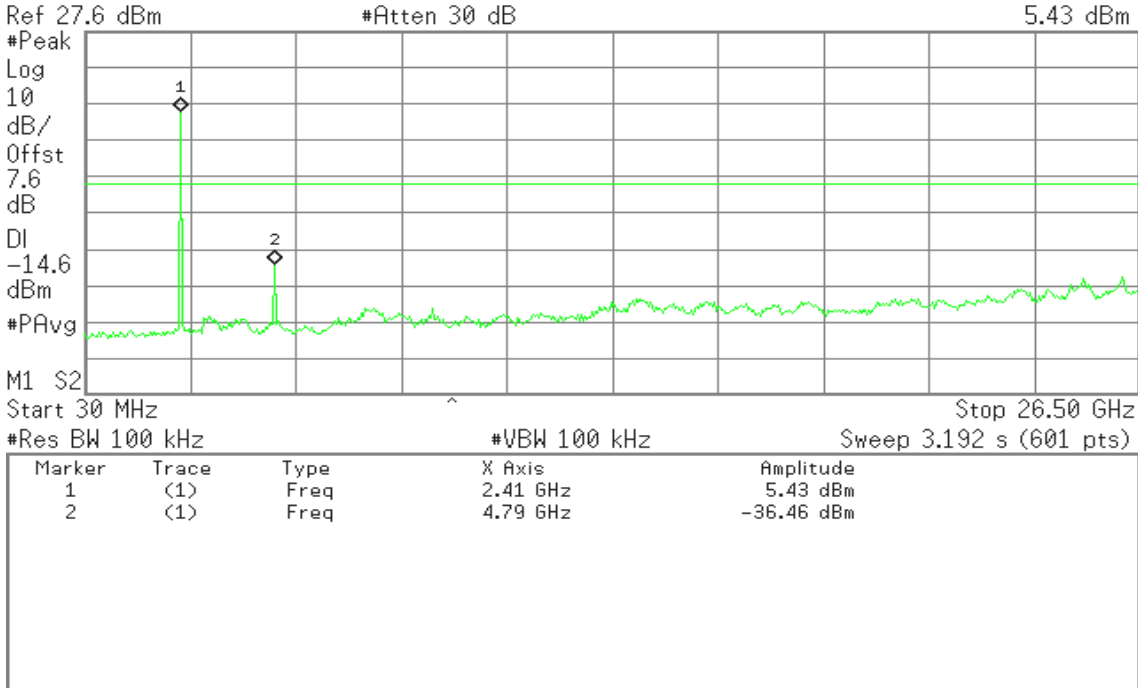


GFSK / CH Mid

Agilent

R L

Mkr1 2.46 GHz
5.72 dBm

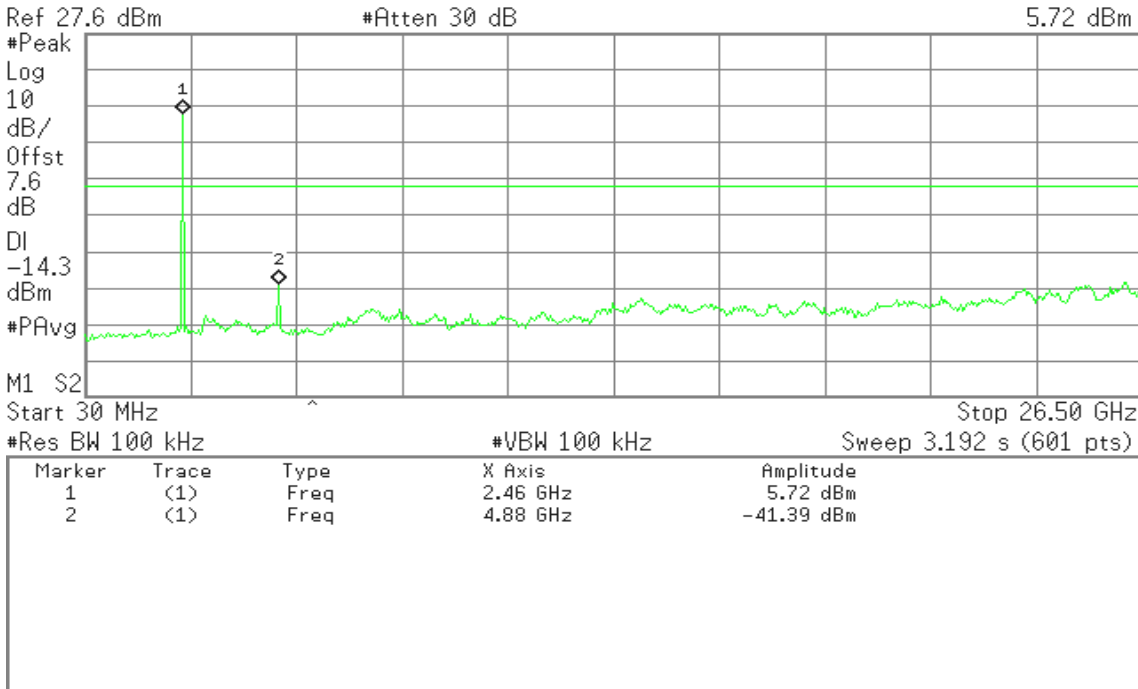




GFSK / CH High

Agilent

R L

Mkr1 2.50 GHz
4.14 dBm

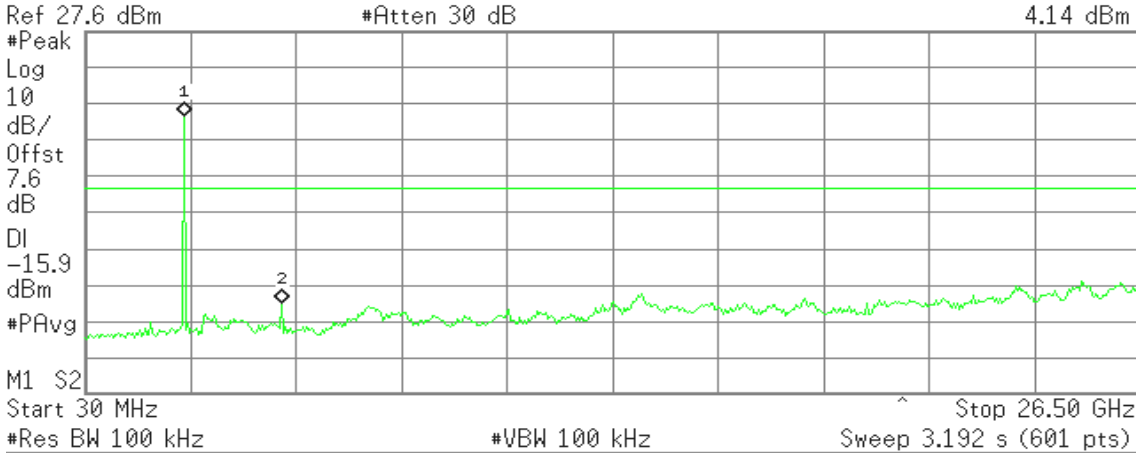


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.50 GHz	4.14 dBm
2	(1)	Freq	4.97 GHz	-47.33 dBm

8DPSK / CH Low

Agilent

R L

Mkr1 2.41 GHz
3.38 dBm

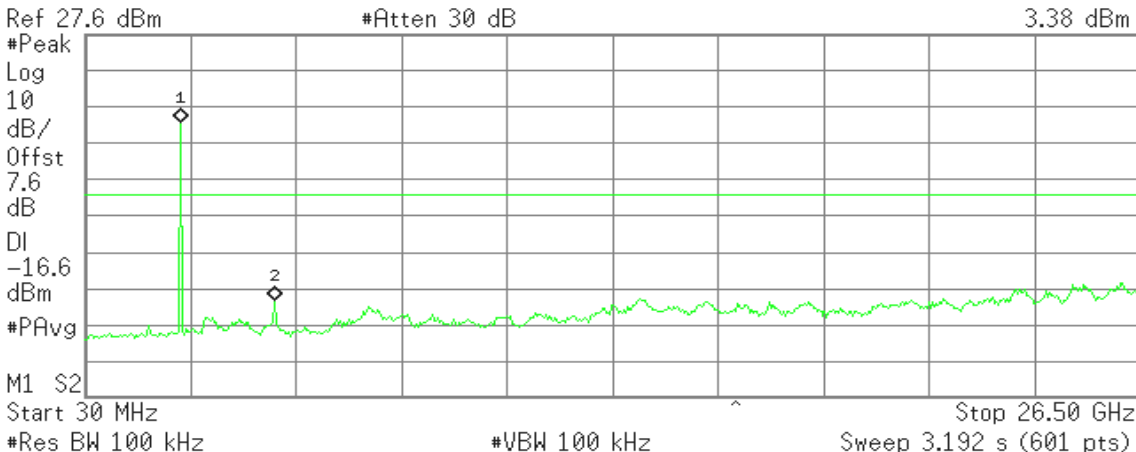

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.41 GHz	3.38 dBm
2	(1)	Freq	4.79 GHz	-45.40 dBm




8DPSK / CH Mid

Agilent

R L

Mkr1 2.46 GHz
0.44 dBm

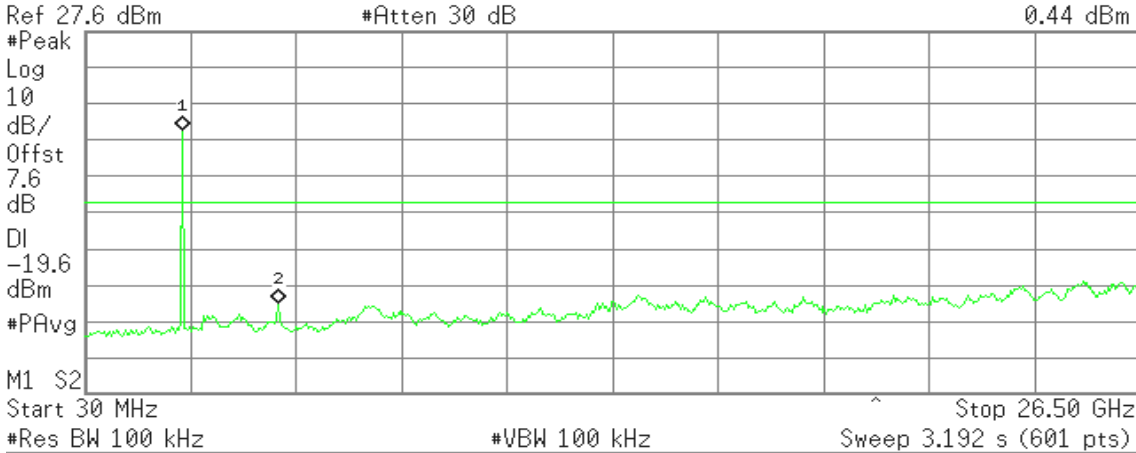


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.46 GHz	0.44 dBm
2	(1)	Freq	4.88 GHz	-47.13 dBm

8DPSK / CH High

Agilent

R L

Mkr2 3.29 GHz
-49.02 dBm

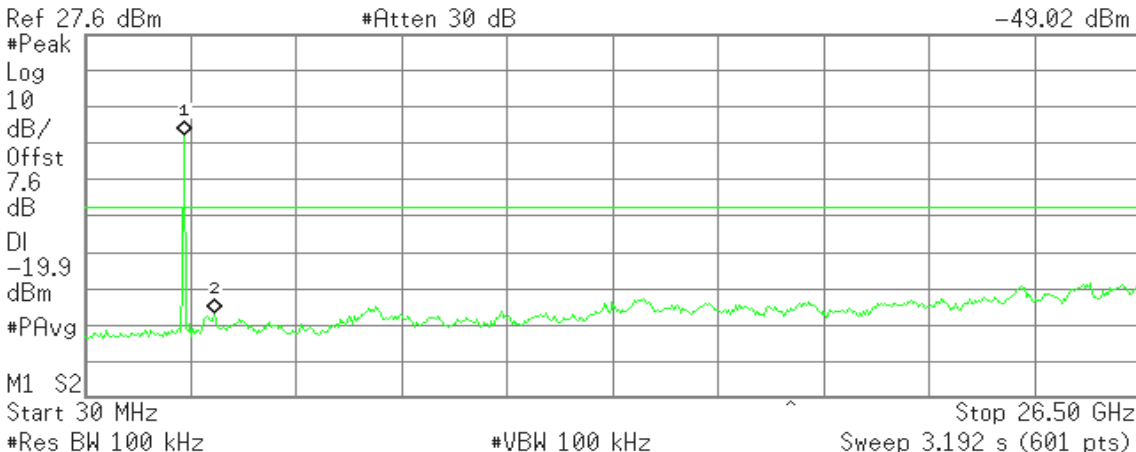

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.50 GHz	0.09 dBm
2	(1)	Freq	3.29 GHz	-49.02 dBm



7.8.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




TEST CONFIGURATION

Below 1 GHz

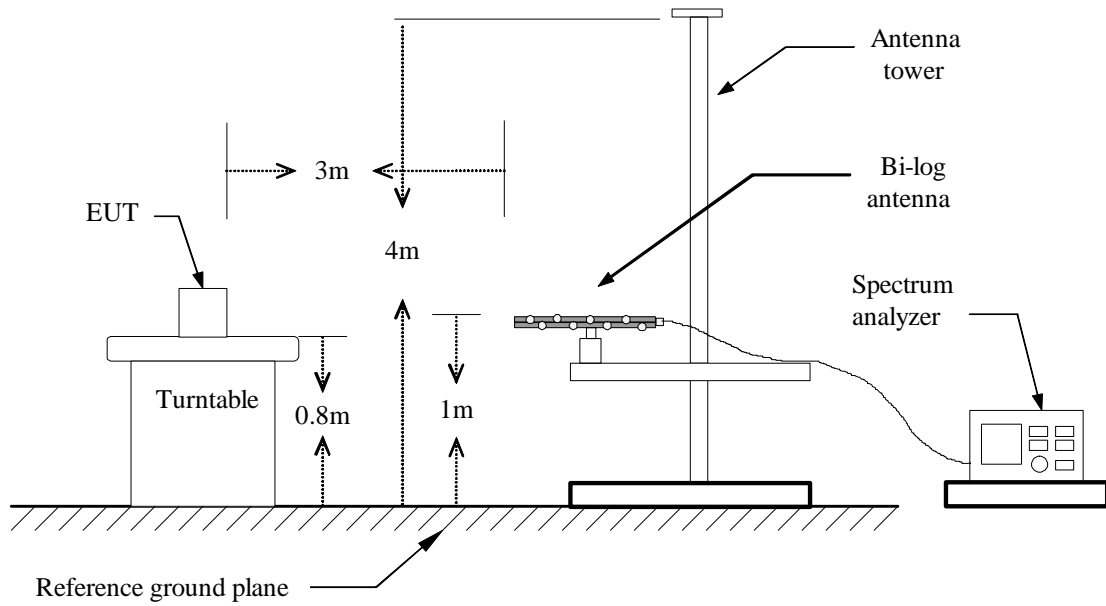

Above 1 GHz

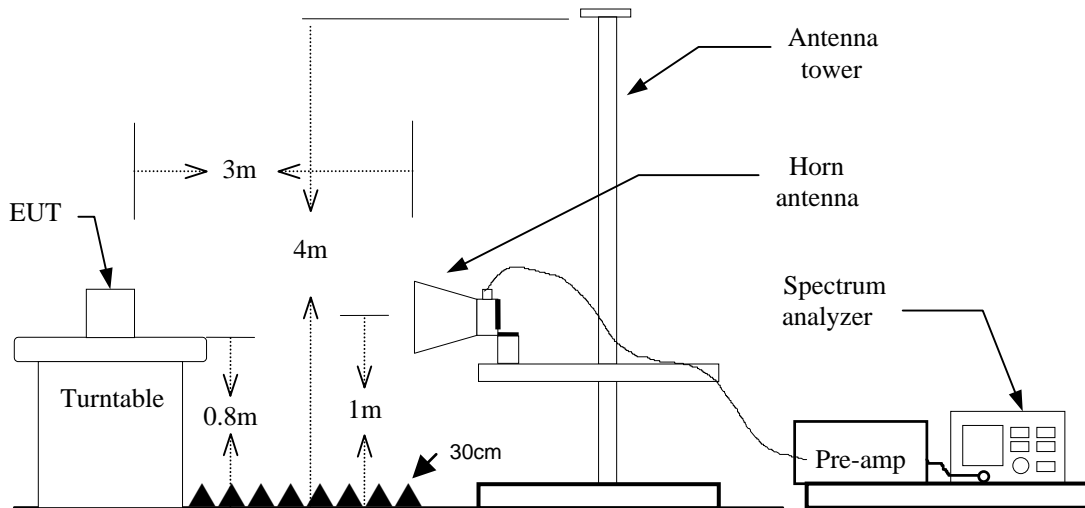



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 30MHz

RBW=10kHz / VBW=30kHz / Sweep=AUTO

30 ~ 1000MHz:

RBW=100kHz / VBW=300KHz / Sweep=AUTO

Above 1GHz:

a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted



TEST DATA

Below 1 GHz

Operation Mode: Transmitting

Test Date: 2013/6/20

Temperature: 26°C

Tested by: Louis Shen

Humidity: 56 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol. (H/V)	Remark
91.0100	34.50	1.55	36.05	43.50	-7.45	V	QP
114.2600	39.20	-2.88	36.32	43.50	-7.18	V	QP
150.2400	34.40	-6.16	28.24	43.50	-15.26	V	QP
398.8900	43.10	-10.38	32.72	46.00	-13.28	V	QP
451.4900	41.80	-10.81	30.99	46.00	-15.01	V	QP
932.8700	35.70	-4.96	30.74	46.00	-15.26	V	QP
118.7300	36.10	-5.45	30.65	43.50	-12.85	H	QP
135.4200	36.00	-2.04	33.96	43.50	-9.54	H	QP
157.6400	32.70	2.49	35.19	43.50	-8.31	H	QP
214.5600	48.30	-11.68	36.62	43.50	-6.88	H	QP
247.0400	51.00	-12.21	38.79	46.00	-7.21	H	QP
399.6700	48.40	-12.12	36.28	46.00	-9.72	H	QP

Remark:

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 30 MHz to the 1GHz.
3. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

GFSK

Operation Mode: TX / CH Low

Test Date: 2013/6/11

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1678.000	57.48	-5.45	52.03	74.00	-21.97	V	peak
1678.000	43.33	-5.45	37.88	54.00	-16.12	V	AVG
1864.000	53.95	-3.72	50.23	74.00	-23.77	V	peak
2280.000	52.74	-1.51	51.23	74.00	-22.77	V	peak
2650.000	53.10	-1.82	51.28	74.00	-22.72	V	peak
4805.000	54.96	2.23	57.19	74.00	-16.81	V	peak
4805.000	47.82	2.23	50.05	54.00	-3.95	V	AVG
5885.000	38.75	6.09	44.84	74.00	-29.16	V	peak
7205.000	40.94	10.08	51.02	74.00	-22.98	V	peak
9610.000	43.31	14.35	57.66	74.00	-16.34	V	peak
9610.000	34.95	14.35	49.30	54.00	-4.70	V	AVG
11950.000	37.64	10.74	48.38	74.00	-25.62	V	peak
12890.000	36.45	13.74	50.19	74.00	-23.81	V	peak
1404.000	50.82	-6.98	43.84	74.00	-30.16	H	peak
1678.000	52.75	-8.05	44.70	74.00	-29.30	H	peak
2654.000	51.07	-3.37	47.70	74.00	-26.30	H	peak
4805.000	52.62	5.54	58.16	74.00	-15.84	H	peak
4805.000	45.57	5.54	51.11	54.00	-2.89	H	AVG
6005.000	38.22	8.82	47.04	74.00	-26.96	H	peak
7105.000	37.98	10.37	48.35	74.00	-25.65	H	peak
9610.000	40.58	14.43	55.01	74.00	-18.99	H	peak
9610.000	32.15	14.43	46.58	54.00	-7.42	H	AVG
11800.000	36.69	10.70	47.39	74.00	-26.61	H	peak
12960.000	35.91	14.22	50.13	74.00	-23.87	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH Mid

Test Date: 2013/6/11

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1678.000	58.35	-5.45	52.90	74.00	-21.10	V	peak
1678.000	37.46	-5.45	32.01	54.00	-21.99	V	AVG
1864.000	54.57	-3.72	50.85	74.00	-23.15	V	peak
2280.000	53.30	-1.51	51.79	74.00	-22.21	V	peak
2650.000	53.76	-1.82	51.94	74.00	-22.06	V	peak
3190.000	44.26	-0.77	43.49	74.00	-30.51	V	peak
4880.000	52.71	3.92	56.63	74.00	-17.37	V	peak
4880.000	46.14	3.92	50.06	54.00	-3.94	V	AVG
6545.000	38.71	6.94	45.65	74.00	-28.35	V	peak
9760.000	38.34	13.67	52.01	74.00	-21.99	V	peak
9760.000	29.73	13.67	43.40	54.00	-10.60	V	AVG
11990.000	36.38	10.76	47.14	74.00	-26.86	V	peak
12920.000	36.78	13.94	50.72	74.00	-23.28	V	peak
1334.000	55.03	-8.60	46.43	74.00	-27.57	H	peak
1678.000	54.67	-8.05	46.62	74.00	-27.38	H	peak
1864.000	53.55	-6.14	47.41	74.00	-26.59	H	peak
2894.000	49.46	-1.77	47.69	74.00	-26.31	H	peak
4310.000	39.15	7.59	46.74	74.00	-27.26	H	peak
4880.000	46.11	6.81	52.92	74.00	-21.08	H	peak
4880.000	40.82	6.81	47.63	54.00	-6.37	H	AVG
5915.000	37.79	9.16	46.95	74.00	-27.05	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH High

Test Date: 2013/6/11

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1678.000	56.69	-5.45	51.24	74.00	-22.76	V	peak
1866.000	54.17	-3.67	50.50	74.00	-23.50	V	peak
2662.000	52.99	-1.74	51.25	74.00	-22.75	V	peak
3590.000	42.01	2.86	44.87	74.00	-29.13	V	peak
4960.000	44.26	4.94	49.20	74.00	-24.80	V	peak
6580.000	38.27	6.89	45.16	74.00	-28.84	V	peak
1652.000	52.09	-8.55	43.54	74.00	-30.46	H	peak
2152.000	49.25	-3.67	45.58	74.00	-28.42	H	peak
2792.000	50.00	-2.55	47.45	74.00	-26.55	H	peak
4310.000	39.08	7.59	46.67	74.00	-27.33	H	peak
4960.000	41.71	7.41	49.12	74.00	-24.88	H	peak
6550.000	38.54	8.02	46.56	74.00	-27.44	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



8DPSK

Operation Mode: TX / CH Low

Test Date: 2013/6/11

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1678.000	57.08	-5.45	51.63	74.00	-22.37	V	peak
1864.000	53.60	-3.72	49.88	74.00	-24.12	V	peak
2280.000	52.79	-1.51	51.28	74.00	-22.72	V	peak
2654.000	53.52	-1.79	51.73	74.00	-22.27	V	peak
3190.000	45.77	-0.77	45.00	74.00	-29.00	V	peak
4805.000	47.61	2.23	49.84	74.00	-24.16	V	peak
6565.000	37.84	6.91	44.75	74.00	-29.25	V	peak
1678.000	53.11	-8.05	45.06	74.00	-28.94	H	peak
2102.000	49.15	-3.78	45.37	74.00	-28.63	H	peak
2656.000	49.68	-3.37	46.31	74.00	-27.69	H	peak
4300.000	38.55	7.66	46.21	74.00	-27.79	H	peak
4805.000	45.53	5.54	51.07	74.00	-22.93	H	peak
5895.000	37.94	9.10	47.04	74.00	-26.96	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH Mid

Test Date: 2013/6/11

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1678.000	56.80	-5.45	51.35	74.00	-22.65	V	peak
1864.000	53.59	-3.72	49.87	74.00	-24.13	V	peak
2280.000	53.56	-1.51	52.05	74.00	-21.95	V	peak
2280.000	42.93	-1.51	41.42	54.00	-12.58	V	AVG
2796.000	51.32	-2.07	49.25	74.00	-24.75	V	peak
3660.000	40.25	2.65	42.90	74.00	-31.10	V	peak
4880.000	45.50	3.92	49.42	74.00	-24.58	V	peak
5735.000	39.11	5.66	44.77	74.00	-29.23	V	peak
1678.000	52.62	-8.05	44.57	74.00	-29.43	H	peak
2076.000	50.10	-4.41	45.69	74.00	-28.31	H	peak
2654.000	49.87	-3.37	46.50	74.00	-27.50	H	peak
4300.000	38.99	7.66	46.65	74.00	-27.35	H	peak
4880.000	40.60	6.81	47.41	74.00	-26.59	H	peak
5945.000	37.85	9.04	46.89	74.00	-27.11	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH High

Test Date: 2013/6/11

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1678.000	57.22	-5.45	51.77	74.00	-22.23	V	peak
1864.000	53.95	-3.72	50.23	74.00	-23.77	V	peak
2280.000	52.27	-1.51	50.76	74.00	-23.24	V	peak
2662.000	53.16	-1.74	51.42	74.00	-22.58	V	peak
3055.000	45.60	-0.33	45.27	74.00	-28.73	V	peak
4960.000	40.55	4.94	45.49	74.00	-28.51	V	peak
6540.000	38.44	6.94	45.38	74.00	-28.62	V	peak
1652.000	54.05	-8.55	45.50	74.00	-28.50	H	peak
2166.000	49.14	-3.63	45.51	74.00	-28.49	H	peak
2652.000	49.81	-3.37	46.44	74.00	-27.56	H	peak
4300.000	39.01	7.66	46.67	74.00	-27.33	H	peak
5580.000	37.49	9.13	46.62	74.00	-27.38	H	peak
6910.000	38.83	9.64	48.47	74.00	-25.53	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.9. POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



TEST DATA

Operation Mode: Normal Link

Test Date: 2013/6/21

Temperature: 25°C

Tested by: Francis Lee

Humidity: 57% RH

Test

Freq. (MHz)	QP Reading	AV Reading	Corr. factor	QP Result	AV Result	QP Limit	AV Limit	QP Margin	AV Margin	Note
0.1513	34.77	8.33	9.68	44.45	18.01	65.92	55.93	-21.47	-37.92	L1
0.1729	43.77	31.08	9.68	53.45	40.76	64.82	54.82	-11.37	-14.06	L1
0.2307	35.69	23.87	9.67	45.36	33.54	62.42	52.42	-17.06	-18.88	L1
2.9656	27.46	23.52	9.81	37.27	33.33	56.00	46.00	-18.73	-12.67	L1
4.6524	30.14	18.06	9.89	40.03	27.95	56.00	46.00	-15.97	-18.05	L1
22.9746	28.31	23.13	10.23	38.54	33.36	60.00	50.00	-21.46	-16.64	L1
0.1735	42.61	29.92	9.66	52.27	39.58	64.79	54.79	-12.52	-15.21	L2
0.2313	34.68	23.28	9.66	44.34	32.94	62.40	52.40	-18.06	-19.46	L2
0.2882	26.14	17.33	9.67	35.81	27.00	60.58	50.58	-24.77	-23.58	L2
3.8991	31.63	20.04	9.82	41.45	29.86	56.00	46.00	-14.55	-16.14	L2
15.3627	23.89	17.82	10.23	34.12	28.05	60.00	50.00	-25.88	-21.95	L2
23.4003	29.49	25.46	10.34	39.83	35.80	60.00	50.00	-20.17	-14.20	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

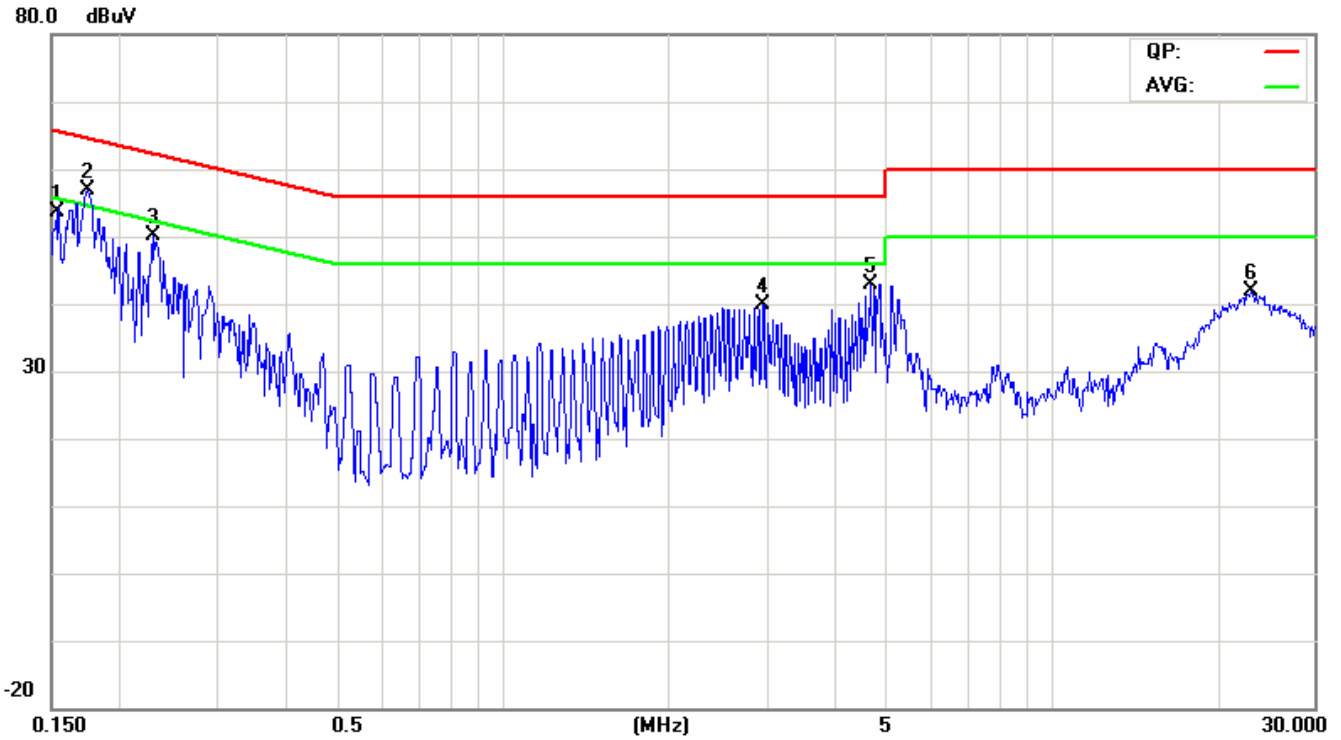

Conducted emissions (Line 2)

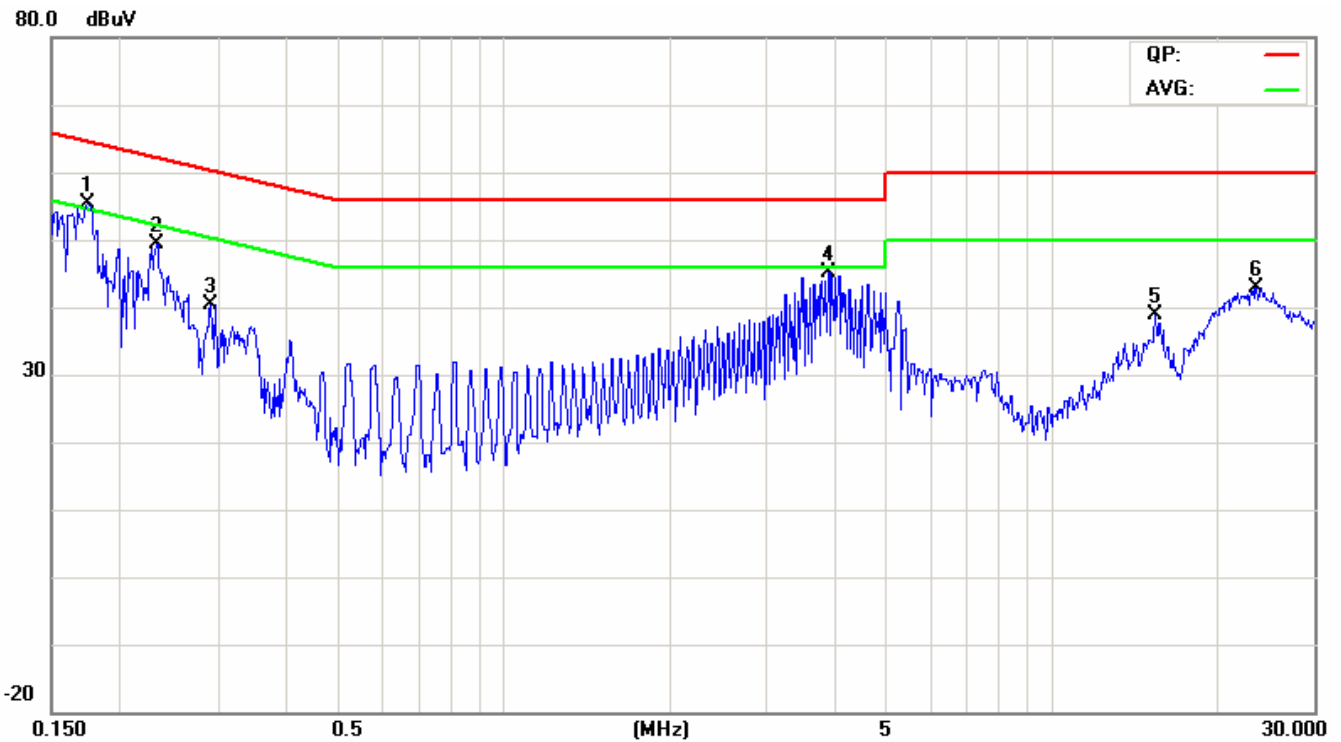



8 PHOTOGRAPHS OF TEST SETUP



Radiated Emission Setup Photos

Below 1GHz





Above 1GHz

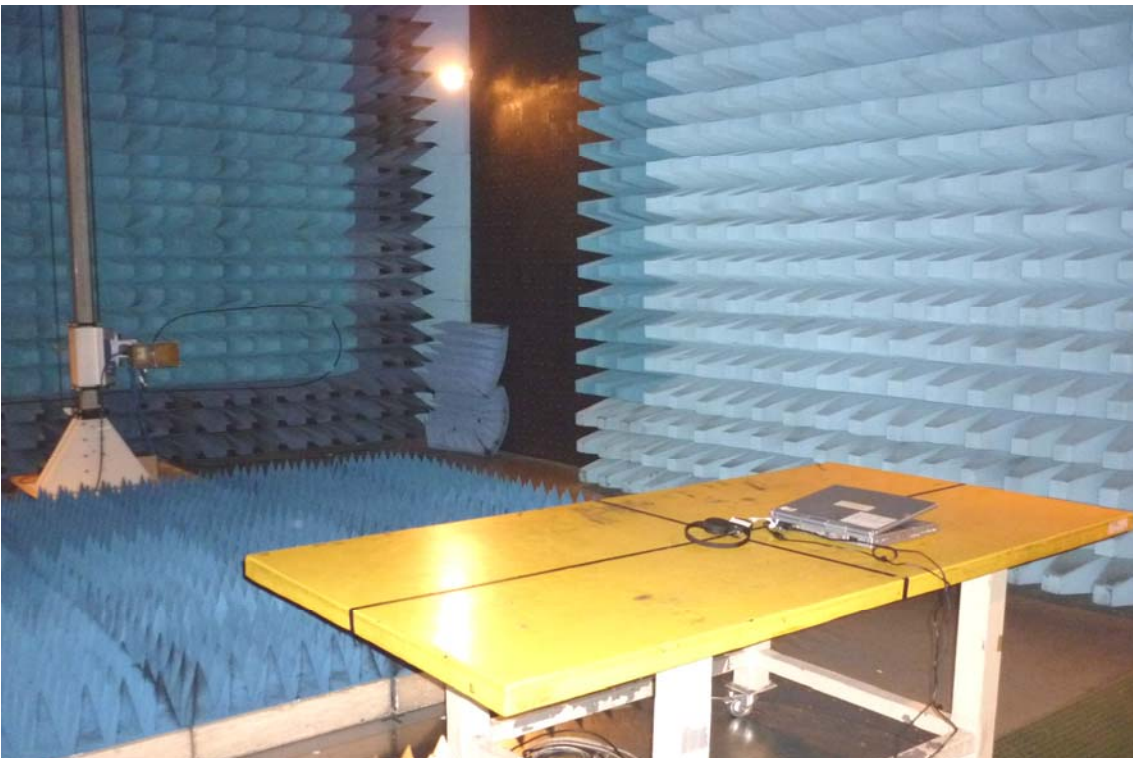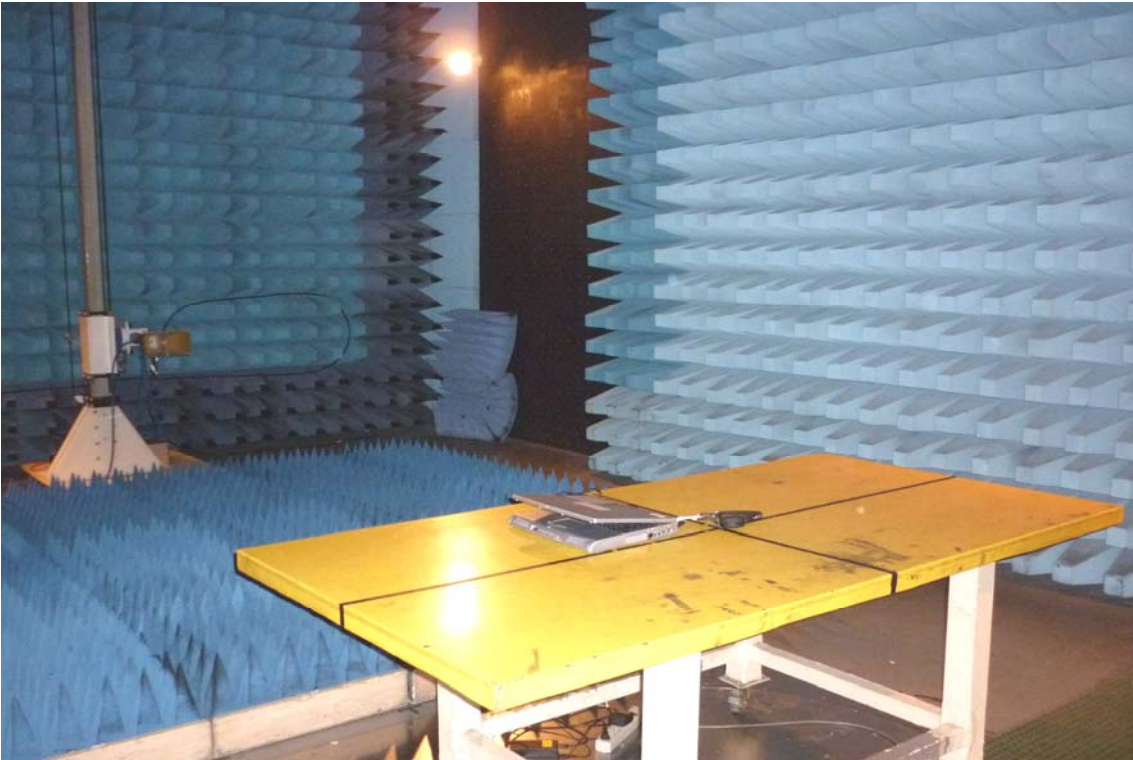



Conducted Emission Setup Photo





Power Line Conducted Emissions Setup Photos

