

FCC TEST REPORT

REPORT NO.: RF950824L18

MODEL NO.: MPO (refer to page 5 for other models)

RECEIVED: Sep. 05, 2006

TESTED: Sep. 05 ~ Sep. 06, 2006

ISSUED: Sep. 07, 2006

APPLICANT: Acrox Technologies Co., Ltd.

ADDRESS: 8F, No. 437, Rui Guang RD., Nei Hu Dist., Taipei
114, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 16 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	D GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	6
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST PROCEDURE AND RESULT	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.2	RADIATED EMISSION MEASUREMENT	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	9
4.2.2	TEST INSTRUMENT	10
4.2.3	TEST PROCEDURE	11
4.2.4	TEST SETUP	12
4.2.5	EUT OPERATING CONDITION	12
4.2.6	TEST RESULTS	13
4	INFORMATION ON THE TESTING LABORATORIES.....	15
	APPENDIX-A	A-1

1 CERTIFICATION

PRODUCT : RF Laser Mouse

BRAND NAME : Acrox (refer to page 5 for other Brands)

MODEL NO. : MPO (refer to page 5 for other models)

APPLICANT : Acrox Technologies Co., Ltd.

TESTED : Sep. 05 ~ Sep. 06, 2006

TEST SAMPLE : ENGINEERING SAMPLE

STANDARDS : FCC Part 15, Subpart C (Section 15.227),
ANSI C63.4-2003

The above equipment (model: MPO) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Sep. 07, 2006
Andrea Hsia

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Sep. 07, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Sep. 07, 2006
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	NA	Power supply is 3.0Vdc from batteries
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -12.47dB at 296.31MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.61 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	RF Laser Mouse
MODEL NO.	MPO
FCC ID	PRDMPO008PXOX
POWER SUPPLY	3Vdc from battery
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	27.045
NUMBER OF CHANNEL	1
ANTENNA TYPE	Loop antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are eight models provided to this EUT

Brand	Model	Remark
Acrox	MOZ	For Marketing Difference Only
Acrox	MPN	For Marketing Difference Only
Acrox	MOY	For Marketing Difference Only
Acrox	MPT	For Marketing Difference Only
Acrox	MPI	For Marketing Difference Only
Acrox	MPU	For Marketing Difference Only
Acrox	MPJ	For Marketing Difference Only
Gearhead	MPO	For Marketing Difference Only


2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Two channels were provided to this EUT.

CHANNEL	FREQUENCY
1	27.045

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

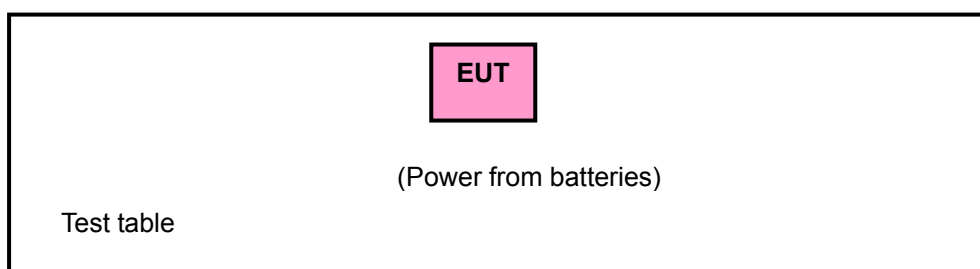

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to		Description
	PLC	RE<1G	
-	-	√	-

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

Radiated Emission Test (Below 1 GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
27.045	27.045	FSK

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.227)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

NA

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESMI	839013/007 839379/002	Jan. 24, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSEK30	100049	Aug. 13, 2007
BILOG Antenna SCHWARZBECK	VULB9163	121	May. 31, 2007
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 22, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
Loop Antenna	HFH2-Z2	100070	Nov. 28, 2007
Preamplifier Agilent	8449B	3008A01911	Sep. 22, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Dec. 13, 2006
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Mar. 08, 2007
Software ADT.	ADT_Radiated_ V7.6.01	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Antenna Tower Controller EMCO	2090	NA	NA
Turn Table EMCO	2087-2.03	NA	NA
Turn Table Controller EMCO	2090	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission of fundamental frequency is worst case between horizontal and vertical polarity

4.2.4 TEST SETUP

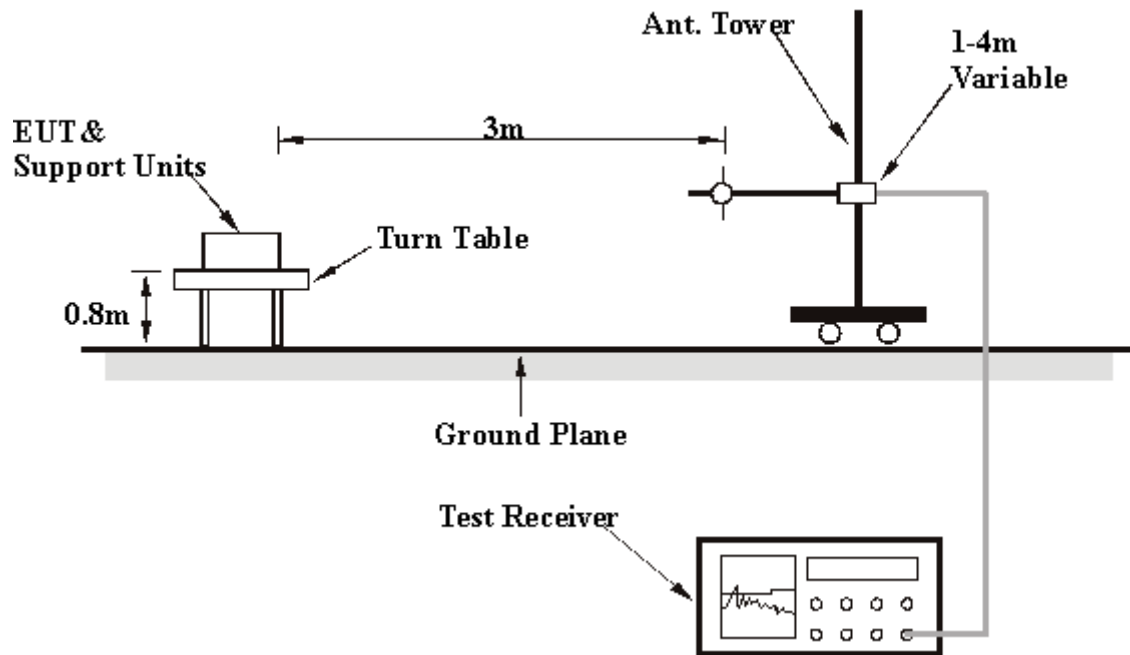

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmitting condition.

4.2.6 TEST RESULTS

RADIATED WORST-CASE DATA

CHANNEL	27.045MHz	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 68 % RH, 991 hPa	INPUT POWER	3Vdc
DETECTOR FUNCTION	Peak / Average	TESTED BY	Lori Chiu

TEST DISTANCE AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.05	43.12 PK	100	-56.08	1.52	52	30.91	12.21
2	*27.05	42.60 AV	80	-37.40	1.52	52	30.39	12.21

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*"= Fundamental frequency.
 6. Loop Antenna was used for all frequency below 30MHz.

CHANNEL	27.045MHz	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 68 % RH, 991 hPa	INPUT POWER	3Vdc
DETECTOR FUNCTION	Quasi-Peak	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.33	16.52 QP	40.00	-23.48	2.50 H	308	2.96	13.56
2	162.18	18.83 QP	43.50	-24.67	2.00 H	308	6.38	12.45
3	216.61	21.25 QP	46.00	-24.75	1.00 H	105	10.78	10.47
4	269.10	28.30 QP	46.00	-17.70	2.00 H	105	15.22	13.08
5	296.31	33.53 QP	46.00	-12.47	3.00 H	30	19.18	14.36
6	323.53	24.32 QP	46.00	-21.68	1.00 H	105	9.54	14.78
7	405.17	24.08 QP	46.00	-21.92	2.00 H	270	7.33	16.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.54	17.83 QP	40.00	-22.17	1.00 V	175	7.85	9.98
2	269.10	20.78 QP	46.00	-25.22	2.50 V	206	7.69	13.08
3	296.31	24.14 QP	46.00	-21.86	2.00 V	339	9.79	14.36
4	405.17	19.31 QP	46.00	-26.69	1.50 V	181	2.57	16.75
5	729.80	22.83 QP	46.00	-23.17	4.00 V	99	-0.47	23.30
6	951.40	27.95 QP	46.00	-18.05	2.50 V	263	0.63	27.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.