



ETS Dr.GenZ Taiwan PS Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

Accredited Testing Laboratory



A2LA Cert.No.: 2300.01

PTCRB Accredited Type Certification Test House

FCC

TEST - REPORT

FCC Part 15 C for IEEE 802.11 g device

FCC ID: PRL-IWE1300

Test report no.: W6M20602-6632-C-2

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	NOTES	3
1.2	TESTING LABORATORY	4
1.2.1	Location	4
1.2.2	Details of accreditation status	4
1.3	DETAILS OF APPROVAL HOLDER	4
1.4	APPLICATION DETAILS	5
1.5	GENERAL INFORMATION OF TEST ITEM	5
1.6	TEST STANDARDS	6
2	TECHNICAL TEST	7
2.1	SUMMARY OF TEST RESULTS	7
2.2	TEST ENVIRONMENT.....	7
2.3	TEST EQUIPMENT LIST	8
3	TEST RESULTS (ENCLOSURE).....	13
3.1	PEAK OUTPUT POWER (TRANSMITTER)	14
3.2	EQUIVALENT ISOTROPIC RADIATED POWER	15
3.2.1	Transmitter.....	15
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS	15
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....	16
3.5	SPURIOUS EMISSIONS (TX)	17
3.6	MINIMUM 6 DB BANDWIDTH	21
3.7	PEAK POWER SPECTRAL DENSITY.....	22
3.8	RADIATED EMISSIONS FROM RECEIVER SECTION OF TRANSCEIVER.....	23
3.9	POWER LINE CONDUCTED EMISSION	27
	APPENDIX	29
	APPENDIX A.....	30
	APPENDIX B.....	31
	APPENDIX C.....	32
	APPENDIX D.....	33
	APPENDIX E	34
	APPENDIX F	35
	APPENDIX G.....	36
	APPENDIX H.....	37

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according to IEEE 802.11 g.

This report is related to FCC Part 15 C (OFDM device).

Tester:

April 28, 2006

Orville Chang



Date

ETS-Lab.


Name

Signature

Technical responsibility for area of testing:

April 28, 2006

Steven Chung



Date

ETS

Name

Signature

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

1.2 Testing laboratory

1.2.1 Location

OATS
No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company
ETS Dr.Genx Taiwan PS Co., Ltd.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.
Tel : 886-2-66068877
Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

PTCRB Accredited Type Certification Test House

1.3 Details of approval holder

Name	: Interepoch Technology, Inc.
Street	: 6F, No.1, Alley 1, Lane 235, Pao-Chiao Rd., Hsin-Tien City
Town	: Taipei Hsien
Country	: Taiwan, R.O.C.
Telephone	: +886-2-8665-0305
Fax	: +886-2-8665-0306
Contact	: Mr. Jason Liu
Telephone	: +886-2-8665-0305

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

1.4 Application details

Date of receipt of application : Feb. 24, 2006
Date of receipt of test item : April 21, 2006
Date of test : from April 25, 2006 to April 28, 2006

1.5 General information of Test item

Type of test item : Wireless LAN 802.11b+g
Model Number : IWE1300
Brand Name : ./.

Hardware : V.4
Software : 2.6.5.4394
Serial number : without
Photos : see Annex

Technical data

Frequency band : 2.4 GHz – 2.4835 GHz
Frequency (ch A) : 2.412 GHz
Frequency (ch B) : 2.437 GHz
Frequency (ch C) : 2.462 GHz
Number of Channels : 11
Operation modes : duplex
Modulation Type : DSSS / OFDM

Fixed point-to-point operation: ☐ Yes / ☒ No

Type of Antenna : Antenna 2.4G + R-SMA connector

Antenna gain of Antenna : 2 dBi

Input : 100-240VAC (AC/DC ADAPTOR)
120 VAC (power on POE)

Power supply Output : 5 VDC

Emission designator : 17M9W7D

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Host device: none

Classification :

Fixed Device	☒
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☐

Transmitter**Unom**

Power (ch A) : Conducted: 24.23 dBm
Power (ch B) : Conducted: 22.90 dBm
Power (ch C) : Conducted: 21.42 dBm

Manufacturer:
(if applicable)

Name : ./.
Street : ./.
Town : ./.
Country : ./.

Additional information: The sample is using WLAN technology according IEEE 802.11 b/g. For this report the function according IEEE 802.11g is considered only. The scheme for frequency generation, spectrum spreading, receiver parameters, synchronization procedure, and other parameters are determined by the mentioned standard above.

1.6 Test standards

Technical standard : FCC RULES PART 15 / SUBPART C § 15.247 / SUBPART B

FCC ID: PRL-IWE1300

2.1 Summary of test results

☒

9

Temperature	: 23 °C
Relative humidity content	: 20 ... 75 %
Air pressure	: 86 ... 103 kPa
Power supply	Input : 100-240VAC (AC/DC ADAPTOR) 120 VAC (power on POE)
	Output : 5 VDC
Extreme conditions parameters	: --

Remark: The testing items of this test report are all according to customer's request.
All network cables are shielding cables.

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2005/10/27	2006/10/26
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW		
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2005/10/25	2006/10/24
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2005/10/21	2006/10/20
ETSTW-CE 006	IMPULS-BEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2004/11/11	2006/11/10
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	ABSORPTIONS- MESSWANDLER- ZANGE	2005/10/24	2007/10/23
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40- 1P-U	MAA0305-009	GIANT FORCE	2005/8/18	2006/8/17
ETSTW-CS 001	SIGNAL GENERATOR	SMX	849254/003	R&S	2005/10/14	2006/10/13
ETSTW-CS 002	COUPLING AND DECOUPLING NETWORK	CDN S751	19263	SCHAFFNER	2005/10/14	2006/10/13
ETSTW-CS 003	COUPLING AND DECOUPLING NETWORK	CDN T400	19820	SCHAFFNER	2005/10/14	2006/10/13
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	SCHAFFNER	2005/10/27	2006/10/26
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	2005/10/14	2006/10/13
ETSTW-CS 004	6 dB Attenuator	HFP-5100-3/06 N M/F	2010876106			
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/10/14	2007/10/13
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2005/10/24	2006/10/23
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2005/10/29	2006/10/30
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2005/10/16	2006/10/15
ETSTW-RE 015	ANTENNA	HK116	841489/003	R&S	2005/1/14	2007/1/11
ETSTW-RE 016	ANTENNA	HL223	848953/006	R&S	2005/1/14	2007/1/11
ETSTW-RE 017	ANTENNA	HL025	352886/001	R&S	2005/9/6	2007/9/3
ETSTW-RE 018	ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2005/10/14	2006/10/13
ETSTW-RE 022	AMPLIFIER	8447D	2944A09837	Brüel&Kjær	2005/10/14	2006/10/13
ETSTW-RE 027	Passive Loop Antenna	6512	34563	EMCO	2004/6/30	2007/6/29

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

ETSTW-RE 030	Double-Ridged Waveguide Horn Antenna	3117	35224	EMCO	2004/5/5	2006/5/4
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2005/10/17	2006/10/16
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2005/10/17	2006/10/16
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2005/5/19	2007/5/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2005/9/6	2006/9/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM		
ETSTW-EMI 001	HARMONICS 1000	HAR1000-1P	93	EMC-PARTNER	2005/9/11	2006/11/10
ETSTW-EMS 001	Clamp BASELSTRASSE 160 CH-4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	2004/11/2	2006/11/1
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2005/10/27	2006/10/26
ETSTW-EMS 004	ESD generator minizap	ESD2000	016	EMC-PARTNER	2005/10/27	2006/10/26
ETSTW-EMS 008	Safety Test Solutions	ELT-400	E-0039	Narda	2005/1/4	2007/1/3
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	2004/12/3	2007/12/2
ETSTW-EMS 010	Coupling De-coupling Network	CDN-UTP8	014	EMC-PARTNER	2005/9/1	2008/8/31
ETSTW-EMS 012	EM Injection Clamp	F-2031-23MM	476	FCC	2005/8/11	2007/8/10
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR		
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	2005/10/21	2006/10/20
ETSTW-RS 005	Electric Field Probe Type 8.3	EMR-20	BN 2244/20	Narda	2005/9/7	2006/9/6
ETSTW-RS 006	SIGNAL GENERATOR	SML03	101551	R&S	2005/10/21	2006/10/20
ETSTW-GSM 01	SIM Simulator	IT3	B2004-50106	ORGA	2005/9/15	2006/9/14
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	103489	R&S	2005/11/15	2006/11/14
ETSTW-GSM 03	Agilent 8960 Test Set 1	E5515C	GB44052675	Agilent	2004/7/14	2006/7/13
ETSTW-GSM 04	Agilent 8960 Test Set 2	E5515C	GB44052665	Agilent	2004/7/14	2006/7/13
ETSTW-GSM 05	Agilent 8960 Test Set 3	E5515C	GB44052652	Agilent	2004/7/17	2006/7/16
ETSTW-GSM 06	Agilent 8960 Test Set 4	E5515C	GB44052684	Agilent	2004/7/16	2006/7/15
ETSTW-GSM 07	Agilent 8960 Test Set 5	E5515C	GB44052658	Agilent	2004/7/14	2006/7/13
ETSTW-GSM 08	Agilent 8960 Test Set 6	E5515C	GB44052666	Agilent	2004/7/16	2006/7/15

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

ETSTW-GSM 10	Combiner Wessex / Anite	B4605/100	053	Wessex / Anite	2004/7/14	2006/7/13
ETSTW-GSM 11	GSM 850,900,1800,1900 Test system	TS8950G		R&S	2005/11/1	2006/10/31
ETSTW-GSM 12	Acoustical Calibrator	4231	2463874	Brüel&Kjær	2005/10/31	2006/10/30
ETSTW-GSM 13	Conditioning Amplifier	2690--0S2	2437856	Brüel&Kjær		
ETSTW-GSM 14	Telephone Test Head	4602B	2465324	Brüel&Kjær		
ETSTW-GSM 15	Mouth Simulator	4227	2462516	Brüel&Kjær		
ETSTW-GSM 16	TEMP.&HUMIDITY CHAMBER	GTH-120-40-1P-U	MAA0501002	GIANT FORCE	2005/12/29	2006/12/28
ETSTW-GSM 17	ANTENNT COPLER	CMU-Z10	100988	R&S		
ETSTW-GSM 18	AUDIO ANALYZER	UPL16	100173	R&S	2005/10/29	2006/10/28
ETSTW-GSM 23	SPLITTER	4901.19.A	None	SUHNER		
ETSTW-GSM 24	Vibration Testing System	VS-100V	5494	Vibration	2005/12/20	2006/12/19

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by ETS Dr.Genx Taiwan PS Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.) The Registration Number: 930600.

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANTENNA & GROUND:

This unit uses Antenna 2.4G + R-SMA connector. (see photos)

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	☒	☒	☐
Equivalent radiated Power	15.247(b)(3)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(c)	☒	☒	☐
Band Edge Measurement	15.247(c)	☒	☒	☐
Minimum 6 dB Bandwidth	15.247(a)(2)	☒	☒	☐
Peak Power Spectral Density	15.247(d)	☒	☒	☐
Radiated Emission from Digital Part And Receiver L.O.	15.109	☒	☒	☐
Power Line Conducted Emission	15.207	☒	☒	☐

The follows is intended to leave blank.

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Test condition		Conducted Power		
		Channel A	Channel B	Channel C
		[dBm]	[dBm]	[dBm]
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120 \text{ V}$	24.23	22.90	21.42
Measurement uncertainty		< 3 dB		

Test condition $T_{nom} = 23^{\circ}\text{C}$, $V_{nom} = 120 \text{ V}$	Signal Field strength TX highest power mode dB $\mu\text{V/m}$
Frequency [MHz]	
2412	109.37
Measurement uncertainty	< 3 dB

Remarks: The diagrams for the field strength measurements are included in Appendix.

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain $> 6 \text{ dBi}$ and using fixed point-to-point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 003 , ETSTW-RE 012 , ETSTW-RE 017 , ETSTW-RE 024

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain

EIRP = 24.23 dBm + 2 dBi

= 26.23 dBm

Limit: EIRP = +36 dBm for Antenna gain <6dBi

3.2.1 Transmitter

Integral Antenna:

At the transmitter the measurement was transacted with the modulation declared by the manufacturer and the maximum available output power of the EUT.

In this arrangement the EUT fulfils the requirements of the FCC rules § 15.247, subpart C, section b.

3.3 RF Exposure Compliance Requirements

The test sample is a WLAN access point intended for fixed installation.

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4\pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain G = AG-D

Item	Unit	Value	Remarks
P	mW	264.85001	Peak value
D	dB		
AG	dBi	1.6	
G		2	Calculated Value
R	cm	20	Assumed value
S	mW/cm ²	0.084304	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure	
Frequency (MHz)	Power Density (mW/cm ²)
1500 – 100.000	1,0

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 1000 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 100Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of DSSS Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

$$\text{Duty cycle correction} = 20 \log (\text{dwell time} / 100\text{ms})$$

No duty cycle correction was added to the reading.

$$54.0\text{dB } \mu\text{V/m} + 20 \text{ dB} = 74 \text{ dB } \mu\text{V/m}$$

Remarks: see attached diagrams

Test equipment used: ETS 0125, ETS 0271

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz:

Max. reading – 20 dB

109.37 dB μ V/m- 20 dB= 89.37 dB μ V/m

Guidance on Measurement of DSSS Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. Reading-20dB+20dB(because Peak detector is used)

89.37 dB μ V/m

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

No duty cycle correction was added to the reading

109.37 dB μ V/m- 20 dB= 89.37 dB μ V/m

Remarks: see attached diagrams

Test equipment used: ETSTW-RE 003 , ETSTW-RE 012 , ETSTW-RE 015 , ETSTW-RE 016 , ETSTW-RE 017 , ETSTW-RE 024

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Duty-Cycle Correction Factor".

Summary table with radiated data of the test plots

CH 1

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	124.993793	22.29	13.74	PK	36.03	43.5	7.47	153.7
	249.699399	30.84	13.80	QP	44.64	46	1.36	178.6
	333.066132	23.05	16.18	PK	39.23	46	6.77	134.8
	2378.356713	41.62	2.07	PK	43.69	54	10.31	199.7
	4929.859719	41.18	4.66	PK	45.84	54	8.16	183.6

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	125.003134	21.38	13.76	PK	35.14	43.5	8.36	217.8
	249.699399	31.98	13.80	QP	45.78	46	0.22	177.4
	333.066132	16.03	16.18	PK	32.21	46	13.79	164.5
	2377.6555310	59.71	2.07	PK	61.78	74	12.22	143.3
	2377.6555310	46.03	2.07	AV	48.10	54	5.90	143.3
	2483.5	63.45	-1.09	PK	62.36	74	11.64	23.16
	2483.5	49.21	-1.09	AV	48.12	54	5.88	23.16
	4921.843687	43.01	4.75	PK	47.76	54	6.24	158.6

Ch6

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	124.998732	22.25	13.74	PK	35.99	43.5	7.51	15.36
	249.699399	31.16	13.80	QP	44.96	46	1.04	174.6
	333.066132	23.09	16.18	PK	39.27	46	6.73	121.6
	400.400802	18.79	17.79	PK	36.58	46	9.42	313.2
	2355.110220	42.79	2.09	PK	54	54	9.12	197.6
	4873.747495	43.02	4.78	PK	47.8	54	6.20	196.3

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	124.998937	22.24	13.74	PK	35.98	43.5	7.52	244.1
	249.699399	32.01	13.80	QP	45.81	46	0.19	174.3
	2360.761520	59.71	2.08	PK	61.79	74	12.21	196.7
	2360.761520	46.03	2.08	PK	48.11	54	5.89	196.7
	4873.747495	47.17	4.78	PK	51.95	54	2.05	183.4
	7310.621242	46.38	6.36	PK	52.74	54	1.26	198.9

Ch11

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	125.006877	22.37	13.76	PK	36.13	43.5	7.37	155.3
	249.699399	31.23	13.80	QP	45.03	46	0.97	177.4
	333.066132	22.62	16.18	PK	38.8	46	7.2	213.6
	400.400802	18.58	17.79	PK	36.37	46	9.63	126.5
	2336.673347	42.06	2.07	PK	44.13	54	9.87	190.4
	4825.651303	46.61	4.55	PK	51.16	54	2.84	181.6

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	124.989912	21.67	13.74	PK	35.41	43.5	8.09	219.1
	249.699399	32.02	13.80	QP	45.82	46	0.18	174.8
	2390.0	67.07	2.05	PK	69.12	74	4.88	189.1
	2390.0	50.82	2.05	PK	52.87	54	1.13	189.1
	4825.118990	50.74	4.55	PK	55.29	74	18.71	184.3
	4825.118990	37.73	4.55	PK	42.28	54	11.72	184.3
	7233.817640	49.25	7.22	PK	54.47	74	17.53	199.6
	7233.817640	34.48	7.22	PK	41.70	54	12.3	199.6

Freq. – Frequency Range:

- 1: 30 - 200 MHz
- 2: 200 - 1000 MHz
- 3: 1 - 4 GHz
- 4: 4 - 8 GHz
- 5: 8 - 12 GHz
- 6: 12 - 17 GHz
- 7: 17 - 26.5 GHz

All not in the table noted test results are more than 20 dB below the relevant limits.

All other not noted test polts do not contain significant test results in relation to the limits.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Comment: see attached diagrams

Test equipment used: ETSTW-RE 003, ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-RE 024

Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

3.6 Minimum 6 dB Bandwidth

The analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

Test conditions		6 dB Bandwidth		
		Channel A	Channel B	Channel C
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120\text{ V}$	16.602564103 MHz	16.570512821 MHz	16.570512821 MHz
Measurement uncertainty		< 10 Hz		

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Comment: see attached diagram

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

3.7 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

Test conditions		Peak Power Spectral Density (3 kHz)		
		Channel A [dBm]	Channel B [dBm]	Channel C [dBm]
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120 \text{ V}$	-7.99	-9.30	-10.73
Measurement uncertainty		< 3 Hz		

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483,5	8
5725-5850	8

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Comment: see attached diagram

3.8 Radiated Emissions from Receiver Section of Transceiver

FCC Rule: 15.109

Summary table with radiated data of the test plots

RX**Ch1**

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	110.741483	25.43	12.36	PK	37.79	43.5	5.71	218.4
	151.623246	26.92	15.40	PK	42.32	43.5	1.18	152.9
	249.699399	30.52	13.80	QP	44.32	46	1.68	182.6
	366.733467	18.13	16.86	PK	34.99	46	11.01	261.9
	801.202405	15.01	25.16	PK	40.17	46	5.83	327.0
	1462.925852	44.13	-7.77	PK	36.36	54	17.64	134.3
	3284.569138	38.99	0.22	PK	39.21	54	14.79	161.4

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	30.0	21.92	13.03	PK	34.95	40	5.05	64.3
	81.102204	24.25	9.94	PK	34.19	40	5.81	178.4
	249.699399	32.12	13.80	QP	45.92	46	0.08	174.8
	833.266533	15.77	25.55	PK	41.32	46	4.68	296.7
	1637.274549	39.61	-6.86	PK	32.75	54	21.25	145.8
	3284.569138	40.90	0.22	PK	40.68	54	13.32	167.1
	4585.170341	36.23	3.69	PK	39.92	54	14.08	217.4

Ch6

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	110.741483	24.10	12.44	PK	36.54	43.5	69.96	215.4
	154.348697	26.26	15.42	PK	41.68	43.5	1.82	166.9
	249.699399	30.04	13.80	QP	43.84	46	2.16	169.9
	499.799599	19.43	19.80	PK	39.23	46	6.77	154.9
	700.200401	15.84	23.43	PK	39.27	46	6.73	84.3
	1462.925852	43.52	-7.77	PK	35.75	54	18.25	131.6
	2442.885772	36.86	-0.14	PK	36.72	54	17.28	184.3
	3284.569138	37.79	0.22	PK	38.01	54	15.99	174.5
	6597.194389	37.92	5.77	PK	43.69	54	10.31	314.8

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	30.0	22.2	13.03	PK	35.23	40	4.77	58.6
	81.102204	24.13	9.94	PK	34.07	40	5.93	177.6
	249.699399	32.06	13.80	QP	45.86	46	0.14	166.8
	801.202405	13.83	25.16	PK	38.99	46	7.01	32.14
	2442.885772	38.78	-0.14	PK	38.64	54	15.36	314.6
	3284.569138	40.03	0.22	PK	40.25	54	13.75	152.3

Ch11

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
H	249.699399	30.37	13.80	QP	44.17	46	1.83	169.7
	299.398798	22.37	15.22	PK	38.59	46	7.41	178.6
	533.466934	21.13	20.36	PK	41.49	46	4.51	221.4
	833.266533	15.01	25.55	PK	40.56	46	5.44	213
	1462.925852	43.65	-7.77	PK	35.88	54	18.12	133.6
	3824.569138	38.56	0.22	PK	38.78	54	15.22	151.9

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)
V	30.0	22.08	13.03	PK	35.11	40	4.89	63.4
	81.201336	24.42	9.94	PK	34.36	40	5.64	175.4
	249.699399	32.08	13.08	QP	45.88	46	0.12	168.8
	533.466934	19.06	20.36	PK	39.42	46	6.58	217.3
	1462.925852	41.3	-7.77	PK	33.53	54	20.47	131.4
	3284.569138	33.56	0.22	PK	33.78	54	20.22	149.8

**Digital
(adaptor)**

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	81.244619	21.73	9.94	PK	31.67	40	8.33	85.6	119.6
	113.922674	25.55	12.68	PK	38.23	43.5	5.27	182.1	117.8
	124.993714	19.17	13.69	PK	32.86	43.5	10.64	155.5	121.4
	249.939672	26.11	13.80	PK	39.91	46	6.09	159.1	126.5
	303.694272	26.0	15.33	PK	41.33	46	4.67	88.3	131.4
	399.672469	23.46	17.76	PK	41.22	46	4.78	189.4	125.6
	833.677983	16.1	25.55	PK	41.65	46	4.35	112.4	129.1

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	81.323611	25.91	9.94	PK	35.85	40	4.15	93.2	130.0
	113.633172	30.29	12.68	QP	42.97	43.5	0.53	177.6	124.6
	124.989373	20.42	13.69	PK	34.11	43.5	9.39	162.4	122.3
	141.402833	21.89	14.88	PK	36.77	43.5	6.73	303.1	108.9
	249.993727	20.12	13.80	PK	33.92	46	12.08	191.2	109.6
	303.001886	27.81	15.33	PK	43.14	46	2.86	89.6	114.9
	333.069177	25.06	16.18	PK	41.24	46	4.76	251.3	119.2
	833.719248	17.27	25.55	PK	42.82	46	318	108.1	122.9

(POE)

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	32.018431	22.19	13.02	QP	35.21	40	4.79	56.7	121.5
	80.74321	27.86	9.96	QP	37.82	40	2.18	184.5	123.8
	113.126312	28.89	12.68	QP	41.57	43.5	1.93	157.6	133.8
	249.698324	28.98	13.80	QP	42.78	46	3.22	163.4	127.9
	499.312432	23.18	19.80	PK	42.98	46	302	313.2	153.8
	900.23142	16.16	26.22	PK	42.38	46	3.62	143.8	188.6

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	32.743211	23.87	13.02	QP	36.89	40	3.11	76.8	131.8
	147.321881	25.06	15.22	PK	40.28	43.5	3.22	213.8	126.7
	194.207832	28.05	12.51	QP	40.56	43.5	2.94	217.1	188.1
	249.698324	28.31	13.80	PK	42.11	46	3.89	188.3	113.2
	499.312432	23.08	19.80	PK	42.88	46	3.12	325.1	164.8
	832.732144	16.41	25.55	PK	41.96	46	4.04	11.56	128.4

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-CS 001, ETSTW-RE 026, ETSTW-RE 003, ETSTW-RE 025

Comment: see attached diagram

3.9 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dB μ V)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

adaptor

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)	
N	MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	0.59	29.7	15.4	10.1	39.8	25.5	56	46	16.2	20.5
	0.91	29.6	11.2	10.1	39.7	21.3	56	46	16.3	24.7
	1.77	36.1	11.1	10.1	46.2	21.1	56	46	9.8	24.8
	4.01	32.2	13.1	10.1	42.3	23.2	56	46	13.7	22.8
	20.92	41.8	25.1	10.1	51.9	35.2	60	50	8.1	14.8

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)	
L1	MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	0.6	29.3	20.3	10.1	39.4	30.4	56	46	16.6	15.6
	0.77	27.8	15	10.1	37.9	25.1	56	46	18.1	20.9
	1.94	31.7	11.5	10.1	41.8	21.6	56	46	14.2	24.4
	4.13	35.6	19.6	10.1	45.7	29.7	56	46	10.3	16.3
	21.27	41.2	28.1	10.1	51.3	38.2	60	50	8.7	11.8

Registration number: W6M20602-6632-C-2

FCC ID: PRL-IWE1300

POE

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)	
N	MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	0.59	29.7	15.4	10.1	39.8	25.5	56	46	16.2	20.5
	0.91	29.6	11.2	10.1	39.7	21.3	56	46	16.3	24.7
	1.77	36.1	11.1	10.1	46.2	21.2	56	46	9.8	24.8
	4.01	32.2	13.1	10.1	42.3	23.2	56	46	13.7	22.8
	20.92	41.8	25.1	10.1	51.9	35.2	60	50	8.1	14.8

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)	
L1	MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	0.6	29.3	20.3	10.1	39.4	30.4	56	46	16.6	15.6
	0.77	27.8	15	10.1	37.9	25.1	56	46	18.1	20.9
	1.94	31.7	11.5	10.1	41.8	21.6	56	46	14.2	24.4
	4.13	35.6	19.6	10.1	45.7	29.7	56	46	10.3	16.3
	21.27	41.2	28.1	10.1	51.3	38.2	60	50	8.7	11.8

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
0.15-0.5 0.5-5 5-30	Quasi Peak	Average
	66 to 56	56 to 46
	56	46
	60	50

Test equipment used: ETSTW-CE 004, ETSTW-CE 001, ETSTW-RE 023

Comment: see attached diagram

Appendix

- A Peak Output Power
- B Spurious Emissions radiated
- C Band Edge Measurement
- D Minimum 6dB Bandwidth
- E Peak Power Spectral Density
- F Radiated Emissions from Receiver Section of Transceiver
- G Power Line Conducted Emission
- H Pictures




Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300


Appendix A

Peak Output Power

The measurement diagram are wideband pre-scan results; only for reference.

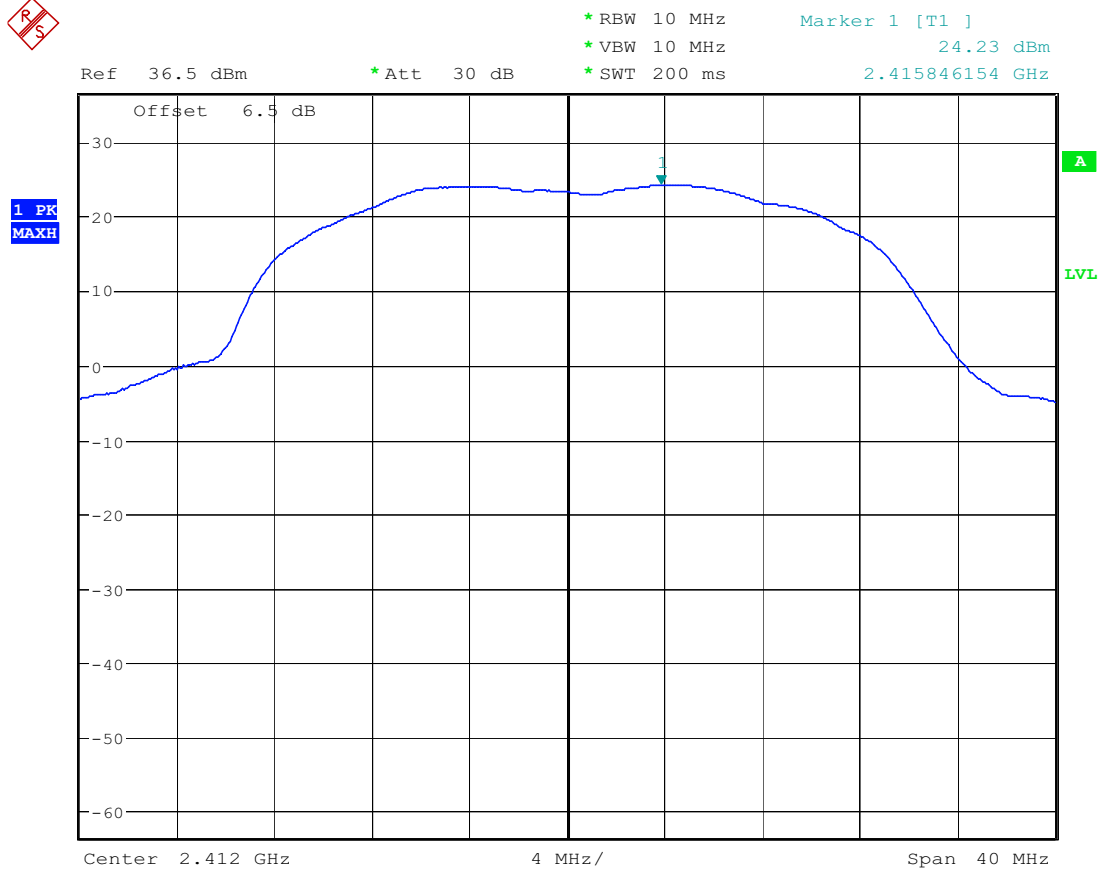


11G MAX OUTPUT POWER CH 1
Date: 26.APR.2006 14:19:00

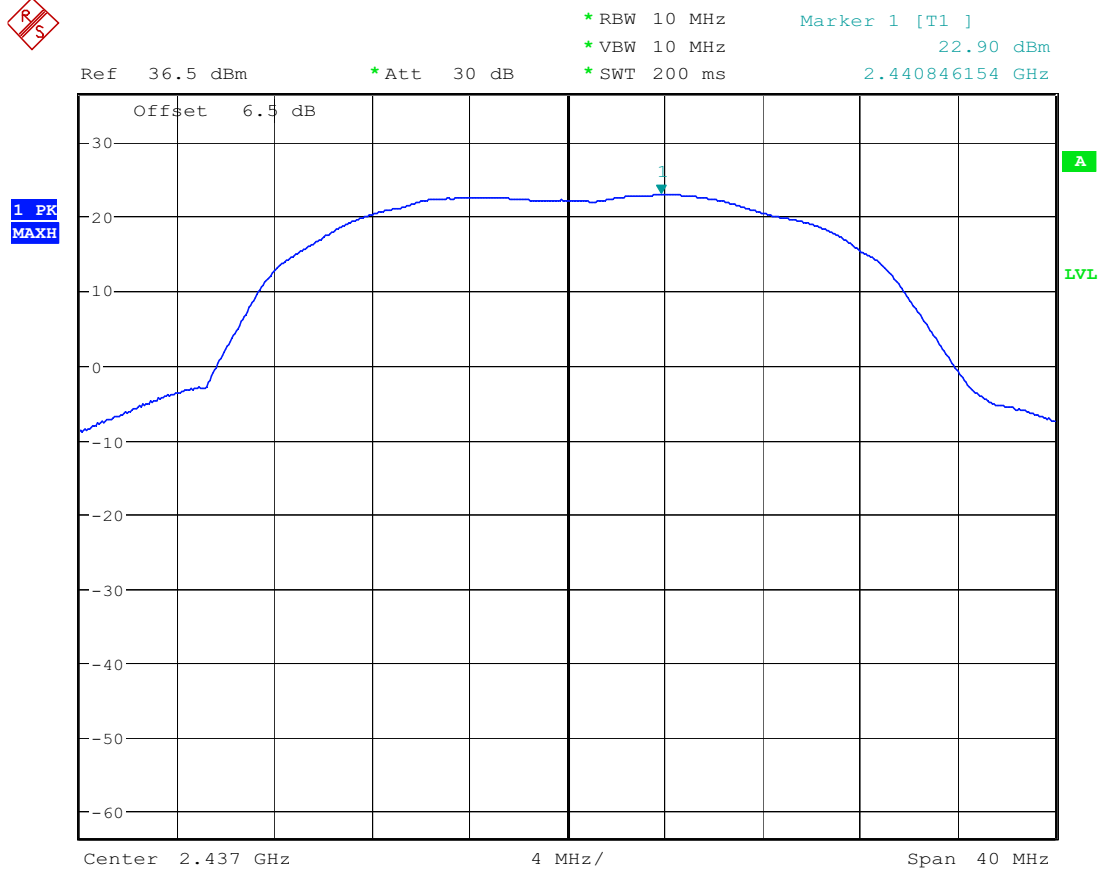

11G MAX OUTPUT POWER CH 6

Date: 26.APR.2006 14:25:31

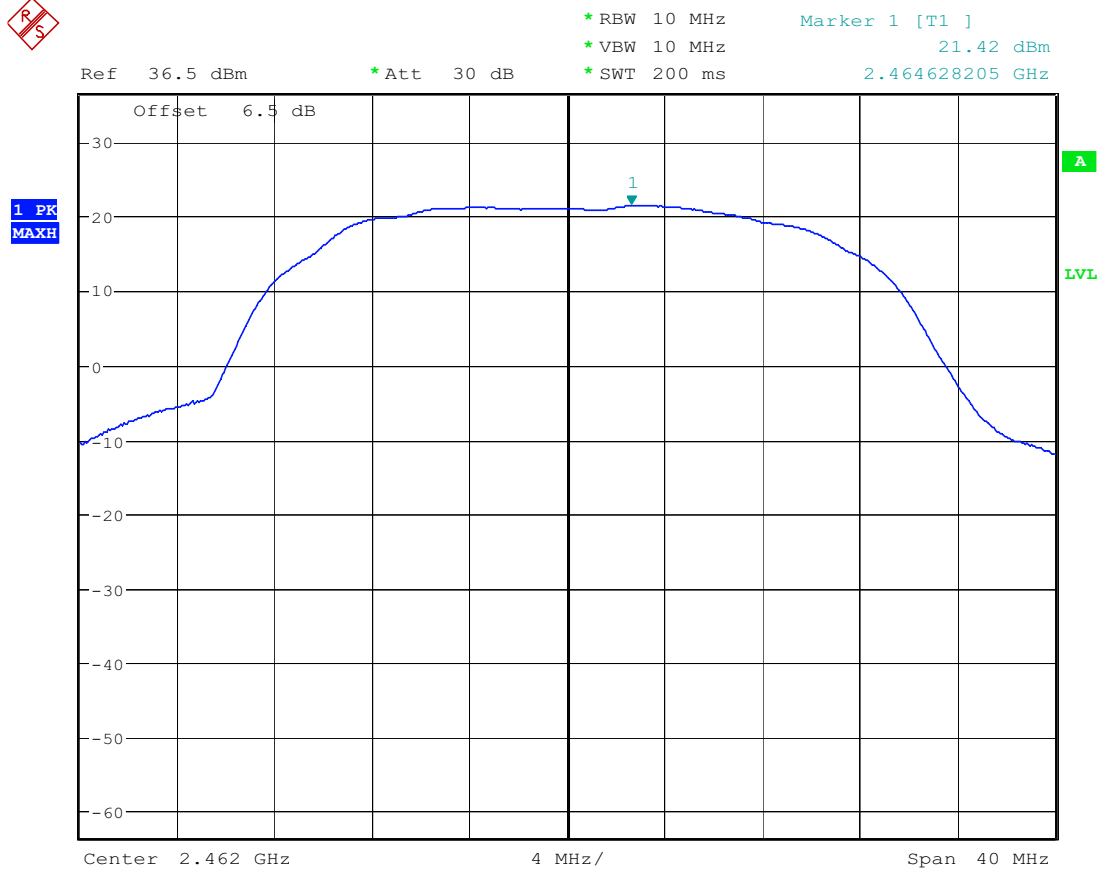


11G MAX OUTPUT POWER CH 11

Date: 26.APR.2006 14:26:02


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.414GHz, Emax: 95.35dBµV/m, RBW: 1MHz

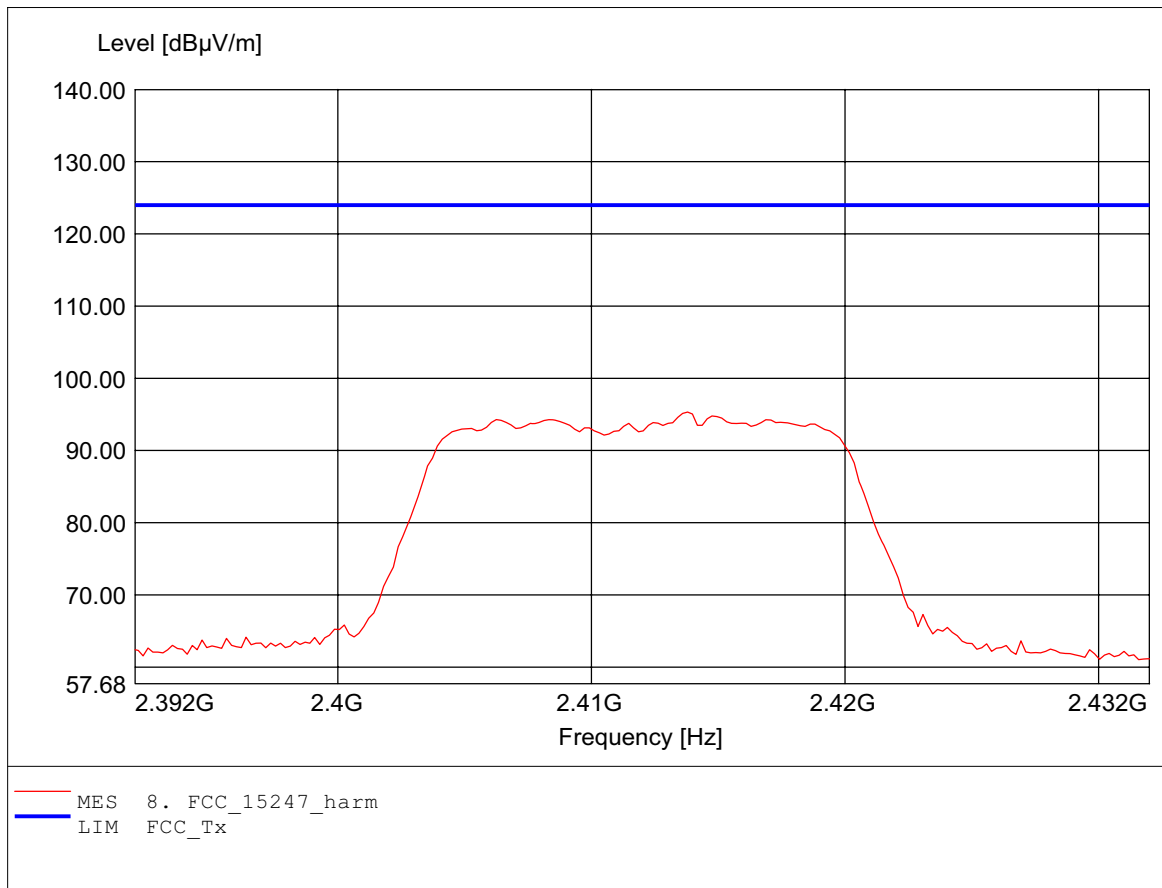


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.414GHz, Emax: 109.37dBµV/m, RBW: 1MHz

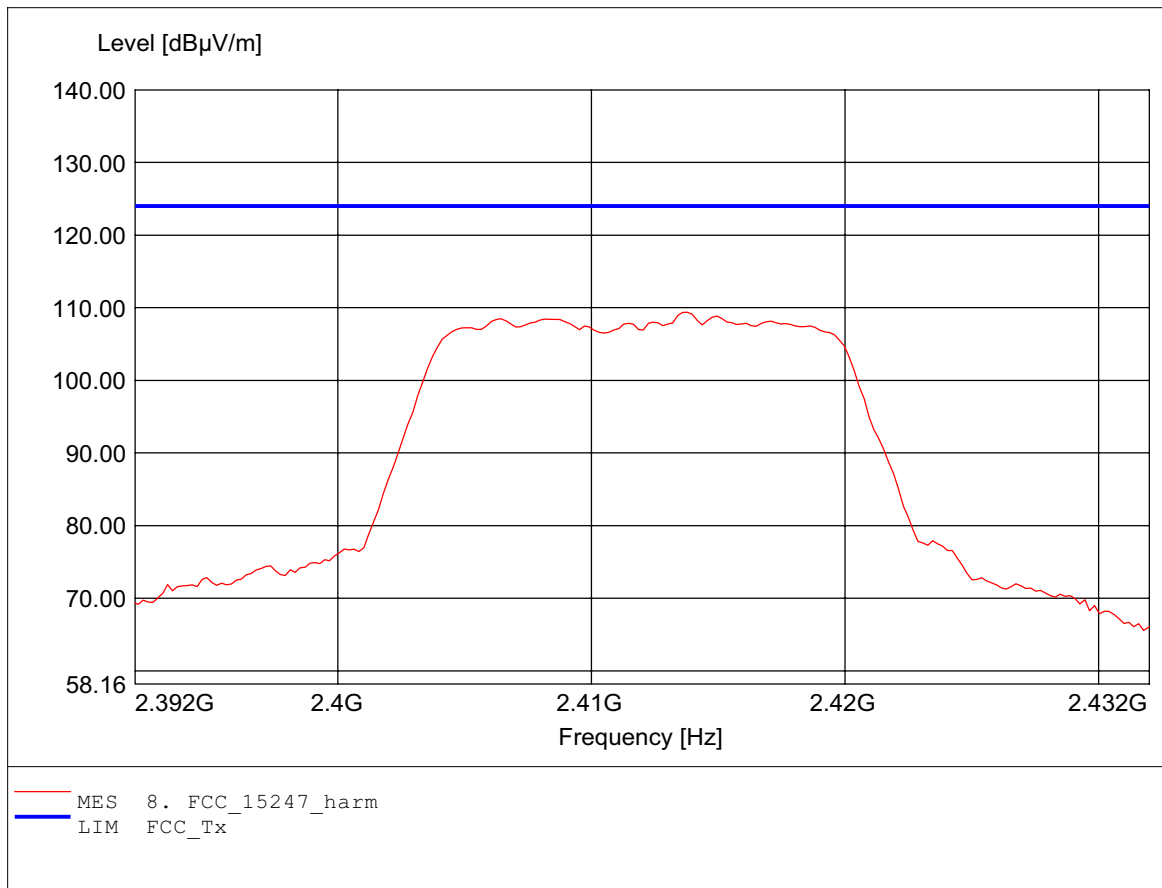


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.440GHz, Emax: 96.13dBμV/m, RBW: 1MHz

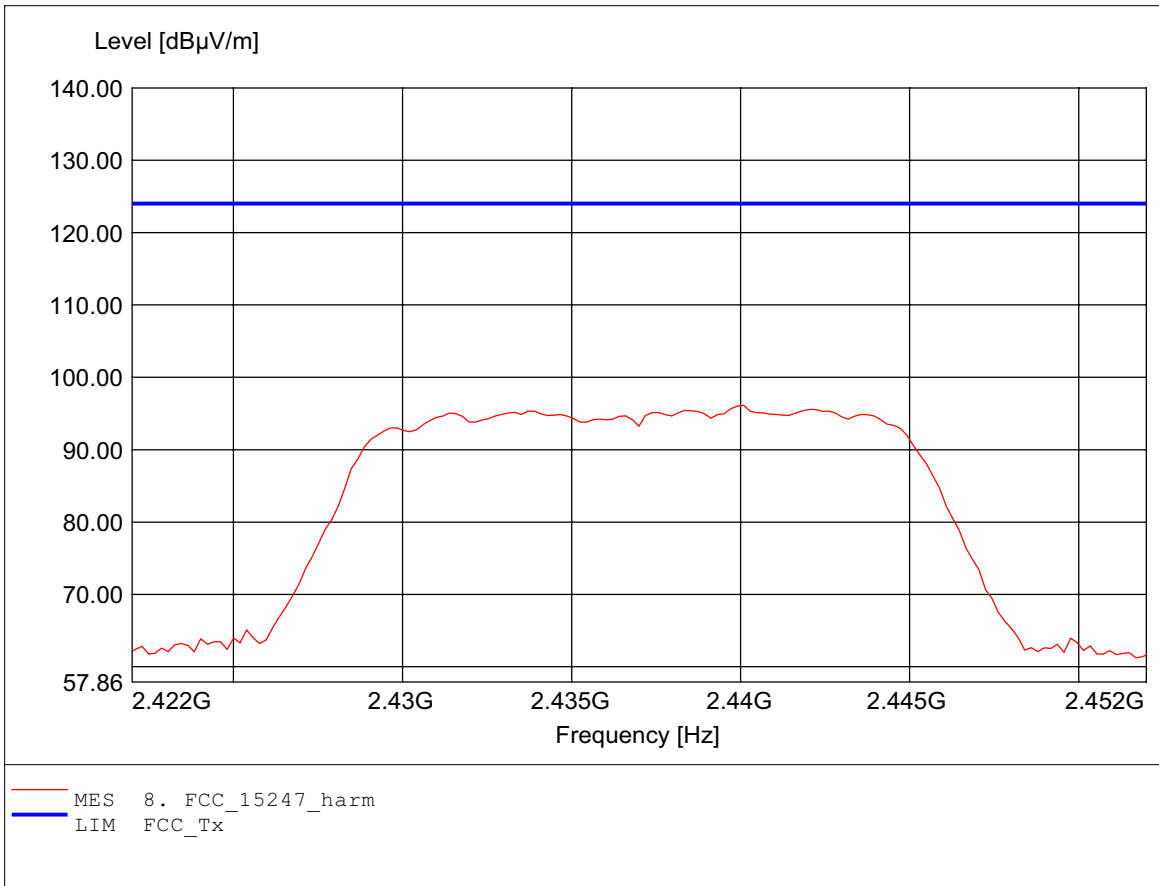


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.439GHz, Emax: 107.62dBµV/m, RBW: 1MHz

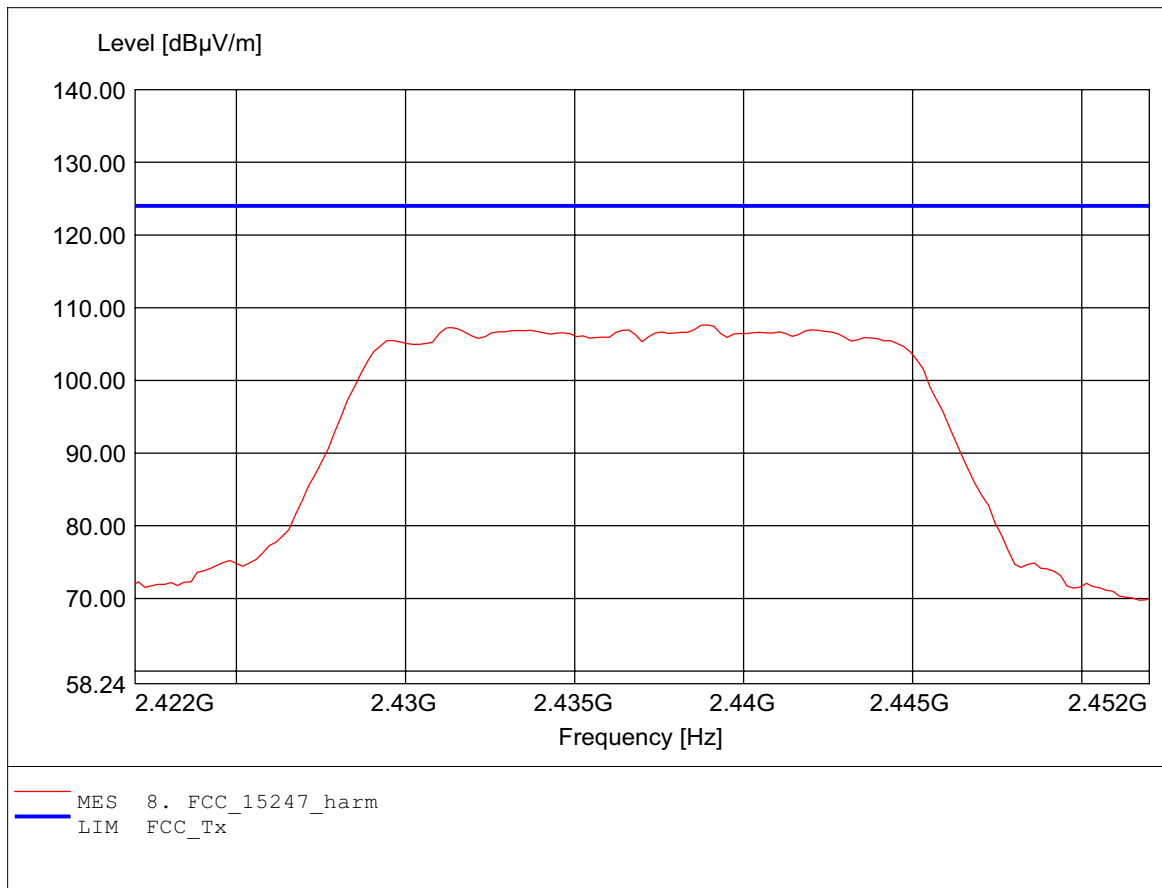


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.465GHz, Emax: 94.71dBµV/m, RBW: 1MHz

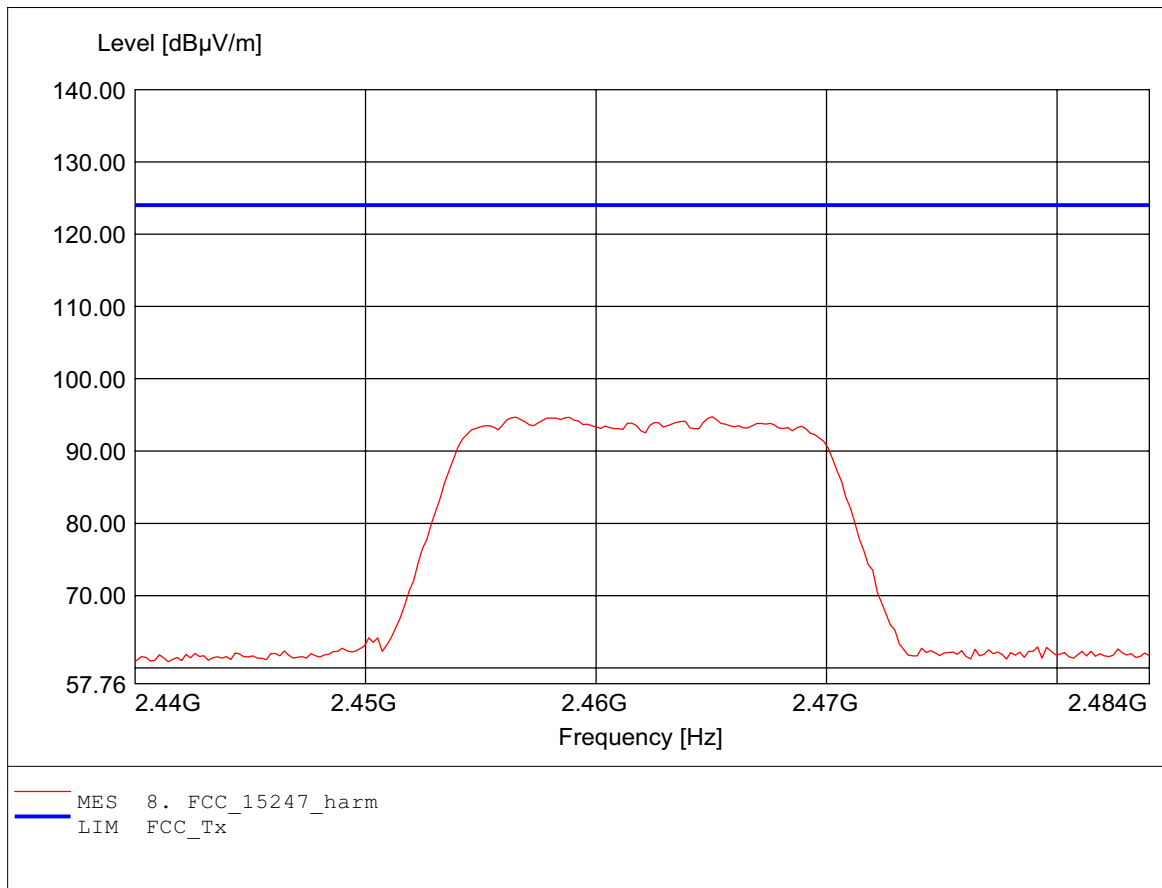

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.465GHz, Emax: 107.39dBµV/m, RBW: 1MHz

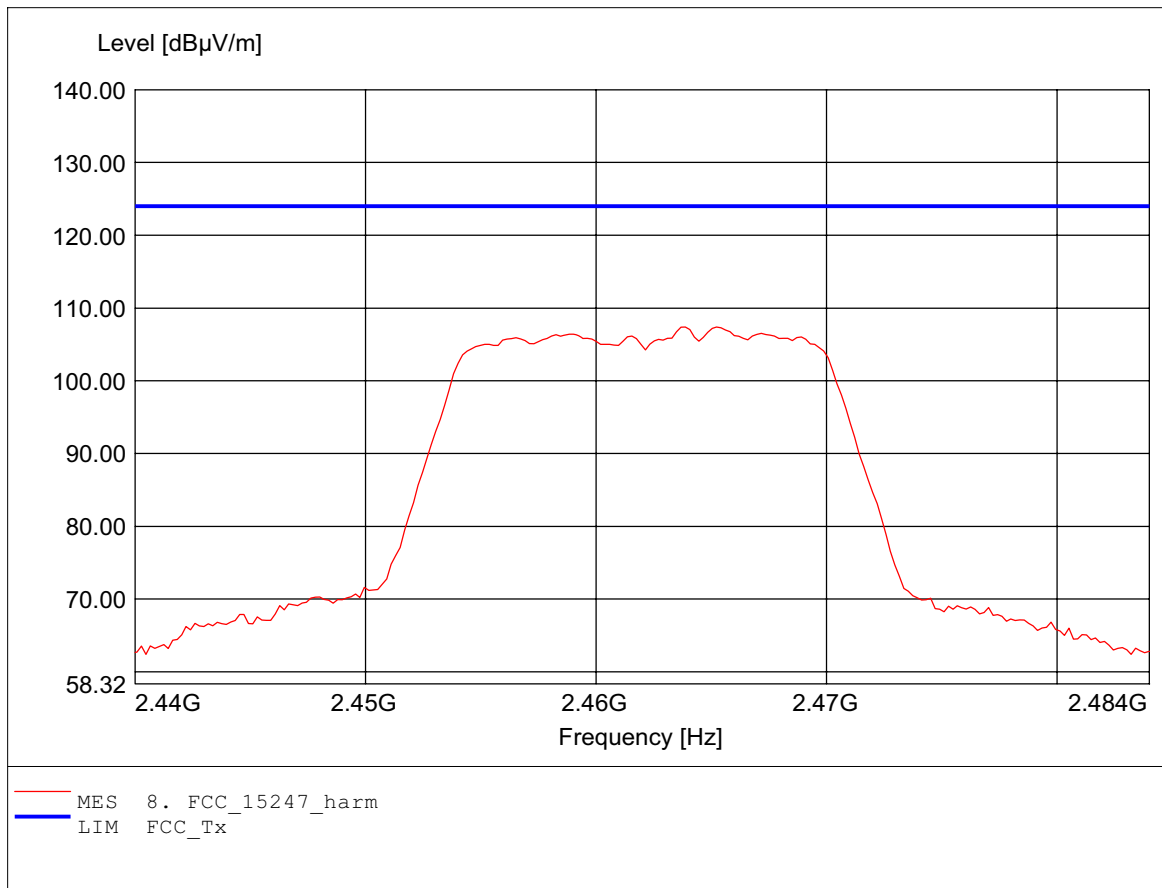



Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix B


Spurious Emissions radiated

The measurement diagram are wideband pre-scan results; only for reference.

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 151.623MHz, Emax: 38.67dBµV/m, RBW: 100kHz

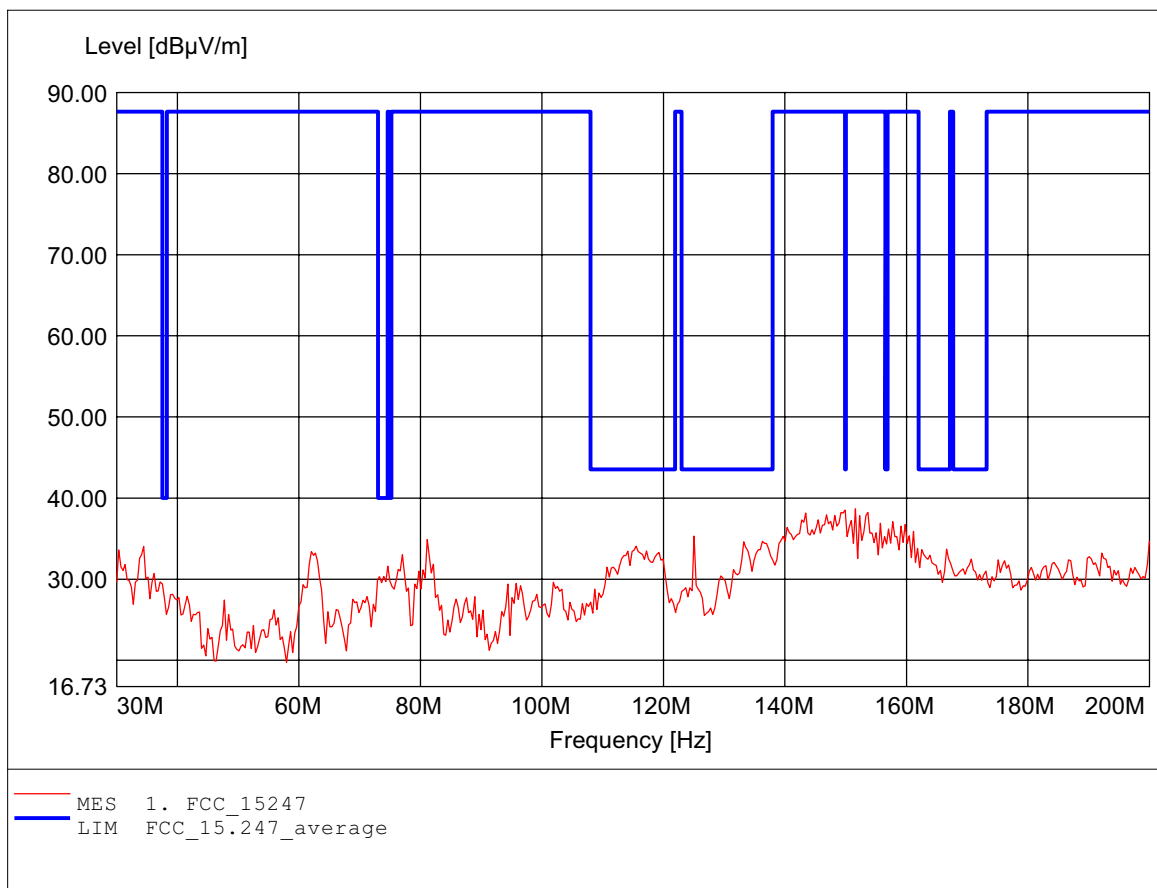

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 34.429MHz, Emax: 40.97dBµV/m, RBW: 100kHz

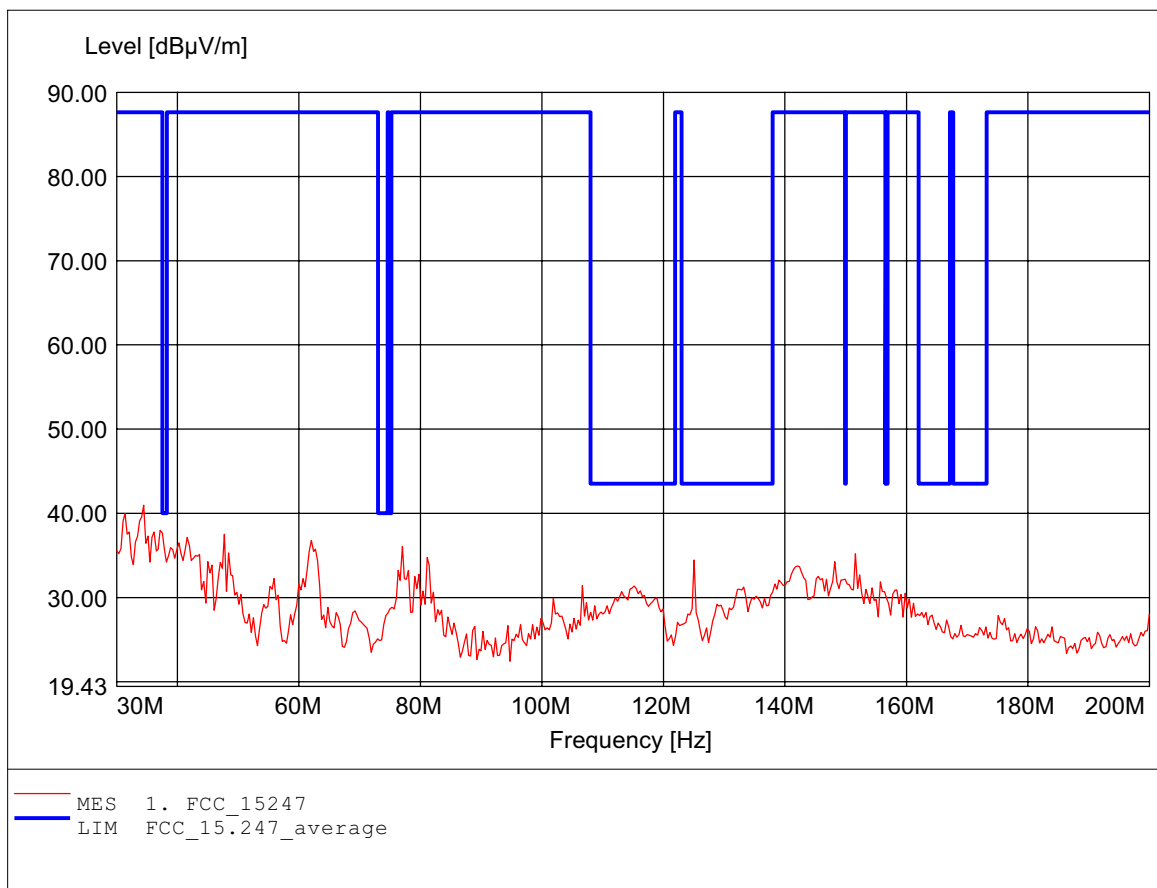

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 249.699MHz, Emax: 44.33dBμV/m, RBW: 100kHz

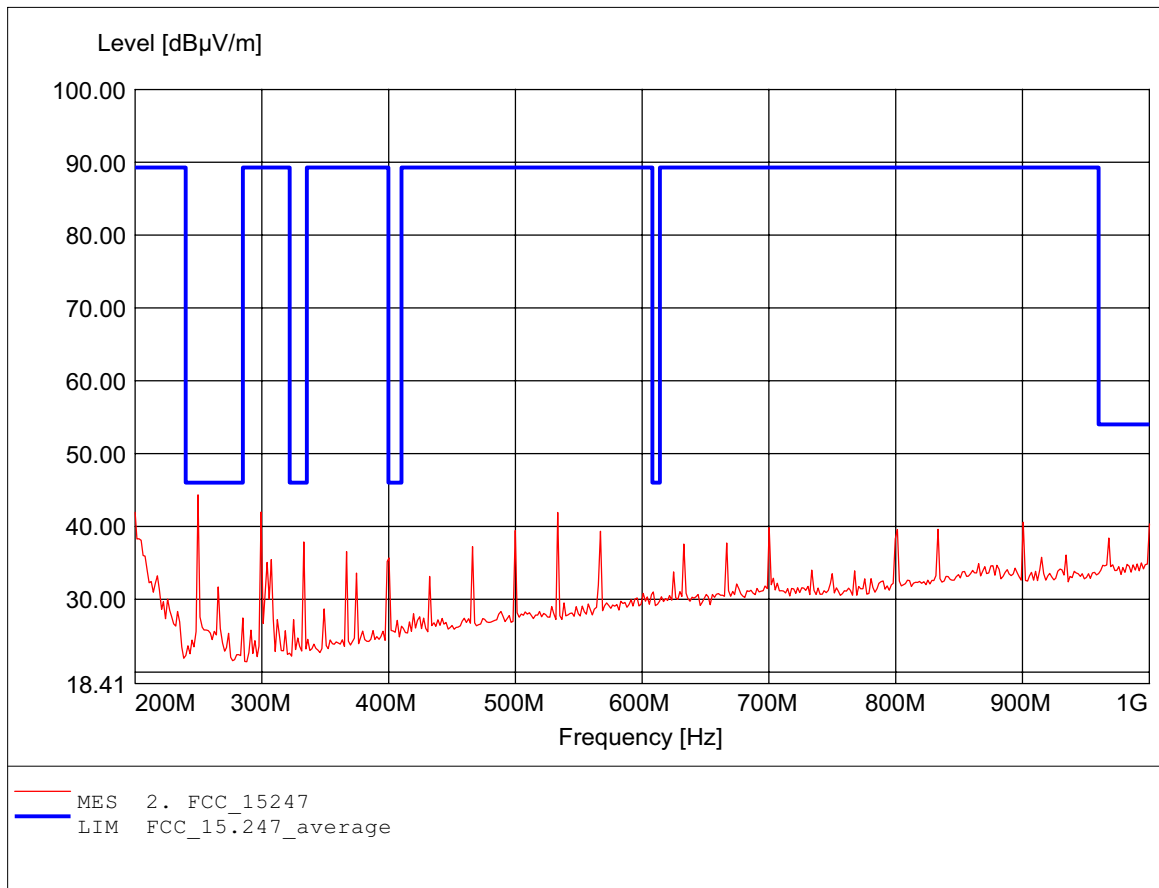

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 249.699MHz, Emax: 46.30dBμV/m, RBW: 100kHz

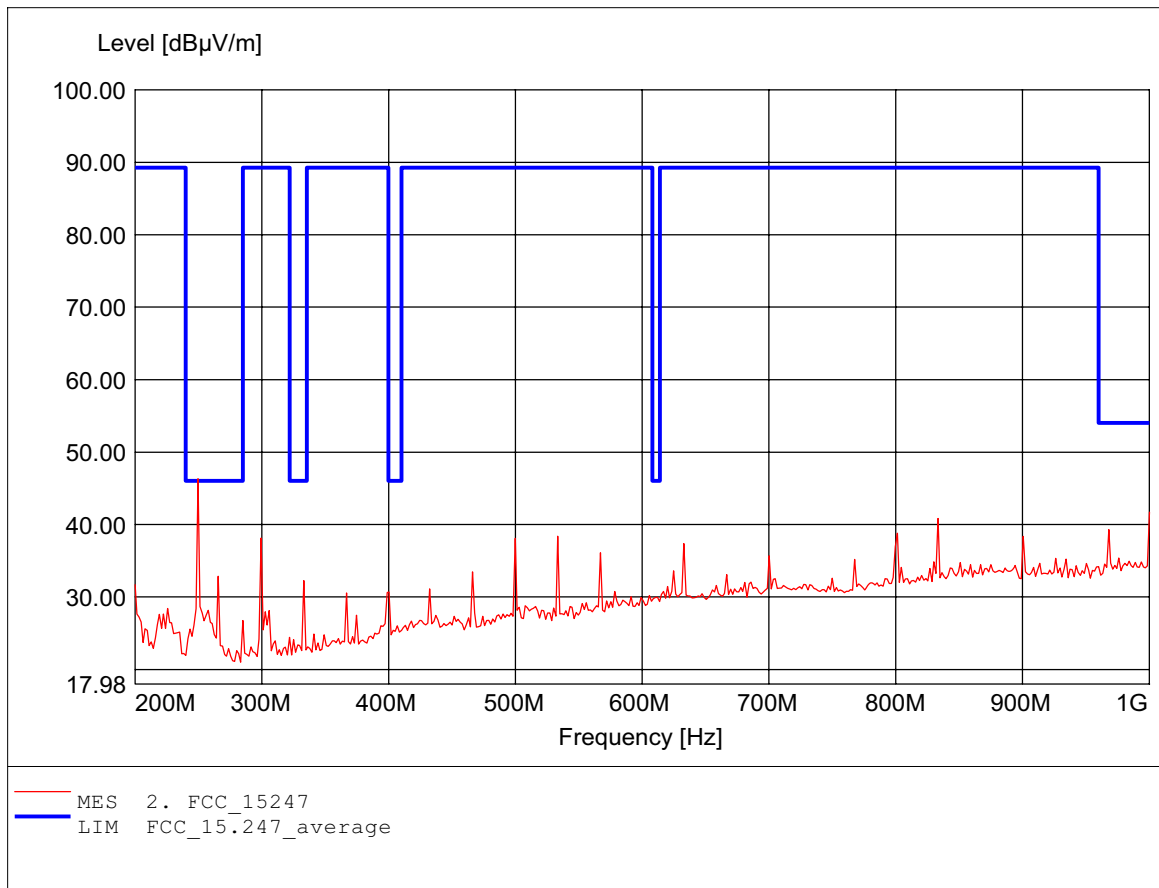

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.399GHz, Emax: 63.01dBμV/m, RBW: 1MHz

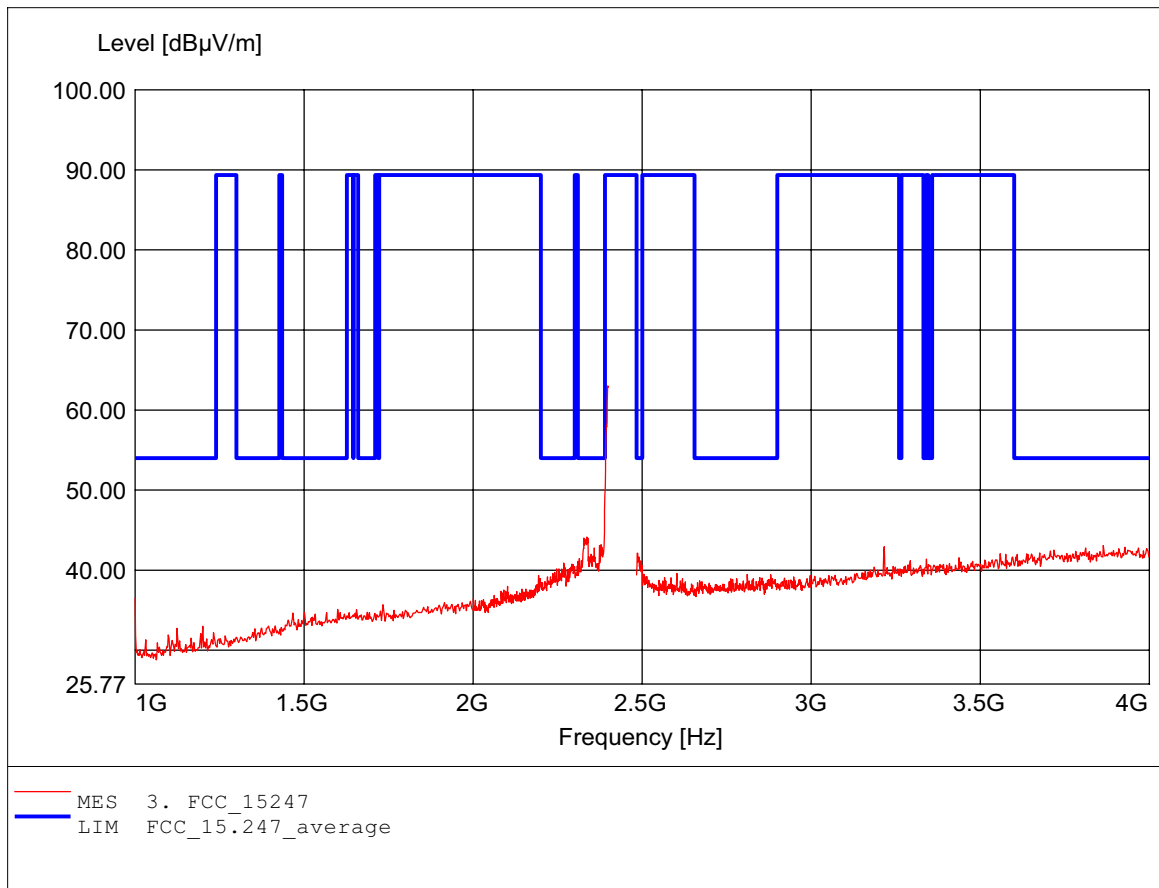

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.400GHz, Emax: 86.90dBμV/m, RBW: 1MHz

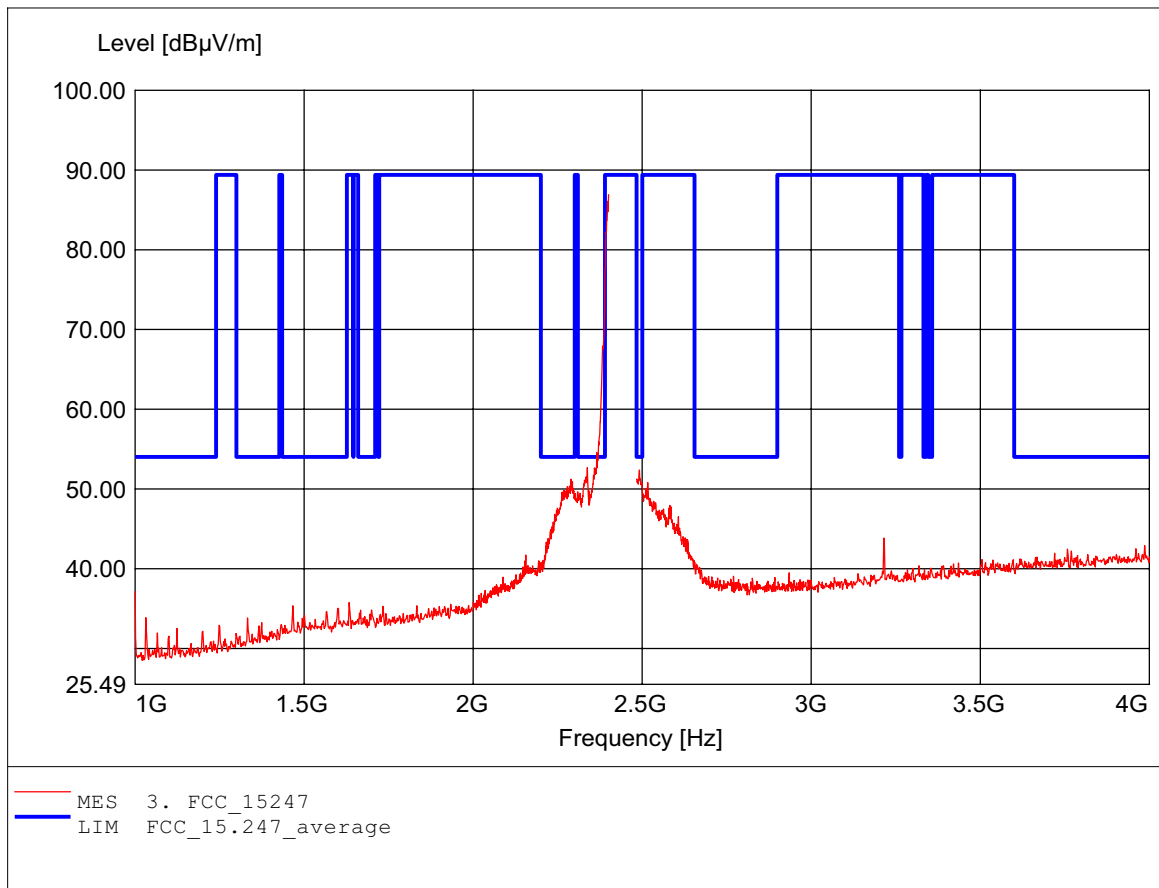

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.415GHz, Emax: 51.47dBμV/m, RBW: 1MHz

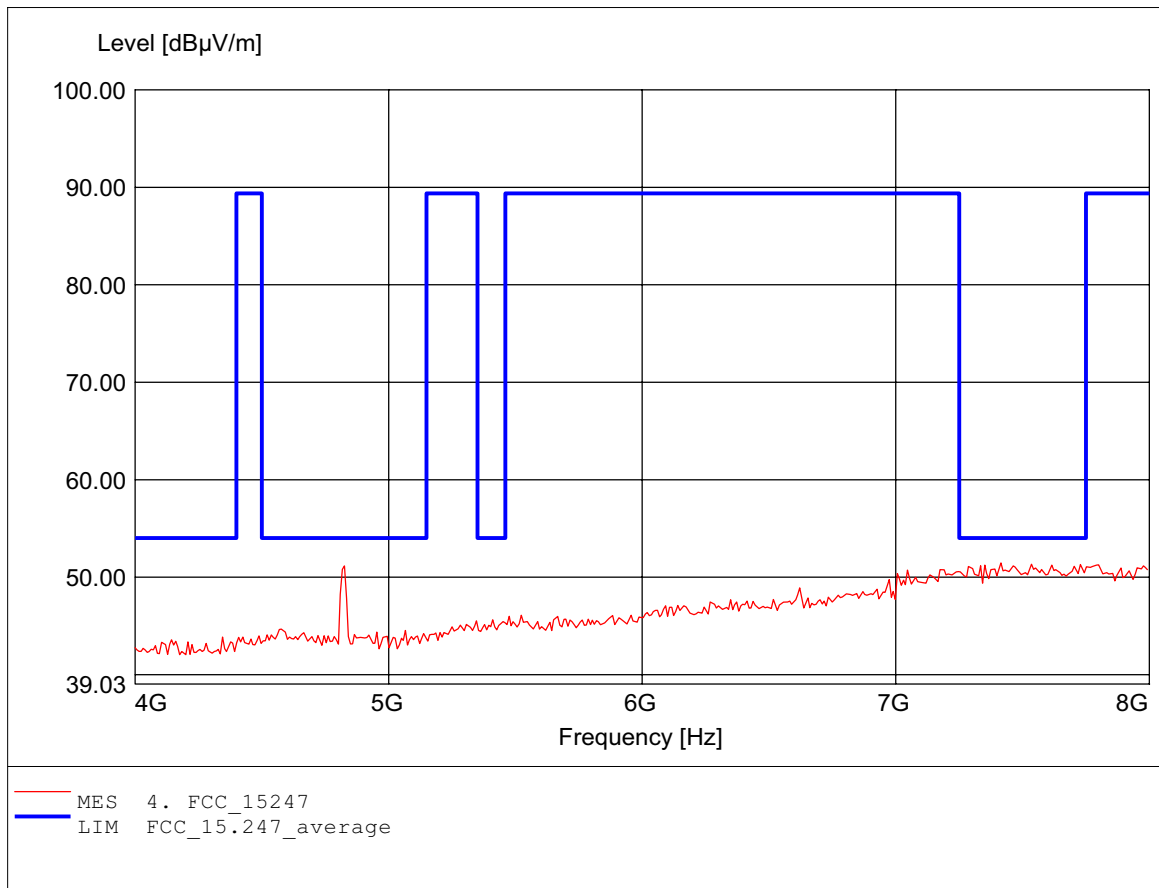

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.246GHz, Emax: 56.50dBμV/m, RBW: 1MHz

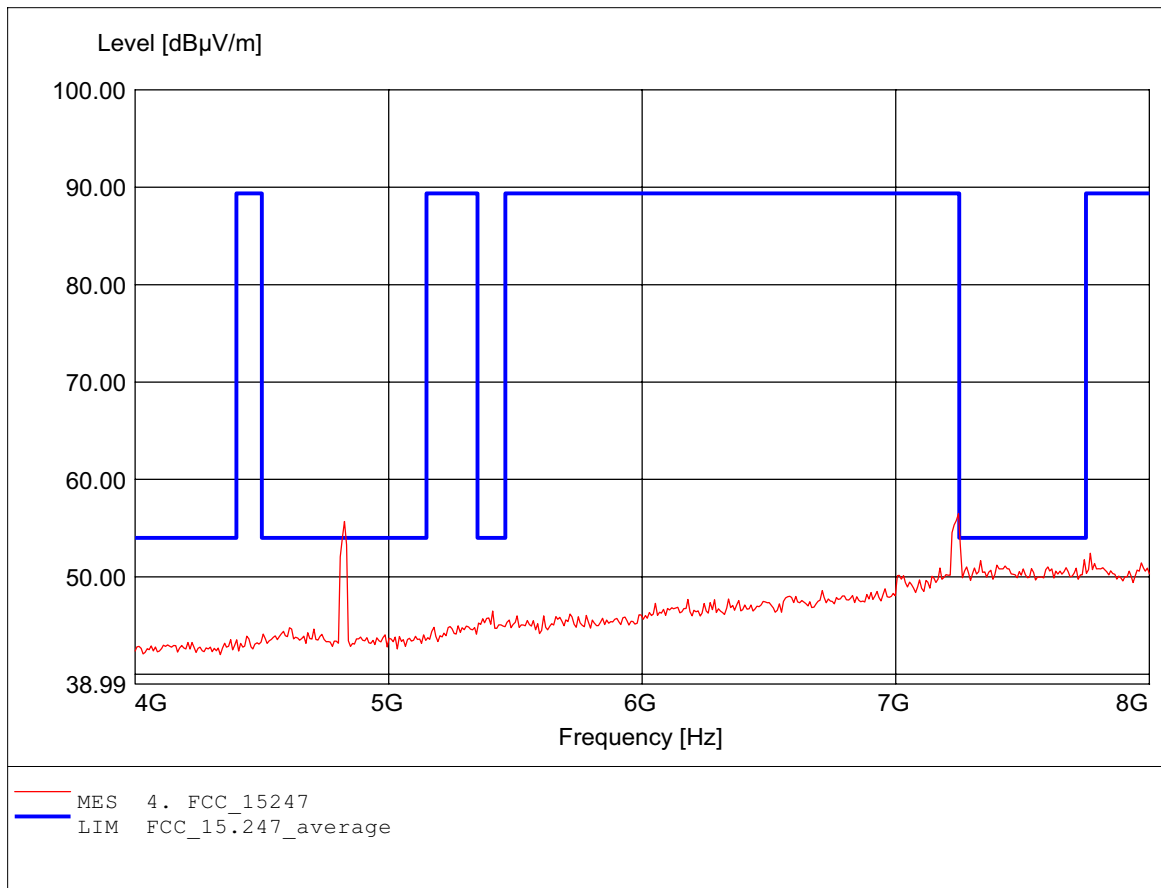

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.575GHz, Emax: 48.21dBµV/m, RBW: 1MHz

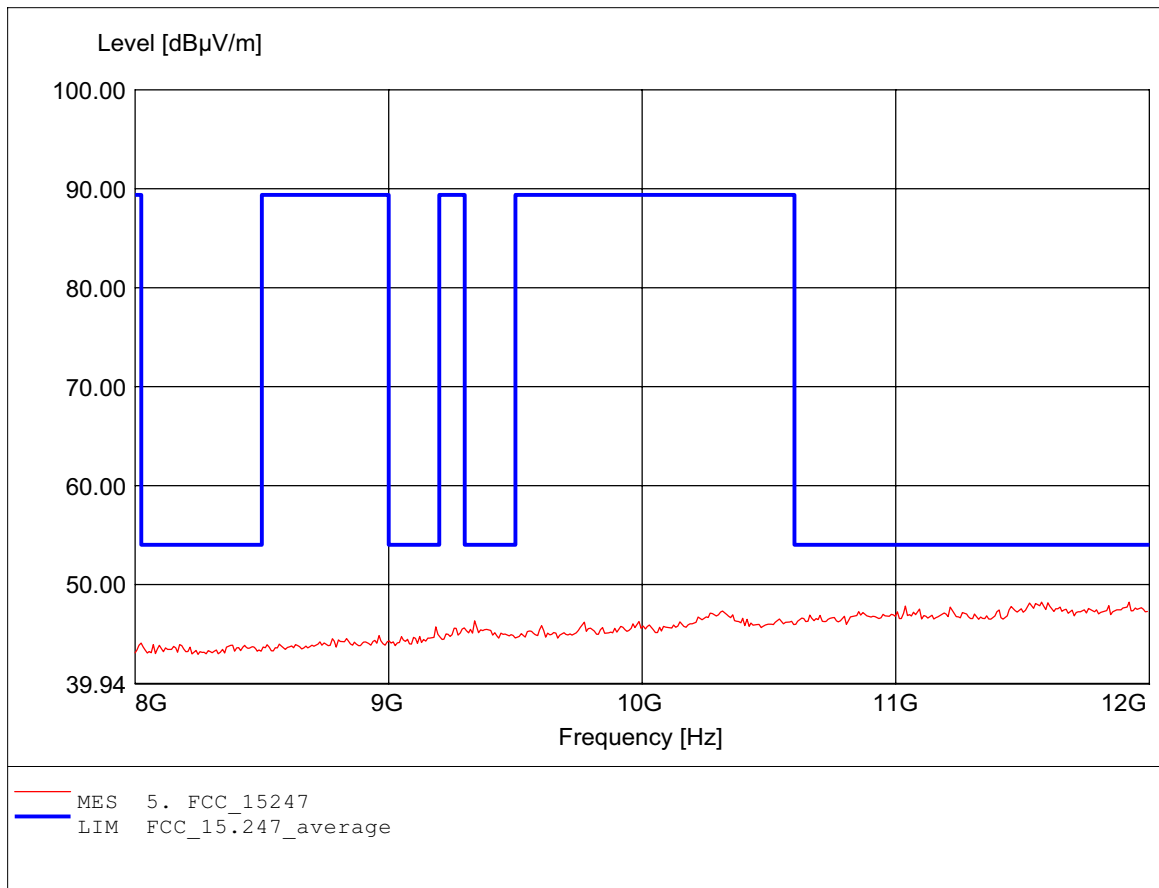

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 10.525GHz, Emax: 51.99dBμV/m, RBW: 1MHz

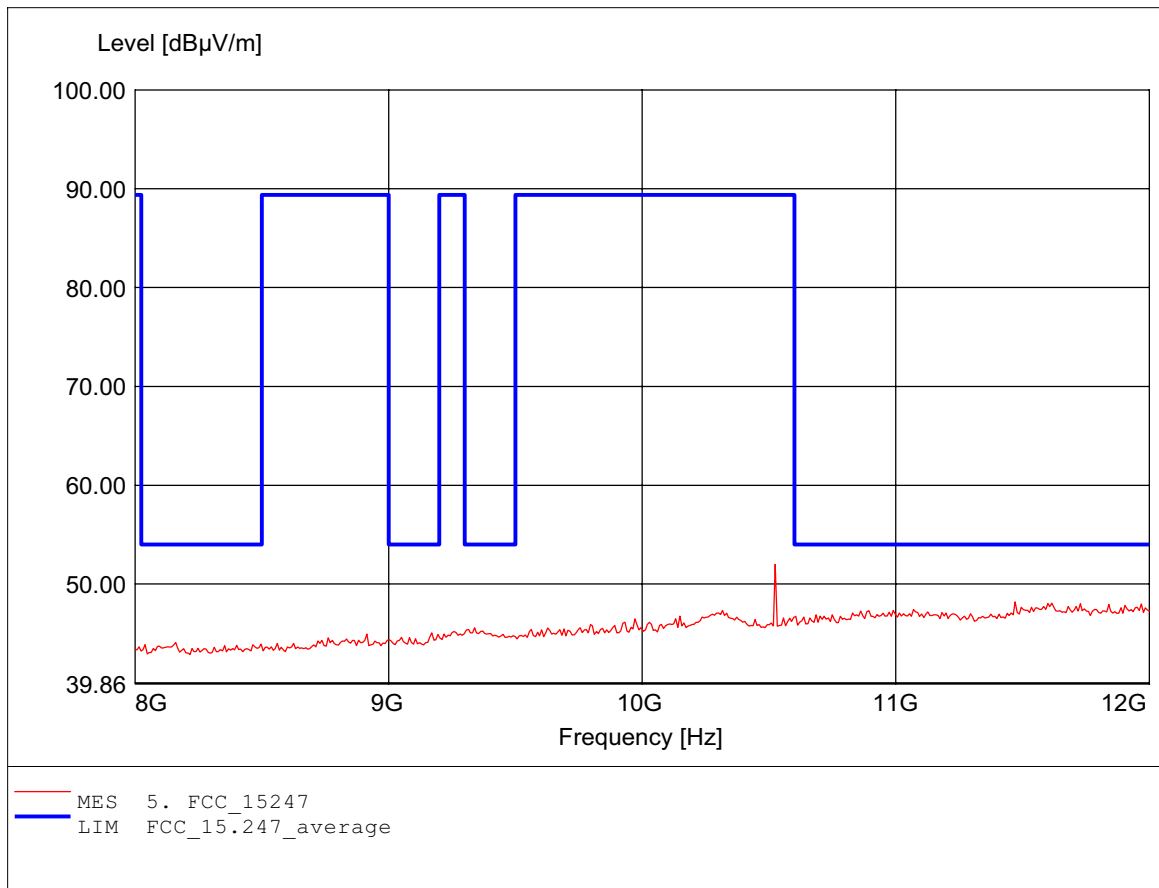

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.760GHz Emax:52.41dBμV/m RBW: 1 MHz

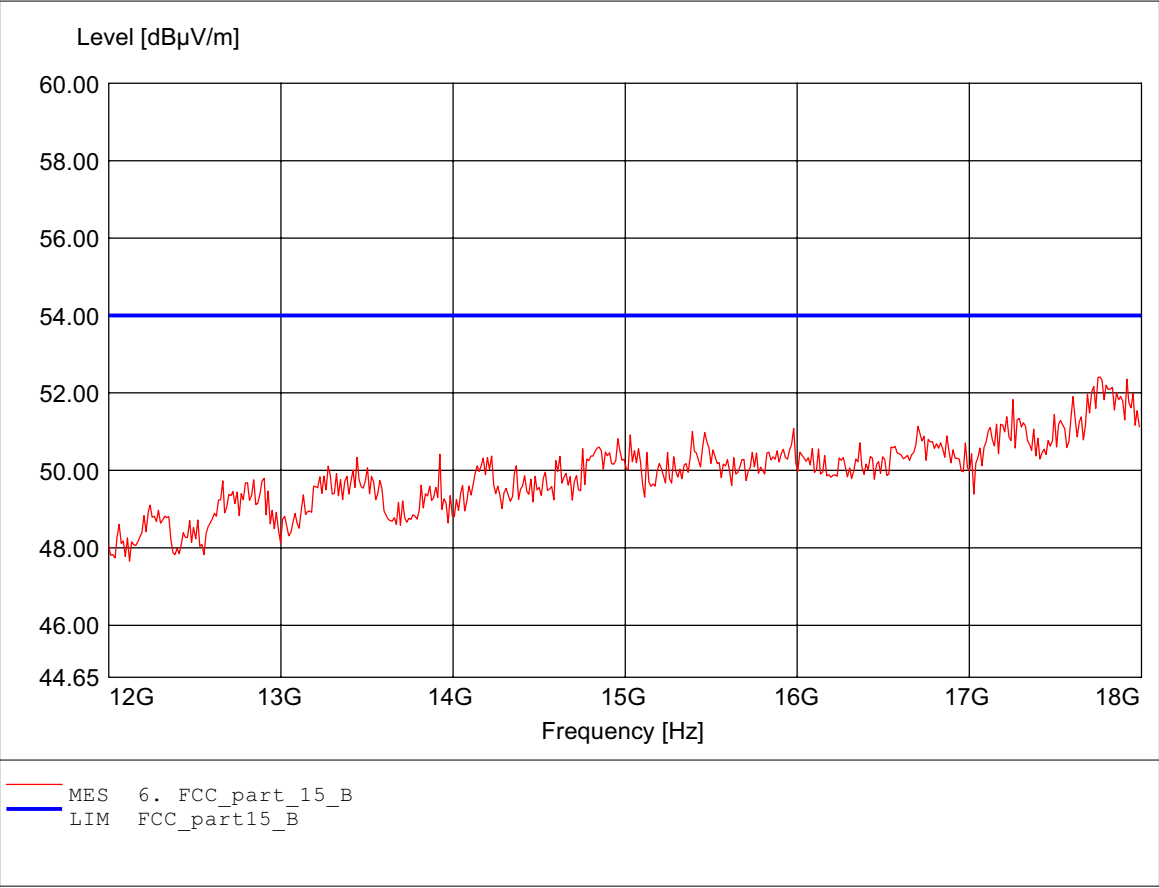

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.687GHz, Emax: 52.76dBμV/m, RBW: 1MHz

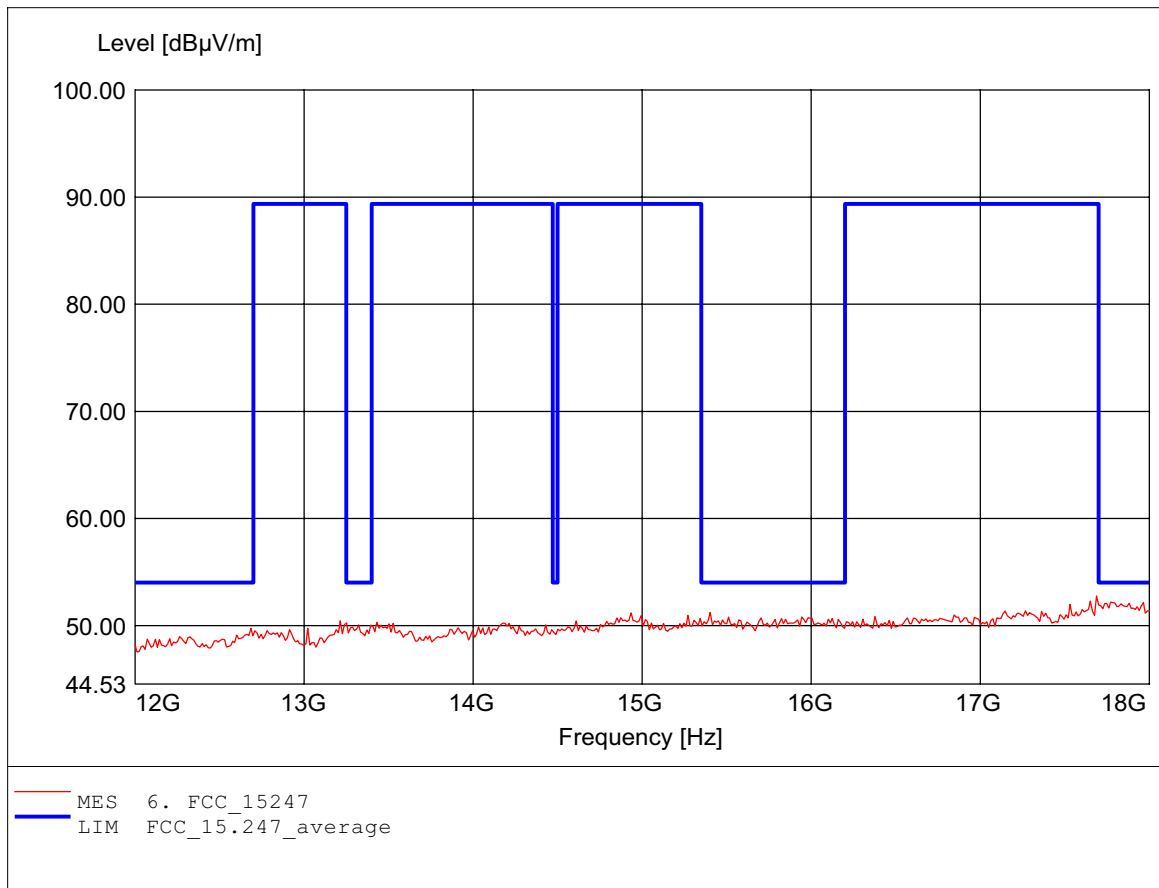

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 24.575GHz, Emax: 51.39dBμV/m, RBW: 1MHz

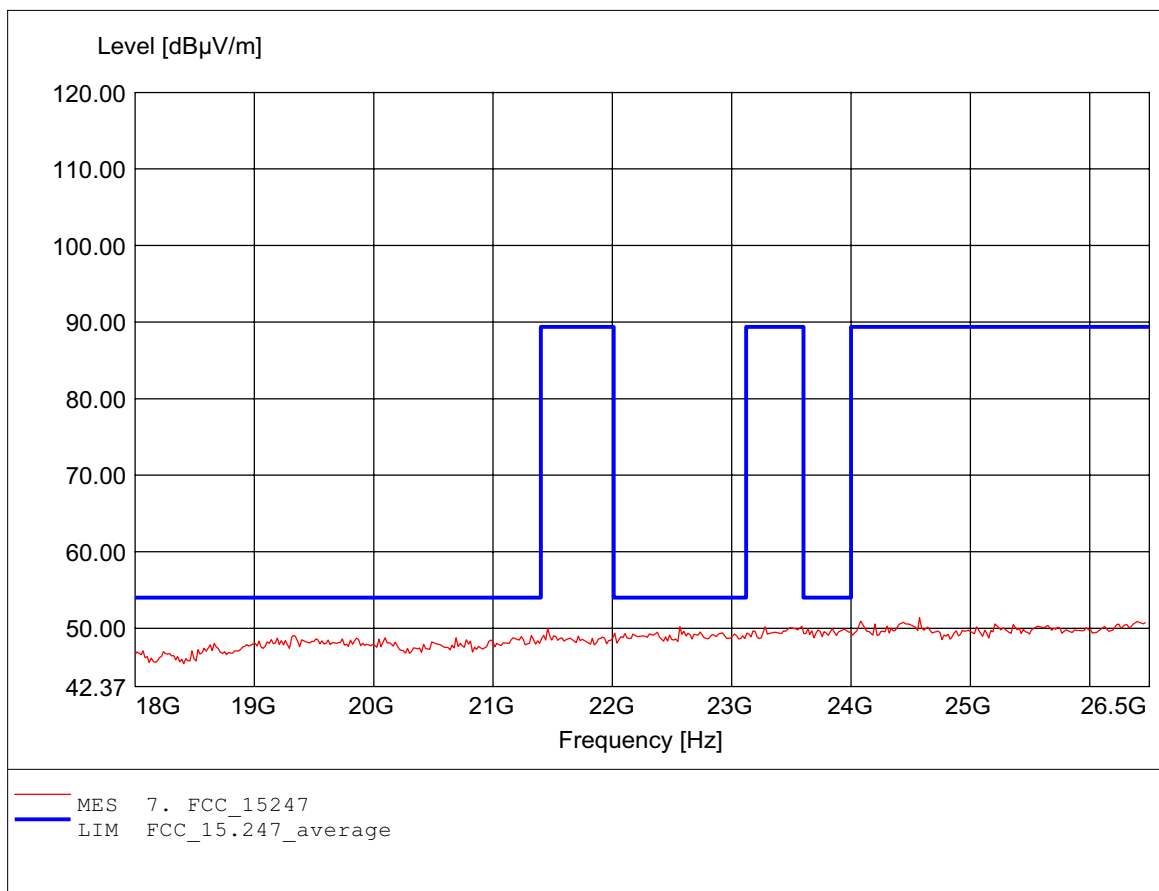

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 25.239GHz, Emax: 51.31dBμV/m, RBW: 1MHz

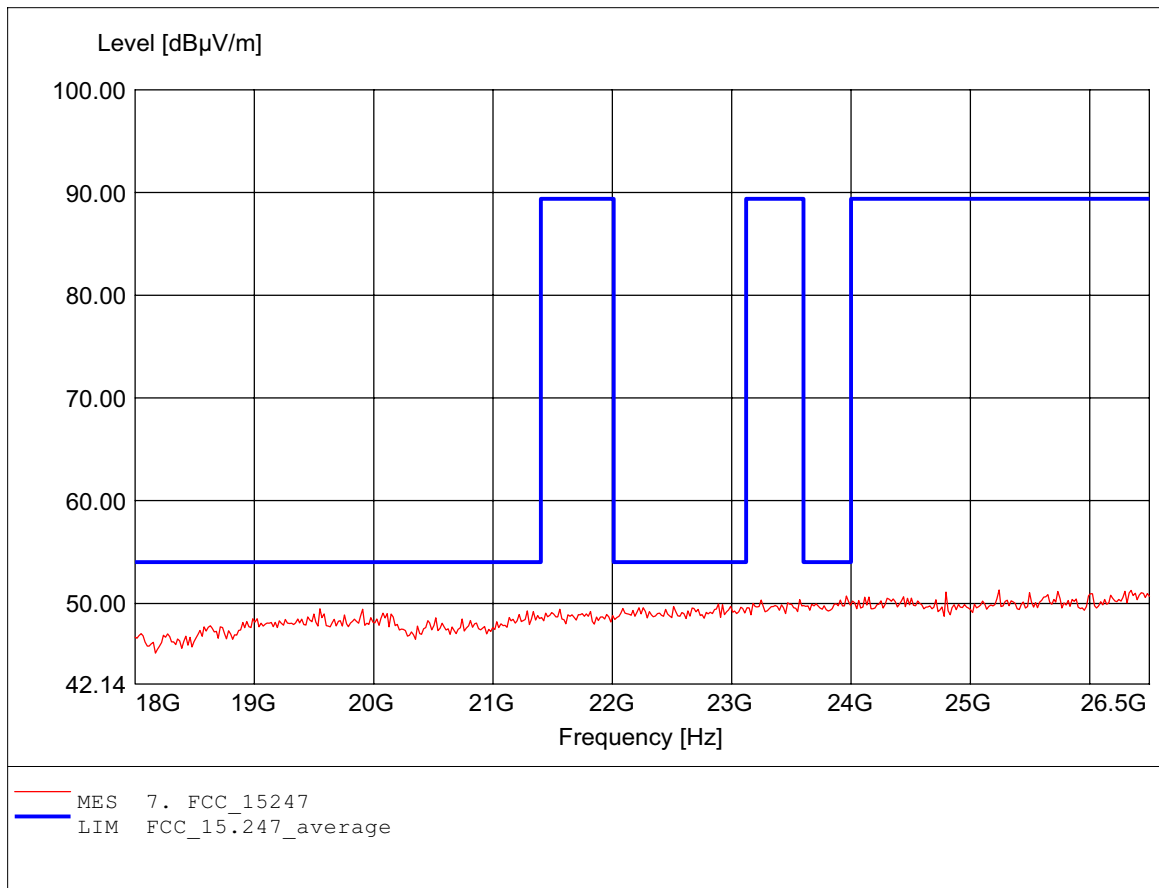

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 151.623MHz, Emax: 38.98dBµV/m, RBW: 100kHz

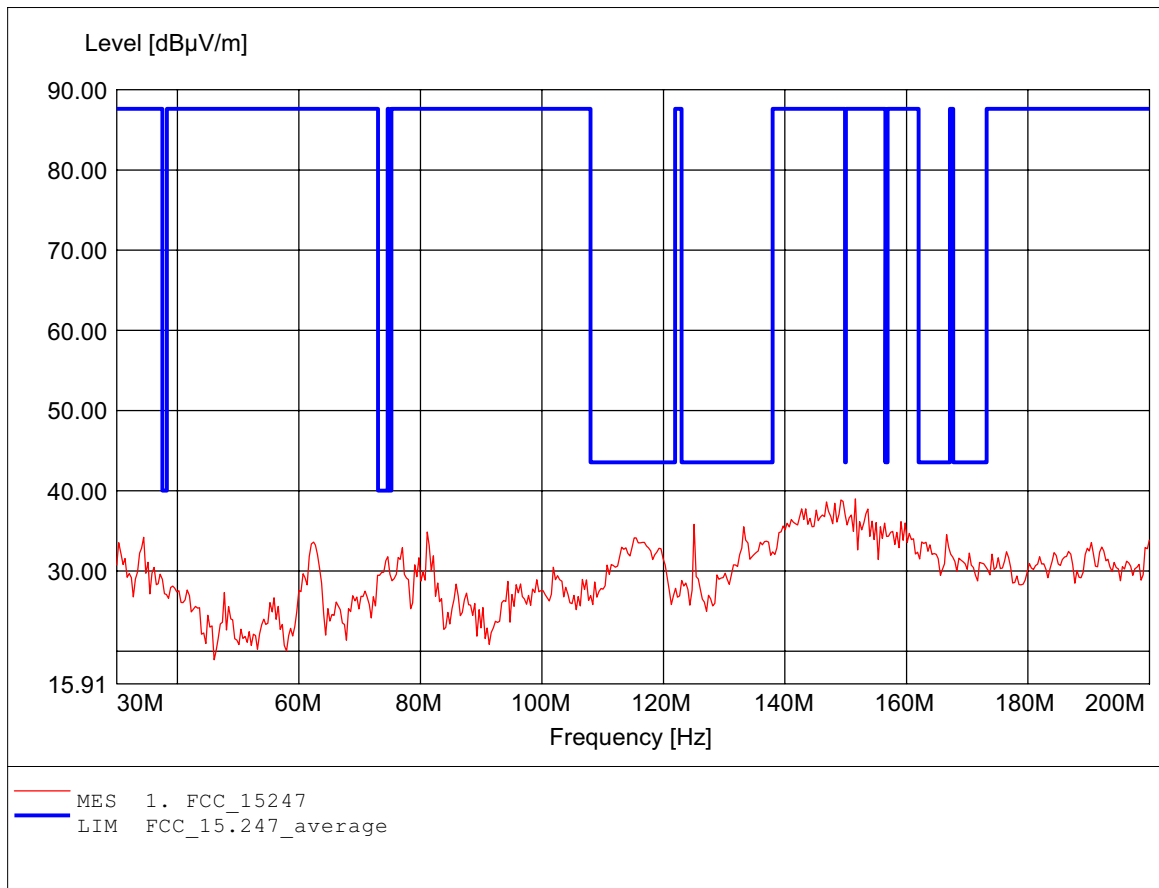

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 34.429MHz, Emax: 40.86dBµV/m, RBW: 100kHz

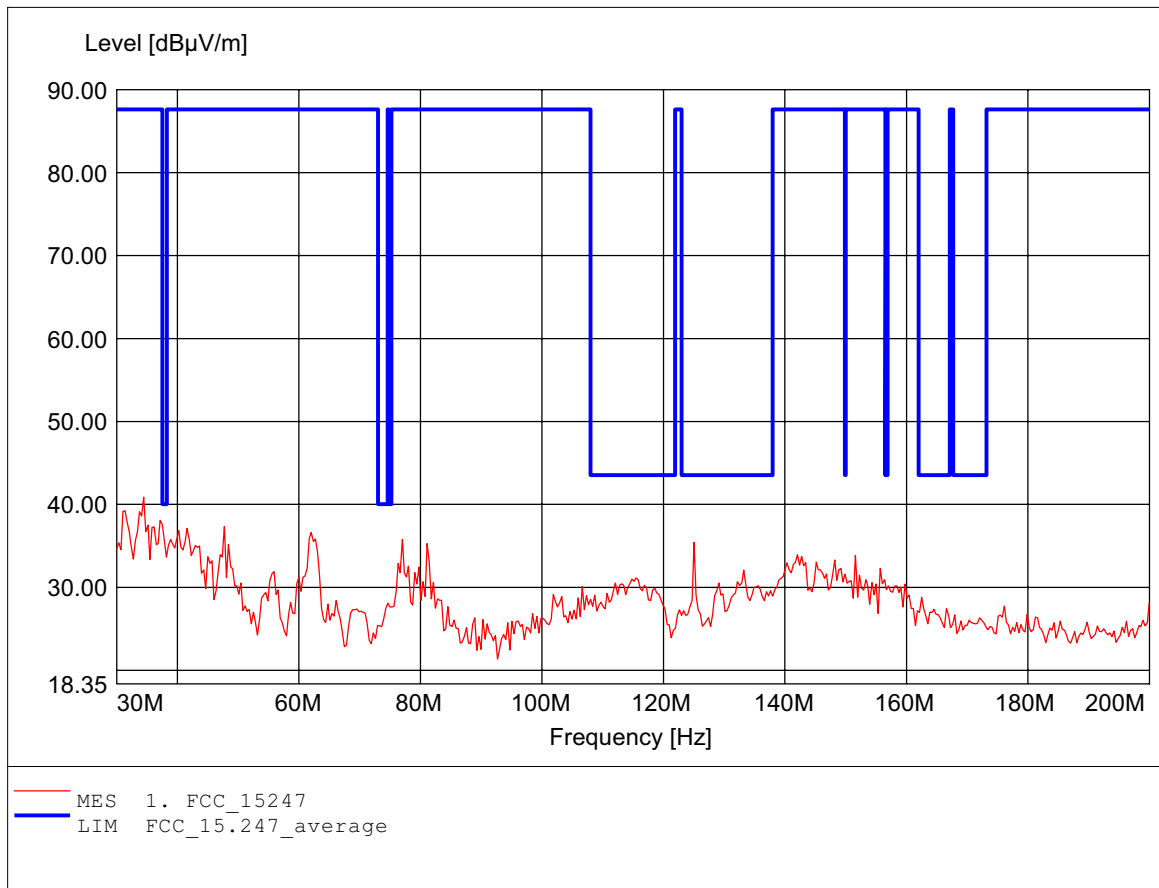

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 249.699MHz, Emax: 44.15dBμV/m, RBW: 100kHz

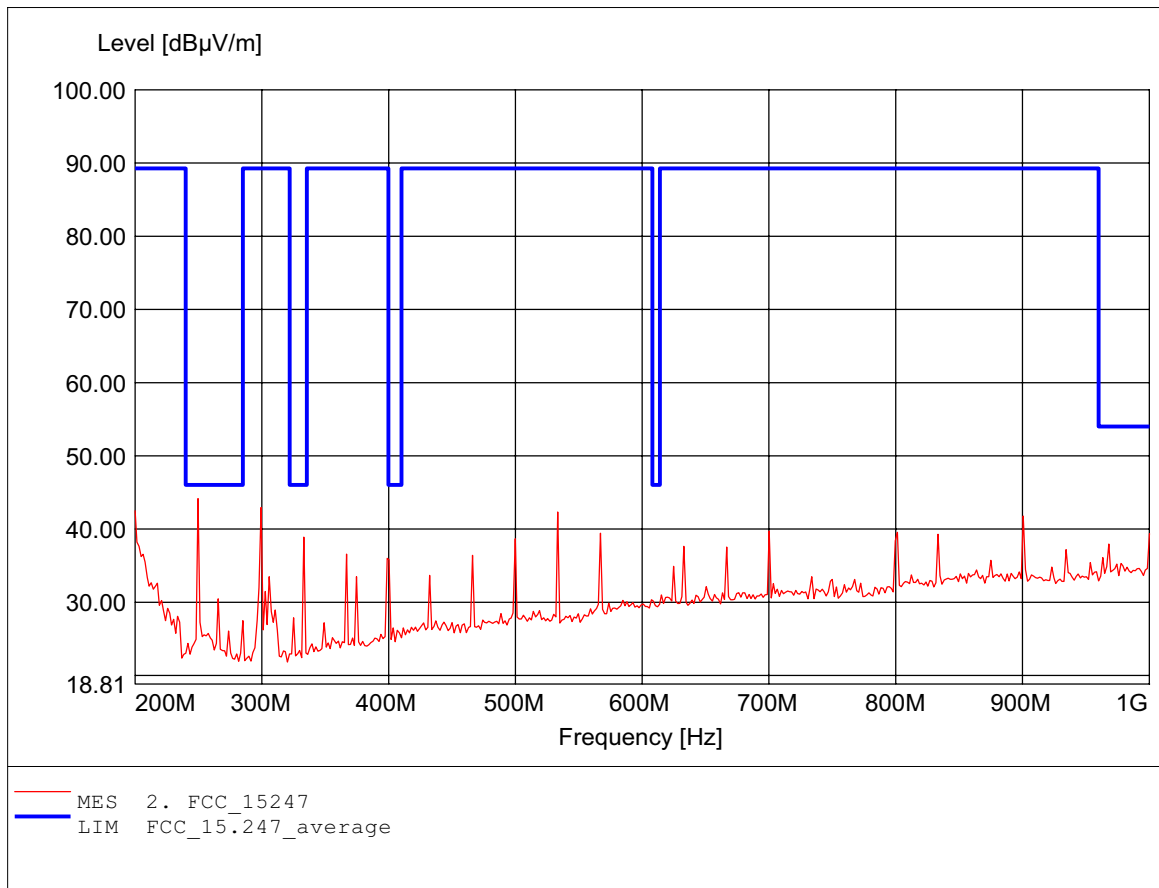

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 249.699MHz, Emax: 46.73dBμV/m, RBW: 100kHz

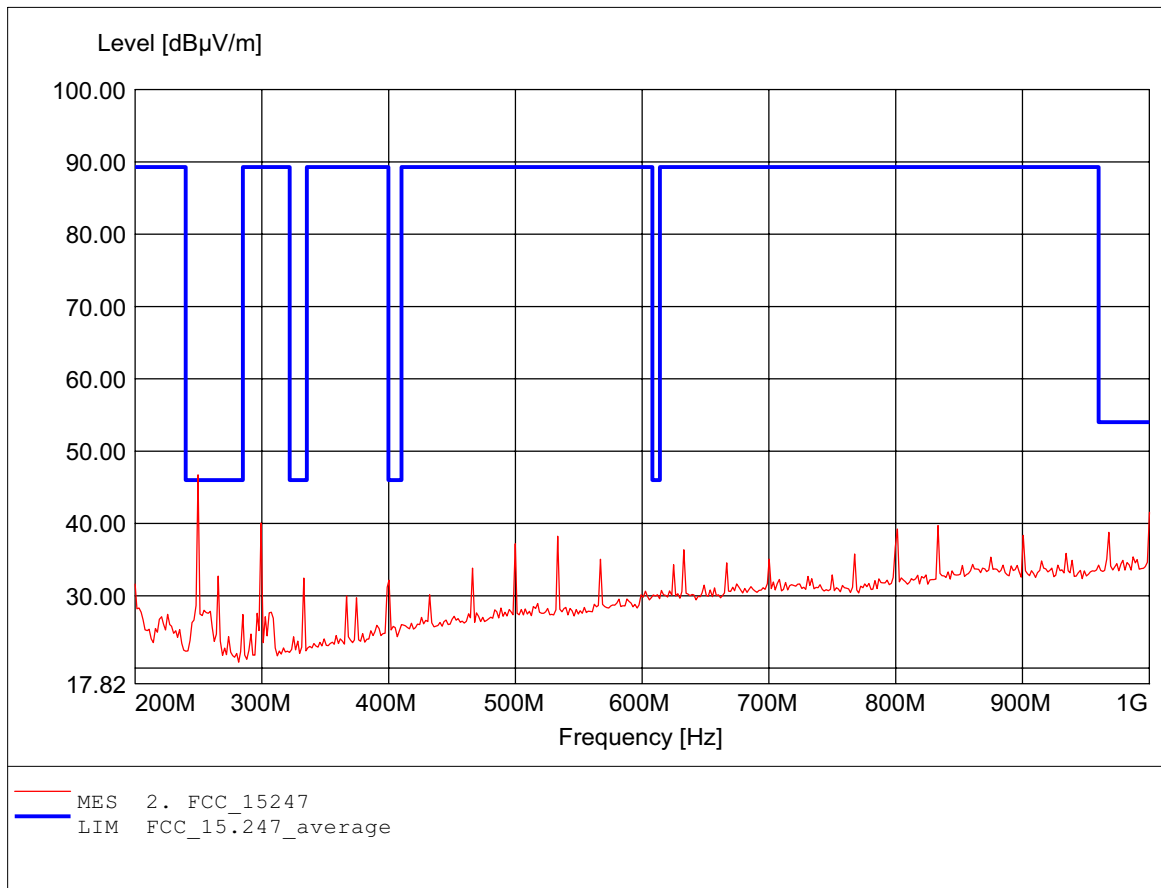

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.355GHz, Emax: 44.88dBμV/m, RBW: 1MHz

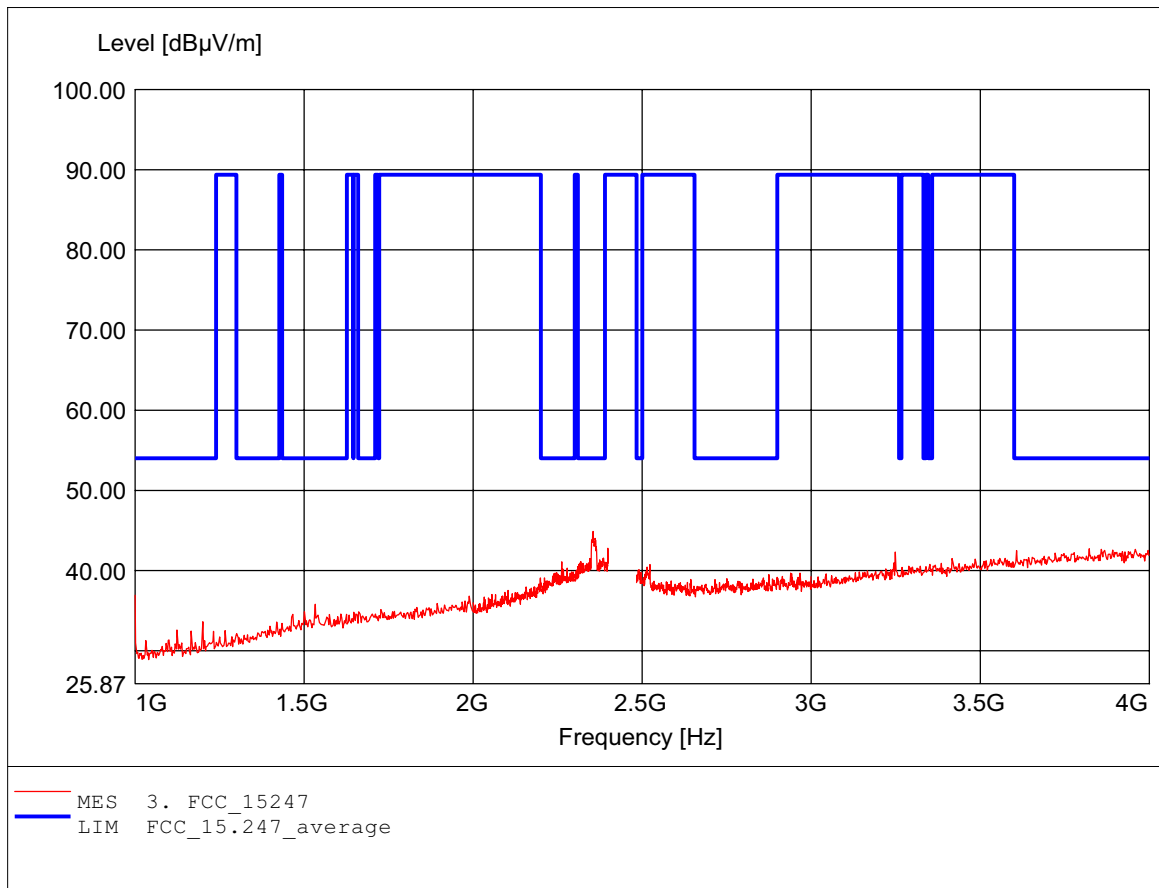

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.393GHz, Emax: 56.34dBμV/m, RBW: 1MHz

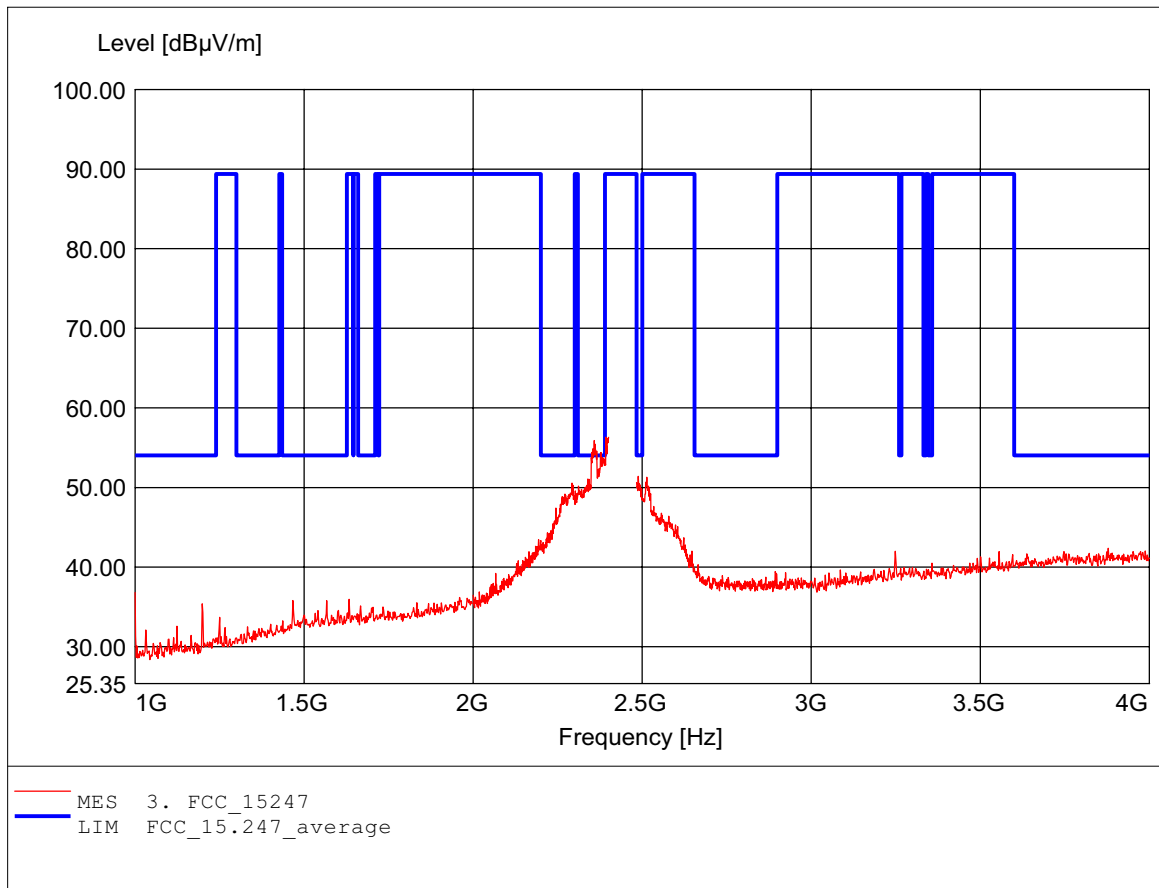

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.214GHz, Emax: 51.51dBμV/m, RBW: 1MHz

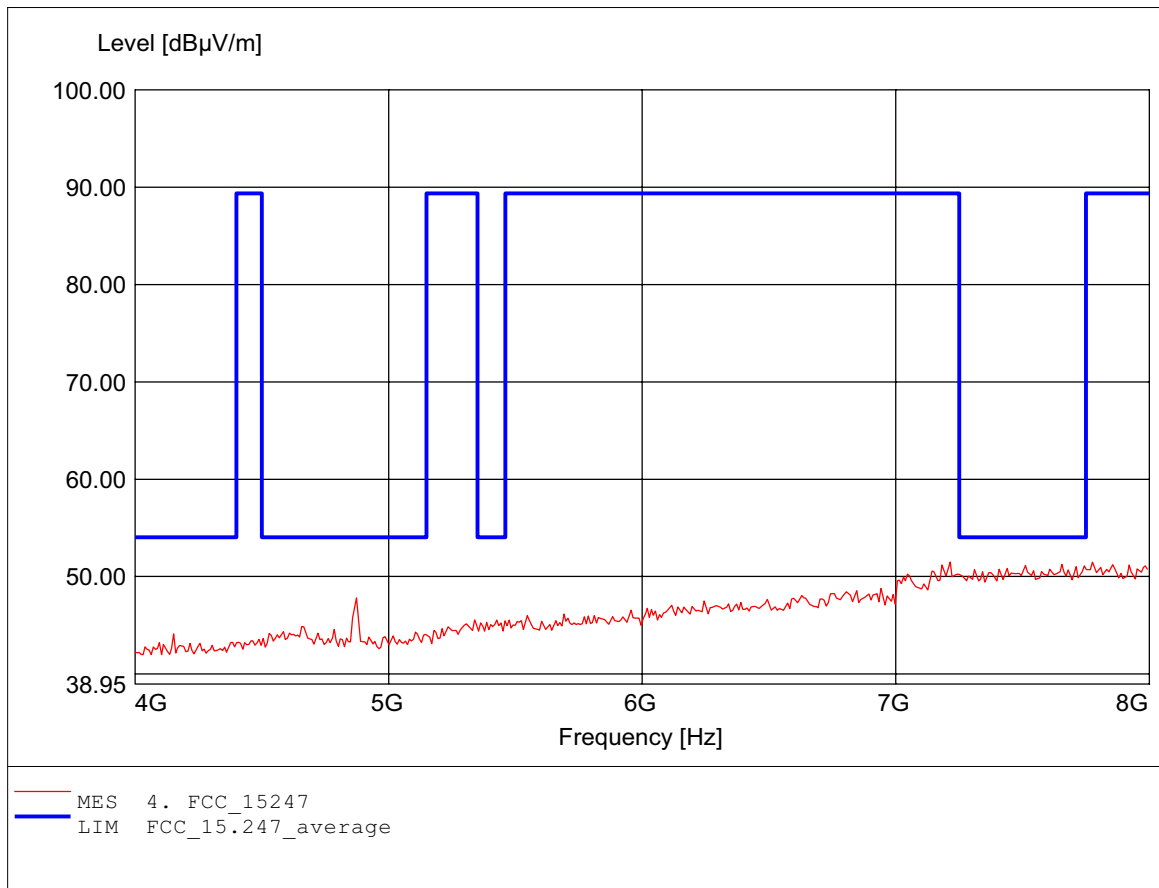

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.311GHz, Emax: 52.74dBμV/m, RBW: 1MHz

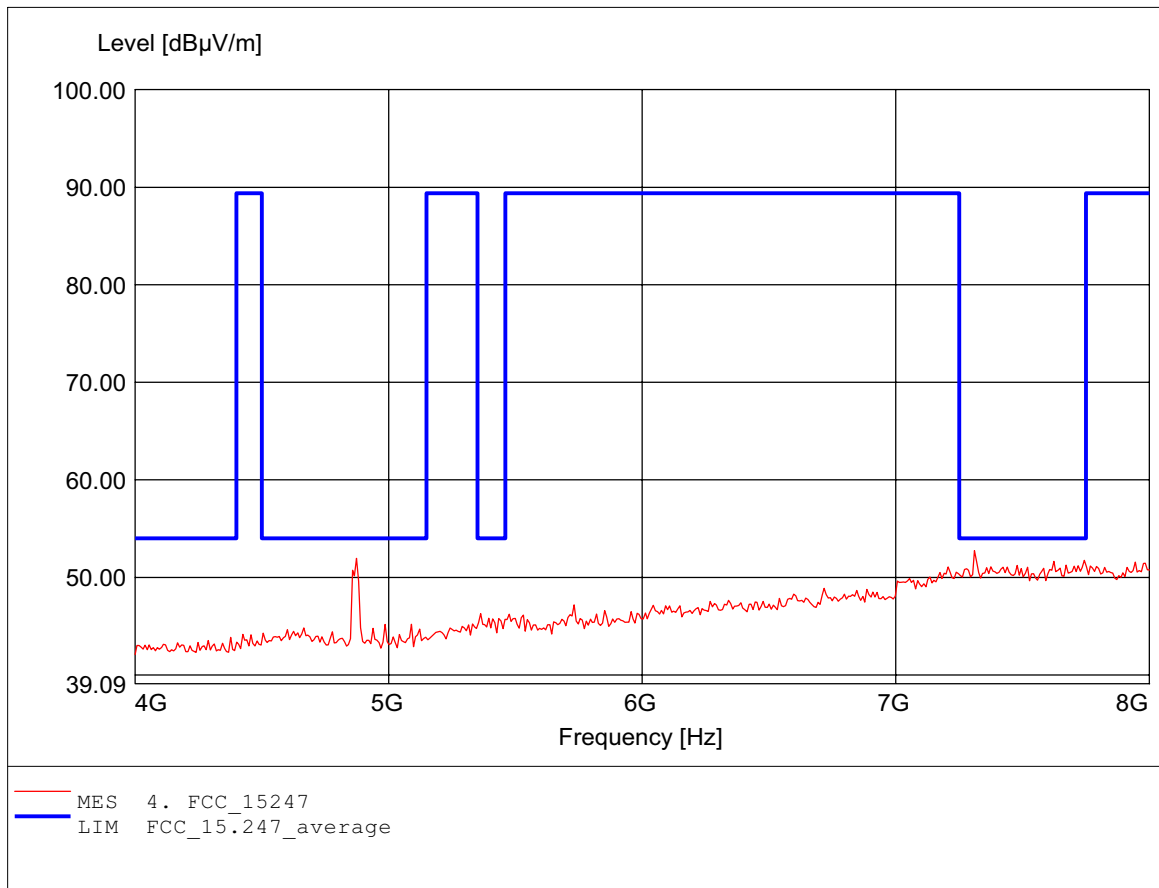

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.639GHz, Emax: 48.12dBμV/m, RBW: 1MHz

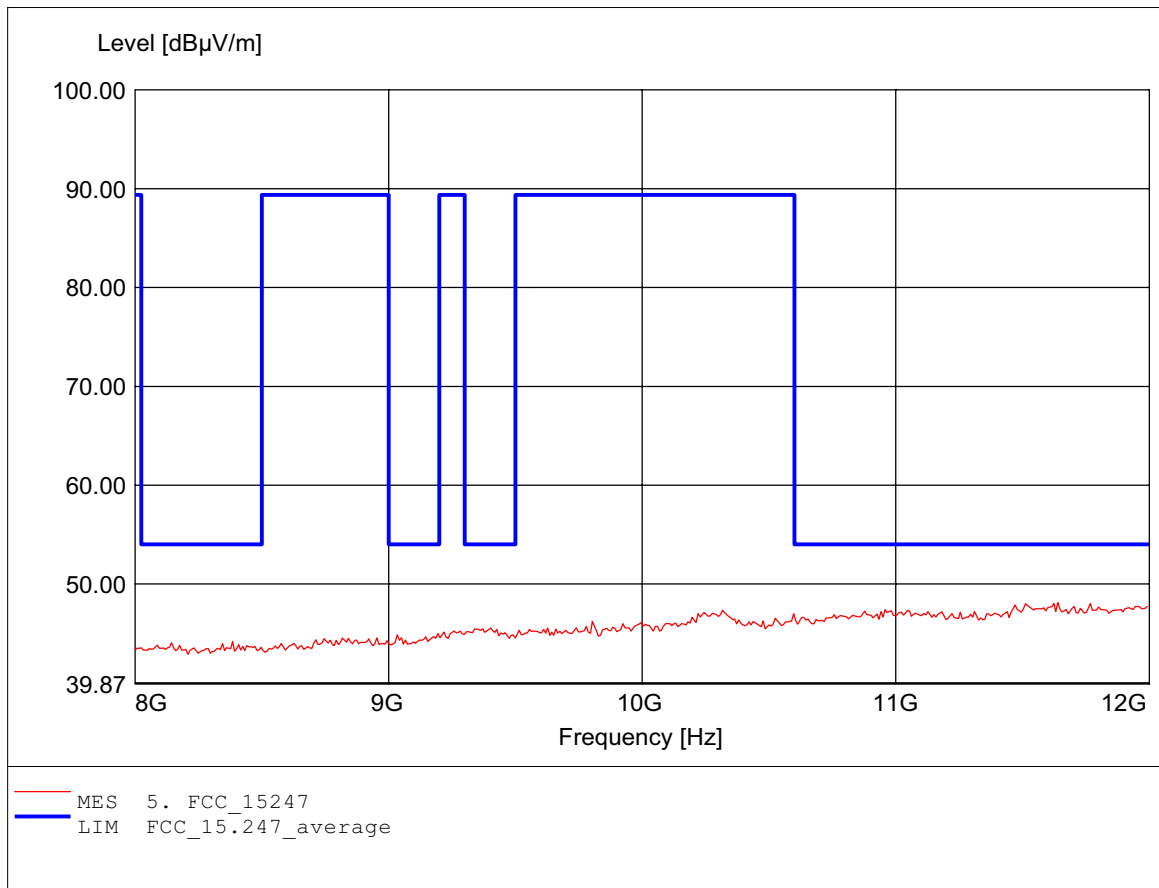

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.944GHz, Emax: 36.63dBμV/m, RBW: 1MHz

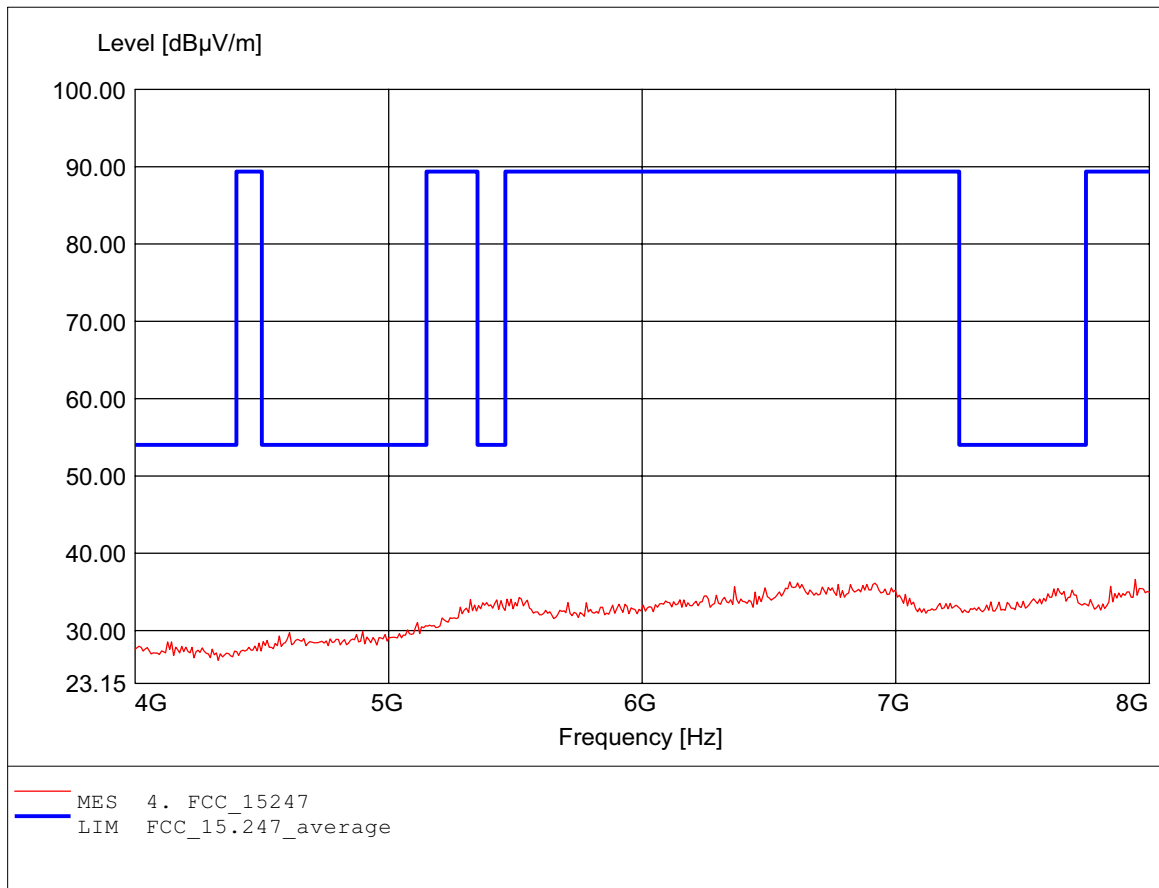

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.820GHz, Emax: 52.43dBμV/m, RBW: 1MHz

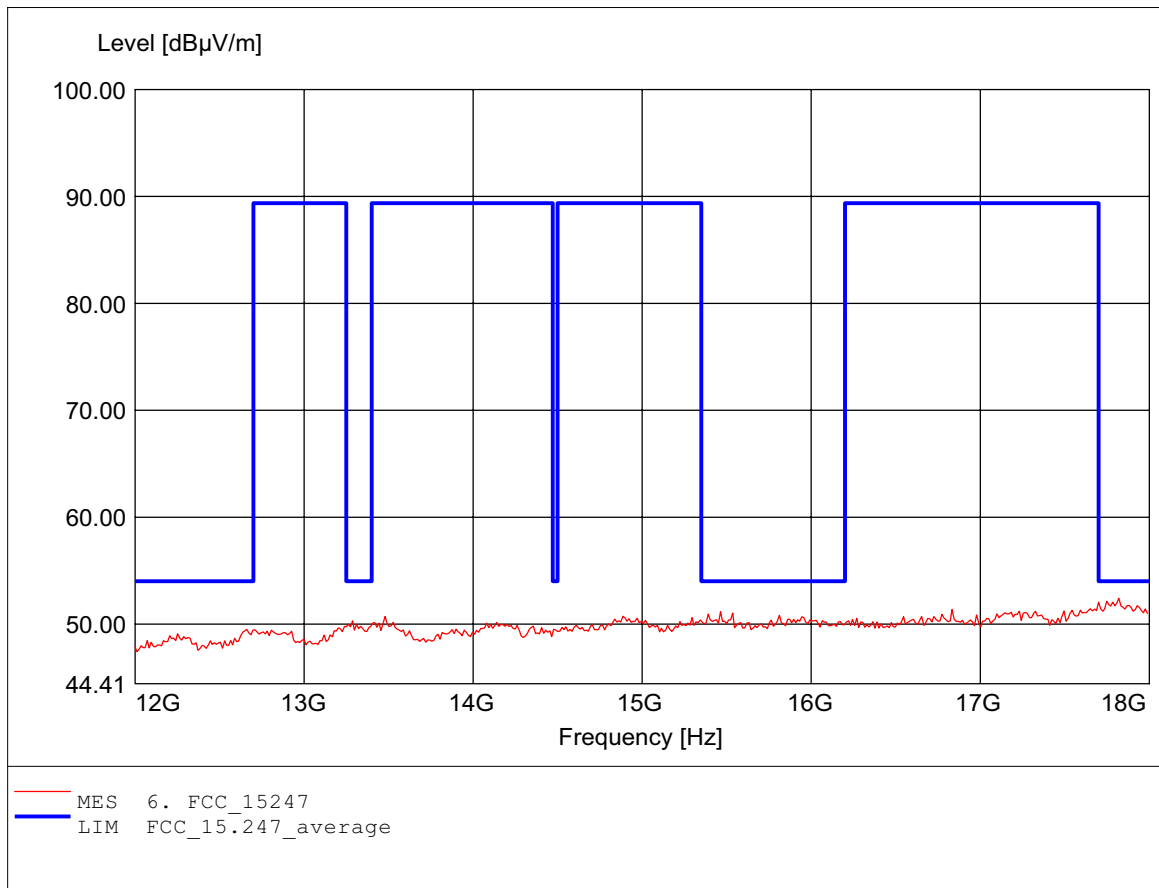

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.808GHz, Emax: 52.60dBμV/m, RBW: 1MHz

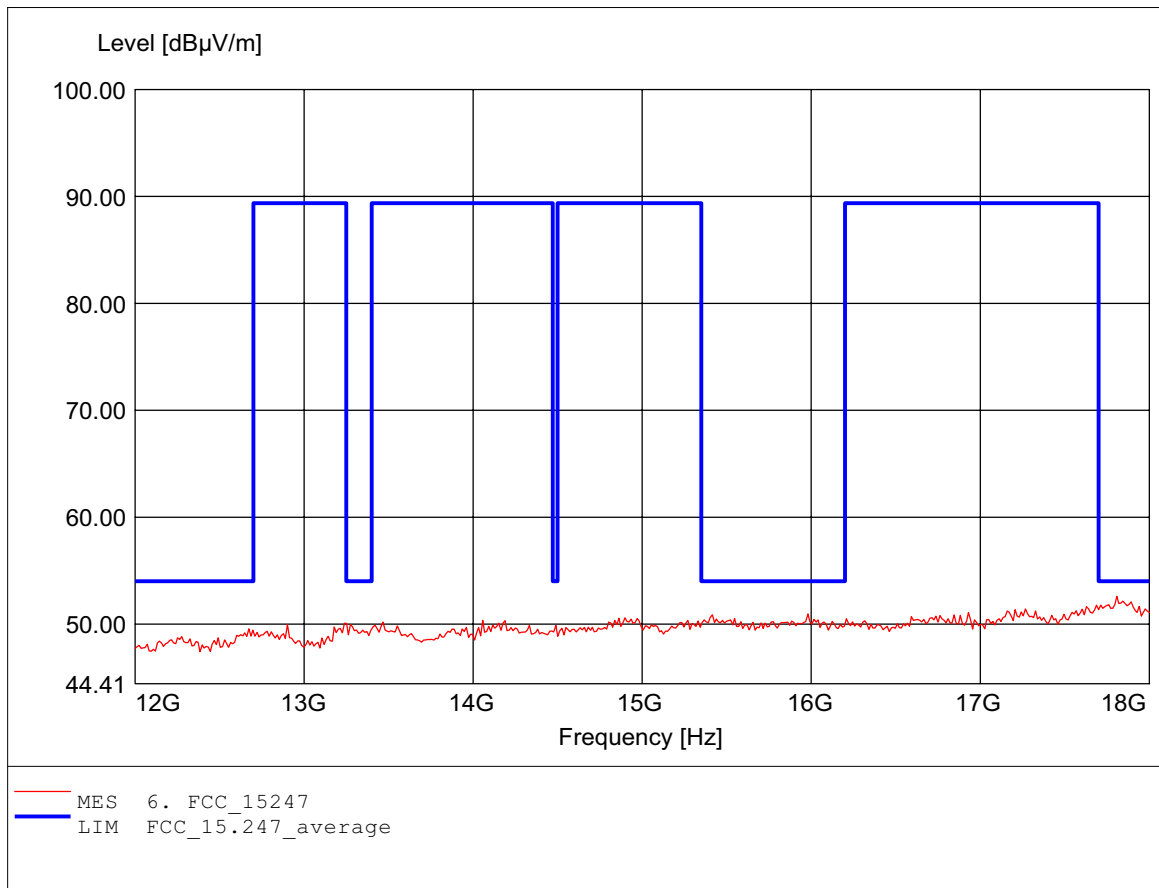

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.466GHz, Emax: 50.48dBµV/m, RBW: 1MHz

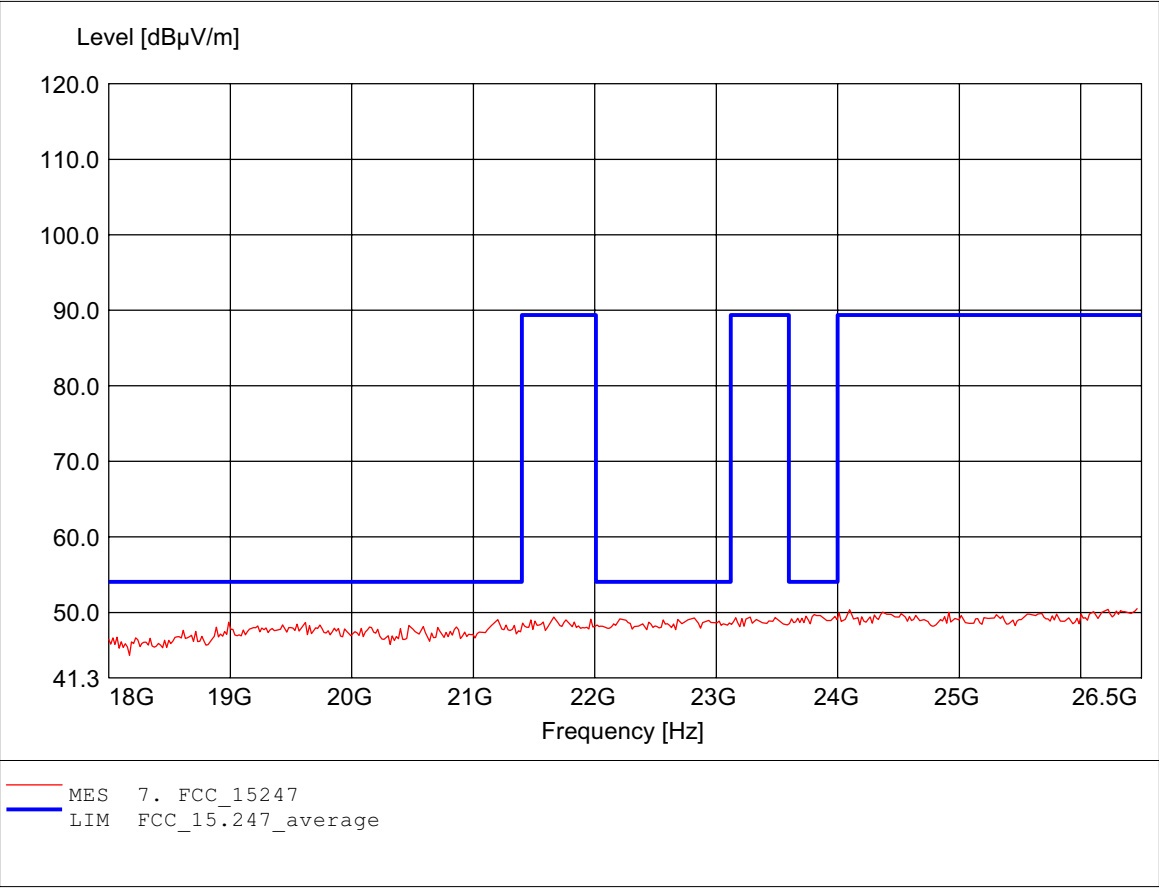

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.210GHz, Emax: 52.14dBμV/m, RBW: 1MHz

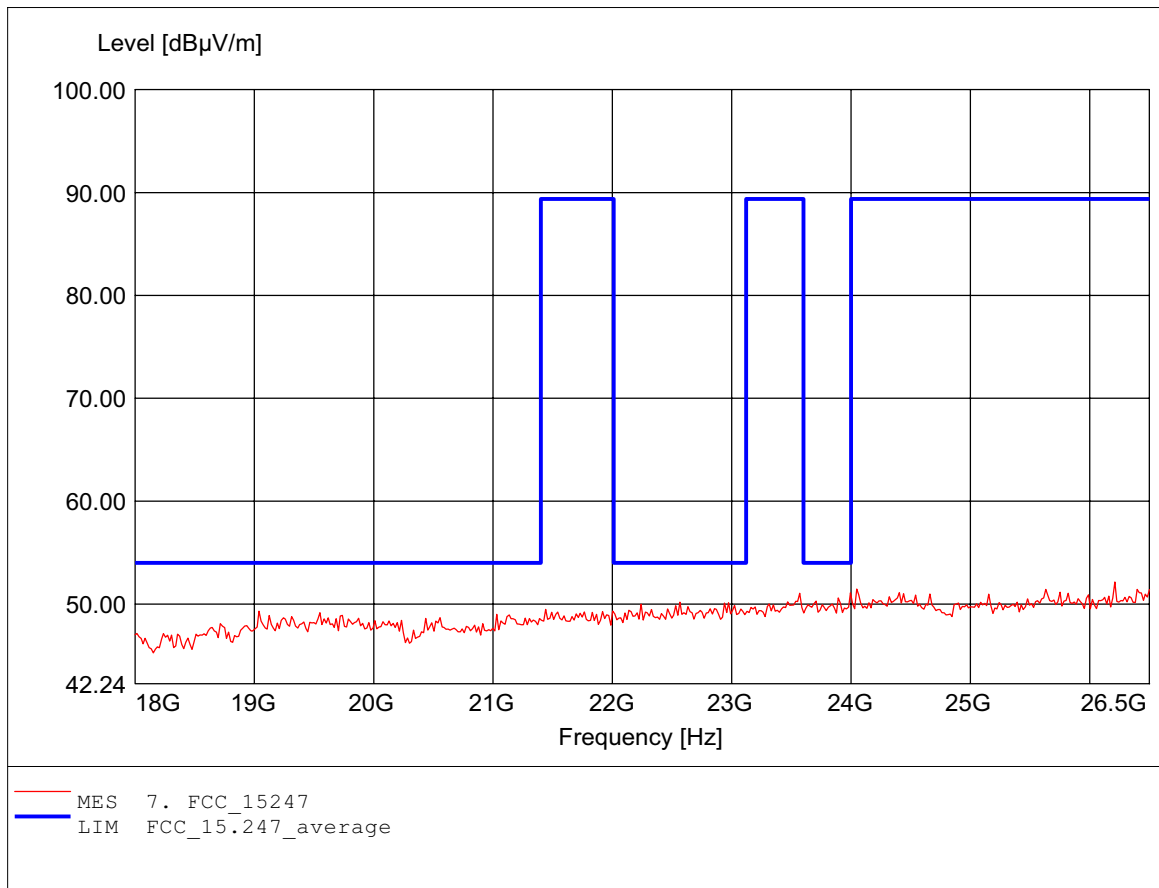

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 148.216MHz, Emax: 38.35dBµV/m, RBW: 100kHz

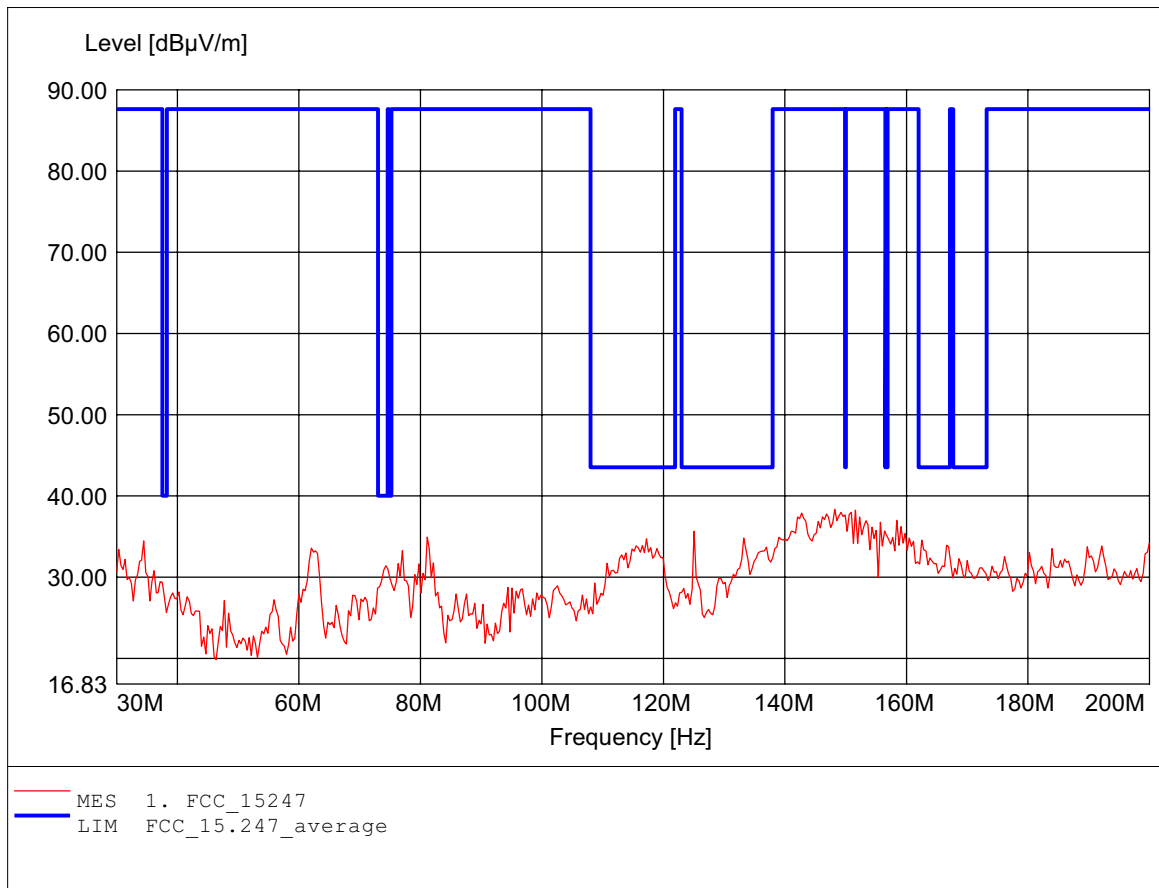

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 34.429MHz, Emax: 40.77dBµV/m, RBW: 100kHz

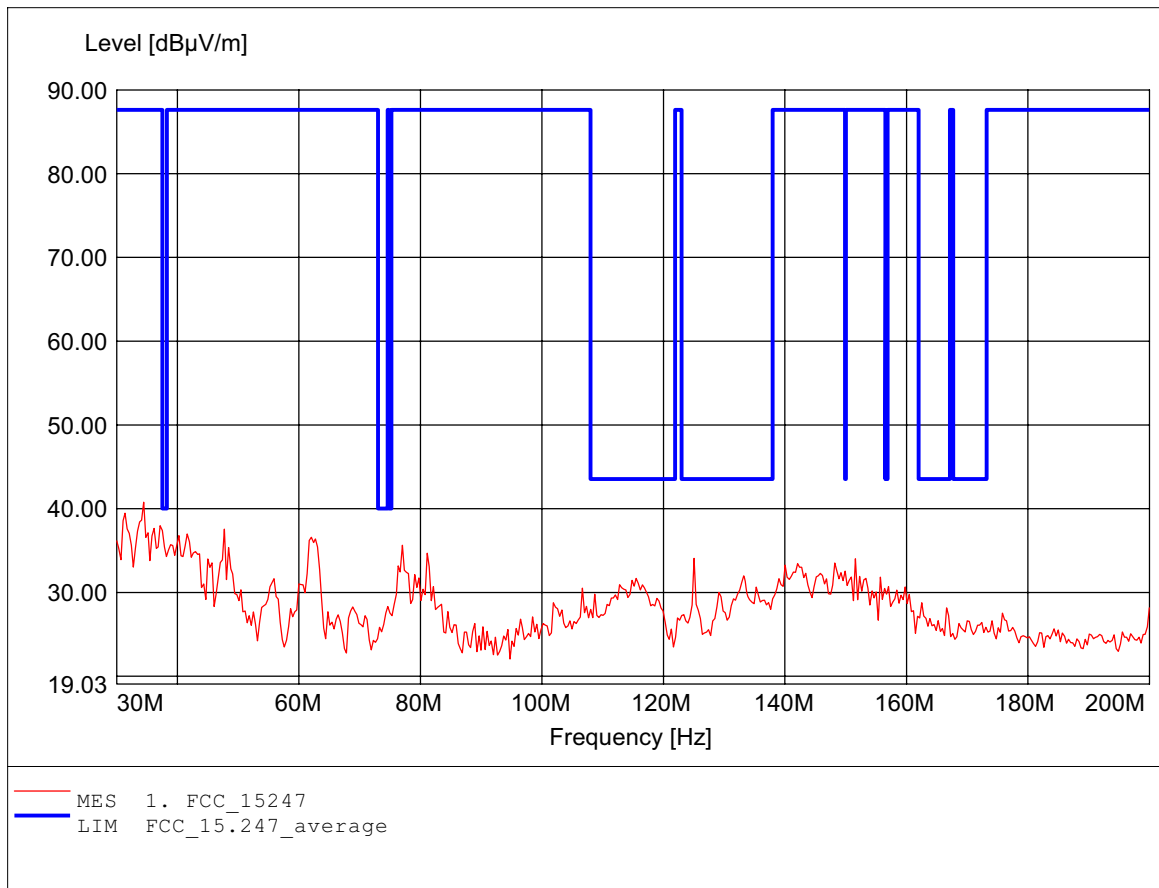

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 249.699MHz, Emax: 44.02dBμV/m, RBW: 100kHz

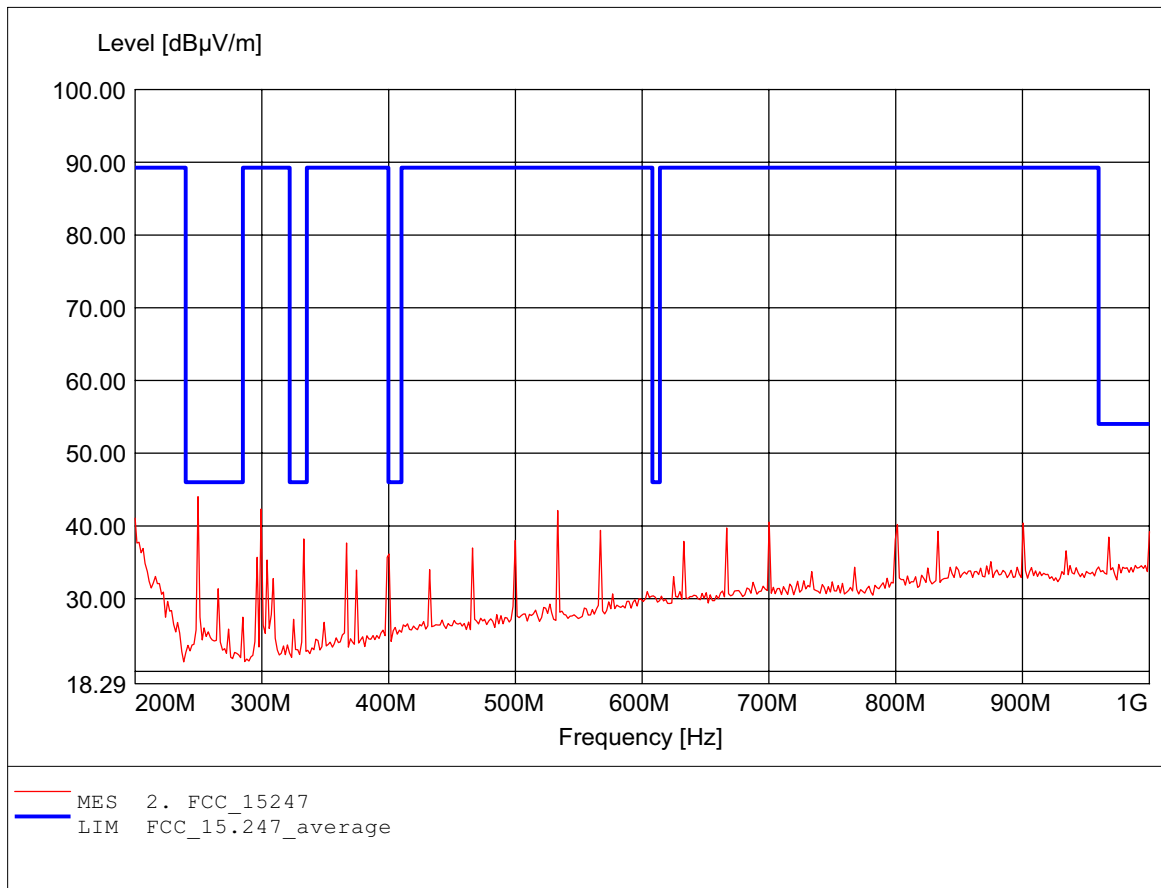

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 249.699MHz, Emax: 46.49dBμV/m, RBW: 100kHz

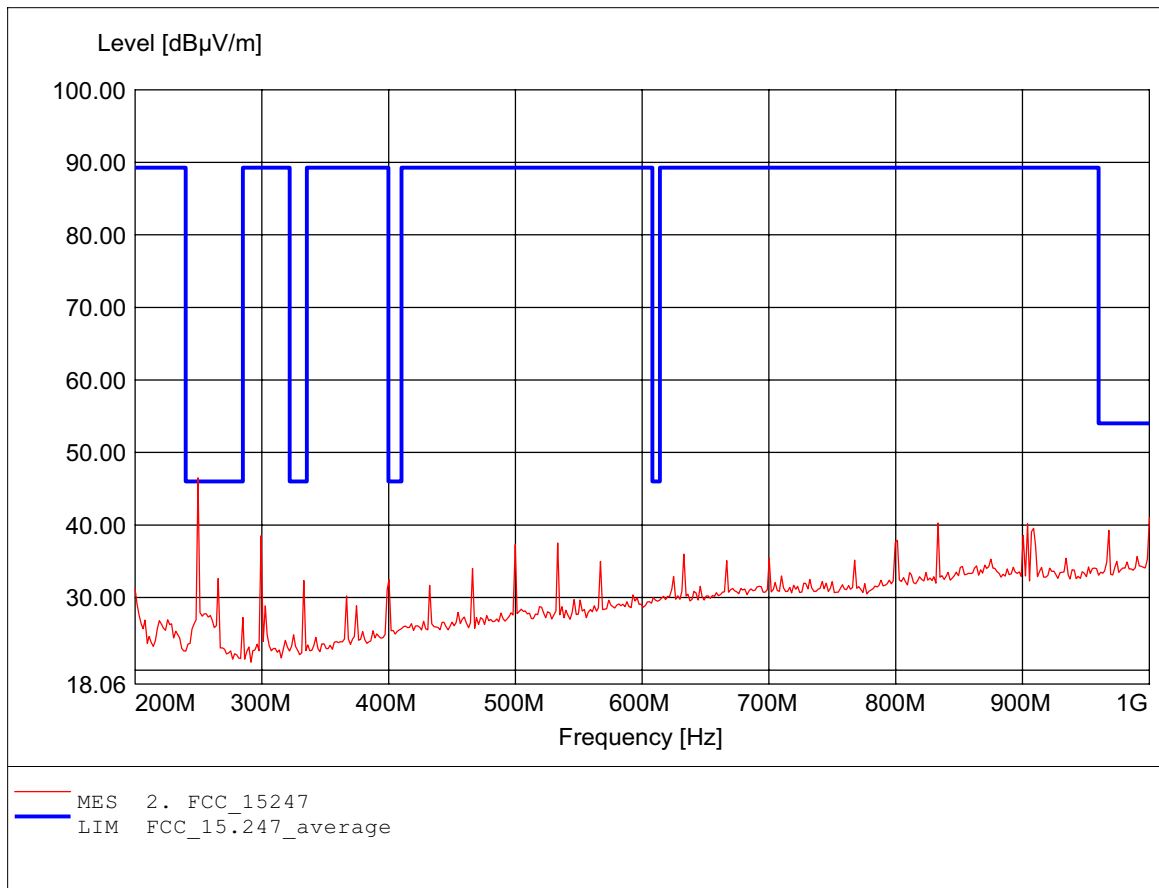

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.484GHz, Emax: 46.98dBμV/m, RBW: 1MHz

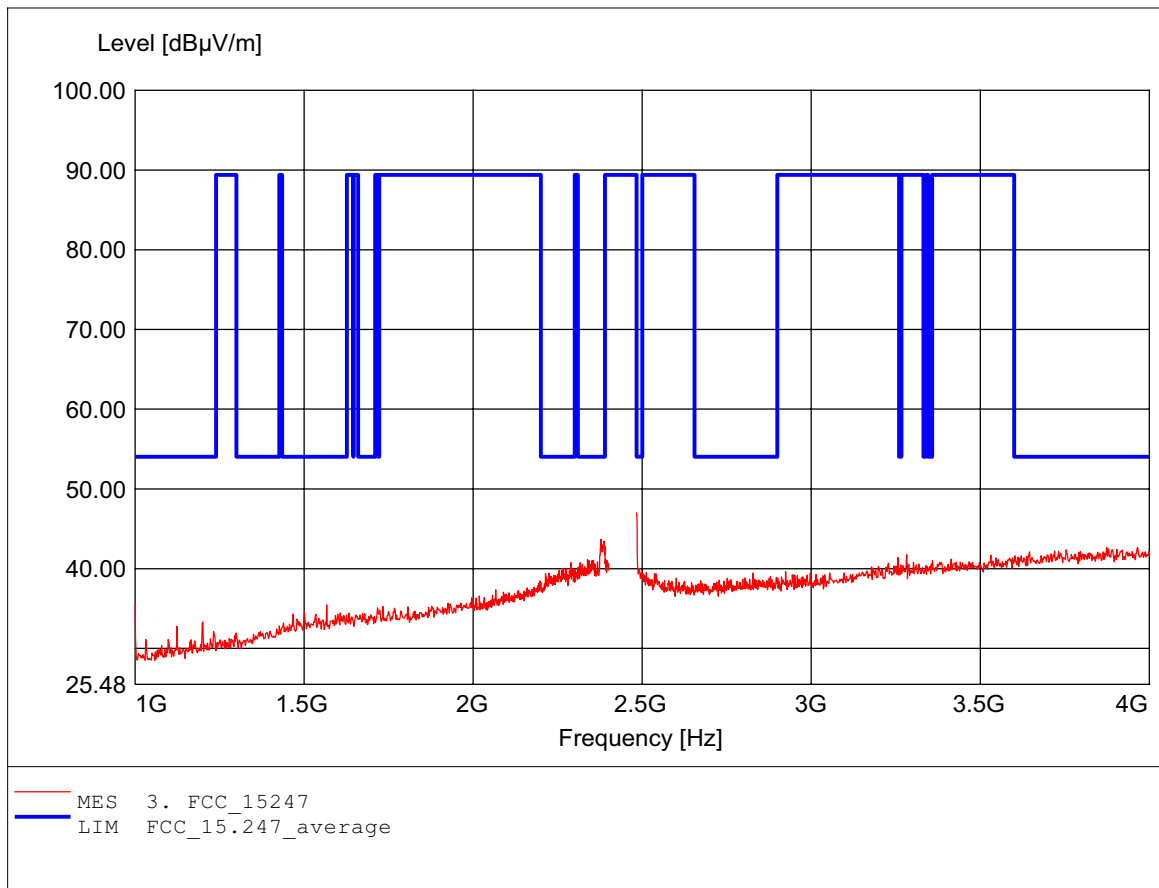

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.484GHz, Emax: 74.80dBμV/m, RBW: 1MHz

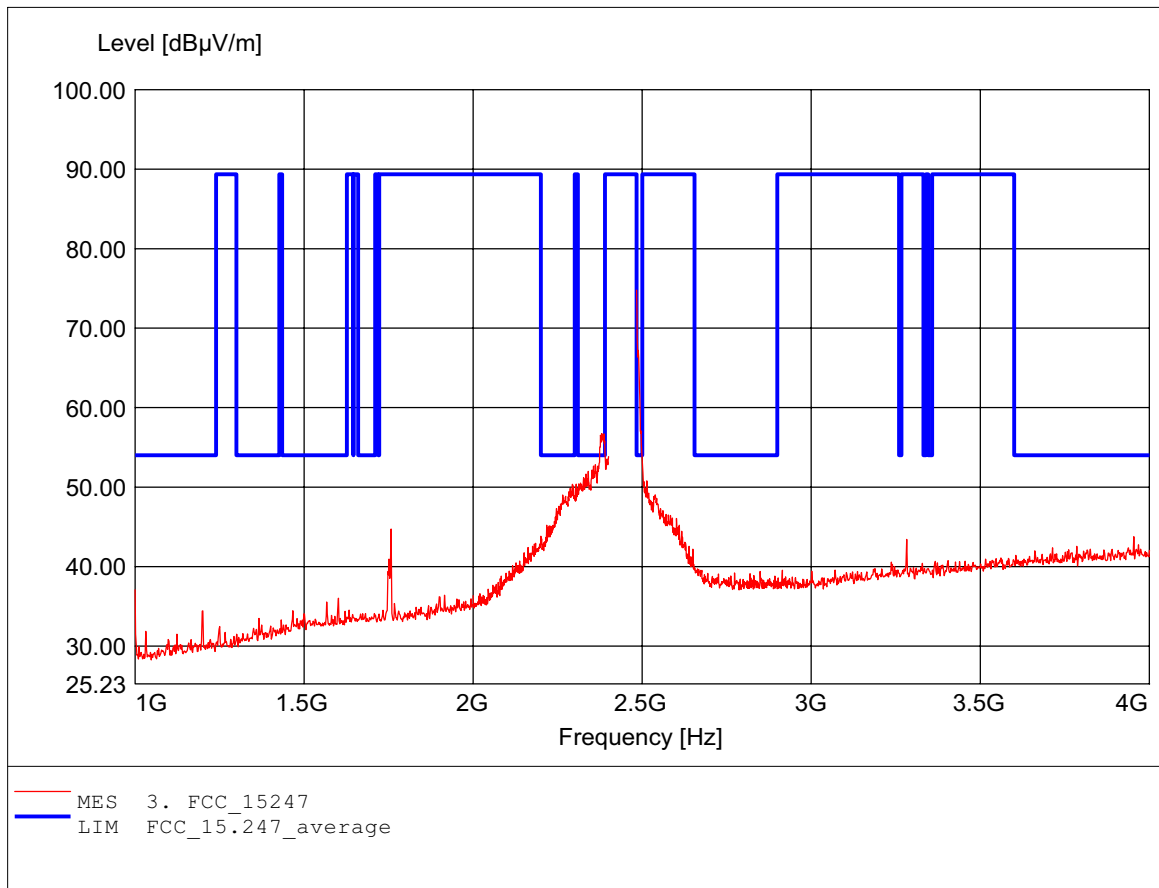

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.631GHz, Emax: 52.01dBμV/m, RBW: 1MHz

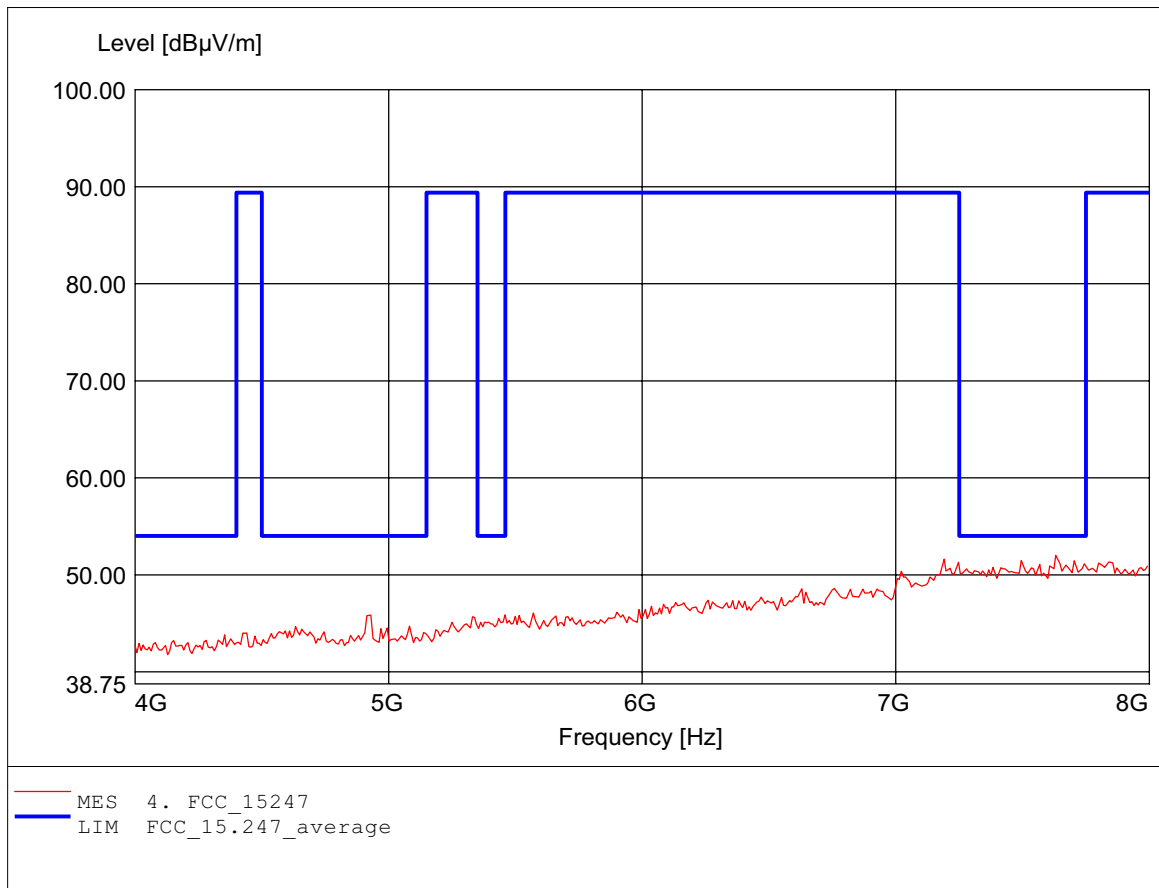

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.639GHz, Emax: 51.77dBμV/m, RBW: 1MHz

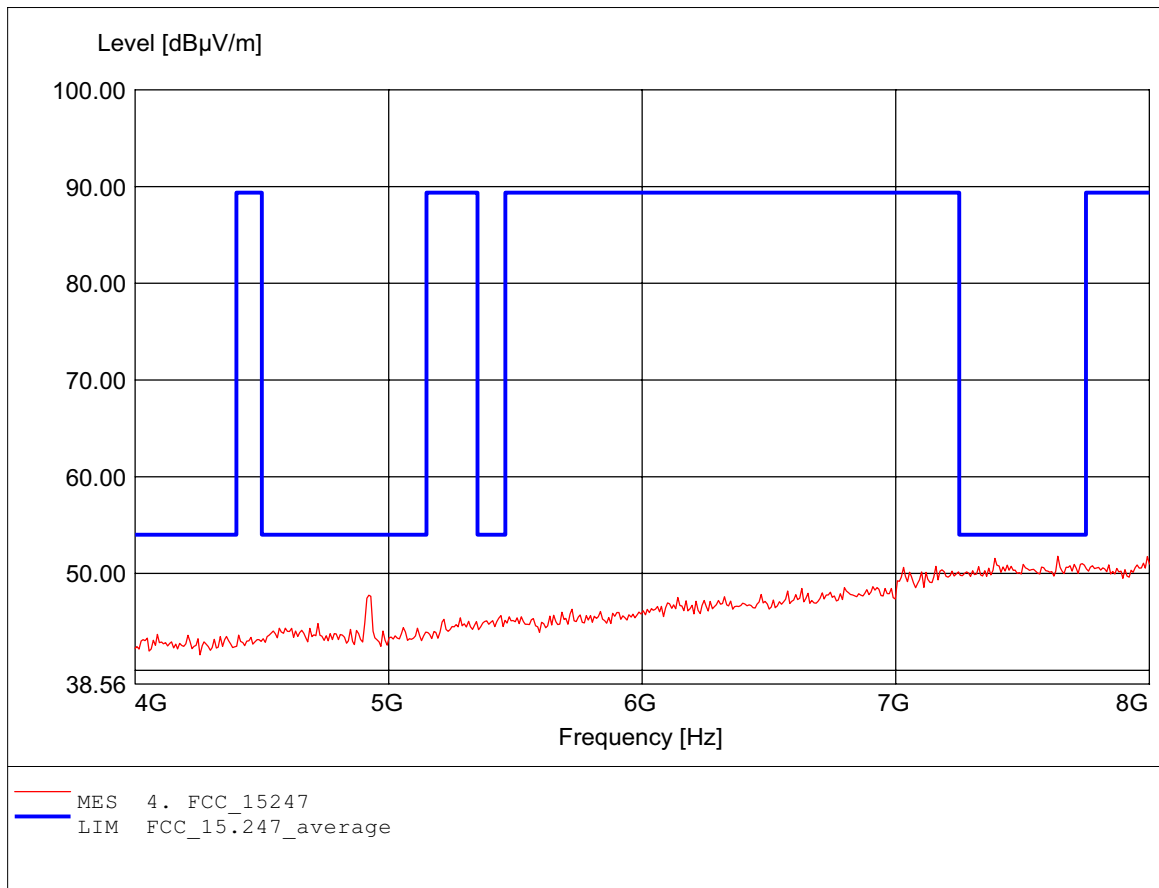

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.519GHz Emax:50.86dBμV/m RBW: 1 MHz

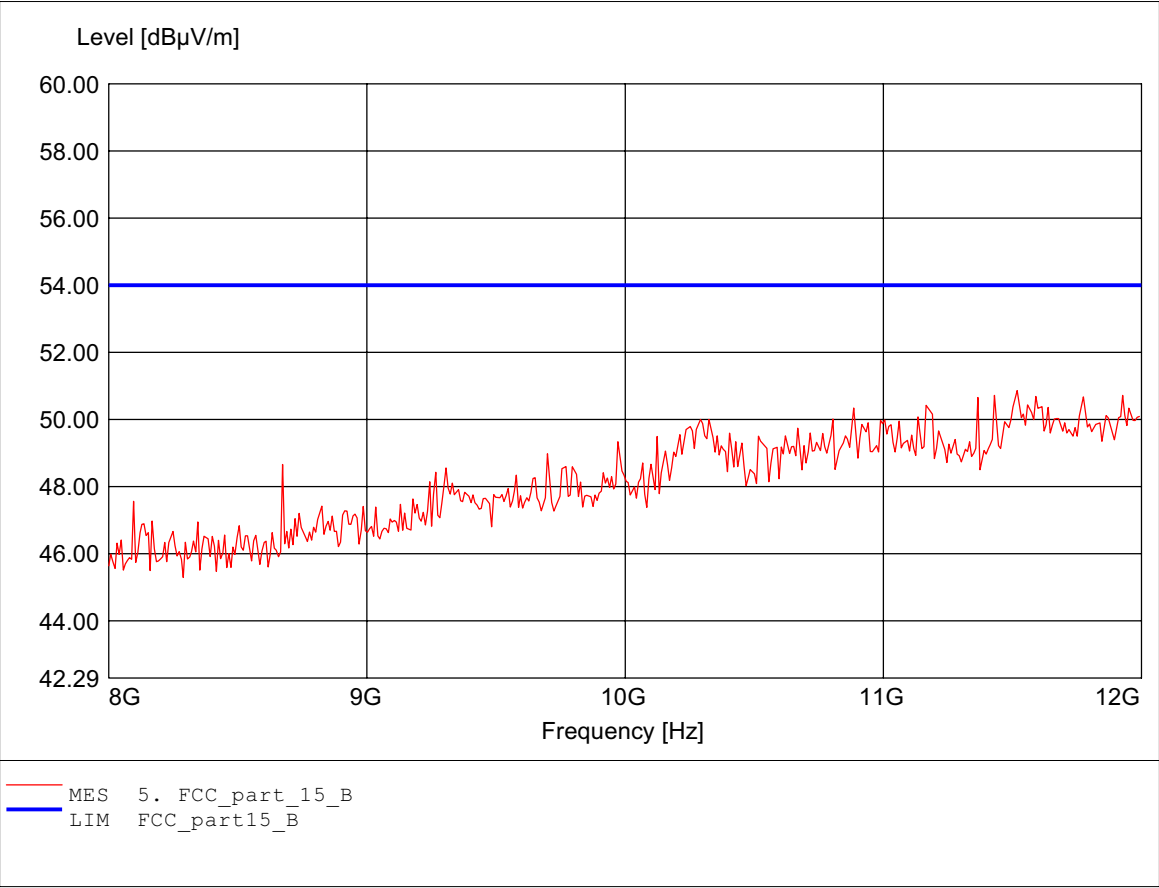

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.727GHz, Emax: 48.16dBμV/m, RBW: 1MHz

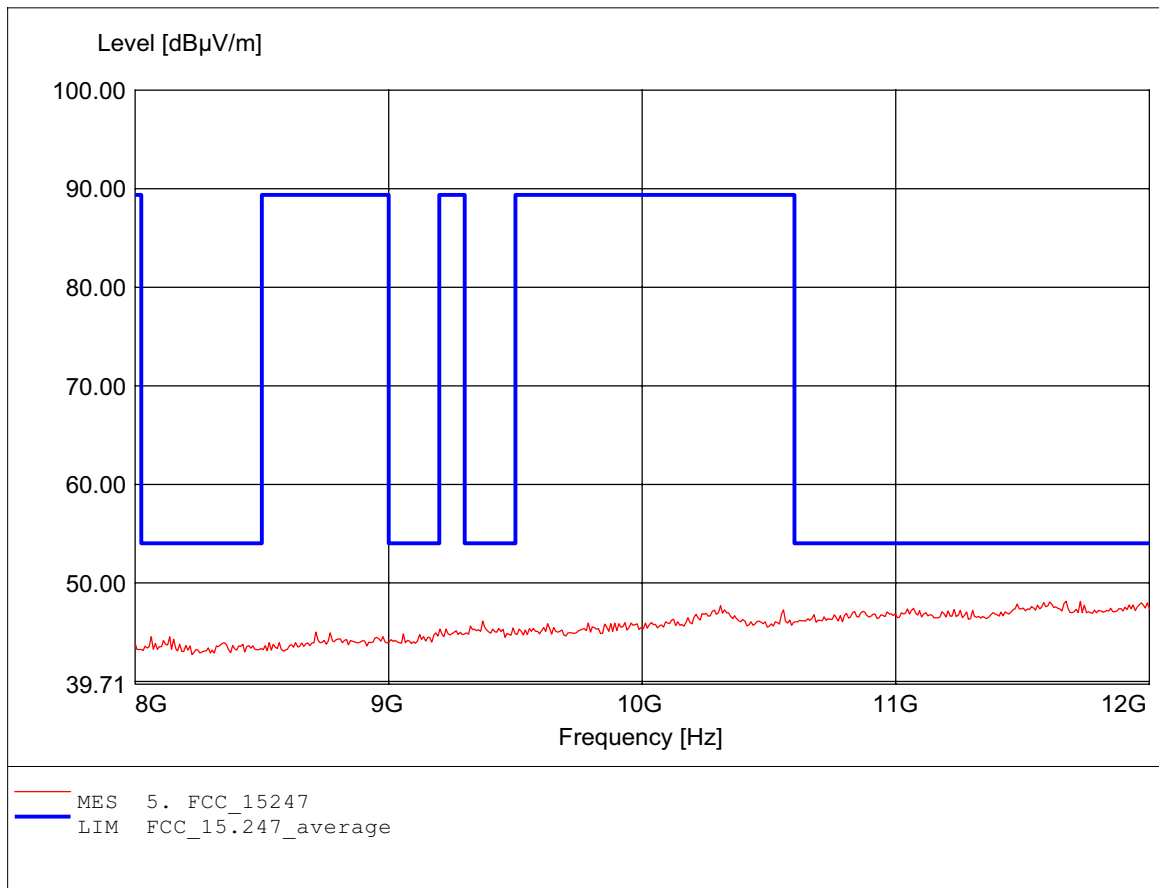

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.711GHz, Emax: 52.22dBμV/m, RBW: 1MHz

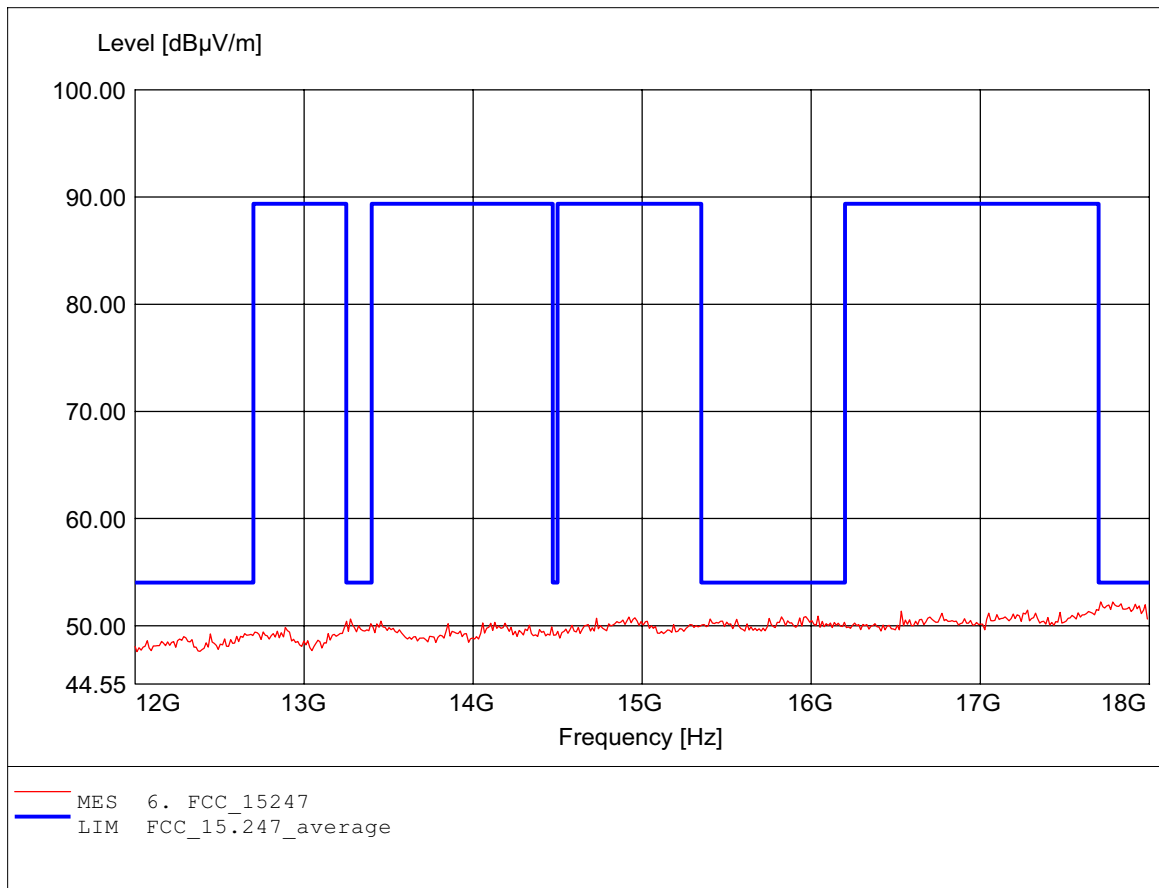

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.735GHz, Emax: 52.28dBµV/m, RBW: 1MHz

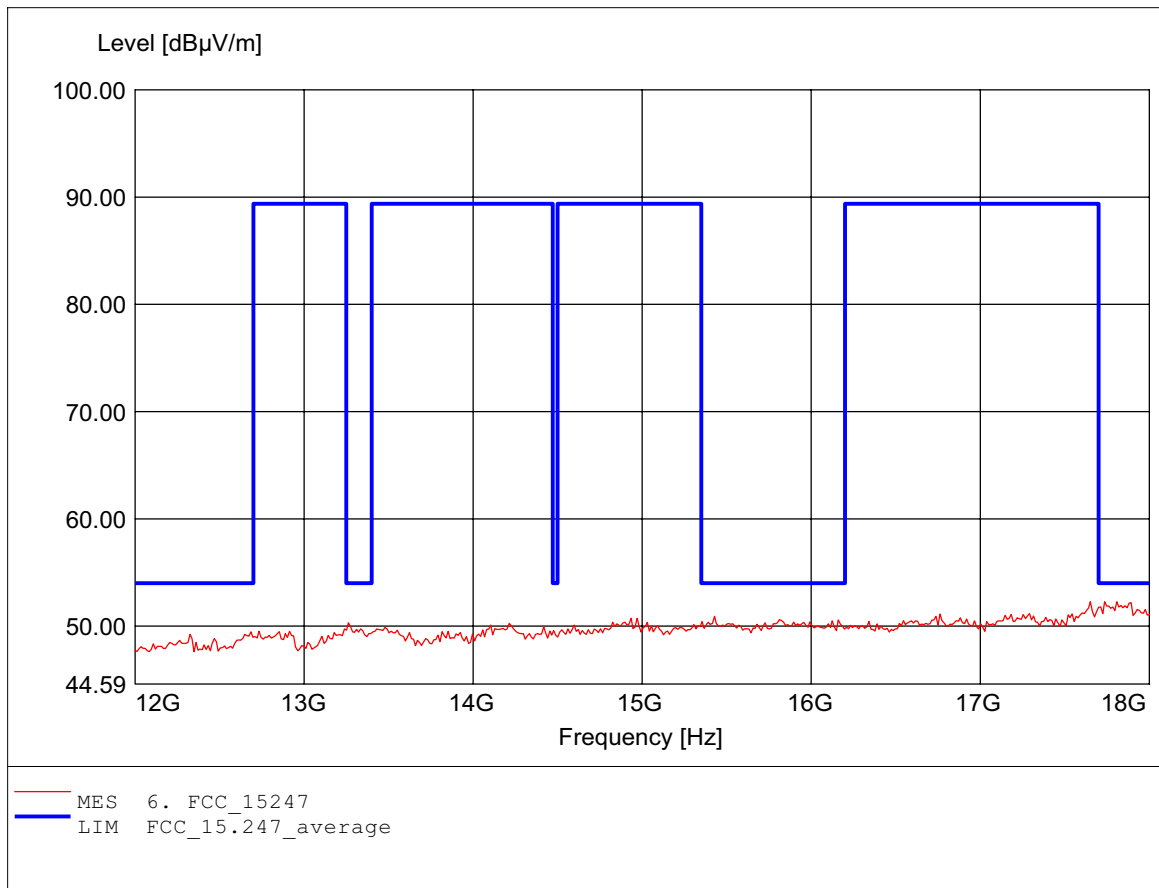

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.159GHz, Emax: 50.81dBμV/m, RBW: 1MHz

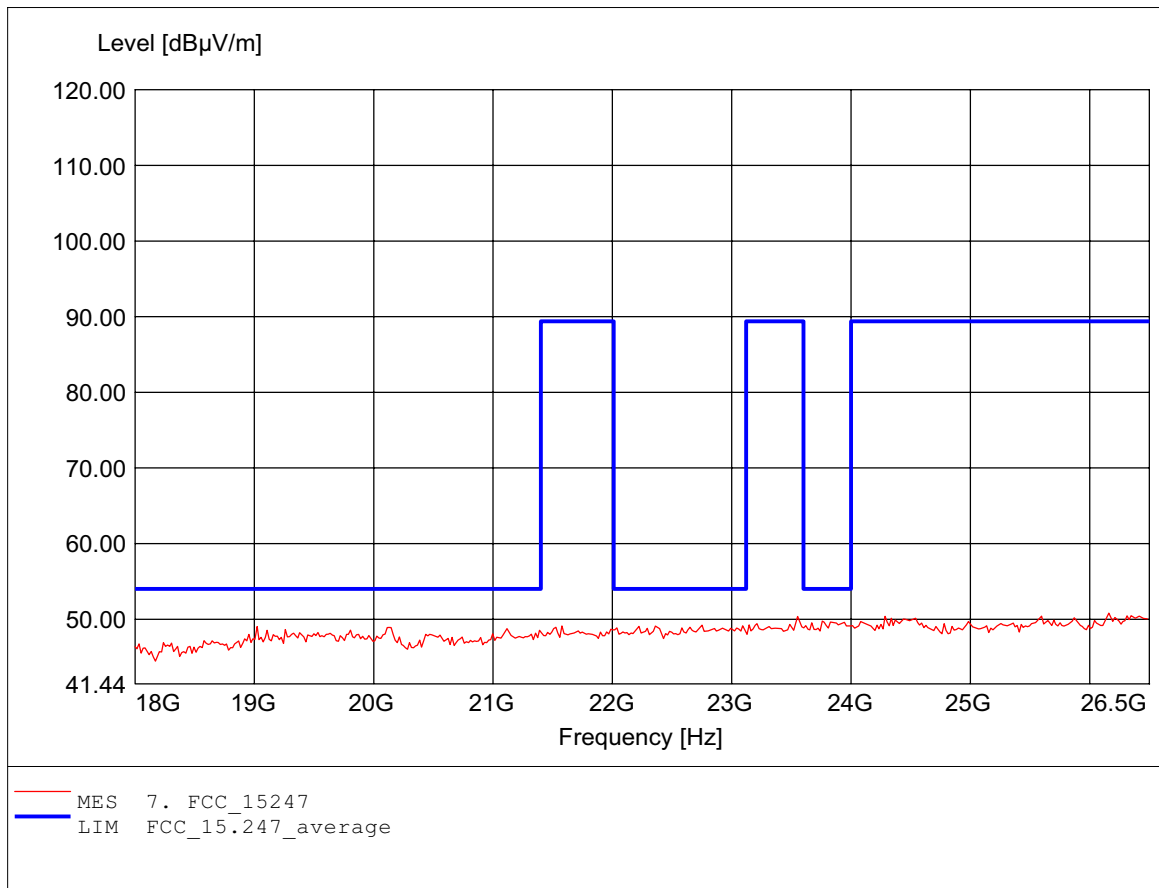


Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.398GHz, Emax: 51.64dBμV/m, RBW: 1MHz

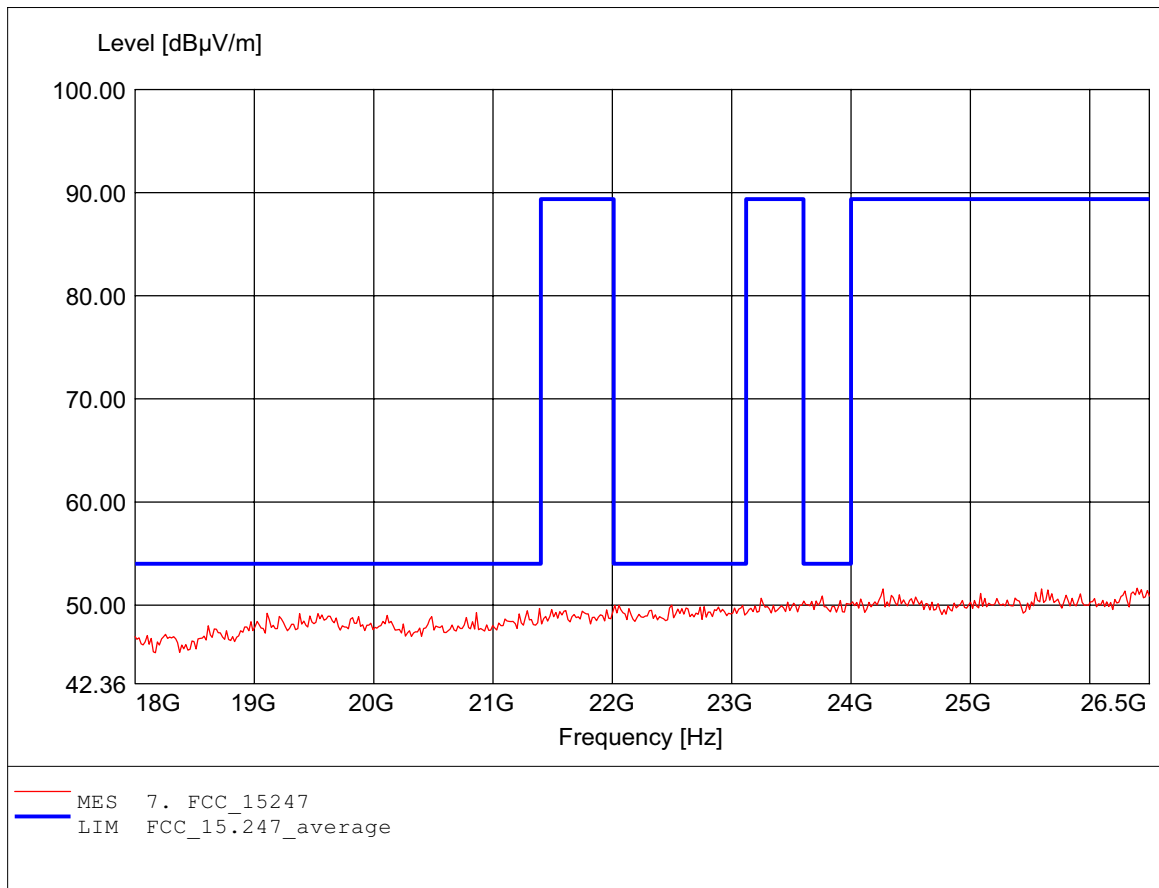




Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix C

Band Edge Measurement

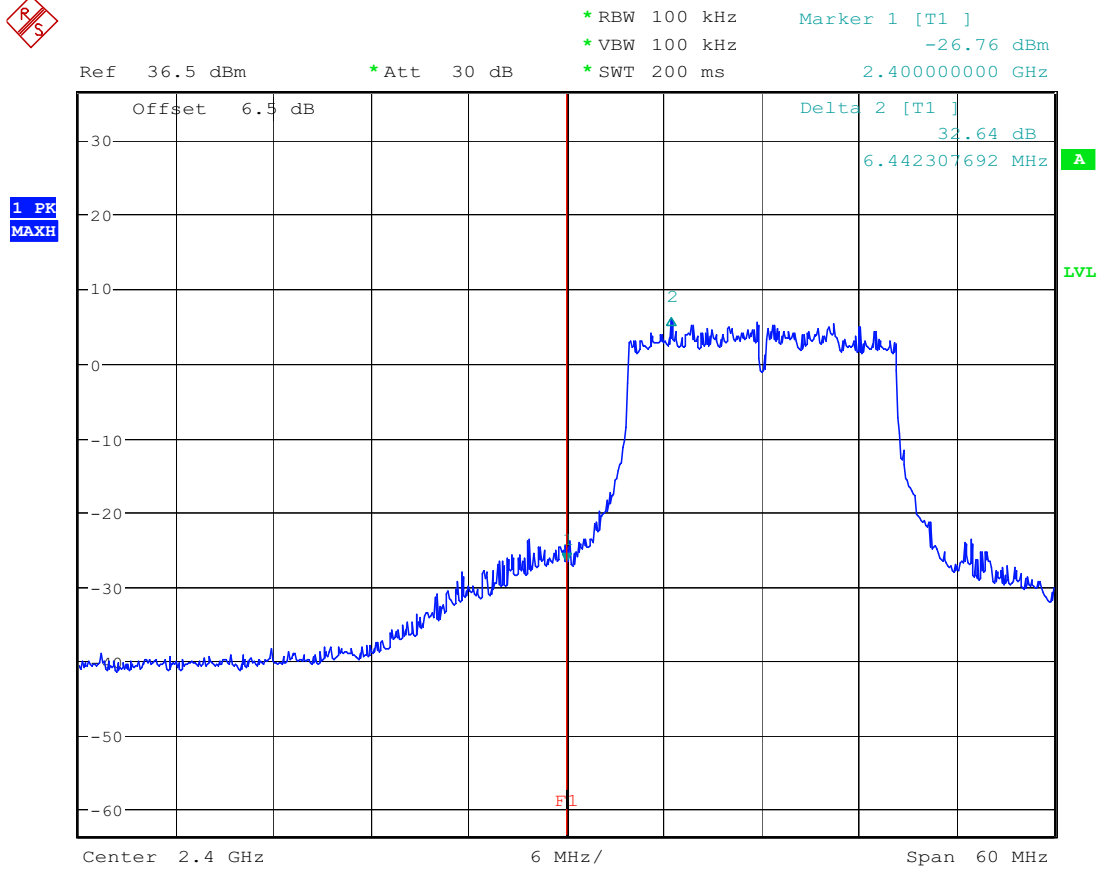

BANDEDGE COMPLIANCE 820.11g CH 1

Date: 26.APR.2006 14:29:23



Offset 6.5 dB

Delta 2 [T1] 42.42 dB

-27.053846154 MHz


LVL

Center 2.4776 GHz

6 MHz/

Span 60 MHz

Date: 26.APR.2006 14:28:32




Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix D

Minimum 6dB Bandwidth



1 PK
MAXH

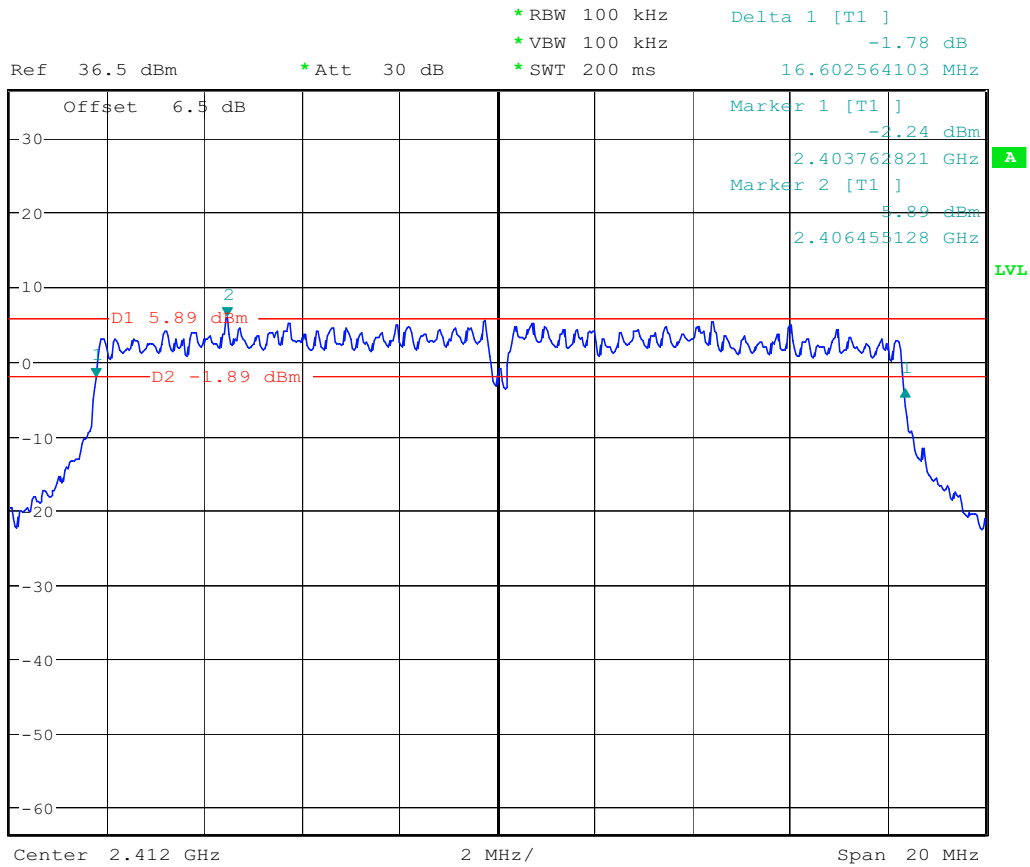


11G 6dB BANDWIDTH CH 1

Date: 26.APR.2006 14:34:30



1 PK
MAXH

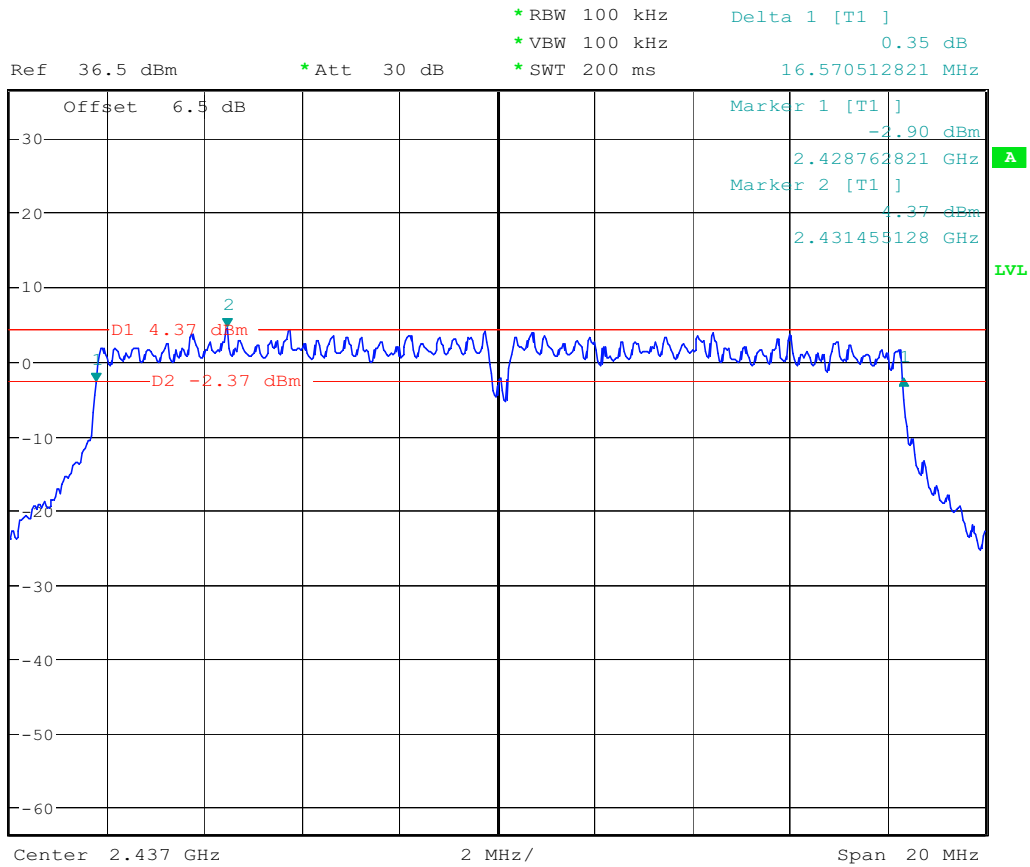


11G 6dB BANDWIDTH CH 6

Date: 26.APR.2006 14:37:38




1 PK
MAXH

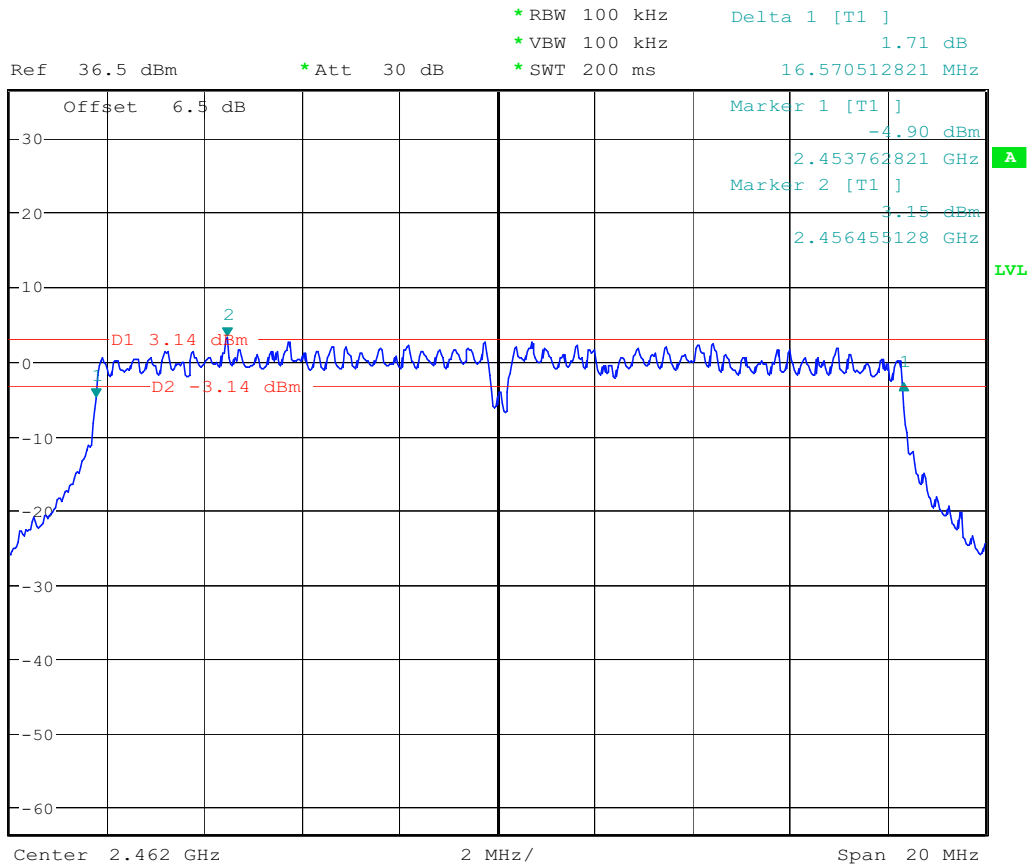

11G 6dB BANDWIDTH CH 11

Date: 26.APR.2006 14:38:56



Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix E

Peak Power Spectral Density




*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -7.99 dBm
*SWT 500 s 2.411735577 GHz

Ref 36.5 dBm

*Att 30 dB

1 PK
MAXH

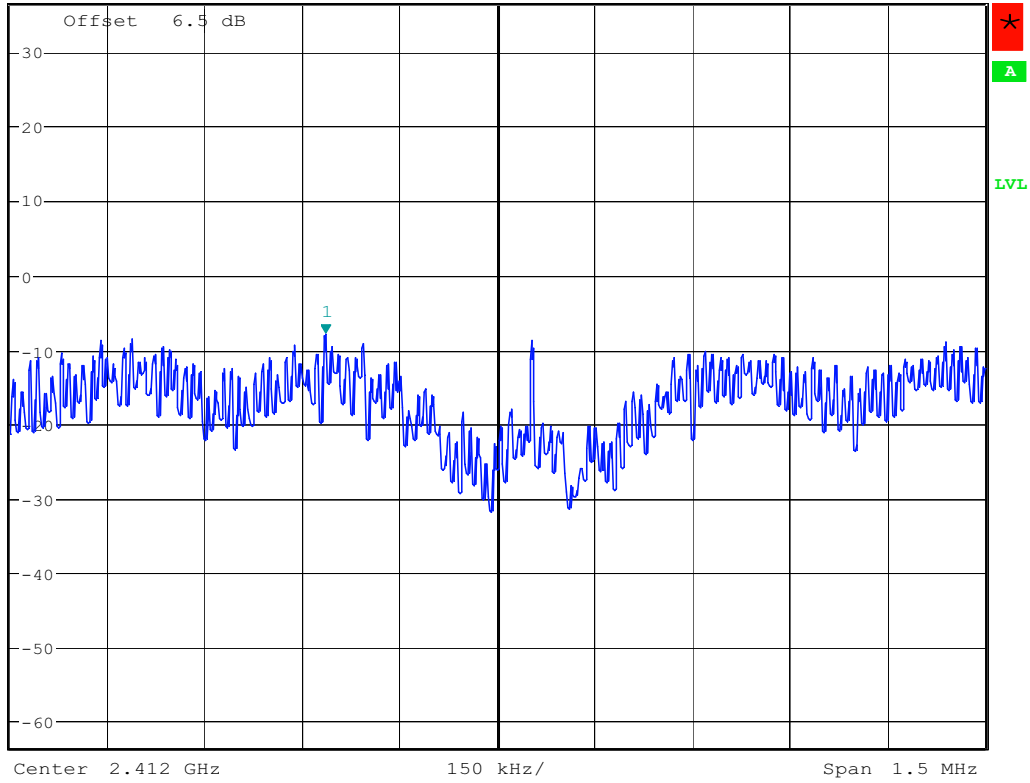

11G POWER DENSITY CH 1

Date: 26.APR.2006 14:24:07




*RBW 3 kHz
*VBW 100 kHz
*SWT 500 s

Marker 1 [T1]
-9.30 dBm
2.436735577 GHz

Ref 36.5 dBm

*Att 30 dB

1 PK
MAXH

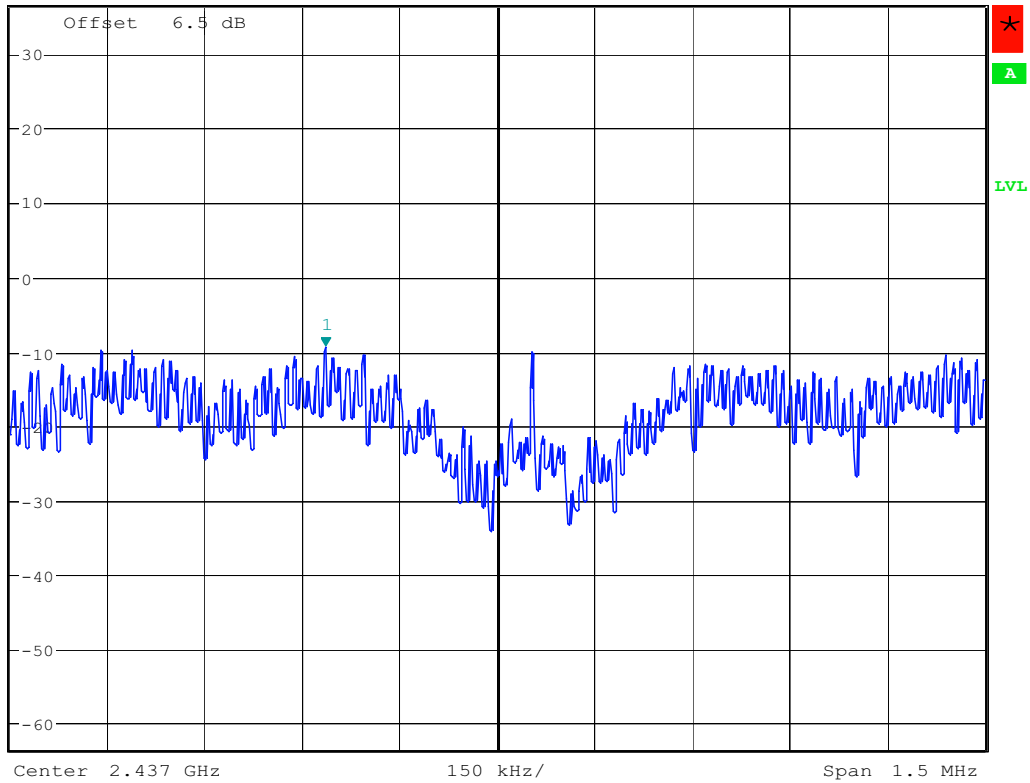

11G POWER DENSITY CH 6

Date: 26.APR.2006 14:23:03




*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -10.73 dBm
*SWT 500 s 2.461735577 GHz

Ref 36.5 dBm

*Att 30 dB

1 PK
MAXH

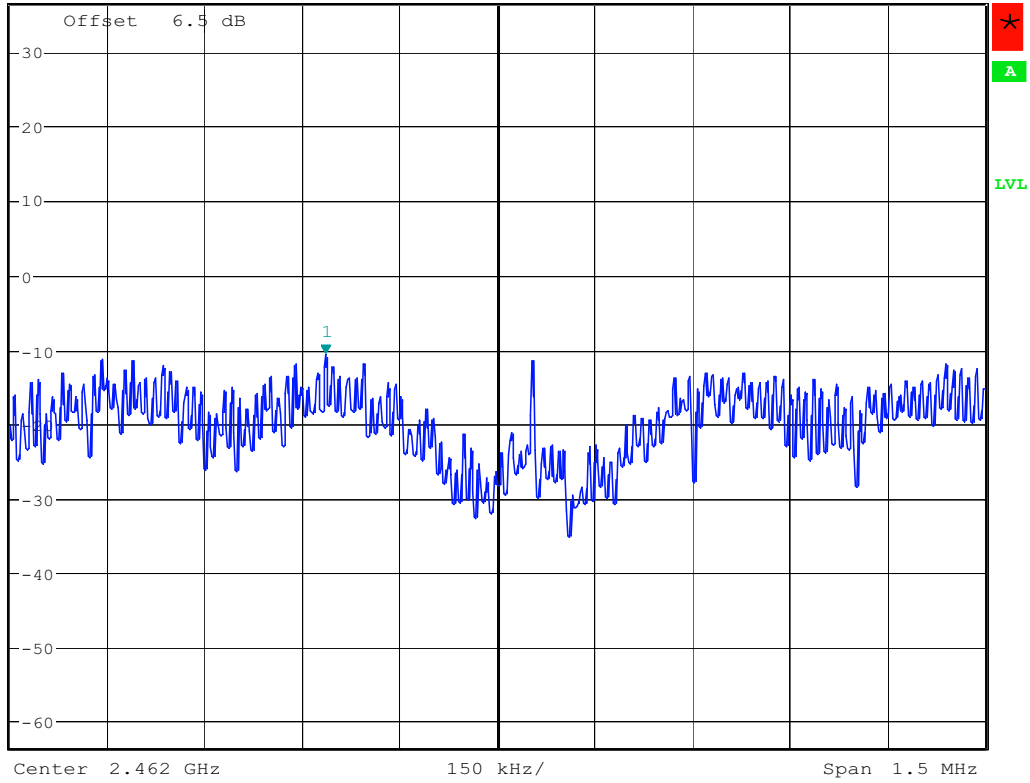

11G POWER DENSITY CH 11

Date: 26.APR.2006 14:21:50



Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix F


Radiated Emissions from Receiver Section of Transceiver

The measurement diagram are wideband pre-scan results; only for reference.

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 148.216MHz Emax: 39.14dBµV/m RBW: 100 kHz

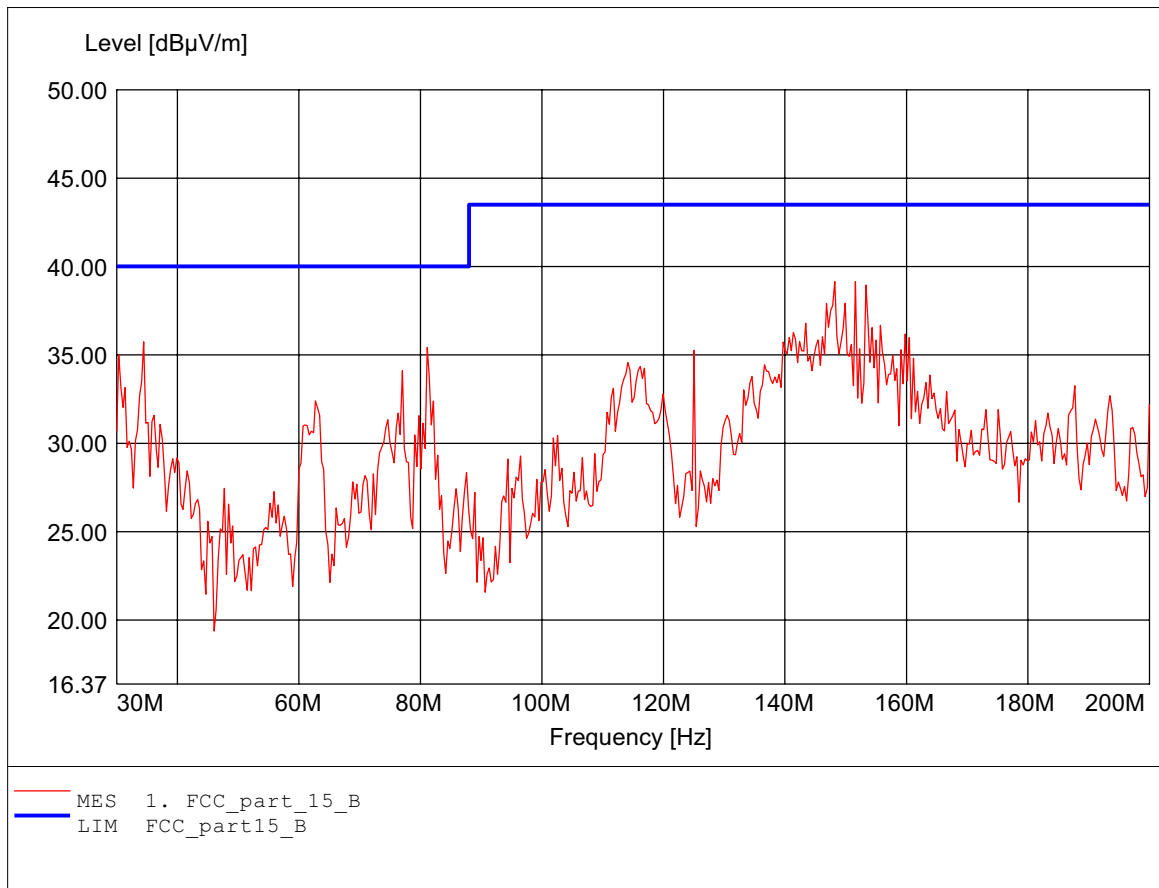

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 30.000MHz Emax: 34.83dBμV/m RBW: 100 kHz

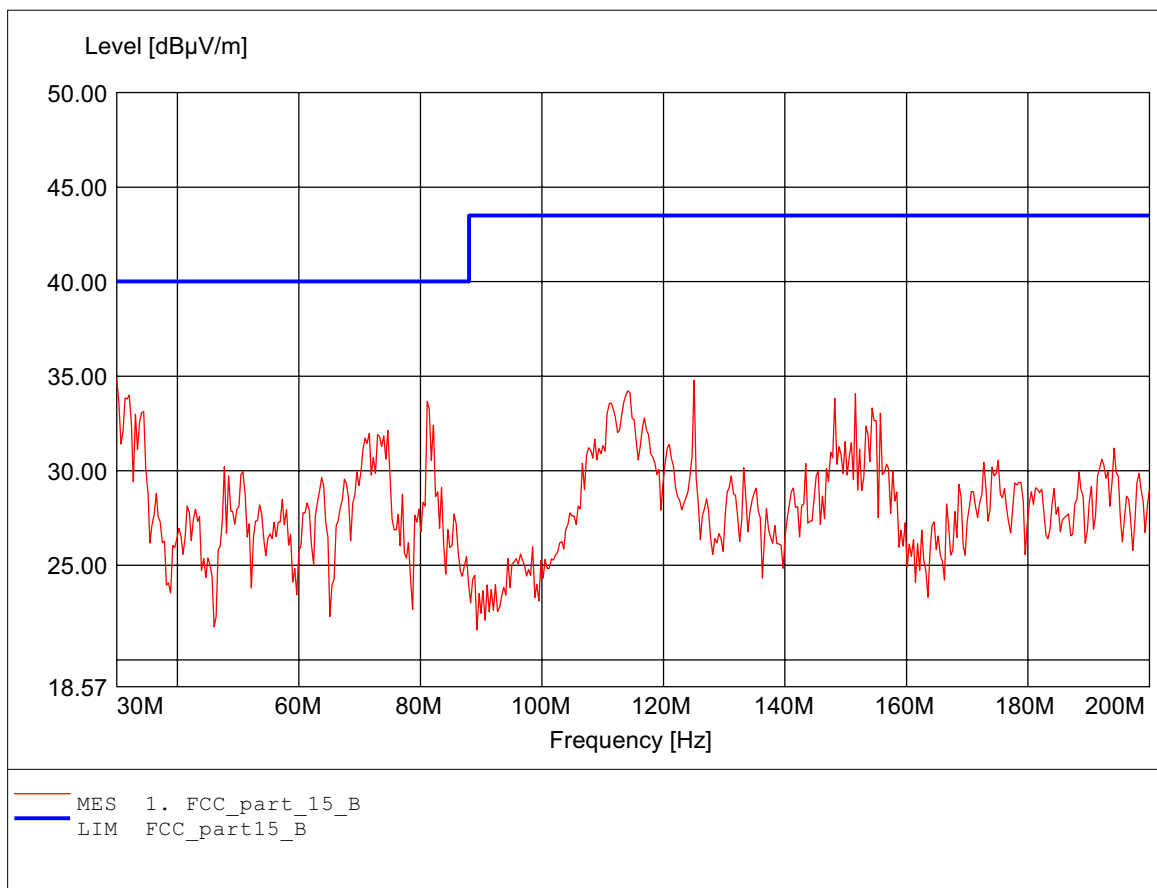

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:249.699MHz Emax:44.17dBμV/m RBW: 100 kHz

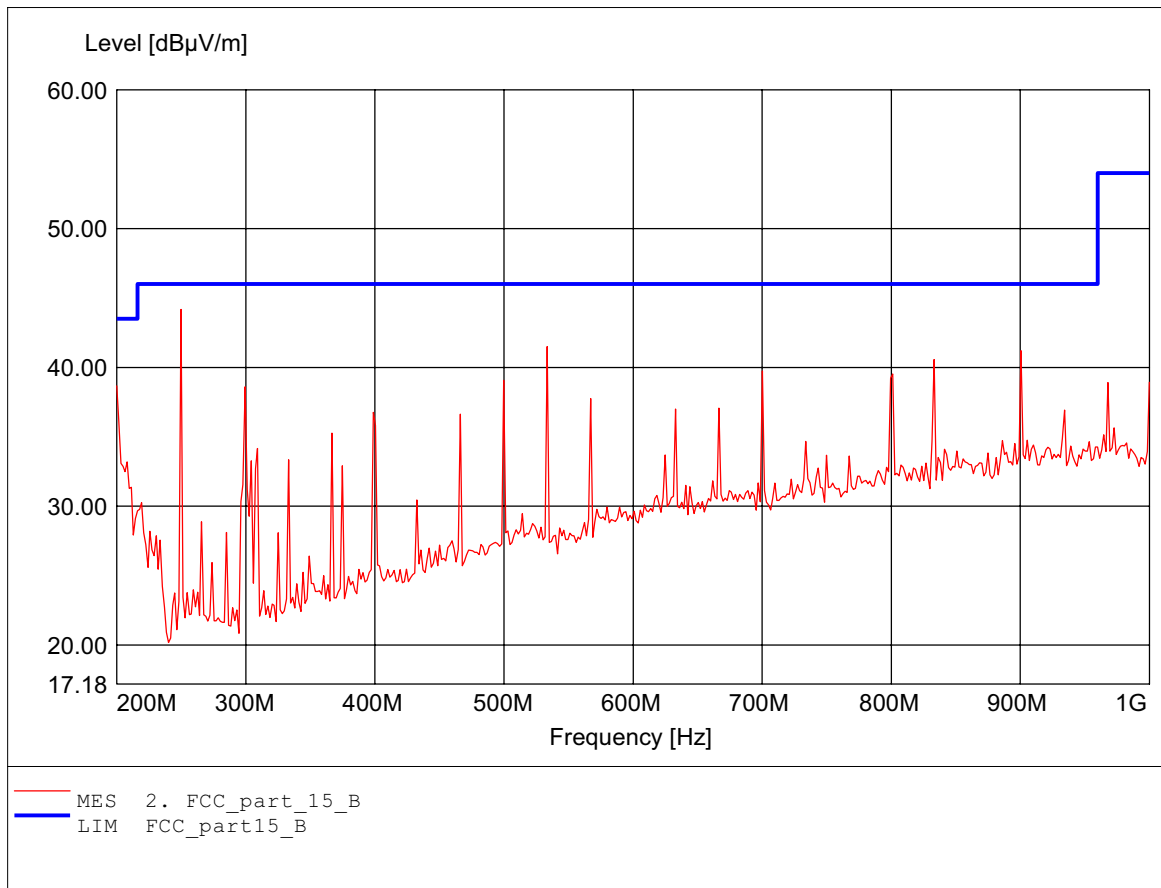

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:249.699MHz Emax:46.04dBμV/m RBW: 100 kHz

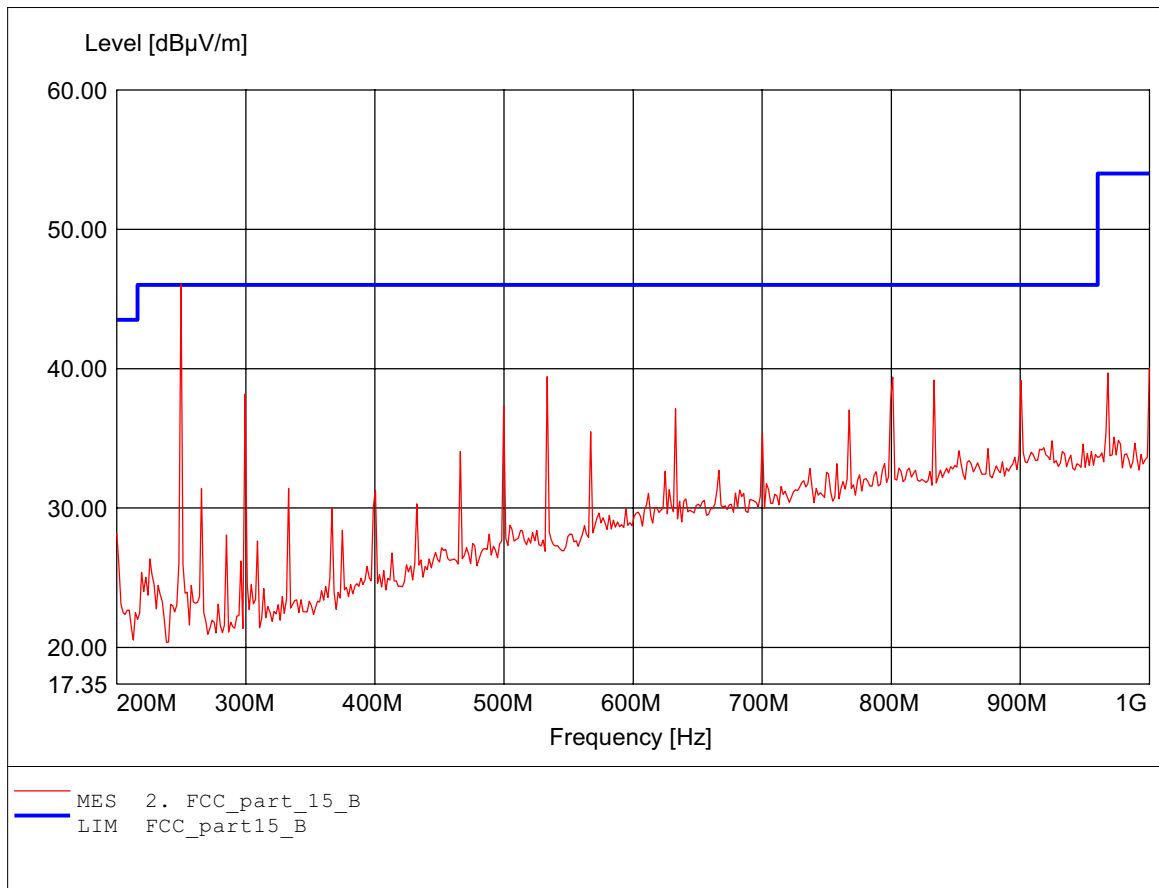

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq: 3.285GHz Emax: 38.78dBμV/m RBW: 1 MHz

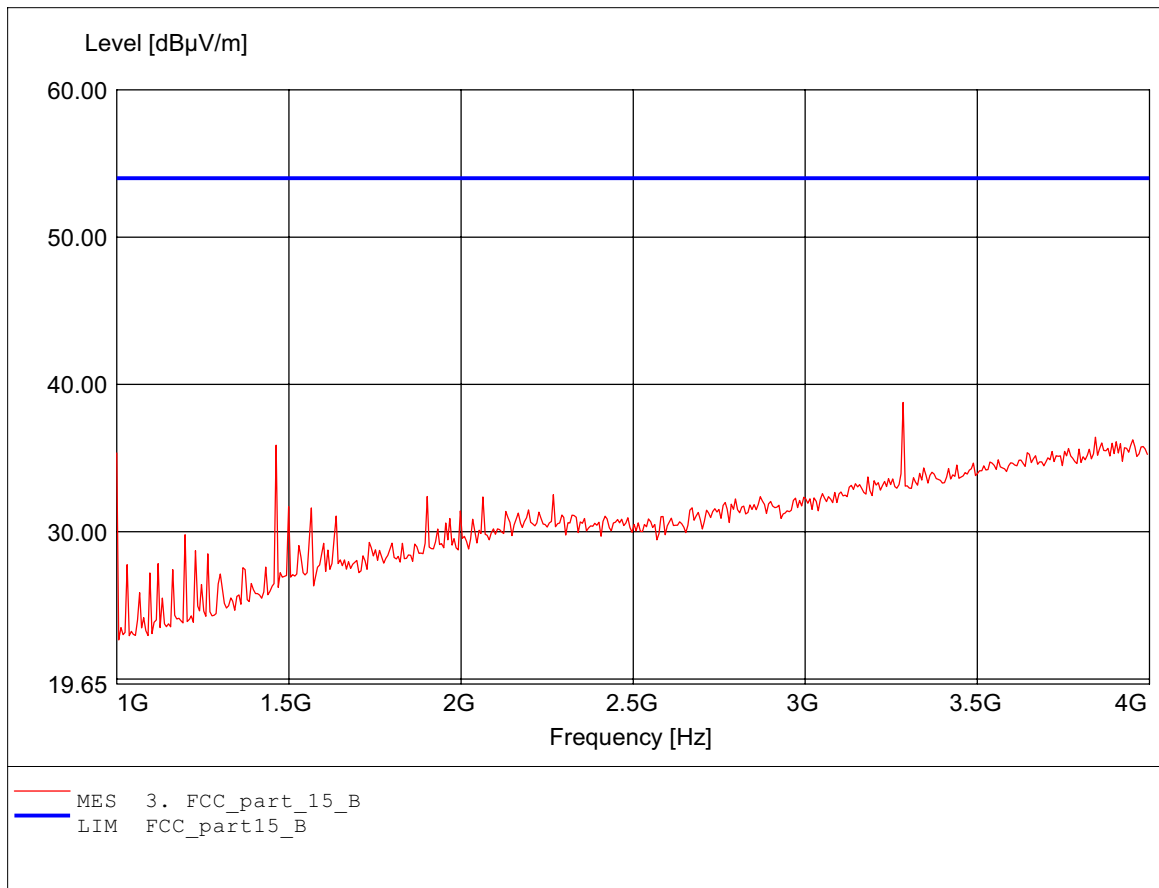

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:3.285GHz Emax:38.08dBμV/m RBW: 1 MHz

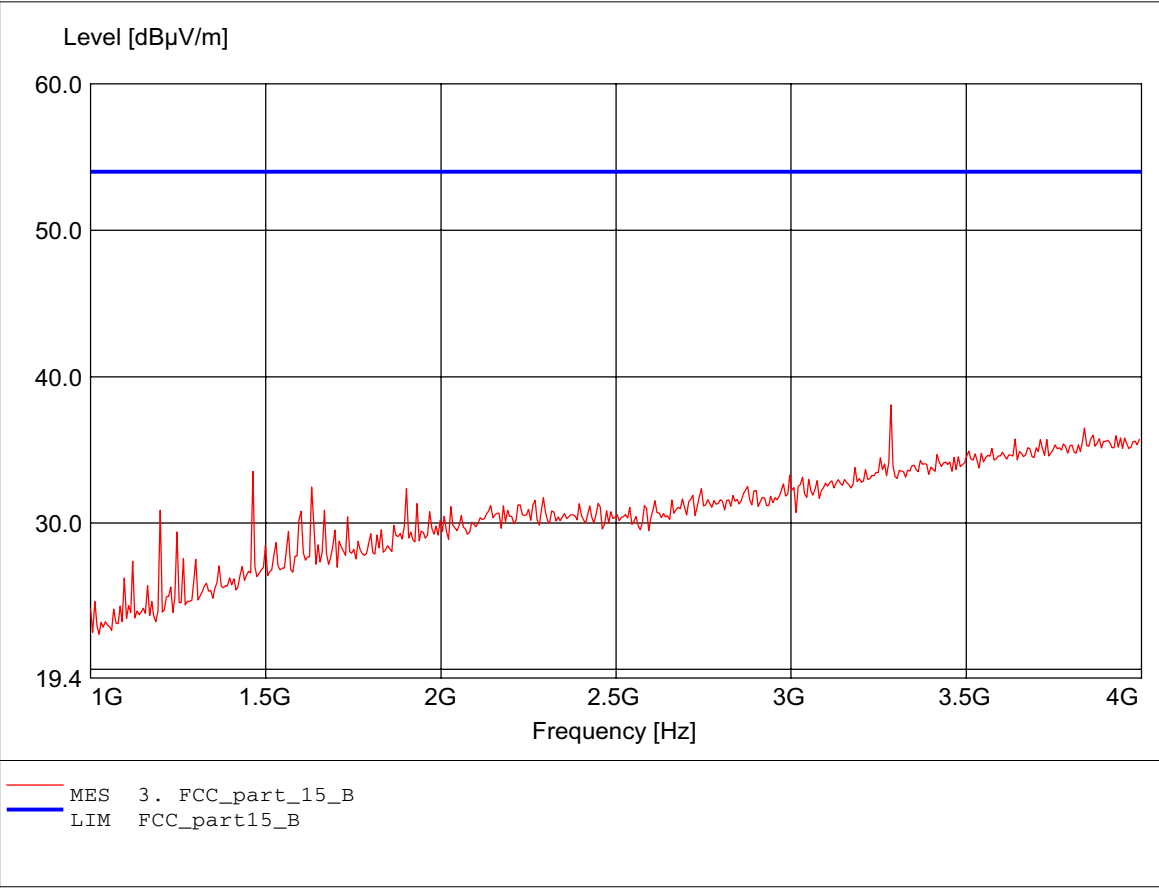

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.615GHz Emax:46.25dBμV/m RBW: 1 MHz

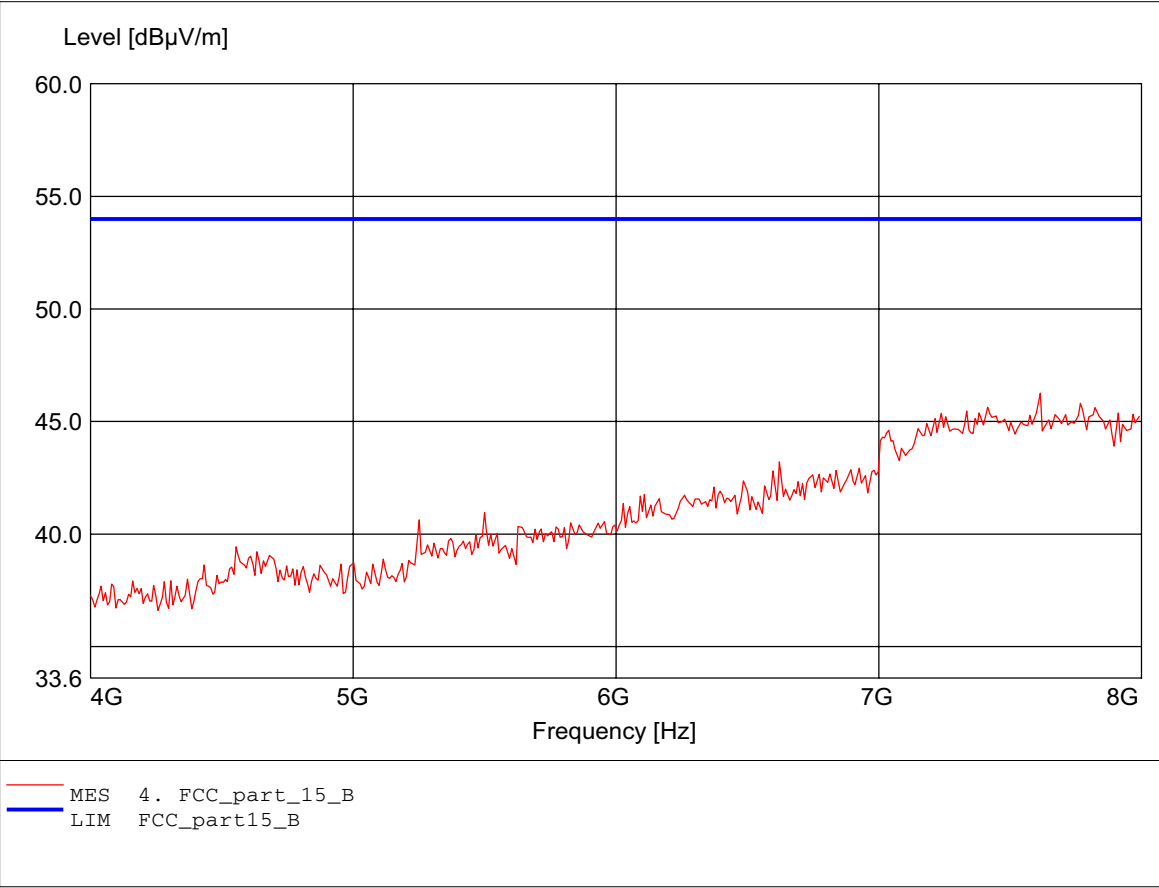

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.375GHz Emax:45.56dBμV/m RBW: 1 MHz

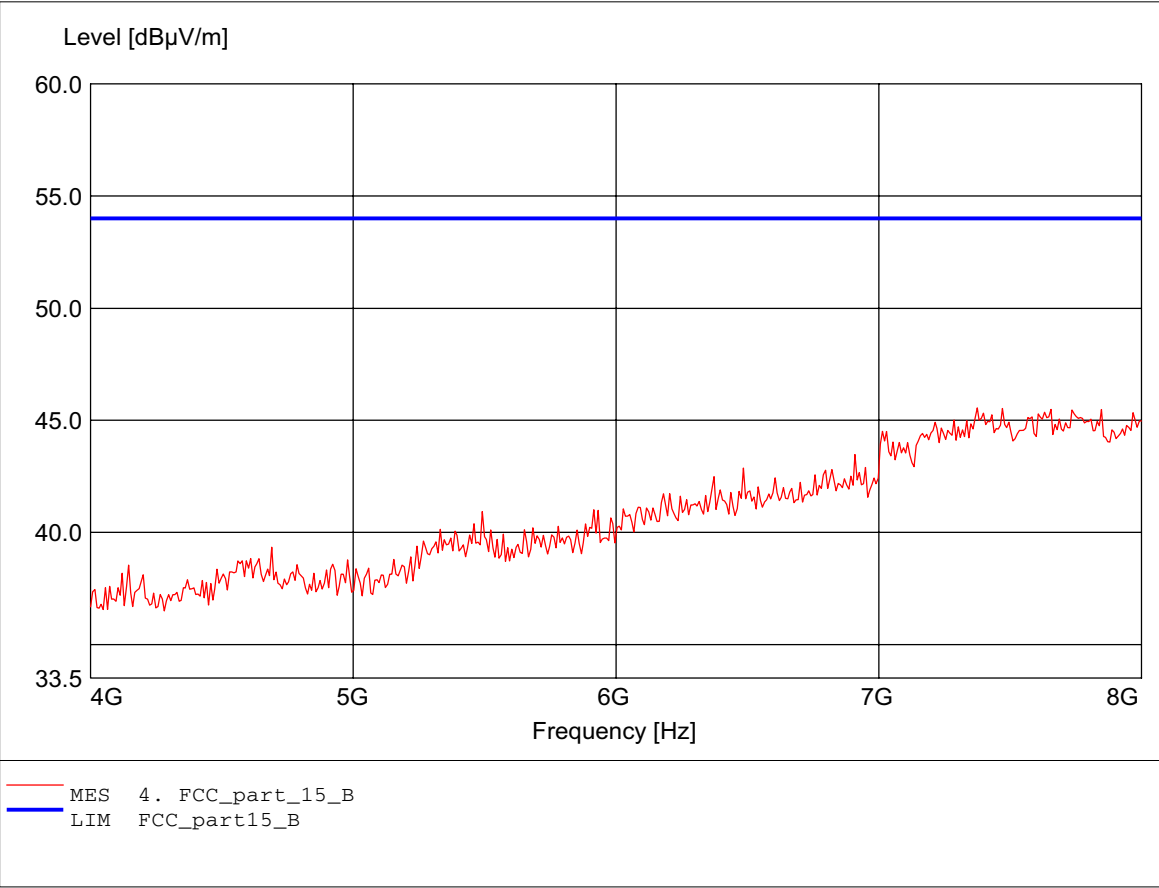

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.671GHz Emax:51.13dBμV/m RBW: 1 MHz

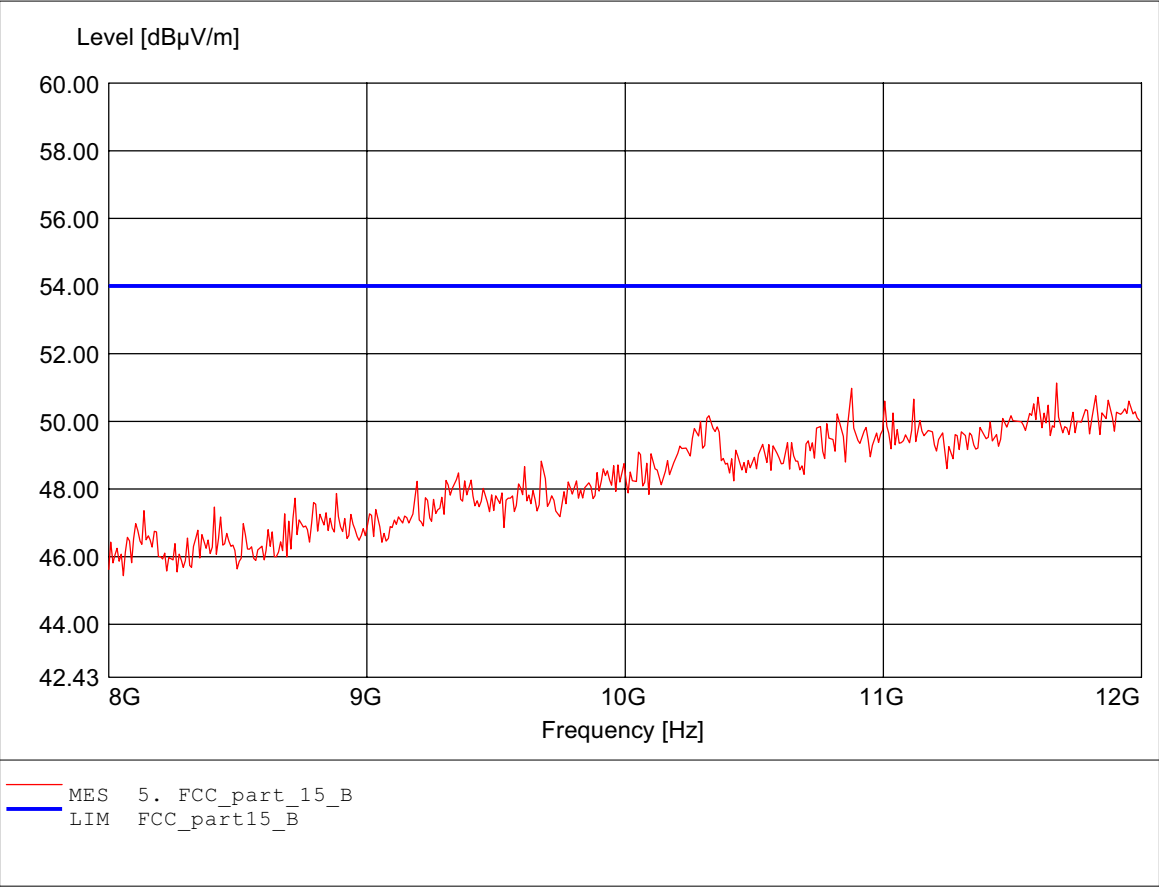

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.046GHz Emax:50.94dBμV/m RBW: 1 MHz

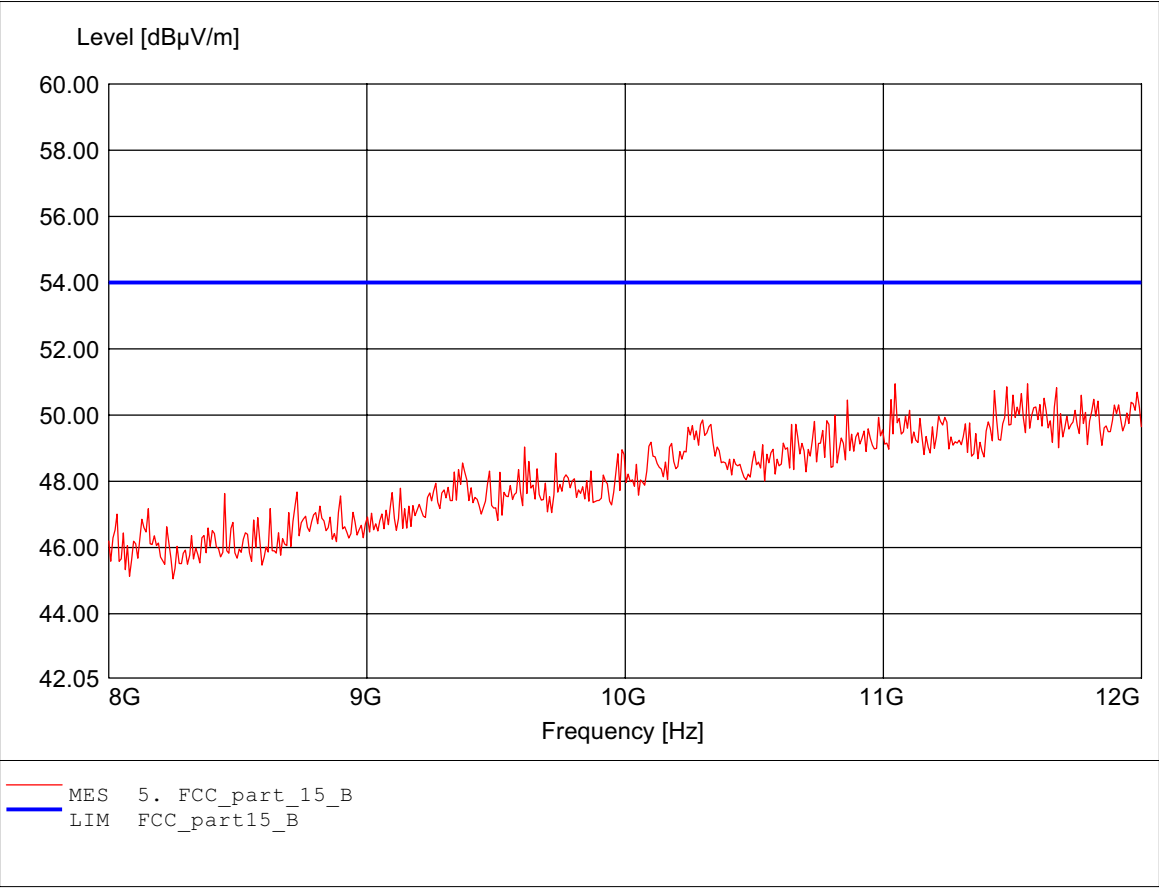

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.760GHz Emax:52.41dBμV/m RBW: 1 MHz

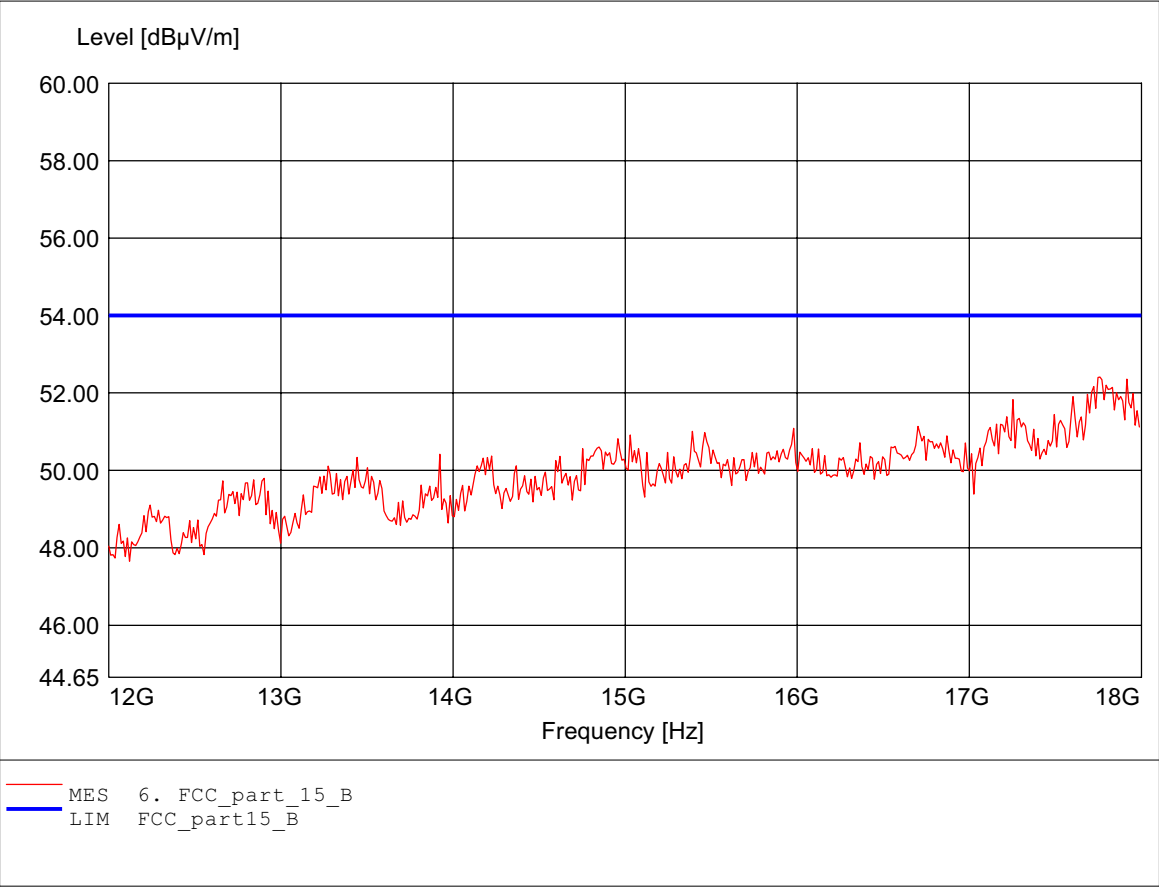

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 low channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq: 17.796GHz Emax: 52.04dBμV/m RBW: 1 MHz

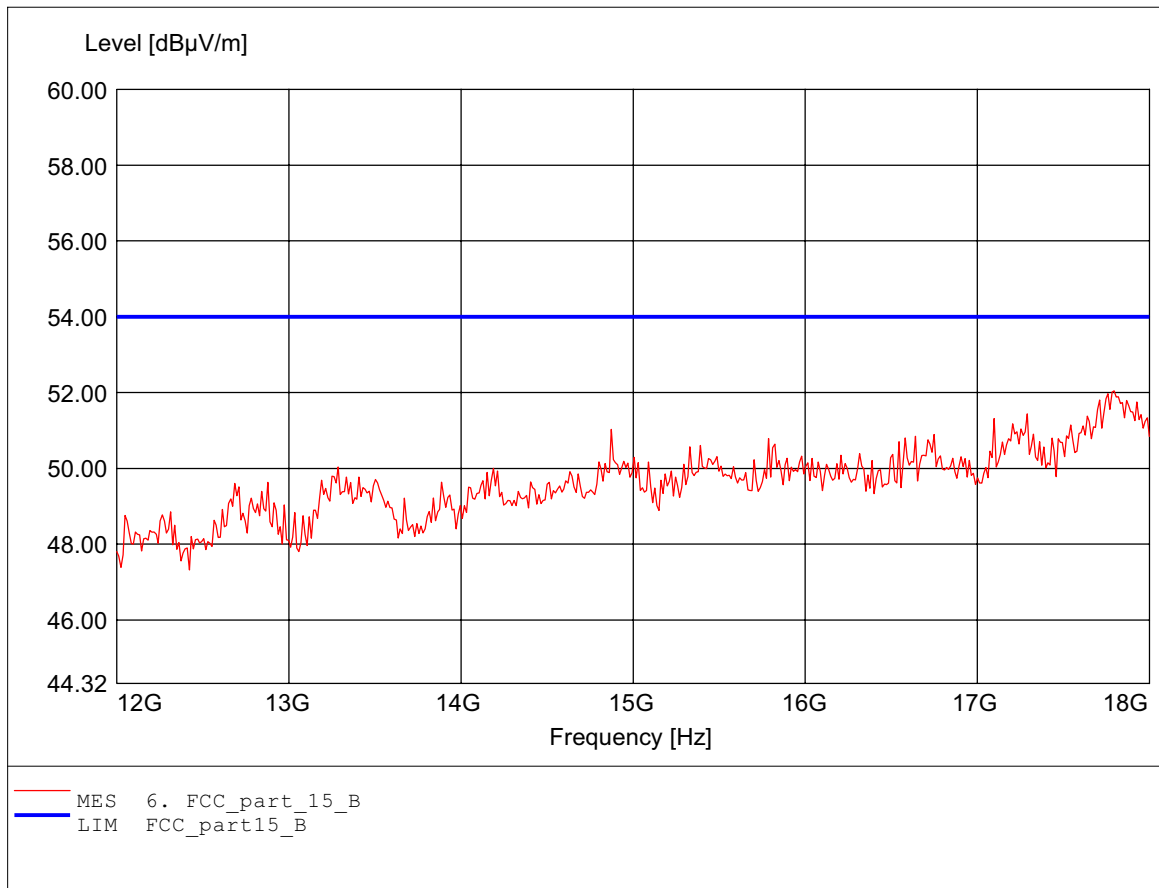

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 154.349MHz Emax: 41.68dBµV/m RBW: 100 kHz

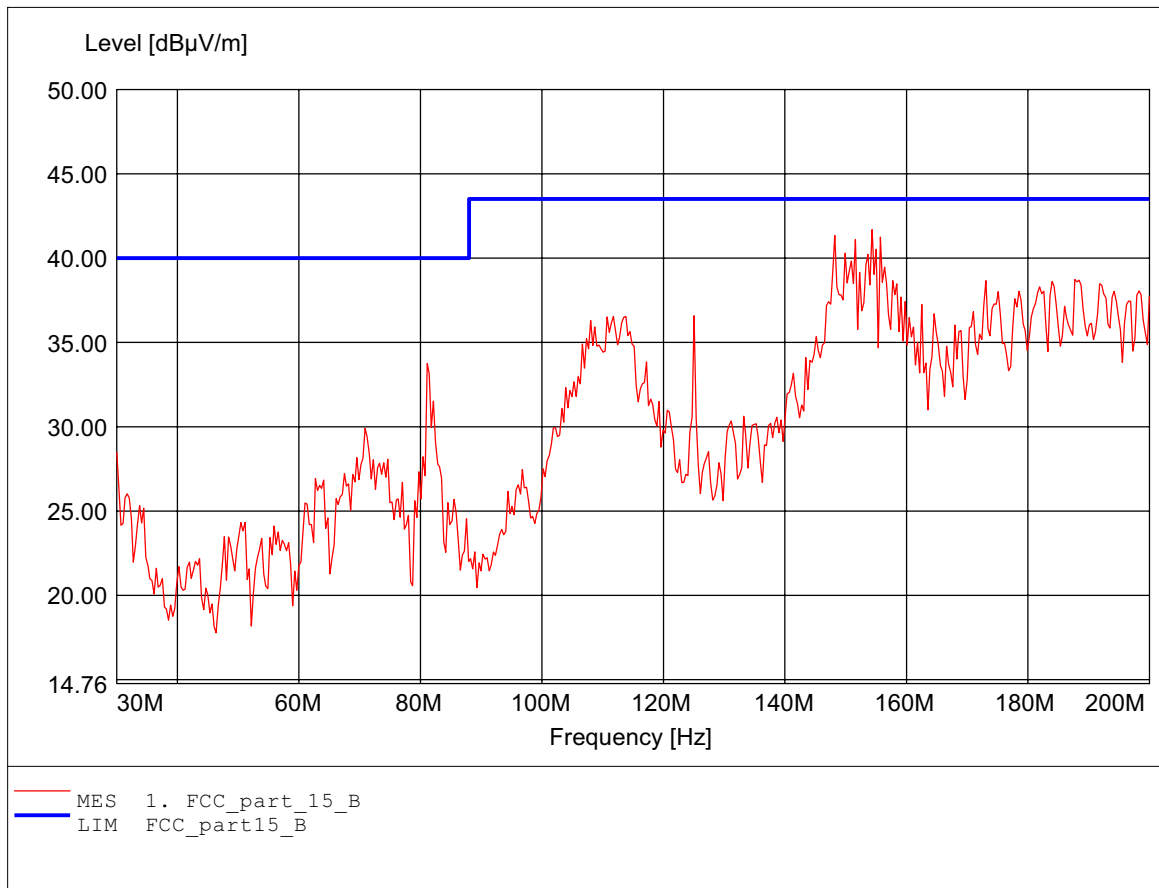

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 30.000MHz Emax: 35.23dBμV/m RBW: 100 kHz

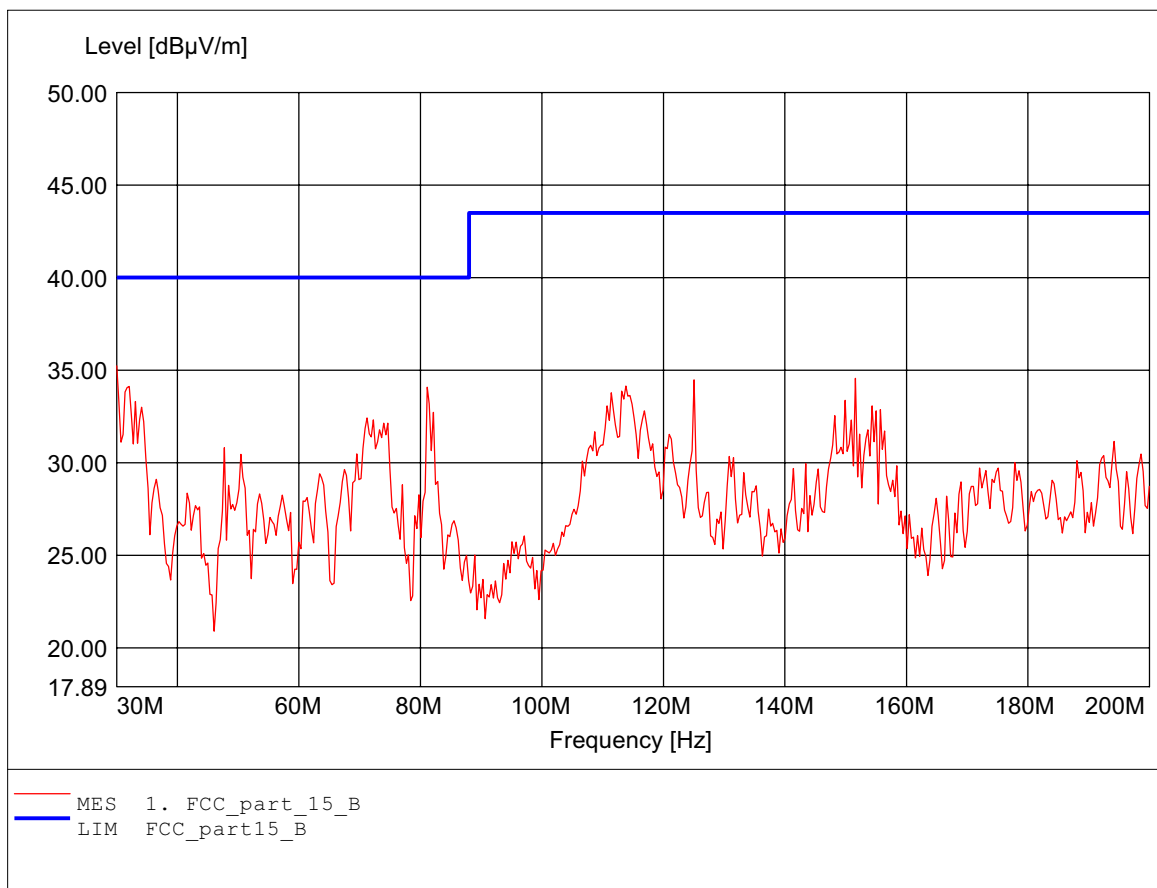

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:249.699MHz Emax:43.84dBμV/m RBW: 100 kHz

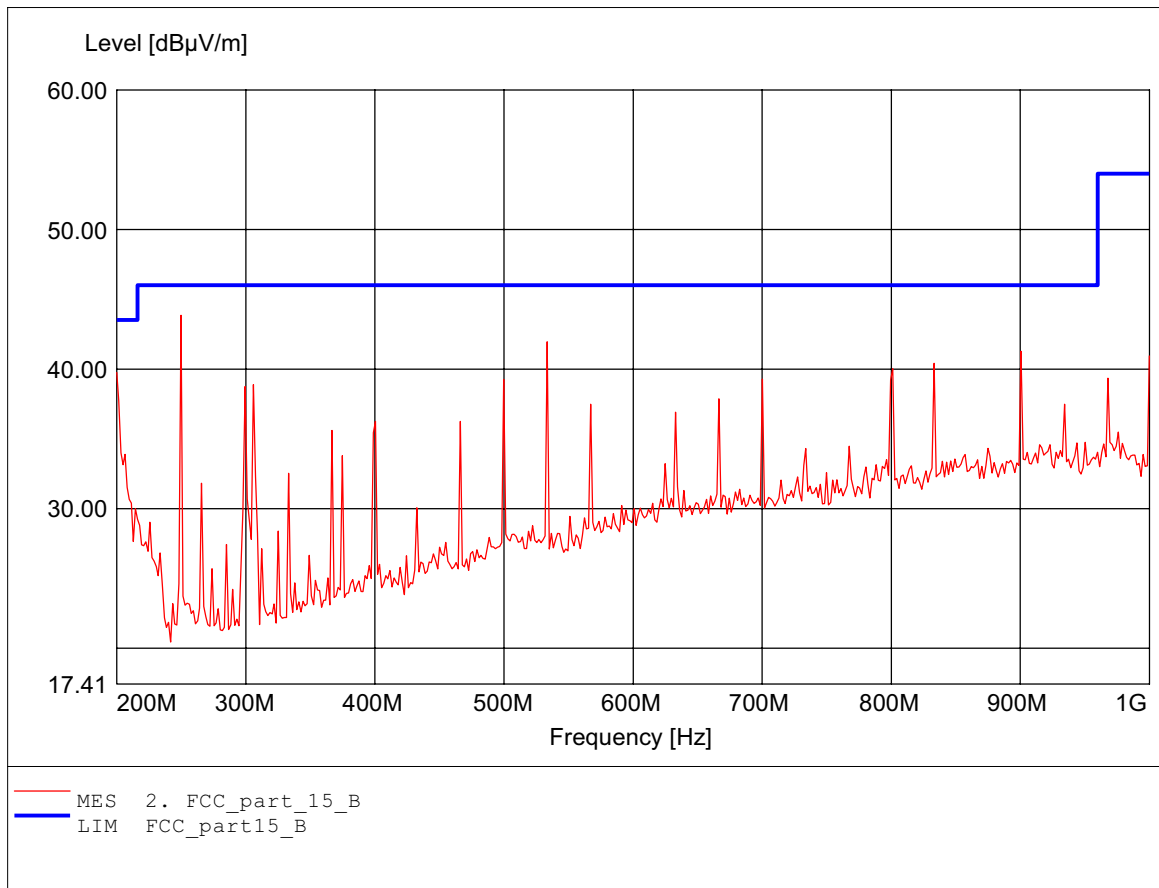

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:249.699MHz Emax:46.18dBμV/m RBW: 100 kHz

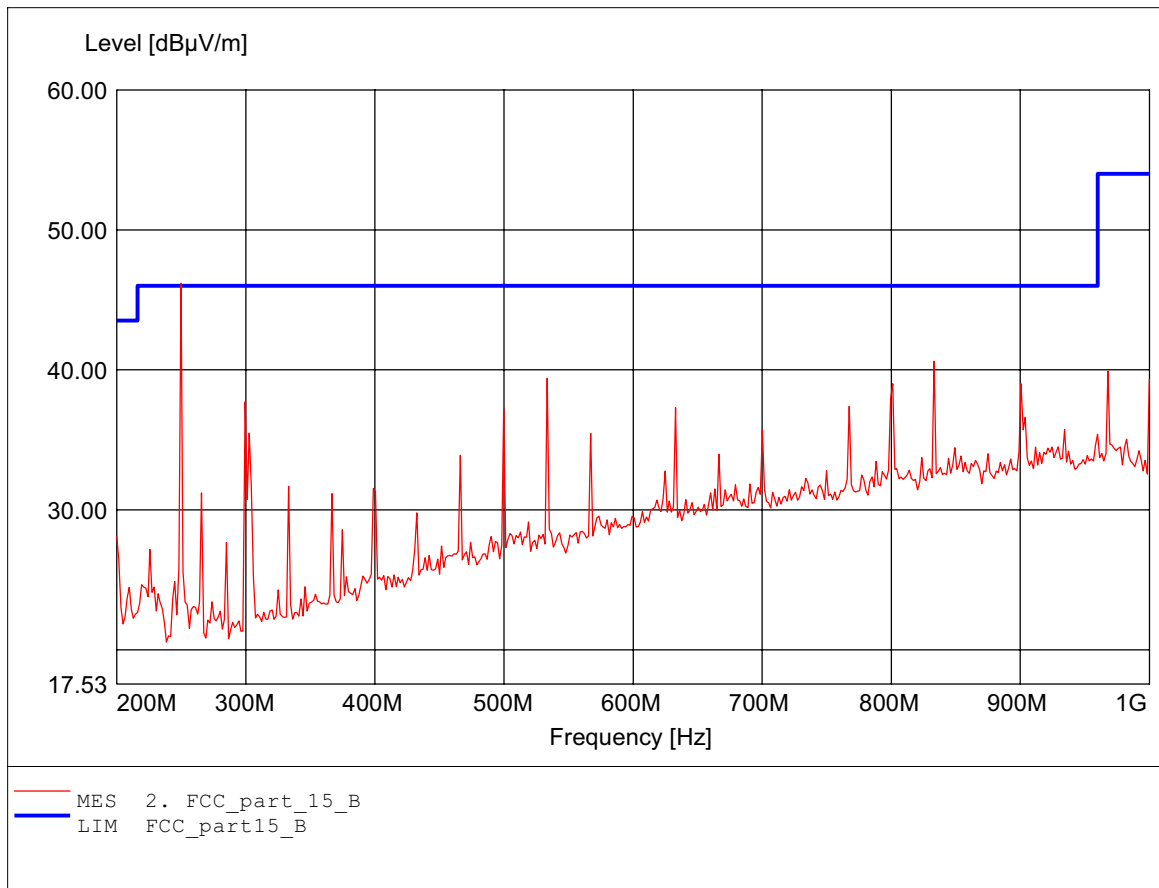

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:3.285GHz Emax:38.01dBμV/m RBW: 1 MHz

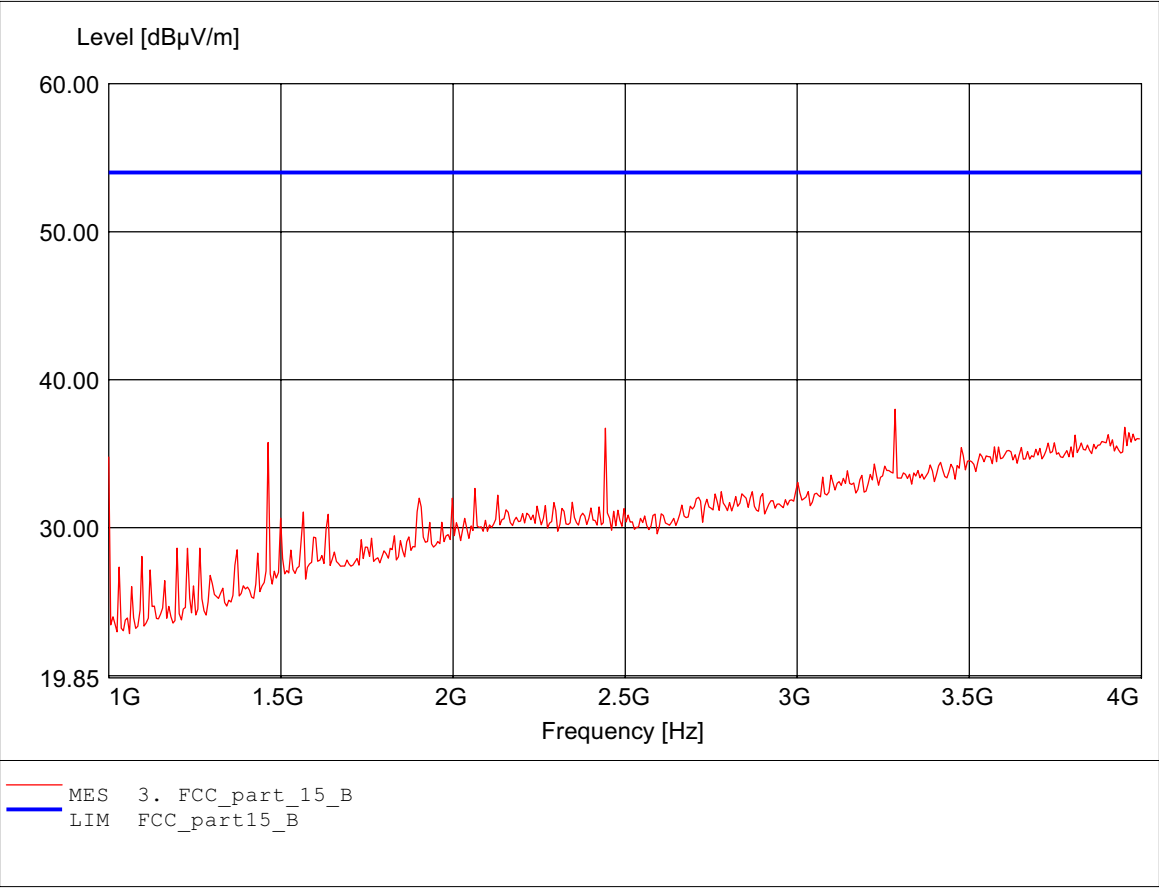

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq: 3.285GHz Emax: 40.25dBμV/m RBW: 1 MHz

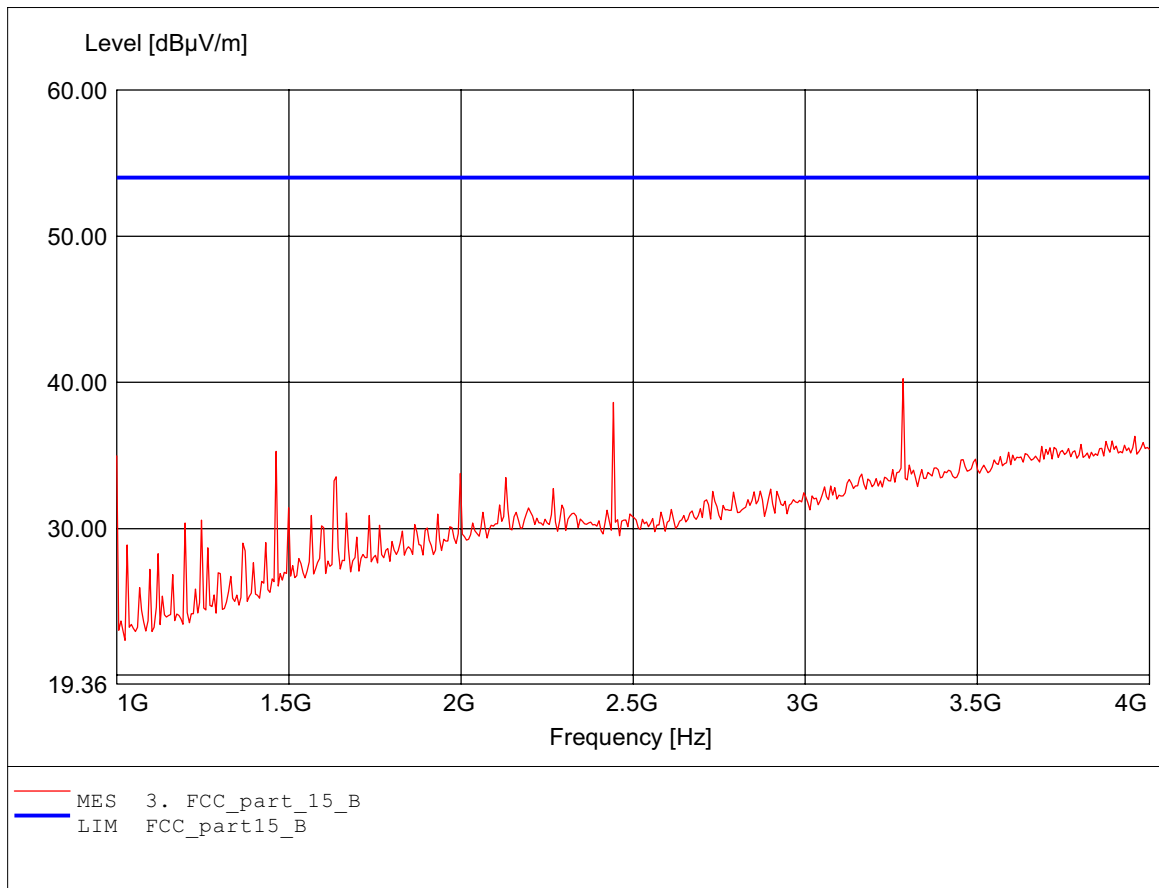

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.776GHz Emax:45.94dBμV/m RBW: 1 MHz

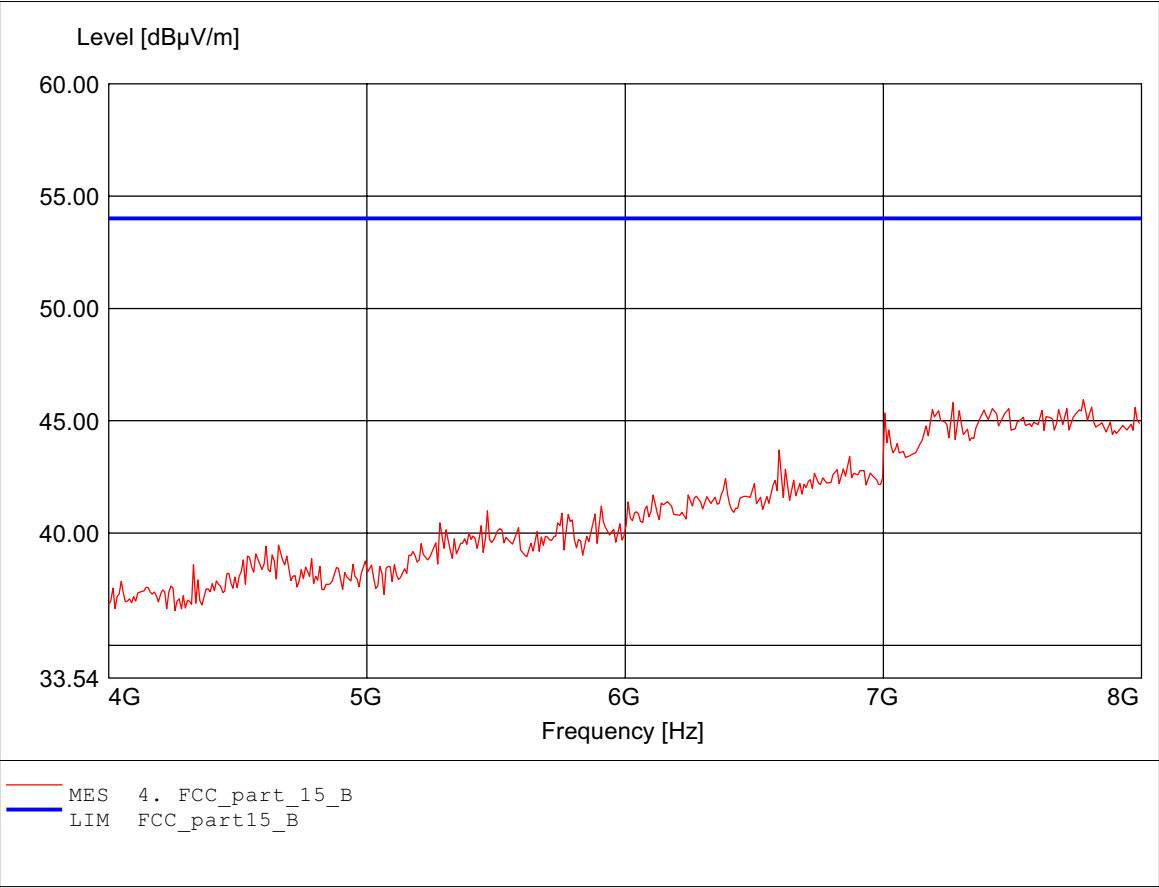

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.599GHz Emax:45.82dBμV/m RBW: 1 MHz

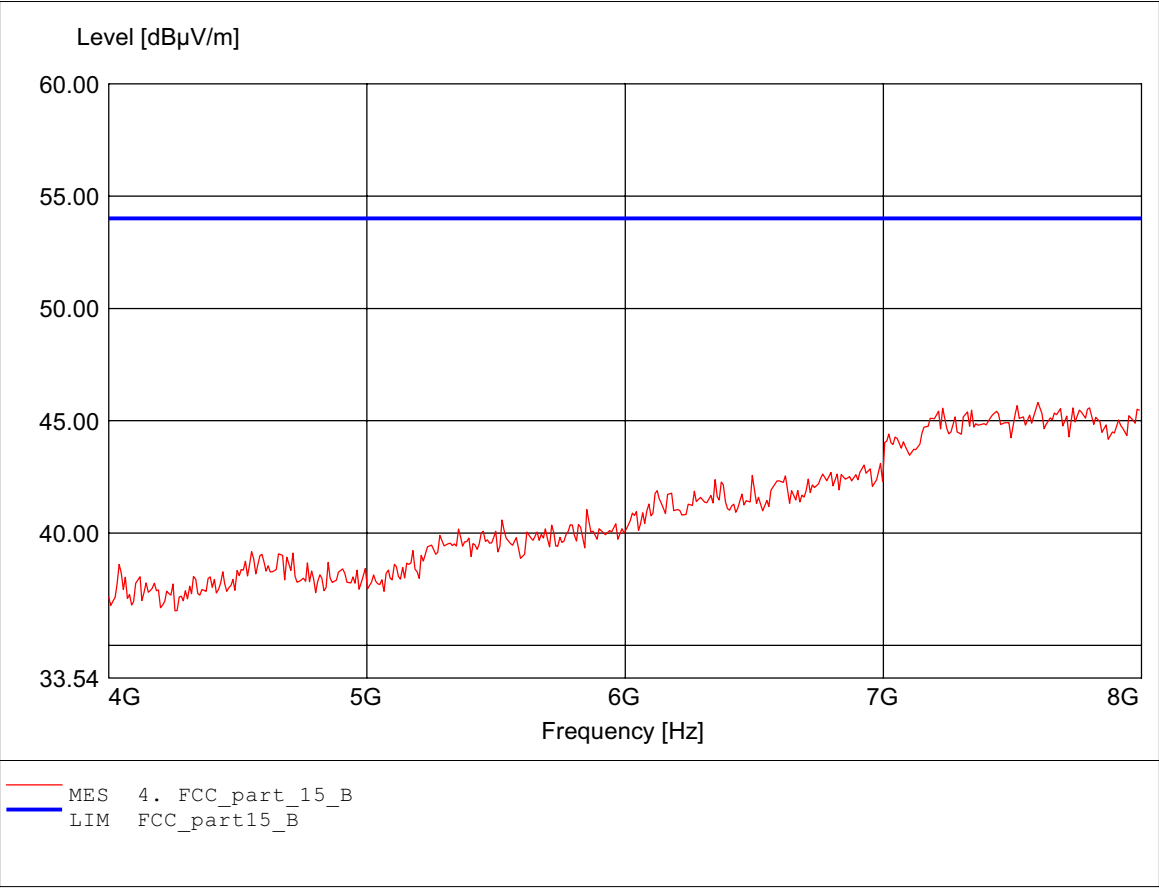

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.944GHz Emax:50.92dBμV/m RBW: 1 MHz

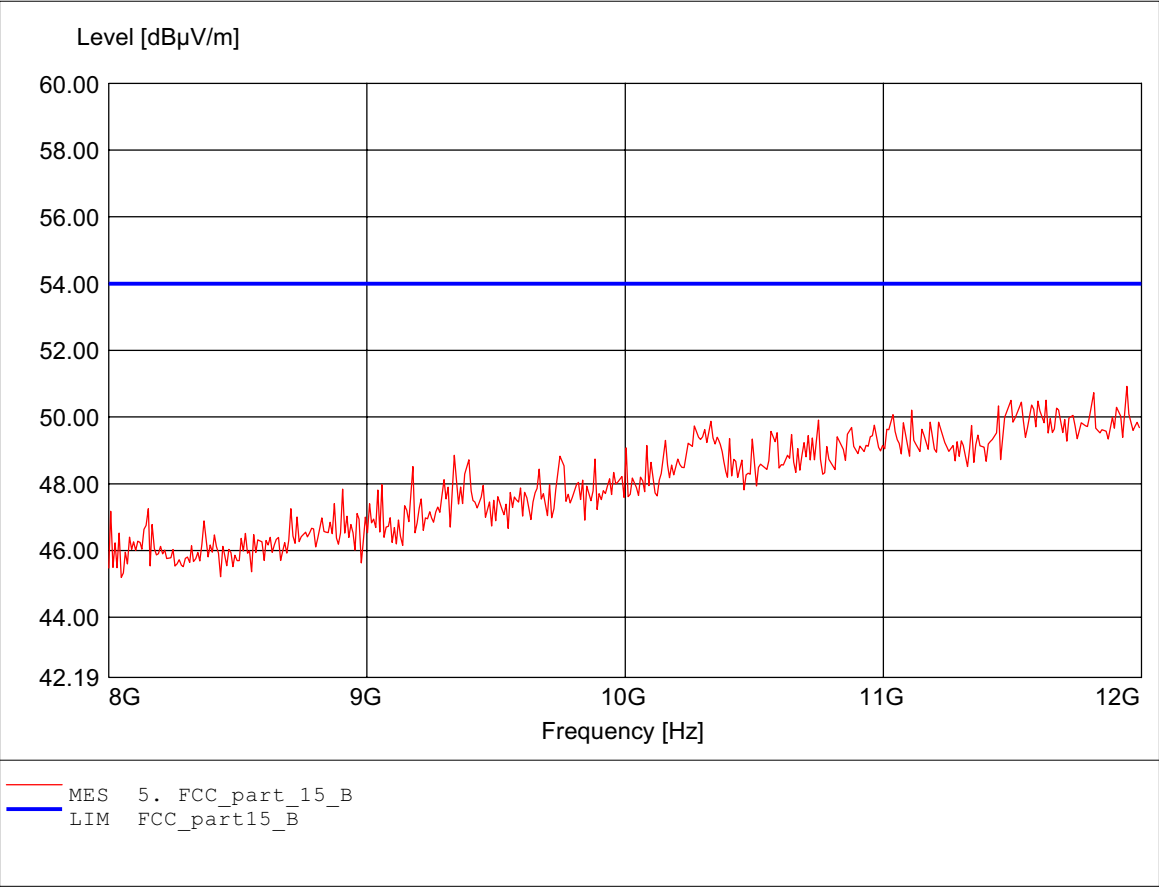

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.808GHz Emax:50.68dBμV/m RBW: 1 MHz

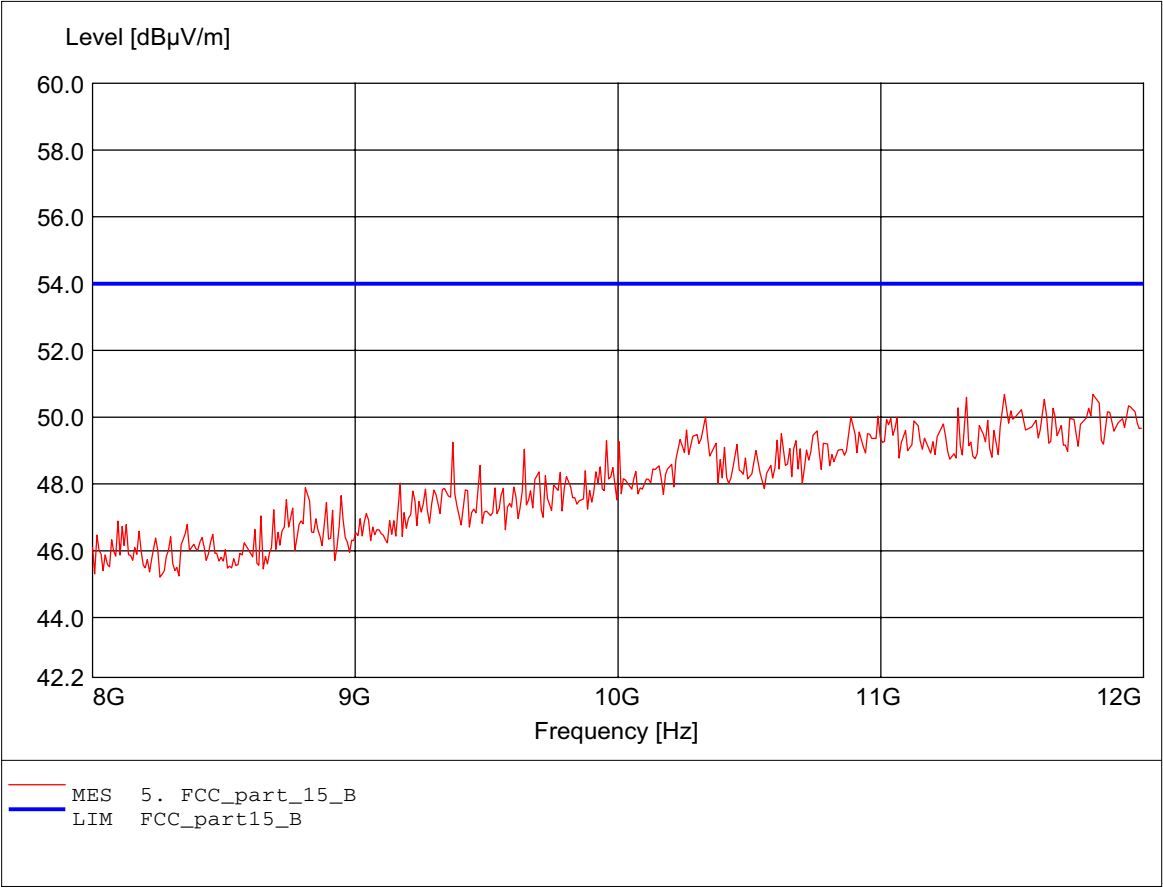

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.880GHz Emax:52.37dBμV/m RBW: 1 MHz

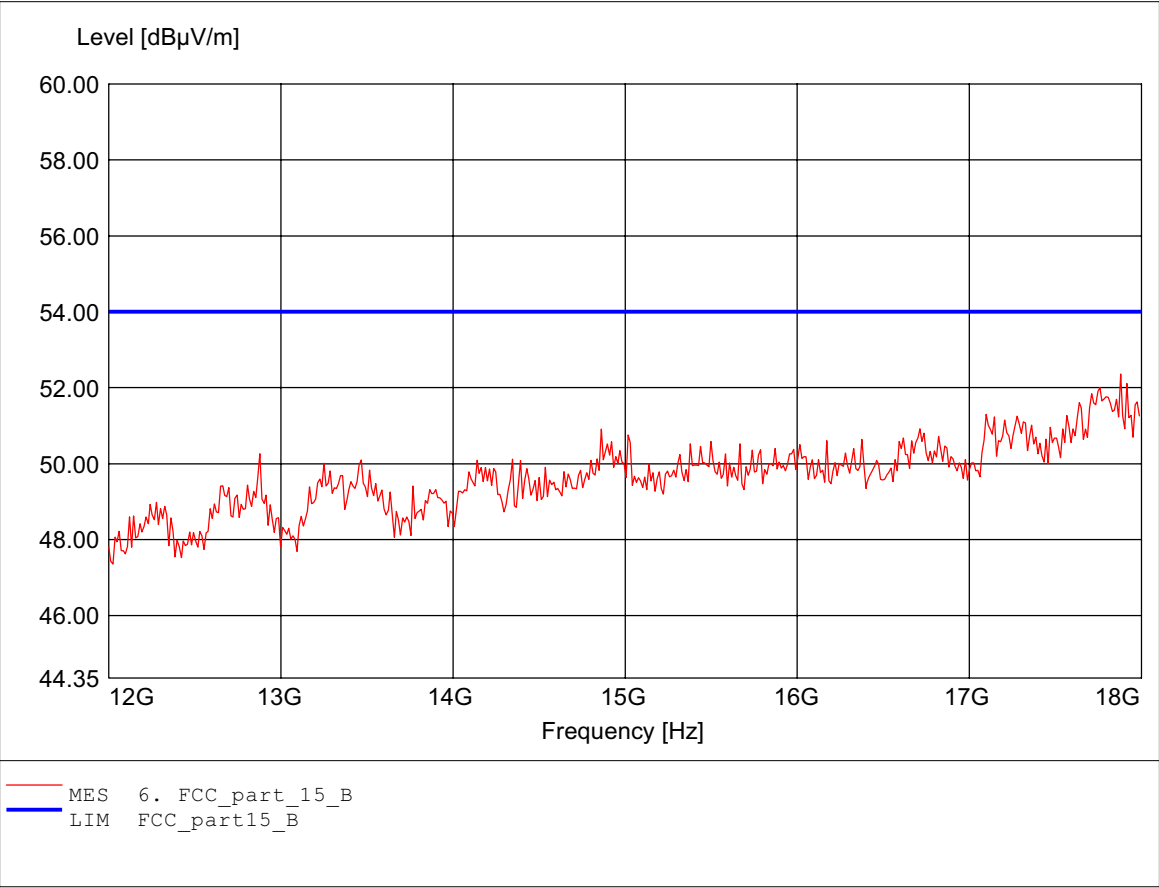

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 middle channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.820GHz Emax:52.55dBμV/m RBW: 1 MHz

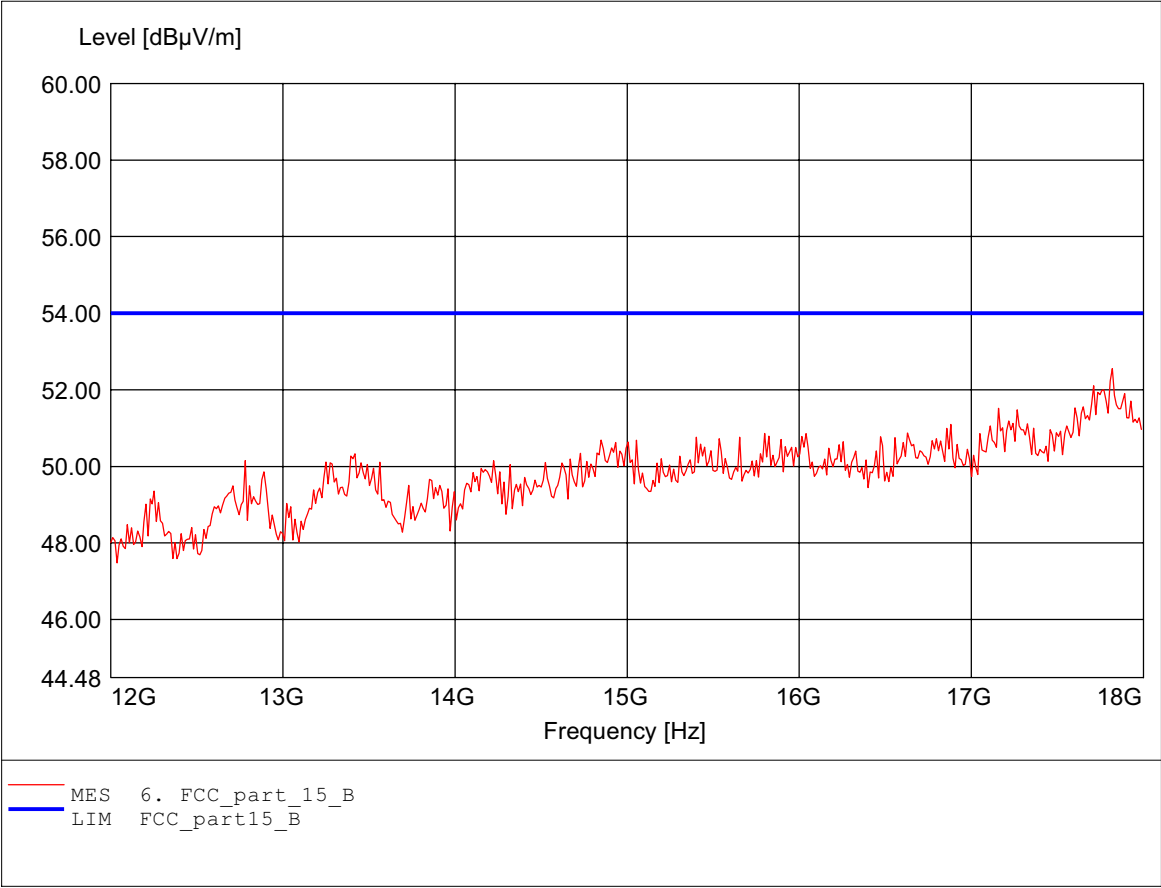

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 151.623MHz Emax: 42.32dBµV/m RBW: 100 kHz

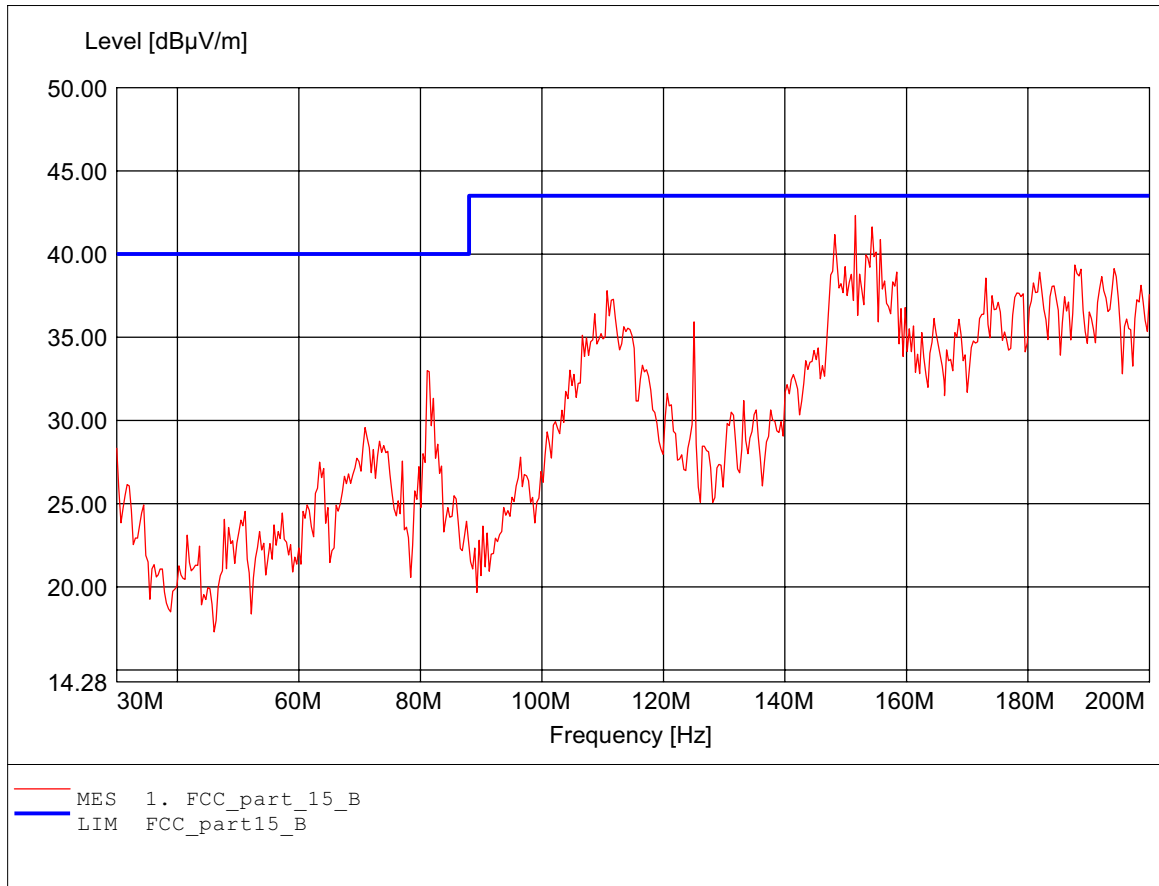

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 30.000MHz Emax: 34.95dBµV/m RBW: 100 kHz

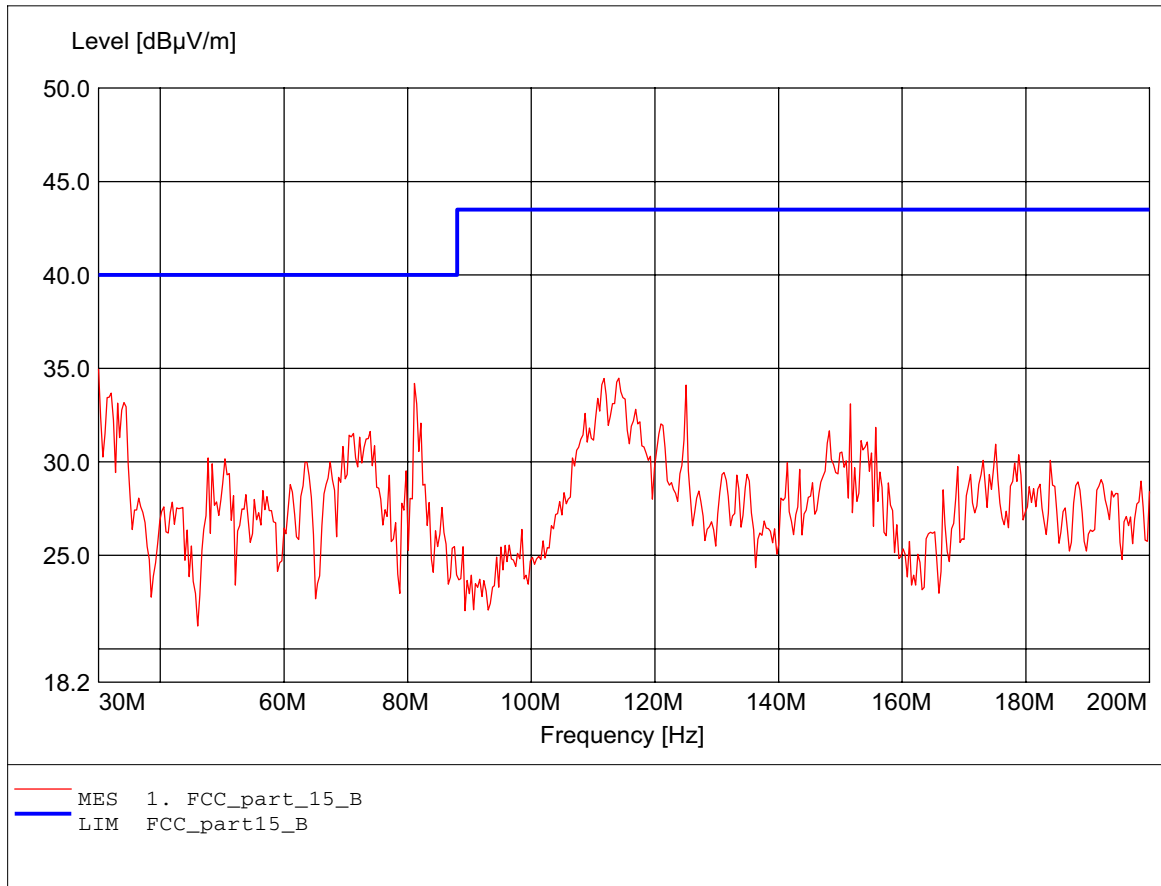

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq: 249.699MHz Emax: 44.32dBμV/m RBW: 100 kHz

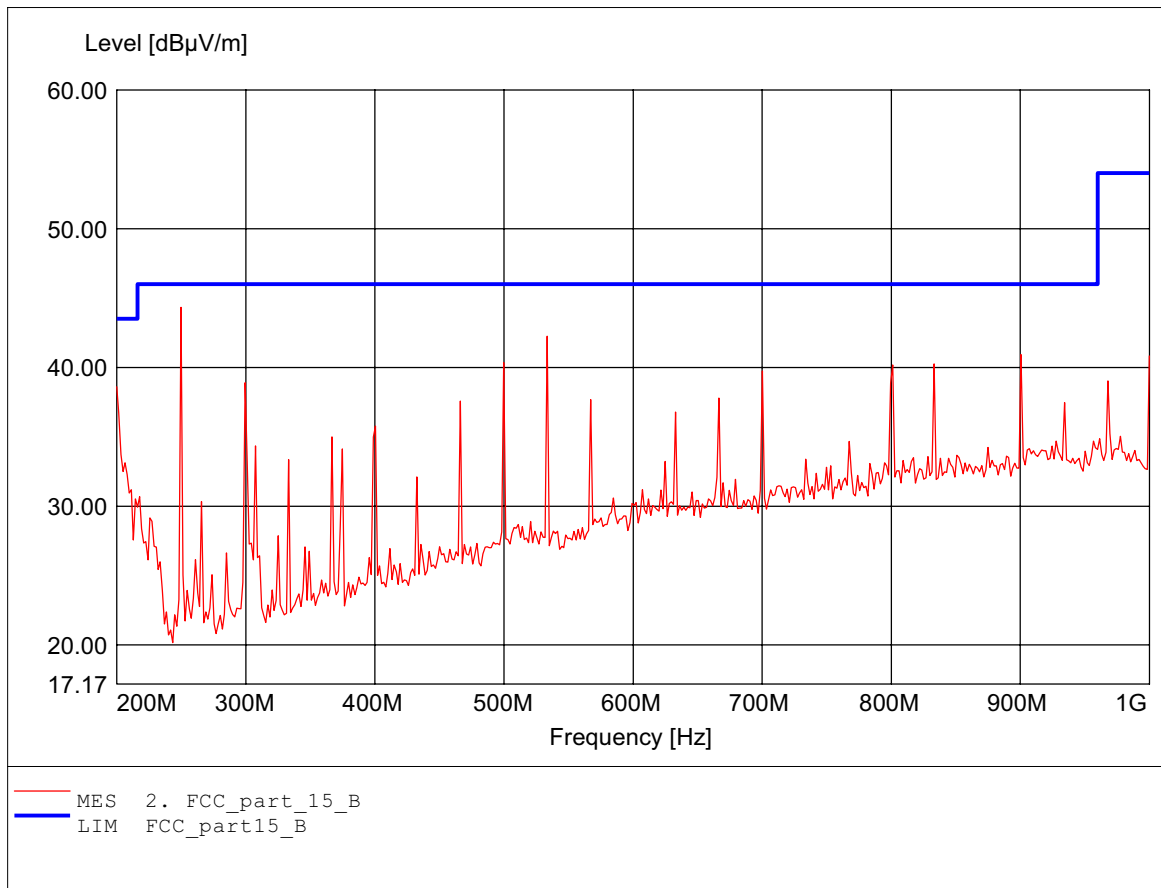

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:249.699MHz Emax:46.37dBμV/m RBW: 100 kHz

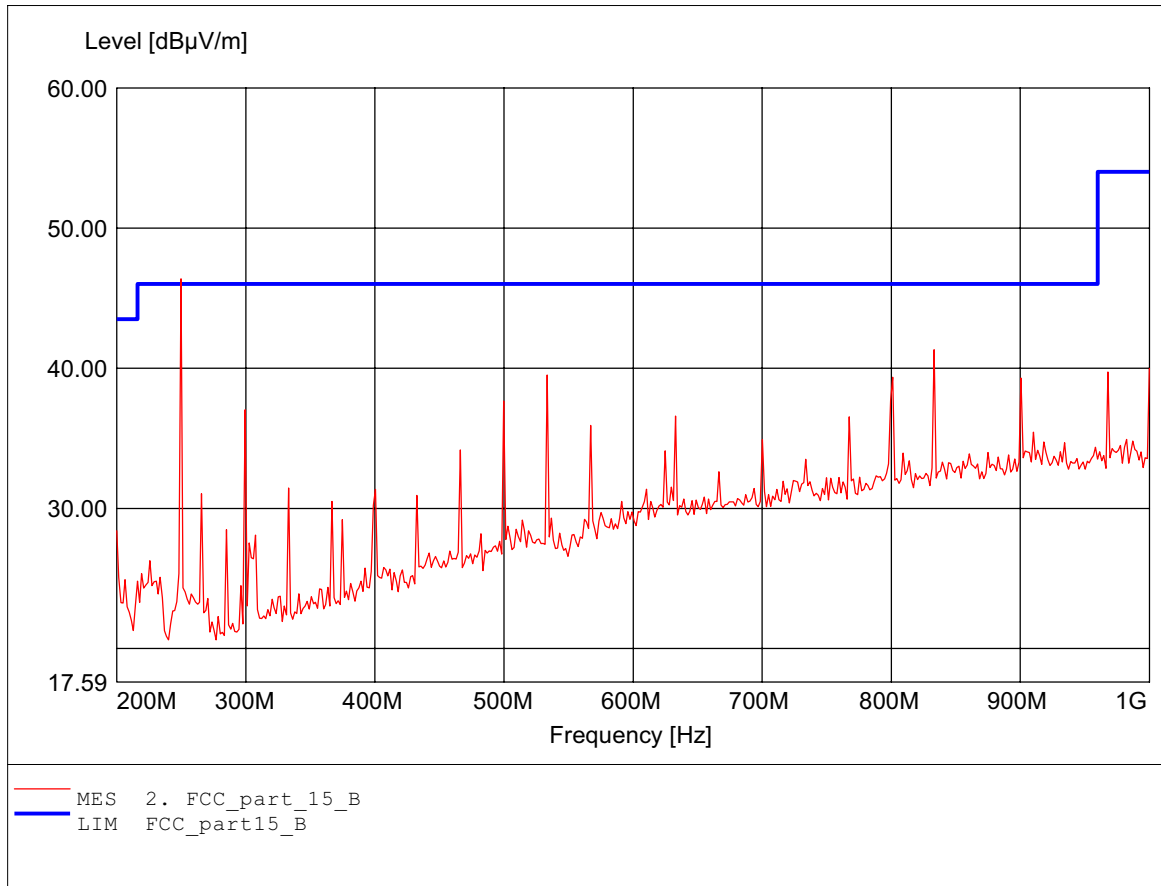

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:3.285GHz Emax:39.21dBμV/m RBW: 1 MHz

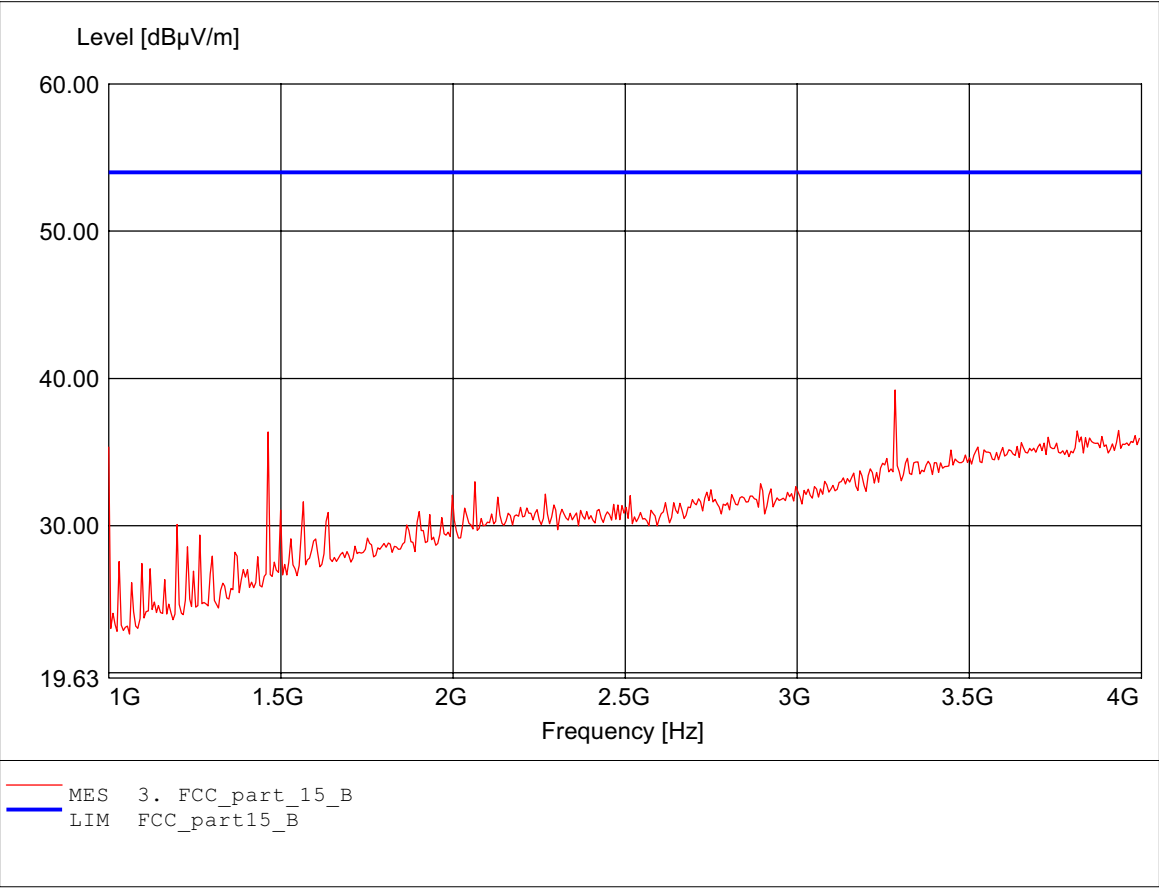

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq: 3.285GHz Emax: 40.68dBμV/m RBW: 1 MHz

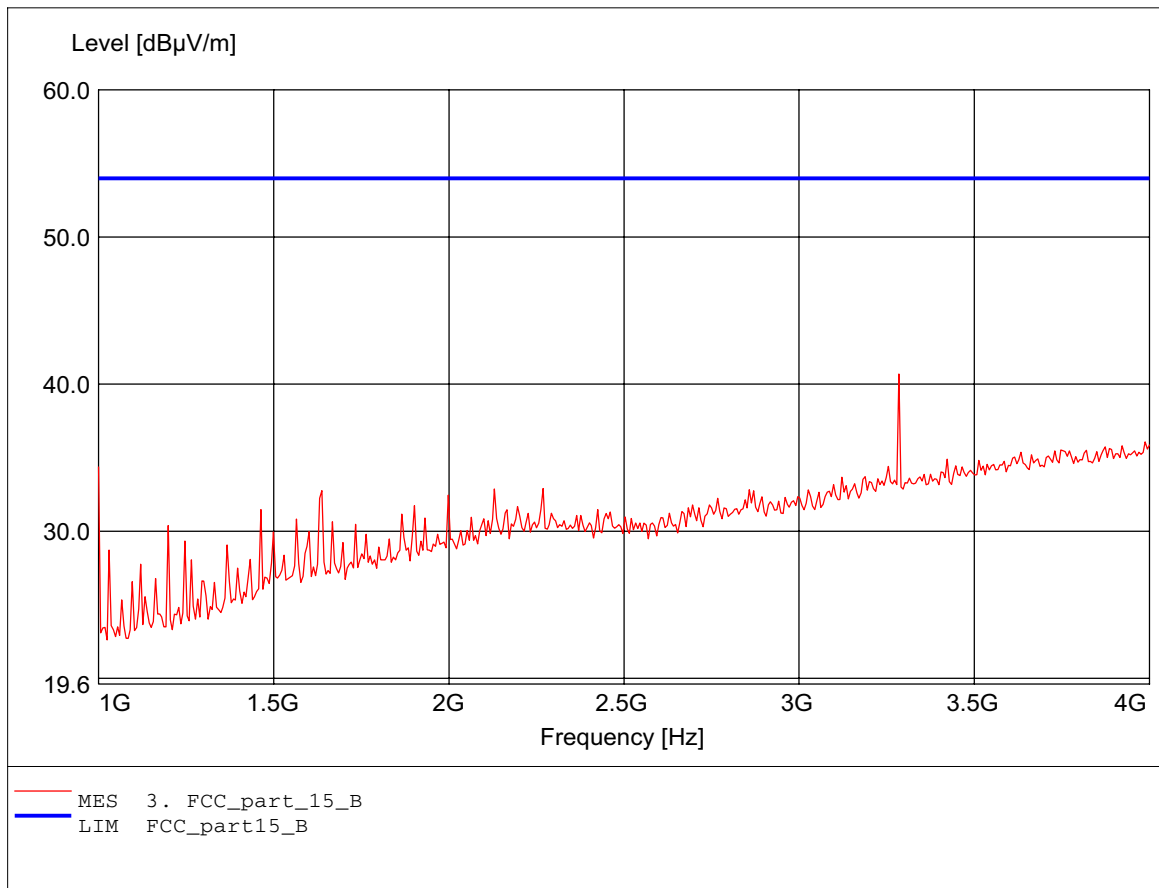

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.367GHz Emax:46.00dBμV/m RBW: 1 MHz

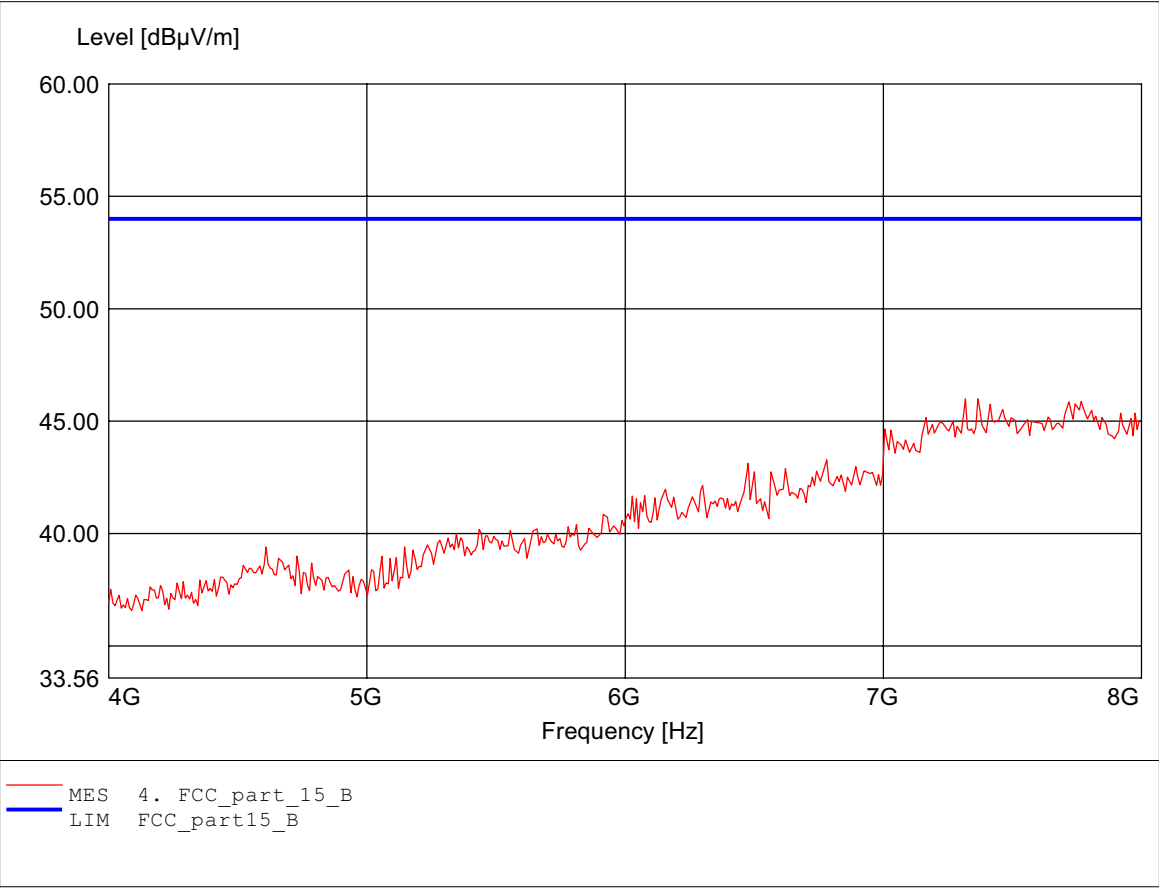

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.695GHz Emax:46.55dBμV/m RBW: 1 MHz

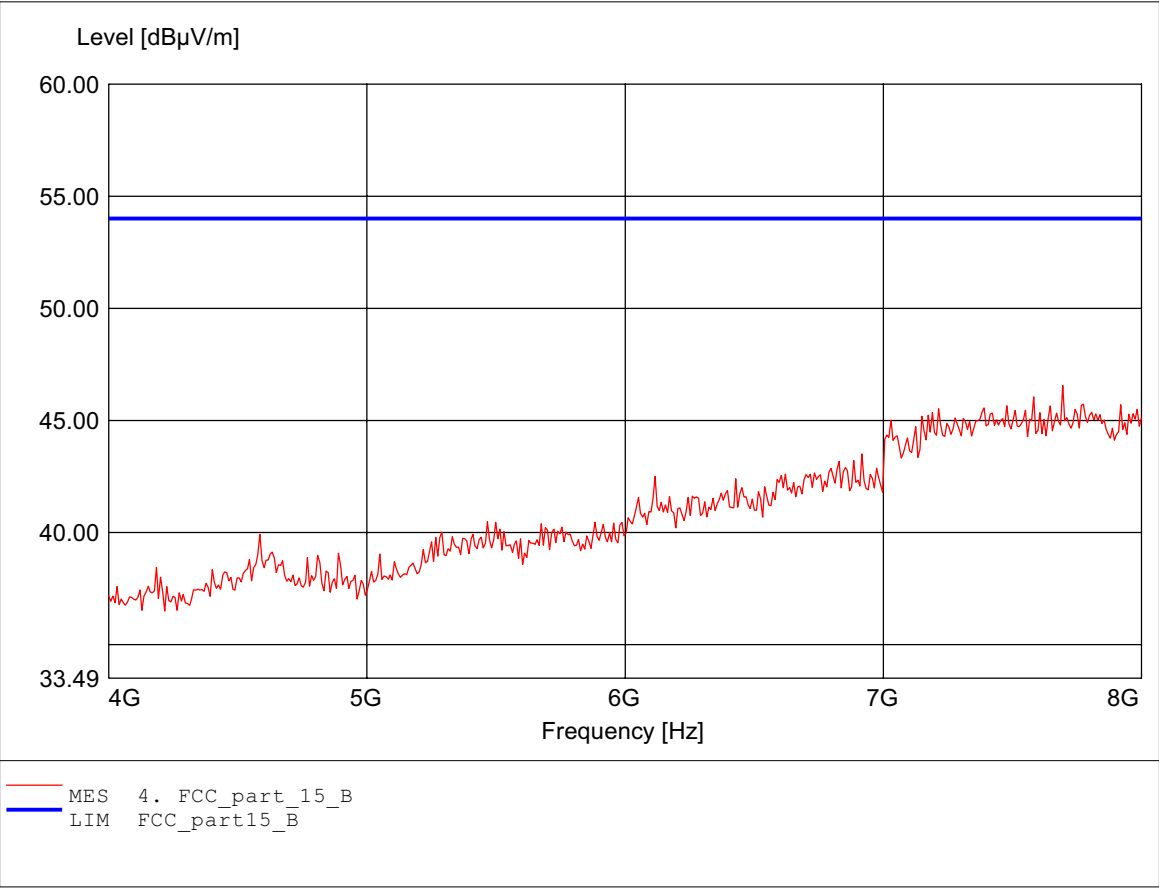

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.519GHz Emax:50.86dBμV/m RBW: 1 MHz

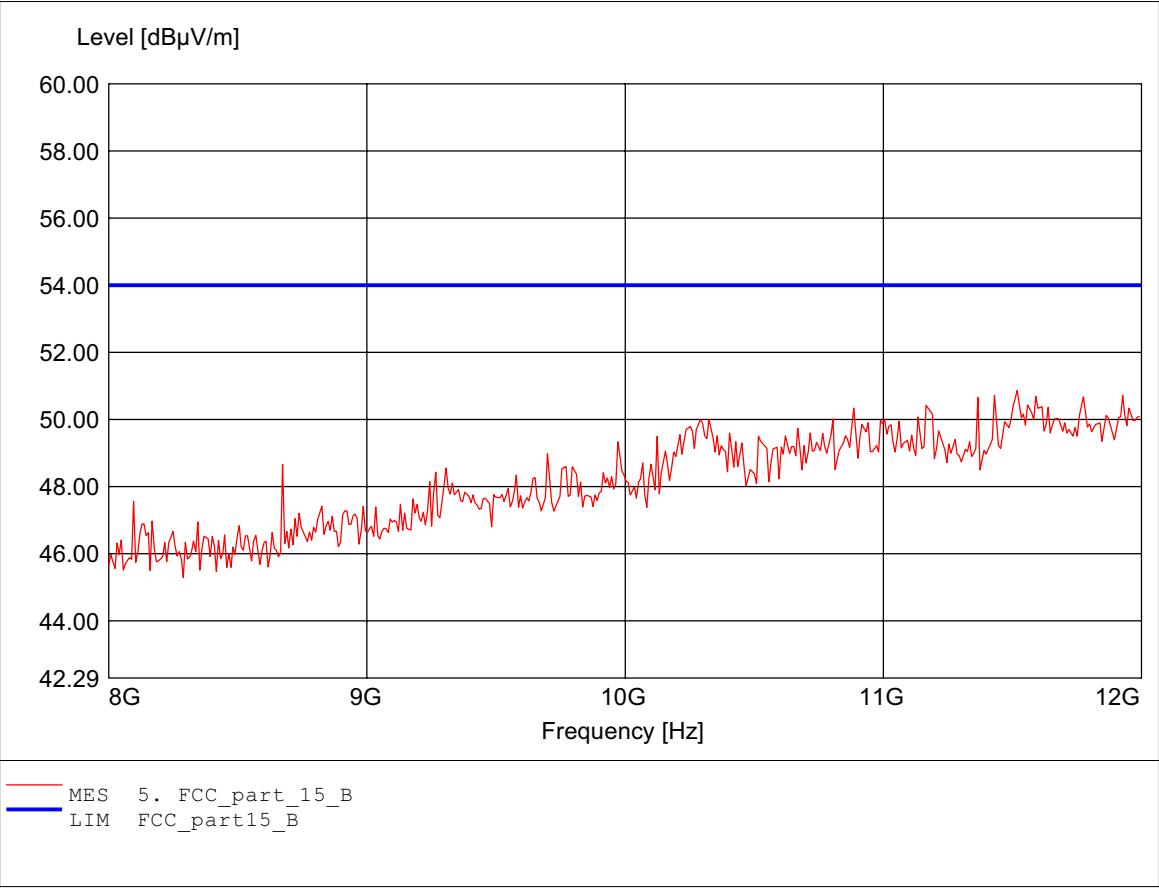

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq: 11.495GHz Emax: 51.34dBμV/m RBW: 1 MHz

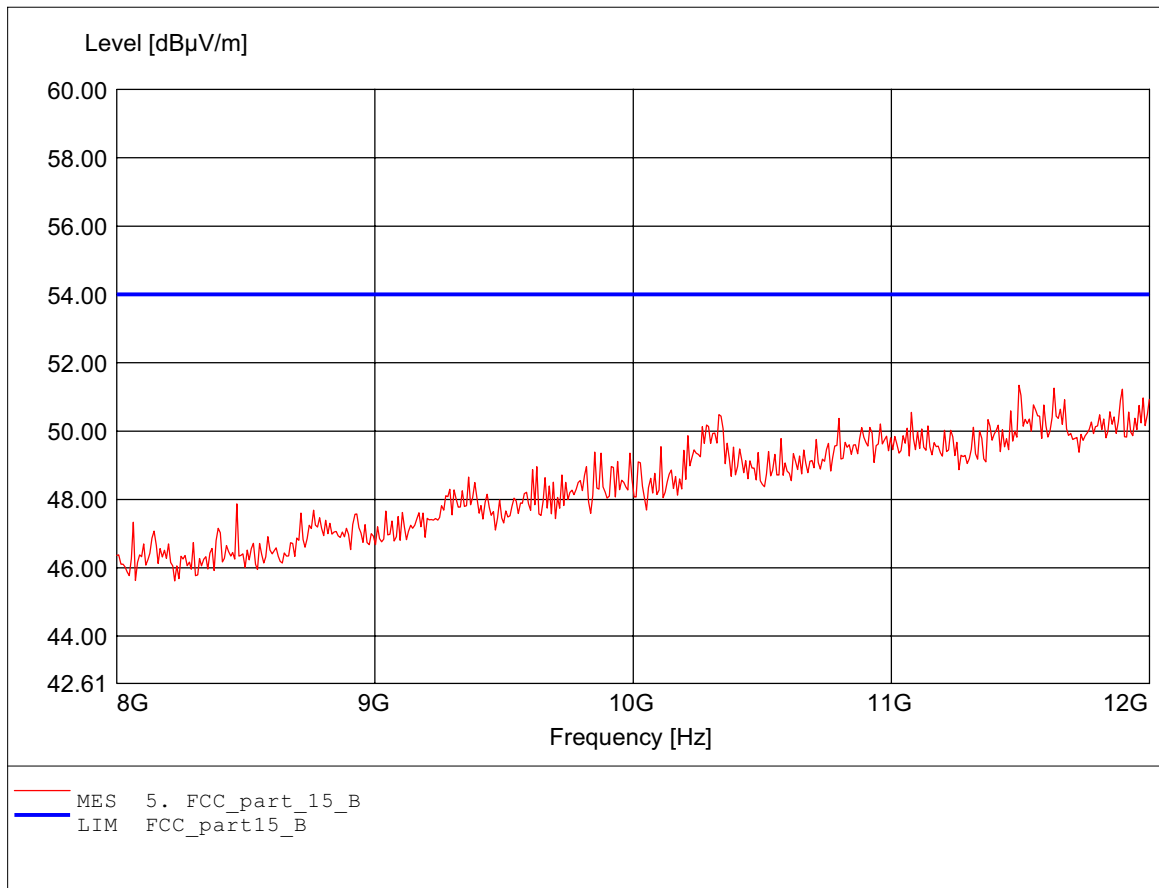

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.784GHz Emax:52.26dBμV/m RBW: 1 MHz

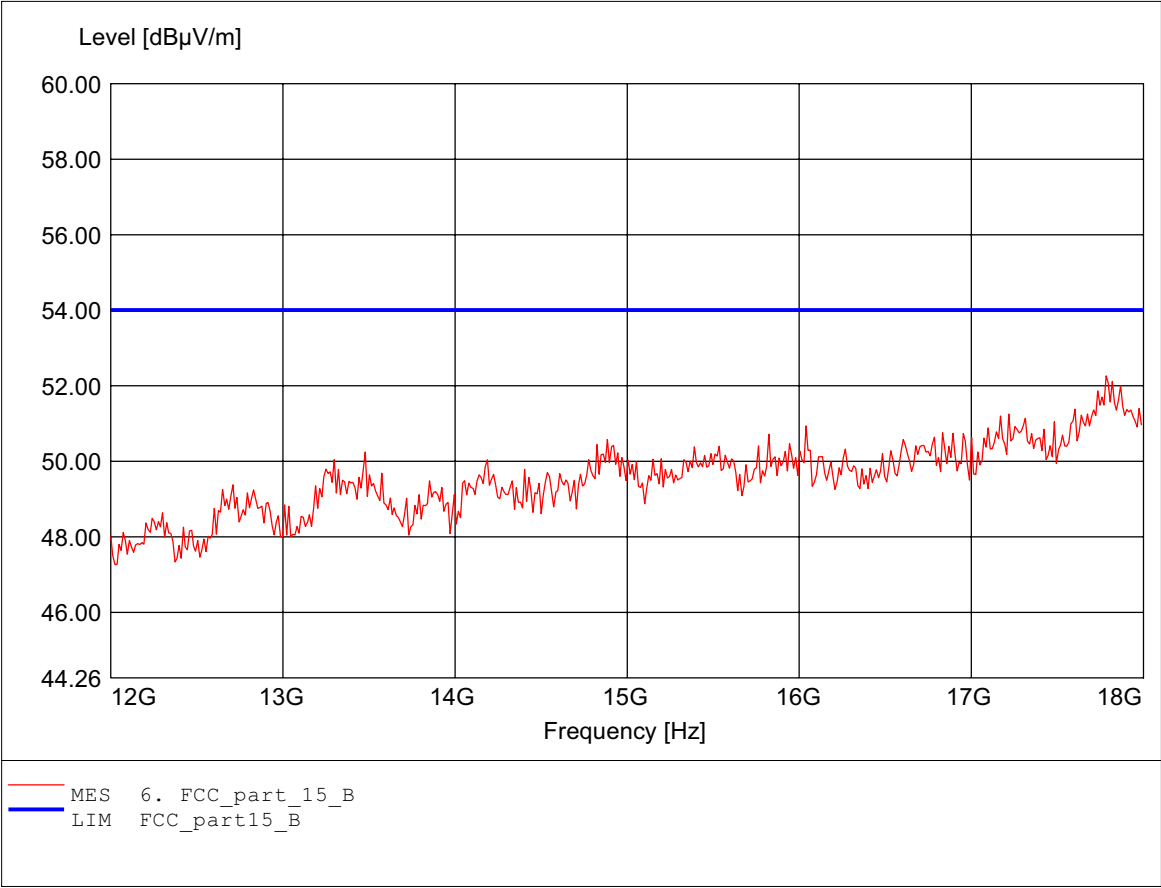

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300 high channel 802.11g
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (AC/DC ADAPTOR)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq: 17.711GHz Emax: 52.85dBμV/m RBW: 1 MHz

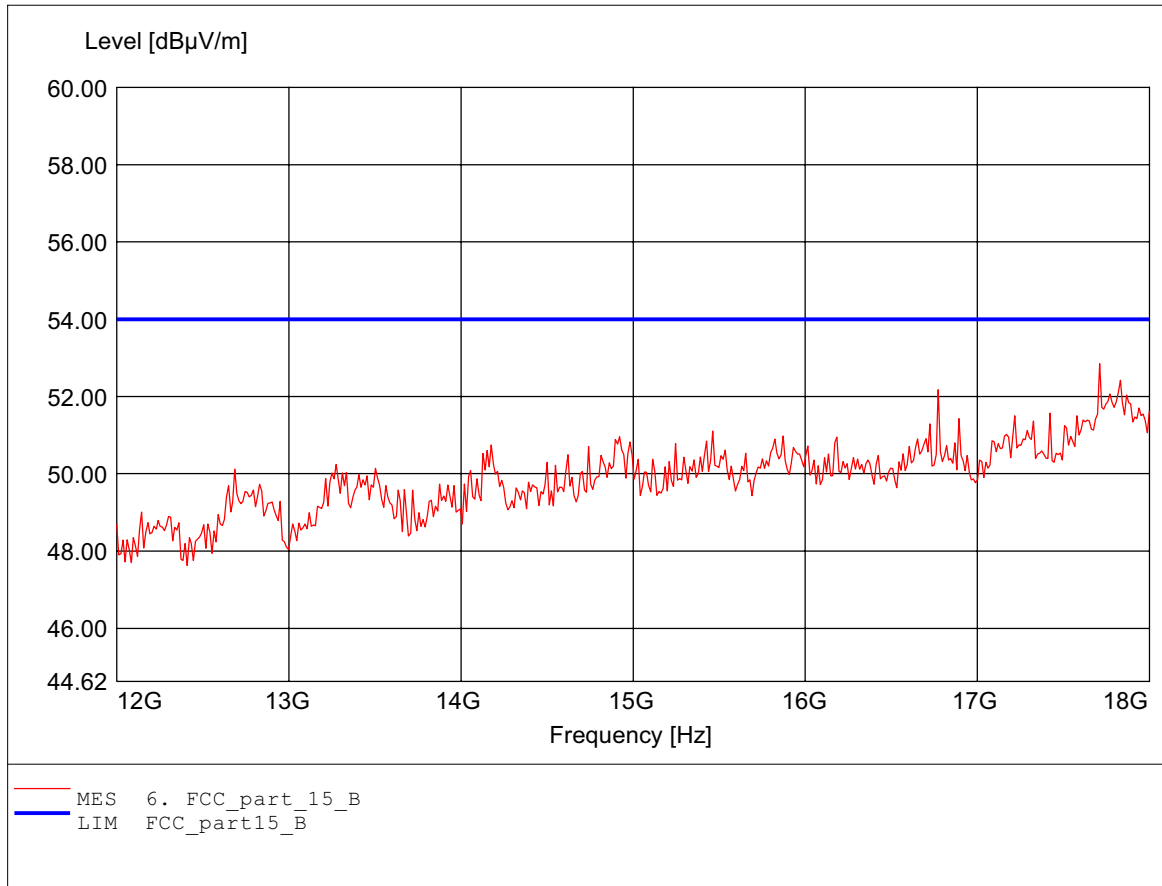

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (ac / dc adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:114.148MHz Emax:37.61dBµV/m RBW: 100 kHz

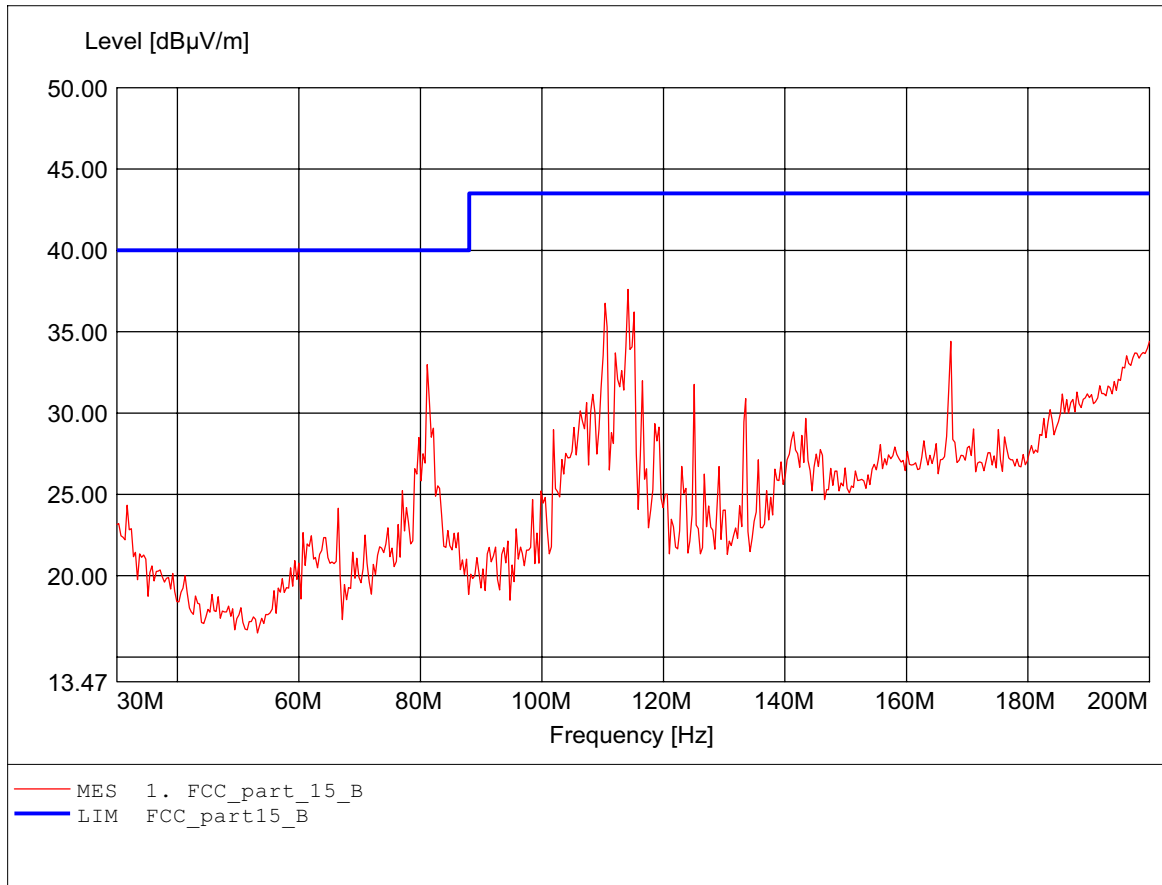

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (ac / dc adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 113.467MHz Emax: 44.05dBµV/m RBW: 100 kHz

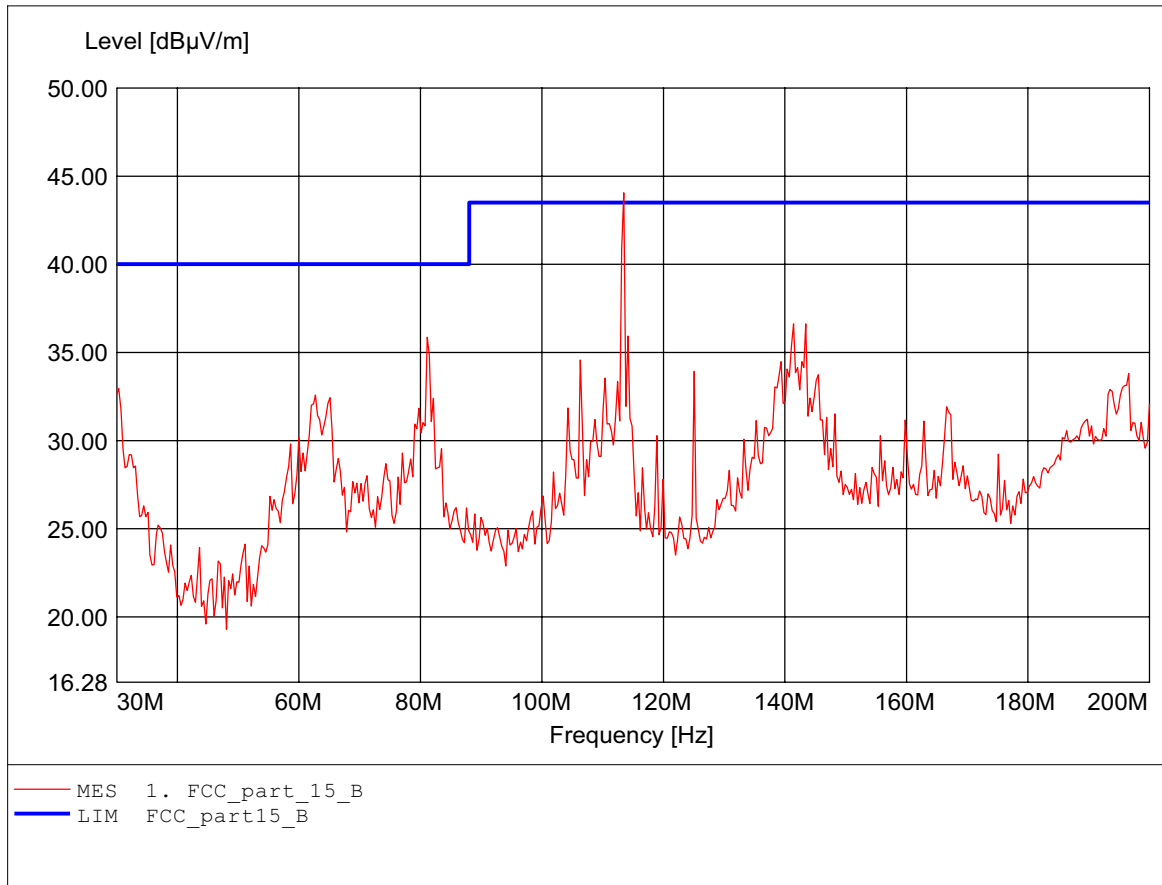

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (ac / dc adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:1.000GHz Emax:42.04dBμV/m RBW: 100 kHz

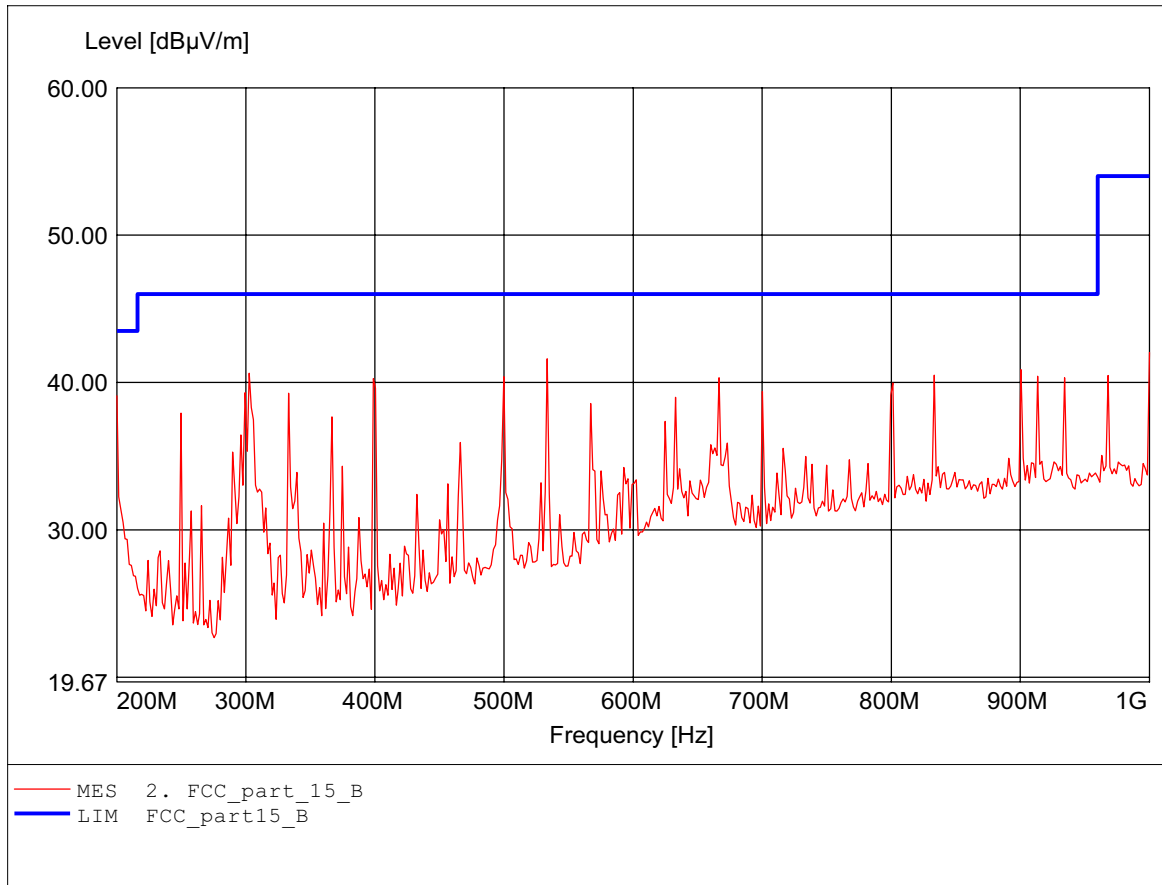

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technology, Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (ac / dc adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:1.000GHz Emax:42.83dBμV/m RBW: 100 kHz

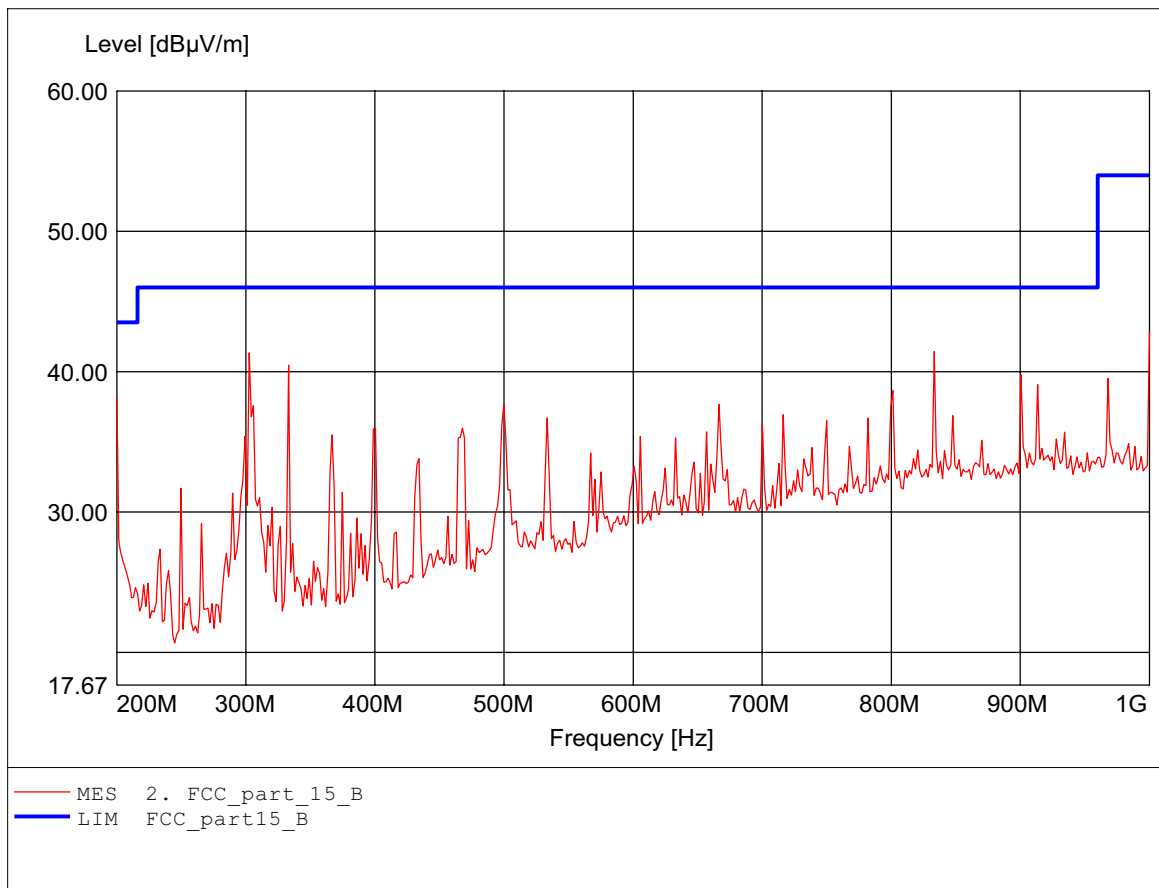

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technology ,Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (Power on POE)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:113.126MHz Emax:43.34dBμV/m RBW: 100 kHz

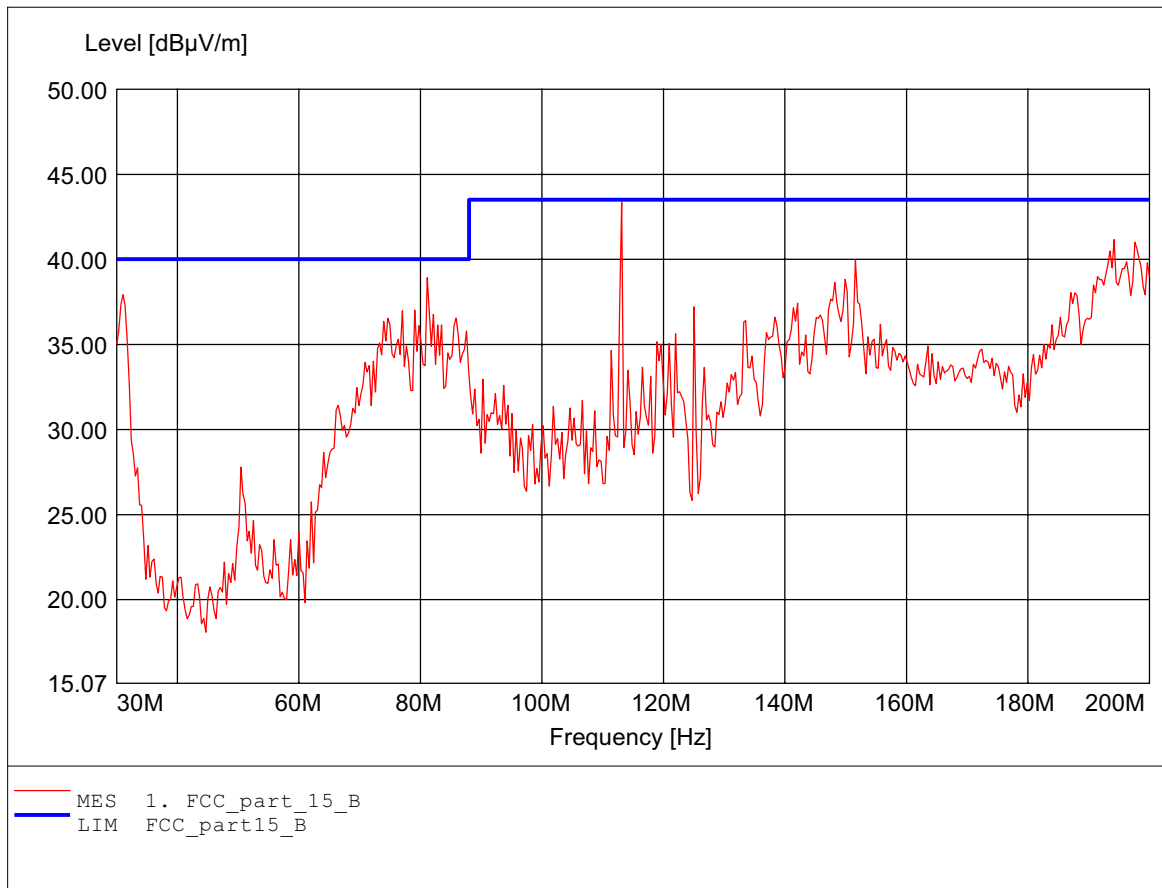

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technnology ,Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (Power on POE)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:194.208MHz Emax:41.24dBμV/m RBW: 100 kHz

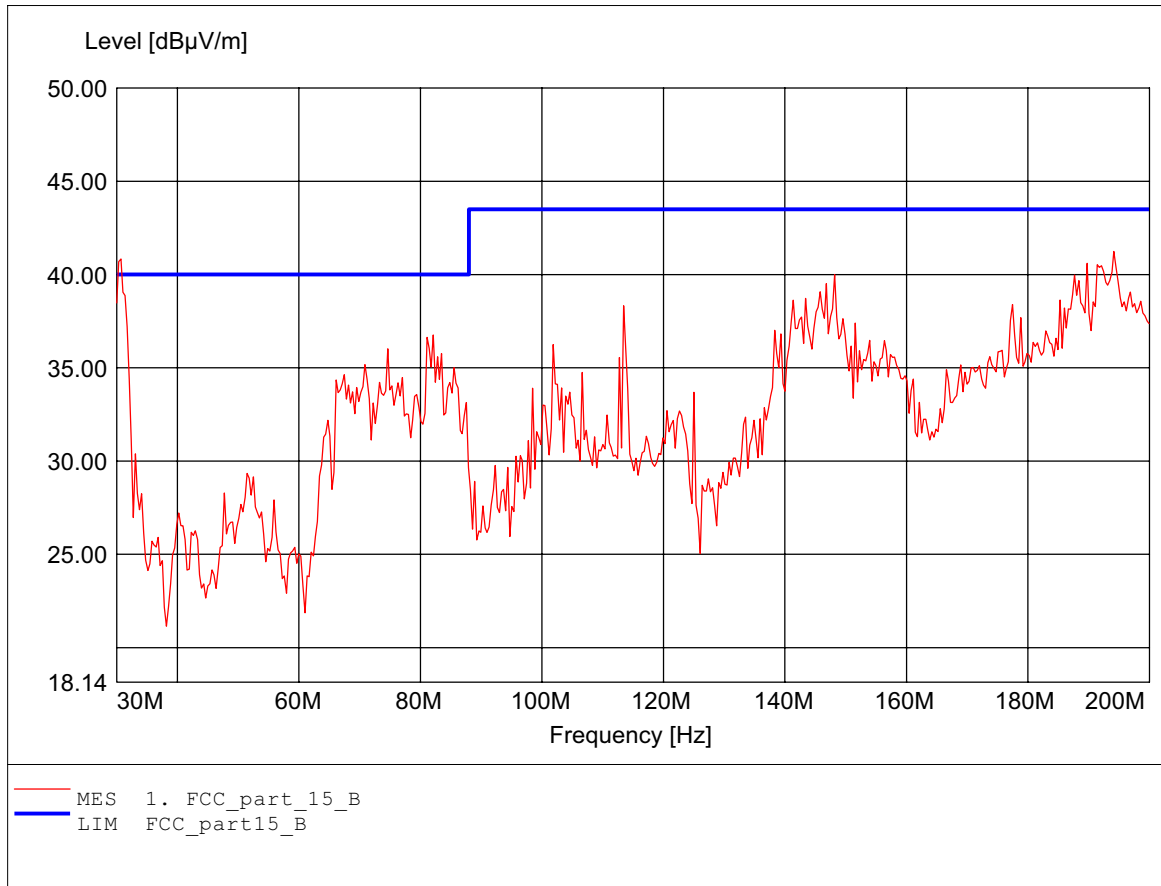

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless LAN 8 02.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technology ,Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (Power on POE)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:249.699MHz Emax:45.00dBμV/m RBW: 100 kHz

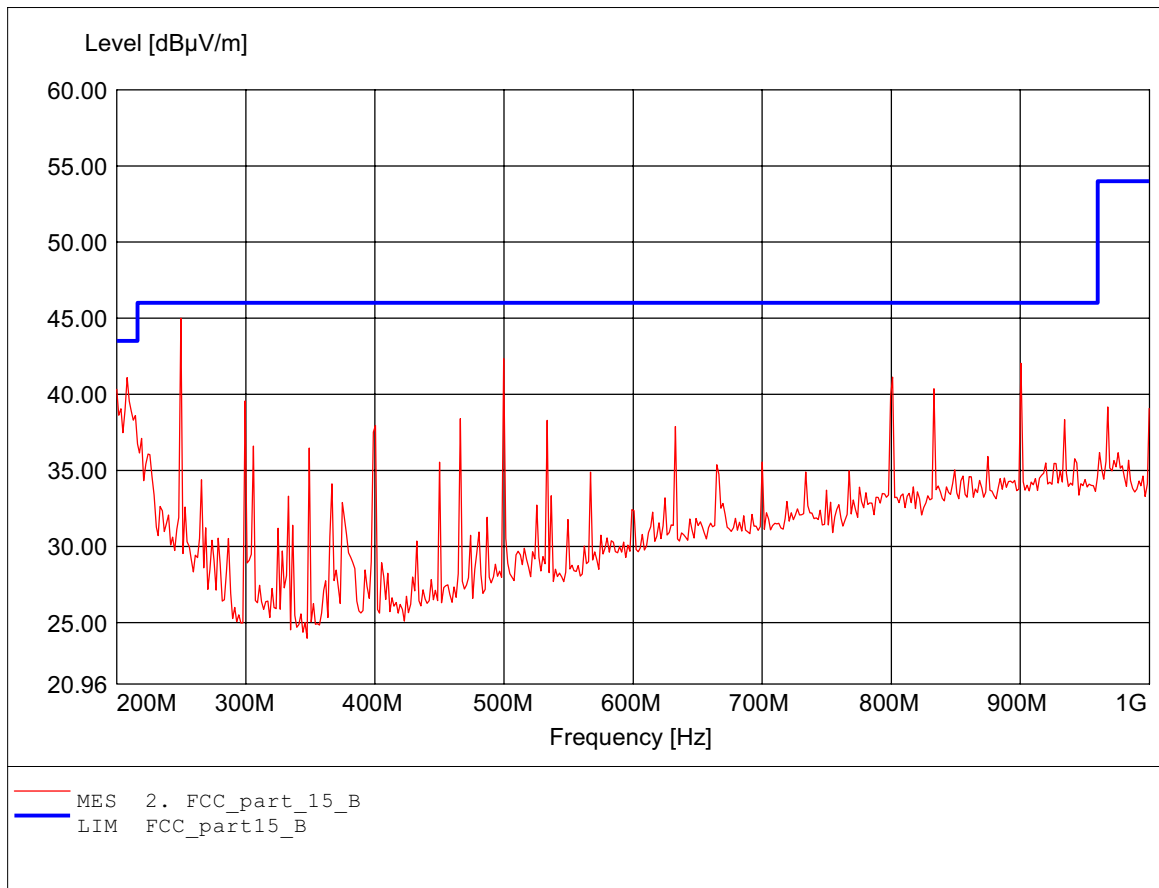


Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Wireless LAN 802.11b+g
MODEL NO.: IWE1300
Approval Holder: Interepoch Technnology ,Inc.
Test Site / Operator: ETS / Eric
Temperature/Voltage: Temp.: 25.6°C/ Unom.: 120 VAC (Power on POE)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:499.800MHz Emax:42.21dBμV/m RBW: 100 kHz

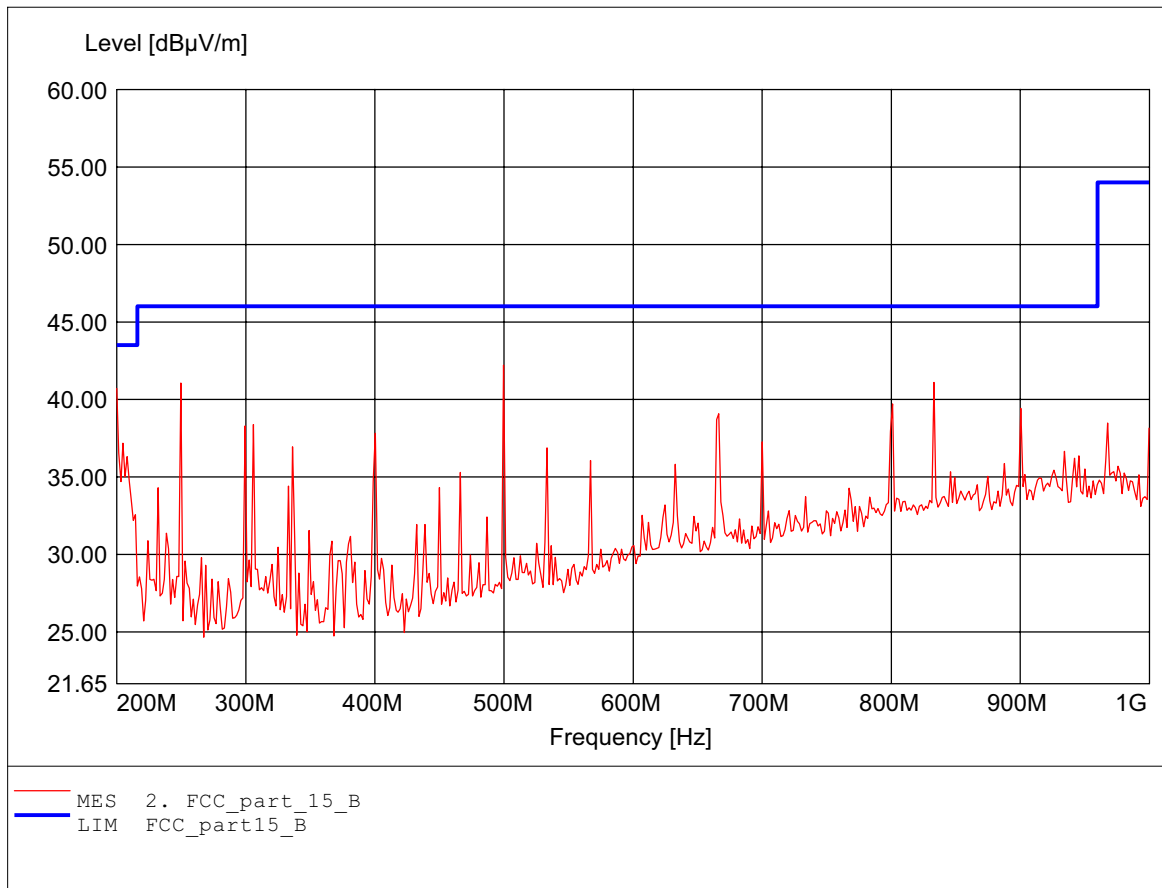



Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix G


Power Line Conducted Emission

The measurement diagram are wideband pre-scan results; only for reference.

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: Wireless LAN 802.11b+g
Approval Holder: Interepoch Technology, Inc.
Operating Condition: Unom : 120 VAC (ac /dc adaptor) , Tnom : 24.2°C
Test Site: ETS
Operator: Daren
Test Specification: V-network: ESH3-Z5 N
Comment: model: IWE1300 mode: active

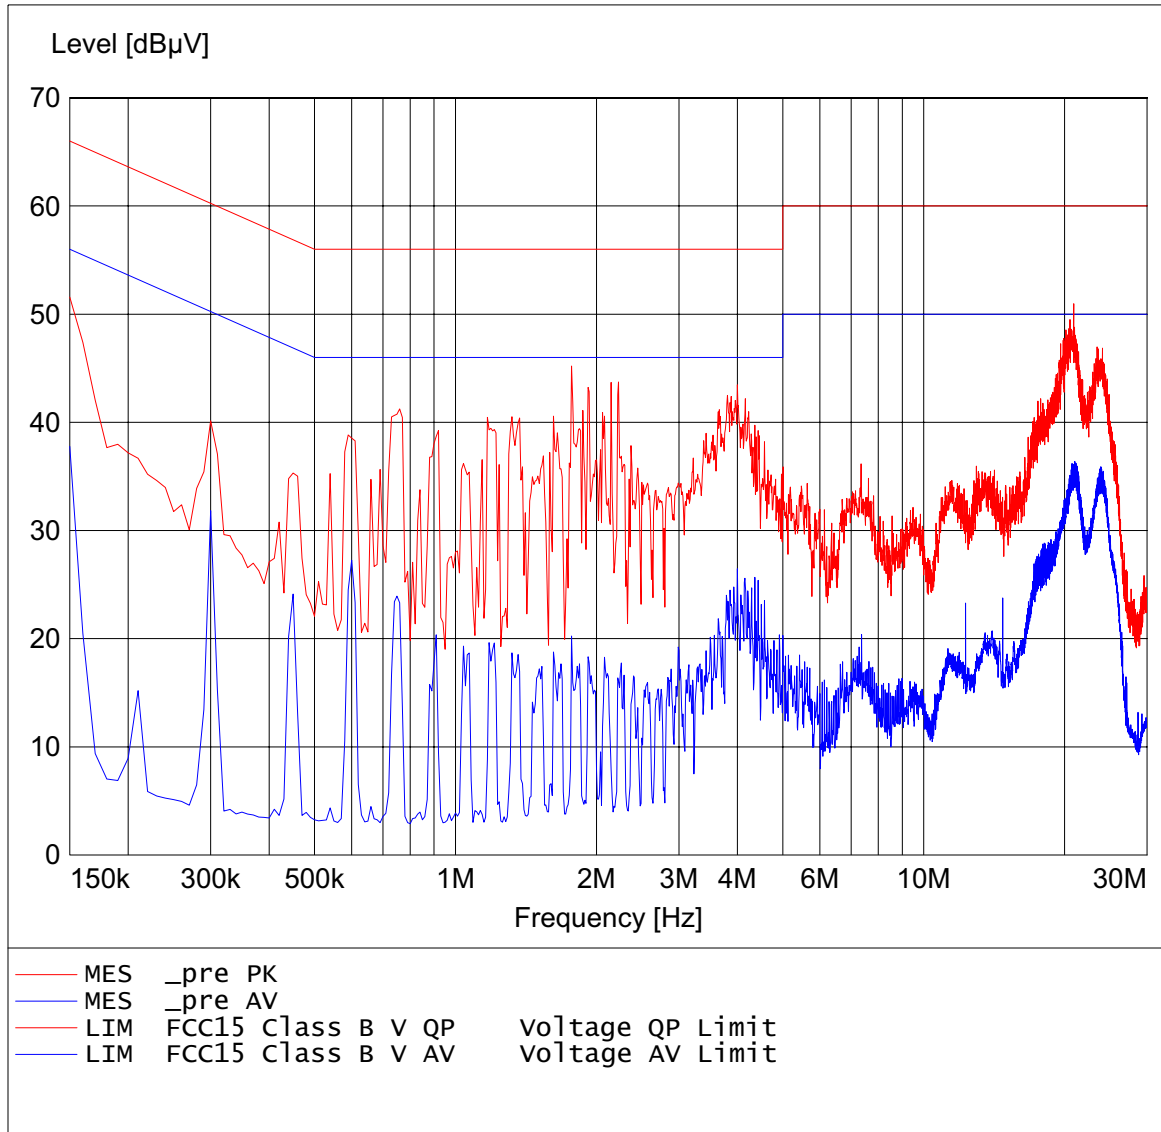

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: Wireless LAN 802.11b+g
Approval Holder: Interepoch Technology, Inc.
Operating Condition: Unom : 120 VAC (ac /dc adaptor) , Tnom : 24.2°C
Test Site: ETS
Operator: Daren
Test Specification: V-network: ESH3-Z5 L1
Comment: model: IWE1300 mode: active

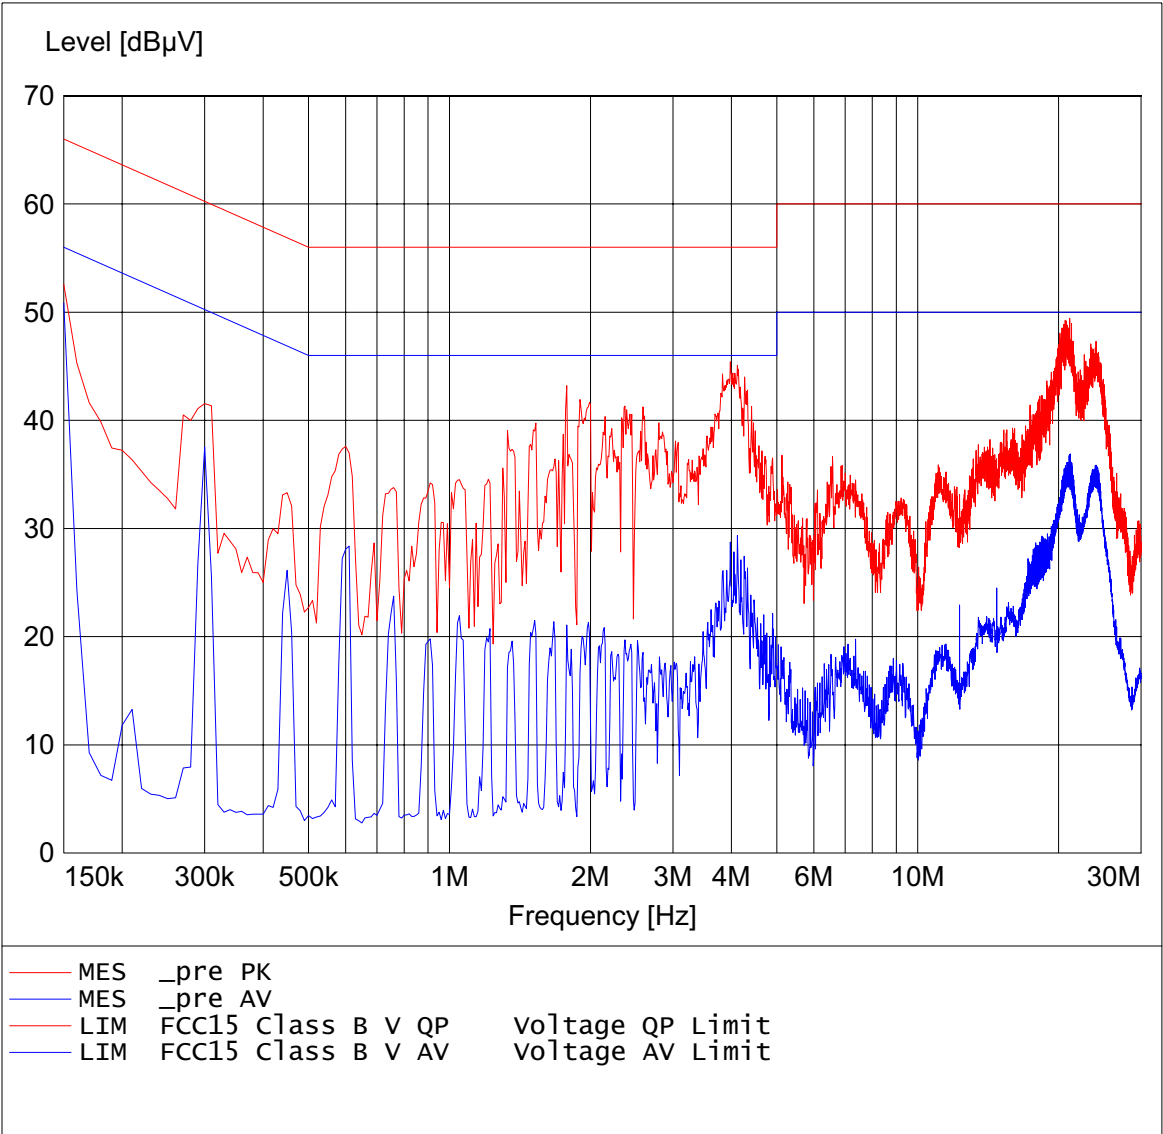

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: Wireless LAN 802.11b+g
Approval Holder: Interepoch Technology, Inc.
Operating Condition: Unom : 120 VAC (Power on POE) , Tnom : 24.2°C
Test Site: ETS
Operator: Daren
Test Specification: V-network: ESH3-Z5 N
Comment: model: IWE1300 mode: active

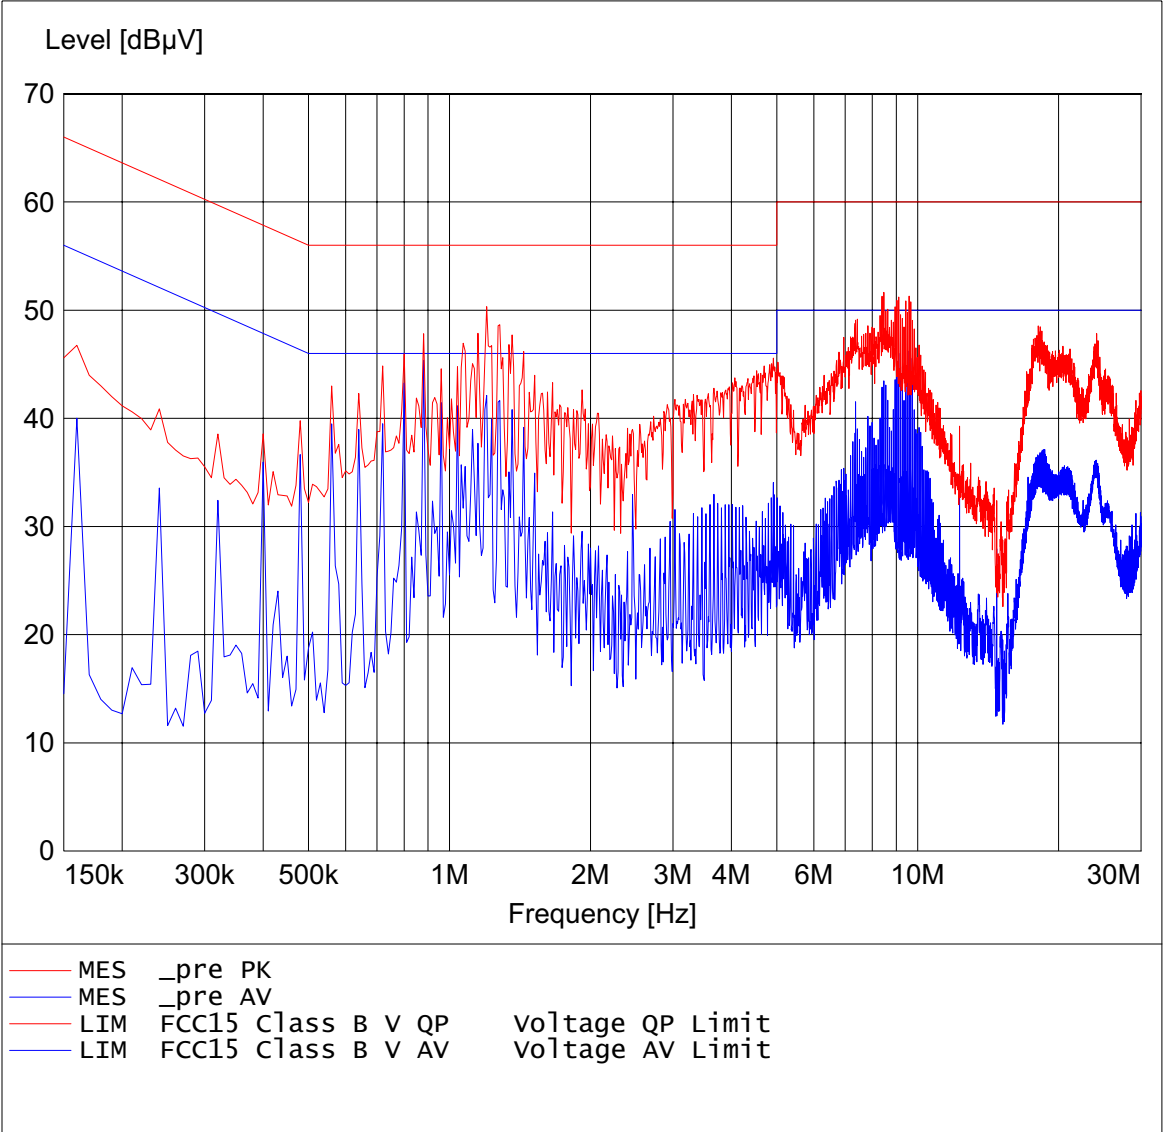


EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: Wireless LAN 802.11b+g
Approval Holder: Interepoch Technology, Inc.
Operating Condition: Unom : 120 VAC (Power on POE) , Tnom : 24.2°C
Test Site: ETS
Operator: Daren
Test Specification: V-network: ESH3-Z5 L1
Comment: model: IWE1300 mode: active

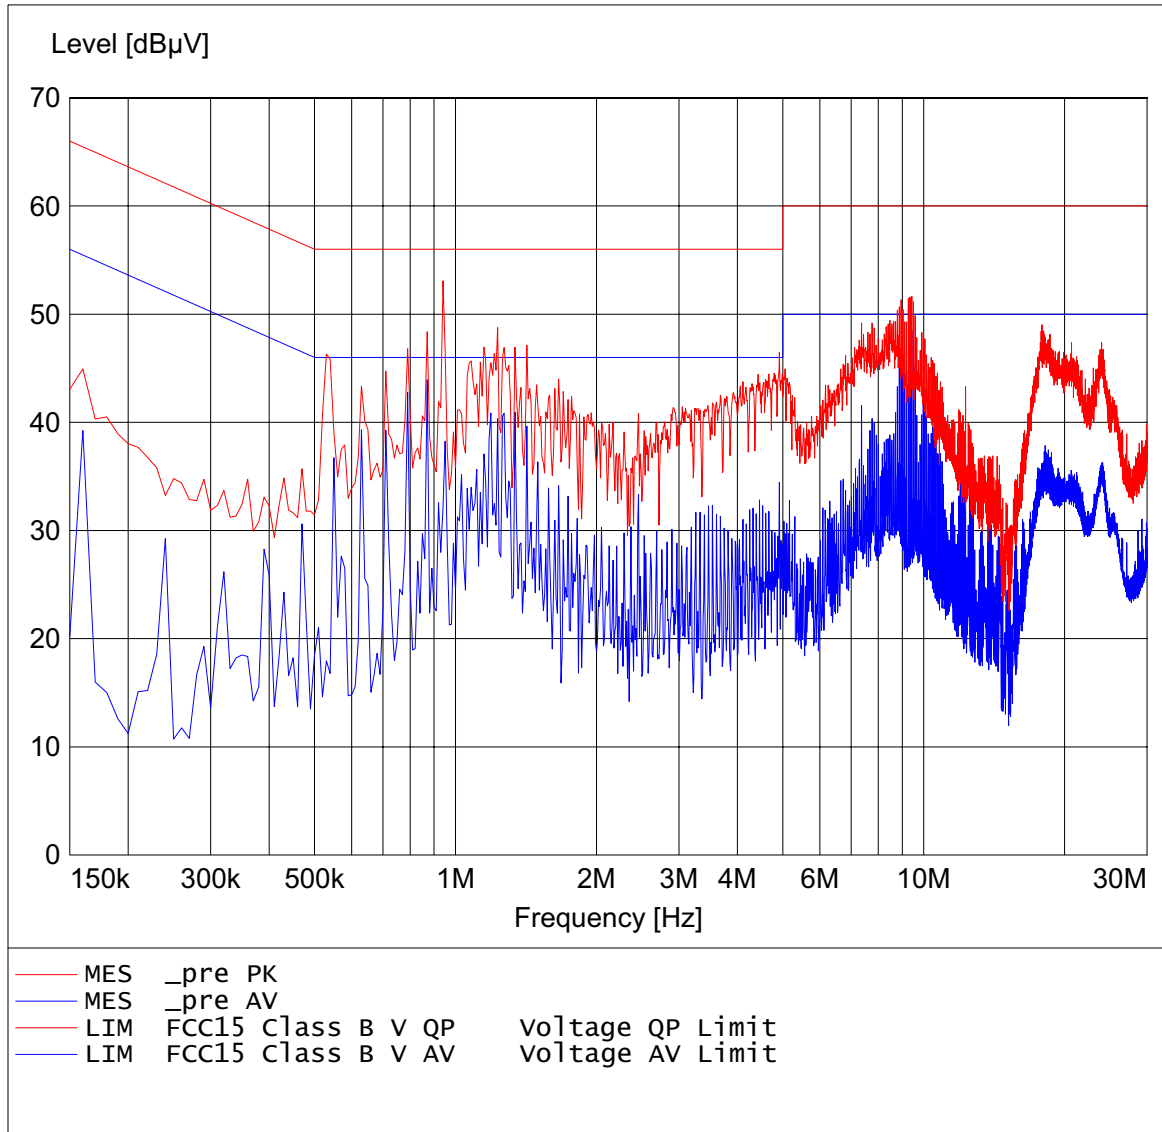



Registration number: W6M20602-6632-C-2
FCC ID: PRL-IWE1300

Appendix H

Pictures