### FCC PART 15 SUBPART C TEST REPORT

for

Deskpoint 2 (DP2)

**Model No.: TA-6950** 

FCC ID: PRLTA-6950

of

Applicant: Interepoch Technology,Inc.

Address: 6F., No.1, Alley 1, Lane 235, Pao-Chiao Rd., Hsin-Tien City,

Taipei Hsien 231 Taiwan, R.O.C.

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1

A2LA Accredited No.: 2732.01





Report No.: W6M21106-11625-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com

FCC ID: PRLTA-6950

### TABLE OF CONTENTS

I	GE	NERAL INFORMATION	3
	1.1	Notes	3
	1.2	TESTING LABORATORY	4
	1.2.	1 Location	4
	1.2.2	2 Details of accreditation status	4
	1.3	DETAILS OF APPROVAL HOLDER	4
	1.4	APPLICATION DETAILS	5
	1.5	GENERAL INFORMATION OF TEST ITEM	5
	1.6	TEST STANDARDS	6
2	TEO	CHNICAL TEST	7
	2.1	SUMMARY OF TEST RESULTS	7
	2.2	TEST ENVIRONMENT	7
	2.3	TEST EQUIPMENT LIST	8
	2.4	GENERAL TEST PROCEDURE	.12
3	TES	ST RESULTS (ENCLOSURE)	. 14
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	. 15
	3.2	EQUIVALENT ISOTROPIC RADIATED POWER	. 22
	3.3	RF Exposure Compliance Requirements	. 22
	3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	.23
	3.5	Spurious Emissions (TX)	. 24
	3.6	RADIATED EMISSION ON THE BAND EDGE	.38
	3.7	MINIMUM 6 dB BANDWIDTH	.43
	3.8	PEAK POWER SPECTRAL DENSITY	.50
	3.9	RADIATED EMISSION FROM DIGITAL PART	.57
	3.10	POWER LINE CONDUCTED EMISSION	.58
A	PPEND	0IX	.60

FCC ID: PRLTA-6950

#### 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g/n.

This report is related to FCC Part 15 C (DSSS and OFDM device).

#### **Tester:**

July 15, 2011 Robert Ren

Date WTS-Lab. Name Signature

### Technical responsibility for area of testing:

July 15, 2011 Chang Tse-Ming

Date WTS Name Signature

Signature

FCC ID: PRLTA-6950

#### 1.2 Testing laboratory

#### 1.2.1 Location

**OATS** 

No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228 FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877 Fax : 886-2-66068879

#### 1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1





#### Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

 Name:
 ./.

 Accredited number:
 ./.

 Street:
 ./.

 Town:
 ./.

 Country:
 ./.

 Telephone:
 ./.

 Fax:
 ./.

#### 1.3 Details of approval holder

Name: Interepoch Technology,Inc.

Street: 6F., No.1, Alley 1, Lane 235, Pao-Chiao Rd.,

Town: Hsin-Tien City, Taipei Hsien 231

Country: Taiwan. R.O.C.
Telephone: +886-2-8665-0305
Fax: +886-2-8665-0306

FCC ID: PRLTA-6950

### 1.4 Application details

Date of receipt of test item: July 1, 2011

Date of test: from July 2, 2011 to July 15, 2011

#### 1.5 General information of Test item

Type of test item: Deskpoint 2 (DP2)

Model Number: TA-6950
Brand Name: Teleadapt

Multi-listing model number: TA-7950, TA-8050

Photos: see Appendix

**Technical data** 

Frequency band: 2.4 GHz - 2.4835 GHz

11b, 11g, 11n 20MHz

Frequency (ch 1 or A): 2.412 GHz Frequency (ch 6 or B): 2.437 GHz Frequency (ch 11 or C): 2.462 GHz

11n 40MHz

Frequency (ch 1 or A): 2.422 GHz Frequency (ch 4 or B): 2.437 GHz Frequency (ch 7 or C): 2.452 GHz

Number of Channels: 11b, 11g, 11n 20MHz: 11

11n 40MHz: 7

Operation modes: duplex

Modulation Type: DSSS / OFDM Fixed point-to-point operation:  $\square$  Yes /  $\boxtimes$  No

Type of Antenna: Multilayer Chip Antenna

Antenna gain: 0.5 dBi

Power supply: Adaptor ( I/P: AC 100-240 V / 50-60 Hz / 1.0 A,

O/P: 5 Vdc / 2.0 A)

Emission designator: 11b: DSSS: 16M1G1D

11g: OFDM: 18M1W7D

11n 20MHz: OFDM: 18M5W7D 11n 40MHz: OFDM: 36M1W7D



FCC ID: PRLTA-6950

Host device: none

Classification

Fixed Device	$\boxtimes$
Mobile Device (Human Body distance > 20cm)	
Portable Device (Human Body distance < 20cm)	
Modular Radio Device	

#### <u>Transmitter</u> <u>Unom</u>

Mode A (DSSS)

Power ( ch 1 or A): Conducted: 13.47 dBm Power ( ch 6 or B): Conducted: 13.61 dBm Power ( ch 11 or C): Conducted: 13.36 dBm

Mode B (OFDM)

Power (ch 1 or A): Conducted: 10.92 dBm
Power (ch 6 or B): Conducted: 11.22 dBm
Power (ch 11 or C): Conducted: 11.14 dBm

Mode C (OFDM)

Power (ch 1 or A): Conducted: 10.85 dBm Power (ch 6 or B): Conducted: 10.99 dBm Power (ch 11 or C): Conducted: 11.32 dBm

Mode D (OFDM)

Power ( ch 1 or A): Conducted: 10.45 dBm Power ( ch 4 or B): Conducted: 10.43 dBm Power ( ch 7 or C): Conducted: 10.85 dBm

**Manufacturer:** (if applicable)

Name: /.
Street: /.
Town: /.
Country: /.

#### 1.6 Test standards

Technical standard: FCC RULES PART 15 SUBPART C § 15.247 (2010-10)

FCC ID: PRLTA-6950

### 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	×
or	
The deviations as specified in 2.5 were ascertained in the course of the tests performed.	

### 2.2 Test environment

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Power supply: Adaptor ( I/P: AC 100-240 V / 50-60 Hz / 1.0 A,

O/P: 5 Vdc / 2.0 A)

Extreme conditions parameters: ./.



FCC ID: PRLTA-6950

### 2.3 Test Equipment List

No.	Test equipment	Туре	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2010/9/2	2011/9/1
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function	on Test
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2011/3/10	2012/3/9
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2010/9/8	2011/9/7
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2011/3/8	2012/3/7
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test V	Use NCR
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2011/7/4	2012/7/3
ETSTW-CE 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2010/10/21	2011/10/20
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2010/9/6	2011/9/5
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2011/2/21	2012/2/20
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	SCHAFFNER	2010/8/20	2011/8/19
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	Function	on Test
ETSTW-CS 009	6 dB Attenuator	75-A-FFN-06	70998	BIRD	2011/5/20	2012/5/19
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2010/8/10	2011/8/9
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2010/9/14	2011/9/13
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2010/9/2	2011/9/1
ETSTW-RE 010	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2010/9/6	2011/9/5
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function	on Test
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function	on Test
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2011/4/25	2012/4/24
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function	on Test
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2010/8/20	2011/8/19
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	EMCO	2011/7/4	2012/7/3
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2011/2/25	2012/2/24
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2010/10/4	2011/10/3
ETSTW-RE 033	WaveRunner 6000A Serise Oscilloscope	WAVERUNNER 6100A	LCRY0604P1450 8	LeCroy	Function	on Test
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2010/10/4	2011/10/3
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2011/1/14	2012/1/13
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2011/4/26	2012/4/25
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2011/4/25	2012/4/24
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test I	Use NCR
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2010/8/30	2011/8/29



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2011/4/8	2012/4/7
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2011/3/4	2012/3/3
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2011/3/4	2012/3/3
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2011/3/4	2012/3/3
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2011/5/30	2012/5/29
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2011/3/4	2012/3/3
ETSTW-RE 061	Amplifier Module	CHC 1	None	ETS	2011/5/18	2012/5/17
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2010/11/30	2011/11/29
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function	on Test
ETSTW-RE 065	Amplifier	AMF-6F- 18002650-25-10P	941608	MITEQ	2011/4/8	2012/4/7
ETSTW-RE 066	Highpass Filter	H1G013G1	206015	MICROWAVE CIRCUITS, INC.	2011/3/4	2012/3/3
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	НР	2010/10/7	2011/10/6
ETSTW-RE 073	Power Meter	N1911A	MY45100769	Agilent	2011/1/10	2012/1/9
ETSTW-RE 074	Power Sensor	N1921A	MY45241198	Agilent	2011/1/10	2012/1/9
ETSTW-RE 081	Highpass Filter	H03G13G1	4260-02 DC0428	MICROWAVE CIRCUITS, INC.	2011/3/4	2012/3/3
ETSTW-RE 096	SIGNAL GENERATOR	SMIQ 03B	102274	R&S	2011/5/31	2012/5/30
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2011/3/10	2012/3/9
ETSTW-RE 105	2.4GHz Notch Filter	NO124411	39555	MICROWAVE CIRCUITS, INC.	2011/3/11	2012/3/10
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2011/3/24	2012/3/23
ETSTW-RE 111	Log-Periodic Dipole Array Antenna	VULB 9160	9160-3309	Schwarz beck	2010/12/17	2011/12/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	None	T-Power	Functi	on test
ETSTW-RE 114	2.4GHz Notch Filter	N0124411	473873	MICROWAVE CIRCUITS	2011/1/13	2012/1/12
ETSTW-RE 121	SPECTRUM ANALYZER	FSU43	100013	R&S	2011/6/23	2012/6/22
ETSTW-EMI 001	HARMONICS 1000	HAR1000-1P	093	EMC-PARTNER	2010/8/27	2011/8/26
ETSTW-EMS 001	BASELSTRASSE 160 CH- 4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	Function	on Test
ETSTW-EMS 002	Frequency Converter	YF-6020	0308014	None	Function	on Test
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2010/11/3	2011/11/2
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	Function	on Test
ETSTW-EMS 012	EM Injection Clamp	F-203I-23MM	476	FCC	2011/6/1	2012/5/31
ETSTW-EMS 015	HVAC Trms Power Clamp Meter	3079K	070800649	TES	2010/10/5	2011/10/4
ETSTW-EMS 016	EMF Tester	1390	071208732	TES	2010/10/5	2011/10/4
ETSTW-EMS 017	Multimeter	DM-1220	518614	HOLA	2010/8/18	2011/8/17
ETSTW-EMS 019	Electrostatic Discharge Simulator	ESS-2002	ESS06Y6300	NoiseKen	2010/11/25	2011/11/24
ETSTW-EMS 020	Humidity Temperature Meter	TES-1366	091011116	TES	2011/3/24	2012/3/23
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR	Function	on Test
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	Function	on Test
	1					



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

ETSTW-RS 007	14" COLOR VIDEO MONITOR	HS-CM145A	0512011548	None	Function	on Test
ETSTW-RS 009	SIGNAL GENERATOR	8648C	3642U01656	НР	2011/2/23	2012/2/22
ETSTW-RS 010	Broadband Field Meter	NBM-520	C-0195	Narda	2010/10/12	2011/10/11
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2010/10/7	2011/10/6
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849- 822/851-40 /12+9SS	3	WI	2011/1/14	2012/1/13
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2011/1/14	2012/1/13
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880 .5-1875.5/1884.5- 32/5SS	3	WI	2011/1/14	2012/1/13
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2011/1/14	2012/1/13
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2010/9/20	2011/9/19
ETSTW-Cable 002	Microwave Cable	SUCOFLEX 104 (S_Cable 7)	238093	HUBER+SUHNER	2011/5/18	2012/5/17
ETSTW-Cable 003	Microwave Cable	SUCOFLEX 104 (S_Cable 11)	209953	HUBER+SUHNER	2011/5/18	2012/5/17
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2011/3/8	2012/3/7
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test I	Use NCR
ETSTW-Cable 012	BNC Cable	BNC Cable 2	None	JYE BAO CO.,LTD.	2011/3/8	2012/3/7
ETSTW-Cable 013	Microwave Cable	SUCOFLEX 104 (S_Cable 5)	232345	HUBER+SUHNER	Function	on Test
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2011/3/4	2012/3/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2011/3/4	2012/3/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2011/3/4	2012/3/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2011/3/4	2012/3/3
ETSTW-Cable 022	N TYPE Cable	OATS Cable 3	0002	JYE BAO CO.,LTD.	2011/3/4	2012/3/3
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2011/3/10	2012/3/9
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2011/3/10	2012/3/9
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2011/4/26	2012/4/25
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2011/4/26	2012/4/25
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	SPECTRUM	2011/3/10	2012/3/9
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 039	Microwave Cable	SUCOFLEX 104 (S_Cable 19)	316739	HUBER+SUHNER	2011/5/18	2012/5/17
ETSTW-Cable 040	Microwave Cable	SUCOFLEX 104 (S_Cable 20)	316738	HUBER+SUHNER	Function	on Test
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 051	BNC Cable	BNC Cable 6	None	JYE BAO CO.,LTD.	2011/3/31	2012/3/30
ETSTW-Cable 052	BNC Cable	Clamp Cable	None	Schwarz beck	2011/3/31	2012/3/30
ETSTW-Cable 053	N TYPE To SMA Cable	OATS Cable 4	None	JYE BAO CO.,LTD.	2011/3/4	2012/3/3
ETSTW-Cable 054	BNC To SMA Cable	OATS Cable 5	None	JYE BAO CO.,LTD.	2011/3/4	2012/3/3
ETSTW-Cable 055	Microwave Cable	SUCOFLEX 104	None	HUBER+SUHNER	Function	on Test
ETSTW-Cable 056	N TYPE Cable	N30N30-JBY240-	20110621-1.0	JYE BAO CO.,LTD.	Function	on Test



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

		80CM			
ETSTW-Cable 057	N TYPE Cable	N30N30-JBY240- 80CM	20110621-1.1	JYE BAO CO.,LTD.	Function Test
WTSTW-SW 001	EMI TEST SOFTWARE	ARE I Harmonics_1000 I None I EMC PARTNER I		HARCS Version 4.16 Firmware Version 2.18	
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version ETS-03A1
WTSTW-SW 003	EMS TEST SOFTWARE	i2	None	AUDIX	Version 3.2007-8-17b
WTSTW-SW 005	GSM Fading Level Correction	GSMFadLevCor	None	R&S	Version 1.66

FCC ID: PRLTA-6950

#### 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50µH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $dB\mu V$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS(to the receiver) = FS

 $20 \; dB\mu V + 10.36 \; dB + 6 \; dB = 36.36 \; dB\mu V/m \; @3m$ 

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

FCC ID: PRLTA-6950

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = 20 log (dwell time/T)

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	×	×	
Equivalent radiated Power	15.247(b)(3)	×	×	
Spurious Emissions radiated – Transmitter	15.247(c):	×	×	
operating	15.209			
Band Edge Measurement	15.247(c)	×	×	
Minimum 6 dB Bandwidth	15.247(a)(2)	×	×	
Peak Power Spectral Density	15.247(d)	×	×	
Radiated Emission from Digital Part	15.109			
Power Line Conducted Emission	15.207	×	×	

#### Note:

- 1. This EUT incorporates a MIMO function with IEEE 802.11b, 802.11g, and 802.11n draft 2.0. Physically, this EUT includes two transmitters and three receivers with two incoherent streams. This device uses multiplexing and also employ cyclic delay diversity to improve range and throughput, and this device simultaneously operates on two adjacent channels.
- 2. This EUT is 2\*2 spatial MIMO (2Tx&2Rx) without beam forming function. That operates dual chain configuration. The Pre-test was performed to determine the worst case mode from all possible combinations between all available modulations, data rates, bandwidths, and spatial stream modes.
- 3. The worst case mode was base on the investigations by measuring the peak and average power according to the description above. The detail of chosen mode for full testing are as below:

Mode	Available	Chosen	Modulation	Modulation	Data Rate
Mode	channel	Channel	Technology	Type	(Mbps)
802.11b	1 to 11	1,6,11	DSSS	DBPSK	1
802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1,6,11	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	1 to 7	1,4,7	OFDM	BPSK	13.5

4. Because both antennas operate simultaneously, when performed the relevant conducted measurement(ex. RF output power, peak power spectral density....and so on), we basically use a splitter to combine each antenna port in order to get the total measuring results.


FCC ID: PRLTA-6950

### 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

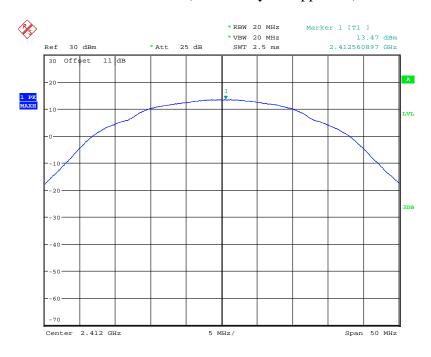


MAX OUTPUT POWER 802.11B CH01 Date: 8.JUL.2011 08:31:57



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

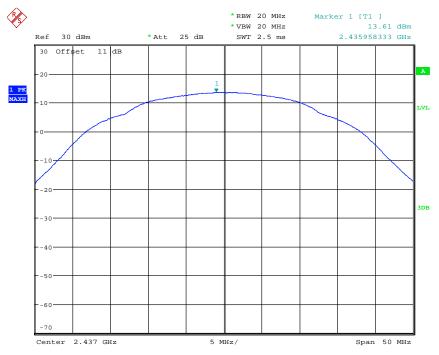

MAX OUTPUT POWER 802.11B CH06 Date: 8.JUL.2011 08:34:17




MAX OUTPUT POWER 802.11B CH11 Date: 8.JUL.2011 08:36:29




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

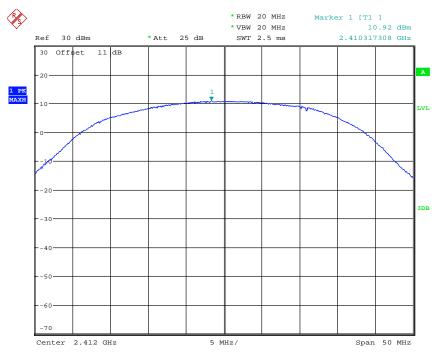

MAX OUTPUT POWER 802.11G CH01 Date: 8.JUL.2011 08:38:53

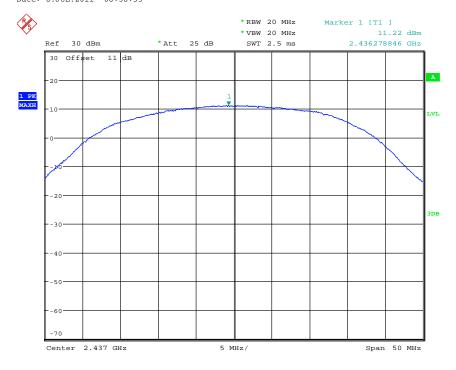


MAX OUTPUT POWER 802.11G CH06 Date: 8.JUL.2011 08:40:57




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

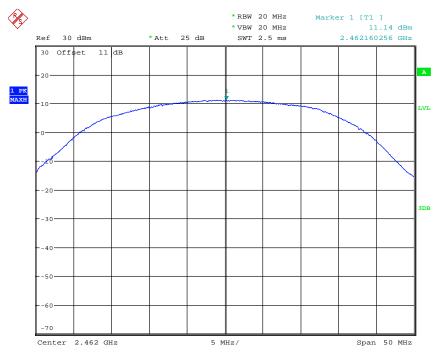

MAX OUTPUT POWER 802.11G CH11 Date: 8.JUL.2011 08:42:41

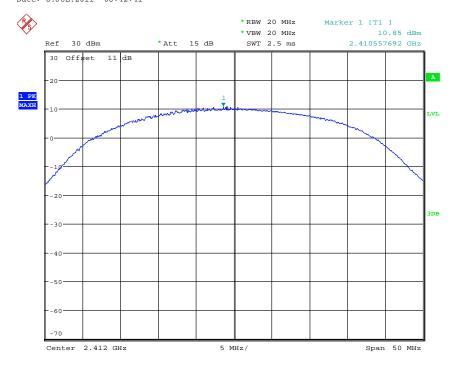


MAX OUTPUT POWER 802.11N 20MHZ CH01
Date: 8.JUL.2011 08:50:05



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

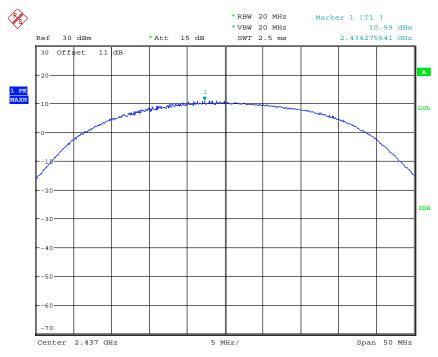

MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 8.JUL.2011 08:52:29




MAX OUTPUT POWER 802.11N 20MHZ CH11
Date: 8.JUL.2011 09:06:37



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

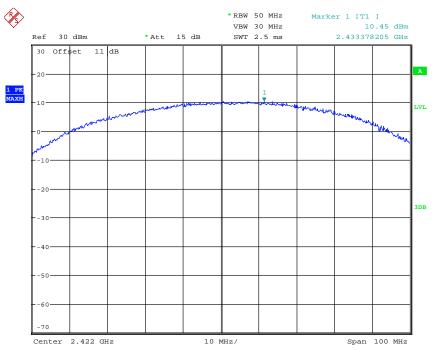

MAX OUTPUT POWER 802.11N 40MHZ CH01 Date: 8.JUL.2011 09:09:17




MAX OUTPUT POWER 802.11N 40MHZ CH04

Date: 8.JUL.2011 09:54:12



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

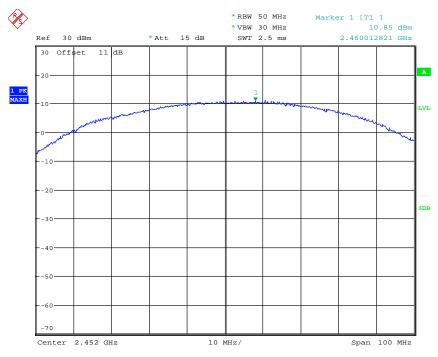

MAX OUTPUT POWER 802.11N 40MHZ CH07 Date: 8.JUL.2011 09:54:51

Test condition $T_{nom}= 23^{\circ}C, \ V_{nom}= 120 \ V$	Signal Field strength TX highest power mode dB $\mu$ V/m
Frequency [MHz]	
	<del></del>

#### Limits:

Frequency	Power
MHz	dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider \$15.247 (b)(4)

Test equipment used: ETSTW-RE 055

FCC ID: PRLTA-6950

### 3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain

EIRP = 13.61 dBm + 0.5 dBi

= 14.11 dBm

Limit: EIRP = +36 dBm for Antenna gain < 6dBi

Test equipment used: ETSTW-RE 055

### 3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

$$S = \frac{PG}{4 \pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain

710 7 michila Gam			
Item	Unit	Value	Remarks
P	mW	22.96149	Peak value
D	dB		
AG	dBi	0.5	
G		1.12	Calculated Value
R	cm	20	Assumed value
S	$mW/cm^2$	0.005	Calculated value

#### Limits:

Limit for General Population	n / Uncontrolled Exposure
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )
1500 – 100.000	1.0

FCC ID: PRLTA-6950

#### 3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq 1$  GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength	Field Strength
(MHz)	(microvolts/meter)	(dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.

FCC ID: PRLTA-6950

#### 3.5 **Spurious Emissions (tx)**

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

#### Limits:

For frequencies above 1GHz (Peak measurements). Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading - 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 030,

ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044

Note: No duty cycle correction was added to the reading of EUT.

FCC ID: PRLTA-6950

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

#### Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

#### Summary table with radiated data of the test plots

Model: TA-6950 Date: 2011/7/9

Mode: 802.11b CH1 Temperature: 24 °C Engineer: Kevin

Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
164.7295	26.63	peak	15.23	41.86	43.50	-1.64	260	150
611.4228	18.83	peak	22.23	41.06	46.00	-4.94	140	150

Frequency (MHz)		iding BuV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4824.0680	34.27		9.49	43.76		74.00	54.00	-30.24	220	100
7236.0000	32.07		13.62	45.69		74.00	54.00	-28.31	50	100
9648.0000	34.27		9.49	43.76		74.00	54.00	-30.24	220	100
12060.0000	32.07		13.62	45.69		74.00	54.00	-28.31	50	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
113.3267	25.43	peak	12.71	38.14	43.50	-5.36	50	150
612.8257	18.17	peak	22.24	40.41	46.00	-5.59	160	150



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	ding uV) Ave.	Factor (dB) Corr.		t @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4825.6510	49.61	46.11	4.57	54.18	50.68	74.00	54.00	-3.32	220	100
7236.0000	40.19		6.93	47.12		74.00	54.00	-26.88	60	100
9648.0000	32.95		9.49	42.44		74.00	54.00	-31.56	240	100
12060.0000	32.27		13.62	45.89		74.00	54.00	-28.11	50	100

Mode: 802.11b CH6

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
164.7295	26.28	peak	15.23	41.51	43.50	-1.99	160	150
611.4228	17.61	peak	22.23	39.84	46.00	-6.16	260	150

Frequency (MHz)		ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4873.7480	43.10		4.59	47.69		74.00	54.00	-26.31	120	100
7311.0000	41.05		6.93	47.98		74.00	54.00	-26.02	200	100
9748.0000	32.42		9.63	42.05		74.00	54.00	-31.95	220	100
12185.0000	31.36		14.66	46.02		74.00	54.00	-27.98	60	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
114.9500	25.27	peak	12.88	38.15	43.50	-5.35	200	150
610.0200	17.78	peak	22.22	40.00	46.00	-6.00	130	150



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4873.7480	43.83		4.59	48.42		74.00	54.00	-25.58	270	100
7311.0000	40.44		6.93	47.37		74.00	54.00	-26.63	40	100
9748.0000	34.75		9.63	44.38		74.00	54.00	-29.62	250	100
12185.0000	32.76		14.66	47.42		74.00	54.00	-26.58	130	100

Mode: 802.11b CH11

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	26.56	peak	15.20	41.76	43.50	-1.74	260	150
323.8476	24.56	peak	15.96	40.52	46.00	-5.48	130	150

Frequency (MHz)		ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4921.8440	42.35		4.67	47.02		74.00	54.00	-26.98	220	100
7386.0000	40.31		6.84	47.15		74.00	54.00	-26.85	130	100
9848.0000	33.18		9.77	42.95		74.00	54.00	-31.05	200	100
12310.0000	32.1		14.27	46.37		74.00	54.00	-27.63	270	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
163.6473	22.50	peak	15.28	37.78	43.50	-5.72	0	150
406.6132	16.83	peak	17.93	34.76	46.00	-11.24	200	150



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) : Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4921.8440	44.14	 4.67	48.81		74.00	54.00	-25.19	200	100
7386.0000	41.17	 6.84	48.01		74.00	54.00	-25.99	140	100
9848.0000	33.85	 9.77	43.62		74.00	54.00	-30.38	200	100
12310.0000	32.57	 14.27	46.84		74.00	54.00	-27.16	310	100

Mode: 802.11g CH1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
164.1884	26.94	peak	15.25	42.19	43.50	-1.31	130	150
323.8476	24.04	peak	15.96	40.00	46.00	-6.00	310	140

Frequency (MHz)		ding avV) Ave.	Factor (dB) Corr.		t @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4824.0000	41.91		4.57	46.48		74.00	54.00	-27.52	235	100
7236.0000	40.08		6.93	47.01		74.00	54.00	-26.99	140	100
9648.0000	34.09		9.49	43.58		74.00	54.00	-30.42	120	100
12060.0000	32.9		13.62	46.52		74.00	54.00	-27.48	95	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
119.8196	25.03	peak	13.40	38.43	43.50	-5.07	100	150
323.8476	21.39	peak	15.96	37.35	46.00	-8.65	130	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.	-	@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4824.0000	43.72	 4.57	48.29		74.00	54.00	-25.71	110	100
7236.0000	41.10	 6.93	48.03		74.00	54.00	-25.97	150	100
9648.0000	34.19	 9.49	43.68		74.00	54.00	-30.32	230	100
12060.0000	32.44	 13.62	46.06		74.00	54.00	-27.94	210	100

Mode: 802.11g CH6

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	26.88	peak	15.20	42.08	43.50	-1.42	260	150
323.8476	24.97	peak	15.96	40.93	46.00	-5.07	135	100

Frequency (MHz)		ding avV) Ave.	Factor (dB) Corr.		t @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4874.0000	40.58		4.59	45.17		74.00	54.00	-28.83	165	100
7311.0000	40.62		6.93	47.55		74.00	54.00	-26.45	120	100
9311.0000	36.49		8.91	45.40		74.00	54.00	-28.60	135	100
12185.0000	33.52		14.66	48.18		74.00	54.00	-25.82	120	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
120.9018	25.61	peak	13.48	39.09	43.50	-4.41	200	150
610.0200	18.46	peak	22.22	40.68	46.00	-5.32	155	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4874.0000	40.51	 4.59	45.10		74.00	54.00	-28.90	112	100
7311.0000	40.33	 6.93	47.26		74.00	54.00	-26.74	160	100
9748.0000	32.96	 9.63	42.59		74.00	54.00	-31.41	150	100
12185.0000	32.75	 14.66	47.41		74.00	54.00	-26.59	160	100

Mode: 802.11g CH11

Polarization: Horizontal

1 Oldinzationii	TIOTIZOTICAL							
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
164.7295	26.29	peak	15.23	41.52	43.50	-1.98	290	130
323.8476	25.61	peak	15.96	41.57	46.00	-4.43	260	150

Frequency (MHz)		ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4924.0000	41.59		4.68	46.27		74.00	54.00	-27.73	105	100
7386.0000	40.14		6.84	46.98		74.00	54.00	-27.02	310	100
9848.0000	34.77		9.77	44.54		74.00	54.00	-29.46	160	100
12310.0000	31.34		14.27	45.61		74.00	54.00	-28.39	120	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	24.33	peak	15.20	39.53	43.50	-3.97	210	150
610.0200	18.37	peak	22.22	40.59	46.00	-5.41	230	150



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4924.0000	41.21	 4.68	45.89		74.00	54.00	-28.11	230	100
7386.0000	40.51	 6.84	47.35		74.00	54.00	-26.65	190	100
9848.0000	33.77	 9.77	43.54		74.00	54.00	-30.46	170	100
12310.0000	31.74	 14.27	46.01		74.00	54.00	-27.99	100	100

Mode: 802.11n 20MHz CH1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	25.93	peak	15.20	41.13	43.50	-2.37	140	130
323.8476	24.56	peak	15.96	40.52	46.00	-5.48	130	100

Frequency (MHz)		ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4844.0000	41.29		4.58	45.87		74.00	54.00	-28.13	300	100
7266.0000	39.42		6.94	46.36		74.00	54.00	-27.64	260	100
9688.0000	35.31		9.51	44.82		74.00	54.00	-29.18	180	100
12110.0000	33.27		14.00	47.27		74.00	54.00	-26.73	160	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
136.5932	23.41	peak	14.57	37.98	43.50	-5.52	260	150
323.8476	21.98	peak	15.96	37.94	46.00	-8.06	210	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4844.0000	40.95	 4.58	45.53		74.00	54.00	-28.47	255	100
7266.0000	39.30	 6.94	46.24		74.00	54.00	-27.76	240	100
9688.0000	33.77	 9.51	43.28		74.00	54.00	-30.72	130	100
12110.0000	32.92	 14.00	46.92		74.00	54.00	-27.08	160	100

Mode: 802.11n 20MHz CH6

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	26.30	peak	15.20	41.50	43.50	-2.00	140	135
323.8476	24.65	peak	15.96	40.61	46.00	-5.39	310	100

Frequency (MHz)		ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4874.0000	40.75		4.59	45.34		74.00	54.00	-28.66	165	100
7311.0000	40.35		6.93	47.28		74.00	54.00	-26.72	130	100
9748.0000	34.08		9.63	43.71		74.00	54.00	-30.29	110	100
12185.0000	32.45		14.66	47.11		74.00	54.00	-26.89	240	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
119.2786	25.39	peak	13.34	38.73	43.50	-4.77	135	100
323.8476	22.15	peak	15.96	38.11	46.00	-7.89	155	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4874.0000	40.79	 4.59	45.38		74.00	54.00	-28.62	235	100
7311.0000	40.40	 6.93	47.33		74.00	54.00	-26.67	220	100
9748.0000	33.9	 9.63	43.53		74.00	54.00	-30.47	265	100
12185.0000	32.22	 14.66	46.88		74.00	54.00	-27.12	240	100

Mode: 802.11n 20MHz CH11

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	25.72	peak	15.20	40.92	43.50	-2.58	240	135
323.8476	25.50	peak	15.96	41.46	46.00	-4.54	155	100

Frequency (MHz)		ding avV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4904.0000	41.31		4.61	45.92		74.00	54.00	-28.08	115	100
7356.0000	39.20		6.87	46.07		74.00	54.00	-27.93	130	100
9808.0000	34.34		9.75	44.09		74.00	54.00	-29.91	230	100
12260.0000	32.92		14.47	47.39		74.00	54.00	-26.61	240	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
120.9018	25.26	peak	13.48	38.74	43.50	-4.76	260	150
323.8476	22.30	peak	15.96	38.26	46.00	-7.74	205	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4904.0000	41.67	 4.61	46.28		74.00	54.00	-27.72	50	100
7356.0000	39.18	 6.87	46.05		74.00	54.00	-27.95	310	100
9808.0000	35.06	 9.75	44.81		74.00	54.00	-29.19	105	100
12260.0000	33.29	 14.47	47.76		74.00	54.00	-26.24	240	100

Mode: 802.11n 40MHz CH1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	25.43	peak	15.20	40.63	43.50	-2.87	120	150
323.8476	24.14	peak	15.96	40.10	46.00	-5.90	255	100

Frequency (MHz)		ding avV) Ave.	Factor (dB) Corr.		t @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4844.0000	41.16		4.58	45.74		74.00	54.00	-28.26	130	100
7266.0000	39.15		6.94	46.09		74.00	54.00	-27.91	160	100
9688.0000	34.11		9.51	43.62		74.00	54.00	-30.38	125	100
12110.0000	32.45		14.00	46.45		74.00	54.00	-27.55	140	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
119.8196	25.43	peak	13.40	38.83	43.50	-4.67	250	100
323.8476	23.15	peak	15.96	39.11	46.00	-6.89	245	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		t @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4844.0000	41.20	 4.58	45.78		74.00	54.00	-28.22	170	100
7266.0000	39.57	 6.94	46.51		74.00	54.00	-27.49	205	100
9688.0000	33.67	 9.51	43.18		74.00	54.00	-30.82	240	100
12110.0000	32.89	 14.00	46.89		74.00	54.00	-27.11	260	100

Mode: 802.11n 40MHz CH4

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
172.8456	26.20	peak	14.70	40.90	43.50	-2.60	225	110
323.8476	25.42	peak	15.96	41.38	46.00	-4.62	165	100

Frequency (MHz)		ding avV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4847.0000	41.22		4.58	45.80		74.00	54.00	-28.20	85	100
7311.0000	40.38		6.93	47.31		74.00	54.00	-26.69	135	100
9748.0000	33.69		9.63	43.32		74.00	54.00	-30.68	160	100
12185.0000	33.45		14.66	48.11		74.00	54.00	-25.89	130	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
120.9018	26.06	peak	13.48	39.54	43.50	-3.96	260	100
323.8476	22.56	peak	15.96	38.52	46.00	-7.48	240	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4874.0000	40.79	 4.59	45.38		74.00	54.00	-28.62	280	100
7311.0000	41.11	 6.93	48.04		74.00	54.00	-25.96	310	100
9748.0000	33.56	 9.63	43.19		74.00	54.00	-30.81	146	100
12185.0000	32.31	 14.66	46.97		74.00	54.00	-27.03	180	100

Mode: 802.11n 40MHz CH7

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2705	25.89	peak	15.20	41.09	43.50	-2.41	170	130
323.8476	24.67	peak	15.96	40.63	46.00	-5.37	233	100

Frequency (MHz)		ding uV) Ave.	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4904.0000	41.27		4.61	45.88		74.00	54.00	-28.12	75	100
7356.0000	39.06		6.87	45.93		74.00	54.00	-28.07	135	100
9808.0000	35.02		9.75	44.77		74.00	54.00	-29.23	160	100
12260.0000	32.70		14.47	47.17		74.00	54.00	-26.83	120	100

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
120.3607	25.35	peak	13.44	38.79	43.50	-4.71	160	100
323.8476	22.14	peak	15.96	38.10	46.00	-7.90	260	100



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Frequency (MHz)	Rea (dB Peak	Factor (dB) Corr.		lt @3m uV/m) Ave.		@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
4904.0000	41.94	 4.61	46.55		74.00	54.00	-27.45	240	100
7356.0000	39.92	 6.87	46.79		74.00	54.00	-27.21	270	100
9808.0000	34.91	 9.75	44.66		74.00	54.00	-29.34	220	100
12260.0000	33.11	 14.47	47.58		74.00	54.00	-26.42	155	100

Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. See attached diagrams as Appendix.

**TEST RESULT** (**Transmitter**): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 030,

ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044


Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 3.6 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

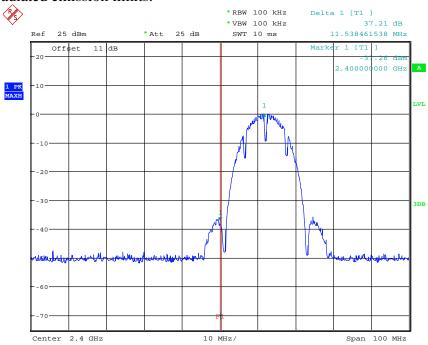


BANDEDGE 802.11B CH01
Date: 8.JUL.2011 08:32:46




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

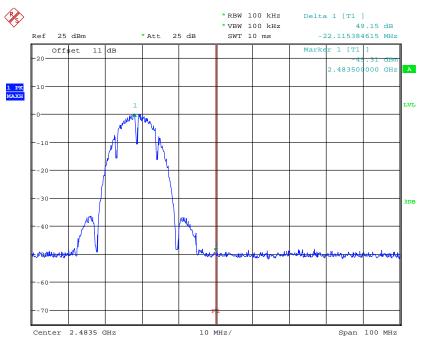

BANDEDGE 802.11B CH11
Date: 8.JUL.2011 08:37:17

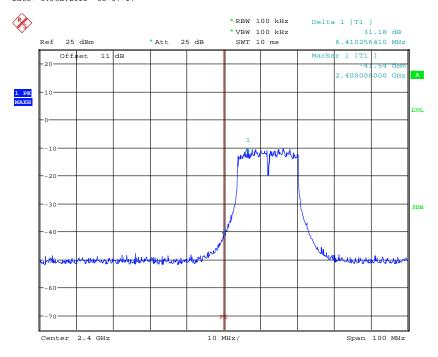


BANDEDGE 802.11G CH01
Date: 8.JUL.2011 08:39:41




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

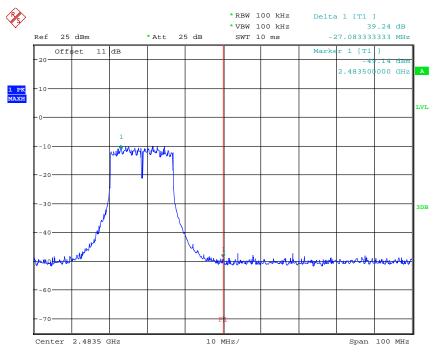

BANDEDGE 802.11G CH11
Date: 8.JUL.2011 08:43:29

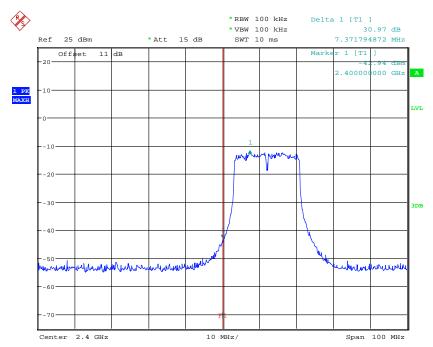


BANDEDGE 802.11N 20MHZ CH01
Date: 8.JUL.2011 08:50:53




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

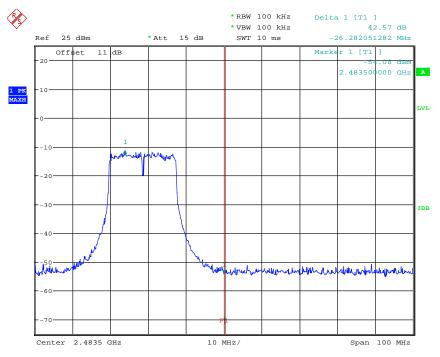

BANDEDGE 802.11N 20MHZ CH11 Date: 8.JUL.2011 09:07:25

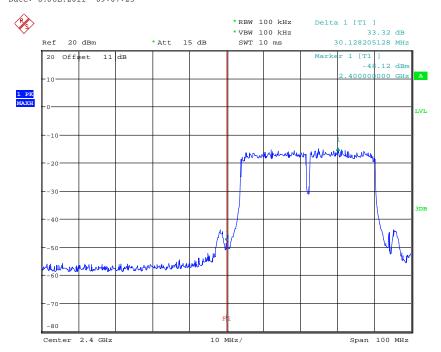


BANDEDGE 802.11N 40MHZ CH01 Date: 8.JUL.2011 09:10:05



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

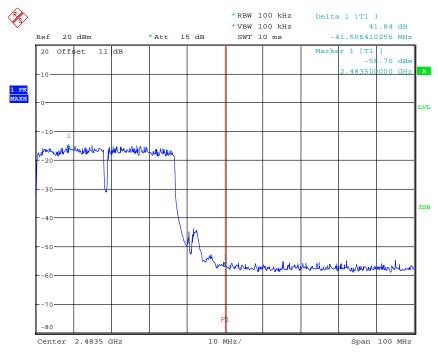

BANDEDGE 802.11N 40MHZ CH07 Date: 8.JUL.2011 09:14:01

### Limit:

Frequency Range / MHz	Limit			
902 –928				
2400 – 2483.5	- 20 dB			
5725 - 5850				

Test equipment used: ETSTW-RE 055

Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 3.7 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.



2 MHz/

Span 20 MHz


6DB BANDWIDTH 802.11B CH01 Date: 8.JUL.2011 08:33:56

Center 2.412 GHz




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

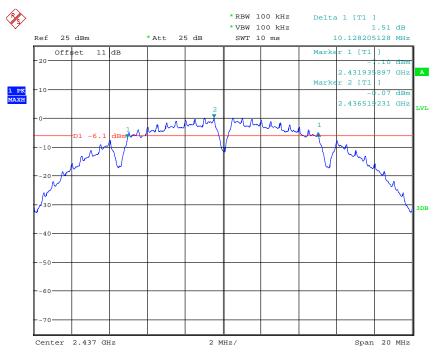

6DB BANDWIDTH 802.11B CH06 Date: 8.JUL.2011 08:36:04

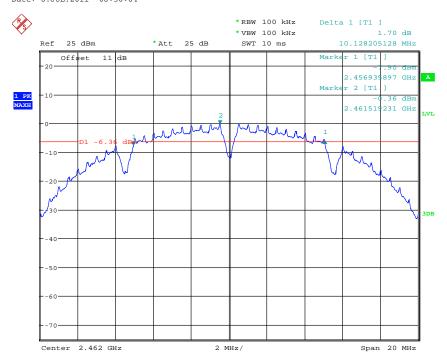


6DB BANDWIDTH 802.11B CH11 Date: 8.JUL.2011 08:38:26




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

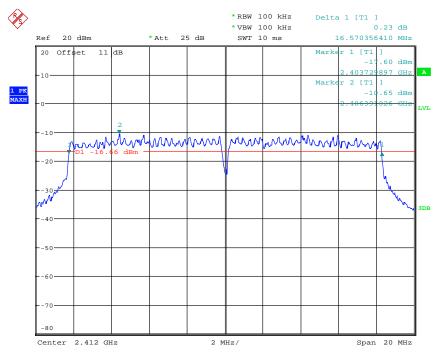

6DB BANDWIDTH 802.11G CH01 Date: 8.JUL.2011 08:40:40

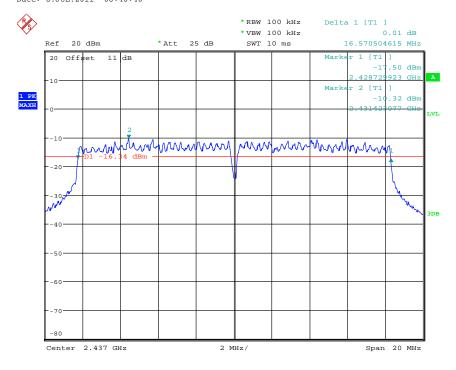


6DB BANDWIDTH 802.11G CH06 Date: 8.JUL.2011 08:42:25




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

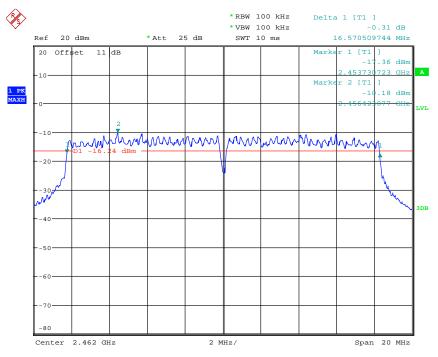

6DB BANDWIDTH 802.11G CH11 Date: 8.JUL.2011 08:44:33

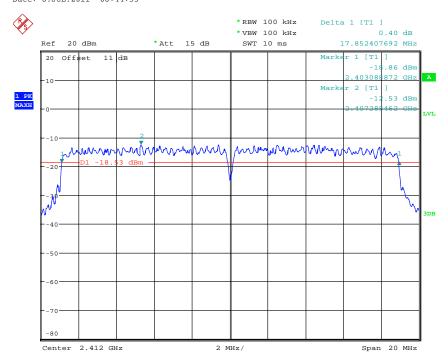


6DB BANDWIDTH 802.11N 20MHZ CH01 Date: 8.JUL.2011 08:52:13




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

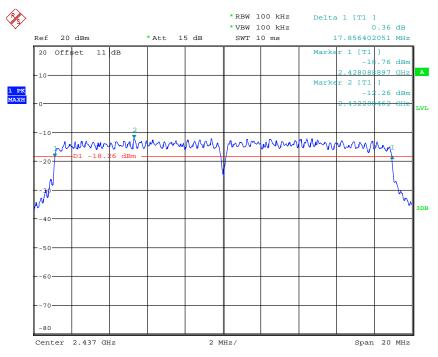

6DB BANDWIDTH 802.11N 20MHZ CH06 Date: 8.JUL.2011 09:06:22

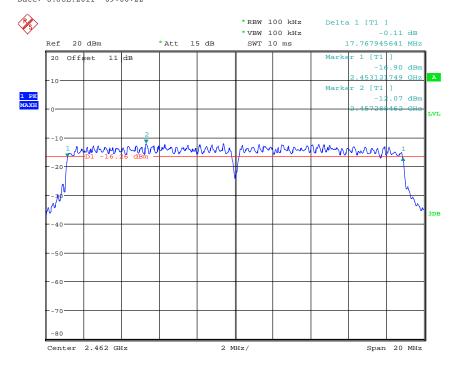


6DB BANDWIDTH 802.11N 20MHZ CH11
Date: 8.JUL.2011 09:08:47




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

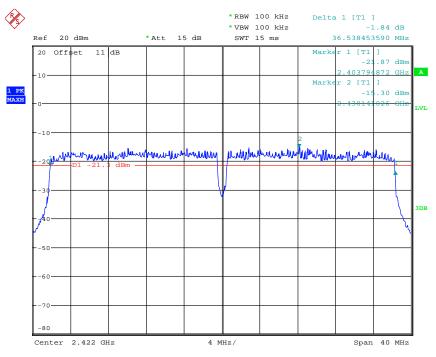

6DB BANDWIDTH 802.11N 40MHZ CH01 Date: 8.JUL.2011 09:10:55

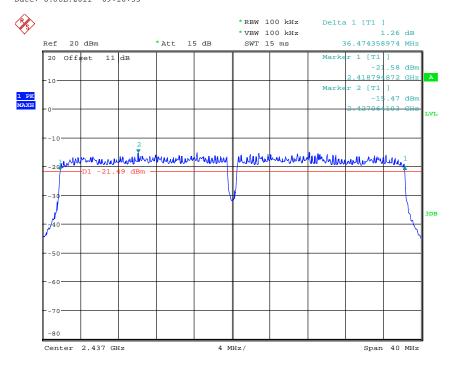


6DB BANDWIDTH 802.11N 40MHZ CH04 Date: 8.JUL.2011 09:51:10



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

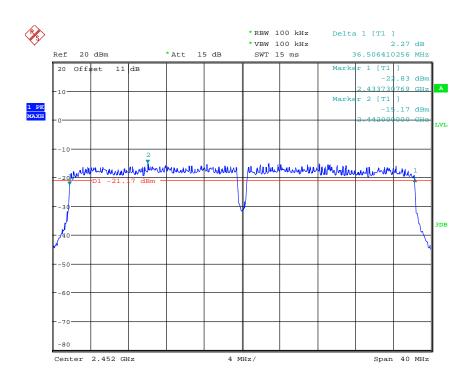

6DB BANDWIDTH 802.11N 40MHZ CH07 Date: 8.JUL.2011 09:15:14

### **Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055


Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

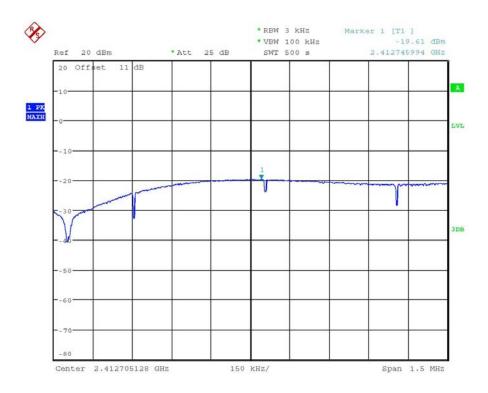


POWER DENSITY 802.11B CH01 Date: 8.JUL.2011 08:32:29




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

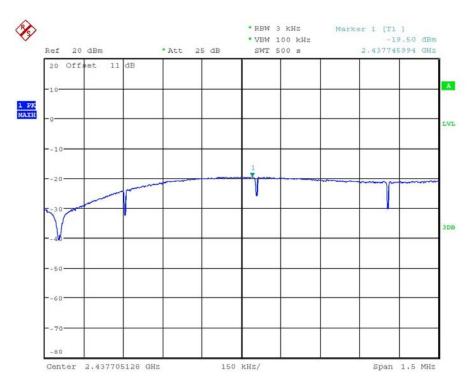

POWER DENSITY 802.11B CH06 Date: 8.JUL.2011 08:34:49

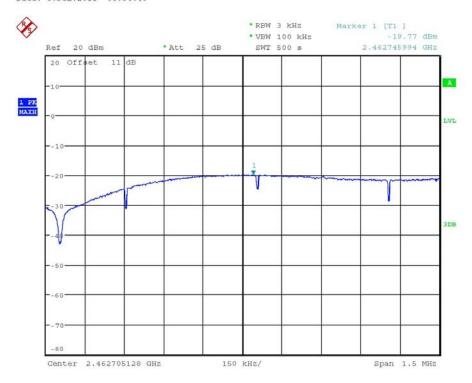


POWER DENSITY 802.11B CH11 Date: 8.JUL.2011 08:37:01




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

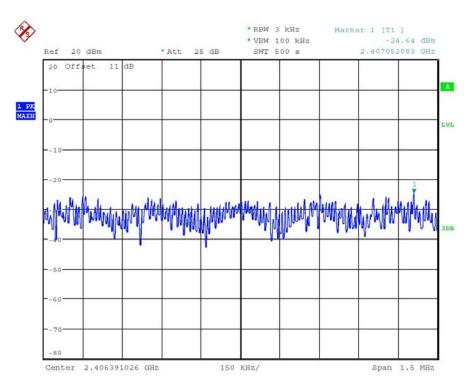

POWER DENSITY 802.11G CH01 Date: 8.JUL.2011 08:39:25

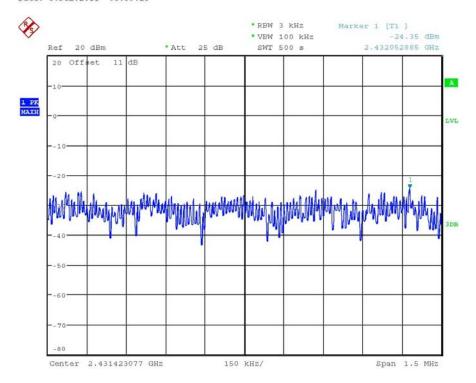


POWER DENSITY 802.11G CH06 Date: 8.JUL.2011 08:41:29




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

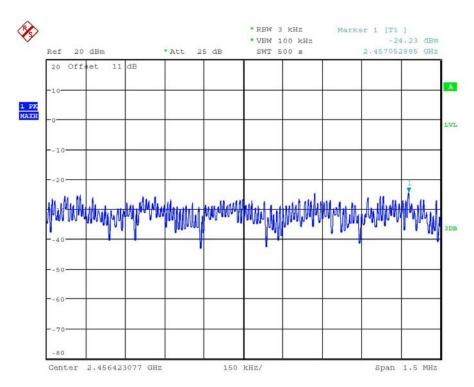

POWER DENSITY 802.11G CH011 Date: 8.JUL.2011 08:43:13

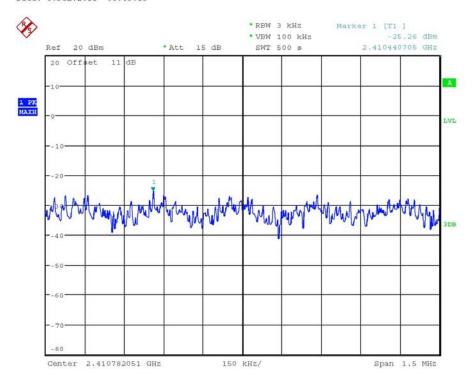


POWER DENSITY 802.11N 20MHZ CH01 Date: 8.JUL.2011 08:50:37




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

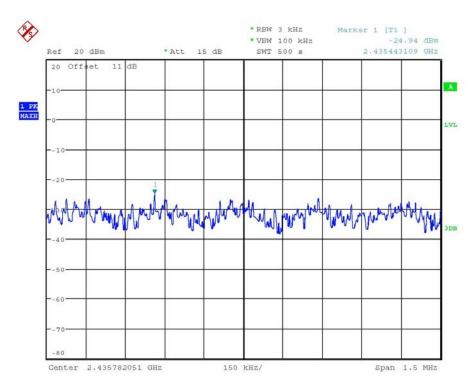

POWER DENSITY 802.11N 20MHZ CH06 Date: 8.JUL.2011 08:53:01

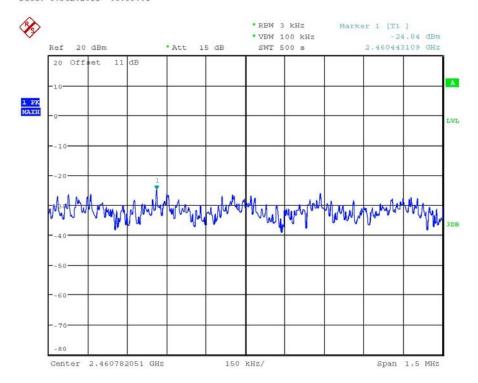


POWER DENSITY 802.11N 20MHZ CH011

Date: 8.JUL.2011 09:07:09




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

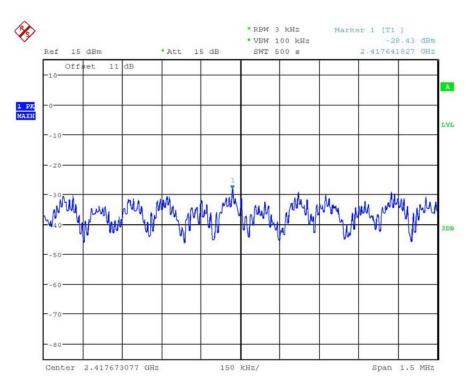

POWER DENSITY 802.11N 40MHZ CH01 Date: 8.JUL.2011 09:09:49

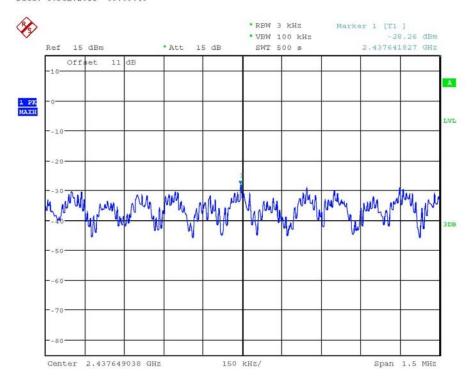


POWER DENSITY 802.11N 40MHZ CH04 Date: 8.JUL.2011 09:11:49



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

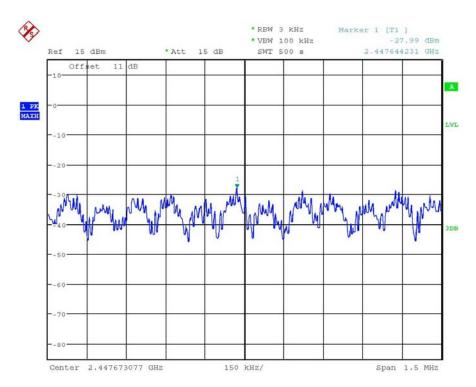

POWER DENSITY 802.11N 40MHZ CH07 Date: 8.JUL.2011 09:13:45

### **Limits:**

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055

Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 3.9 Radiated Emission from Digital Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission	Field Strength	Field Strength		
(MHz)	(microvolts/meter)	(dBmicrovolts/meter)		
30 – 88	100	40.0		
88 – 216	150	43.5		
216 – 960	200	46.0		
Above 960	500	54.0		

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 030,

ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044

Explanation: Please refer to separated test report no.: W6M21106-11625-P-15B.


Registration number: W6M21106-11625-C-1


FCC ID: PRLTA-6950

#### 3.9 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.



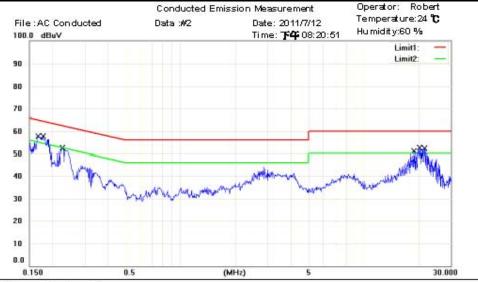

Power: 110VAC

Site: Chamber\_03

Condition: FCC Part 15 Class B Conduction (QP)

EUT: W6M21106-11625


M/N: TA-6950 Test Mode: Note:

MH.	Frequency (MHz)	Reading (dBJV)	Detector	Corrected tector(dB)	Result (dBJV)	Limit (dBuV)	Margin (dB)	Comment
	0.1663	36.70	QP	9.92	46.62	65.14	-18.52	
	0.1663	10.98	AVG	9.92	20.90	55.14	-34.24	
*	0.1771	42.62	QP	9.91	52.53	64.62	-12.09	
	0.1771	23.94	AVG	9.91	33.85	54.62	-20.77	
	0.2260	34.54	QP	9.90	44.44	62.60	-18.16	
	0.2260	12.13	AVG	9.90	22.03	52.60	-30.57	
	18,8000	29.10	QP	10.95	40.05	60.00	-19.95	
- /	18,8000	22.64	AVG	10.95	33.59	50.00	-16.41	
- /	20.1750	31.38	QP	11.00	42.38	60.00	-17.62	
	20.1750	26.18	AVG	11.00	37.18	50.00	-12.82	
- 4	21.4875	31.03	QP	11.06	42.09	60.00	-17.91	
- 4	21.4875	26.80	AVG	11.06	37.86	50.00	-12.14	



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

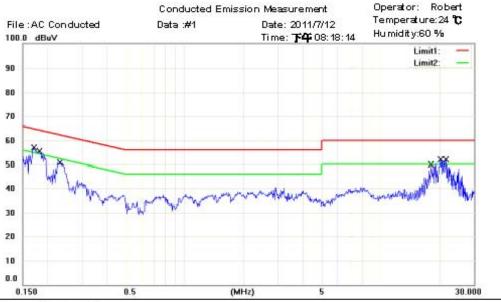

Site: Chamber\_03

Condition: FCC Part 15 Class B Conduction (QP)

EUT: W6M21106-11625

M/N: TA-6950 Test Mode: Note: Phase: L1
Power: 110VAC

MH.	Frequency (MHz)	Reading (dBJV)	Detector	Corrected tector(dB)	Result (dBJV)	Limit (dBuV)	Margin (dB)	Comment
	0.1703	40.34	QP	9.98	50.32	64.95	-14.63	
	0.1703	17.94	AVG	9.98	27.92	54.95	-27.03	
	0.1820	41.10	QP	9.96	51.06	64.39	-13.33	
	0.1820	22.20	AVG	9.96	32.16	54.39	-22.23	
	0.2316	35,39	QP	9.95	45.34	62.39	-17.05	
	0.2316	1821	AVG	9.95	28.16	52.39	-24.23	
	18.0375	33.82	QP	11.14	44.96	60.00	-15.04	
*	18.0375	26.92	AVG	11.14	38.06	50.00	-11.94	
	20.1875	32.97	QP	11.24	44.21	60.00	-15.79	
	20.1875	26.48	AVG	11.24	37.72	50.00	-12.28	
1	21,5000	30.97	QP	11.33	42.30	60.00	-17.70	
	21,5000	26.64	AVG	11.33	37.97	50.00	-12.03	

- Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor
  - 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
  - 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
  - 4. All not in the table noted test results are more than 20 dB below the relevant limits.
  - 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

#### **Limits:**

Frequency of Emission (MHz)	Conducted I	Limit (dBuV)
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-CE 006

Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### **Appendix**

### **Measurement diagrams**

Spurious Emissions radiated




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

Spurious Emissions radiated\_TX

802.11b Channel 1

Antenna Polarization H

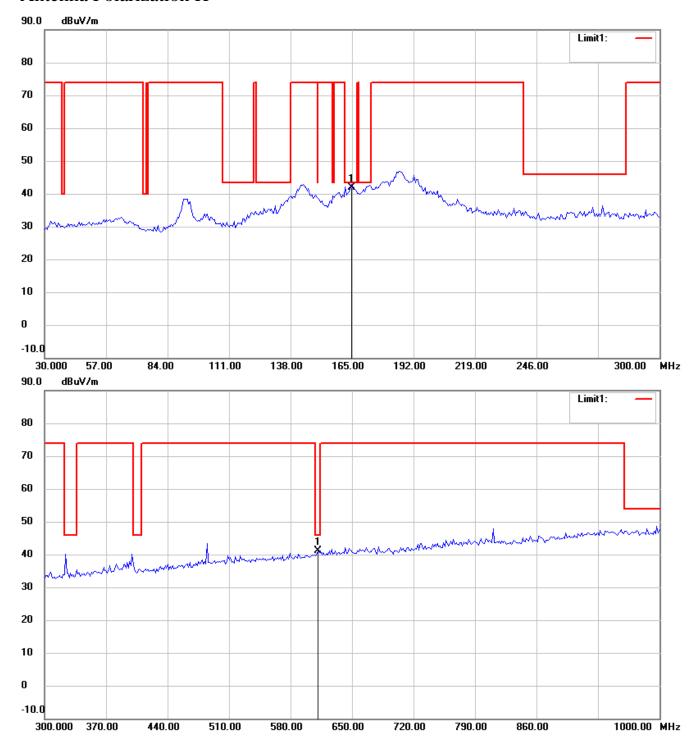


#### Note:

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

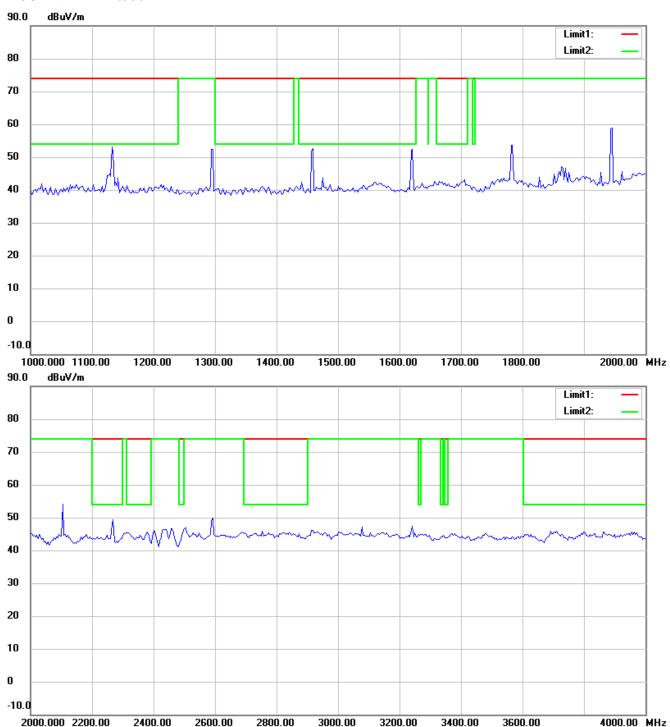


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

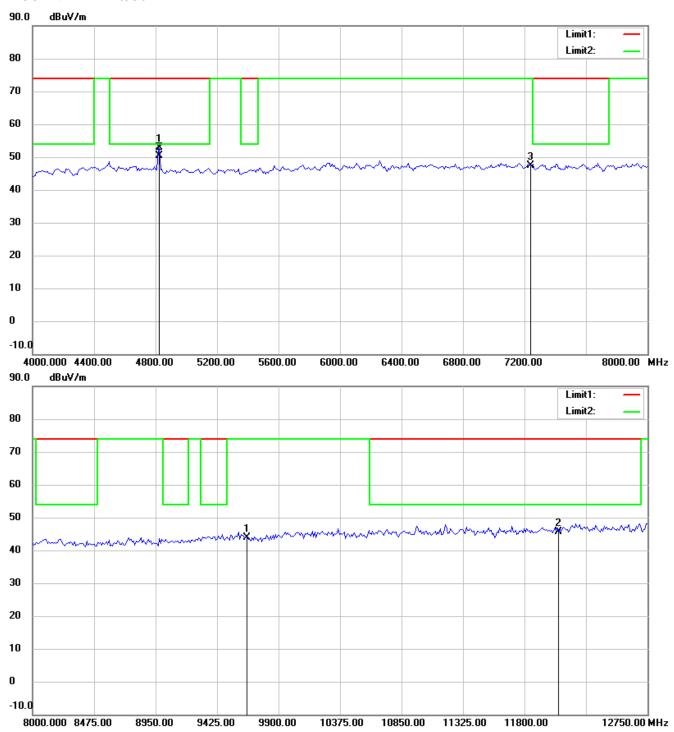


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

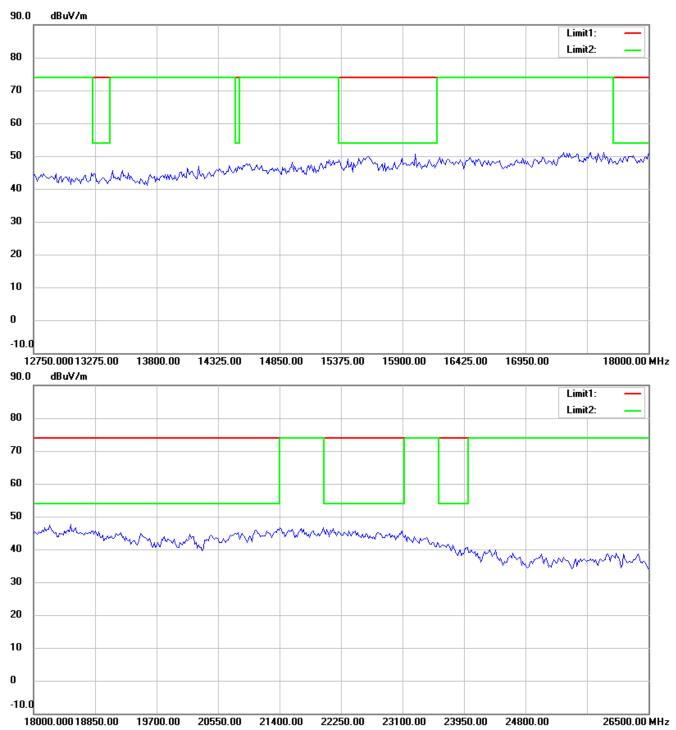

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

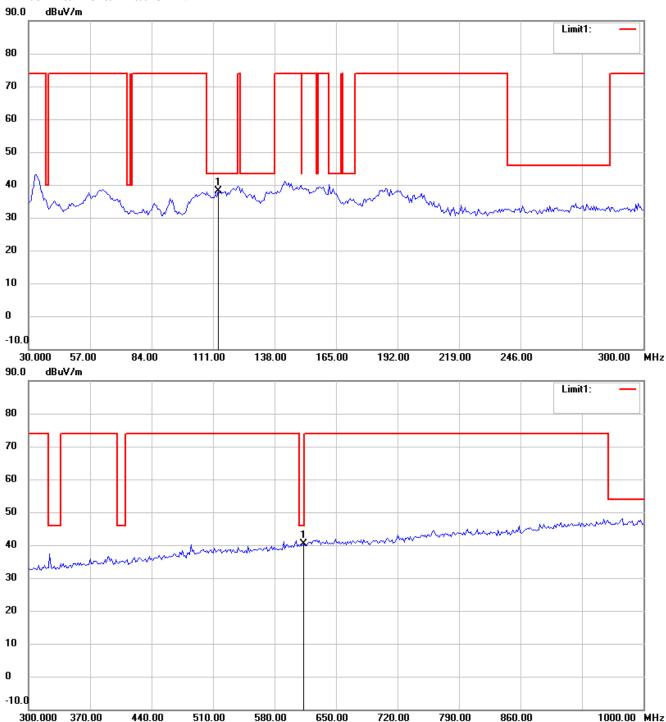


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

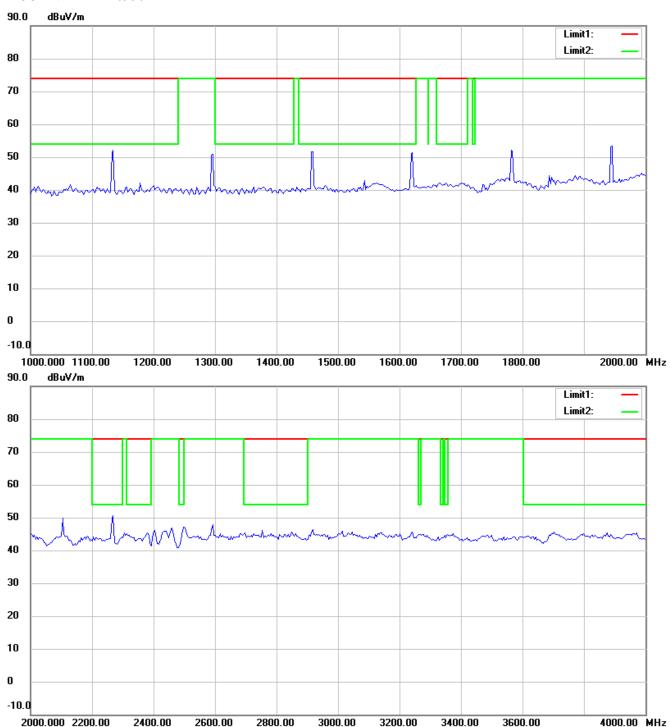


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

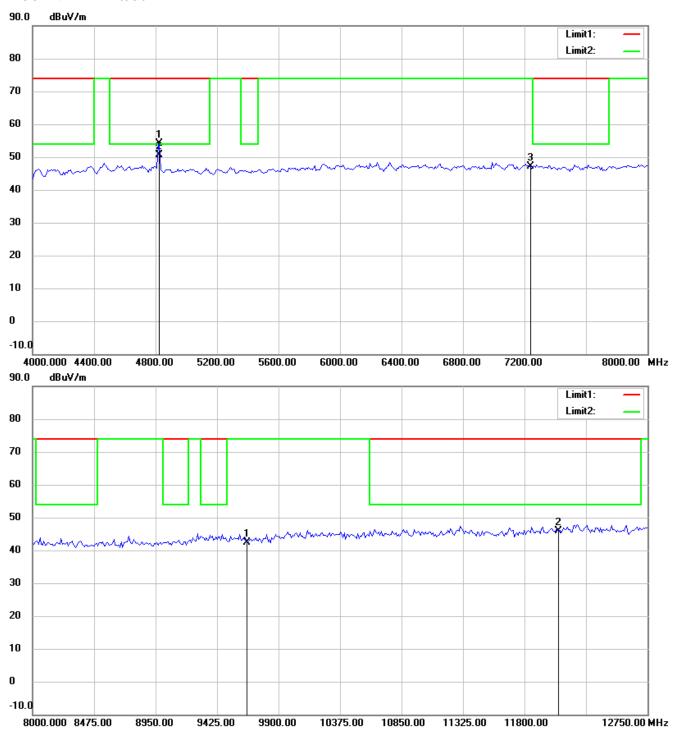


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

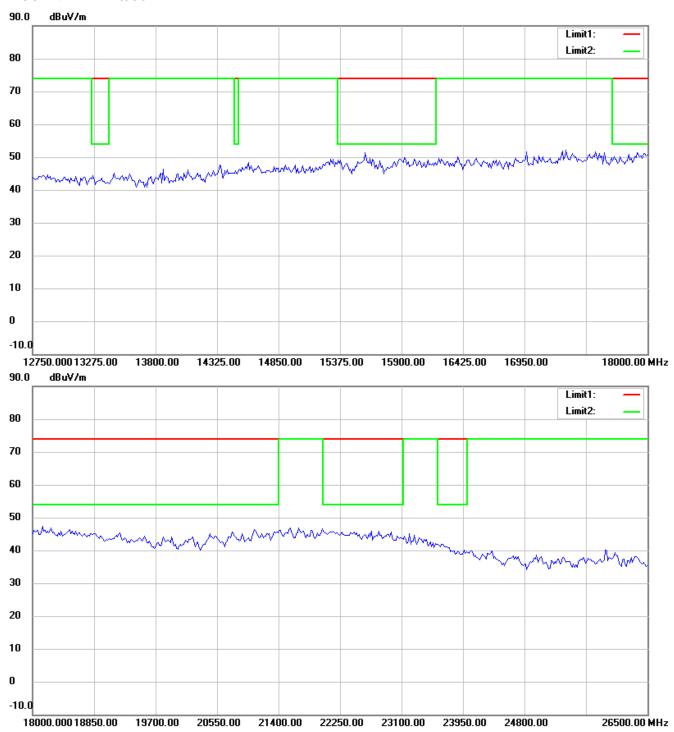

#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11b Channel 6

### Antenna Polarization H

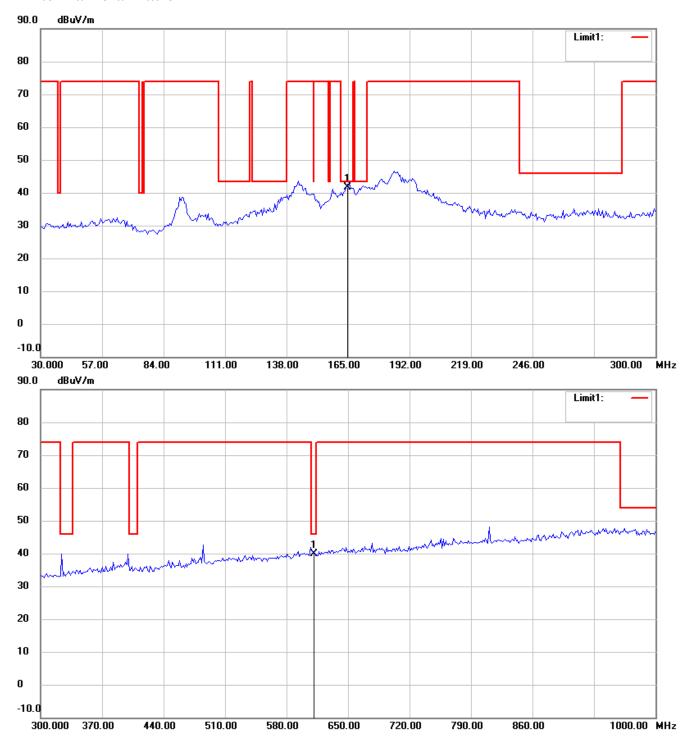


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

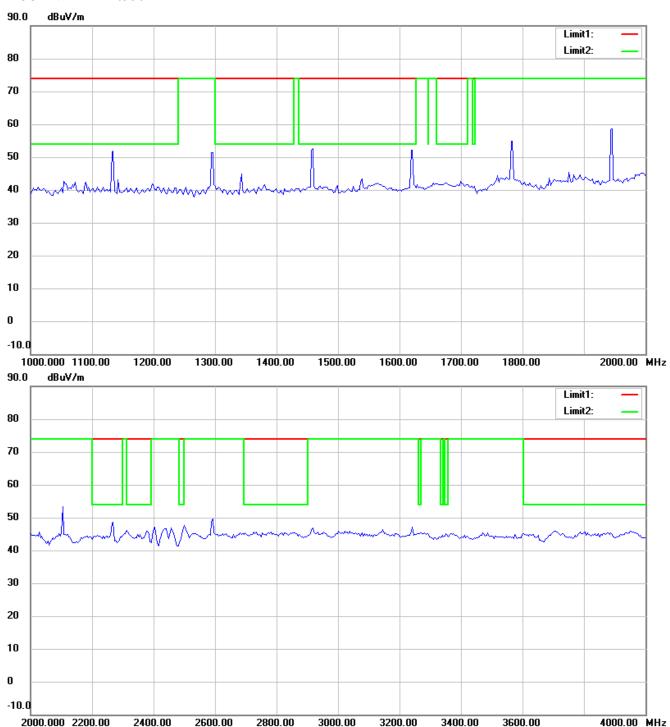


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

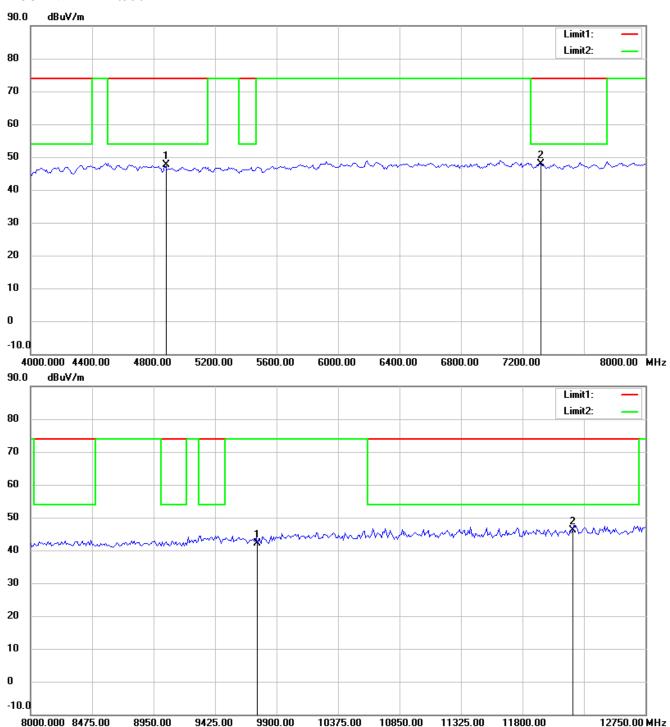


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

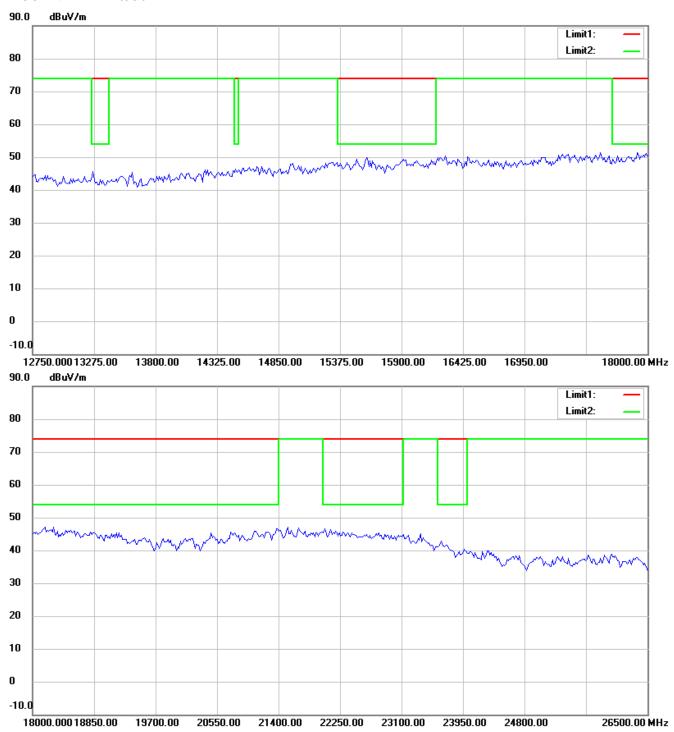

#### Note


- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

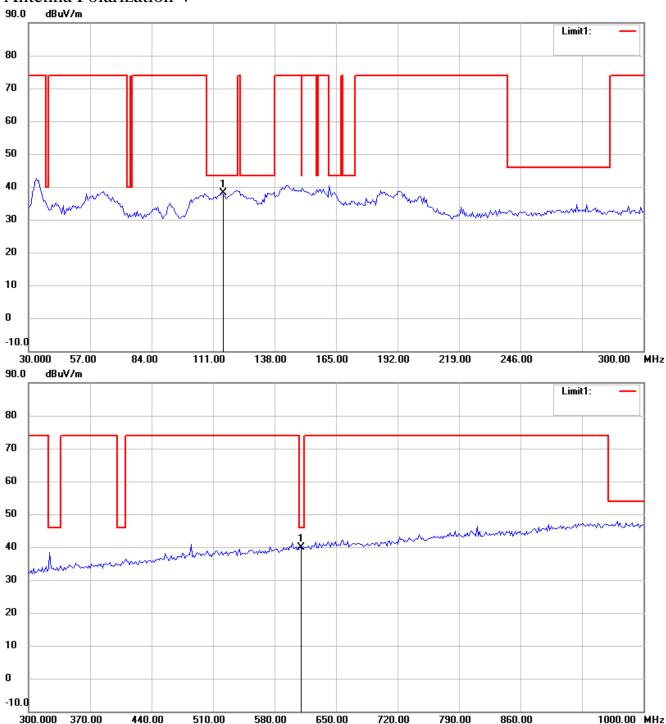


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

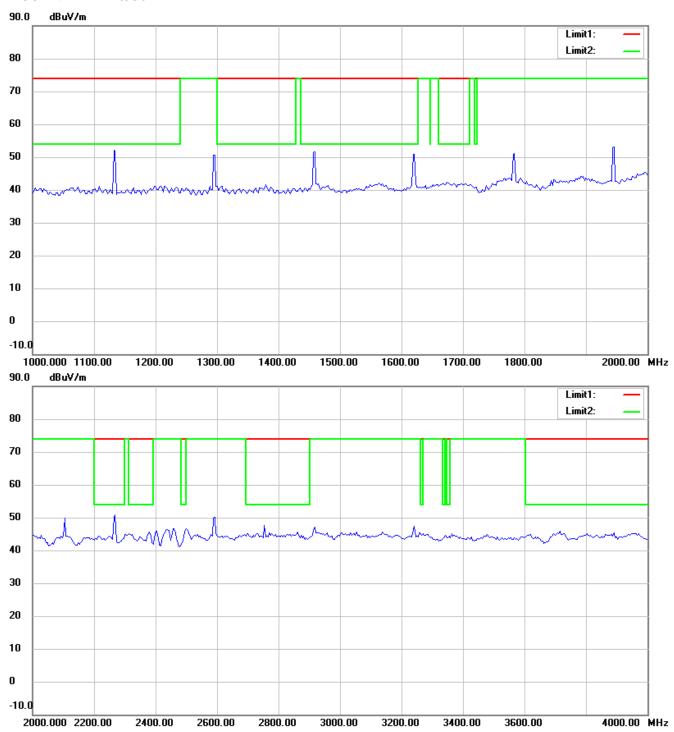


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

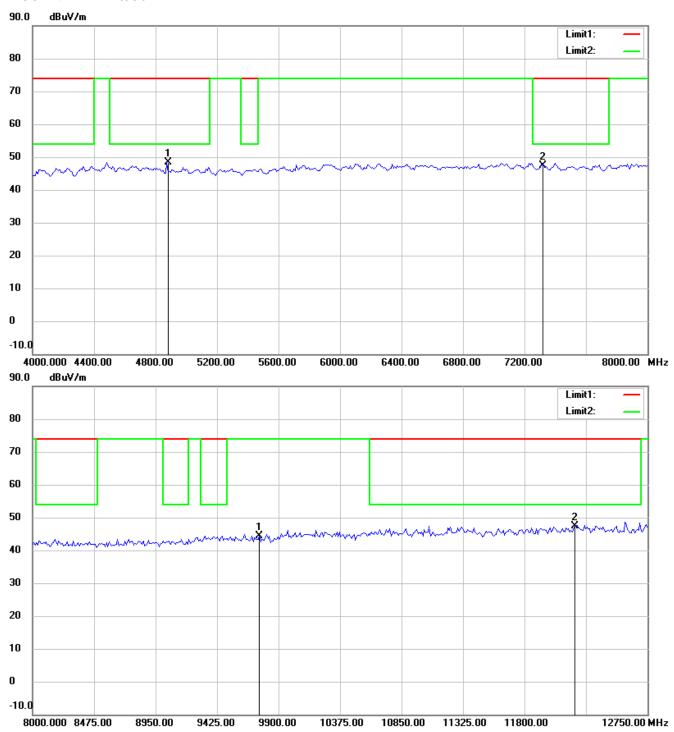


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

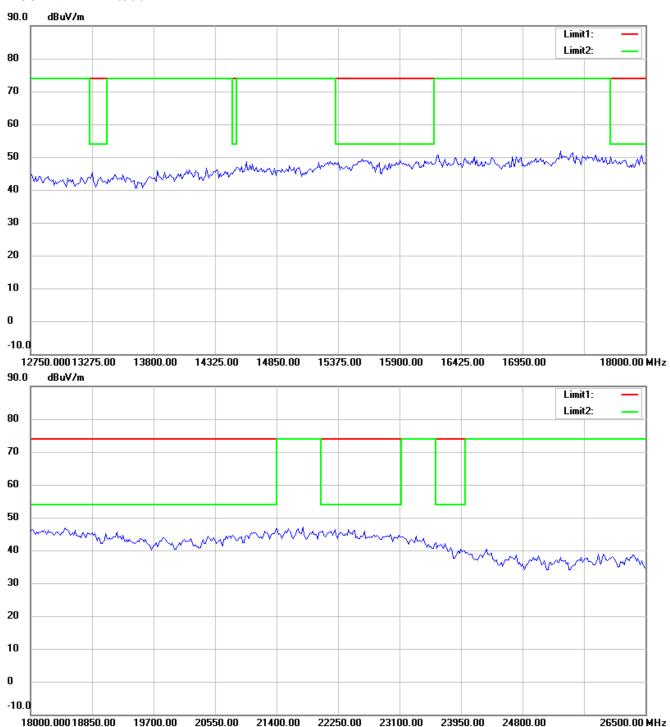

#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11b Channel 11

### Antenna Polarization H

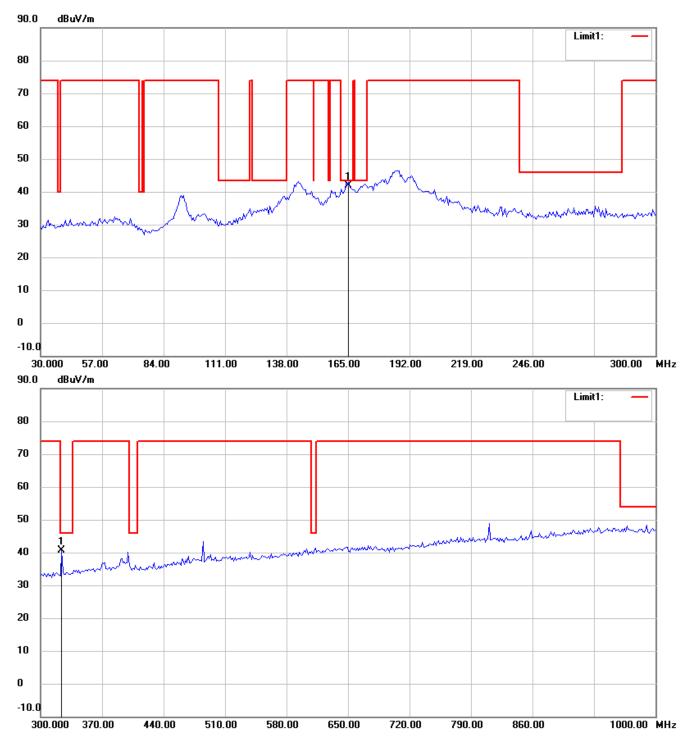


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

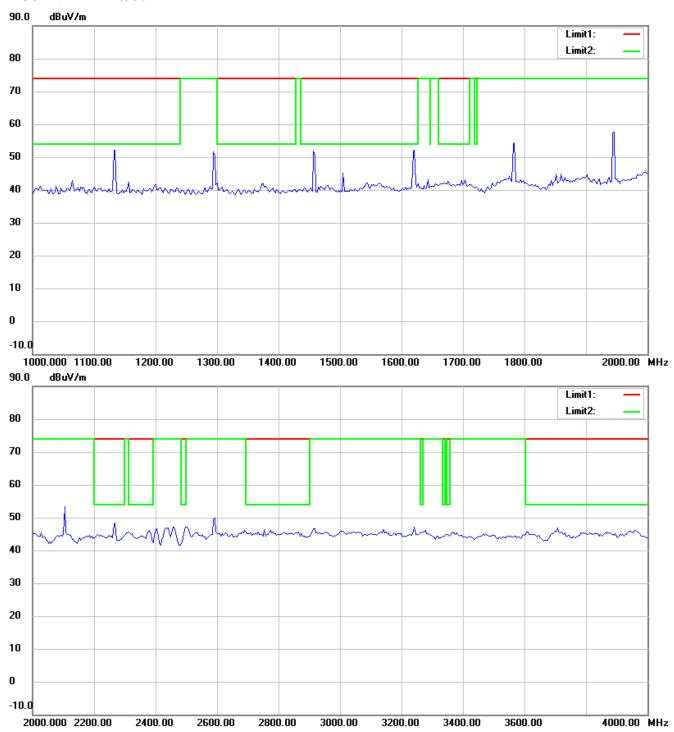


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

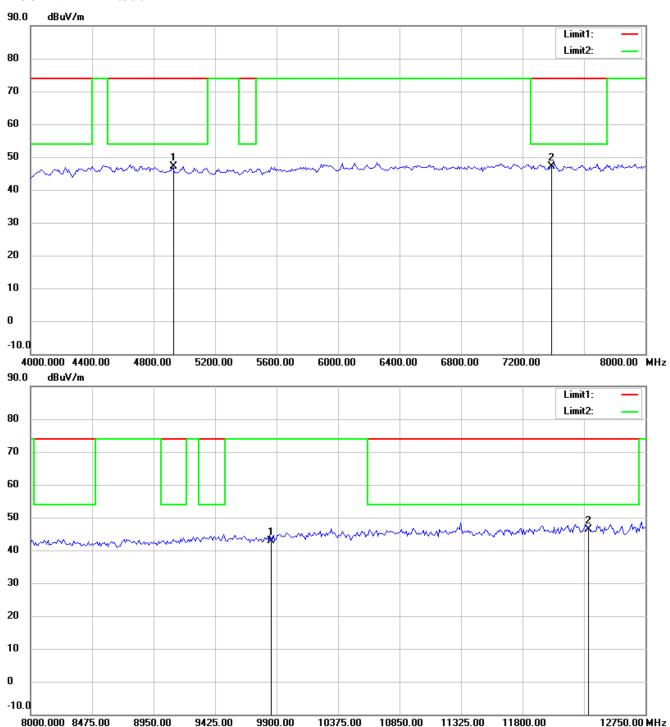


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

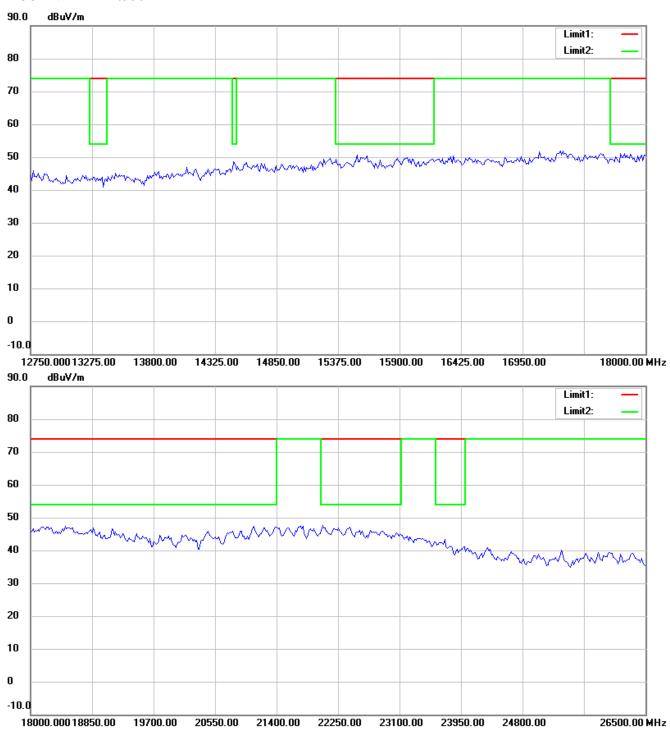

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

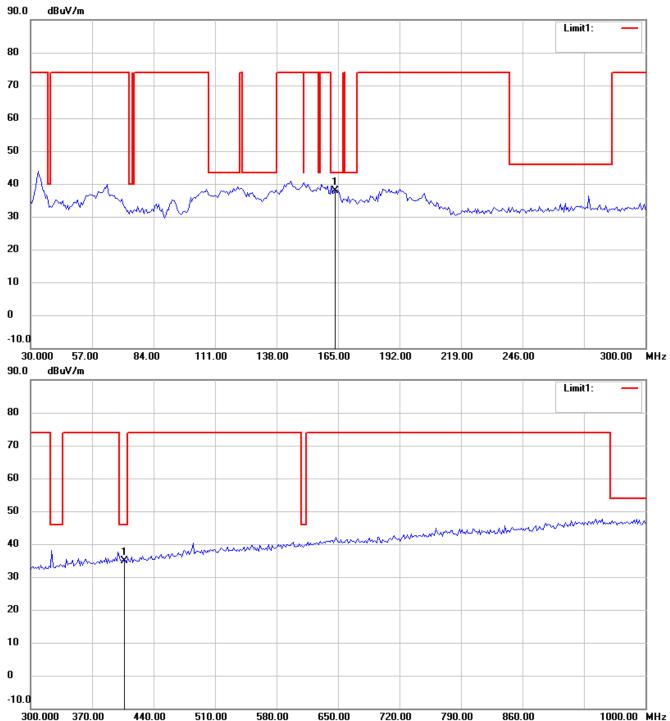

#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950




#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

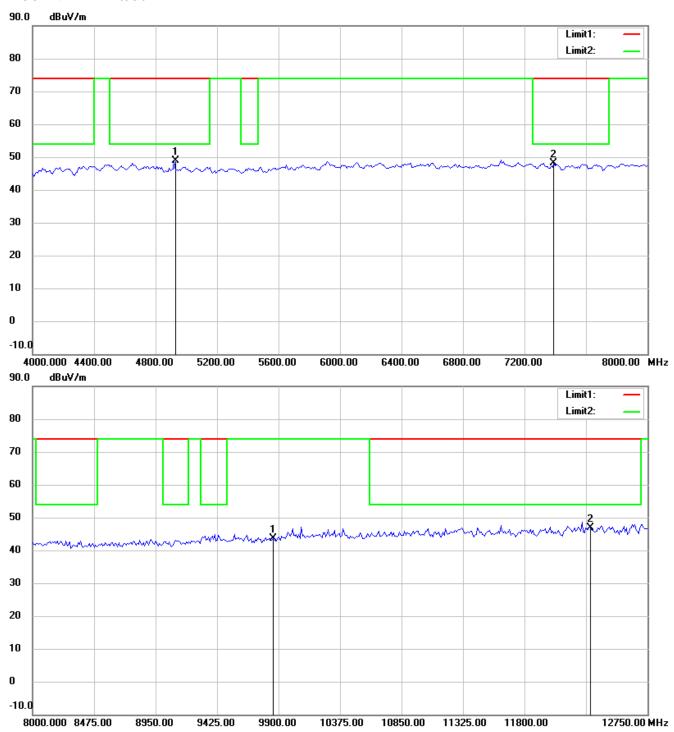


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

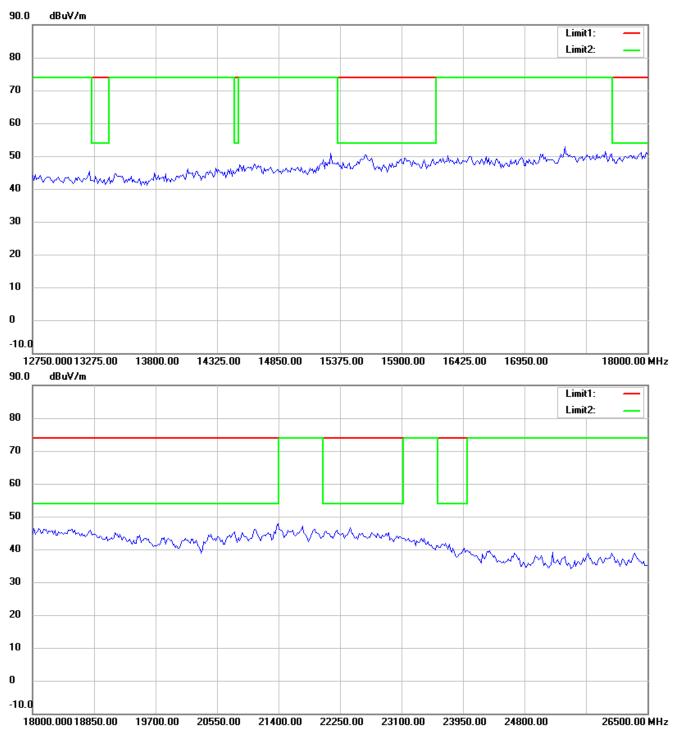

#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11g Channel 1

### Antenna Polarization H

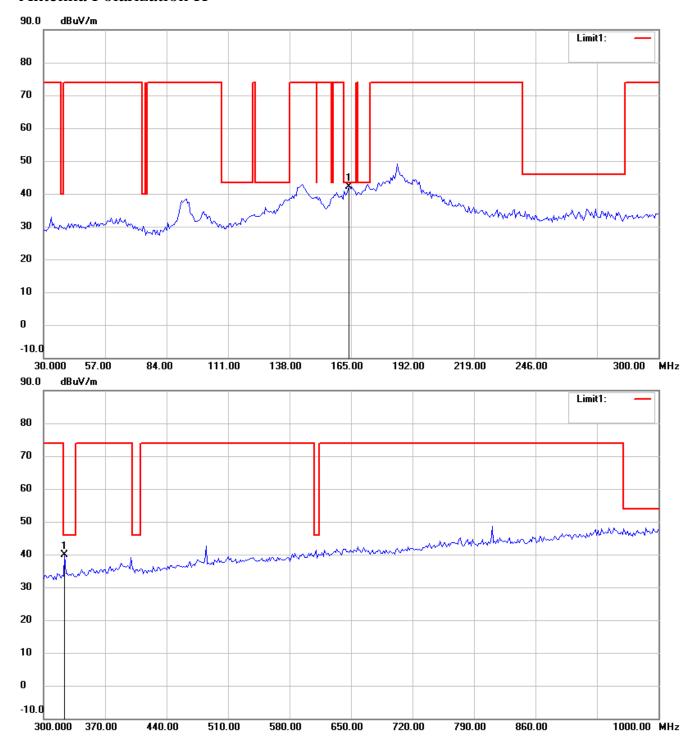


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

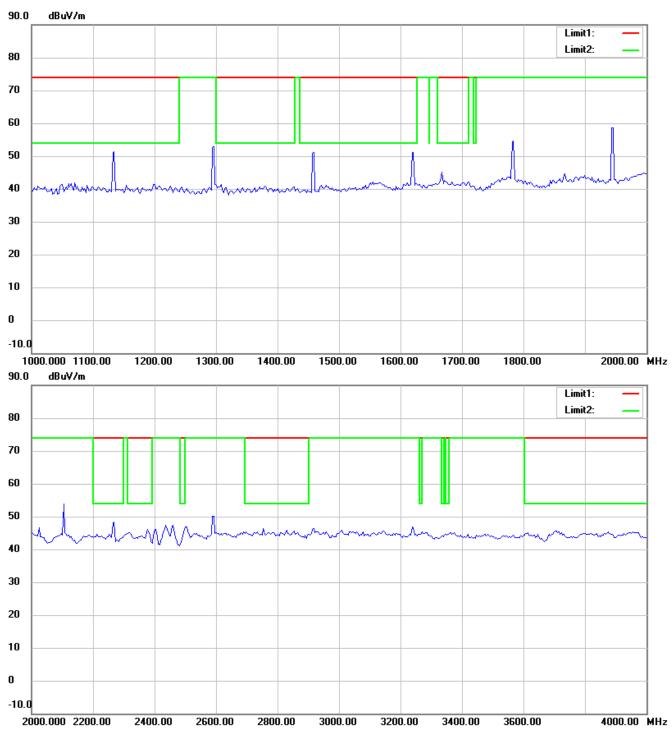


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

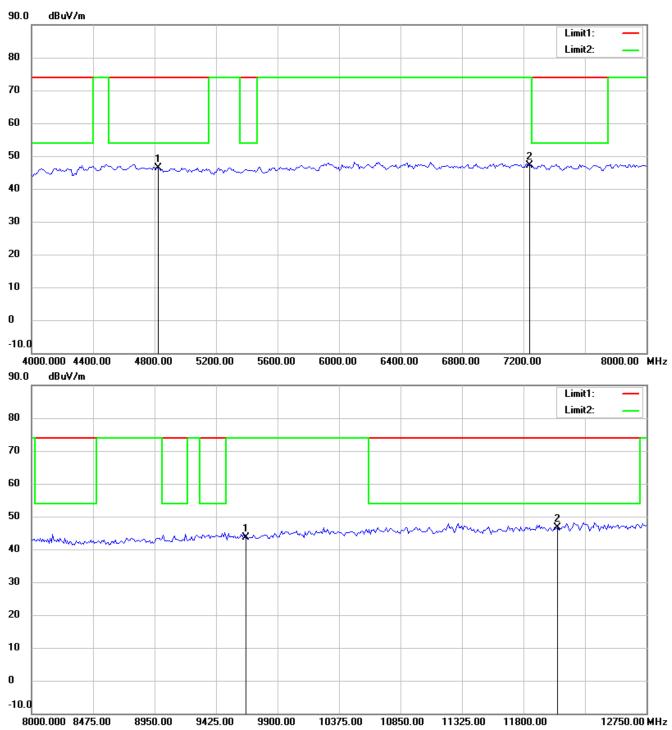


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

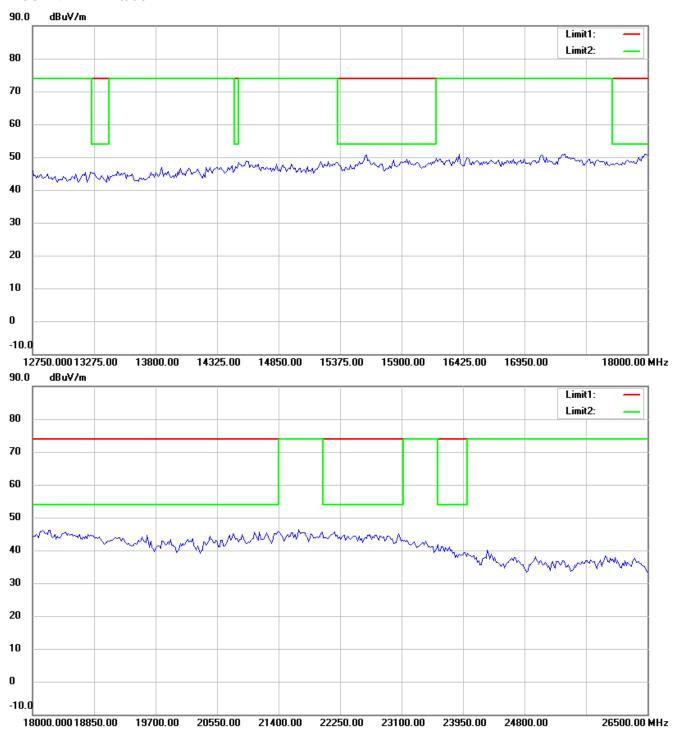

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

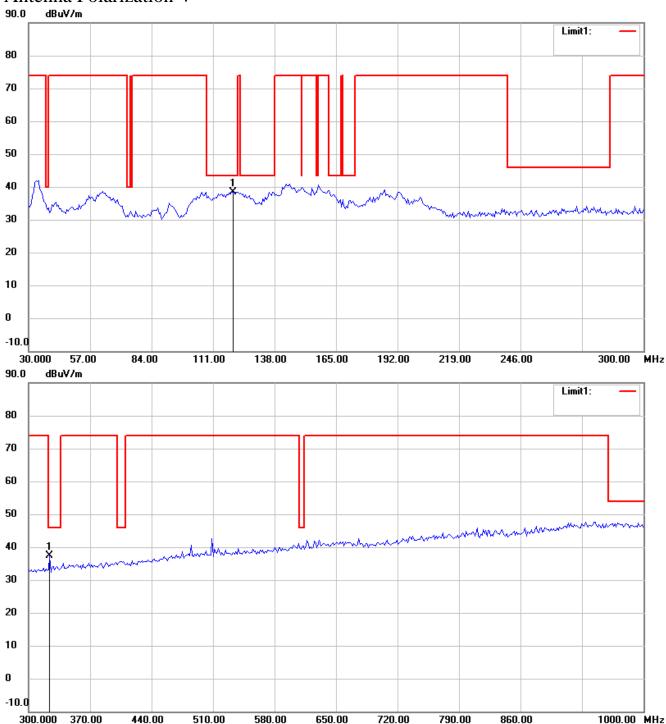


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

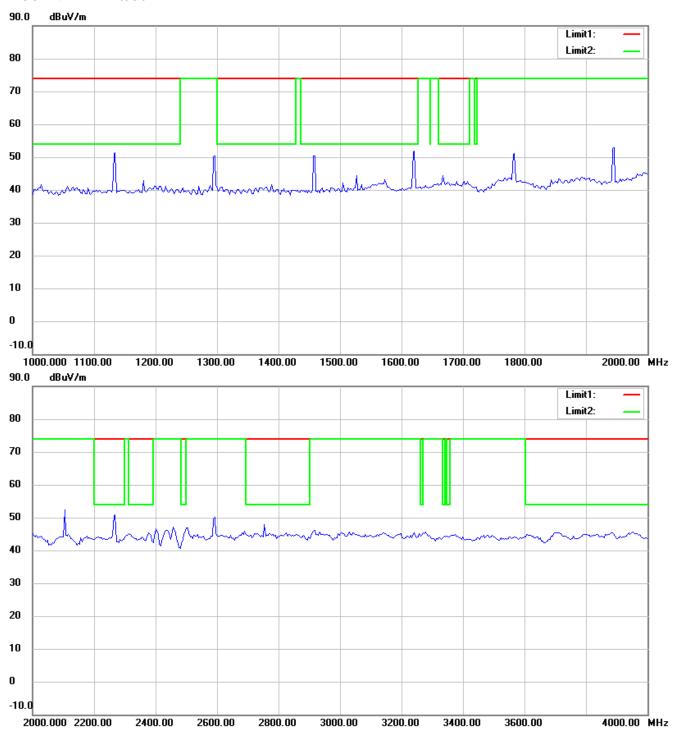


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

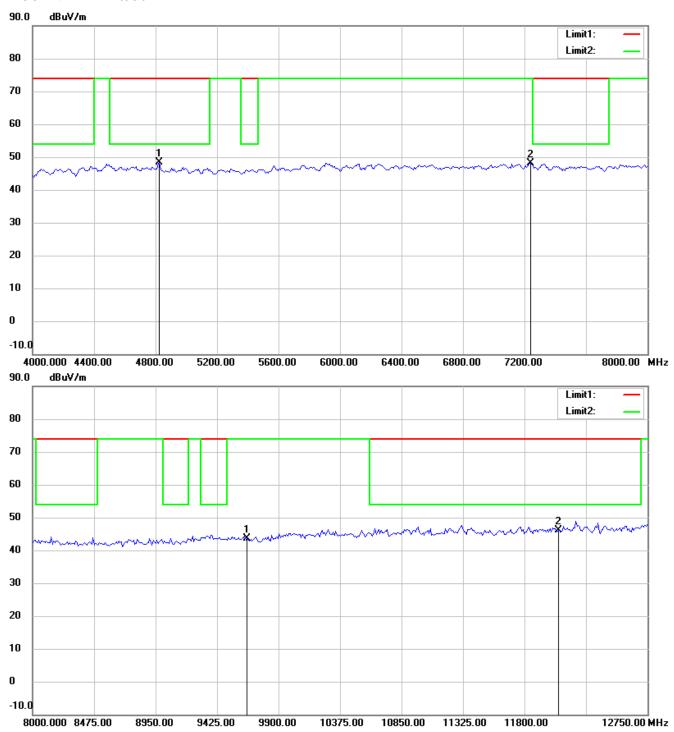


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

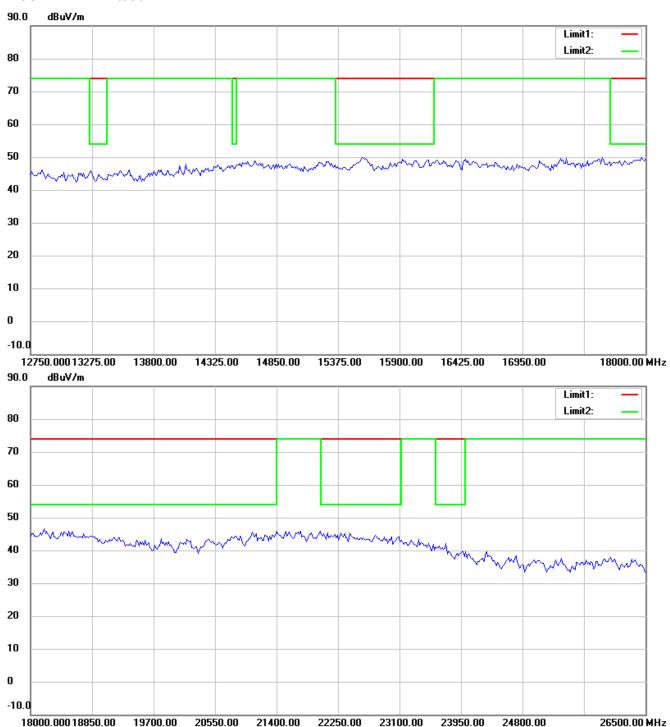

#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11g Channel 6

### Antenna Polarization H

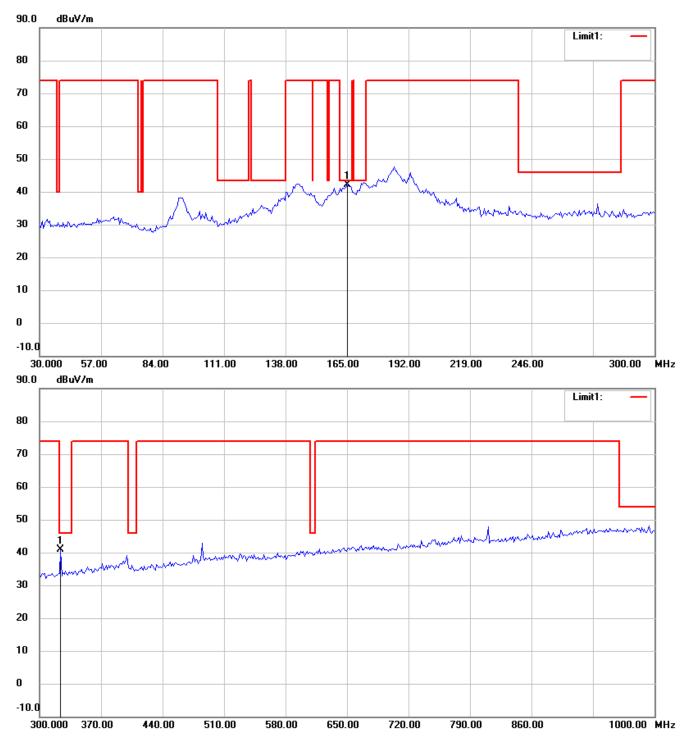


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

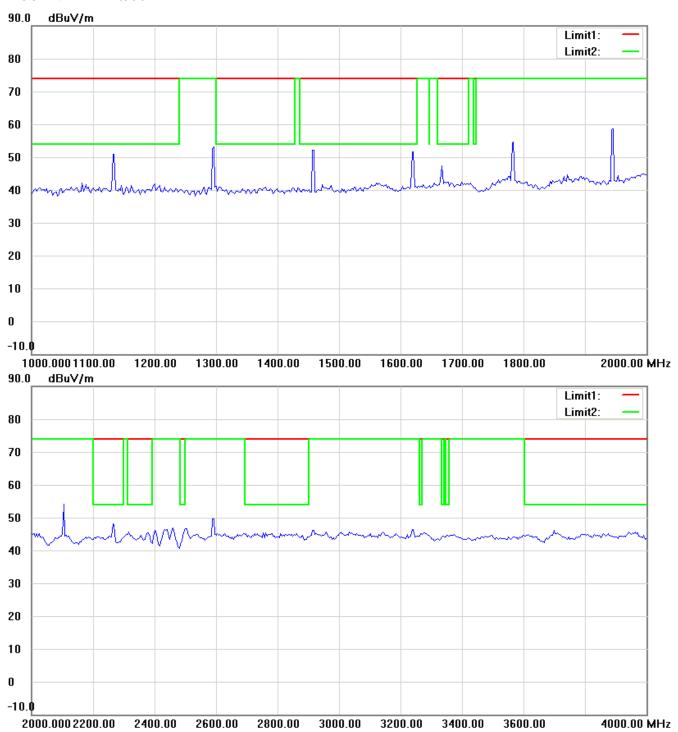


### Note:

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

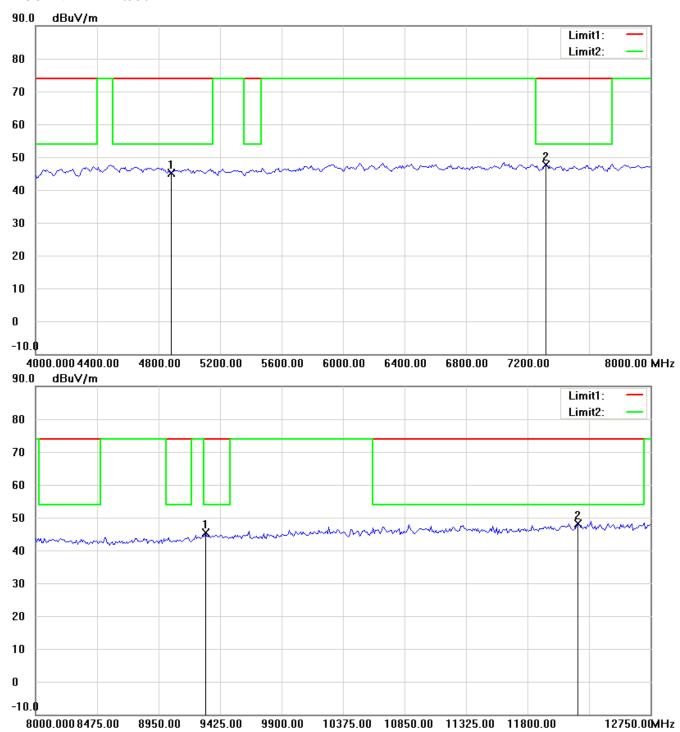


### Note:

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

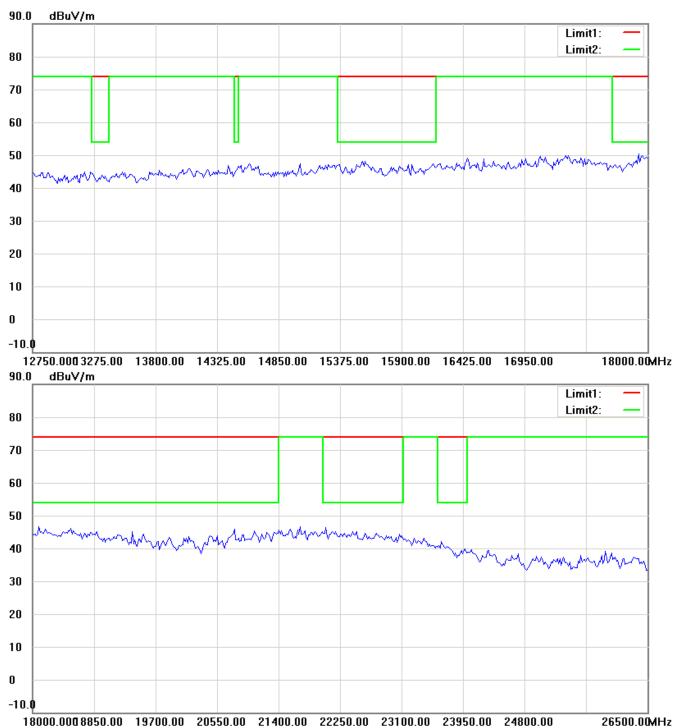

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

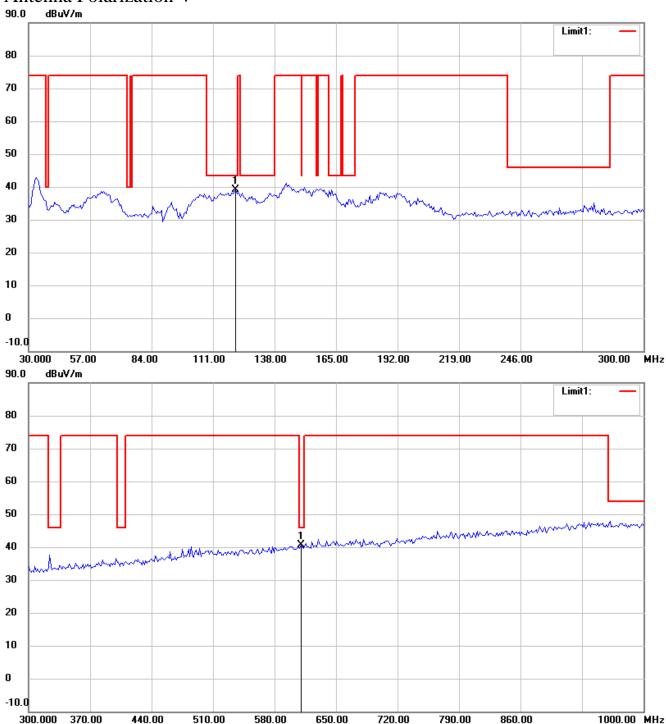


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

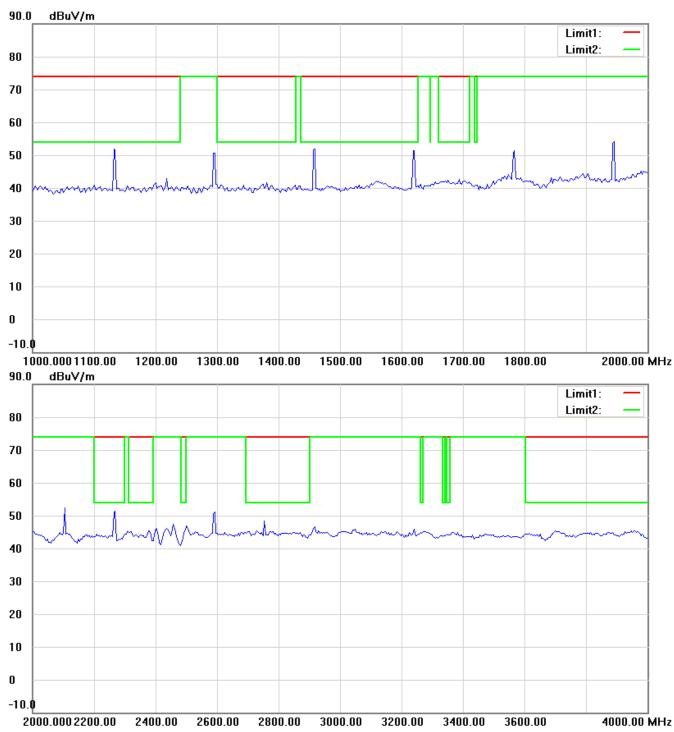


### Note:

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

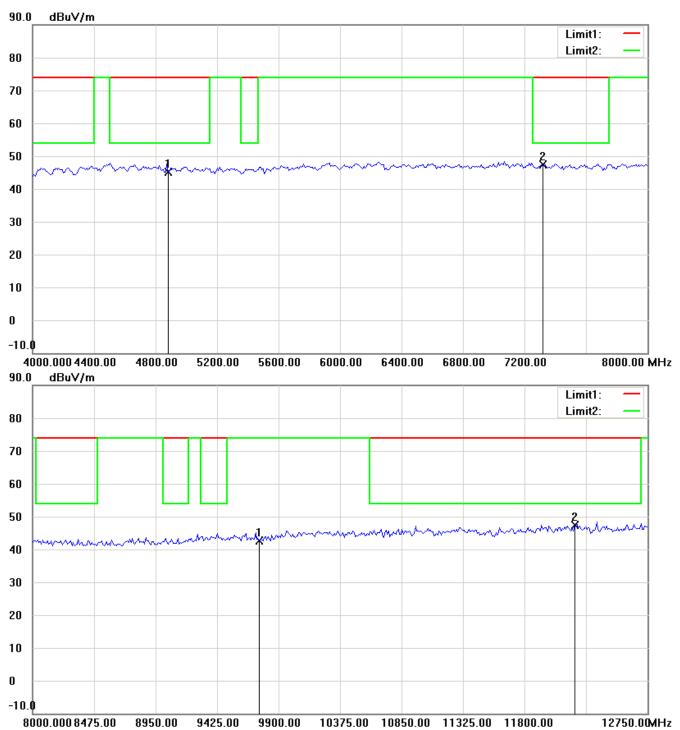


### Note:

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

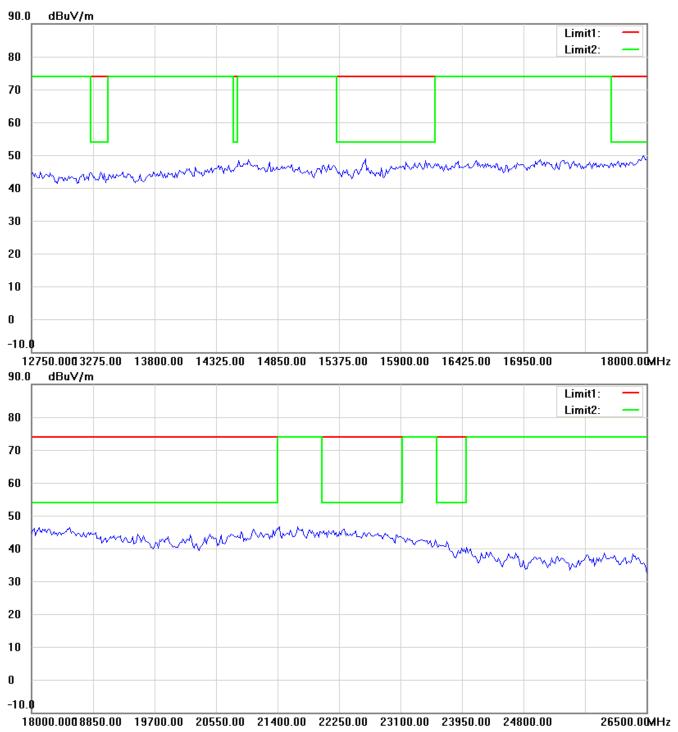

#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11g Channel 11

### Antenna Polarization H

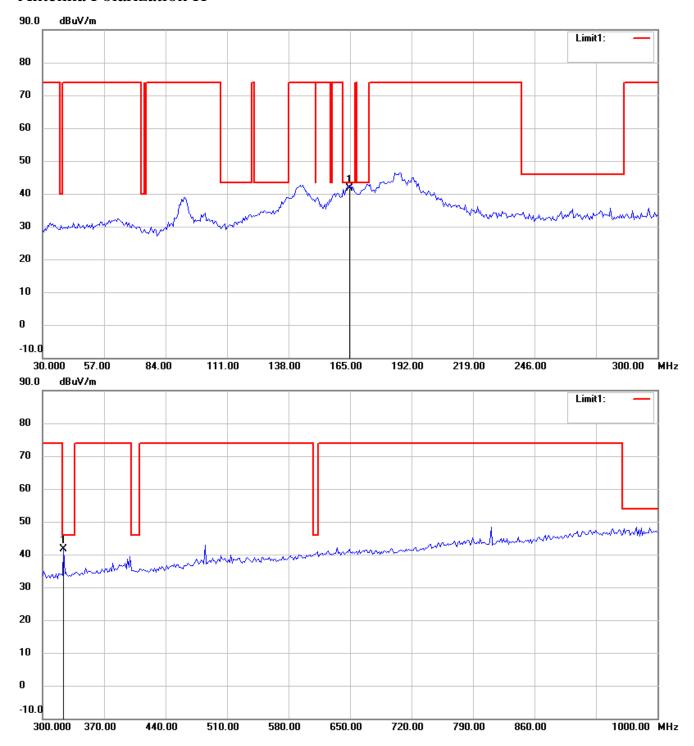


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

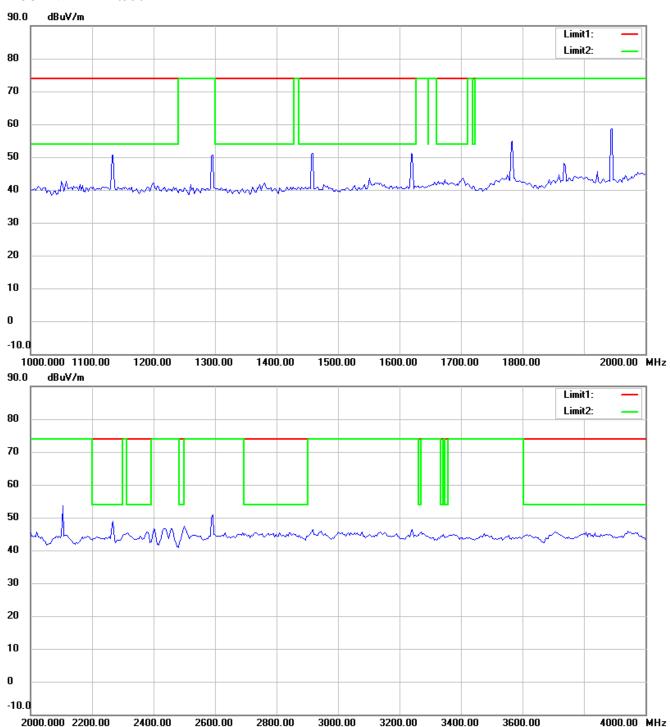


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

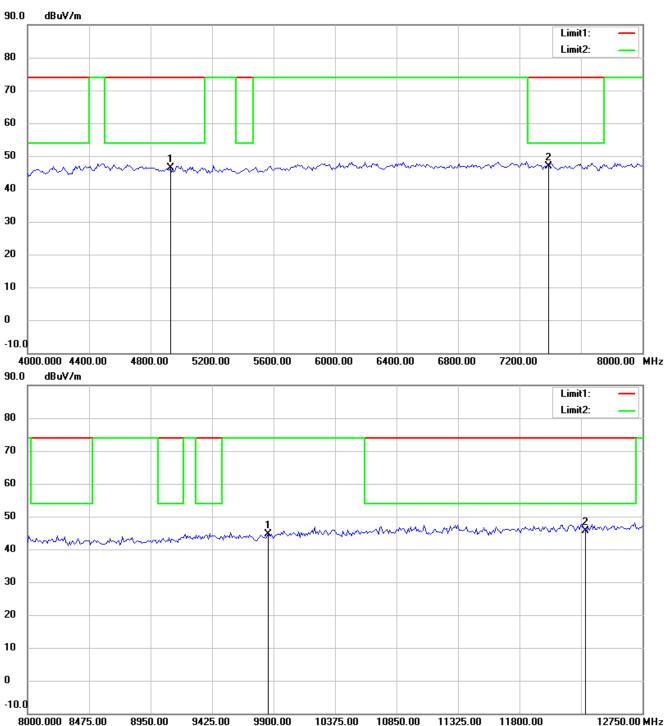


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

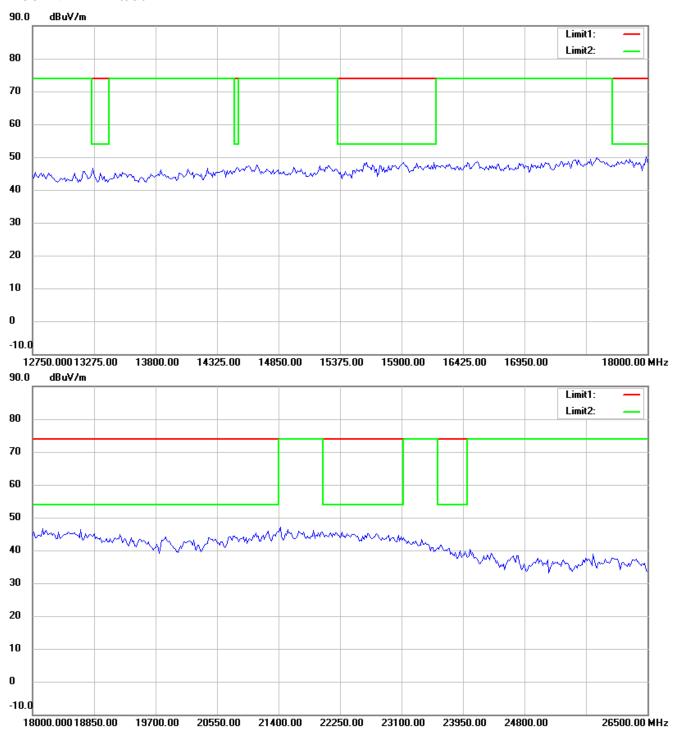

#### Note


- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

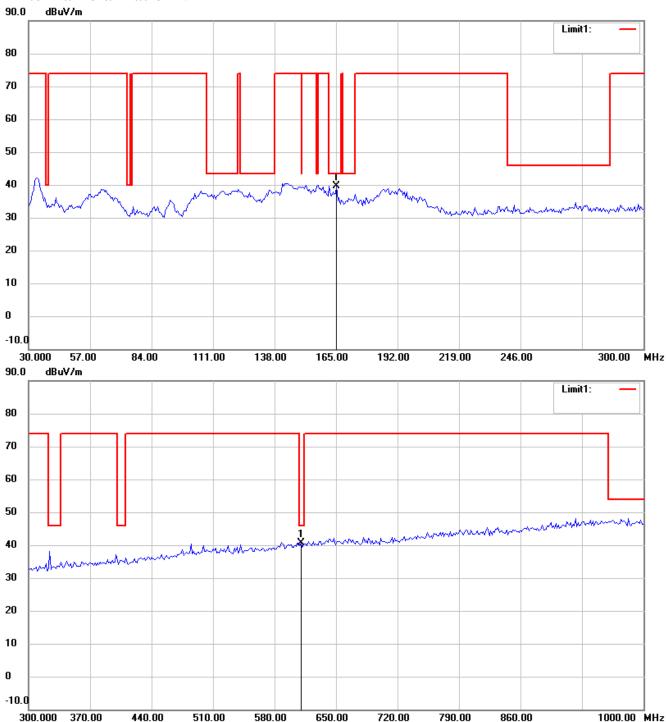


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

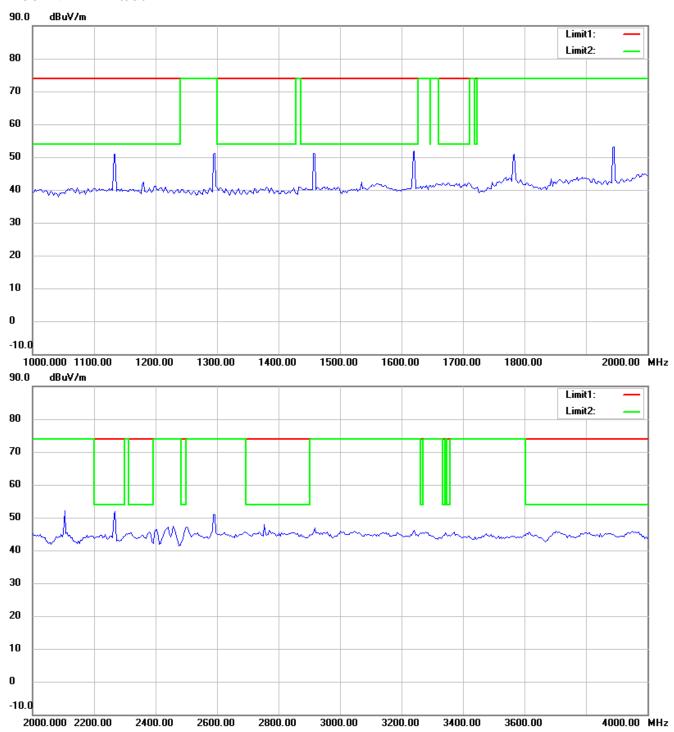


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

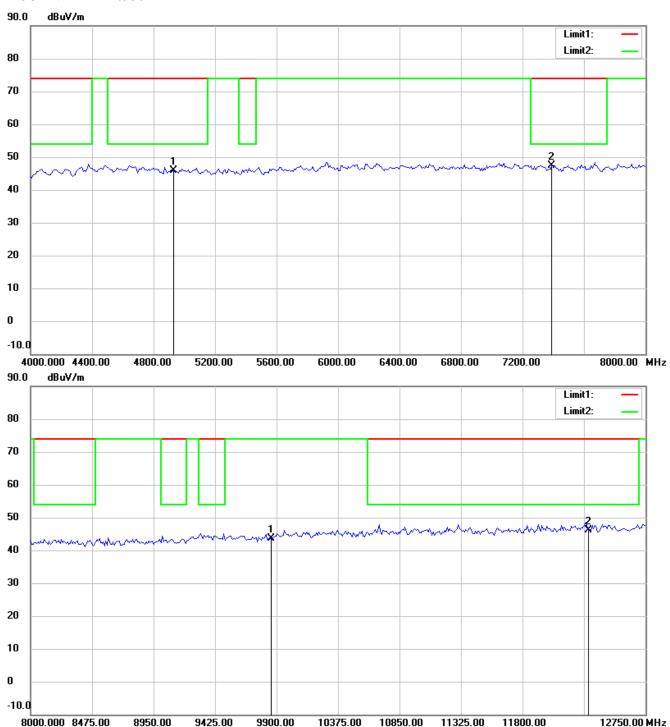


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

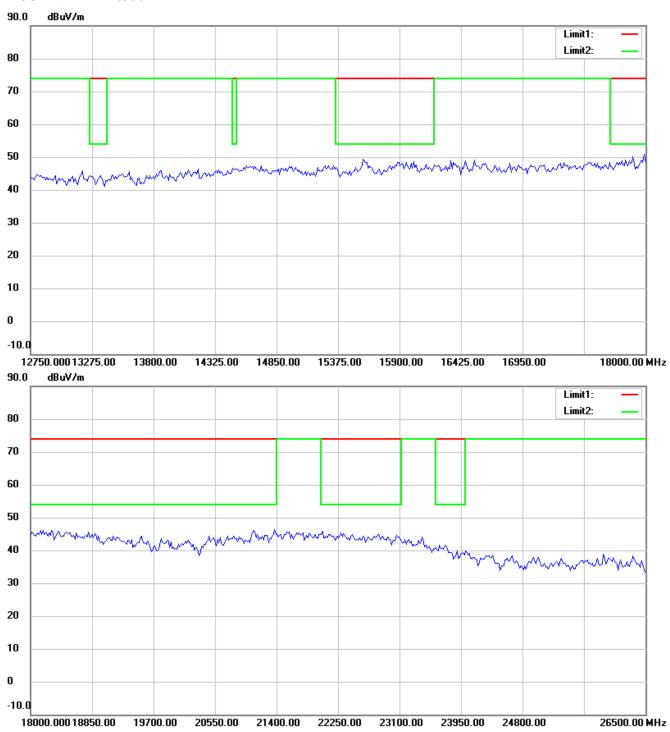

#### Note


- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11n 20MHz Channel 1 Antenna Polarization H

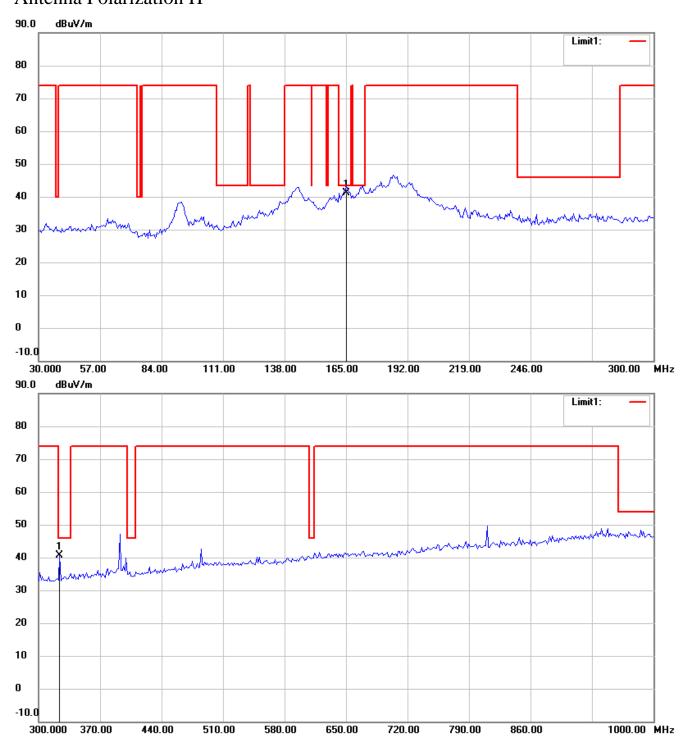


#### Note:

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

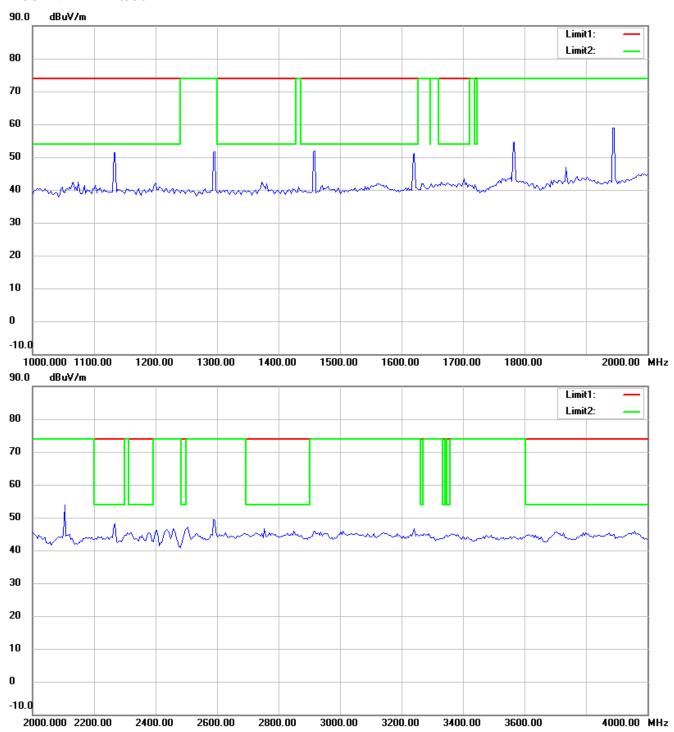


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

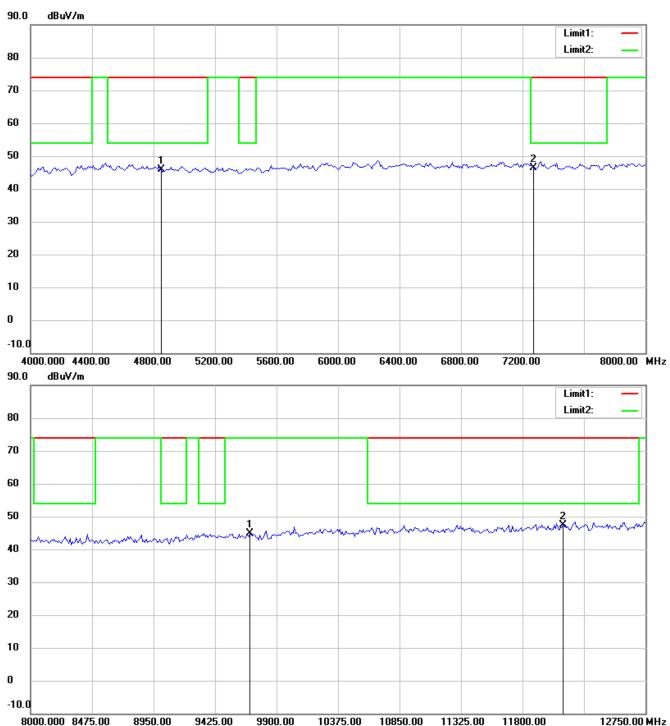


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

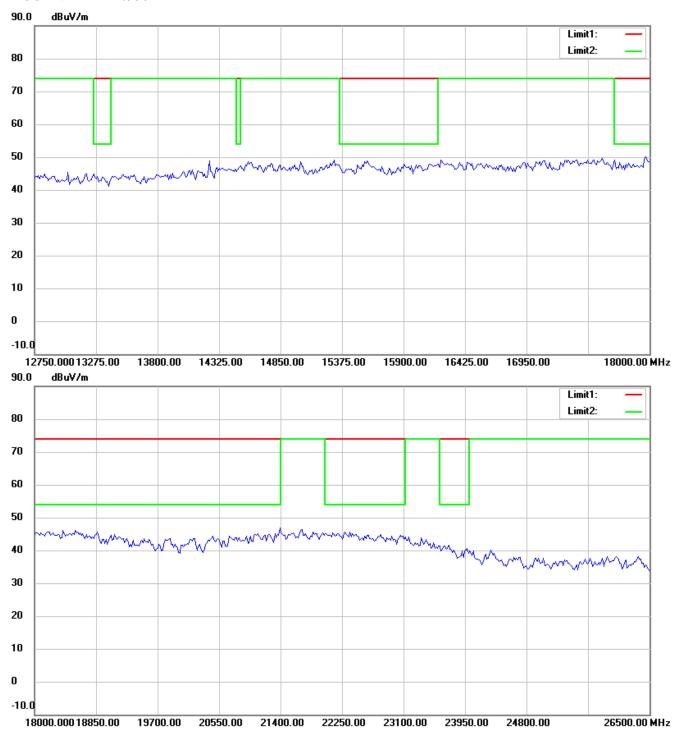

#### Note


- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

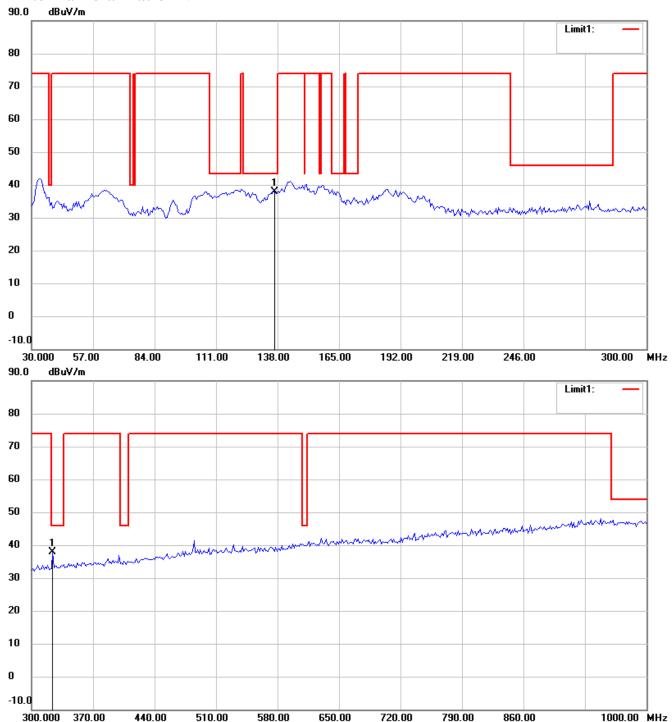


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

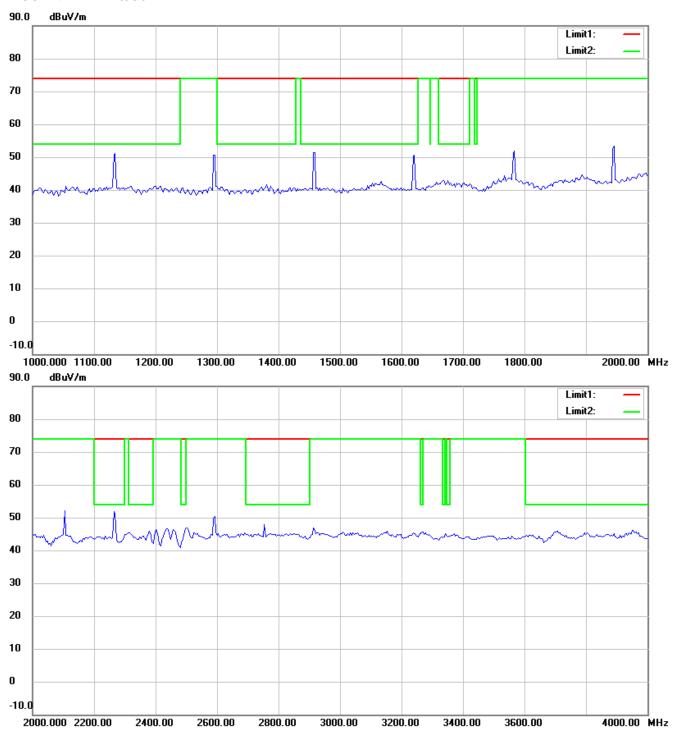


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

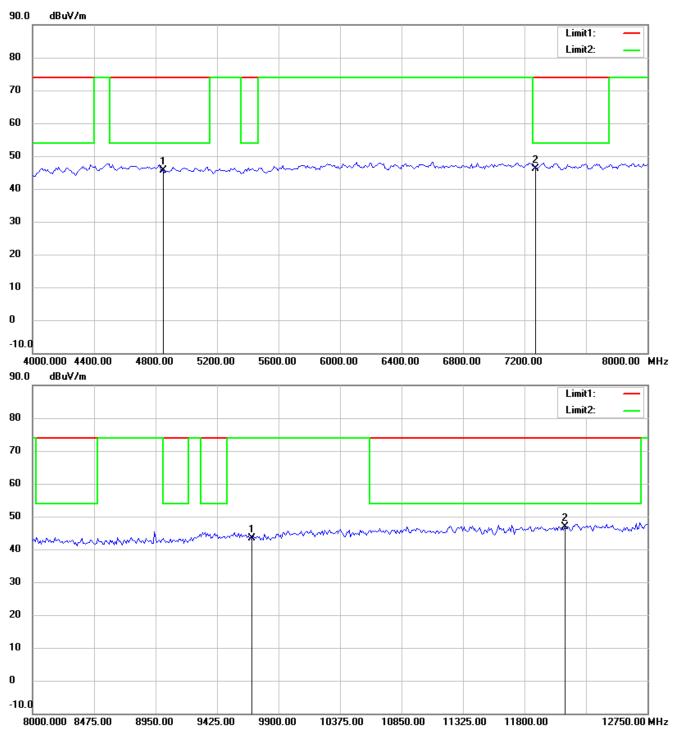


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

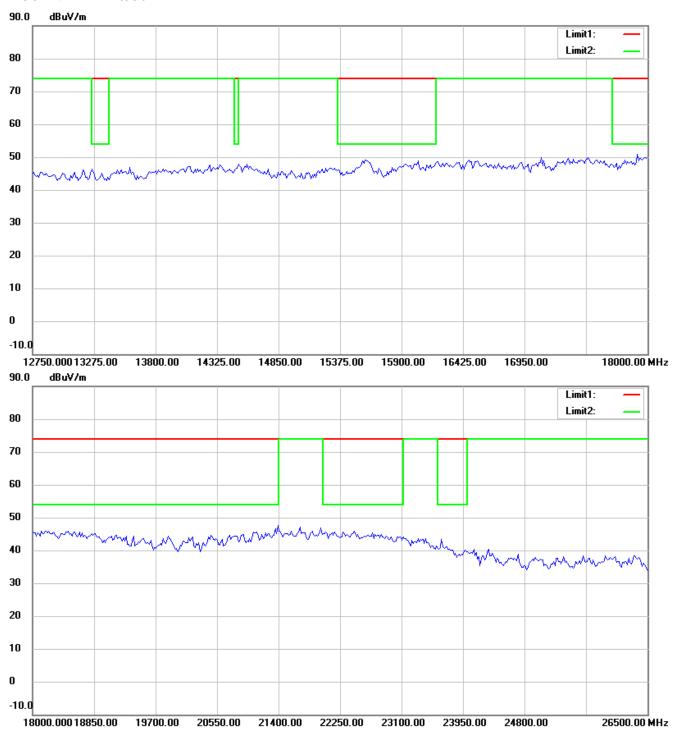

#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11n 20MHz Channel 6

### Antenna Polarization H

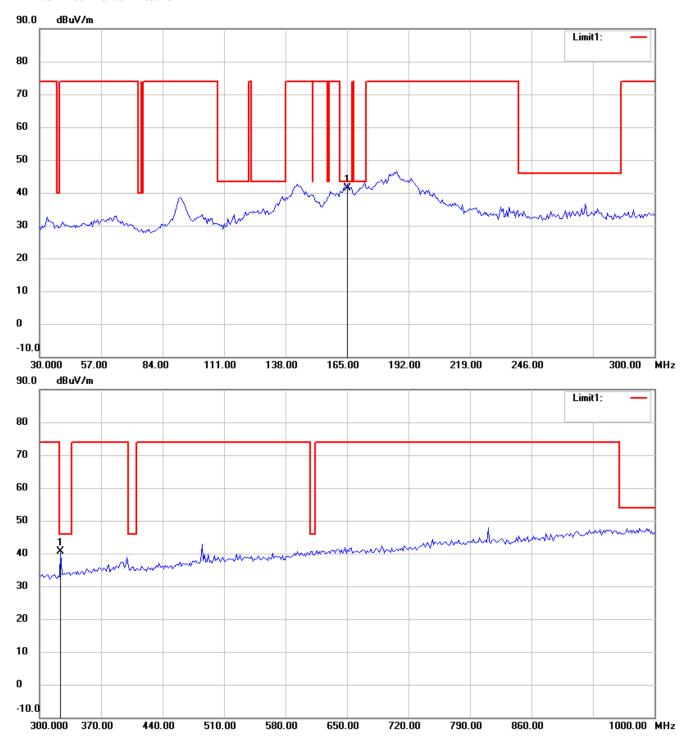


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

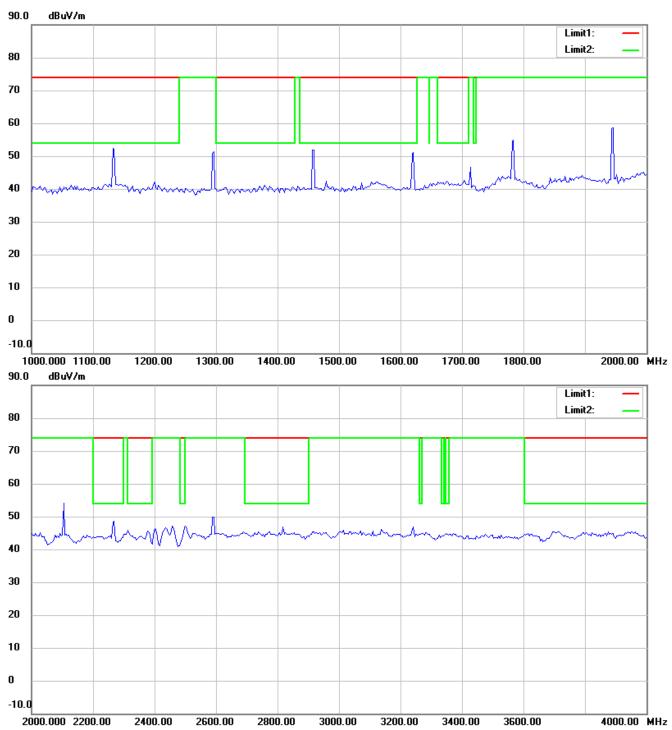


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

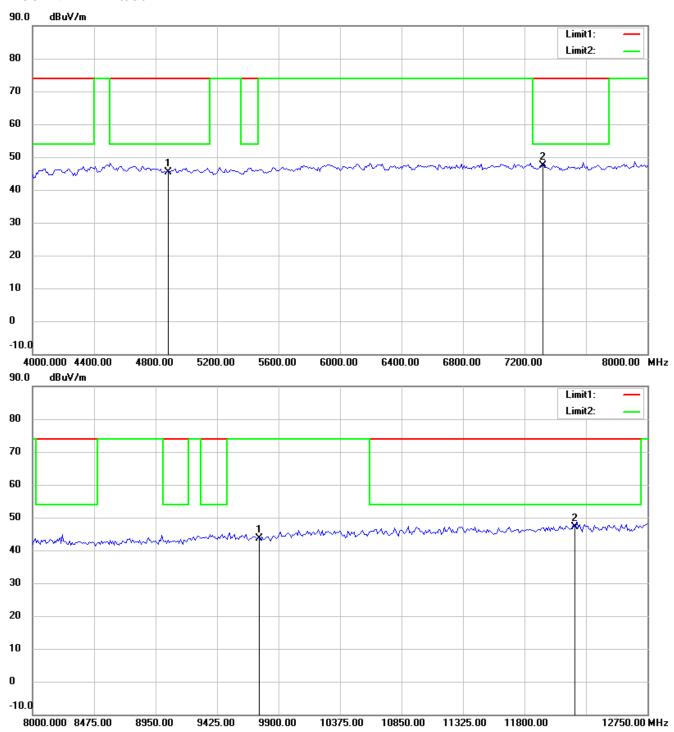


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

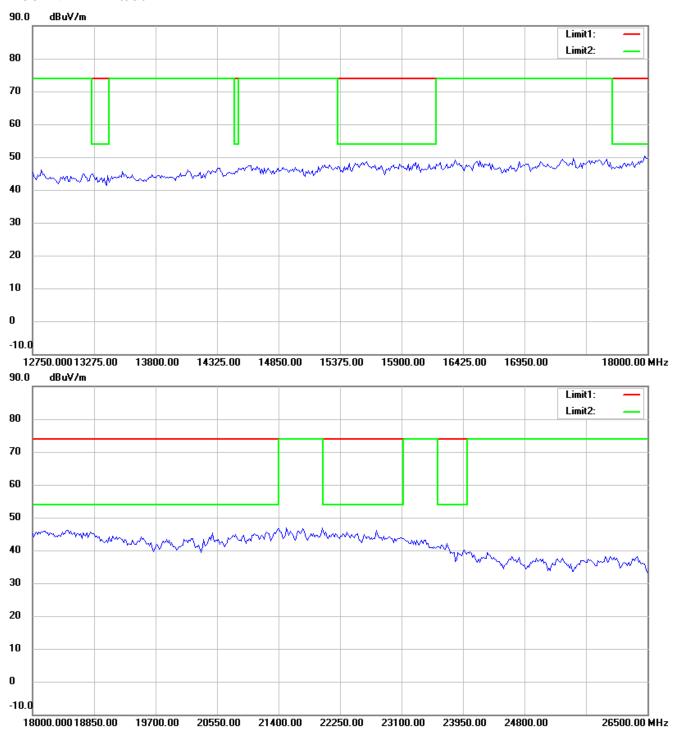

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

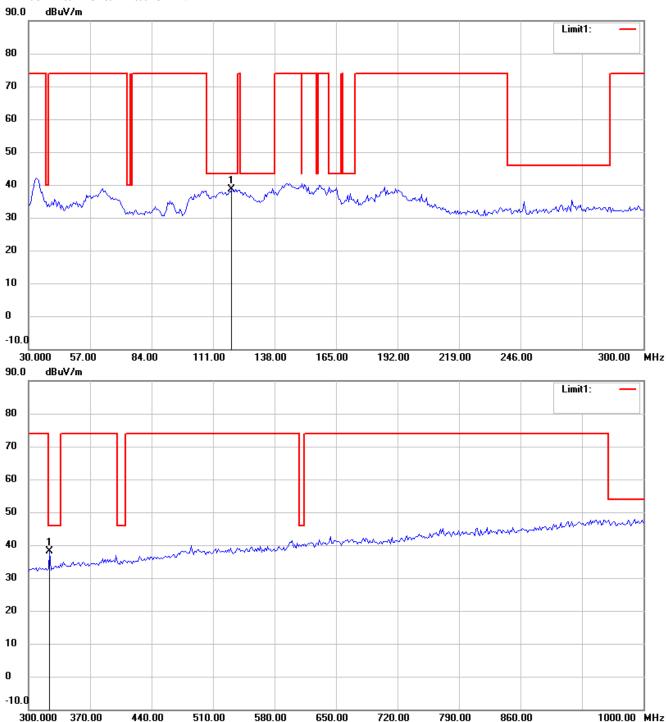


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

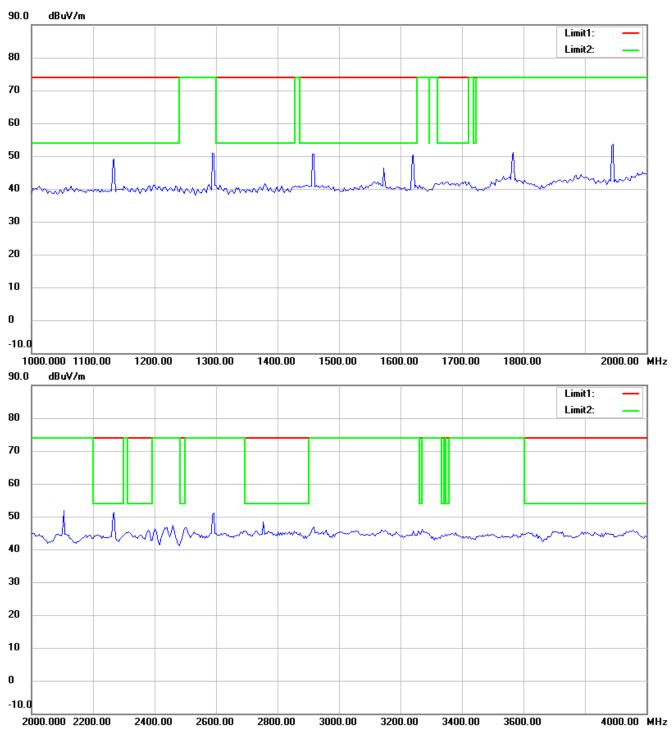


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

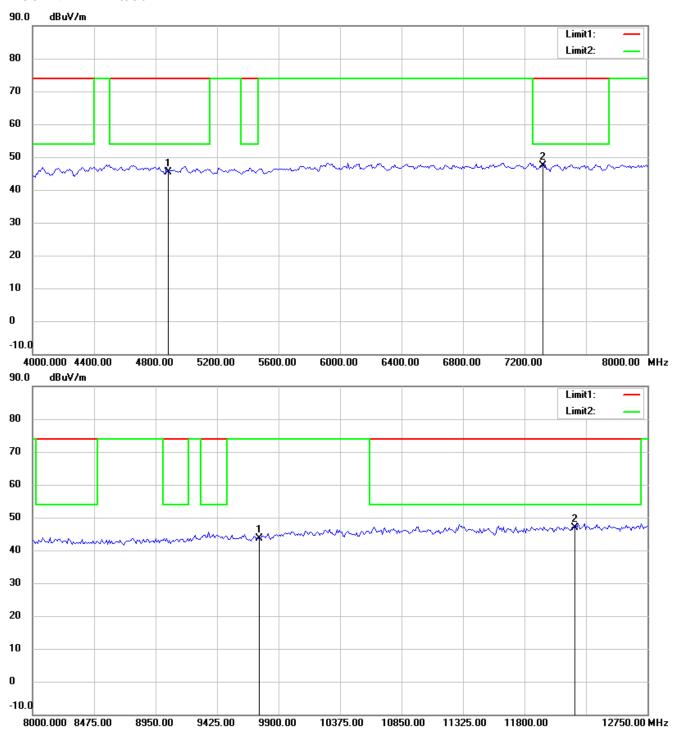


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

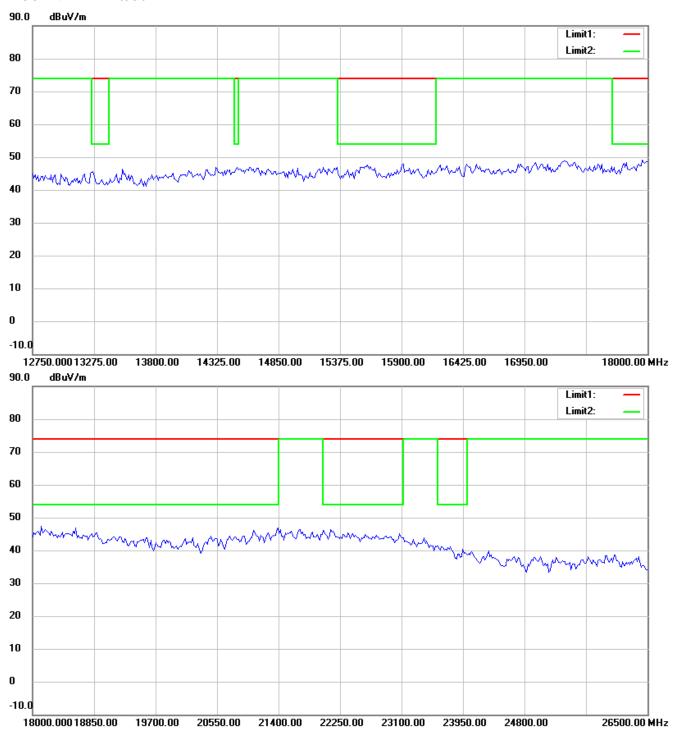

#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11n 20MHz Channel 11

### Antenna Polarization H

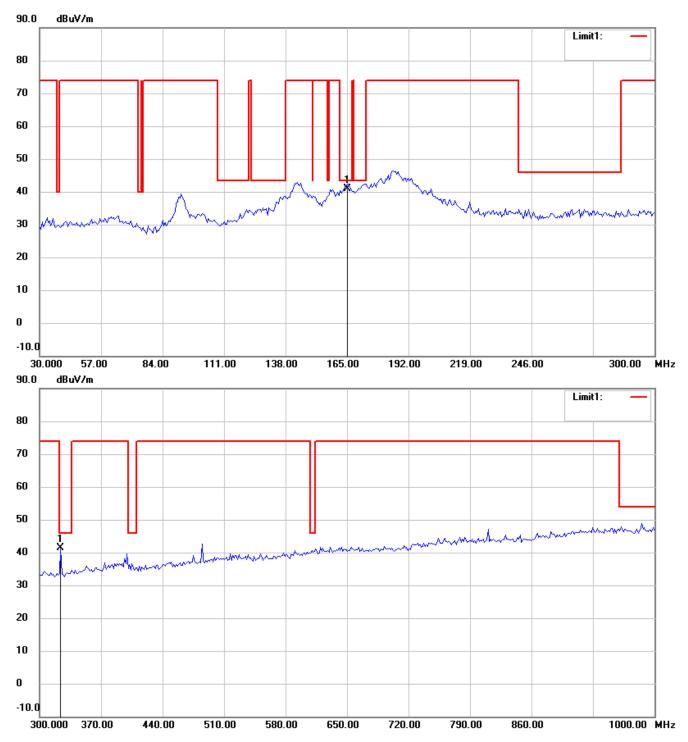


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

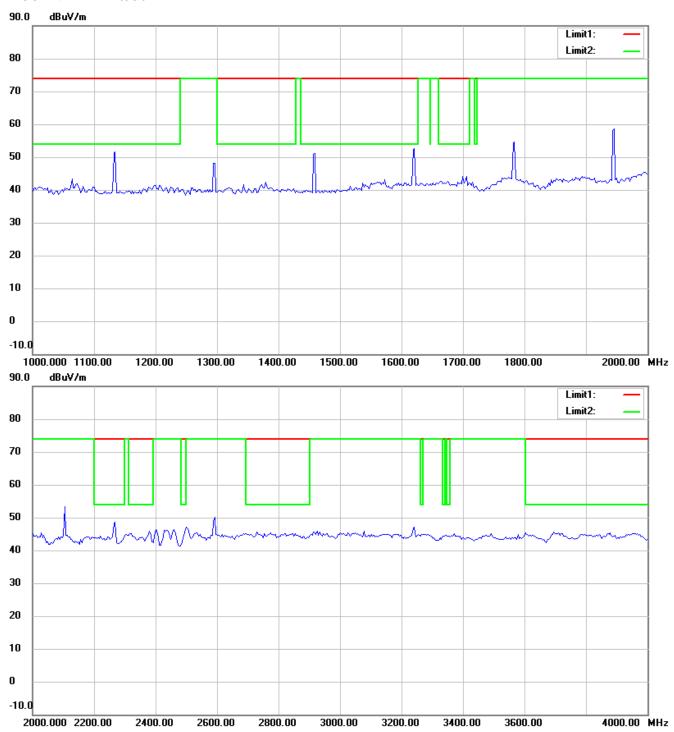


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

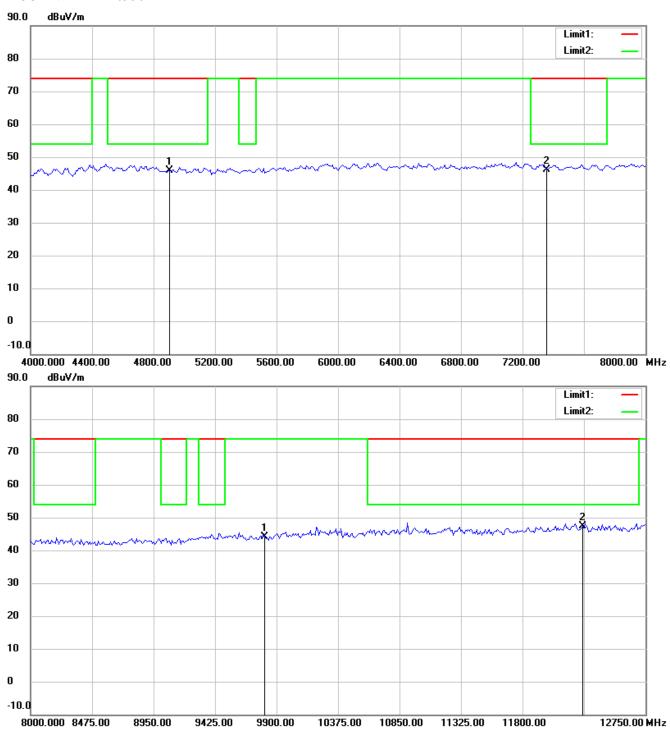


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

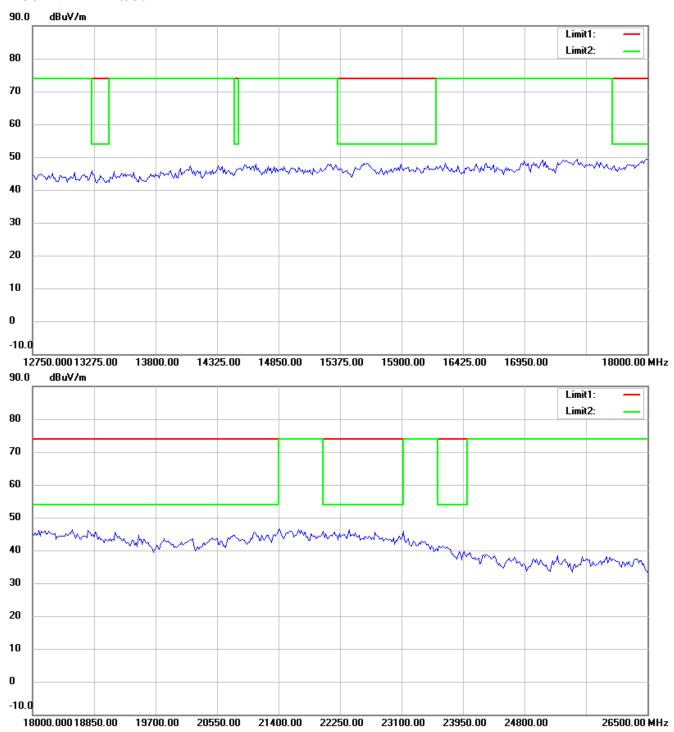

#### Note


- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

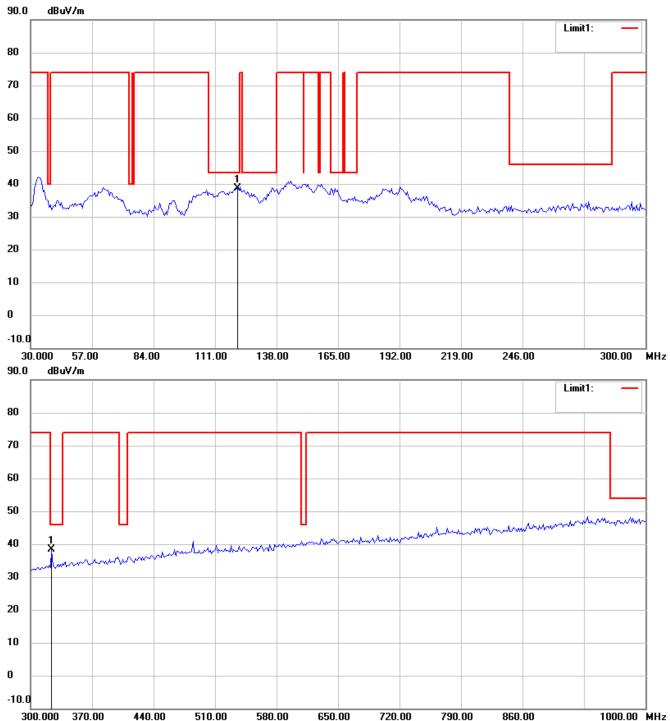


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

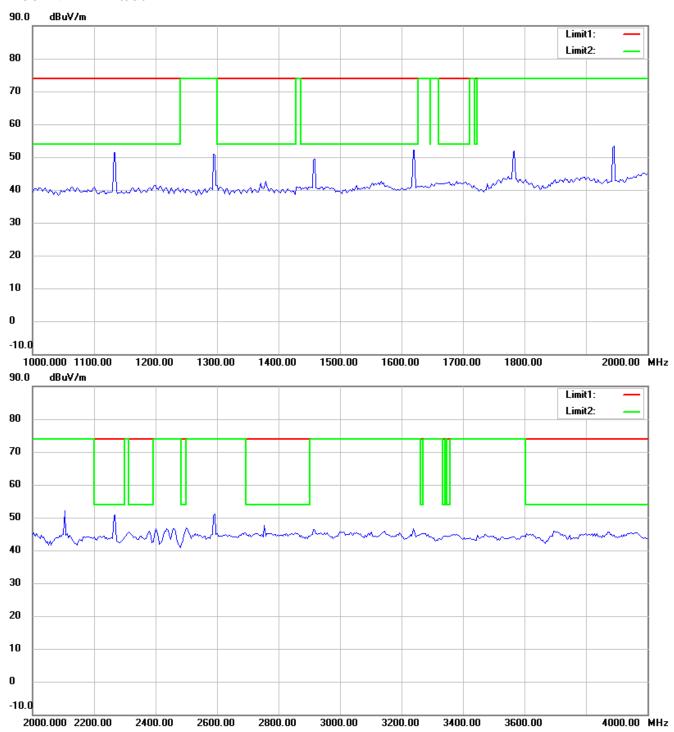


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

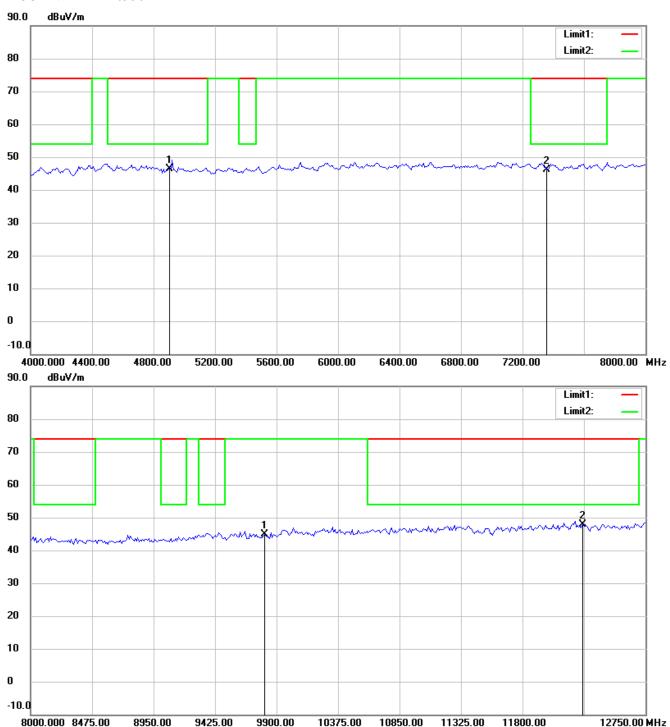


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

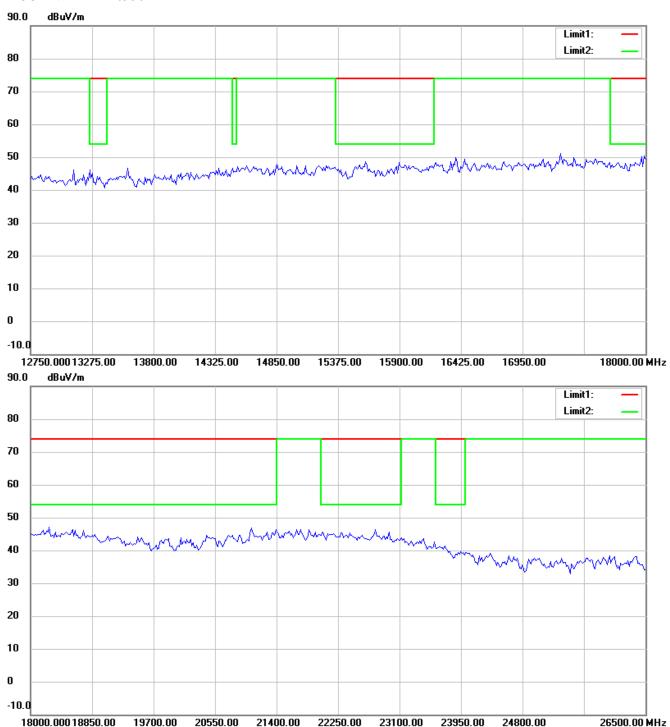

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11n 20MHz Channel 1 Antenna Polarization H

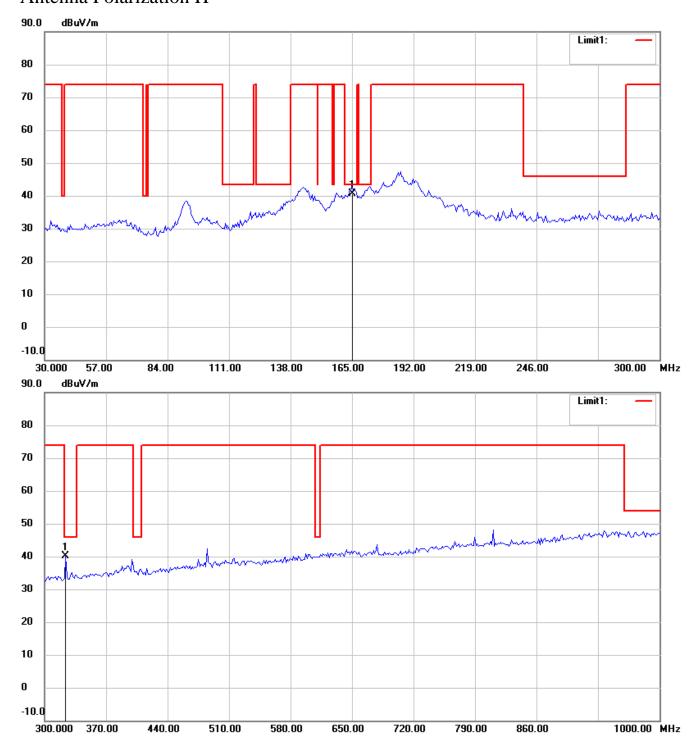


#### Note:

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

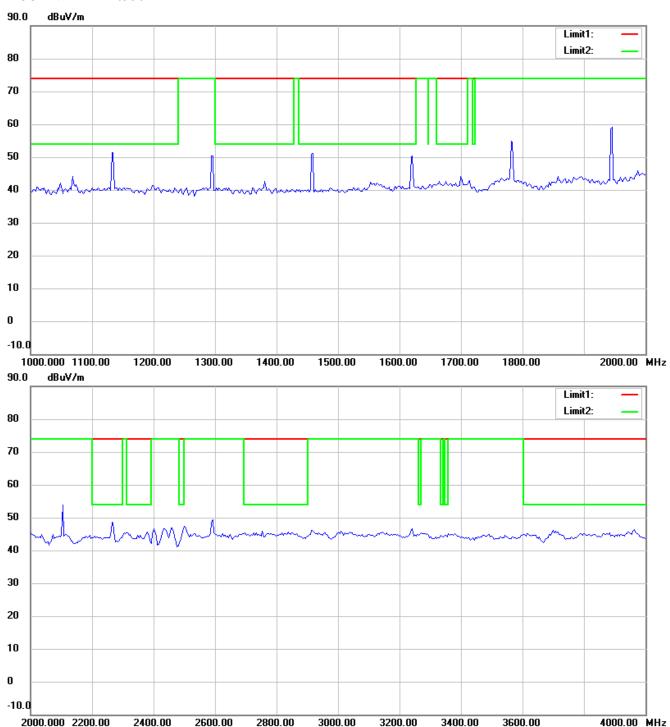


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

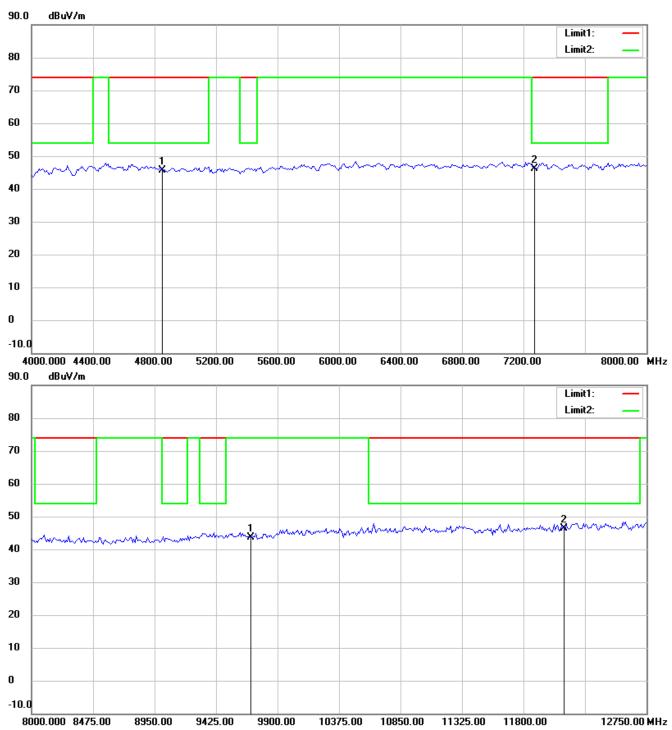


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

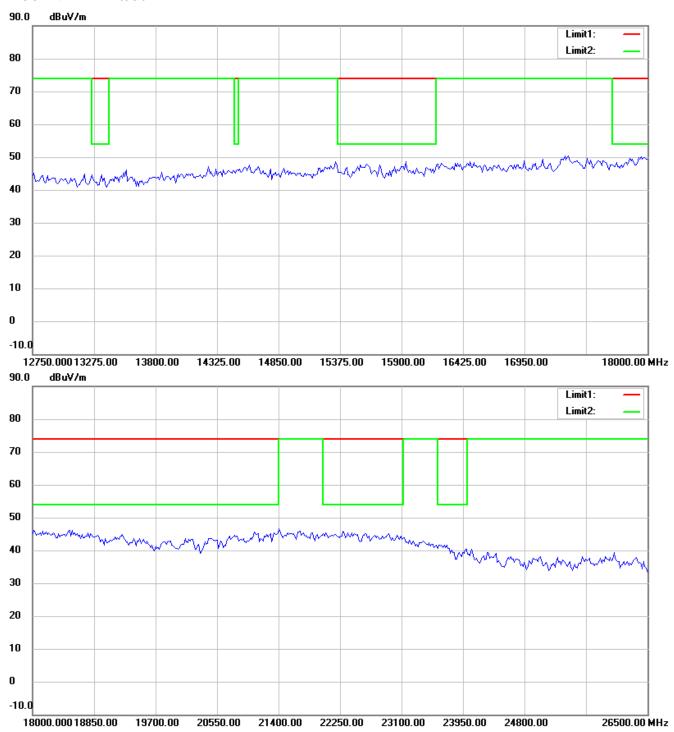

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

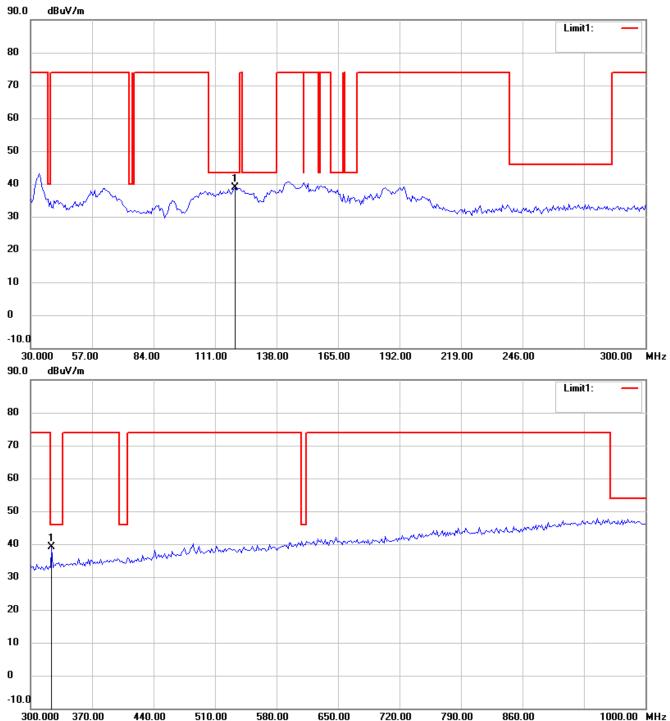


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

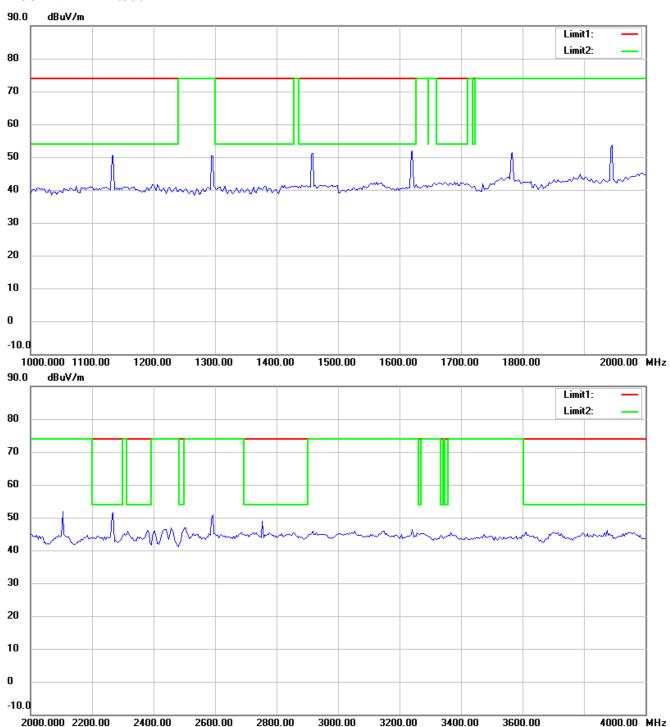


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

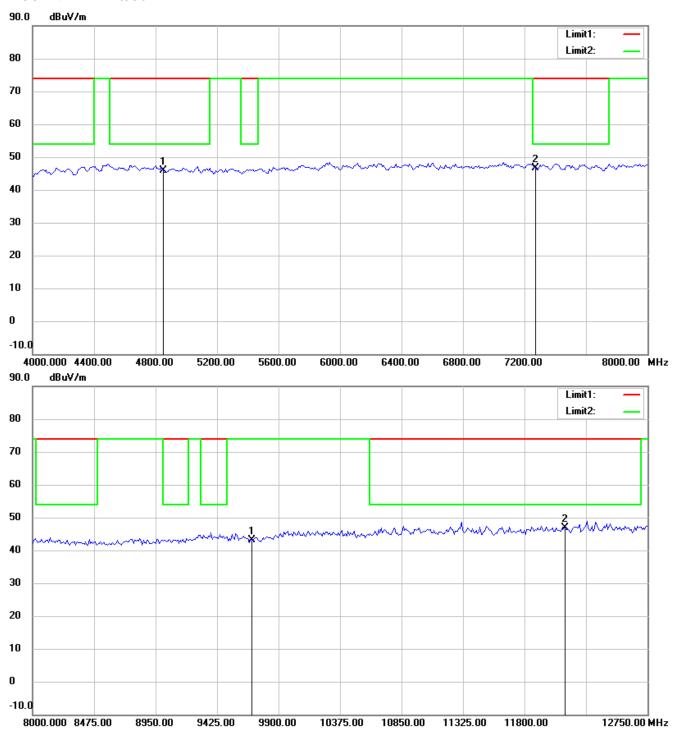


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

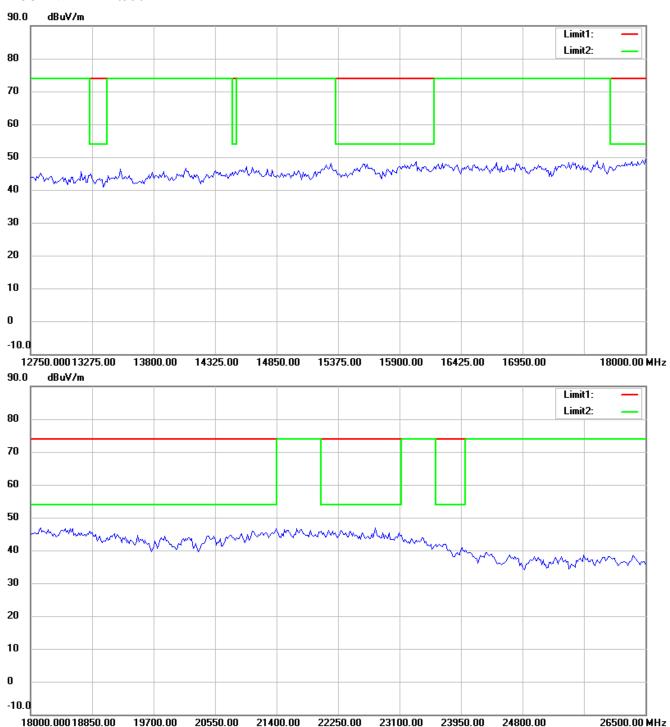

#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### 802.11n 20MHz Channel 4

### Antenna Polarization H

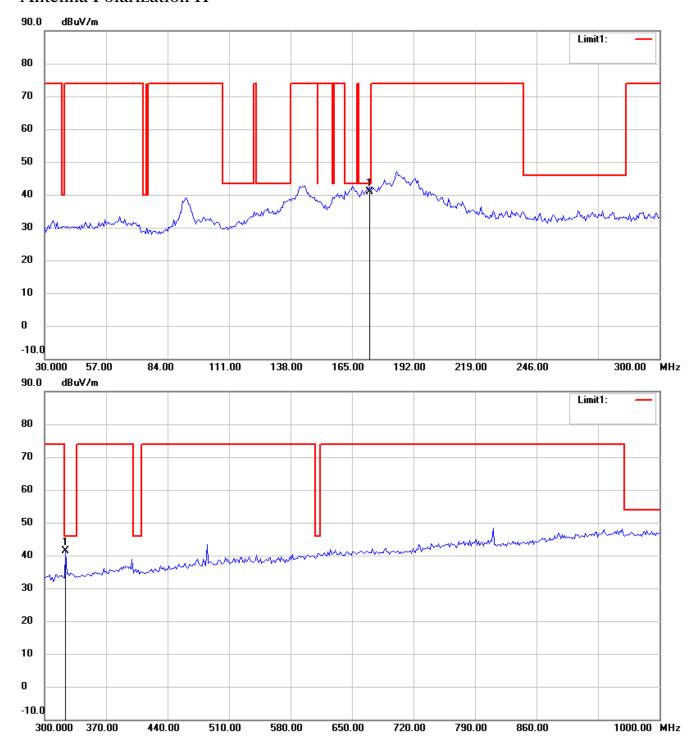


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

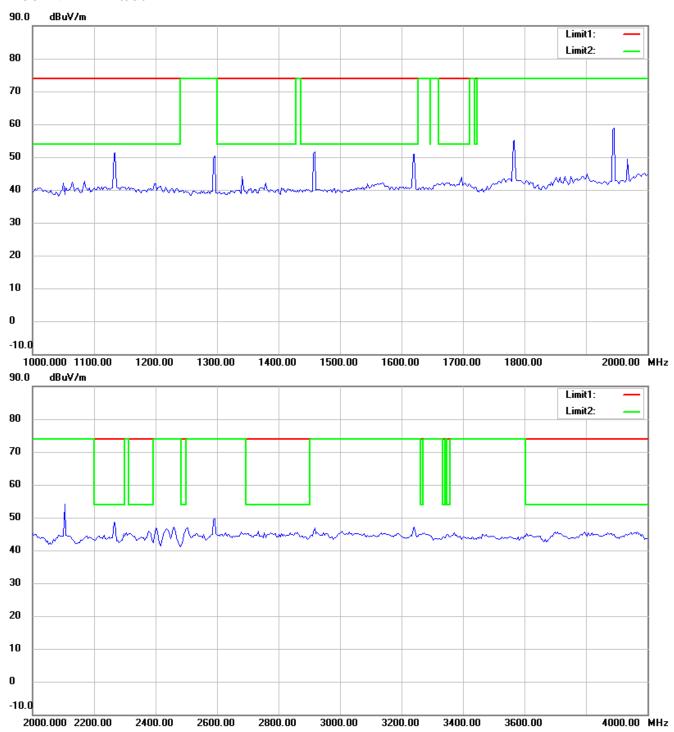


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

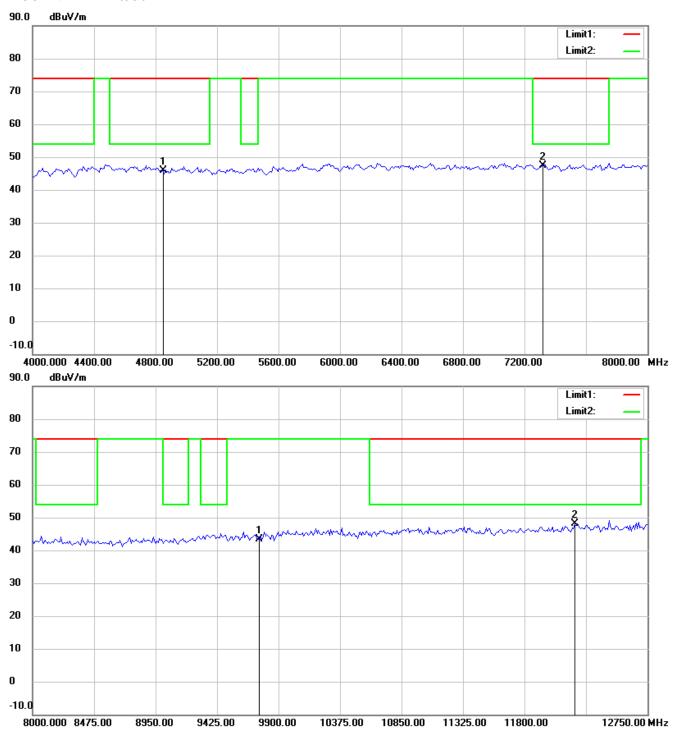


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

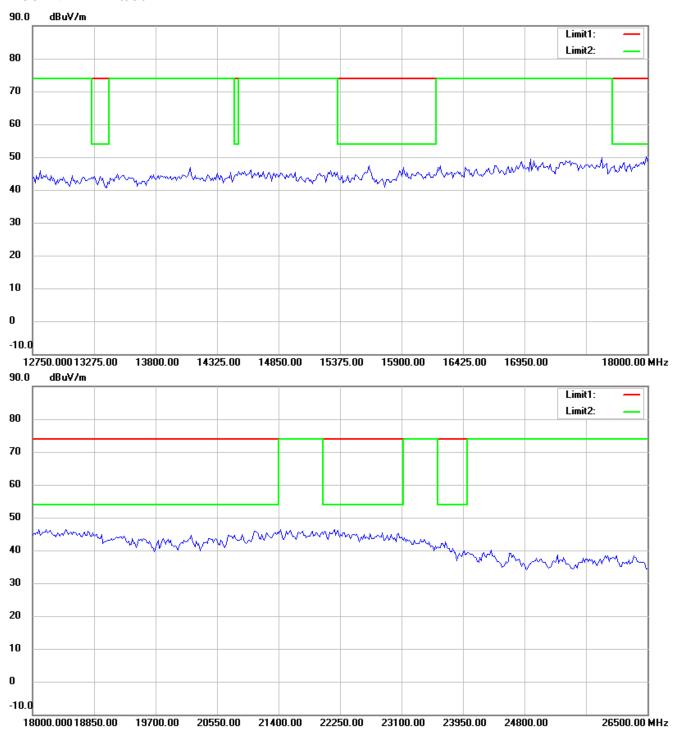

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

#### Antenna Polarization V

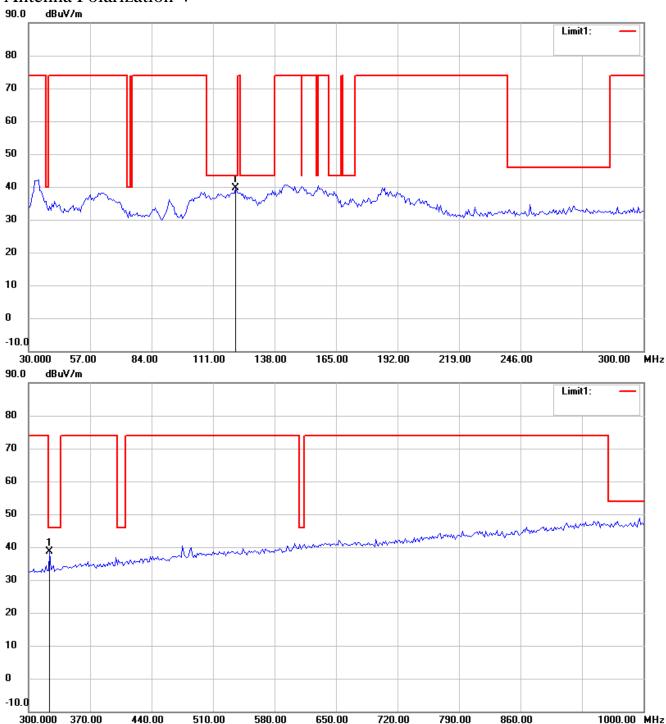


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

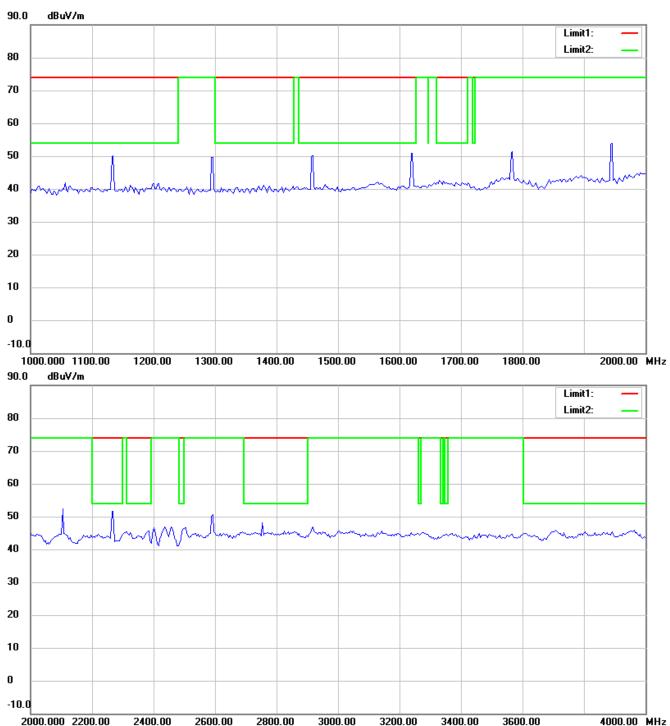


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

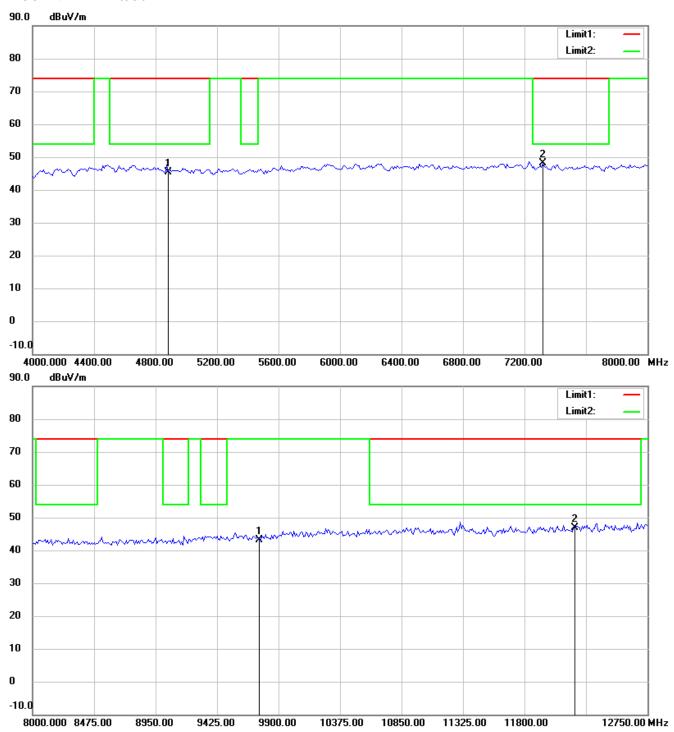


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

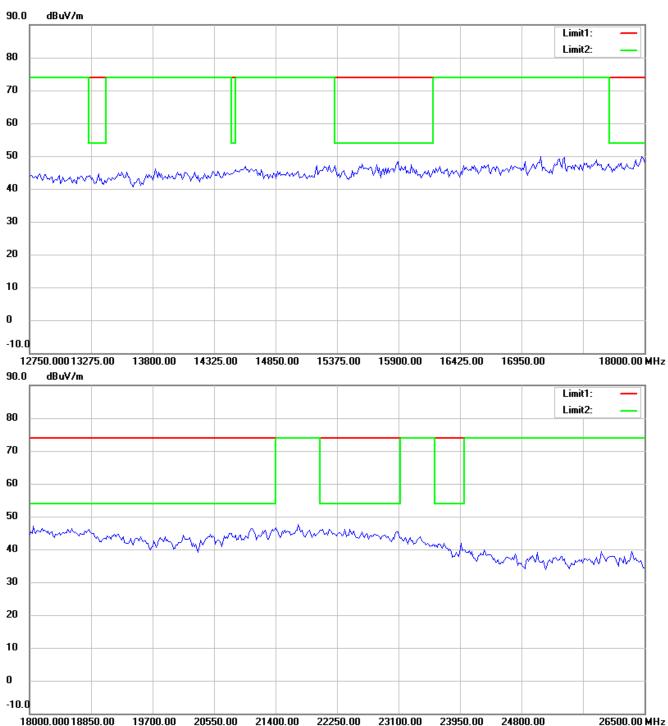

#### Note


- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

# 802.11n 20MHz Channel 7

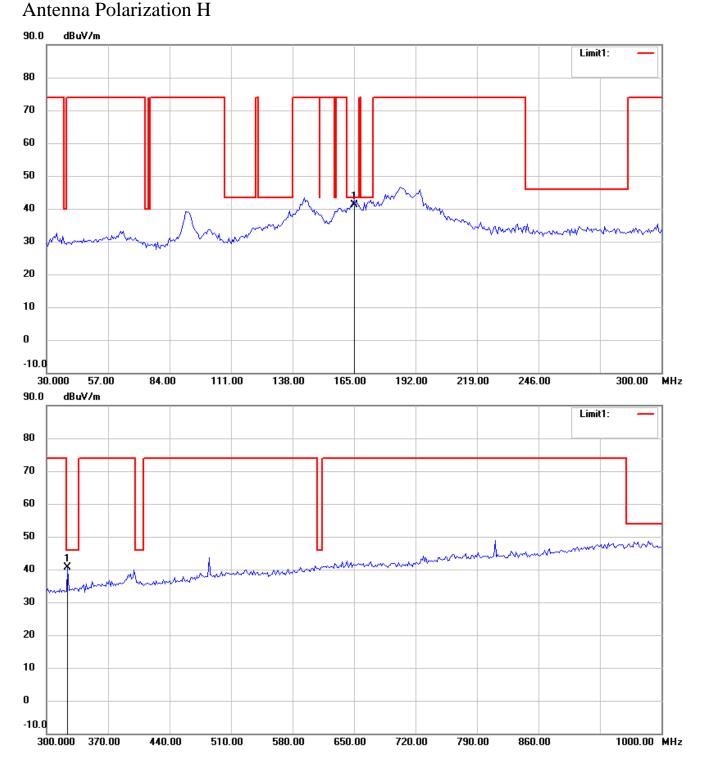


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

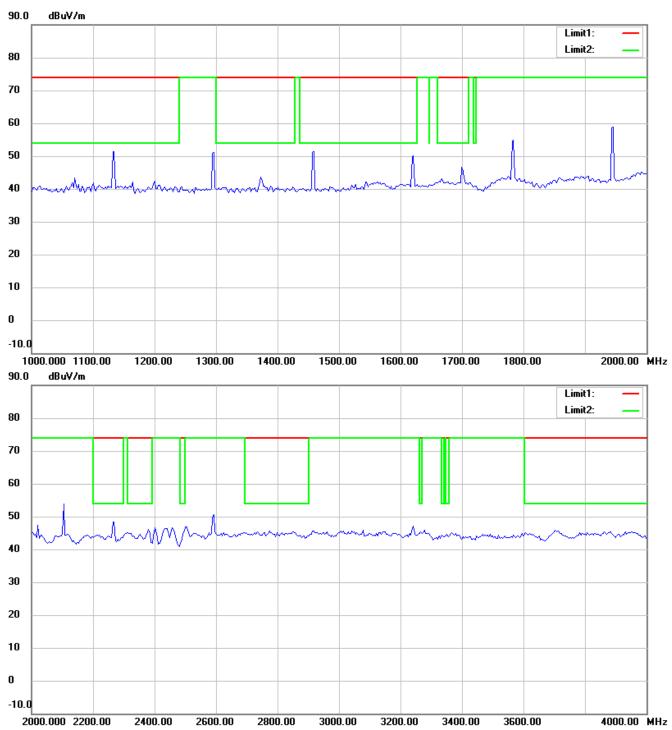


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

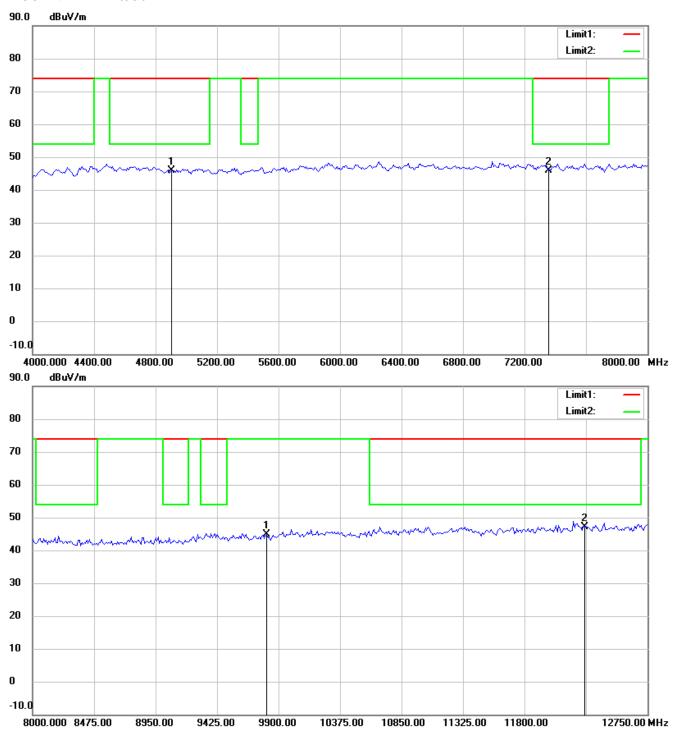


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

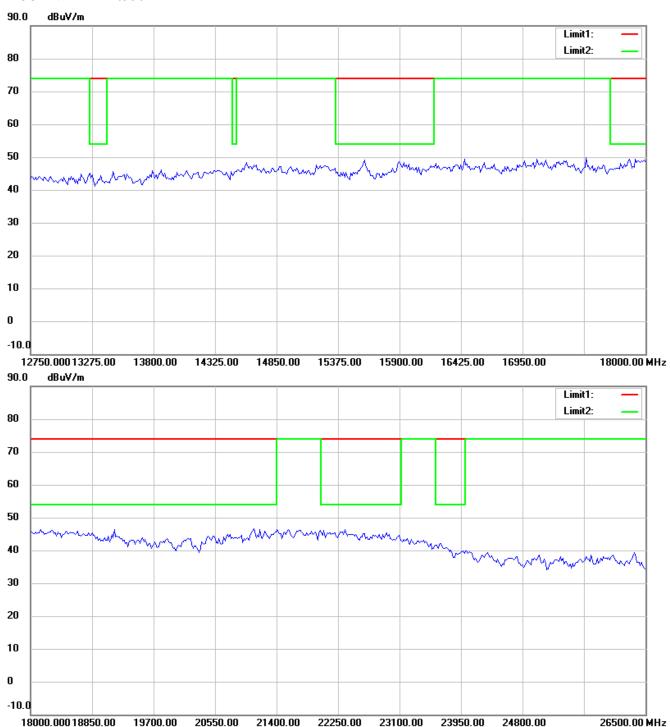

#### Note


- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

### Antenna Polarization V

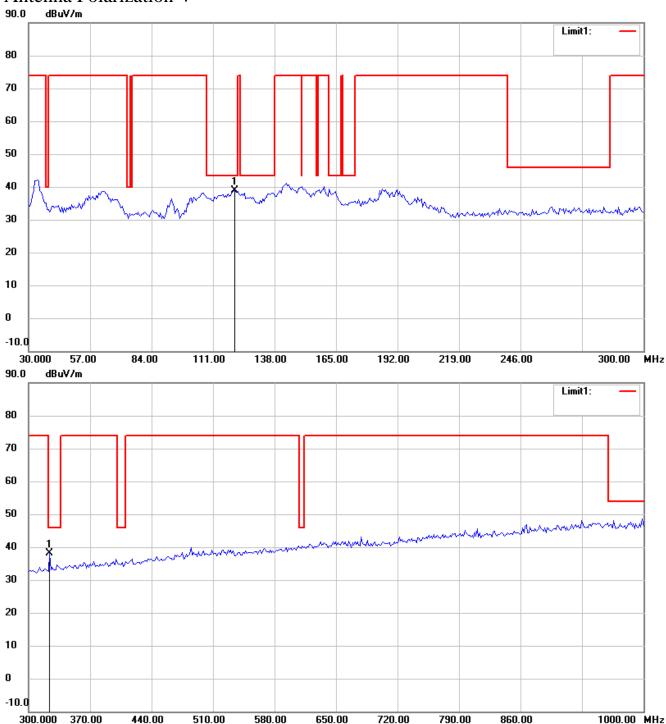


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

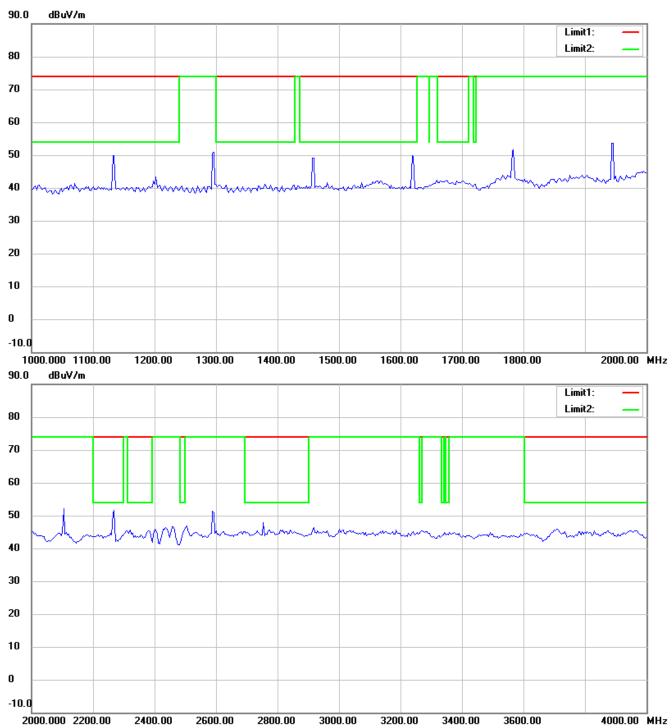


#### Note

- 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

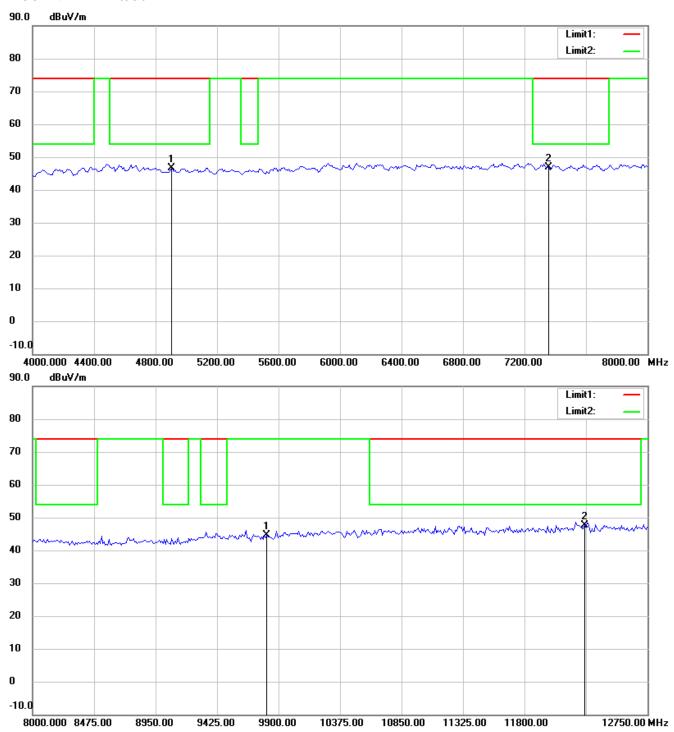


#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21106-11625-C-1

FCC ID: PRLTA-6950

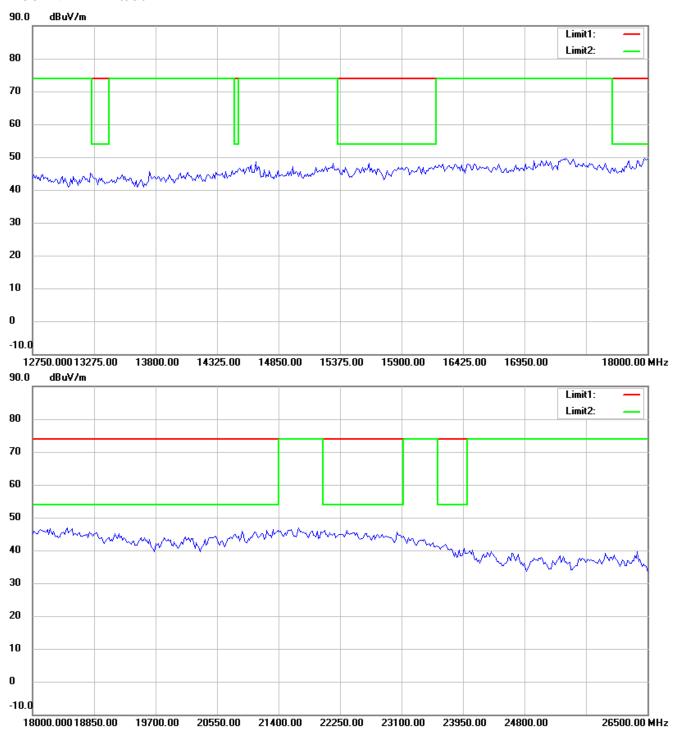

#### Note

- The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
- 3 For corrected test results are listed in the relevant table of radiated test data of this test report.