



# FCC RADIO TEST REPORT

**FCC ID** : PU5-LN300WG4L  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : Lenovo 300w Yoga Gen 4  
**Applicant** : Wistron Corporation  
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan  
**Manufacturer** : Lenovo PC HK Limited  
23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong, P.R. China  
**Standard** : FCC 47 CFR Part 2, Part 27(D)

Equipment: Fibocom FM101-GL tested inside of Lenovo Notebook Computer.

The product was received on Oct. 18, 2022 and testing was performed from Dec. 22, 2022 to Jan. 07, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Site.....	6
1.5 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system .....	8
2.4 Frequency List of Low/Middle/High Channels .....	8
<b>3 Conducted Test Items.....</b>	<b>9</b>
3.1 Measuring Instruments .....	9
3.2 Conducted Output Power Measurement .....	10
3.3 Effective Isotropic Radiated Power.....	11
<b>4 Radiated Test Items .....</b>	<b>12</b>
4.1 Measuring Instruments .....	12
4.2 Radiated Spurious Emission Measurement .....	14
<b>5 List of Measuring Equipment.....</b>	<b>15</b>
<b>6 Uncertainty of Evaluation .....</b>	<b>15</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FG2O1403D	01	Initial issue of report	Jan. 18, 2023
FG2O1403D	02	Revise Type of Modulation and Appendix A	Jan. 19, 2023



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	-	Peak-to-Average Ratio	-	See Note
3.3	§27.50 (a)(3)	Effective Isotropic Radiated Power	Pass	-
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	-	See Note
-	§2.1055 §27.54	Frequency Stability Temperature & Voltage	-	See Note
4.2	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	Pass	11.12 dB under the limit at 13833.000 MHz

Note:

- For host device, Effective Isotropic Radiated Power and Radiated Spurious Emission are verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: FM101-GL).

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Michelle Chen



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	Lenovo 300w Yoga Gen 4
FCC ID	PU5-LN300WG4L
Sample 1	EUT with AWAN Antenna
Sample 2	EUT with High-Tek Antenna
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom FM101-GL tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
Main Antenna	Manufacturer	AWAN	Peak gain (dBi)	1.89
	Part number	025.90270.0011	Type	PIFA
	Manufacturer	High-Tek	Peak gain (dBi)	-0.35
	Part number	025.90270.0001	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	2307.5 MHz ~ 2312.5 MHz
Rx Frequency	2352.5 MHz ~ 2357.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	20.22 dBm
Type of Modulation	QPSK / 16QAM

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.



### 1.4 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY
Test Engineer	Eric Chang
Temperature	22.5~23.3
Relative Humidity	52~55

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	<b>Sporton Site No.</b>
	03CH15-HY (TAF Code: 3786)
Test Engineer	Eric Xiao, Quentin Liu and Bigshow Wan
Temperature (°C)	21~26
Relative Humidity (%)	45~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

### 1.5 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Tablet Type (three orthogonal axis (X: flat, Y: portrait, Z: landscape)) and Notebook Type, and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	30	-	-	v	v	-	-	v	v	v	v	v	v	v	v
E.I.R.P	30	-	-	v	v	-	-	v	v	Max. Power					
Radiated Spurious Emission	30	-	-	v	v	-	-	v		v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All the radiated test cases were performed with Sample 1.</li> </ol>														

### 2.2 Connection Diagram of Test System

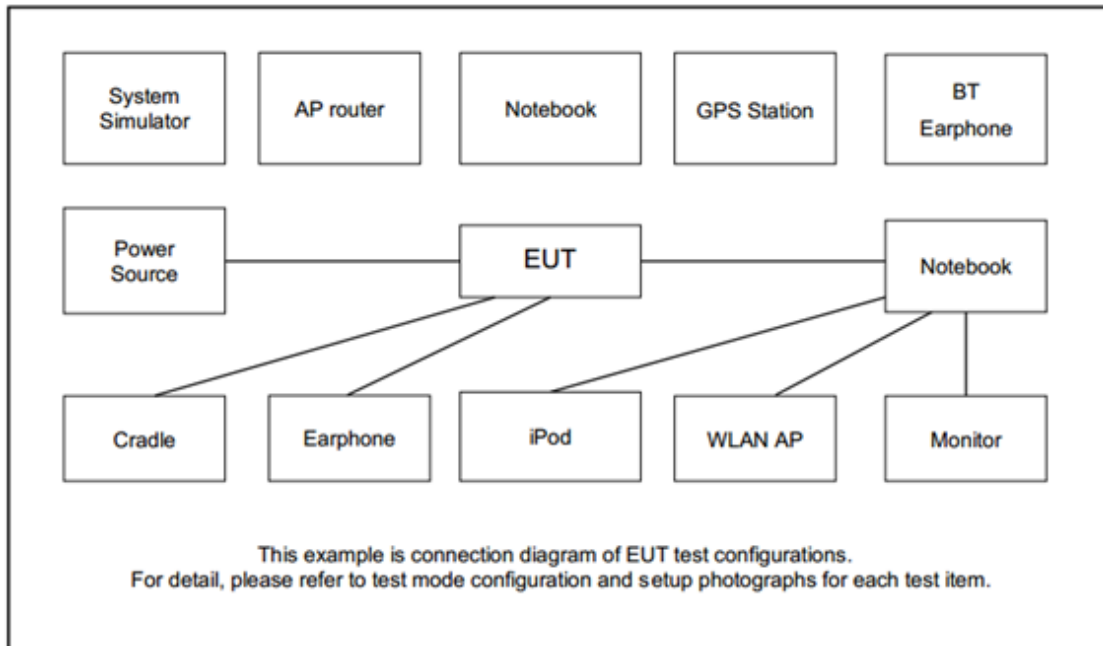



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	iPhone Earphone	Apple	N/A	N/A	Unshielded, 1.0 m	N/A

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5




### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

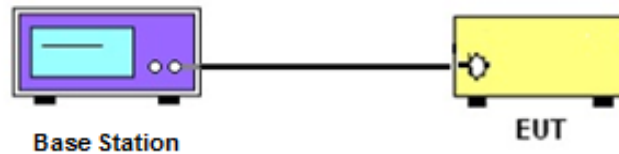

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.2 Conducted Output Power Measurement**

### **3.2.1 Description of the Conducted Output Power Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.2.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### 3.3 Effective Isotropic Radiated Power

#### 3.3.1 Description of Effective Isotropic Radiated Power

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

**Remark:** EIRP use worst case measure the total power to cover per 5MHz Power.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.4.5

1. Determine the EIRP by adding the effective antenna gain to the adjusted power level.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup

For radiated test below 30MHz

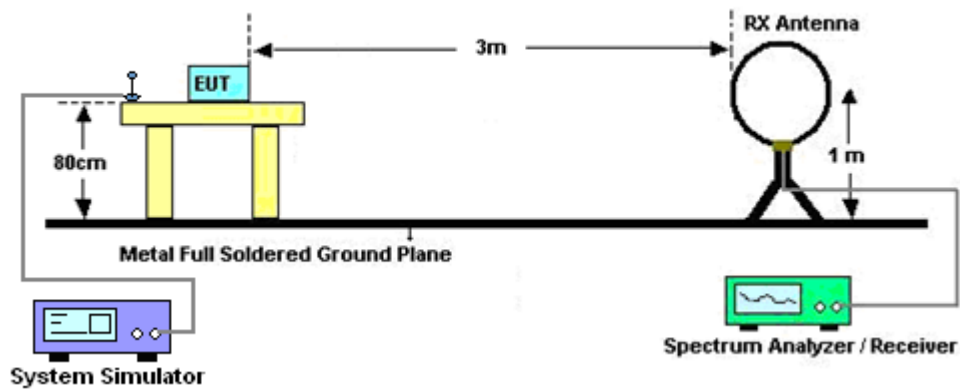


For radiated test from 30MHz to 1GHz

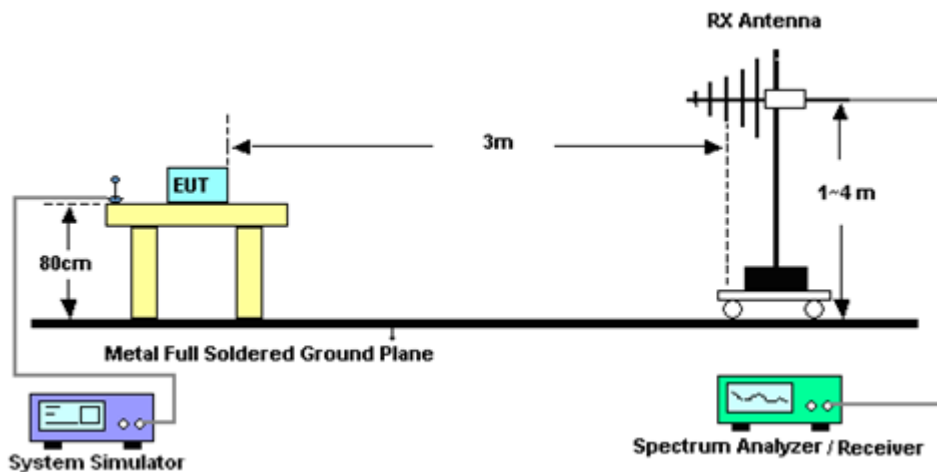

For radiated test from 1GHz to 18GHz



For radiated test above 18GHz

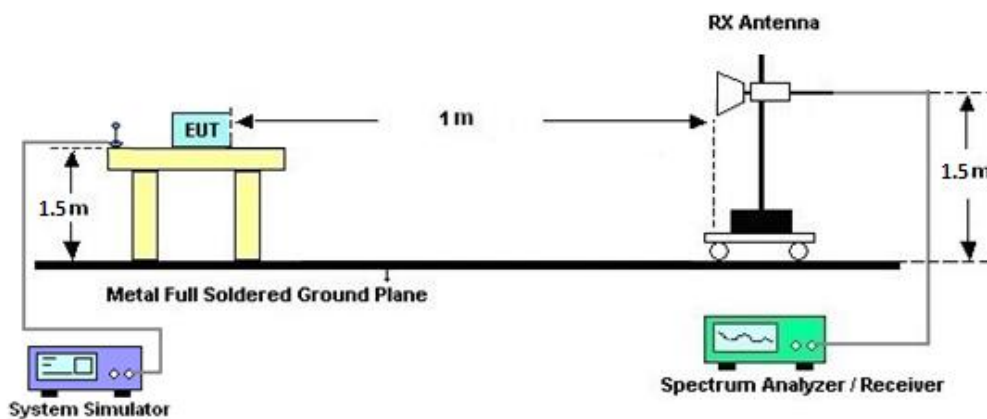

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.2 Radiated Spurious Emission Measurement

### 4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $70 + 10 \log(P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)  
$$= P(\text{W}) - [70 + 10\log(P)] (\text{dB})$$
$$= [30 + 10\log(P)] (\text{dBm}) - [70 + 10\log(P)] (\text{dB})$$
$$= -40\text{dBm}.$$



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Dec. 22, 2022~ Jan. 07, 2023	Sep. 19, 2023	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	41912 & 05	30MHz~1GHz	Feb. 06, 2022	Dec. 22, 2022~ Jan. 07, 2023	Feb. 05, 2023	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Dec. 22, 2022~ Jan. 07, 2023	Apr. 23, 2023	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 27, 2021	Dec. 22, 2022~ Dec. 25, 2022	Dec. 26, 2022	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 26, 2022	Dec. 26, 2022~ Jan. 07, 2023	Dec. 25, 2023	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 25, 2022	Dec. 22, 2022~ Jan. 07, 2023	Jul. 24, 2023	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 23, 2022	Dec. 22, 2022~ Jan. 07, 2023	Jun. 22, 2023	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 14, 2022	Dec. 22, 2022~ Jan. 07, 2023	May 13, 2023	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00993	18GHz~40GHz	Nov. 24, 2022	Dec. 22, 2022~ Jan. 07, 2023	Nov. 23, 2023	Radiation (03CH15-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18G -56-01-A70	EC1900269	1GHz~18GHz	Dec. 27, 2021	Dec. 22, 2022~ Dec. 25, 2022	Dec. 26, 2022	Radiation (03CH15-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18G -56-01-A70	EC1900269	1GHz~18GHz	Dec. 26, 2022	Dec. 26, 2022~ Jan. 07, 2023	Dec. 25, 2023	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060802	1GHz-18GHz	Mar. 08, 2022	Dec. 22, 2022~ Jan. 07, 2023	Mar. 07, 2023	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 18, 2022	Dec. 22, 2022~ Jan. 07, 2023	Oct. 17, 2023	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	May 11, 2022	Dec. 22, 2022~ Jan. 07, 2023	May 10, 2023	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 22, 2022~ Jan. 07, 2023	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 22, 2022~ Jan. 07, 2023	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k5)	RK-000451	N/A	N/A	Dec. 22, 2022~ Jan. 07, 2023	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4,MY98 38/4PE,519228/2	30MHz~18G	Jun. 21, 2022	Dec. 22, 2022~ Jan. 07, 2023	Jun. 20, 2023	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	30MHz-40GHz	Jan. 04, 2022	Dec. 22, 2022~ Jan. 02, 2023	Jan. 03, 2023	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	30MHz-40GHz	Jan. 03, 2023	Jan. 03, 2023~ Jan. 07, 2023	Jan. 02, 2024	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Dec. 22, 2022~ Jan. 07, 2023	Mar. 09, 2023	Radiation (03CH15-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6201664755	LTE FDD/TDD LTE-2CC DLCA/ULCA	Aug. 01, 2022	Jan. 06, 2023	Jul. 31, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Jan. 06, 2023	Jan. 05, 2024	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.27 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.72 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.12 dB
---	---------





## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power & EIRP)

LTE Band 30 Maximum Average Power [dBm] (GT - LC = 1.89 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK		20.22		22.11	0.1626
10	1	25			20.17			
10	1	49			20.02			
10	25	0			18.97			
10	25	12			18.86			
10	25	25			18.94			
10	50	0			18.98			
10	1	0	16-QAM		18.74		20.84	0.1213
10	1	25			18.95			
10	1	49			18.66			
10	25	0			18.01			
10	25	12			17.93			
10	25	25			17.97			
10	50	0			18.03			
Limit	EIRP < 250mW/5MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

LTE Band 30 Maximum Average Power [dBm] (GT - LC = 1.89 dB)									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)	
5	1	0	QPSK		20.13	20.17	20.09	22.06	0.1607
5	1	12			20.10	20.12	20.09		
5	1	24			20.00	20.02	19.95		
5	12	0			18.79	18.81	18.79		
5	12	7			18.91	18.91	18.86		
5	12	13			18.82	18.85	18.74		
5	25	0			18.94	18.95	18.87		
5	1	0	16-QAM		18.60	18.66	18.59	20.78	0.1197
5	1	12			18.88	18.89	18.85		
5	1	24			18.58	18.61	18.51		
5	12	0			17.86	17.92	17.79		
5	12	7			17.82	17.88	17.74		
5	12	13			17.88	17.92	17.88		
5	25	0			18.03	18.04	17.97		
Limit	EIRP < 250mW/5MHz			Result			Pass		

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.



## Appendix B. Test Results of Radiated Test

### LTE Band 30

LTE Band 30 / 5MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4608	-64.46	-40	-24.46	-50.37	-73.99	3.14	12.67	H
	6916	-60.53	-40	-20.53	-53.64	-68.65	3.88	12.00	H
	9225	-56.97	-40	-16.97	-52.31	-63.41	4.46	10.90	H
									H
									H
									H
									H
	4608	-62.44	-40	-22.44	-48.8	-71.97	3.14	12.67	V
	6916	-59.65	-40	-19.65	-52.89	-67.77	3.88	12.00	V
	9225	-57.31	-40	-17.31	-52.15	-63.75	4.46	10.90	V
									V
									V
									V
									V
Middle	4615	-64.96	-40	-24.96	-50.9	-74.46	3.14	12.64	H
	6924	-53.42	-40	-13.42	-46.55	-61.53	3.89	12.00	H
	9234	-57.17	-40	-17.17	-52.51	-63.56	4.47	10.86	H
									H
									H
									H
									H
	4615	-62.65	-40	-22.65	-49.02	-72.15	3.14	12.64	V
	6924	-60.41	-40	-20.41	-53.66	-68.52	3.89	12.00	V
	9234	-57.44	-40	-17.44	-52.26	-63.83	4.47	10.86	V
									V
									V
									V
									V
								V	



Highest	4620	-55.65	-40	-15.65	-50.09	-65.13	3.14	12.62	H
	6931	-53.33	-40	-13.33	-53.59	-61.44	3.89	12.00	H
	9243	-51.49	-40	-11.49	-52.24	-57.85	4.47	10.83	H
									H
									H
									H
									H
	4620	-54.11	-40	-14.11	-48.99	-63.59	3.14	12.62	V
	6931	-52.72	-40	-12.72	-53.06	-60.83	3.89	12.00	V
	9243	-51.27	-40	-11.27	-51.48	-57.63	4.47	10.83	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4608	-63.69	-40	-23.69	-49.6	-73.22	3.14	12.67	H
	6916	-59.59	-40	-19.59	-52.7	-67.71	3.88	12.00	H
	9225	-54.14	-40	-14.14	-49.48	-60.58	4.46	10.90	H
	11529	-54.75	-40	-14.75	-53.75	-60.94	4.99	11.19	H
	13833	-52.24	-40	-12.24	-54.43	-59.49	5.58	12.83	H
									H
									H
	4608	-61.65	-40	-21.65	-48.02	-71.18	3.14	12.67	V
	6916	-58.68	-40	-18.68	-51.92	-66.80	3.88	12.00	V
	9225	-55.37	-40	-15.37	-50.21	-61.81	4.46	10.90	V
	11529	-54.33	-40	-14.33	-53.65	-60.52	4.99	11.19	V
	13833	-51.12	-40	-11.12	-52.92	-58.37	5.58	12.83	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.