

ANTENNA SPECIFICATIONS

Item		Specifications
Antenna	Frequency Range	2400~2483.5MHz
	Polarization	Linear
	Peak Gain	-0.2dBi
	V.S.W.R	1.94~2.2
	Impedance	50Ω
	Return Loss	-9.9~-8.6dB
	Connector	External antenna
	Efficiency	43.76%
	Type	Wire antenna
	Size	32.25x0.3mm


AS321703823510

Antenna type:




Produ: **DONGGUAN SUNTECH PRECISION ELECTRONICS CO. LTD**

Address : Shun Tai Industrial Park, Ferry Road, Chai Sha Tsuen, Sha Tin Town, New Dongguan

ANTENNA PATTERN

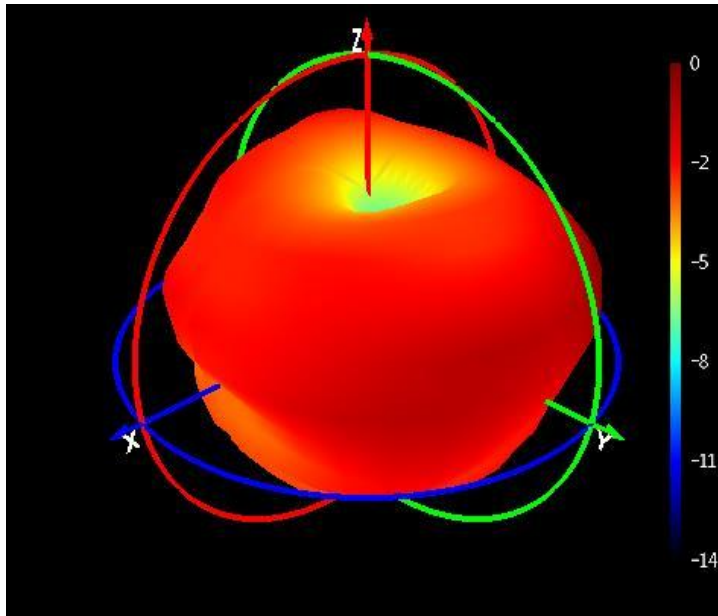

Freq(MHz)	Gain(dBi)	Effi(dB)	Effi(%)
2400	-1.3	-3.6	43.8
2410	-1.3	-3.5	44.3
2420	-1.2	-3.5	45.0
2430	-1.2	-3.4	45.7
2440	-1.1	-3.3	46.6
2450	-1.0	-3.2	47.8
2460	-0.7	-3.1	49.1
2470	-0.5	-3.0	49.9
2480	-0.3	-3.0	50.7
2490	-0.2	-2.9	51.3
AVG	-0.9	-3.2	47.4

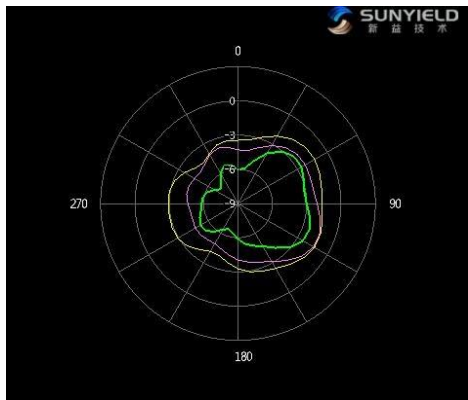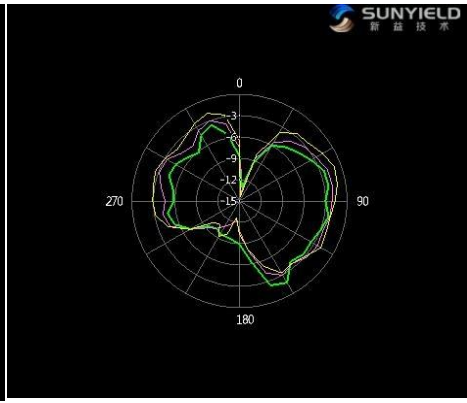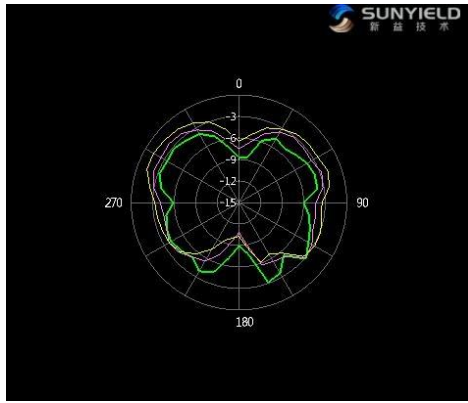

Antenna Picture:

