

ANTENNA SPECIFICATIONS



Item		Specifications
Antenna	Frequency Range	2400~2483.5MHz
	Polarization	Linear
	Peak Gain	-0.99dBi
	V.S.W.R	< 2
	Impedance	50Ω
	Return Loss	< -10dBm
	Connector	On-board antenna
	Efficiency	18.38%
	Type	PCB antenna
	Size	12.9x6.5mm


Antenna type : pcb antenna

Produ : Shenzhen Jingxun Technology Co., Ltd.

Address： 3/F, A5 Building Zhiyuan Community No.1001, Xueyuan Road Nanshan District, Shenzhen City

ANTENNA PATTERN

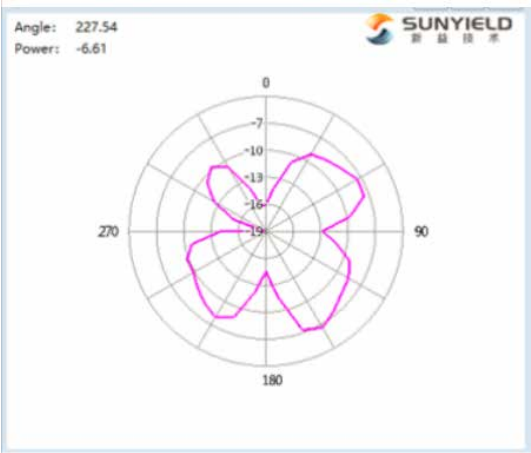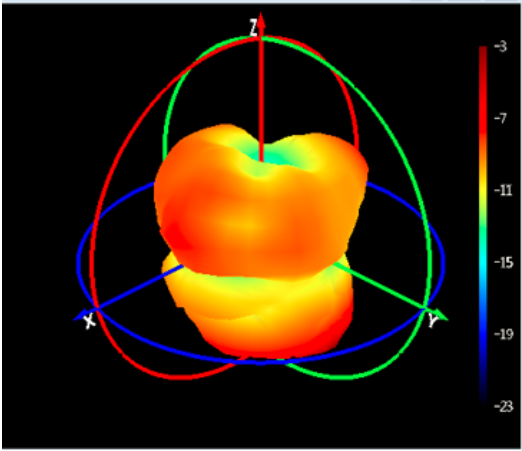

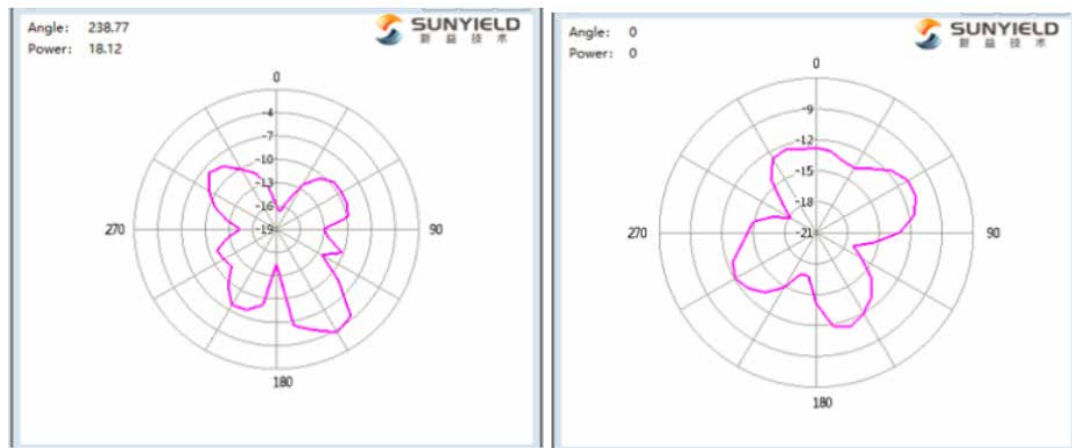

频率(MHZ)	增益(dBi)	效率(dB)	效率(%)
2400	-3.60	-9.42	11.42
2410	-3.27	-8.82	13.13
2420	-2.89	-8.28	14.87
2430	-2.50	-7.77	16.71
2440	-2.14	-7.34	18.45
2450	-1.72	-6.91	20.37
2460	-1.35	-6.54	22.18
2470	-1.11	-6.28	23.58
2480	-0.99	-6.07	24.69
MAX	-0.99	-6.07	24.69
Min	-3.6	-9.42	11.42
AVG	-2.17	-7.49	18.38

Antenna Picture :

