



TESTING LABORATORY  
CERTIFICATE#4323.01



## FCC PART 15.247


### TEST REPORT

For

**JiangSu HuiTong Group Co.,Ltd**

24#,2 block TaoHuawu new district,ZhenJiang City, JiangSu,P.R.C,ZhenJiang,  
China

**FCC ID: PUW-HTSF2203**

<b>Report Type:</b> Original Report	<b>Product Type:</b> RealityAdapter
<b>Test Engineer:</b> <u>Stone Zhang</u> 	
<b>Report Number:</b> <u>RSHA180906006-00A</u>	
<b>Report Date:</b> <u>2018-10-13</u>	
<b>Reviewed By:</b> <u>Oscar Ye</u> <u>RF Leader</u>	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
EUT EXERCISE SOFTWARE .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	8
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>FCC §1.1307 (b) (1) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
CALCULATED FORMULARY:.....	12
CALCULATED DATA:.....	13
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
ANTENNA CONNECTOR CONSTRUCTION .....	14
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP .....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE .....	15
CORRECTED FACTOR & MARGIN CALCULATION .....	16
TEST RESULTS SUMMARY .....	16
TEST DATA .....	16
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
EUT SETUP .....	19
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE .....	20
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	20
TEST RESULTS SUMMARY .....	20
TEST DATA .....	21
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST DATA .....	33
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>36</b>

APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST DATA .....	36
<b>FCC §15.247(d) – BAND EDGE.....</b>	<b>41</b>
APPLICABLE STANDARD .....	41
TEST PROCEDURE .....	41
TEST DATA .....	41
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>43</b>
APPLICABLE STANDARD .....	43
TEST PROCEDURE .....	43
TEST DATA .....	43

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	JiangSu HuiTong Group Co.,Ltd
Tested Model	SF2203-H1-001
Series Model	SF2203-H1-002, SF2203-H2-001, SF2203-H2-002
Model Difference	Colour and Hole Size
Product Type	RealityAdapter
Dimension	78 mm(L) × 40 mm(W) × 10 mm(H)
Power Supply	DC 5V

\*All measurement and test data in this report was gathered from production sample serial number: 20180906006.  
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-09-06)

### Objective

This report is prepared on behalf of JiangSu HuiTong Group Co.,Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submission with FCC ID: PUW-HTSF2203.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19 dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

## Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for Zigbee mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	...	...
...	...	...	...
...	...	...	...
...	...	25	2475
18	2440	26	2480

EUT was tested with Channel 11, 12, 18, 24, 25 and 26.

Note: Channel 12, 24, 25 are only tested Spurious Emissions and Maximum Conducted Output Power.

### Equipment Modifications

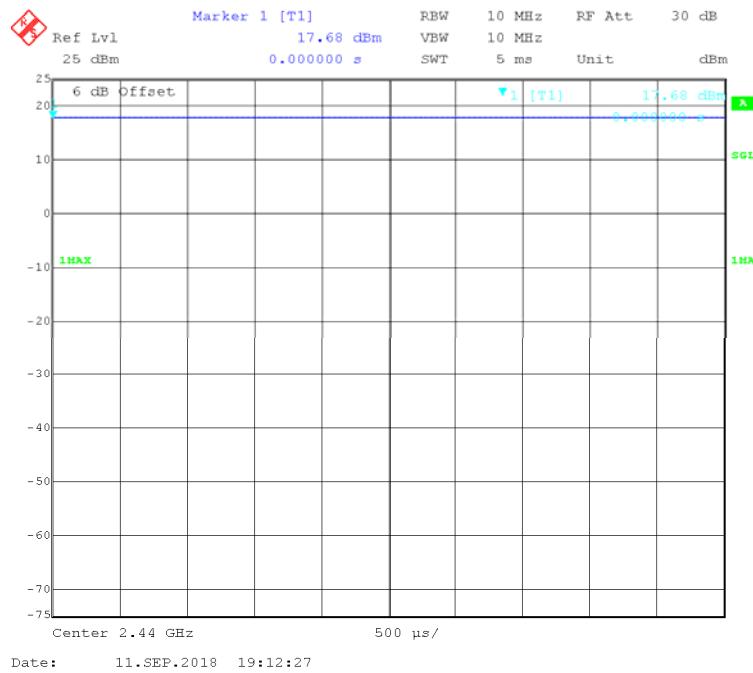
No modification was made to the EUT tested.

### EUT Exercise Software

RF test tool: SecureCRT

The worst case was performed as below:

Channel	Power Level
Channel 11	-10
Channel 12	-9
Channel 18	-10
Channel 24	-6
Channel 25	-13
Channel 26	-28

**Duty Cycle:****Channel 18: 2440MHz**

Channel	Duty Cycle	T(us)	1/T(kHz)	10log(1/x)
Middle Channel	100%	/	/	0

Note: "x" means the Duty Cycle.

### Support Equipment List and Details

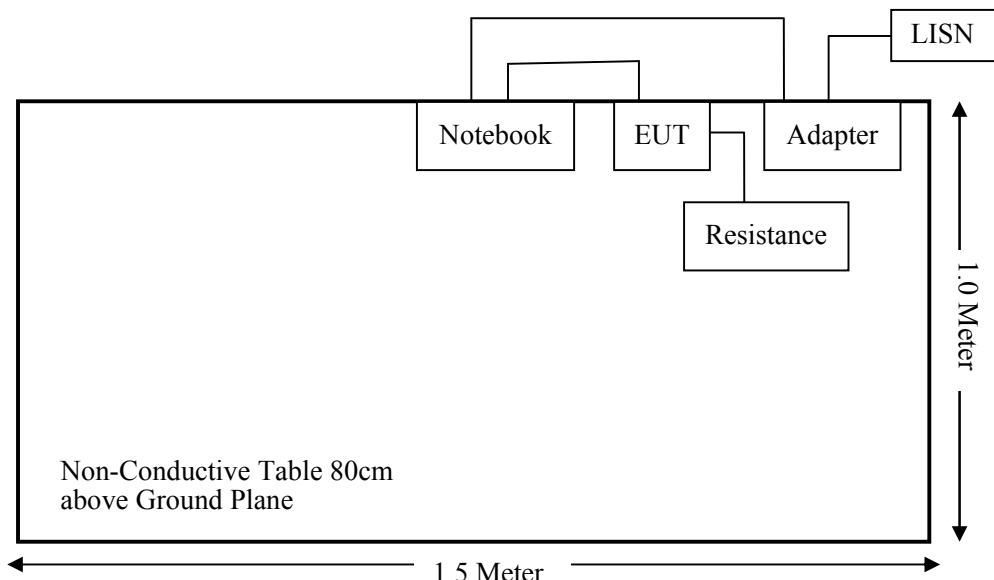
Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
/	Resistance	100W50R	/

### External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	0.8	EUT	Resistance

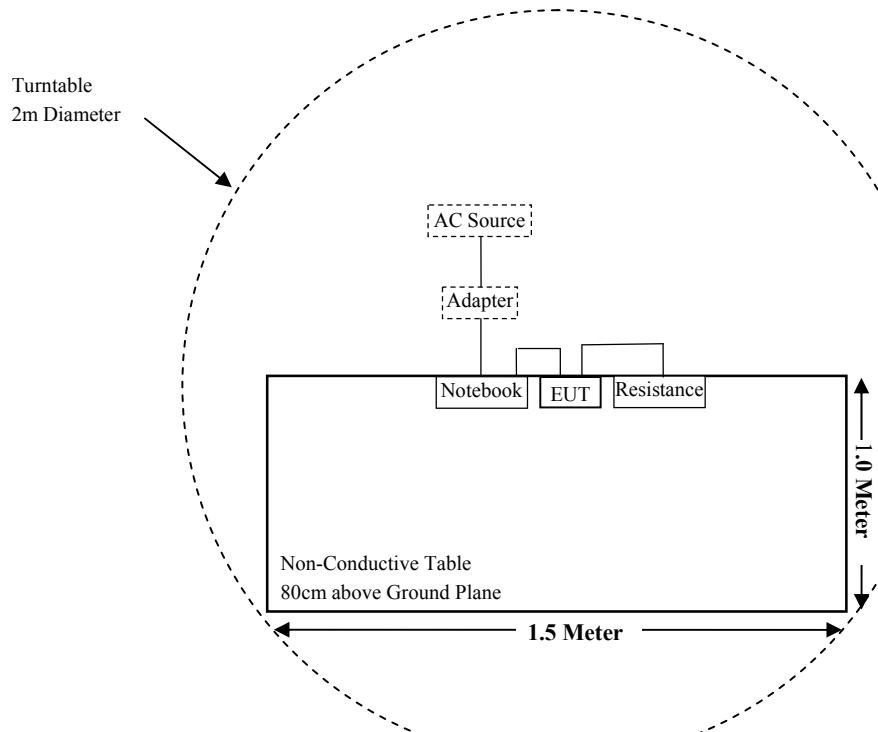
### Block Diagram of Test Setup

For Conducted Emissions:

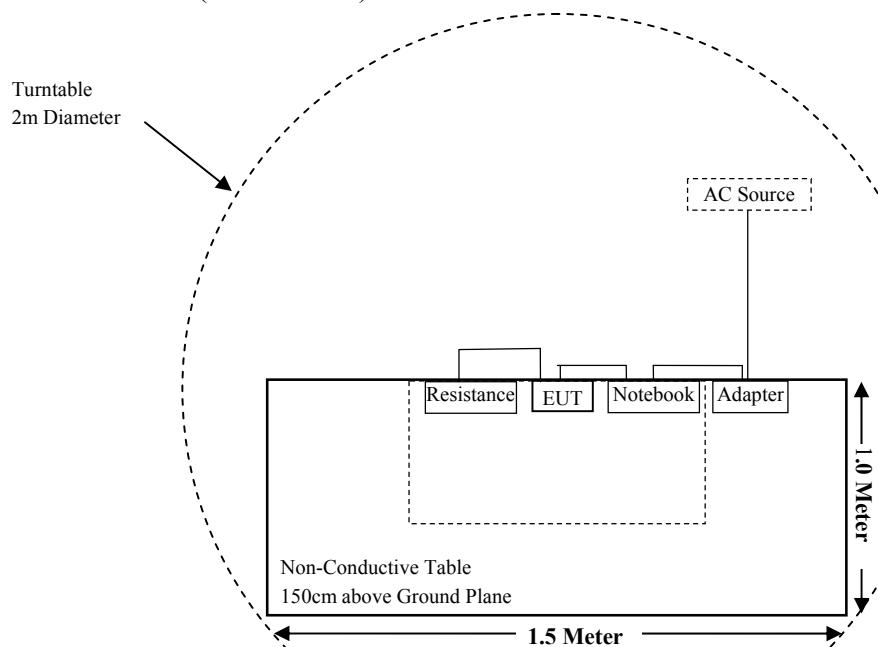


## Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):



For Radiated Emissions(Above 1GHz):



## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band notch Filter	BRM50702	/	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-20
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
JiangSu HuiTong Group Co.,Ltd	RF Cable	/	/	Each Time	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density

### Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4 π R<sup>2</sup> = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

**Calculated Data:**

Mode	Frequency Range (MHz)	Antenna Gain		Turn-up Conducted Output Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )	MPE ratio
		(dBi)	(numerical)	(dBm)	(mW)				
Zigbee	2405~2480	0	1.00	15.00	31.62	20	0.0063	1.0	0.0062
BT3.0	2402-2480	0	1.00	7.00	5.01	20	0.0010	1.0	0.0010
BLE	2402-2480	0	1.00	7.00	5.01	20	0.0010	1.0	0.0010
2.4G Wi-Fi	2412-2462	0	1.00	23.00	199.53	20	0.0397	1.0	0.0397
	2422-2452	0	1.00	20.00	100.00	20	0.0199	1.0	0.0199

Note: Zigbee and Wi-Fi can transmit simultaneously; the worst condition is Zigbee & 2.4G Wi-Fi as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0397/1.00 + 0.0063/1.00 = 0.0397 + 0.0063 = 0.046 < 1.0$$

**Result:** The device meet FCC MPE at 20 cm distance. MPE evaluation of single and simultaneous transmission meets the requirement of standard.

## FCC §15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

The EUT has a PCB antenna and the antenna gain is 0 dBi, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

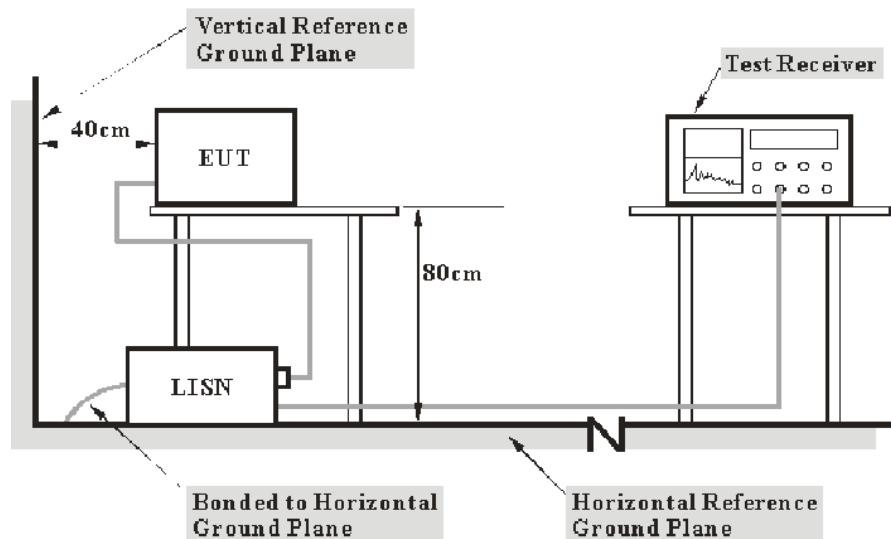
**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup



Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#).

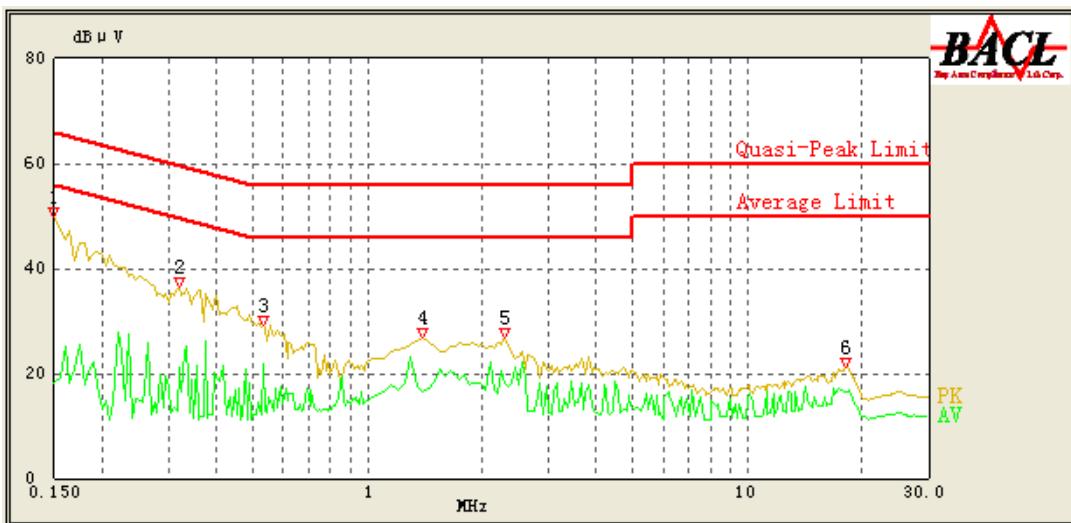
## Test Data

### Environmental Conditions

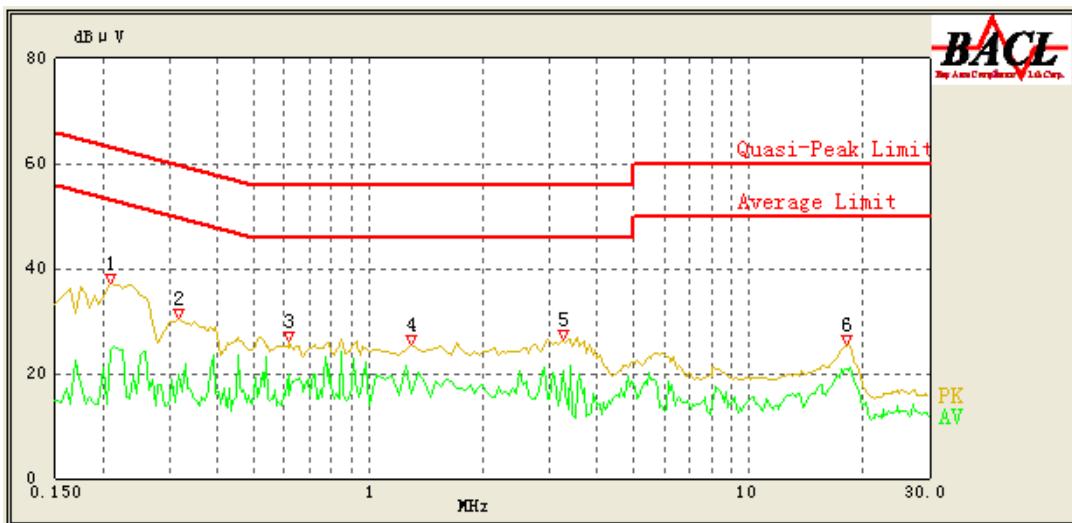
Temperature:	24.1 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

*The testing was performed by Stone Zhang on 2018-09-11.*

*EUT operation mode: Transmitting in channel 18. (Worst case)*

**AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Comment
0.150	49.74	QP	9.000	L1	16.06	66.00	16.26	Compliance
0.150	18.06	AV	9.000	L1	16.06	56.00	37.94	Compliance
0.320	36.50	QP	9.000	L1	16.04	61.14	24.64	Compliance
0.320	21.03	AV	9.000	L1	16.04	51.14	30.11	Compliance
0.530	29.09	QP	9.000	L1	16.06	56.00	26.91	Compliance
0.530	21.78	AV	9.000	L1	16.06	46.00	24.22	Compliance
1.400	26.88	QP	9.000	L1	15.87	56.00	29.12	Compliance
1.400	16.40	AV	9.000	L1	15.87	46.00	29.60	Compliance
2.300	27.00	QP	9.000	L1	15.85	56.00	29.00	Compliance
2.300	18.25	AV	9.000	L1	15.85	46.00	27.75	Compliance
18.150	21.14	QP	9.000	L1	16.35	60.00	38.86	Compliance
18.250	16.65	AV	9.000	L1	16.36	50.00	33.35	Compliance

**AC 120V/60 Hz, Neutral**

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Comment
0.210	37.11	QP	9.000	N	16.05	64.29	27.18	Compliance
0.210	24.55	AV	9.000	N	16.05	54.29	29.74	Compliance
0.315	30.34	QP	9.000	N	16.07	61.29	30.95	Compliance
0.315	19.72	AV	9.000	N	16.07	51.29	31.57	Compliance
0.620	26.05	QP	9.000	N	16.04	56.00	29.95	Compliance
0.620	15.88	AV	9.000	N	16.04	46.00	30.12	Compliance
1.300	25.58	QP	9.000	N	15.93	56.00	30.42	Compliance
1.300	16.12	AV	9.000	N	15.93	46.00	29.88	Compliance
3.250	26.64	QP	9.000	N	15.89	56.00	29.36	Compliance
3.250	20.38	AV	9.000	N	15.89	46.00	25.62	Compliance
18.200	25.61	QP	9.000	N	16.11	60.00	34.39	Compliance
18.250	20.66	AV	9.000	N	16.11	50.00	29.34	Compliance

**Note:**

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dB $\mu$ V) - Corrected Amplitude (dB $\mu$ V)

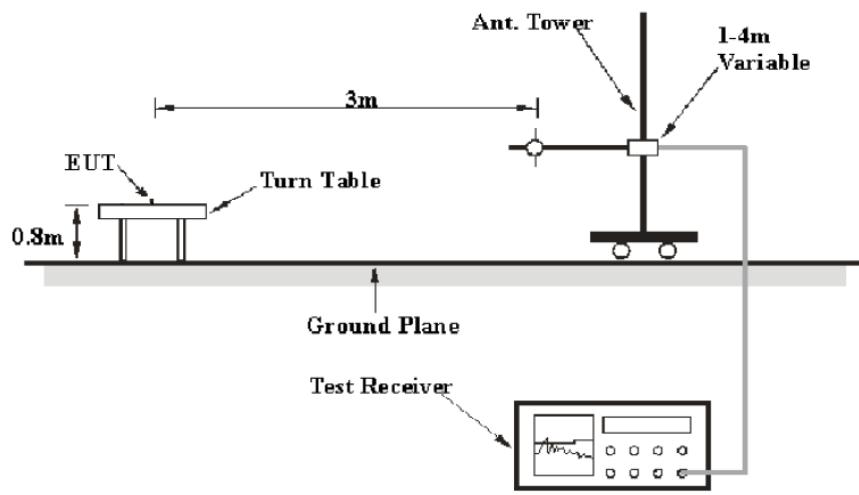
## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

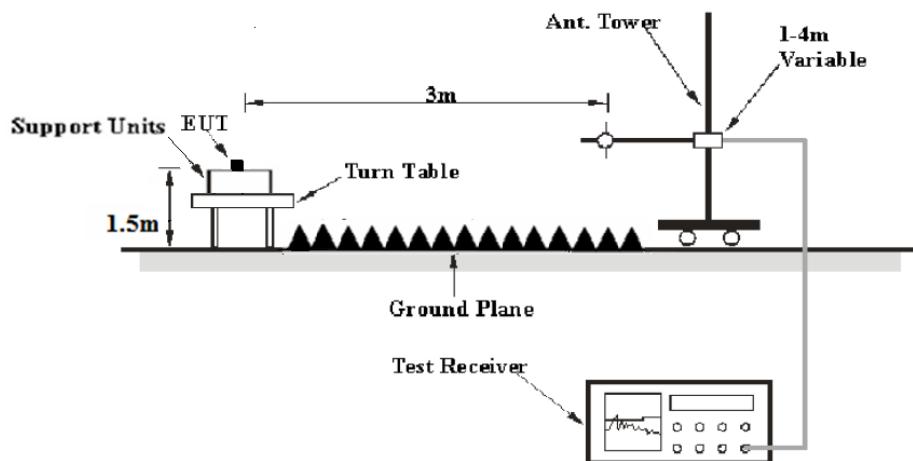
FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

Below 1 GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

## Test Results Summary

According to the recorded data in following table, the EUT is compliant with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	24.1~28 °C
<b>Relative Humidity:</b>	42~50 %
<b>ATM Pressure:</b>	101.2kPa

The testing was performed by Stone Zhang from 2018-09-11 to 2018-10-12.

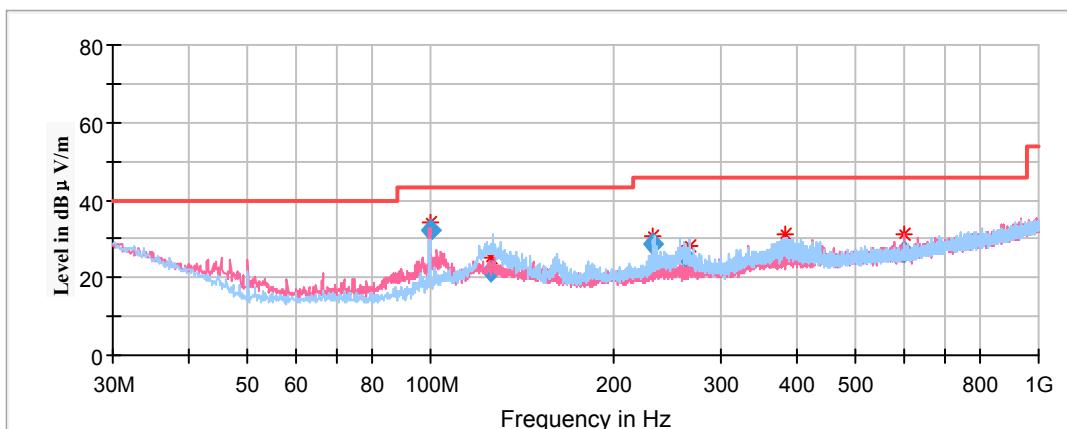
EUT operation mode: Transmitting

### Spurious Emission Test:

#### 30MHz-1GHz

(Pre-scan with channel 11, channel 18 and channel 26 of operation in the X,Y and Z axes of orientation, the worst case **channel 26 of operation in X-axis of orientation** was recorded)

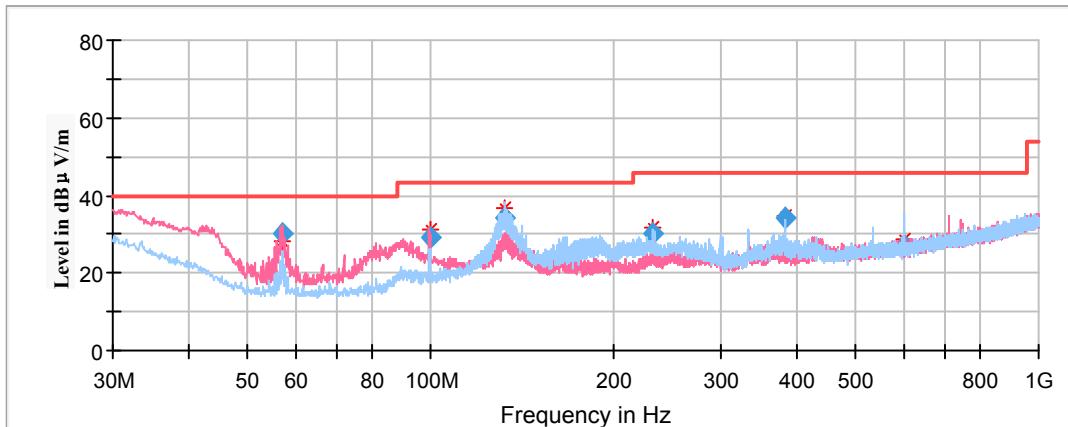
Channel 26



Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
99.936300	32.04	101.0	V	127.0	-14.9	43.50	11.46
125.725200	21.51	101.0	H	298.0	-11.4	43.50	21.99
232.325200	28.45	101.0	H	236.0	-12.2	46.00	17.55
265.843400	24.09	101.0	H	350.0	-11.6	46.00	21.91
381.828350	26.08	101.0	H	256.0	-8.5	46.00	19.92
599.961750	26.60	101.0	V	226.0	-5.2	46.00	19.40

**30MHz-1GHz**

*(The worst case channel 26 of operation and High channel of 802.11n-HT20 mode transmitting simultaneously in X-axis of orientation was recorded)*

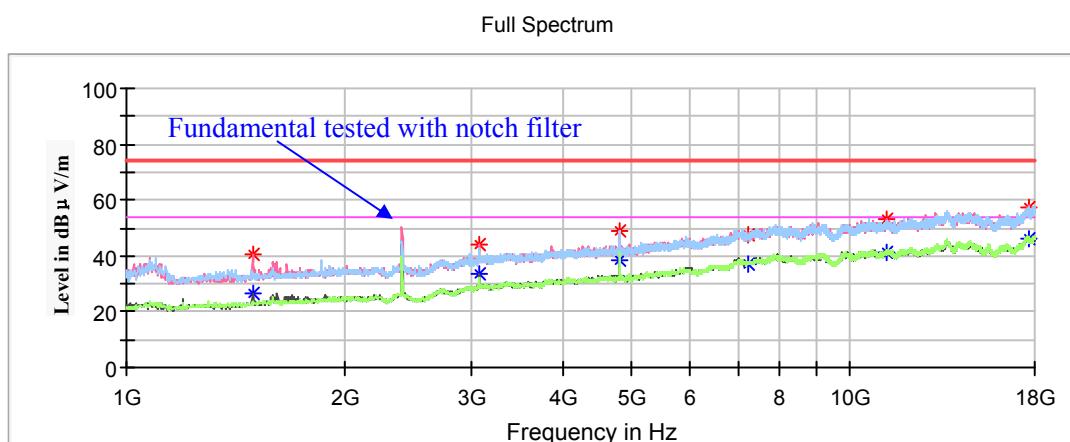


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
57.094250	30.44	199.0	V	107.0	-17.8	40.00	9.56
99.596250	29.18	101.0	V	224.0	-15.0	43.50	14.32
132.140750	34.19	199.0	H	341.0	-11.7	43.50	9.31
232.336500	30.18	199.0	H	320.0	-12.2	46.00	15.82
384.005850	33.98	101.0	H	322.0	-8.5	46.00	12.02
600.005850	26.96	199.0	H	204.0	-5.2	46.00	19.04

**1GHz-18GHz**(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

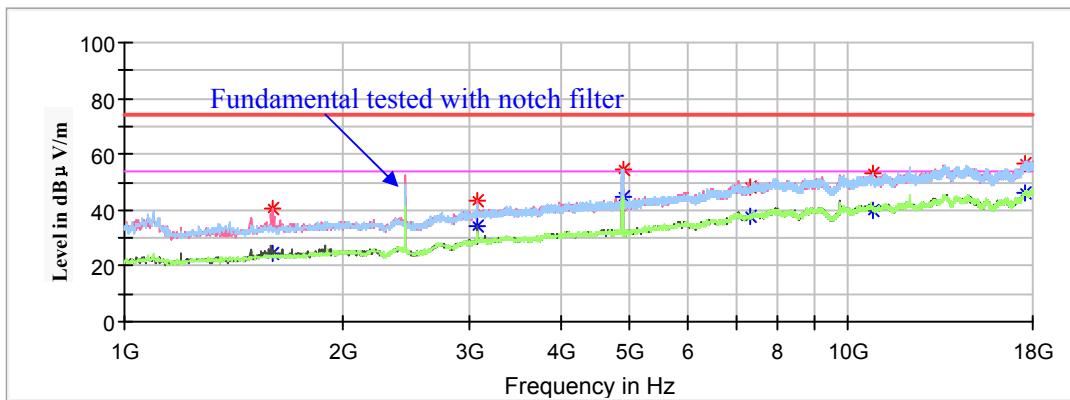
1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)  
Corrected Amplitude (dB $\mu$ V/m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)  
Margin (dB) = Limit (dB $\mu$ V/m) - Corrected Amplitude (dB $\mu$ V /m)

**Low Channel : 2405MHz**

Frequency (MHz)	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
1493.000000	---	26.36	150.0	V	188.0	150.0	54.00	27.64
1493.000000	40.55	---	150.0	V	188.0	150.0	74.00	33.45
3072.300000	---	33.32	150.0	V	150.0	150.0	54.00	20.68
3072.300000	44.07	---	150.0	V	150.0	150.0	74.00	29.93
4810.000000	---	38.69	200.0	H	104.0	200.0	54.00	15.31
4810.000000	48.94	---	200.0	H	104.0	150.0	74.00	25.06
7215.000000	---	37.19	150.0	H	42.0	150.0	54.00	16.81
7215.000000	47.89	---	150.0	H	42.0	200.0	74.00	26.11
11228.900000	---	41.01	100.0	V	17.0	100.0	54.00	12.99
11228.900000	53.08	---	100.0	V	17.0	150.0	74.00	20.92
17661.700000	---	46.16	150.0	H	1.0	150.0	54.00	7.84
17661.700000	57.57	---	100.0	H	1.0	100.0	74.00	16.43

**Middle Channel: 2440MHz**

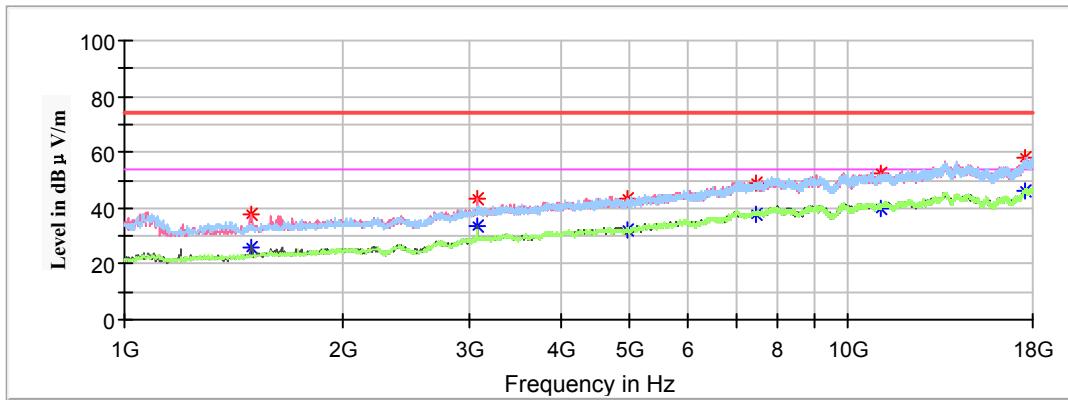
Full Spectrum



Frequency (MHz)	MaxPeak ( $\text{dB}\mu\text{V}/\text{m}$ )	Average ( $\text{dB}\mu\text{V}/\text{m}$ )	Rx Antenna		Turntable Degree	Corrected Factor ( $\text{dB}/\text{m}$ )	Limit ( $\text{dB}\mu\text{V}/\text{m}$ )	Margin (dB)
			Height (cm)	Polar (H/V)				
1600.100000	---	24.48	200.0	V	173.0	-7.2	54.00	29.52
1600.100000	40.70	---	200.0	V	173.0	-7.2	74.00	33.30
3070.600000	---	33.93	150.0	V	191.0	-1.5	54.00	20.07
3070.600000	43.71	---	150.0	V	191.0	-1.5	74.00	30.29
4880.000000	---	44.54	200.0	H	238.0	1.9	54.00	9.46
4880.000000	54.39	---	200.0	H	238.0	1.9	74.00	19.61
7320.000000	---	37.55	100.0	H	200.0	9.2	54.00	16.45
7320.000000	48.27	---	100.0	H	200.0	9.2	74.00	25.73
10843.000000	---	40.21	150.0	H	288.0	13.2	54.00	13.79
10843.000000	53.05	---	150.0	H	288.0	13.2	74.00	20.95
17581.800000	---	46.06	150.0	V	153.0	17.3	54.00	7.94
17581.800000	56.93	---	150.0	V	153.0	17.3	74.00	17.07

**High Channel: 2480MHz**

Full Spectrum



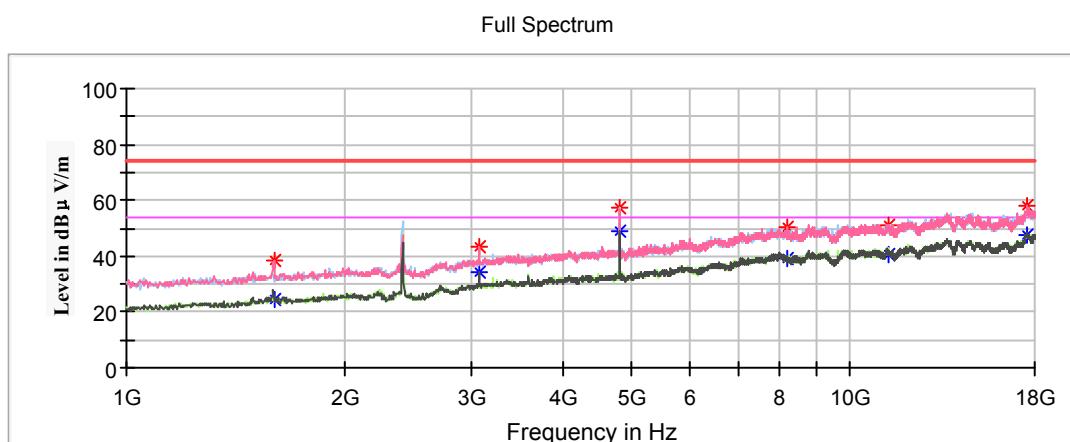
Frequency (MHz)	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
1493.000000	---	25.65	200.0	V	199.0	-7.6	54.00	28.35
1493.000000	38.03	---	200.0	V	199.0	-7.6	74.00	35.97
3070.600000	---	33.76	150.0	V	199.0	-1.5	54.00	20.24
3070.600000	43.36	---	150.0	V	199.0	-1.5	74.00	30.64
4960.000000	---	32.40	150.0	H	276.0	2.1	54.00	21.60
4960.000000	43.10	---	150.0	H	276.0	2.1	74.00	30.90
7440.000000	---	37.92	200.0	H	83.0	9.6	54.00	16.08
7440.000000	48.68	---	200.0	H	83.0	9.6	74.00	25.32
11069.100000	---	40.03	100.0	V	67.0	13.4	54.00	13.97
11069.100000	52.30	---	100.0	V	67.0	13.4	74.00	21.70
17532.500000	---	46.18	150.0	V	249.0	17.2	54.00	7.82
17532.500000	57.85	---	150.0	V	249.0	17.2	74.00	16.15

**1GHz-18GHz**

(The worst case channel 26 of operation and High channel of 802.11n-HT20 mode transmitting simultaneously in X-axis of orientation was recorded)

Note:

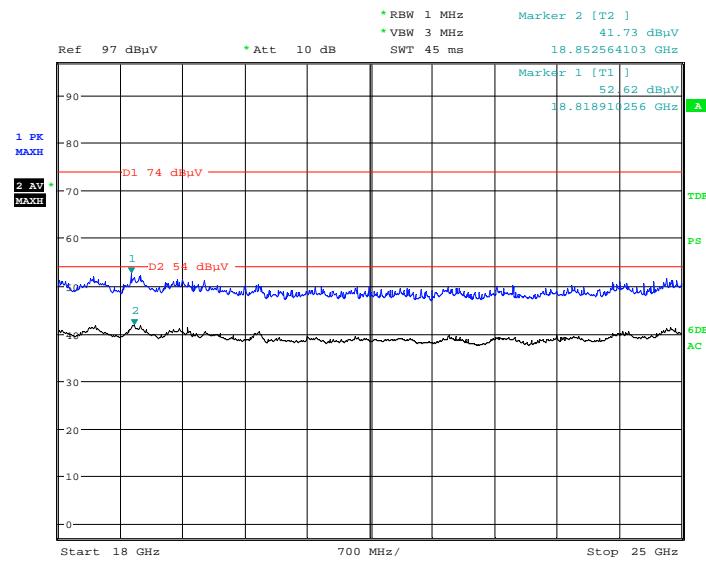
1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)  
 Corrected Amplitude (dB $\mu$ V/m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)  
 Margin (dB) = Limit (dB $\mu$ V/m) - Corrected Amplitude (dB $\mu$ V /m)



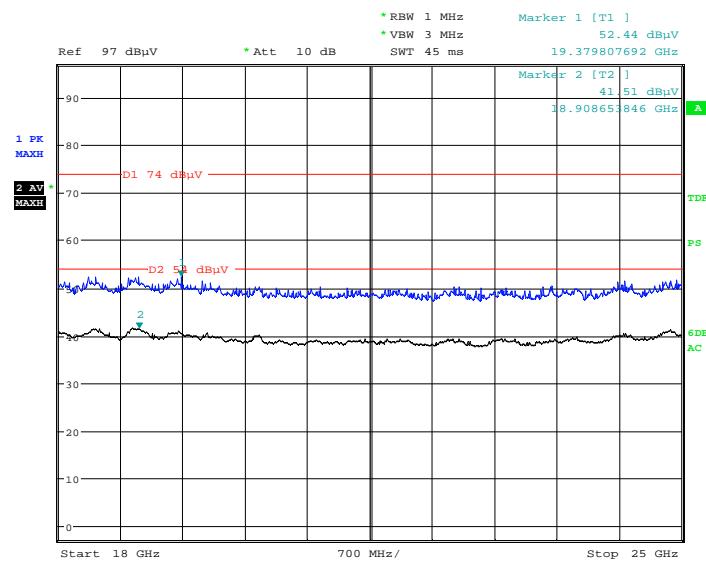
Frequency (MHz)	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
1598.400000	---	24.80	100.0	V	175.0	-7.2	54.00	29.20
1598.400000	38.21	---	100.0	V	175.0	-7.2	74.00	35.79
3070.600000	---	33.97	200.0	V	167.0	-1.5	54.00	20.03
3070.600000	43.10	---	200.0	V	167.0	-1.5	74.00	30.90
4808.000000	57.25	---	100.0	H	196.0	1.8	74.00	16.75
4808.000000	---	48.68	100.0	V	196.0	1.8	54.00	5.32
8174.000000	---	39.46	150.0	V	309.0	10.6	54.00	14.54
8174.000000	50.58	---	150.0	V	309.0	10.6	74.00	23.42
11332.600000	---	40.50	100.0	H	359.0	13.1	54.00	13.50
11332.600000	51.33	---	100.0	H	359.0	13.1	74.00	22.67
17581.800000	---	47.39	100.0	V	95.0	17.3	54.00	6.61
17581.800000	57.84	---	100.0	V	95.0	17.3	74.00	16.16

**18GHz-25GHz**

(Pre-scan with channel 11, channel 18 and channel 26 of operation in the X,Y and Z axes of orientation, the worst case channel 18 of operation in X-axis of orientation was recorded)

**Horizontal**

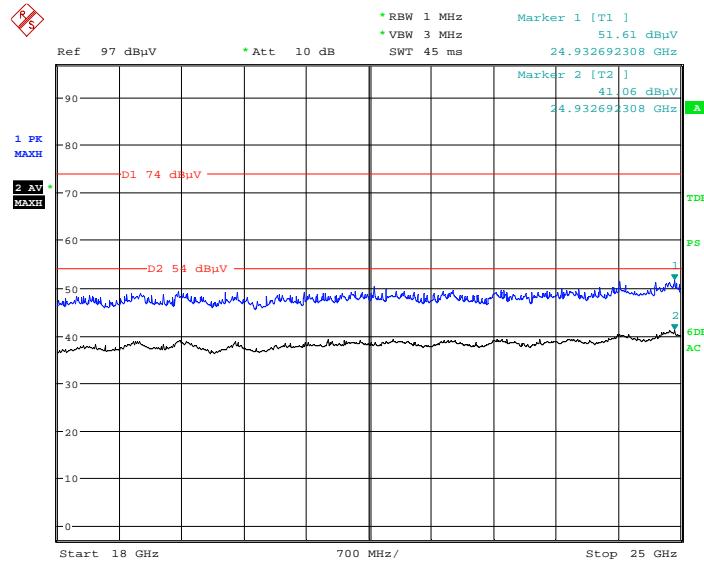
Date: 17.SEP.2018 10:08:17

**Vertical**

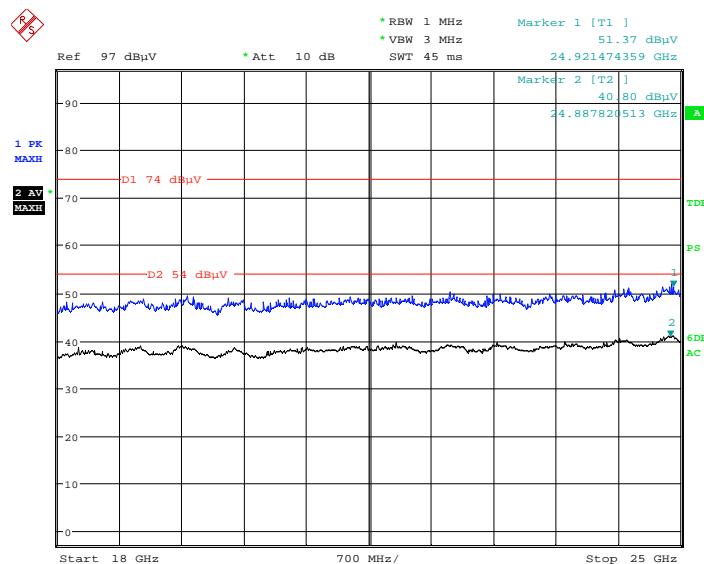
Date: 17.SEP.2018 10:32:11

**18GHz-25GHz**

(The worst case channel 26 of operation and High channel of 802.11n-HT20 mode transmitting simultaneously in X-axis of orientation was recorded)

**Horizontal**

Date: 12.OCT.2018 16:58:30

**Vertical**

Date: 12.OCT.2018 17:22:14

**Fundamental Test & Restricted Bands Emissions Test:***(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)*

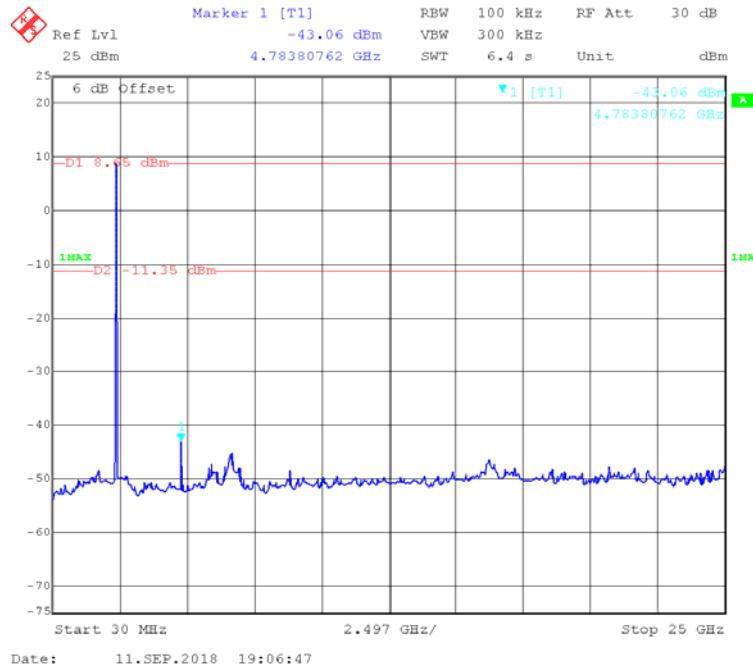
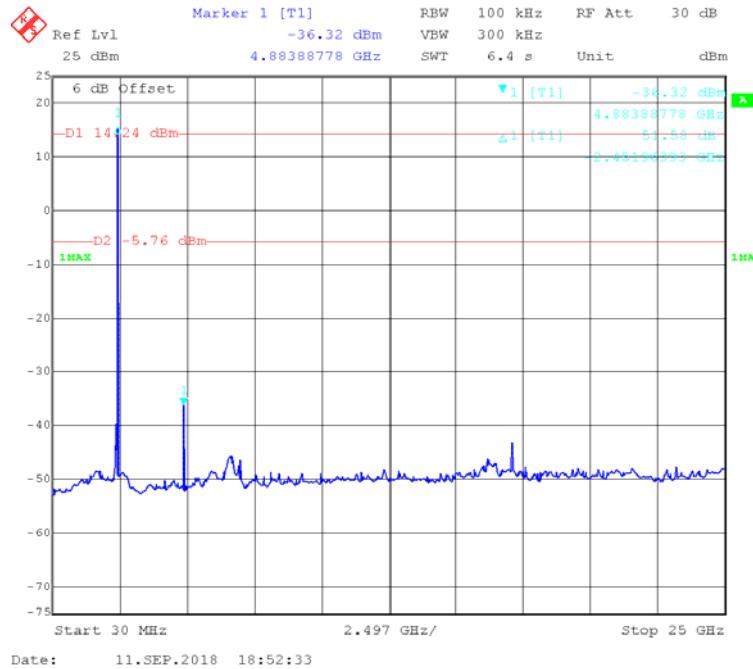
Note:

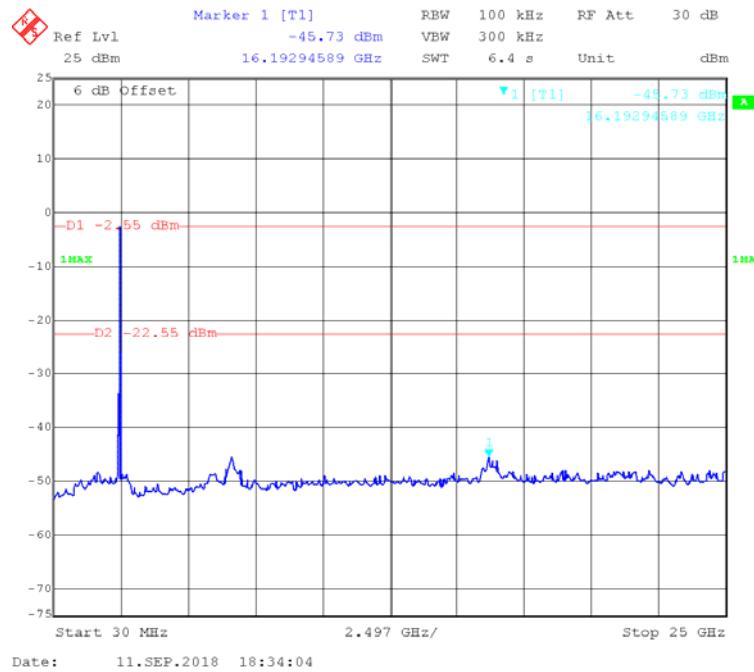
1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dB $\mu$ V/m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)Margin (dB) = Limit (dB $\mu$ V/m) - Corrected Amplitude (dB $\mu$ V /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
<b>Channel 11: 2405MHz</b>								
2405.000000	103.75	---	200.0	V	334.0	6.1	/	/
2405.000000	---	100.76	200.0	V	334.0	6.1	/	/
2405.000000	101.42	---	250.0	H	60.0	6.1	/	/
2405.000000	---	98.09	250.0	H	60.0	6.1	/	/
2390.000000	48.85	---	150.0	V	342.0	6.0	74.00	25.15
2390.000000	---	41.17	150.0	V	342.0	6.0	54.00	12.83
<b>Channel 12: 2410MHz</b>								
2410.000000	107.65	---	100.0	V	145.0	6.1	/	/
2410.000000	---	104.78	100.0	V	145.0	6.1	/	/
2410.000000	105.34	---	250.0	H	283.0	6.1	/	/
2410.000000	---	102.46	250.0	H	283.0	6.1	/	/
2390.000000	51.56	---	200.0	V	169.0	6.0	74.00	22.44
2390.000000	---	45.27	200.0	V	169.0	6.0	54.00	8.73
<b>Channel 18: 2440MHz</b>								
2440.000000	109.41	---	150.0	V	193.0	6.2	/	/
2440.000000	---	106.37	150.0	V	193.0	6.2	/	/
2440.000000	107.25	---	250.0	H	345.0	6.2	/	/
2440.000000	---	104.76	250.0	H	345.0	6.2	/	/
<b>Channel 24: 2470MHz</b>								
2470.000000	107.39	---	150.0	V	112.0	6.3	/	/
2470.000000	---	104.28	150.0	V	112.0	6.3	/	/
2470.000000	105.35	---	250.0	H	154.0	6.3	/	/
2470.000000	---	102.00	250.0	H	154.0	6.3	/	/
2483.500000	54.48	---	100.0	V	206.0	6.3	74.00	19.52
2483.500000	---	43.63	100.0	V	206.0	6.3	54.00	10.37

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
<b>Channel 25: 2475MHz</b>								
2475.000000	105.24	---	150.0	V	218.0	6.3	/	/
2475.000000	---	102.11	150.0	V	218.0	6.3	/	/
2475.000000	104.35	---	200.0	H	58.0	6.3	/	/
2475.000000	---	101.80	200.0	H	58.0	6.3	/	/
2483.500000	---	43.21	200.0	V	141.0	6.3	54.00	10.79
2483.500000	51.73	---	200.0	V	141.0	6.3	74.00	22.27
<b>Channel 26: 2480MHz</b>								
2480.000000	92.58	---	150.0	V	144.0	6.3	/	/
2480.000000	---	89.64	150.0	V	144.0	6.3	/	/
2480.000000	90.24	---	200.0	H	352.0	6.3	/	/
2480.000000	---	87.38	200.0	H	352.0	6.3	/	/
2483.500000	---	43.68	100.0	V	135.0	6.3	54.00	10.32
2483.500000	52.01	---	100.0	V	135.0	6.3	74.00	21.99

**Conducted Spurious Emissions at Antenna Port****Low Channel: 2405MHz****Middle Channel: 2440MHz**

**High Channel: 2480MHz**

## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Data

#### Environmental Conditions

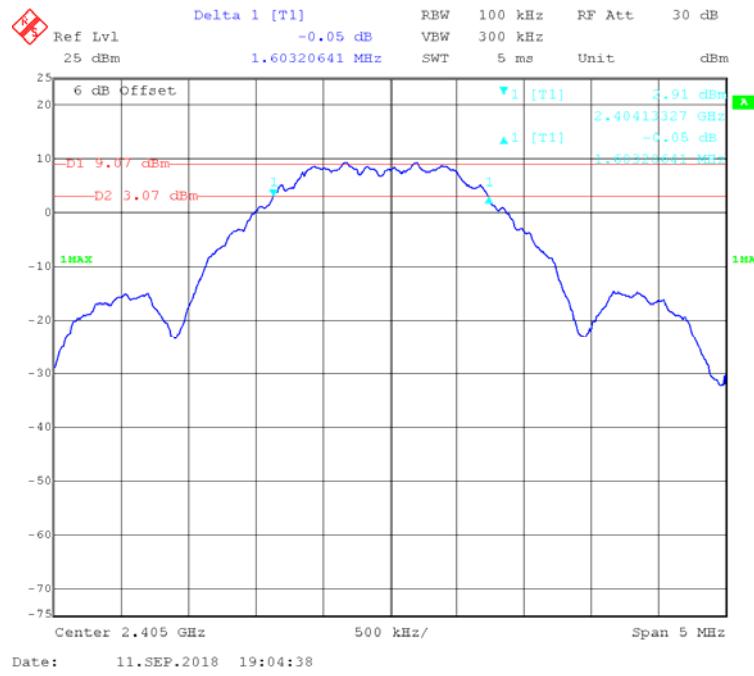
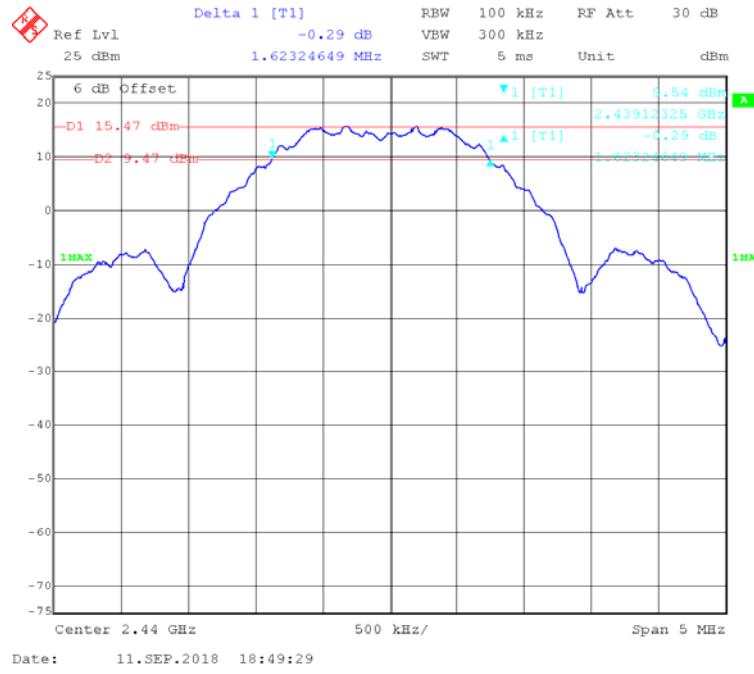
Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

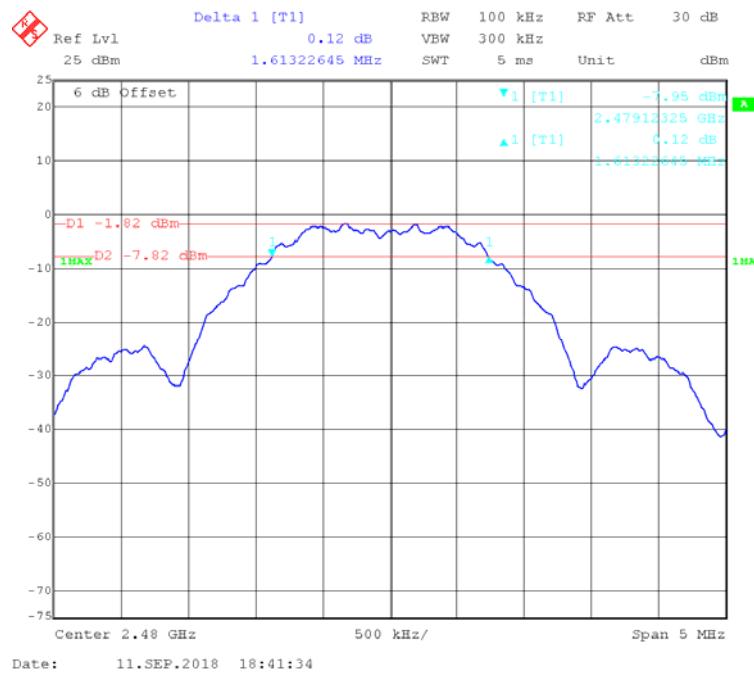
The testing was performed by Stone Zhang on 2018-09-11.

**Test Result:** Pass.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Channel 11	2405	1.603	$\geq 0.5$
Channel 18	2440	1.623	$\geq 0.5$
Channel 26	2480	1.613	$\geq 0.5$

**Low Channel: 2405MHz****Middle Channel: 2440MHz**

**High Channel: 2480MHz**

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 3 \times$  RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



### Test Data

#### Environmental Conditions

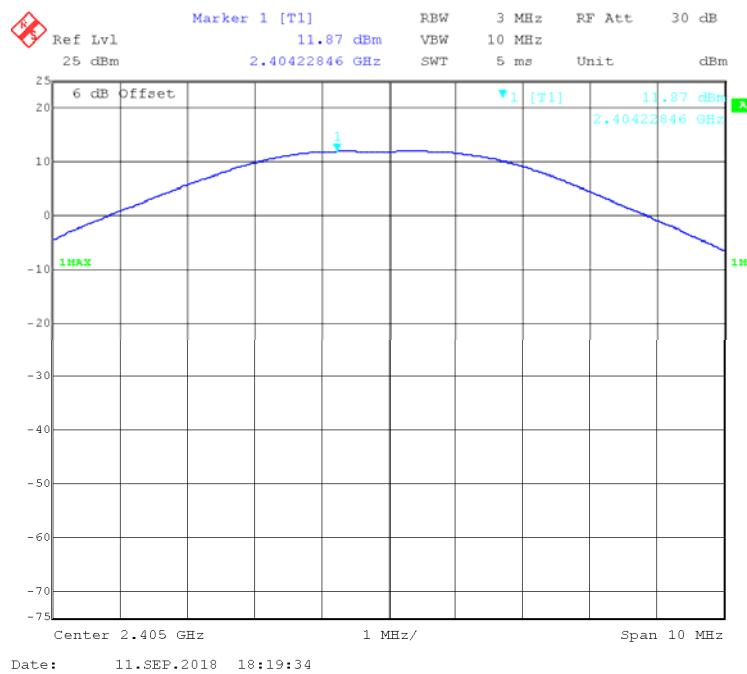
Temperature:	24.1~28 °C
Relative Humidity:	42~50 %
ATM Pressure:	101.2 kPa

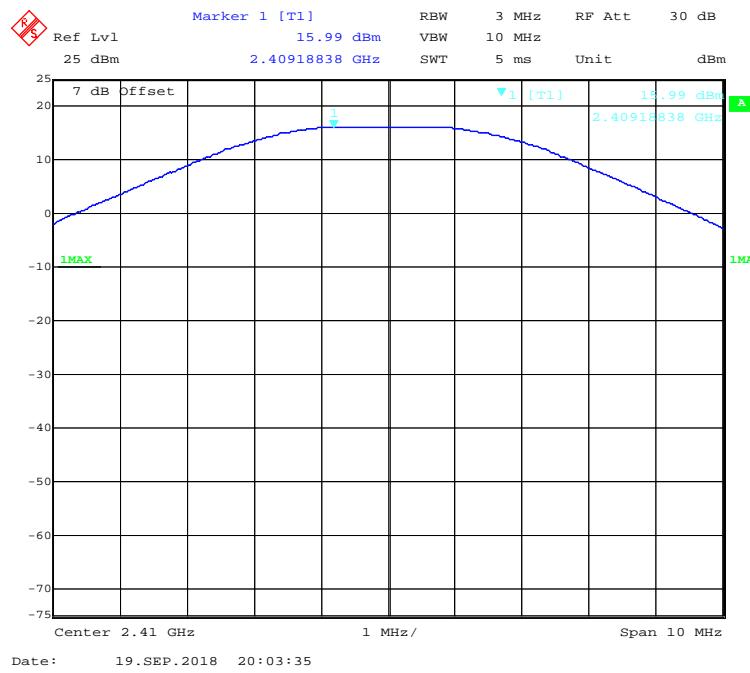
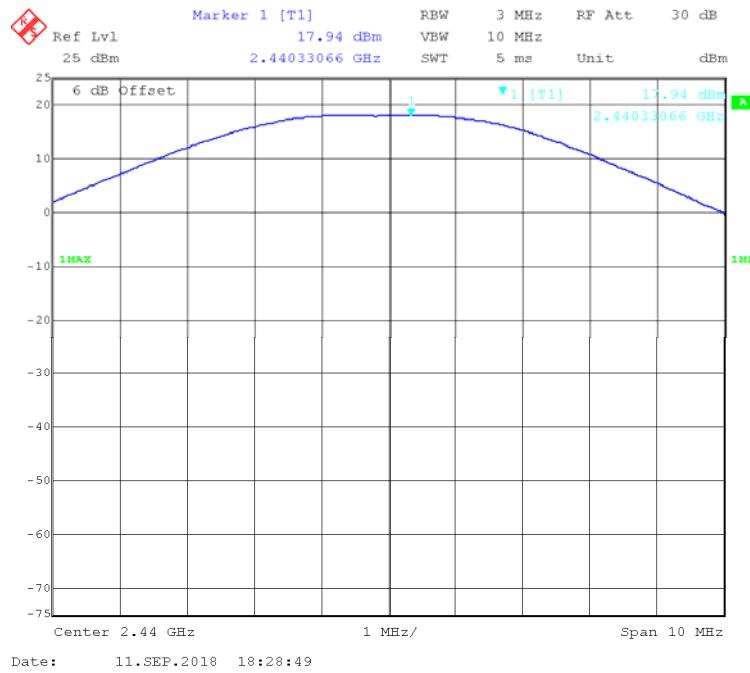
The testing was performed by Stone Zhang from 2018-09-11 to 2018-09-19.

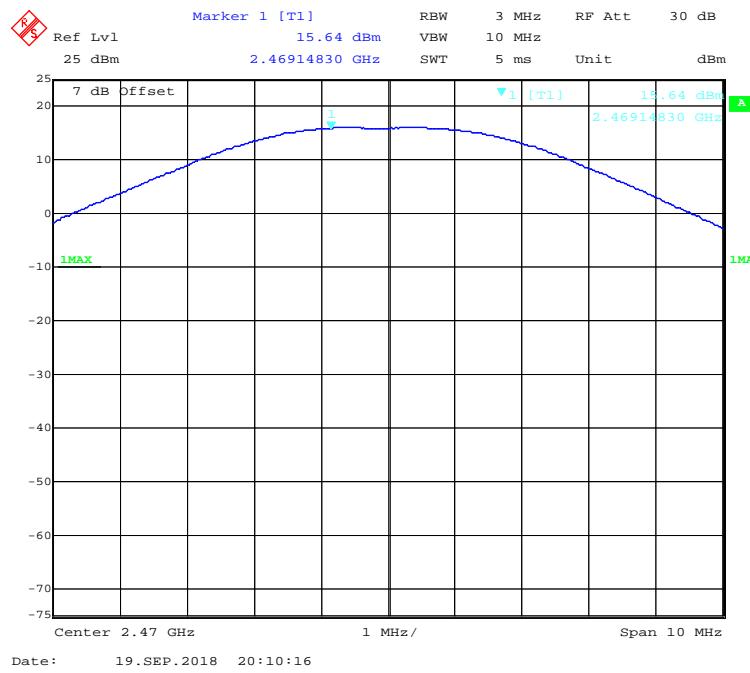
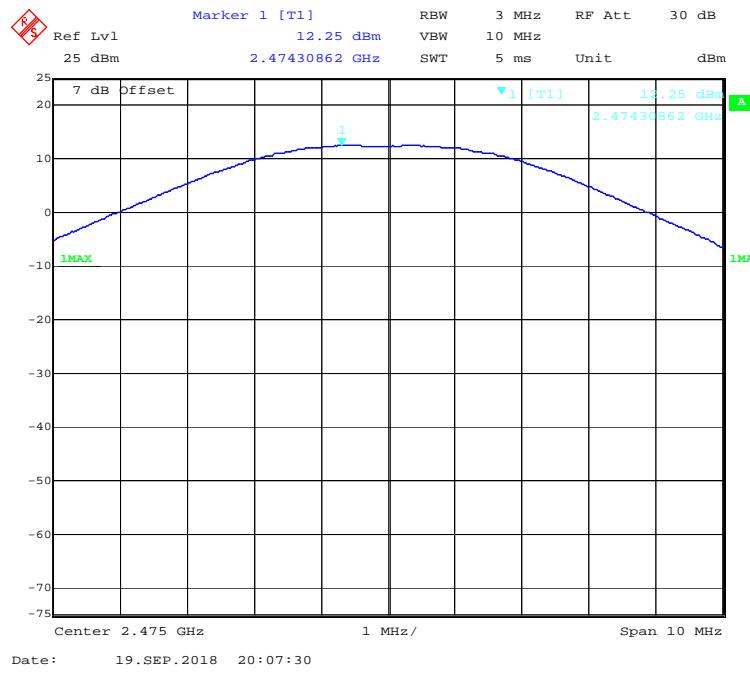
EUT operation mode: Transmitting

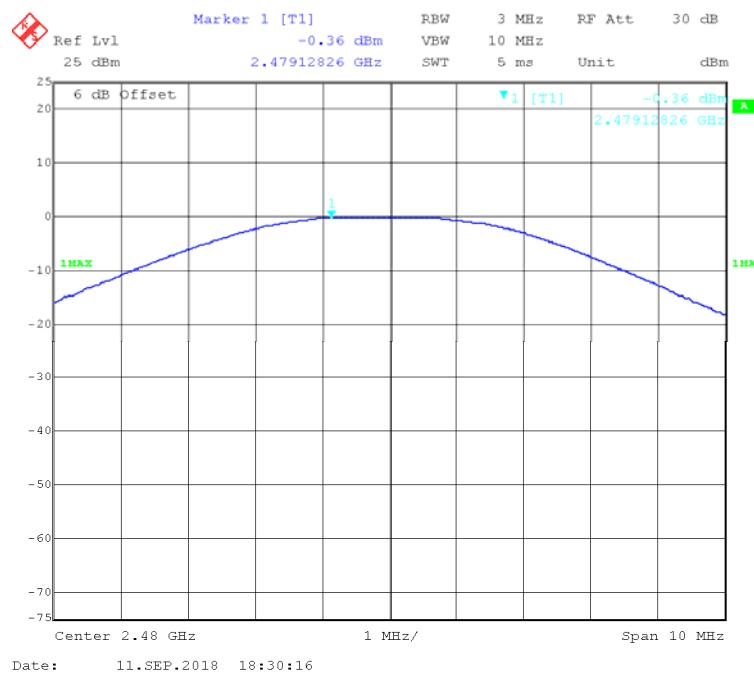
Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
11	2405	11.87	30	Pass
12	2410	15.99	30	Pass
18	2440	17.94	30	Pass
24	2470	15.64	30	Pass
25	2475	12.25	30	Pass
26	2480	-0.36	30	Pass

### Channel 11



**Channel 12****Channel 18**

**Channel 24****Channel 25**

**Channel 26**

## FCC §15.247(d) – BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

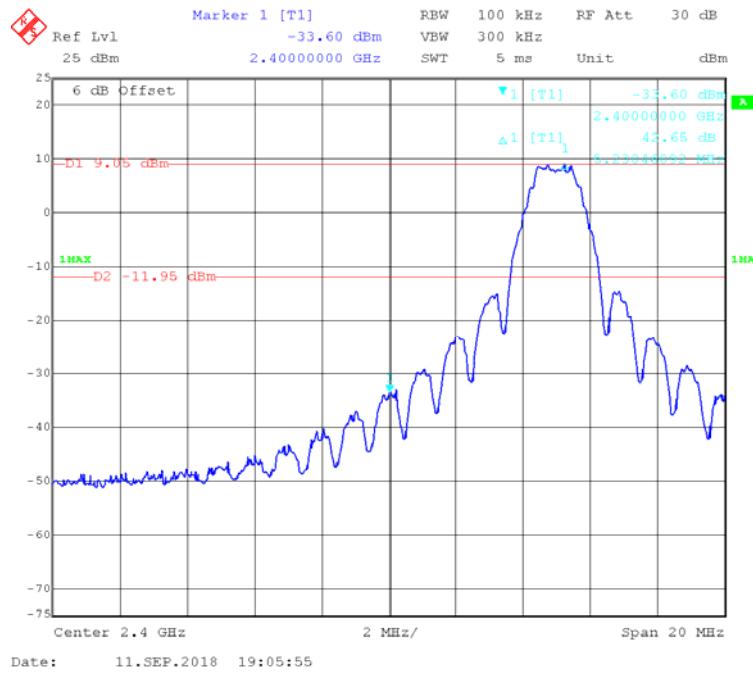
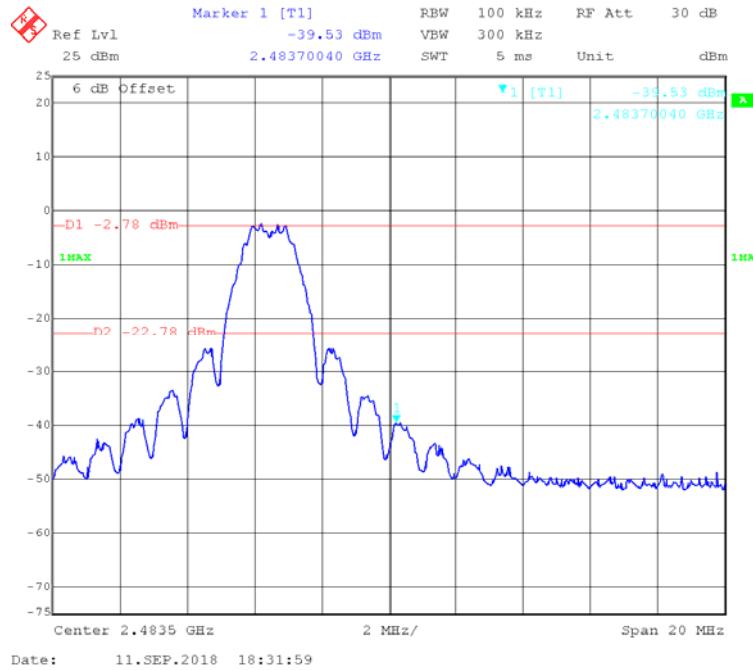
#### Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Stone Zhang on 2018-09-11.

EUT operation mode: Transmitting

**Test Result:** Compliance

**Left Side****Right Side**

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
2. Set the VBW  $\geq 3 \times \text{RBW}$ .
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Test Data

#### Environmental Conditions

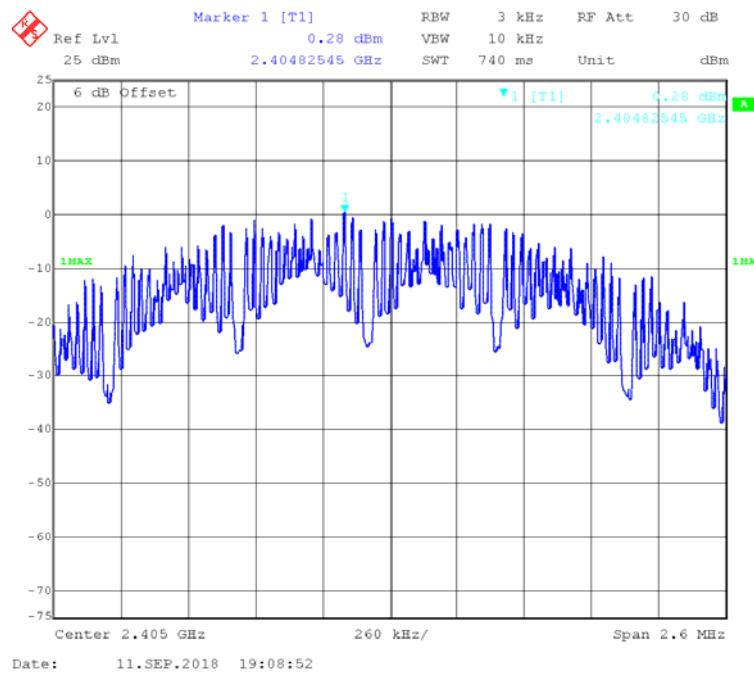
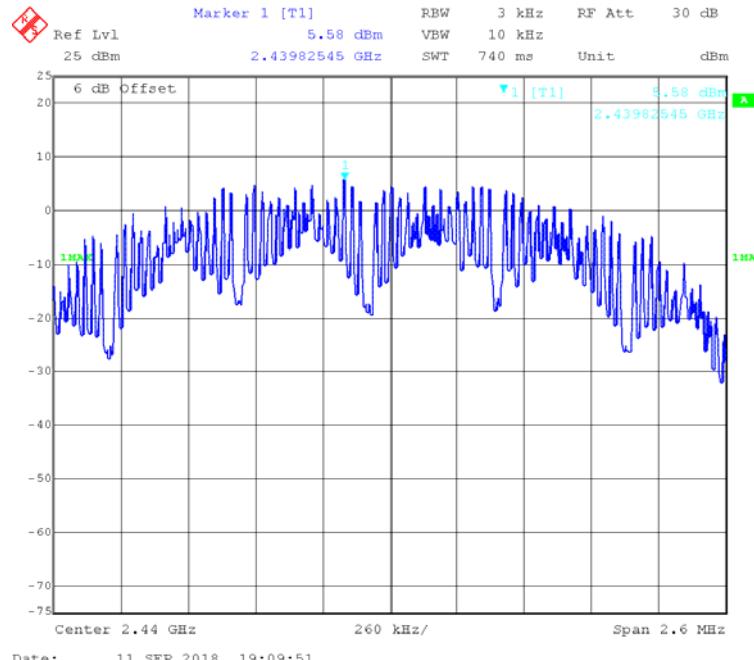
Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.3 kPa

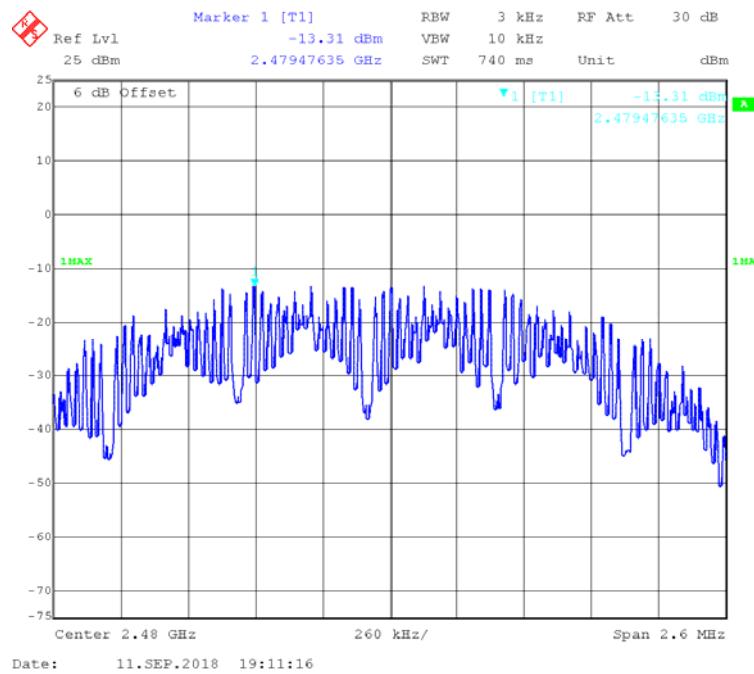
The testing was performed by Stone Zhang on 2018-09-11.

EUT operation mode: Transmitting

Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2405	0.28	≤8
Middle Channel	2440	5.58	≤8
High Channel	2480	-13.31	≤8

**Low Channel: 2405MHz****Middle Channel: 2440MHz**

**High Channel: 2480MHz****\*\*\*\*\* END OF REPORT \*\*\*\*\***