

TEST REPORT

Test Report Reference: R50283_A Edition 1

Equipment under Test: cB-0720-02

Serial Number: none

FCC ID: PVH072002

Applicant: connectBlue AB

Manufacturer: connectBlue AB

**Test Laboratory
(CAB)
accredited by
DATEch e.V.
in compliance with DIN EN ISO/IEC 17025
under the
Reg. No. DAT-P-105/99-21,
listed by
FCC 31040/SIT1300F2
and OATS listed by
IC 3469**

TEST REPORT REFERENCE: R50283_A Edition 1

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 DEVICE UNDER TEST	5
2.2 PERIPHERY DEVICES	5
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 LIST OF MEASUREMENTS	7
5 TEST RESULTS	8
5.1 20 dB BANDWIDTH	8
5.1.1 METHODE OF MEASUREMENT (20 dB BANDWIDTH)	8
5.1.2 TEST RESULTS (20 dB BANDWIDTH)	9
5.2 CARRIER FREQUENCY SEPARATION	12
5.2.1 METHODE OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)	12
5.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)	13
5.3 NUMBER OF HOPPING FREQUENCIES	15
5.3.1 METHODE OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)	15
5.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)	16
5.4 DWELL TIME	17
5.4.1 METHODE OF MEASUREMENT (DWELL TIME)	17
5.4.2 TEST RESULTS (DWELL TIME)	18
5.5 MAXIMUM PEAK OUTPUT POWER	20
5.5.1 METHODE OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)	20
5.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)	21
5.6 POWER SPECTRAL DENSITY	24
5.6.1 METHODE OF MEASUREMENT (POWER SPECTRAL DENSITY)	24
5.6.2 TEST RESULTS (POWER SPECTRAL DENSITY)	25
5.7 BAND-EDGE COMPLIANCE	27
5.7.1 METHODE OF MEASUREMENT (BAND-EDGE COMPLIANCE)	27
5.7.2 TEST RESULT (BAND-EDGE COMPLIANCE)	28
5.8 CONDUCTED EMISSIONS (TRANSMITTER)	31
5.8.1 METHODE OF MEASUREMENT (CONDUCTED EMISSIONS)	31
5.8.2 TEST RESULTS (CONDUCTED EMISSIONS)	32
5.9 RADIATED EMISSIONS (TRANSMITTER)	36
5.9.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)	36
5.9.2 TEST RESULTS (RADIATED EMISSIONS)	42
5.10 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)	53
5.10.1 METHOD OF MEASUREMENT	53
5.10.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)	54
5.11 RADIATED EMISSIONS (RECEIVER)	55
6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	60
7 LIST OF ANNEXES	64

TEST REPORT REFERENCE: R50283_A Edition 1

1 IDENTIFICATION

1.1 APPLICANT

Name:	connectBlue AB
Address:	Isbergs gata 3
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Mats Andersson
Tel:	+ 46 40 63 07 105
Fax:	+ 46 40 23 71 37
e-mail address:	mats.andersson@connectblue.se

1.2 MANUFACTURER

Name:	connectBlue AB
Address:	Isbergs gata 3
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Mats Andersson
Tel:	+ 46 40 63 07 105
Fax:	+ 46 40 23 71 37
e-mail address:	mats.andersson@connectblue.se

1.3 DATES


Date of receipt of test sample:	21 February 2005
Start of test:	23 February 2005
End of test:	28 February 2005

TEST REPORT REFERENCE: R50283_A Edition 1

1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TEST-LAB GmbH**
Königswinkel 10
D-32825 Blomberg **Phone: +49 (0) 52 35 / 95 00-0**
Germany **Fax: +49 (0) 52 35 / 95 00-10**

accredited by DATech e.V. in compliance with DIN EN ISO/IEC 17025 under Reg. No. DAT-P-105/99-21, listed by FCC 31040/SIT1300F2 and OATS listed by IC 3469.

Test engineer:	<u>Thomas KÜHN</u> Name	<u></u> Signature	<u>15 March 2005</u> Date
Test report checked:	<u>Bernd STEINER</u> Name	<u></u> Signature	<u>15 March 2005</u> Date

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

Stamp

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TEST-LAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TEST-LAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TEST-LAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC 47 CFR Part 15 (January 2005)** Radio Frequency Devices
- [3] **FCC Public Notice DA 00-705 (March 2000)**
- [4] **RSS-210 Issue 5 November 2001** Low power Licence-Exempt Radiocommunication Devices (All Frequency Bands).
- [5] **RSS-212 Issue 1 (Provisional) February 27, 1999** Test Facilities and Test Methodes for Radio Equipment

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: R50283_A Edition 1

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment: *	Bluetooth module for headset applications
Type designation: *	cB-0720-02
FCC ID: *	PVH072002
Antenna type: *	GigaAnt 2.4 GHz Rufa SMD antenna
Antenna gain: *	4 dBi
Power supply: *	5.0 V DC
Type of modulation: *	FHSS (GFSK)
Operating frequency range:*	2.402 to 2.480 GHz
Number of channels: *	79
Output power: *	0 dBm
Temperature range: *	-20 °C to + 55 °C

*: declared by the applicant

Bluetooth operates in the unlicensed ISM band at 2.4 GHz. In North America (USA and Canada) a band with a width of 83.5 MHz is available. In this band 79 RF channels spaced 1 MHz apart are defined. The channel is represented by a pseudo random hopping sequence through the 79 channels. The normally occupancy time of one frequency will be 625 µs. The ordinary hopping rate will be 1600 hops/s. All frequencies will be used equally.

The following external I/O cables were used:

Cable	Length	Shielding	Connector
Audio in	-	Yes	-
Audio out	-	Yes	-
DC in	2 m *	No	-

*: Length during the test if no other specified.

2.2 PERIPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

- Personal computer with terminal software, connected temporary to the UART interface of the EUT.

TEST REPORT REFERENCE: R50283_A Edition 1

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

The EUT is intended to be used in bluetooth headset applications for transmission of audio signals. Because the cB-0720-02 is a module, which will be implemented in a final application, it was mounted on a carrier board. This carrier board is equipped with a UART interface (to change the operation modes of the EUT from a Laptop with test software), line level sound input and output interface and LEDs and buttons to control the EUT. The test was carried out with an unmodified sample with integrated antenna and one sample with a temporary antenna connector

During the tests the test sample was powered by an external power supply via the carrier board.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a length of 27 byte and with a pattern type DH5 was used.


For selecting an operation mode, a personal computer with a terminal program was connected to the EUT via the UART interface and the EUT has to be powered up, to adjust the wanted operation mode. After adjusting the operating mode, the personal computer was removed.

During the tests, the EUT was not labelled with a FCC-label.

The following operation modes were used during the tests:

Operation mode	Description of the operation mode
1	Continuous transmitting on 2402 MHz,
2	Continuous transmitting on 2441 MHz,
3	Continuous transmitting on 2480 MHz,
4	Inquiry
5	Paging
6	Transmitter hopping on all channels

Physical boundary of the EUT

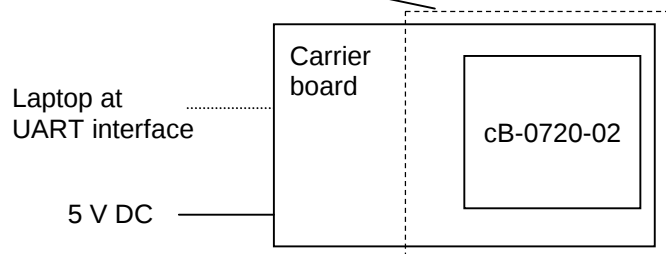

TEST REPORT REFERENCE: R50283_A Edition 1

4 LIST OF MEASUREMENTS

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section	RSS 210, Issue 5	Status	Refer page
20 dB bandwidth	General	15.247 (a) (1) (iii)	6.2.2 (o) (a3)	Passed	8 et seq.
Carrier frequency separation	General	15.247 (a) (1)	6.2.2 (o) (a3)	Passed	12 et seq.
Number of hopping channels	2400.0 - 2483.5	15.247 (a) (1) (iii)	6.2.2 (o) (a3)	Passed	15 et seq.
Dwell time	2400.0 - 2483.5	15.247 (a) (1) (iii)	6.2.2 (o) (a3)	Passed	17 et seq.
Maximum peak output power	2400.0 - 2483.5	15.247 (b) (1)	6.2.2 (o) (a3)	Passed	20 et seq.
Power spectral density	2441	15.247 (e)	6.2.2 (o) (b)	Passed	24 et seq.
Band edge compliance	2400.0 - 2483.5	15.247 (d)	6.2.2 (o) (e1)	Passed	27 et seq.
Conducted emissions (transmitter)	0.009 - 25,000	15.247 (d)	6.2.2 (o) (e1)	Passed	31 et seq.
Radiated emissions (transmitter)	0.009 - 25,000	15.205 (a) 15.209 (a)	6.2.2 (o) (e1) 6.3 (c)	Passed	36 et seq.
Conducted emissions on supply line	0.15 - 80	15.207 (a)	6.6 (a)	Passed	52 et seq.
Radiated emissions (receiver)	0.009 - 25,000	15.109 (a)	7.3	Passed	55 et seq.

TEST REPORT REFERENCE: R50283_A Edition 1

5 TEST RESULTS

5.1 20 dB BANDWIDTH

5.1.1 METHODE OF MEASUREMENT (20 dB BANDWIDTH)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disenabled, the transmitter shall work with its maximum data rate.


The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual hopping channel.
- Resolution bandwidth: $\geq 1\%$ of the 20 dB bandwidth.
- Video bandwidth: $\geq$ the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

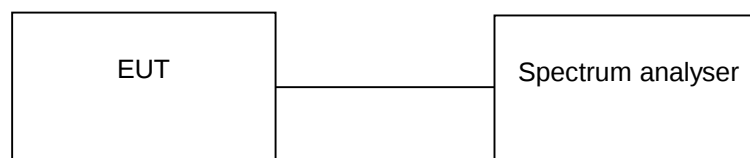


TEST REPORT REFERENCE: R50283_A Edition 1


5.1.2 TEST RESULTS (20 dB BANDWIDTH)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283 27.wmf: (20 dB bandwidth at the lower end of the assigned frequency band):

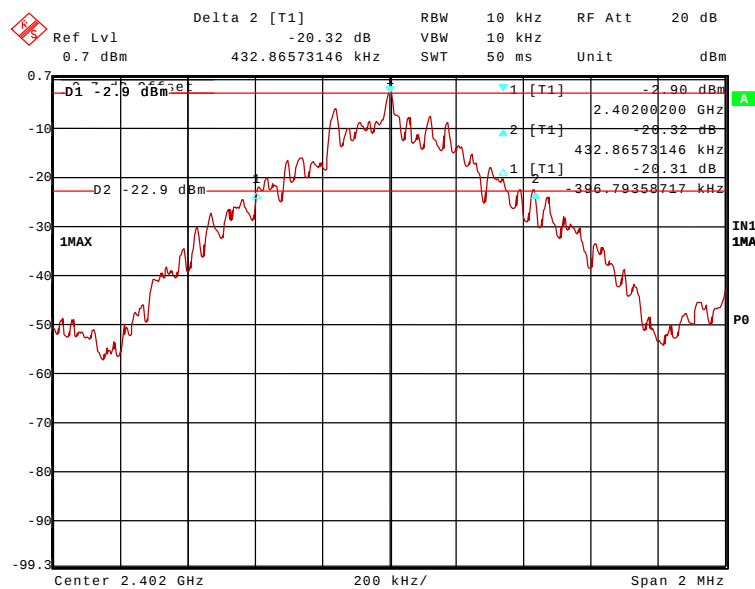


50283 26.wmf: (20 dB bandwidth at the middle of the assigned frequency band):

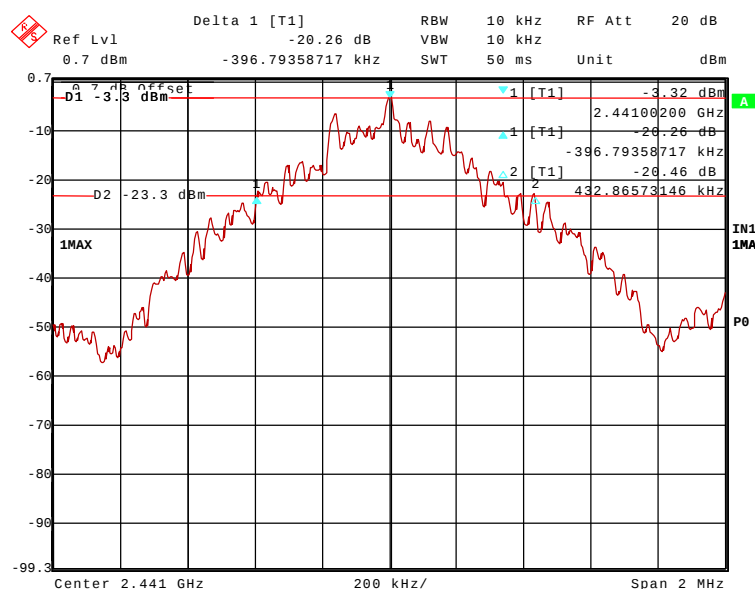


TEST REPORT REFERENCE: R50283_A Edition 1

50283 28.wmf: (20 dB bandwidth at the upper end of the assigned frequency band):

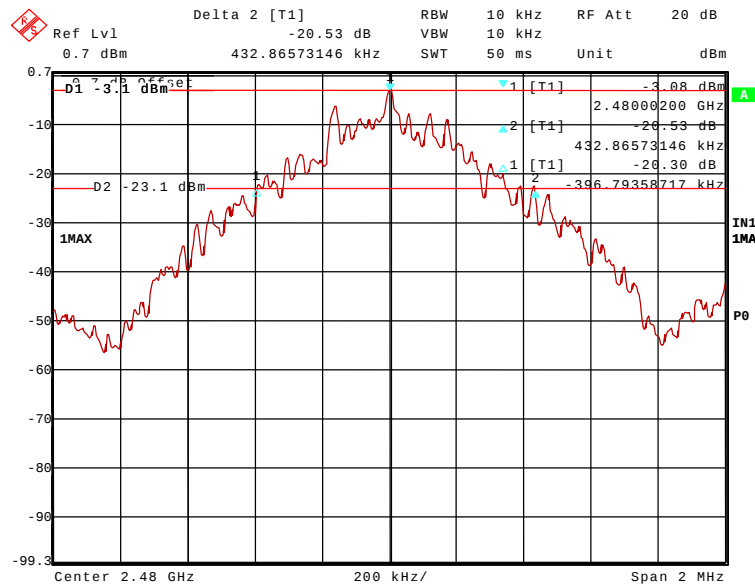


50283 32.wmf: (20 dB bandwidth with inquiry mode):

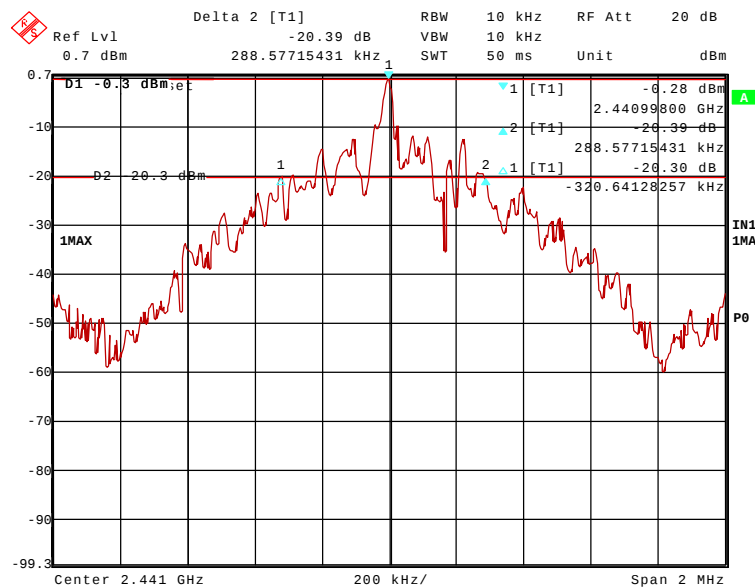

TEST REPORT REFERENCE: R50283_A Edition 1

50283_33.wmf: (20 dB bandwidth with paging mode):

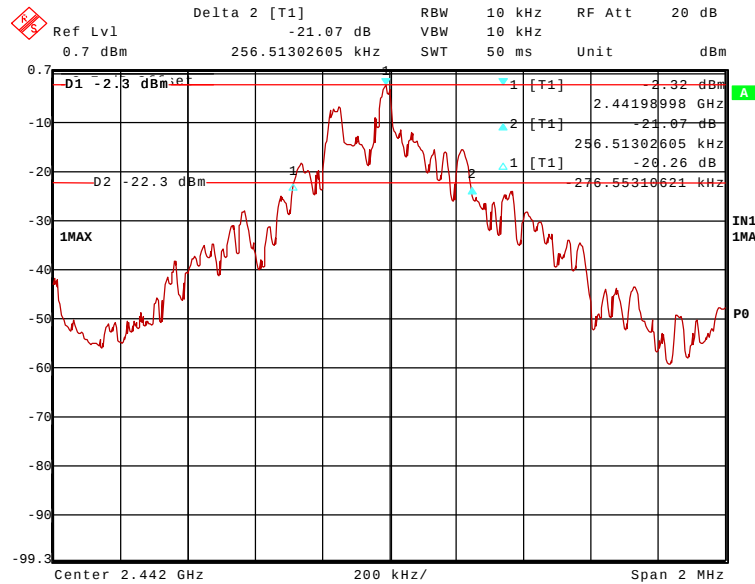

Channel number	Channel frequency [MHz]	20 dB bandwidth [kHz]
0	2402	829.7
39	2441	829.7
78	2480	829.7
39 (inquiry mode)	2441	609.2
40 (paging mode)	2442	533.1

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.2 CARRIER FREQUENCY SEPARATION

5.2.1 METHODE OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: $\geq$ the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:




TEST REPORT REFERENCE: R50283_A Edition 1


5.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283_29.wmf: (channel separation at the lower end of the assigned frequency band):

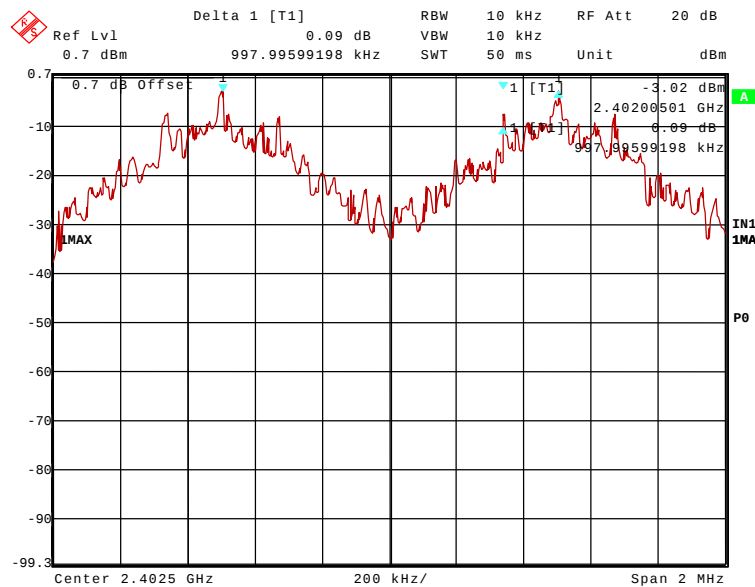


50283_30.wmf: (channel separation at the middle of the assigned frequency band):

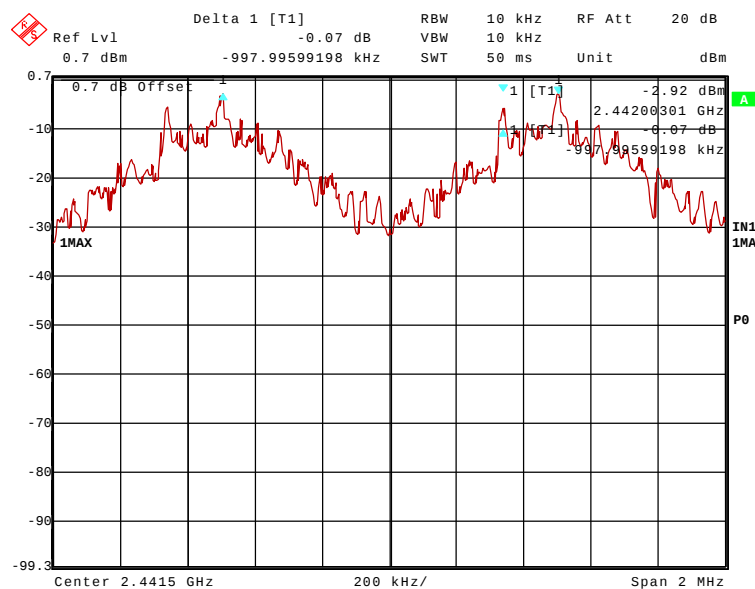

TEST REPORT REFERENCE: R50283_A Edition 1

50283 31.wmf: (channel separation at the upper end of the assigned frequency band):

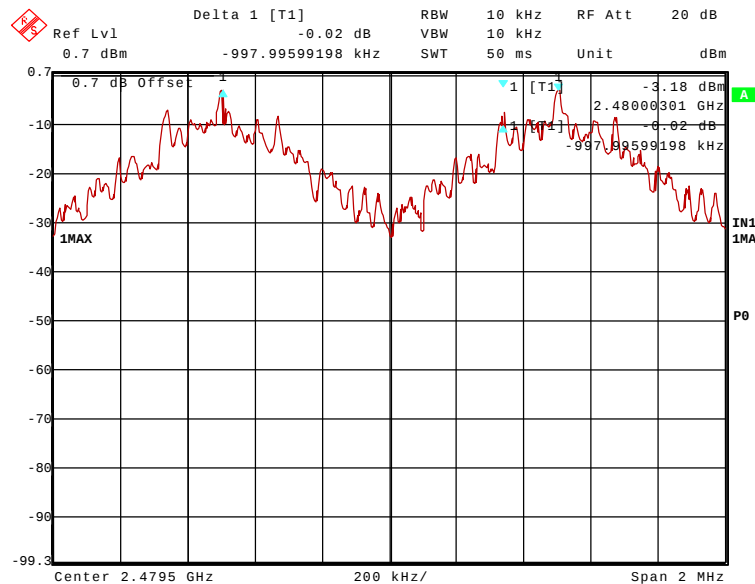

Channel number	Channel frequency [MHz]	Channel separation [MHz]	Minimum limit [kHz]
0	2402	0.998	829.7 (20 dB bandwidth)
39	2441	0.998	829.7 (20 dB bandwidth)
78	2480	0.998	829.7 (20 dB bandwidth)

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.3 NUMBER OF HOPPING FREQUENCIES

5.3.1 METHODE OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Equal to the assigned frequency band.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: $\geq$ the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.

Test set-up:

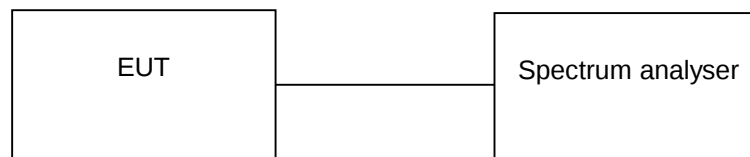


TEST REPORT REFERENCE: R50283_A Edition 1

5.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283_34.wmf (number of hopping channels):

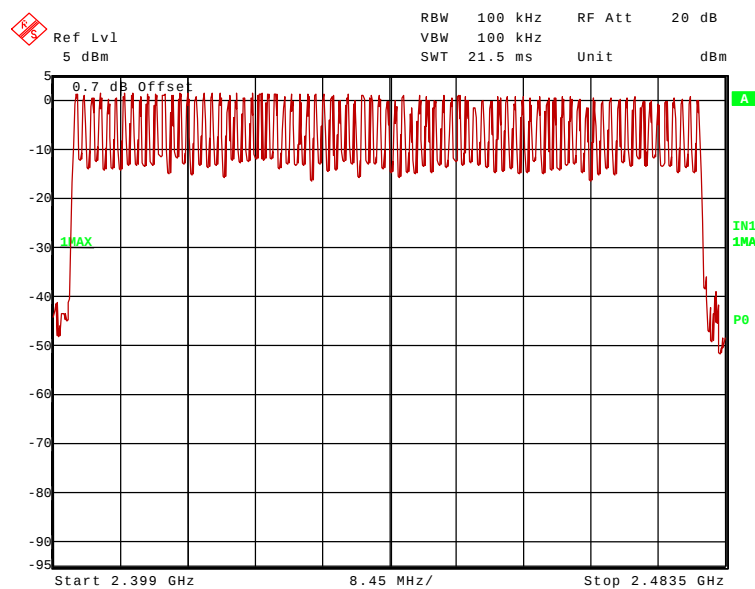

Number of hopping channels	Limit
79	At least 15

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.4 DWELL TIME

5.4.1 METHODE OF MEASUREMENT (DWELL TIME)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Zero, centred on a hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: $\geq$ the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

If the EUT is possible to operate with different mode of operation (data rates, modulation formats etc.) the test will be repeated with every different operation mode of the EUT.

Test set-up:




TEST REPORT REFERENCE: R50283_A Edition 1


5.4.2 TEST RESULTS (DWEELL TIME)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283_35.wmf: (dwell time at the lower end of the assigned frequency band), hopping mode DH5:

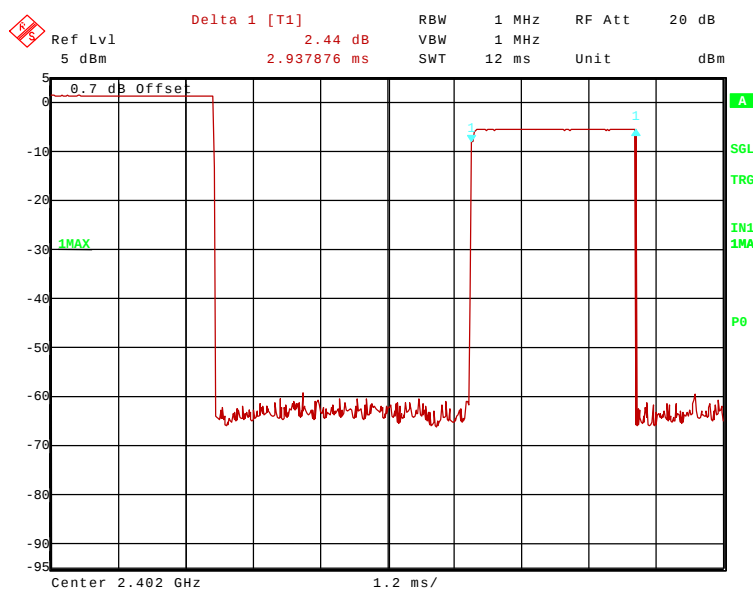


50283_36.wmf: Dwell time at the middle of the assigned frequency band), hopping mode DH5:

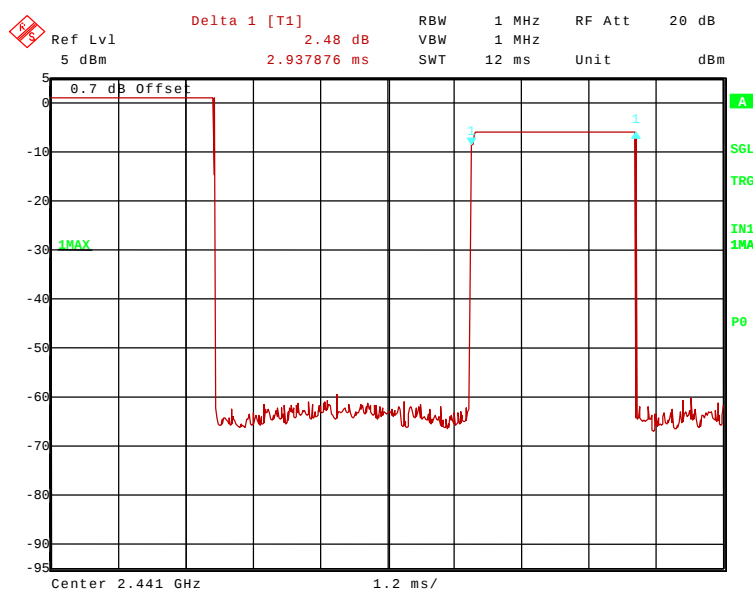

TEST REPORT REFERENCE: R50283_A Edition 1

50283 37.wmf: (dwell time at the upper end of the assigned frequency band), hopping mode DH5:

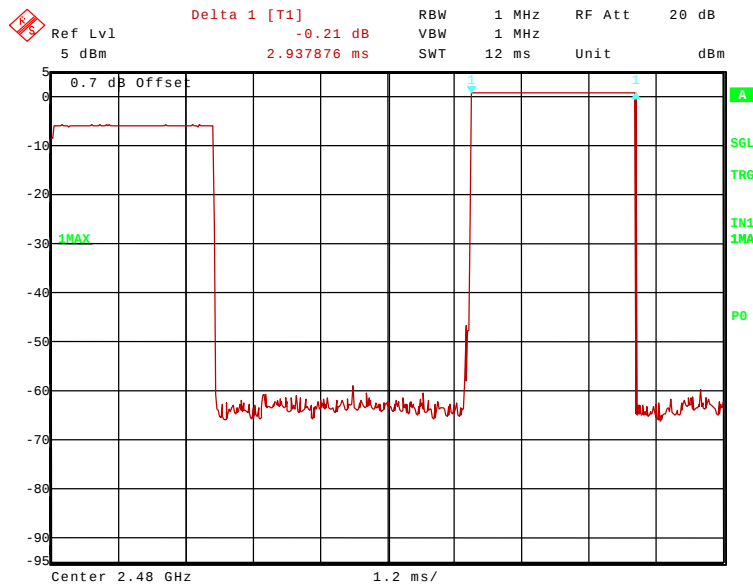

The dwell time is calculated with the following formula:

Dwell time = $t_{\text{pulse}} \times n_{\text{hops}} / \text{number of channels} \times 30\text{s}$

Where:

t_{pulse} is the measured pulse time (pls. refer the plots of the spectrum analyser above) [s],
 n_{hops} is the number of hops per second in the actual operating mode of the transmitter [1/s].

The hopping rate of the system is 1600 hops per second and the system uses 79 channels. For this reason one time slot has a length of 625 μ s.

With the used hopping mode (DH5) a packet need 5 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 266,67 hops per second in transmit mode ($n_{\text{hops}} = 266.667$ 1/s)

Channel number	Channel frequency [MHZ]	t_{pulse}	Dwell time [ms]
0	2402	2.94 ms	297.72
39	2441	2.94 ms	297.72
78	2480	2.94 ms	297.72

Limit:

The dwell time of the channel shall be less than 0.4s in a 30s period

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.5 MAXIMUM PEAK OUTPUT POWER

5.5.1 METHODE OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disenabled.


The following spectrum analyser settings shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth: $\geq$ the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:

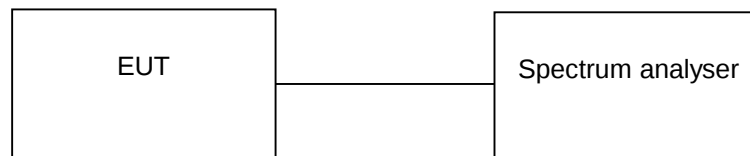


TEST REPORT REFERENCE: R50283_A Edition 1


5.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283_38.wmf (maximum peak output power at the lower end of the assigned frequency band):

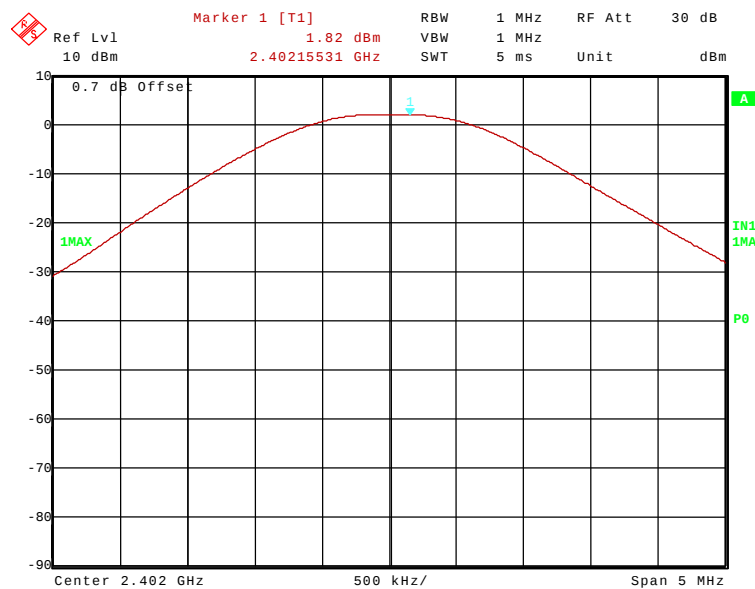


50283_39.wmf (maximum peak output power at the middle of the assigned frequency band):

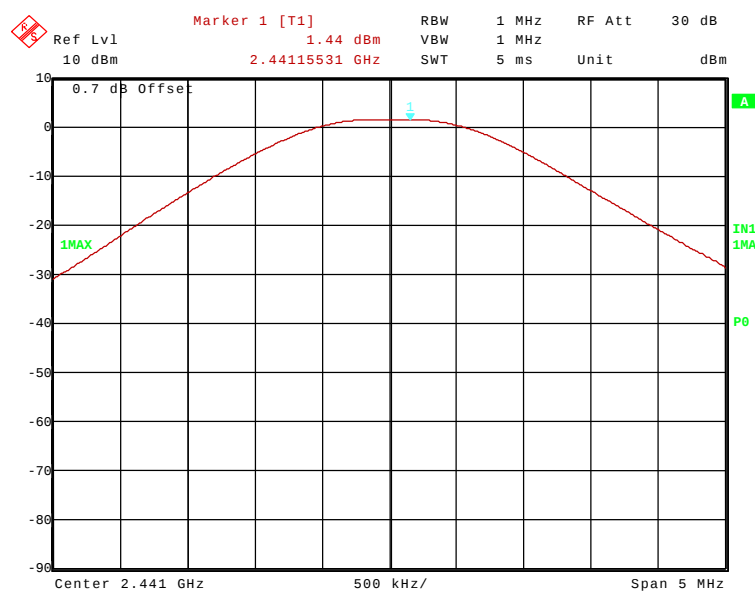


TEST REPORT REFERENCE: R50283_A Edition 1

50283_40.wmf (maximum peak output power at the upper end of the assigned frequency band):

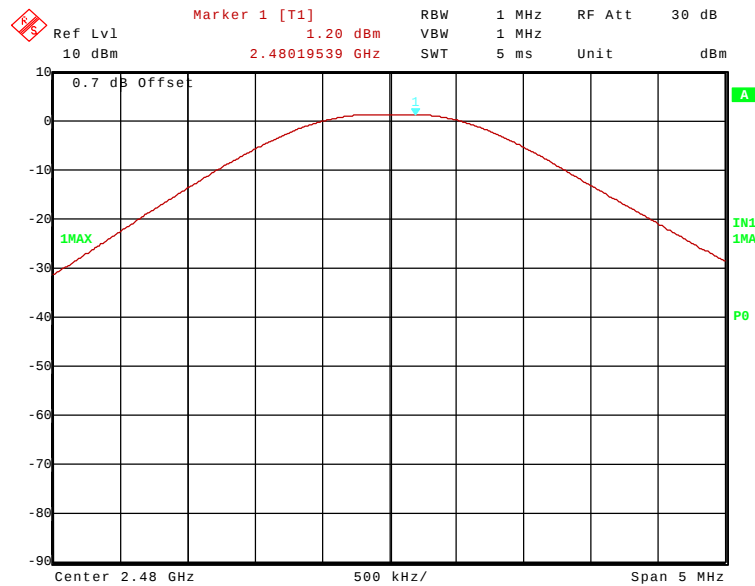


50283_41.wmf (maximum peak inquiry mode):

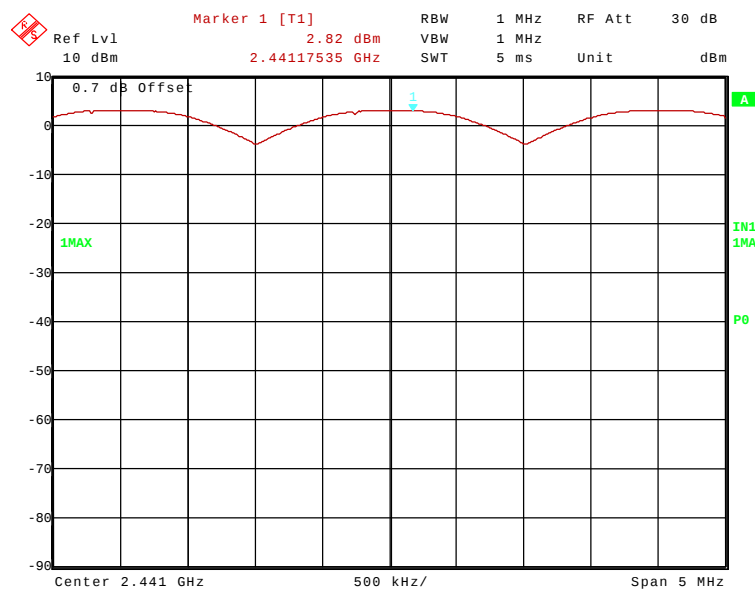

TEST REPORT REFERENCE: R50283_A Edition 1

50283_42.wmf (maximum peak paging mode):

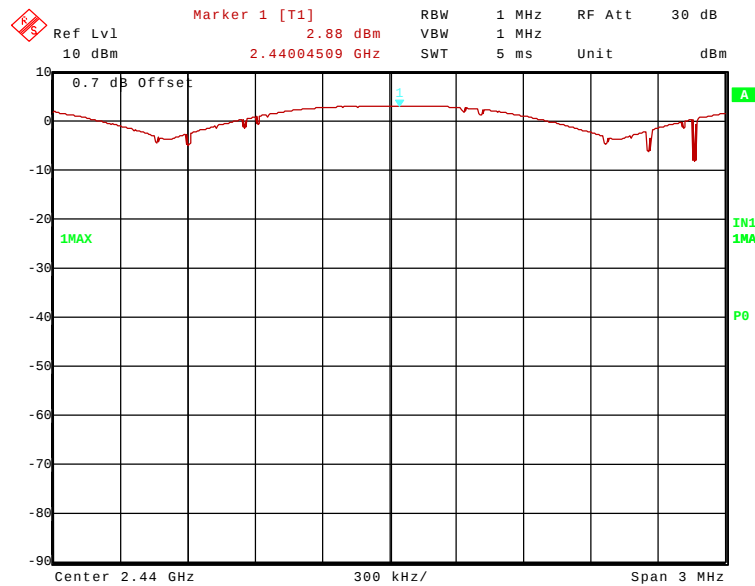

Channel number	Channel frequency [MHz]	Maximum peak output power [dBm]	Antenna gain	Calculated EIRP	Peak power limit [dBm]
0	2402	1.82	4.0 dBi	5.82	30
39	2441	1.44	4.0 dBi	5.44	30
78	2480	1.20	4.0 dBi	5.20	30
39 (inquiry)	2441	2.82	4.0 dBi	6.84	30
38 (paging)	2440	2.88	4.0 dBi	6.88	30

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.6 POWER SPECTRAL DENSITY

5.6.1 METHODE OF MEASUREMENT (POWER SPECTRAL DENSITY)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on in page/inquiry mode.


The following spectrum analyser settings shall be used:

- Span: 1.5 MHz, centred in the middle of the assigned frequency range.
- Resolution bandwidth: 3 kHz.
- Video bandwidth: 3 kHz.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the power spectral density.

The measurement will be performed with the EUT in page mode and inquiry mode.

Test set-up:

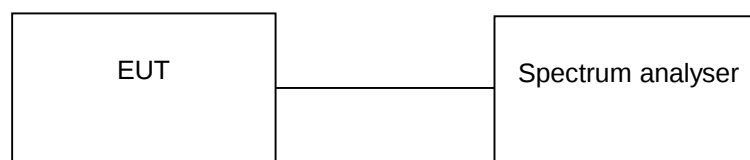


TEST REPORT REFERENCE: R50283_A Edition 1


5.6.2 TEST RESULTS (POWER SPECTRAL DENSITY)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283_44.wmf (power spectral density (inquiry mode):

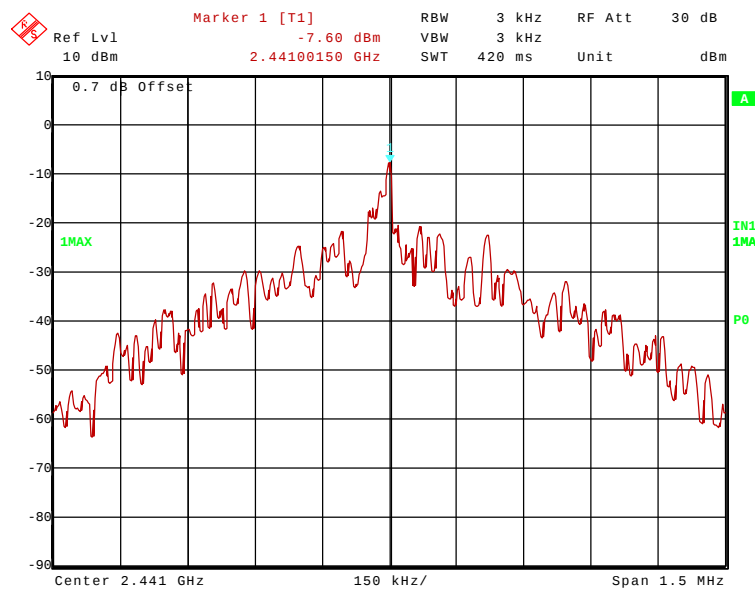

50283_43.wmf (power spectral density (page mode):

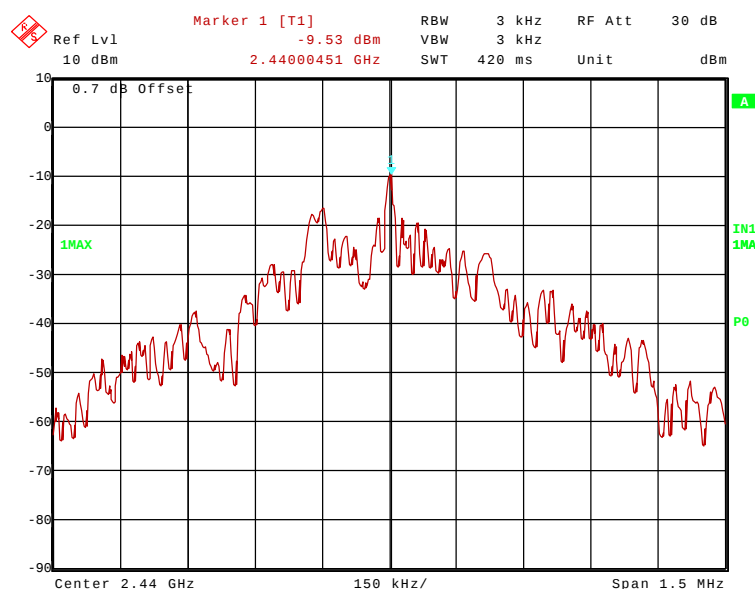

TEST REPORT REFERENCE: R50283_A Edition 1

Operation mode	Power spectral density [dBm / 3 kHz] *	Power spectral density limit [dBm / 3 kHz]
Inquiry mode	-7.6	8
Page mode	-9.5	8

* cable loss of 0.7dB respected

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.7 BAND-EDGE COMPLIANCE

5.7.1 METHODE OF MEASUREMENT (BAND-EDGE COMPLIANCE)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disenabled.


The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth: $\geq 1\%$ of the span, but not below 30 kHz.
- Video bandwidth: $\geq$ the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. After this the difference between this emission level and the signal peek will be calculated. With the value of measured field strength of the signal peak and the calculated difference to the emission level, the level of the field strength of the emission will be calculated.

The measurement will be performed at the upper and lower end of the assigned frequency band and with hopping on and off.

Test set-up:

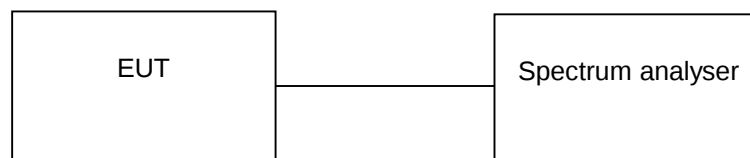


TEST REPORT REFERENCE: R50283_A Edition 1


5.7.2 TEST RESULT (BAND-EDGE COMPLIANCE)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283_45.wmf (band-edge compliance, lower band edge, hopping off):

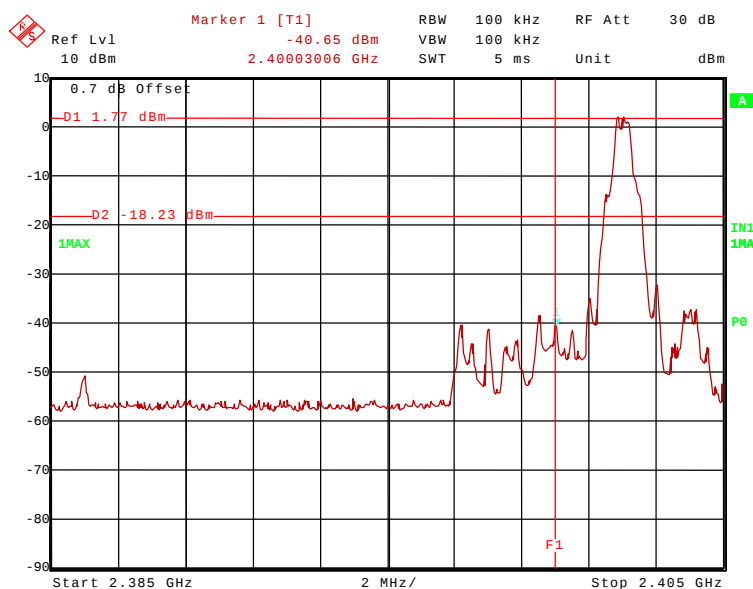


50283_48.wmf (band-edge compliance, upper band edge, hopping off):

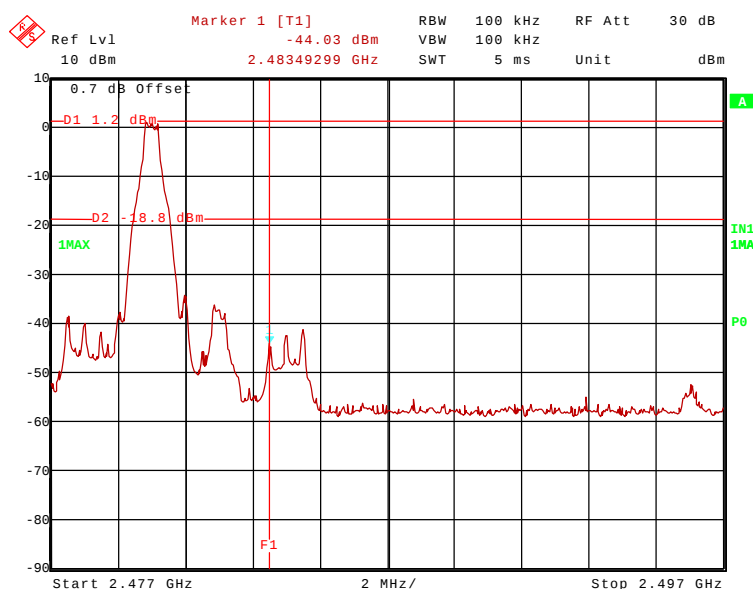


TEST REPORT REFERENCE: R50283_A Edition 1

50283_46.wmf (band-edge compliance, lower band edge, hopping on):

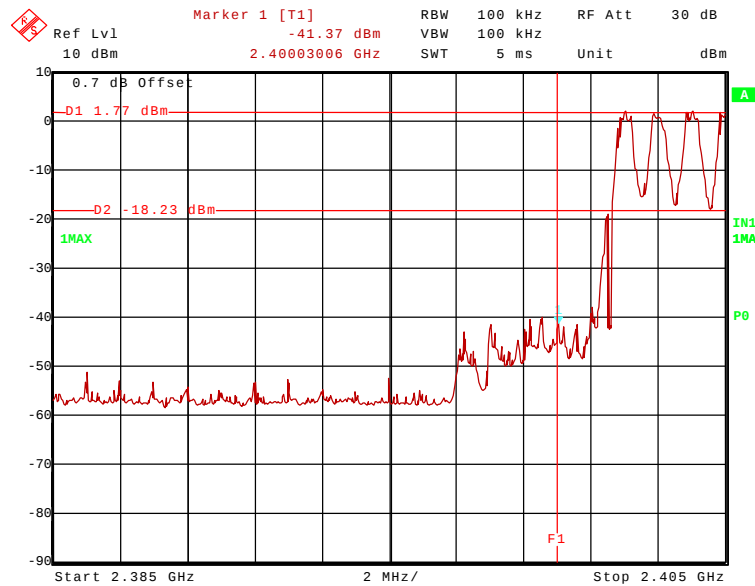

50283_47.wmf (band-edge compliance, upper band edge, hopping on):

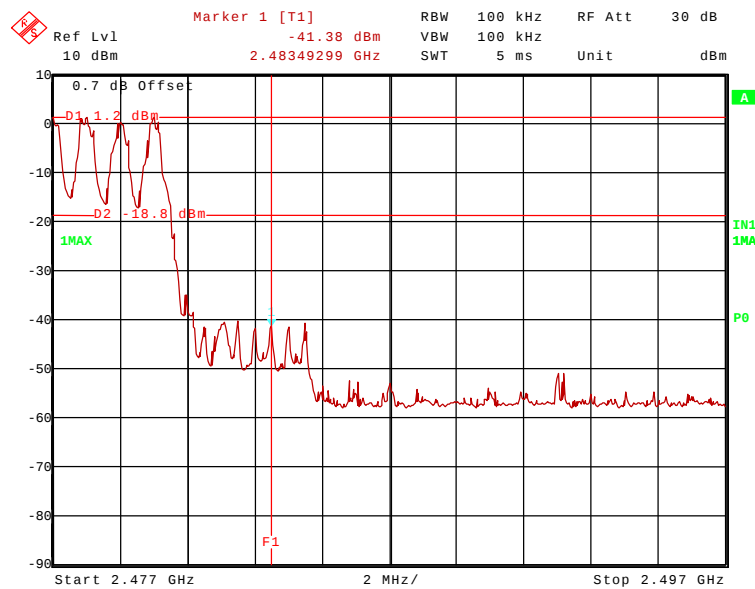

TEST REPORT REFERENCE: R50283_A Edition 1

The plots on the two pages before are showing the band-edge compliance for the upper and lower band-edge, with and without hopping. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.247 (c). The frequency line 1 (F1) shows the edge of the assigned frequency.

Band-edge compliance (hopping disenabled)				
Band-edge	Difference to the signal peak [dB]	Field strength of this signal peak [dBμV/m]	Field strength at the band edge [dBμV/m]	Limit
Upper	49.0	86.7	37.7	54 dBμV/m
Lower	39.4	85.5	46.1	54 dBμV/m

Band-edge compliance (hopping enabled)				
Band-edge	Difference to the signal peak [dB]	Field strength of this signal peak [dBμV/m]	Field strength at the band edge [dBμV/m]	Limit
Upper	48.9	86.7	37.8	54 dBμV/m
Lower	39.3	85.5	46.2	54 dBμV/m

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.8 CONDUCTED EMISSIONS (TRANSMITTER)

5.8.1 METHODE OF MEASUREMENT (CONDUCTED EMISSIONS)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disenabled.

The following spectrum analyser settings shall be used:

In the frequency range from 9 kHz to 1 MHz:

- Start frequency: 9 kHz.
- Stop frequency: 1 MHz.
- Resolution bandwidth: 200 Hz.
- Video bandwidth: 200 Hz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

In the frequency range from 1 MHz to 25 GHz:

- Start frequency: 1 MHz.
- Stop frequency: 25 GHz.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: 100 kHz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set 20 dB below the peak marker. Every emission has to be below the display line.

The measurement will be performed with the EUT operates at the middle, the upper and lower end of the assigned frequency band and with hopping off.

Test set-up:




TEST REPORT REFERENCE: R50283_A Edition 1


5.8.2 TEST RESULTS (CONDUCTED EMISSIONS)

Ambient temperature	20 °C	Relative humidity	25 %
---------------------	-------	-------------------	------

50283 54.wmf (conducted emissions form 9 kHz to 1 MHz, transmitter at 2402 MHz):

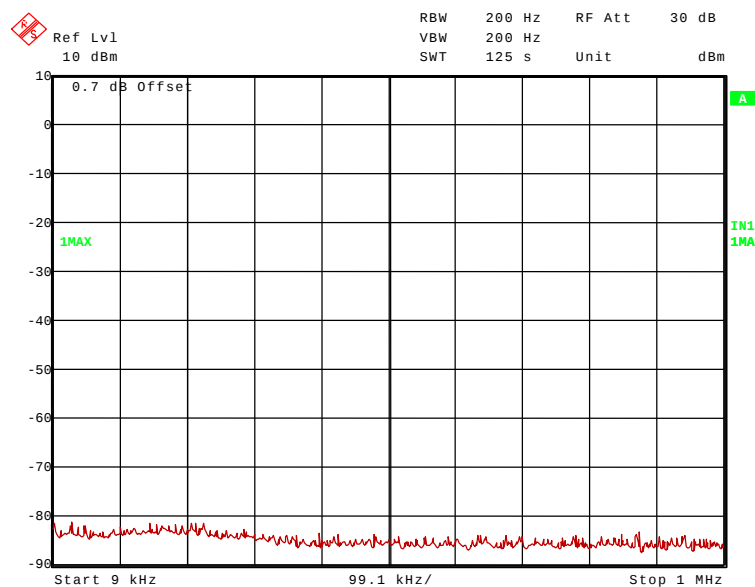


50283 53.wmf (conducted emissions 9 kHz to 1 MHz, transmitter at 2441 MHz):

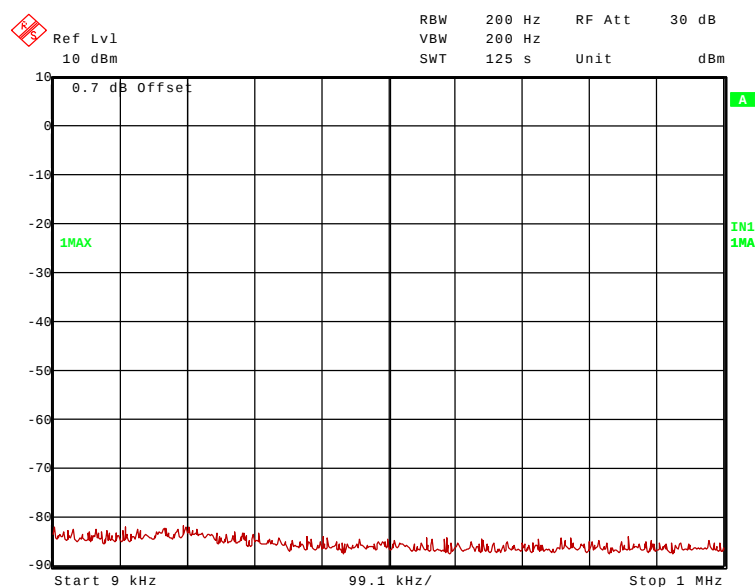


TEST REPORT REFERENCE: R50283_A Edition 1

50283_52.wmf (conducted emissions 9 kHz to 1 MHz, transmitter at 2480 MHz):

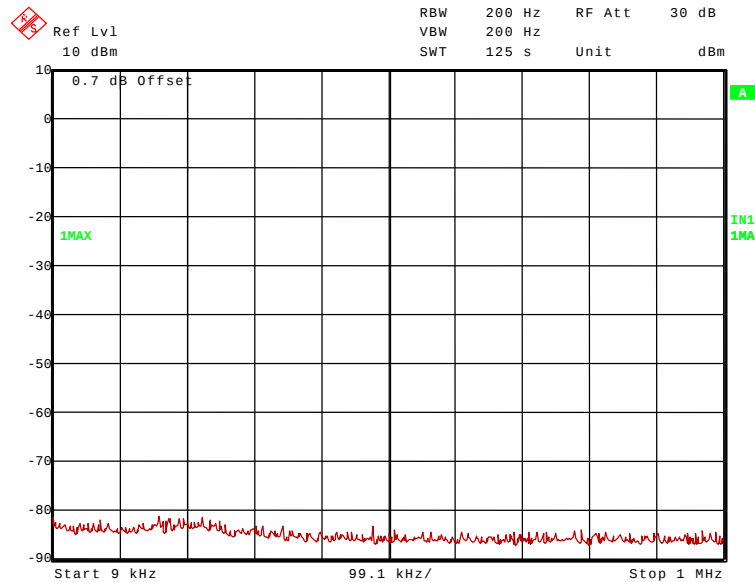


50283_49.wmf (conducted emissions from 1 MHz to 25 GHz, transmitter at 2402 MHz):

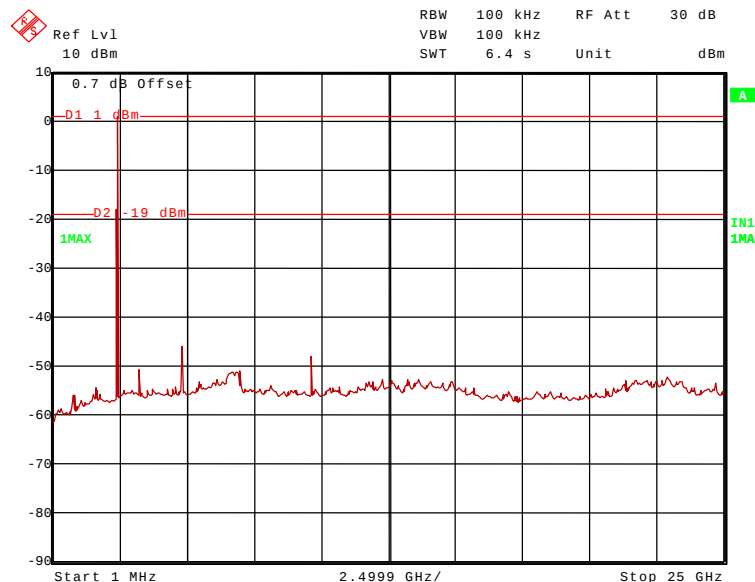


TEST REPORT REFERENCE: R50283_A Edition 1

50283_50.wmf (conducted emissions 1 MHz to 25 GHz, transmitter at 2441 MHz):

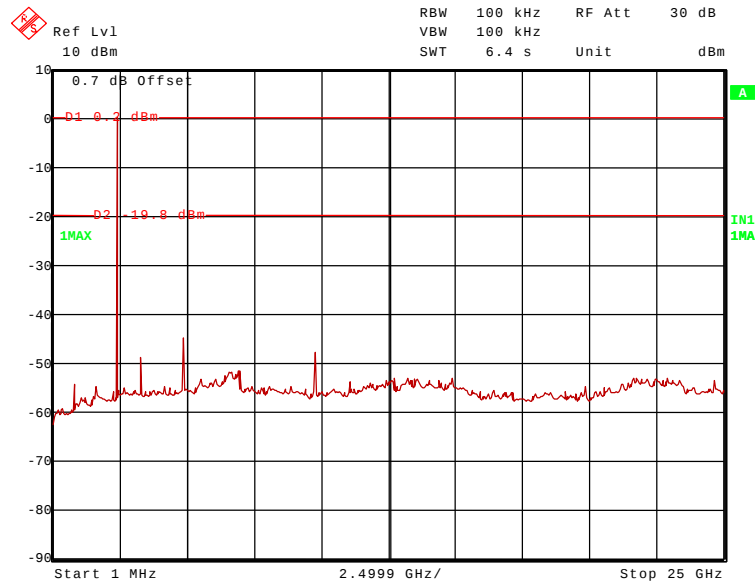

50283_51.wmf (conducted emissions 1 MHz to 25 GHz, transmitter at 2480 MHz):

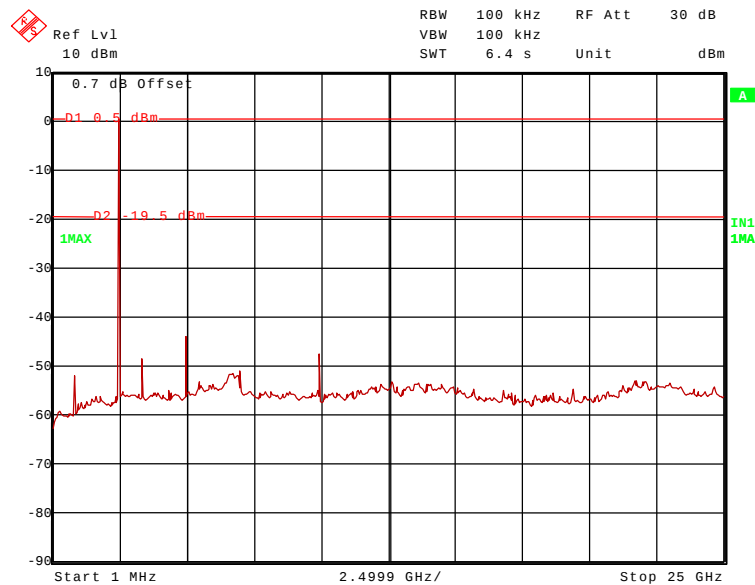

TEST REPORT REFERENCE: R50283_A Edition 1

Conducted emissions with transmitter operates at 2402 MHz						
Frequency	Result dBm	Limit dBm	Margin dB	Reading dBm	Cable loss dB *	Reference level [dBm]
3.202 GHz	-48.9	-19.0	29.9	-49.0	0.1	1.0
4.804 GHz	-44.0	-19.0	25.0	-44.2	0.2	1.0
9.608 GHz	-46.4	-19.0	27.4	-47.0	0.6	1.0
Conducted emissions with transmitter operates at 2441 MHz						
Frequency	Result dBm	Limit dBm	Margin dB	Reading dBm	Cable loss dB *	Reference level [dBm]
815 MHz	-52.7	-19.8	32.9	-52.3	-0.4	0.2
3.257 GHz	-48.5	-19.8	28.7	-48.6	0.1	0.2
4.882 GHz	-44.1	-19.8	24.3	-44.3	0.2	0.2
9.764 GHz	-46.9	-19.8	27.1	-47.5	0.6	0.2
Conducted emissions with transmitter operates at 2480 MHz						
Frequency	Result dBm	Limit dBm	Margin dB	Reading dBm	Cable loss dB *	Reference level [dBm]
828 MHz	-51.8	-19.5	32.3	-51.4	-0.4	0.5
3.308 GHz	-48.6	-19.5	29.1	-48.7	0.1	0.5
4.960 GHz	-42.9	-19.5	23.4	-43.1	0.2	0.5
9.920 GHz	-46.2	-19.5	26.7	-46.8	0.6	0.5

*: Cable loss including the display offset (0.7 dB)

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R50283_A Edition 1

5.9 RADIATED EMISSIONS (TRANSMITTER)

5.9.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 25 GHz.

All measurements will be carried out with the EUT working on the middle and upper and lower edge of the assigned frequency band. For this reason the hopping function of the EUT has to be disenabled.


Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

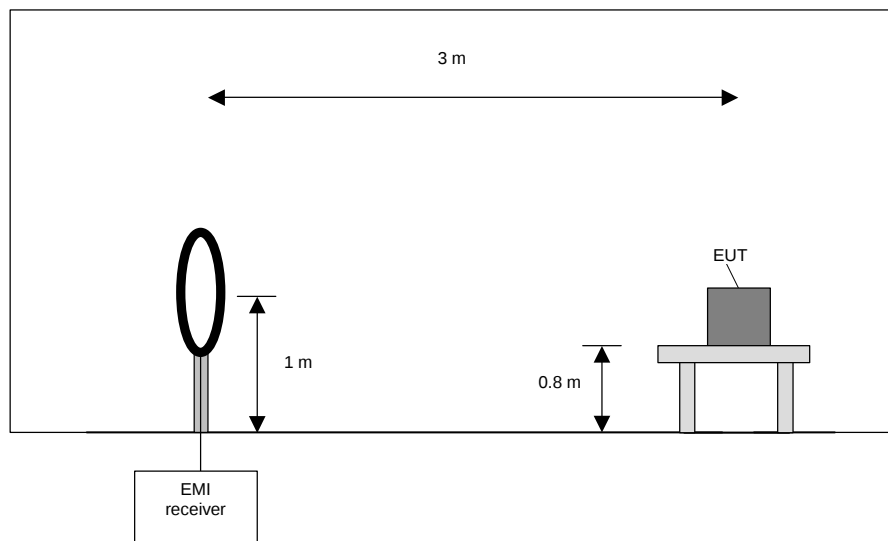

TEST REPORT REFERENCE: R50283_A Edition 1

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 4) with the other orthogonal axes of the EUT.
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

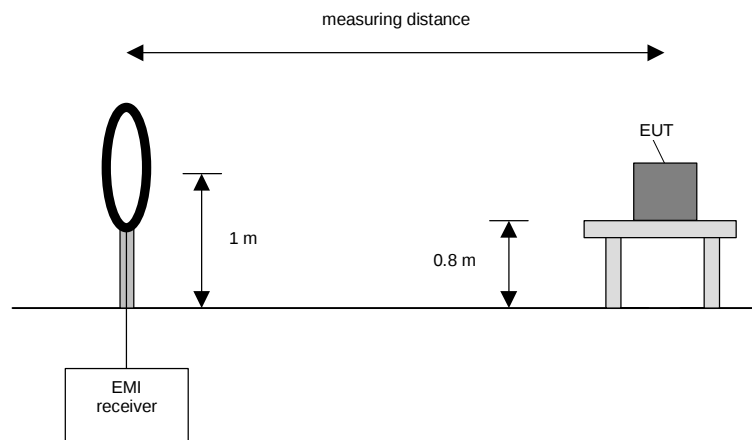

TEST REPORT REFERENCE: R50283_A Edition 1

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT if applicable (handheld equipment).


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

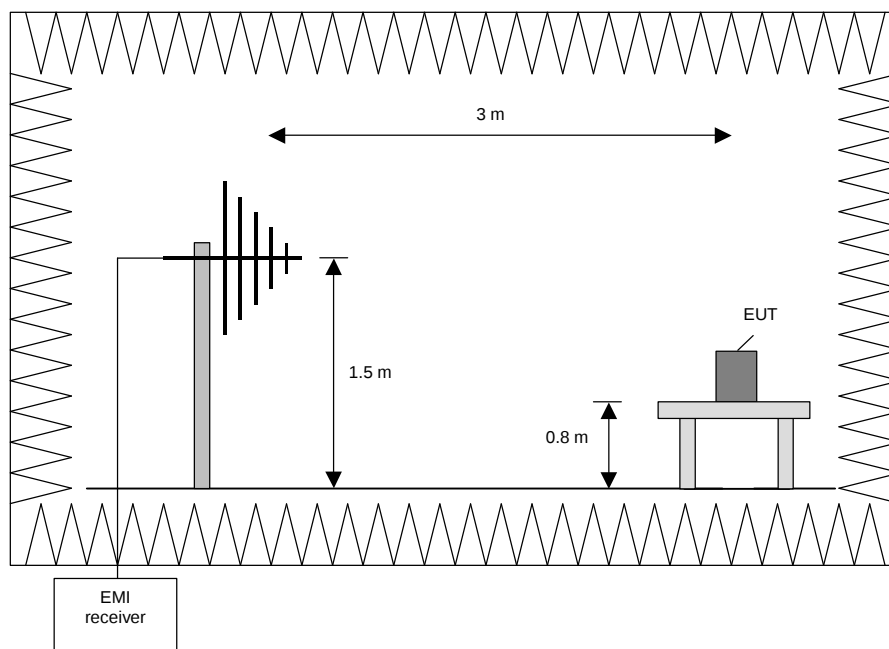

TEST REPORT REFERENCE: R50283_A Edition 1

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.
The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT if handheld equipment.
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

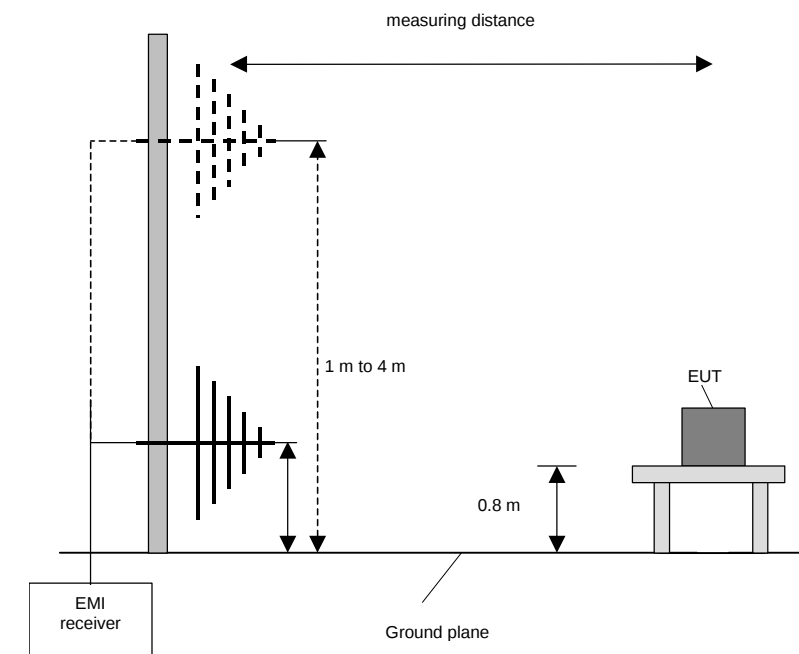

TEST REPORT REFERENCE: R50283_A Edition 1

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT if handheld equipment.

Final measurement (1 GHz to 25 GHz)

This measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

Preliminary measurement (1 GHz to 25 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. If the EUT is larger than the antenna beamwidth, the antenna will be moved to various positions, to cover the whole surface of the EUT. It might be possible to shorter the measuring distance to higher the measurement sensitivity.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 25 GHz	100 kHz


Final measurement (1 GHz to 25 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to MAX Hold mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. If the EUT is larger than the antenna beamwidth, the antenna will be moved to various positions, to cover the whole surface of the EUT. It might be possible to shorter the measuring distance to higher the measurement sensitivity.

TEST REPORT REFERENCE: R50283_A Edition 1

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 GHz	1 MHz

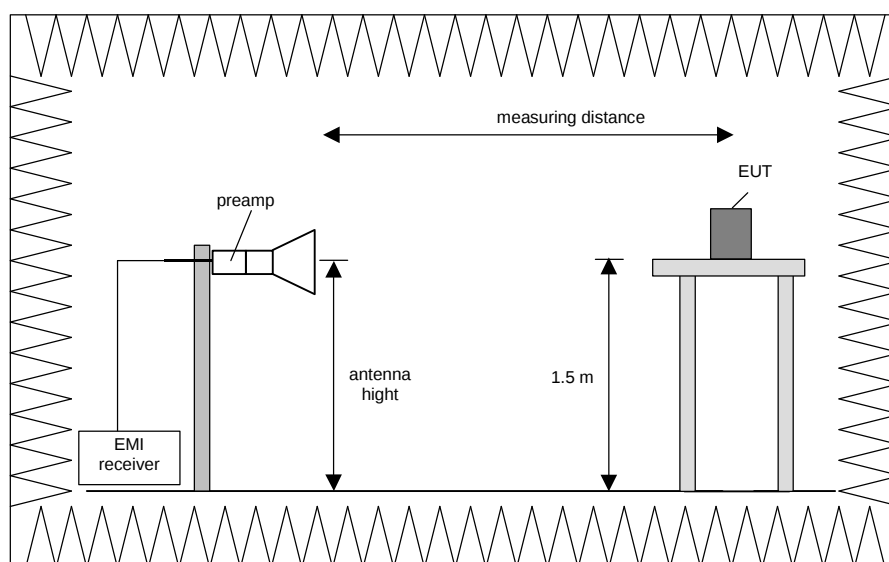

Procedure of measurement:

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz and 18 GHz to 25 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals.
- 3) Change the antenna polarisation.
- 4) Rotate the EUT by 360 ° to maximize the detected signals.
- 5) Make a hardcopy of the spectrum.
- 6) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) with the other orthogonal axes of the EUT if handheld equipment.
- 9) Repeat steps 1) to 8) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

TEST REPORT REFERENCE: R50283_A Edition 1


5.9.2 TEST RESULTS (RADIATED EMISSIONS)

Ambient temperature	20 °C	Relative humidity	27 %
---------------------	-------	-------------------	------

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
- Test record: The test was carried out in test mode 2 of the EUT, because there was no difference to the other test modes in this frequency range. All results are shown in the following.
- Supply voltage: During all measurements the EUT was supplied with 5.0 V DC.
- Remark: The emissions found around 16 kHz, 32 kHz, 48 and 62 kHz caused by the measuring system and not from the EUT.


Preliminary measurement

50283_1.wmf: (9 kHz to 150 kHz):

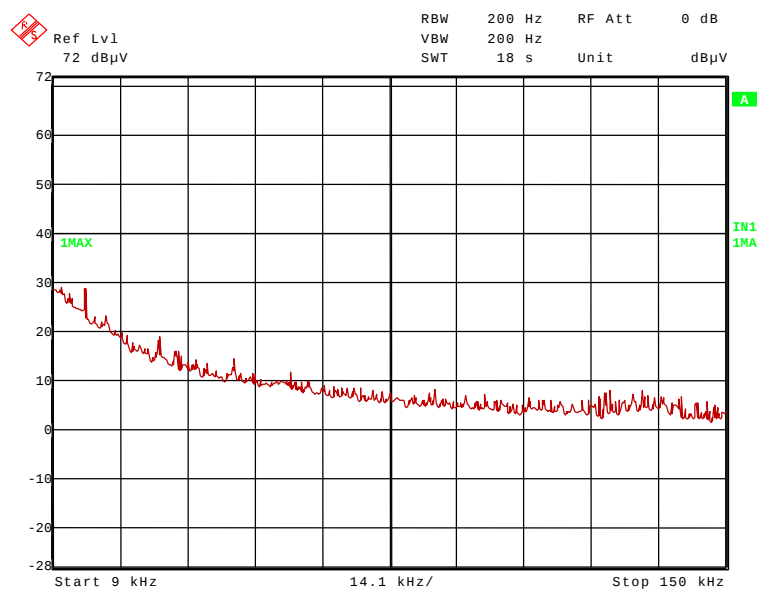


TEST REPORT REFERENCE: R50283_A Edition 1

50283 2.wmf: (150 kHz to 1 MHz):

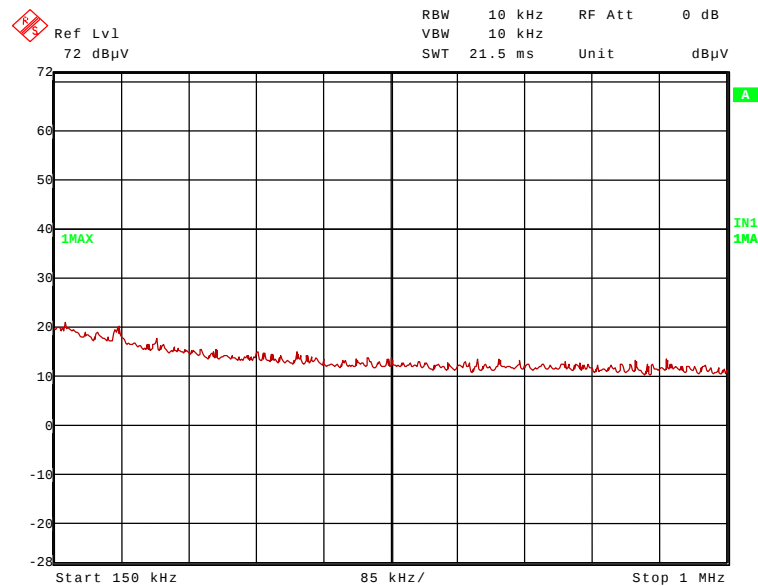


50283 3.wmf: (1 MHz to 30 MHz)

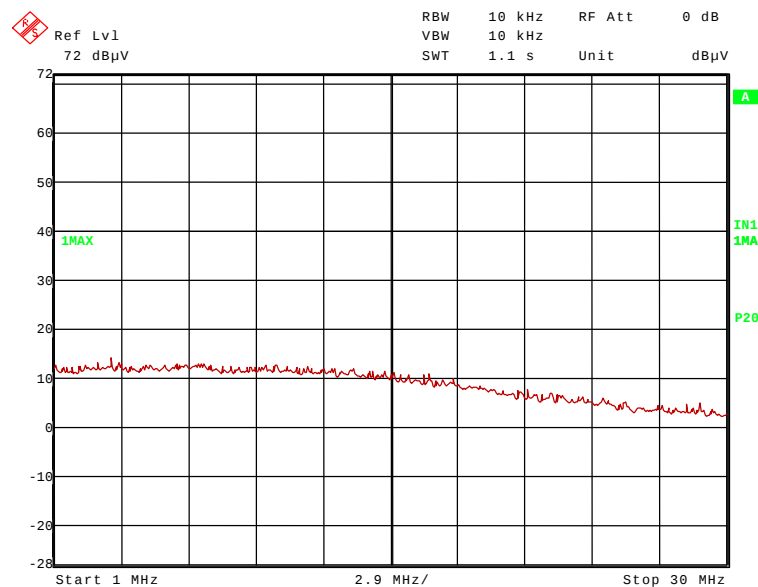


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the outdoor test site.

TEST REPORT REFERENCE: R50283_A Edition 1

50283 4.wmf (30 MHz to 230 MHz):

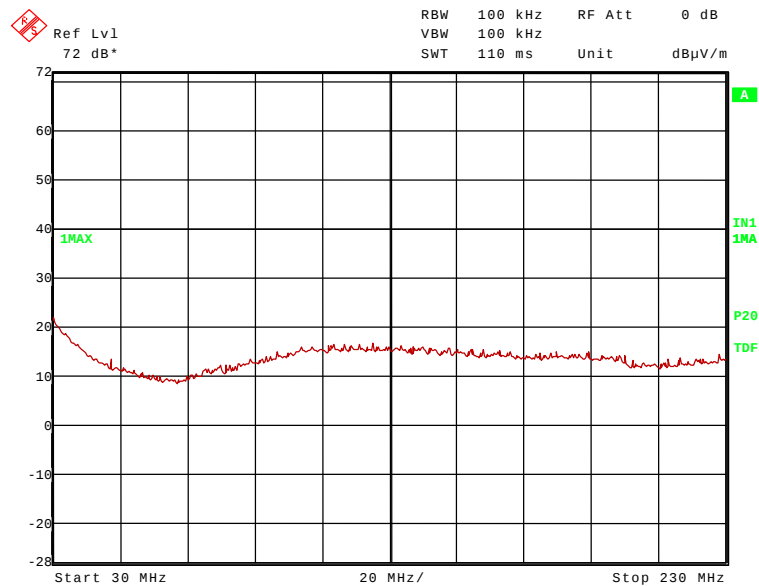

50283 5.wmf (230 MHz to 1 GHz):

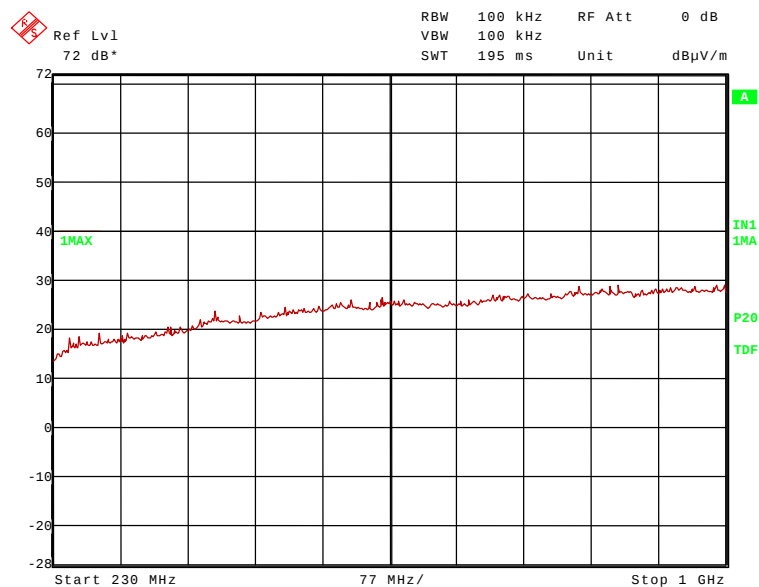


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out the open area test site.

TEST REPORT REFERENCE: R50283_A Edition 1


Final measurement (1 GHz to 25 GHz)

Transmitter operates at the lower band of the assigned frequency band

50283_7.wmf (1 GHz to 4 GHz):

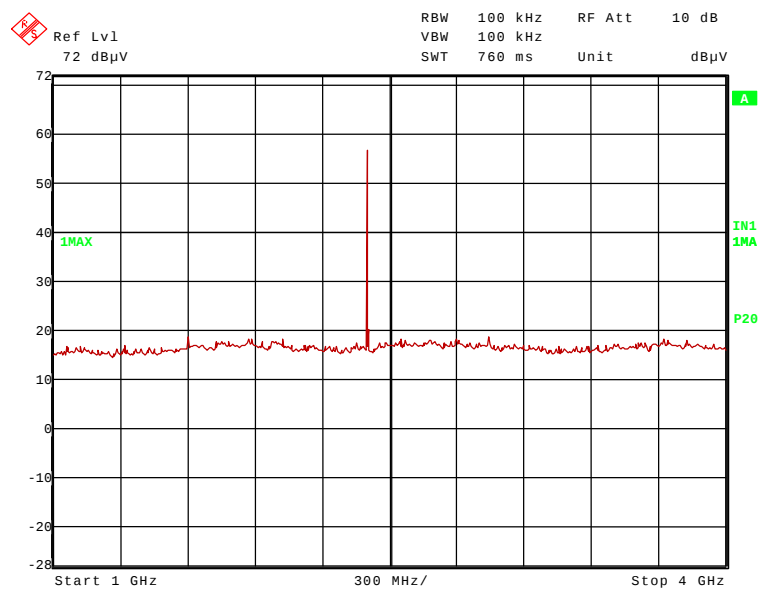


50283_11 (4 GHz to 12 GHz):

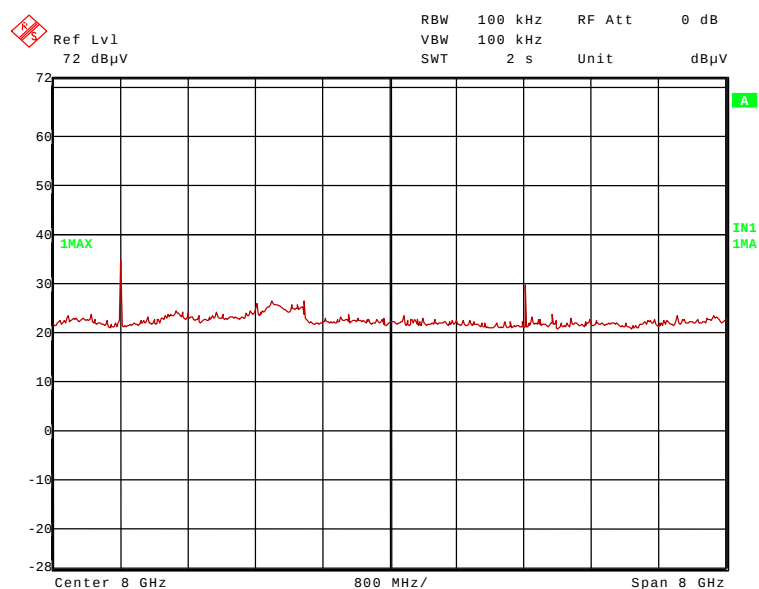


TEST REPORT REFERENCE: R50283_A Edition 1

50283 19.wmf (12 GHz to 18 GHz):

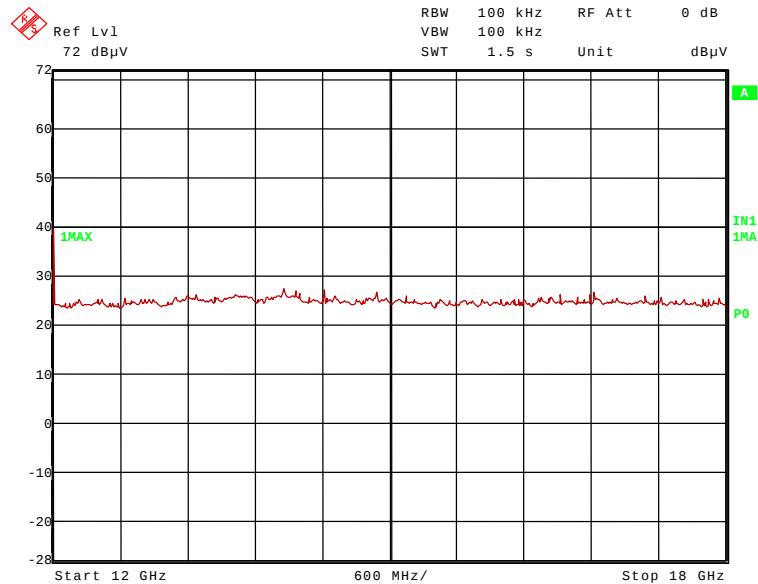

50283 22.wmf (18 GHz to 25 GHz):

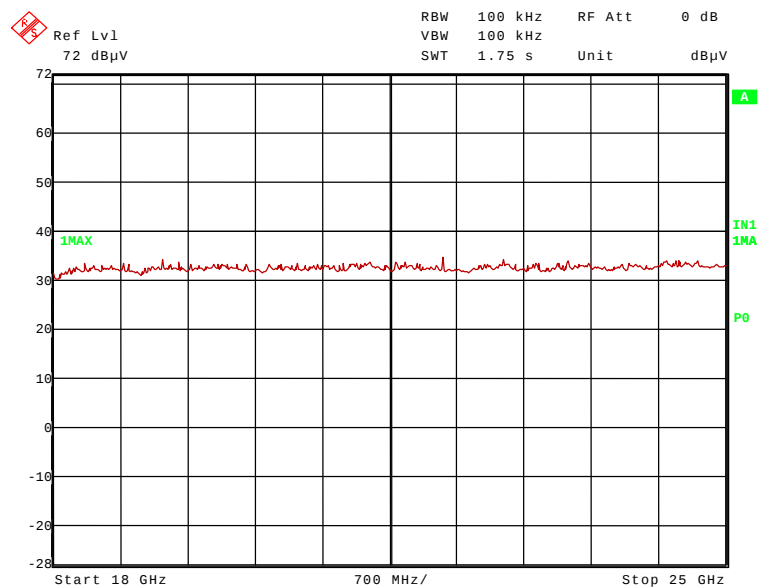

TEST REPORT REFERENCE: R50283_A Edition 1

Result measured with the peak detector:


Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	91.0	-	-	58.4	28.5	0	4.1	150	Hor.	-
4.804	53.0	74.0	21.0	38.2	33.8	25	6	150	Hor.	Yes
9.608	36.4	71.0	34.6	15.2	38.4	23.9	6.7	150	Vert.	No
12.010	49.5	74.0	24.5	40.8	33.6	25.9	1.0	80	Vert.	Yes

Result measured with the average detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	80.9	-	-	48.3	28.5	0	4.1	150	Hor.	-
4.804	41.5	54.0	12.5	26.6	33.9	25	6	150	Hor.	Yes
9.608	22.0	60.9	38.9	0.8	38.4	23.9	6.7	150	Vert.	No
12.010	32.4	54.0	21.6	23.7	33.6	25.9	1.0	80	Vert.	Yes


Transmitter operates at the middle of the assigned frequency band

50283_6.wmf (1 GHz to 4 GHz):

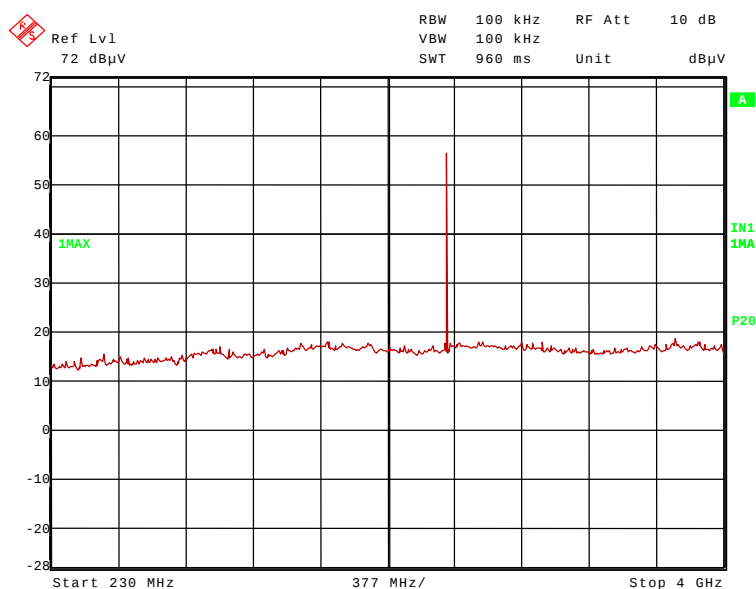


TEST REPORT REFERENCE: R50283_A Edition 1

50283_10.wmf (4 GHz to 12 GHz):

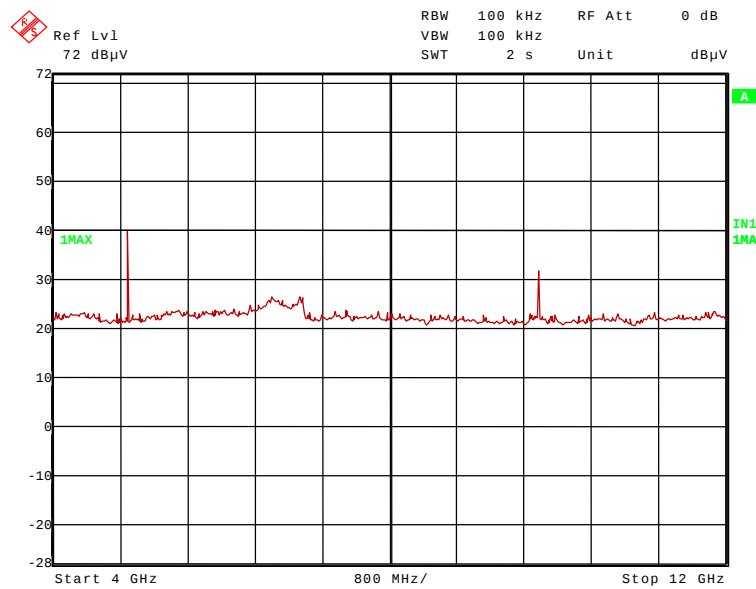


50283_20.wmf (12 GHz to 18 GHz):

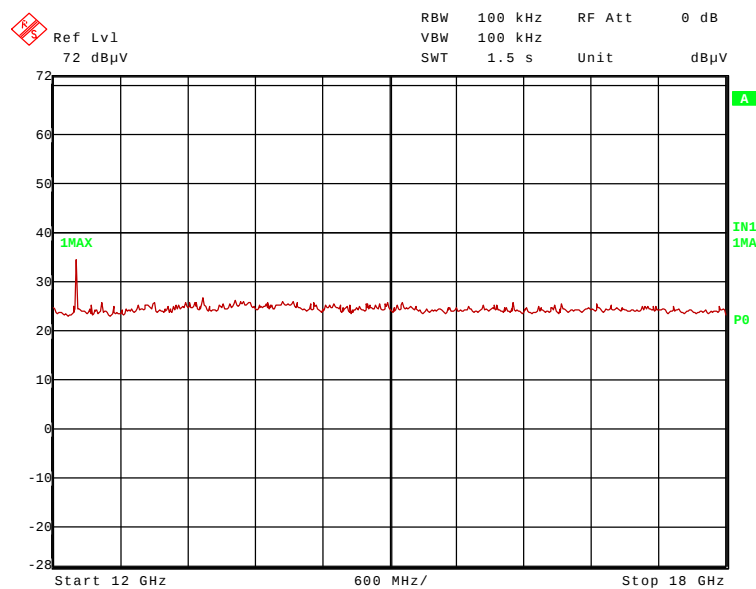

TEST REPORT REFERENCE: R50283_A Edition 1

50283_23.wmf (18 GHz to 25 GHz):

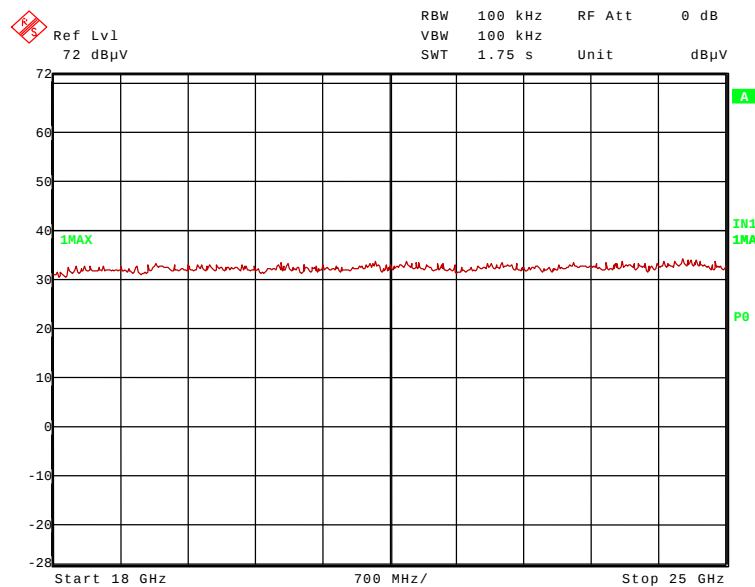

Result measured with the peak detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.441	89.9	-	-	57.3	28.5	0.0	4.1	150	Hor.	-
4.882	57.6	74.0	16.4	42.3	34.3	25.0	6.0	150	Hor.	Yes
9.764	38.5	69.9	31.4	17.4	38.4	24.0	6.7	150	Vert.	No
12.205	51.5	74.0	22.5	40.9	33.6	24.0	1.0	80	Vert.	Yes


Result measured with the average detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.441	79.8	-	-	47.2	28.5	0.0	4.1	150	Hor.	-
4.882	46.1	54.0	7.9	30.8	34.3	25.0	6.0	150	Hor.	Yes
9.764	23.8	59.8	36.0	2.7	38.4	24.0	6.7	150	Vert.	No
12.205	33.1	54.0	20.9	24.3	33.6	24.0	1.0	80	Vert.	Yes


TEST REPORT REFERENCE: R50283_A Edition 1

Transmitter operates at the upper band of the assigned frequency band

50283 8.wmf (1 GHz to 4 GHz):

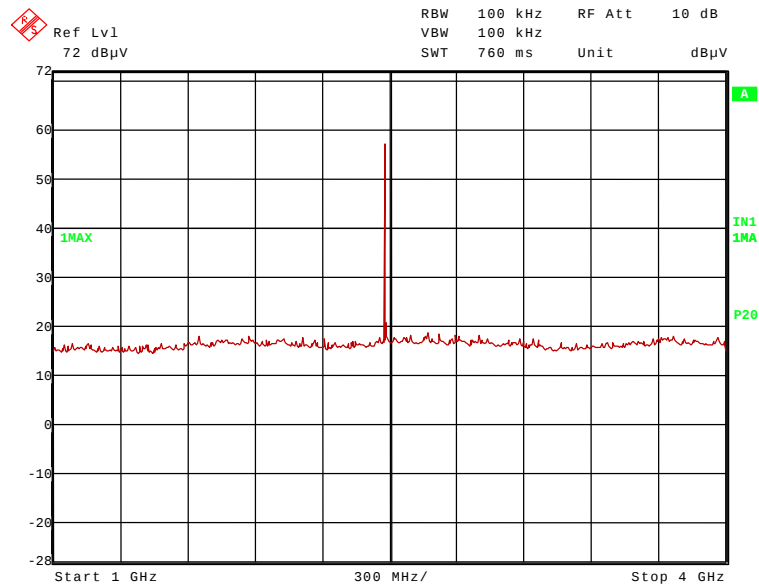


50283 9.wmf (4 GHz to 12 GHz):

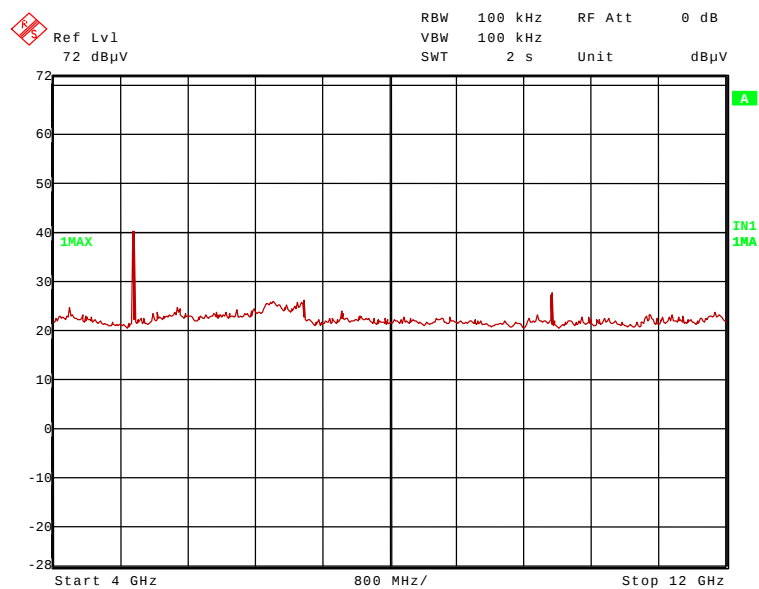


TEST REPORT REFERENCE: R50283_A Edition 1

50283 21.wmf (12 GHz to 18 GHz):

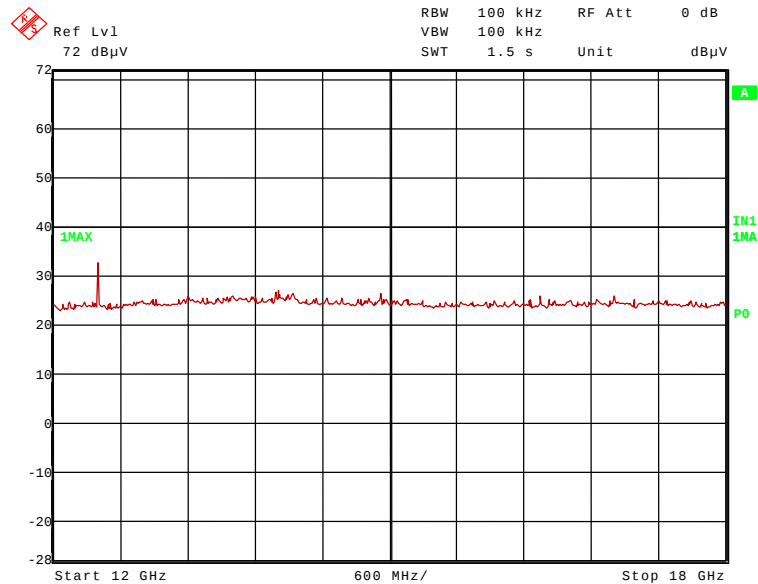

50283 24.wmf (18 GHz to 25 GHz):

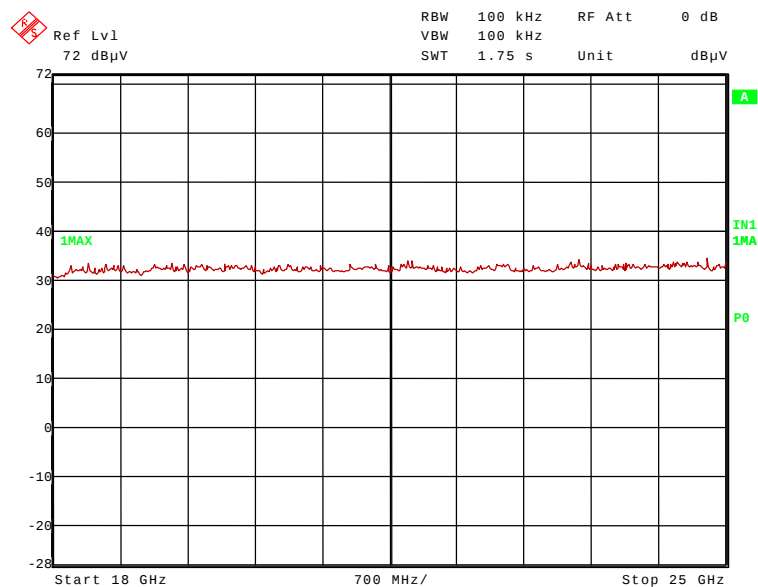

TEST REPORT REFERENCE: R50283_A Edition 1

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	89.4	-	-	56.8	28.5	0	4.1	150	Hor.	-
4.960	60.5	74.0	13.5	45.1	34.4	25	6	150	Hor.	Yes
9.920	36.3	69.4	33.1	14.9	38.5	24.0	6.9	150	Vert.	No
12.400	49.1	74.0	24.9	40.2	33.7	25.8	1.0	80	Vert.	Yes

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	79.4	-	-	46.8	28.5	0	4.1	150	Hor.	-
4.960	49.0	54.0	5.0	33.7	34.3	25	6	150	Hor.	Yes
9.920	22.0	59.4	37.4	0.6	38.5	24.0	6.9	150	Vert.	No
12.400	33.1	54.0	20.9	24.2	33.7	25.8	1.0	80	Vert.	Yes

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R50283_A Edition 1


5.10 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)

5.10.1 METHOD OF MEASUREMENT

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

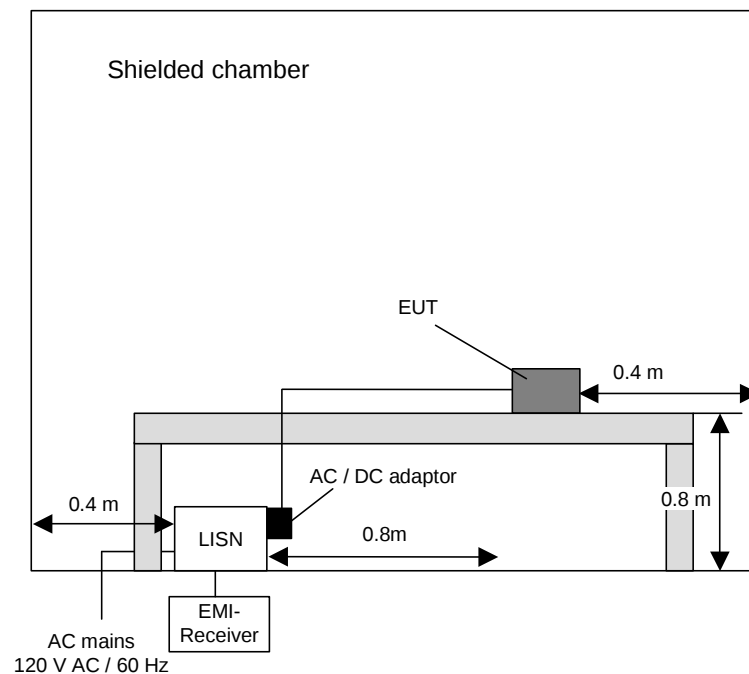

TEST REPORT REFERENCE: R50283_A Edition 1

5.10.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)

Ambient temperature	20 °C	Relative humidity	23 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC.

Title: DC Powerline Conducted Emission Test with protective ground conductor simulating network

EUT: cB-0720-02


Manufacturer: connectBlue AB

Operating Condition: Audio loopback mode

Test site: PHOENIX TEST-LAB Blomberg M4

Operator: Th. KÜHN

Test Specification:

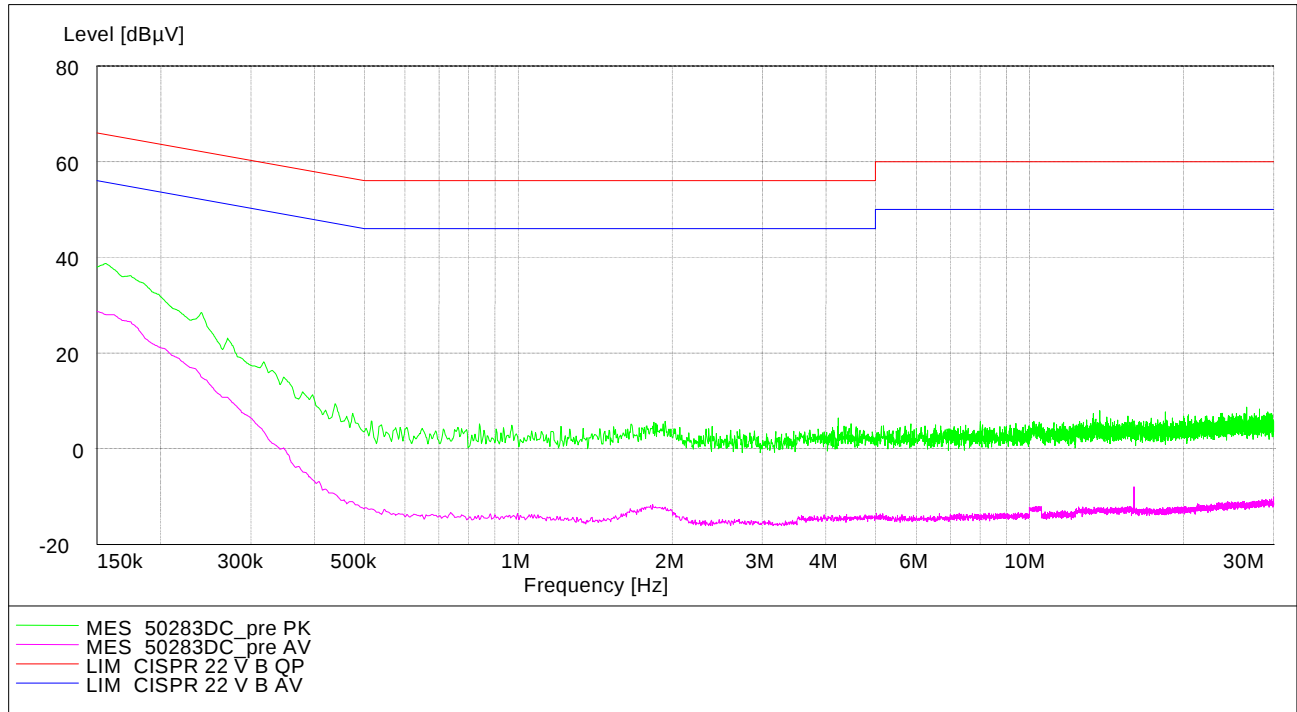

Data record name: 50283DC

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

1 – 3, 5, 6

TEST REPORT REFERENCE: R50283_A Edition 1

5.11 RADIATED EMISSIONS (RECEIVER)

Ambient temperature	20 °C	Relative humidity	27 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.


Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC.


Preliminary measurement

50283_14.wmf: (9 kHz to 150 kHz):

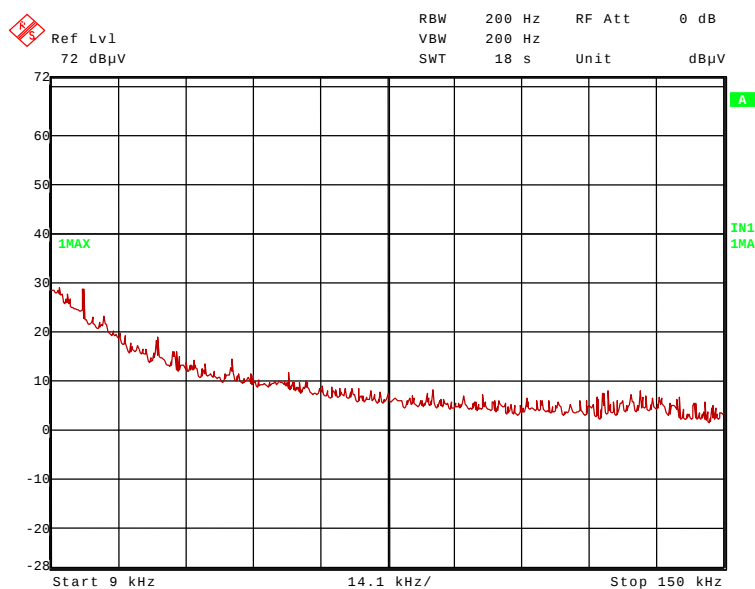


TEST REPORT REFERENCE: R50283_A Edition 1

50283 15.wmf: (150 kHz to 1 MHz):

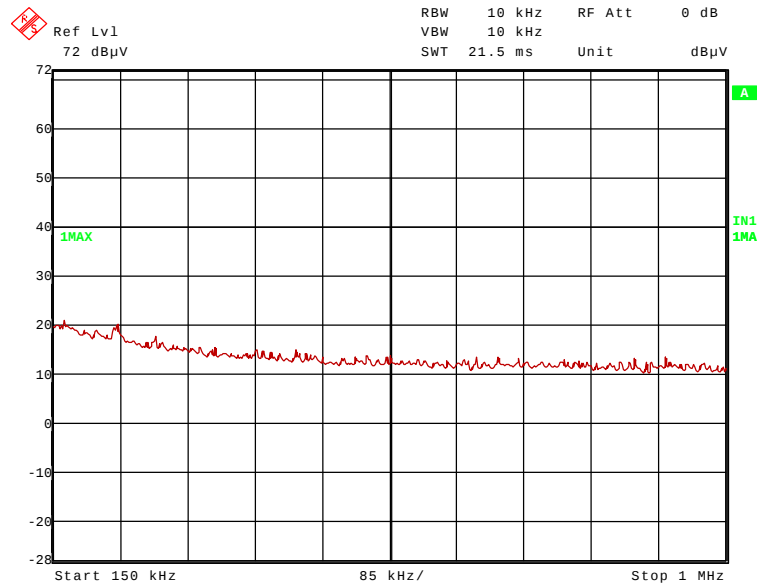


50283 16.wmf: (1 MHz to 30 MHz):

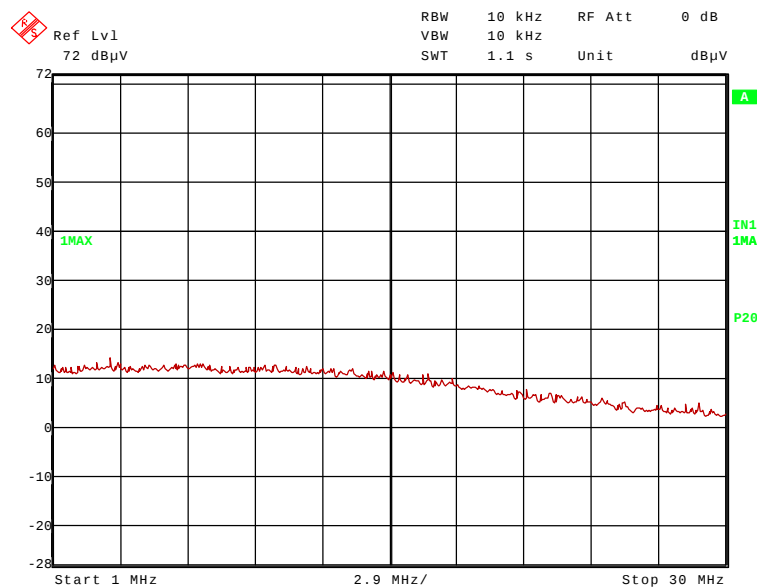


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the outdoor test site.

TEST REPORT REFERENCE: R50283_A Edition 1

50283 12.wmf: (30 MHz to 230 MHz):

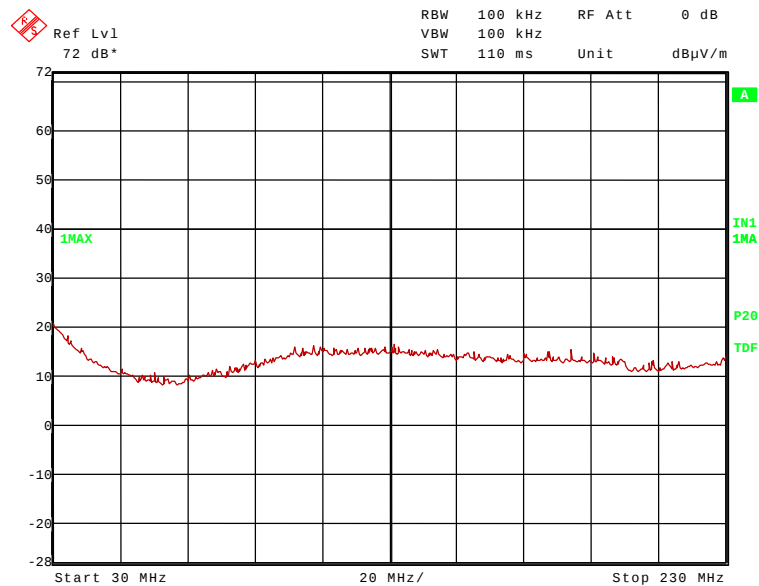


50283 13.wmf: (230 MHz to 1 GHz):

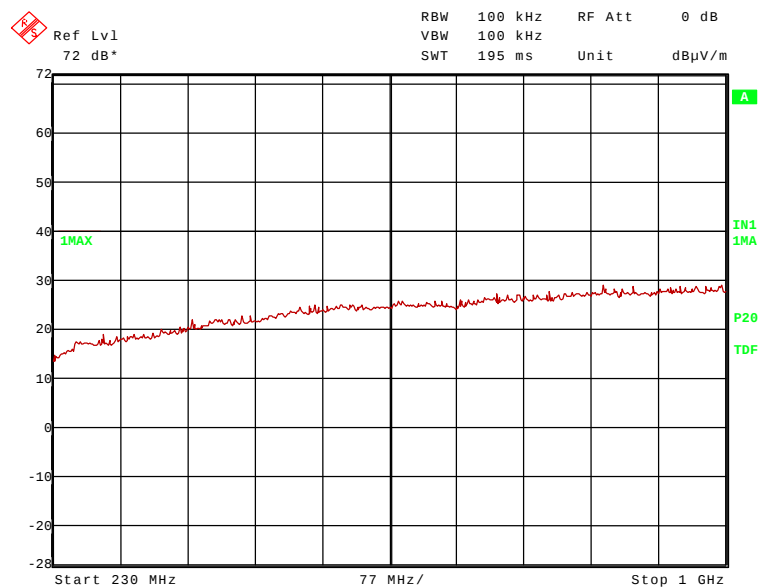


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out the open area test site.

TEST REPORT REFERENCE: R50283_A Edition 1

50283 17.wmf: (1 GHz to 12 GHz):

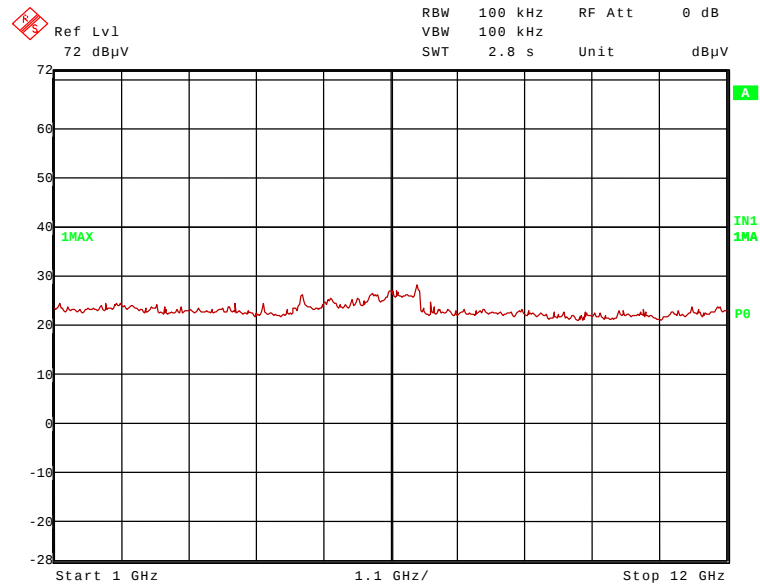


50283 18.wmf: (12 GHz to 18 GHz):

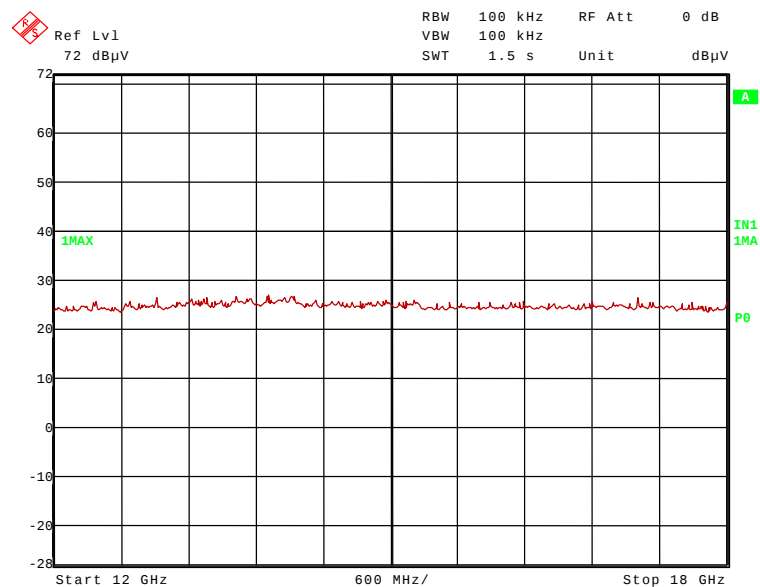

TEST REPORT REFERENCE: R50283_A Edition 1

50283_25.wmf: (18 GHz to 25 GHz):

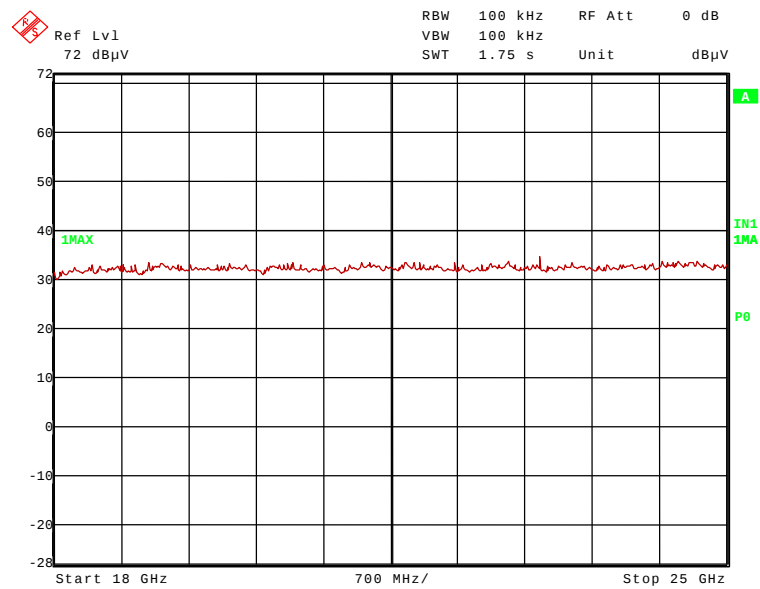

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R50283_A Edition 1

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

TEST REPORT REFERENCE: R50283_A Edition 1

Emission measurement at AC mains and DC in / out ports at M4					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026
3	LISN	NSLK8128	Schwarzbeck	8128155	480058
4	DC-filter	B84266-A21-E13	Siemens	940164525	480099
5	AC-filter	B84299-D87-E3	Siemens	930262292	480097
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M5					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
7	Fully anechoic chamber M5	-	Siemens	B83177-S1-X156	480073
8	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
9	Controller	HD100	Deisel	100/324	480067
10	Antenna support	MA240	Deisel	228/314	480069
11	Turntable	DS412	Deisel	412/317	480070
12	Antenna	CBL6112C	Chase	2689	480327
13	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M6					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
14	Open area test site	-	Phoenix Test-Lab	-	480085
15	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
16	Controller	HD100	Deisel	100/670	480139
17	Turntable	DS420HE	Deisel	420/620/80	480087
18	Antenna support	AS615P	Deisel	615/310	480086
19	Antenna	CBL6111 A	Chase	1643	480147
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111

TEST REPORT REFERENCE: R50283_A Edition 1

Radiated emission measurement at M8					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
21	Fully anechoic chamber M8	-	Siemens	B83117-E7019-T231	480190
22	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
23	Measuring receiver	ESCS 30	Rohde & Schwarz	828985/014	480270
24	Controller	HD100	Deisel	100/427	480181
25	Turntable	DS420	Deisel	420/435/97	480186
26	Antenna support	AS615P	Deisel	615/310	480187
27	Antenna	CBL6112 A	Chase	2034	480185
28	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M20					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303
30	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355
32	Controller	HD100	Deisel	100/670	480326
33	Turntable	DS420HE	Deisel	420/620/80	480315
34	Antenna support	AS615P	Deisel	615/310	480187
35	Antenna	CBL6112 B	Chase	2688	480328
36	Antenna	3115 A	EMCO	9609-4918	480183
37	Standard Gain Horn 11.9GHz – 18GHZ	18240-20	Flann Microwave	483	480294
38	Standard Gain Horn 11.9GHz – 18GHZ	18240-20	Flann Microwave	482	480295
39	Standard Gain Horn 17.9GHz – 26.7GHZ	20240-20	Flann Microwave	411	480297
40	Standard Gain Horn 17.9GHz – 26.7GHZ	20240-20	Flann Microwave	410	480296
41	Standard Gain Horn 26.4GHz – 40.1GHZ	22240-20	Flann Microwave	469	480299

TEST REPORT REFERENCE: R50283_A Edition 1

No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
42	Standard Gain Horn 26.4GHz – 40.1GHZ	22240-20	Flann Microwave	468	480298
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142
45	RF-cable 1m	KPS-1533- 400-KPS	Insulated Wire	-	480300
46	RF-cable 1m	KPS-1533- 400-KPS	Insulated Wire	-	480301
47	RF-cable 2m	KPS-1533- 400-KPS	Insulated Wire	-	480302
48	RF-cable No. 5	RTK 081	Rosenberger		410097
49	Preamplifier	JS3- 00101200- 23-5A	Miteq	681851	480337
50	Preamplifier	JS3- 12001800- 16-5A	Miteq	571667	480343
51	Preamplifier	JS3- 18002600- 20-5A	Miteq	658697	480342
52	Preamplifier	JS3- 26004000- 25-5A	Miteq	563593	480344
53	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Ancillary equipment used for testing					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
54	Power supply	TOE 8852	Toellner	51712	480233
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-

All used measurement equipment was calibrated (if necessary). The calibration intervals and the calibration history will be given out on request.

TEST REPORT REFERENCE: R50283_A Edition 1

7 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	4 pages
	cB-0720-02 test set-up fully anechoic chamber	50283_r.jpg
	cB-0720-02 test set-up fully anechoic chamber	50283_m.jpg
	cB-0720-02 test set-up fully anechoic chamber	50283_q.jpg
	cB-0720-02 test set-up shielded chamber	50283_e.jpg
ANNEX B	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	6 pages
	cB-0720-02 sample for radiated tests, top view	50283_5.jpg
	cB-0720-02 sample for radiated tests, bottom view	50283_6.jpg
	cB-0720-02 sample for conducted tests, top view	50283_5.jpg
	cB-0720-02 sample for conducted tests, bottom view	50283_7.jpg
	cB-0720-02 with carrier board, top view	50283_3.jpg
	cB-0720-02 PCB carrier board, bottom view	50283_6.jpg
ANNEX C	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	- pages
	Because the EUT is a module, which is intended to be implemented inside a final application, no external photographs were available	