

47 CFR PART 15 SUBPART C TEST REPORT

for

WIEGAND PROXIMITY READER

Model No.: GV-RKR1355

FCC ID: PWQ-GV-RKR1355

of

Applicant: GeoVision Inc.

Address: 9F., No. 246, Sec. 1, Neihu Rd., Neihu District, Taipei 114,
Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.


FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22207-21991-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

TABLE OF CONTENTS

1 GENERAL INFORMATION2

1.1 NOTES.....2

1.2 TESTING LABORATORY3

 1.2.1 Location3

 1.2.2 Details of accreditation status3

1.3 DETAILS OF APPROVAL HOLDER.....4

1.4 APPLICATION DETAILS4

1.5 GENERAL INFORMATION OF TEST ITEM.....4

1.6 TEST STANDARDS.....4

2 TECHNICAL TEST5

2.1 SUMMARY OF TEST RESULTS5

2.2 TEST ENVIRONMENT5

2.3 TEST EQUIPMENT LIST6

2.4 GENERAL TEST PROCEDURE9

3 TEST RESULTS (ENCLOSURE)11

3.1 OUTPUT POWER (FIELD STRENGTH)12


3.2 OUT OF BAND RADIATED EMISSIONS.....14

3.3 OCCUPIED BANDWIDTH16

3.4 FREQUENCY TOLERANCE17

3.5 POWER LINE CONDUCTED EMISSION18

APPENDIX19



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

September 26, 2022

Ken Kang

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

September 26, 2022


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status


Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: /.
Accredited number: /.
Street: /.
Town: /.
Country: /.



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

1.3 Details of approval holder

Name: GeoVision Inc.
Street: 9F., No. 246, Sec. 1, Neihu Rd., Neihu District,
City: Taipei 114,
Country: Taiwan

1.4 Application details

Date of receipt of test item: July 26, 2022
Date of test: from July 27, 2022 to September 20, 2022

1.5 General information of Test item


Description of test item: WIEGAND PROXIMITY READER
Type identification: GV-RKR1355
Multi-listing model number: ./.
Transmitting frequency: 13.56 MHz
Operation mode: Half-duplex
Voltage supply: DC 12V/1A
Antenna type: Loop antenna
Sample no.: #01

Manufacturer: (if applicable)

Name: ./.
Street: ./.
Town: ./.
Country: ./.

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.225 (2020-10)



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations were ascertained in the course of the tests performed.

2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Details of power supply: DC 12V/1A

Extreme conditions parameters: ./.

| Test item Name | Measurement Uncertainty |
|--|--|
| Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission) | Expanded Uncertainty : AMN : 1.03 dB Voltage probe : 1.05 dB |
| Estimation Result of Uncertainty of Radiated Emission(3M) (Output Power (Field Strength), Out of Band Radiated Emissions, Band Edge) | Expanded Uncertainty : 0.009-30 MHz : 3.48 dB 30-1000 MHz : 4.48 dB 1-18 GHz : 4.15 dB 18-40 GHz : 3.78 dB |
| Estimation Result of Uncertainty of Bandwidth Measurement (Occupied Bandwidth) | Expanded Uncertainty : 0.45 kHz |
| Estimation Result of Uncertainty of Frequency Drift Measurement (Frequency tolerance) | Expanded Uncertainty : 6.11 Hz |

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

2.3 Test Equipment List

| No. | Test equipment | Type | Serial No. | Manufacturer | Cal. Date | Next Cal. Date |
|--------------|---|-----------------|-------------|--------------------|---------------|----------------|
| ETSTW-CE 001 | EMI TEST RECEIVER | ESHS10 | 842121/013 | R&S | 2022/6/22 | 2023/6/21 |
| ETSTW-CE 003 | AC POWER SOURCE | APS-9102 | D161137 | GW | Function Test | |
| ETSTW-CE 004 | ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK | ESH3-Z5 | 840731/011 | R&S | 2021/11/9 | 2022/11/8 |
| ETSTW-CE 006 | IMPULSBEGRENZER PULSE LIMITER | ESH3-Z2 | 100226 | R&S | 2022/9/16 | 2023/9/15 |
| ETSTW-CE 008 | HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP | 334.6010.02 | 844581/024 | R&S | Function Test | |
| ETSTW-CE 009 | TEMP.&HUMIDITY CHAMBER | GTH-225-40-1P-U | MAA0305-009 | GIANT FORCE | 2022/8/3 | 2023/8/2 |
| ETSTW-CE 016 | TWO-LINE V-NETWORK | ENV216 | 100050 | R&S | 2021/11/8 | 2022/11/7 |
| ETSTW-CE 028 | MXE EMI Receiver | N9038A | MY53220110 | Agilent | 2022/7/29 | 2023/7/28 |
| ETSTW-RE 003 | EMI TEST RECEIVER | ESI 26 | 831438/001 | R&S | 2022/6/21 | 2023/6/20 |
| ETSTW-RE 004 | EMI TEST RECEIVER | ESI 40 | 832427/004 | R&S | 2022/9/16 | 2023/9/15 |
| ETSTW-RE 012 | TUNABLE BANDREJECT FILTER | D.C 0309 | 146 | K&L | Function Test | |
| ETSTW-RE 013 | TUNABLE BANDREJECT FILTER | D.C 0336 | 397 | K&L | Function Test | |
| ETSTW-RE 018 | MICROWAVE HORN ANTENNA | AT4560 | 27212 | AR | 2022/8/18 | 2023/8/17 |
| ETSTW-RE 019 | MICROWAVE HORN ANTENNA | 22240-25 | 121074 | FM | 2022/6/13 | 2023/6/12 |
| ETSTW-RE 027 | Passive Loop Antenna | 6512 | 00034563 | ETS-Lindgren | 2022/6/22 | 2023/6/21 |
| ETSTW-RE 030 | Double-Ridged Guide Horn Antenna | 3117 | 00035224 | ETS-Lindgren | 2022/5/23 | 2023/5/22 |
| ETSTW-RE 042 | Biconical Antenna | HK116 | 100172 | R&S | 2022/3/4 | 2023/3/3 |
| ETSTW-RE 043 | Log-Periodic Dipole Antenna | HL223 | 100166 | R&S | 2022/6/28 | 2023/6/27 |
| ETSTW-RE 044 | Log-Periodic Antenna | HL050 | 100094 | R&S | 2022/8/1 | 2023/7/31 |
| ETSTW-RE 045 | ESA-E SERIES SPECTRUM ANALYZER | E4404B | MY45111242 | Agilent | Pre-test Use | |
| ETSTW-RE 050 | Attenuator 10dB | 50HF-010-1 | None | JFW | 2022/2/18 | 2023/2/17 |
| ETSTW-RE 051 | Attenuator 6dB | 50HF-006-1 | None | JFW | 2022/2/18 | 2023/2/17 |
| ETSTW-RE 053 | Attenuator 3dB | 50HF-003-1 | None | JFW | 2022/2/18 | 2023/2/17 |
| ETSTW-RE 055 | SPECTRUM ANALYZER | FSU 26 | 200074 | R&S | 2022/3/28 | 2023/3/27 |
| ETSTW-RE 060 | Attenuator 30dB | 5015-30 | F651012z-01 | ATM | 2022/2/18 | 2023/2/17 |
| ETSTW-RE 062 | Amplifier Module | CHC 2 | None | KMIC | 2022/5/13 | 2023/5/12 |
| ETSTW-RE 064 | Bluetooth Test Set | MT8852B-042 | 6K00005709 | Anritsu | Function Test | |
| ETSTW-RE 069 | Double-Ridged Guide Horn Antenna | 3117 | 00069377 | ETS-Lindgren | Function Test | |
| ETSTW-RE 072 | CELL SITE TEST SET | 8921A | 3339A00375 | HP | 2021/10/27 | 2022/10/26 |
| ETSTW-RE 088 | SOLID STATE AMPLIFIER | KMA180265A01 | 99057 | KMIC | 2022/9/16 | 2023/9/15 |
| ETSTW-RE 091 | Match Pad | MDCS1500 | None | WOKEN | 2022/6/9 | 2023/6/8 |
| ETSTW-RE 099 | DC Block | 50DB-007-1 | None | JFW | 2022/2/18 | 2023/2/17 |
| ETSTW-RE 112 | AC POWER SOURCE | TFC-1005 | T-0A023536 | T-Power | Function test | |
| ETSTW-RE 115 | 2.4GHz Notch Filter | N0124411 | 473874 | MICROWAVE CIRCUITS | 2022/1/5 | 2023/1/4 |




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

| | | | | | | |
|-----------------|--------------------------------------|--|-----------------|--------------------|------------------|------------|
| ETSTW-RE 120 | RF Player | MP9200 | MP9210-111022 | ADIVIC | 2021/10/29 | 2022/10/28 |
| ETSTW-RE 122 | SIGNAL GENERATOR | SMF100A | 102149 | R&S | 2022/6/20 | 2023/6/19 |
| ETSTW-RE 125 | 5GHz Notch filter | 5NSL11-5200/E221.3-O/O | 1 | K&L Microwave | 2022/8/3 | 2023/8/2 |
| ETSTW-RE 126 | 5GHz Notch filter | 5NSL12-5800/E221.3-O/O | 1 | K&L Microwave | 2022/8/3 | 2023/8/2 |
| ETSTW-RE 127 | RF Switch Box | RFS-01 | None | WTS | 2022/2/18 | 2023/2/17 |
| ETSTW-RE 128 | 5.3GHz Notch filter | N0153001 | SN487233 | Microwave Circuits | 2022/8/3 | 2023/8/2 |
| ETSTW-RE 129 | 5.5GHz Notch filter | N0555984 | SN487234 | Microwave Circuits | 2022/8/3 | 2023/8/2 |
| ETSTW-RE 130 | Handheld RF Spectrum Analyzer | N9340A | CN0147000204 | Agilent | Pre-test Use | |
| ETSTW-RE 142 | Amplifier | 8447D | 2805A03378 | Agilent | 2022/5/13 | 2023/5/12 |
| ETSTW-RE 146 | Preamplifier | JPA-10MIG | 15090004 | JPT | 2022/5/27 | 2023/5/26 |
| ETSTW-RE 152 | Bi-log Hybrid Antenna | MCTD 2786B | BLB20J04029 | ETC | 2021/10/5 | 2022/10/4 |
| ETSTW-RE 153 | Signal Analyzer | FSV40 | 101929 | R&S | 2022/9/16 | 2023/9/15 |
| ETSTW-RE 159 | Bi-log Hybrid Antenna (30M~1000 MHz) | MCTD 2786B | BLB21N04035 | ETC | 2021/12/06 | 2022/12/05 |
| ETSTW-RF 002 | Electromagnetic field probe | LF-30 | K-0007 | STT | 2022/7/14 | 2023/7/13 |
| ETSTW-EMI 011 | USB Compact Modulator | SFC-U | 101689 | R&S | 2022/6/10 | 2023/6/9 |
| ETSTW-GSM 002 | Universal Radio Communication Tester | CMU 200 | 109439 | R&S | 2022/3/28 | 2023/3/27 |
| ETSTW-GSM 003 | Radio Communication Analyzer | MT8820C | 6201342073 | Anritsu | 2022/5/9 | 2023/5/8 |
| ETSTW-GSM 004 | Wideband Radio Communication Tester | CMW500 | 128092 | R&S | 2021/10/29 | 2022/10/28 |
| ETSTW-GSM 019 | Band Reject Filter | WRCTF824/849-822/851-40 /12+9SS | 3 | WI | 2022/1/5 | 2023/1/4 |
| ETSTW-GSM 020 | Band Reject Filter | WRCD1747/1748-1743/1752-32/5SS | 1 | WI | 2022/1/5 | 2023/1/4 |
| ETSTW-GSM 021 | Band Reject Filter | WRCD1879.5/1880.5-1875.5/1884.5-32/5SS | 3 | WI | 2022/1/5 | 2023/1/4 |
| ETSTW-GSM 022 | Band Reject Filter | WRCT901.9/903.1-904.25-50/8SS | 1 | WI | 2022/1/5 | 2023/1/4 |
| ETSTW-GSM 023 | Power Divider | 4901.19.A | None | SUHNER | 2022/9/2 | 2023/9/1 |
| ETSTW-GSM 024 | Radio Communication Analyzer | MT8821C | None | Anritsu | 2022/5/3 | 2023/5/2 |
| ETSTW-GSM 025 | Band Reject Filter | BRM19835 | 001 | Micro-Tronics | 2022/8/3 | 2023/8/2 |
| ETSTW-Cable 011 | SMA to N type Cable | RGU-400 | None | THERMAX | Pre-test Use NCR | |
| ETSTW-Cable 016 | BNC Cable | Switch Box | B Cable 1 | Schwarz beck | 2022/2/18 | 2023/2/17 |
| ETSTW-Cable 017 | BNC Cable | X Cable | B Cable 2 | Schwarz beck | 2022/2/18 | 2023/2/17 |
| ETSTW-Cable 018 | BNC Cable | Y Cable | B Cable 3 | Schwarz beck | 2022/2/18 | 2023/2/17 |
| ETSTW-Cable 019 | BNC Cable | Z Cable | B Cable 4 | Schwarz beck | 2022/2/18 | 2023/2/17 |
| ETSTW-Cable 020 | N TYPE Cable | OATS Cable 1 | N30N30-L335-15M | JYE BAO CO.,LTD. | 2022/6/15 | 2023/6/14 |
| ETSTW-Cable 027 | Microwave Cable | SUCOFLEX 104 | 279083 | HUBER+SUHNER | 2022/5/6 | 2023/5/5 |
| ETSTW-Cable 028 | Microwave Cable | FA147A0015M2020 | 30064-2 | UTIFLEX | 2022/9/16 | 2023/9/15 |
| ETSTW-Cable 029 | Microwave Cable | FA147A0015M2020 | 30064-3 | UTIFLEX | 2022/9/16 | 2023/9/15 |
| ETSTW-Cable 030 | Microwave Cable | SUCOFLEX 104 (S_Cable 9) | 279067 | HUBER+SUHNER | 2022/2/18 | 2023/2/17 |
| ETSTW-Cable 043 | Microwave Cable | SUCOFLEX 104 | 317576 | HUBER+SUHNER | 2022/5/13 | 2023/5/12 |
| ETSTW-Cable 047 | Microwave Cable | SUCOFLEX 104 | 325518 | HUBER+SUHNER | 2022/7/1 | 2023/6/30 |




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

| | | | | | | |
|-----------------|--------------------------|-----------------------|----------|--------------|---------------------------------------|------------|
| ETSTW-Cable 058 | Microwave Cable | SUCOFLEX 104 | none | HUBER+SUHNER | 2022/5/27 | 2023/5/26 |
| ETSTW-Cable 064 | Microwave Cable | SUCOFLEX 104 | MY28891 | HUBER+SUHNER | 2022/5/13 | 2023/5/12 |
| ETSTW-Cable 071 | N TYPE CABLE | EMCCFD400-NM-NM-25000 | 170239 | EMCI | 2022/5/27 | 2023/5/26 |
| ETSTW-Cable 072 | SMA type cable (8m) | SUCOFLEX 104 | 805800/4 | HUBER+SUHNER | 2022/5/13 | 2023/5/12 |
| ETSTW-Cable 074 | SMA type cable (2m) | SUCOFLEX 104 | 802563/4 | HUBER+SUHNER | 2022/5/13 | 2023/5/12 |
| WTSTW-SW 002 | EMI TEST SOFTWARE | EZ EMC | None | Farad | Version ETS-03A1 Version EMEC-3A1+ | |
| WTSTW-SW 006 | EMI TEST SOFTWARE | e3 | None | AUDIX | Version 9.161014 | |
| WTSTW-SW 008 | Signal studio | Agilent | None | AUDIX | Version 2.0.0.1 | |
| ETSTW-TH 002 | Thermohygrometer | 608-H1 | 45204317 | Testo | 2022/9/16 | 2023/9/15 |
| ETSTW-TH 003 | Wireless weather station | GAIA | N/A | TFA | 2021/10/18 | 2022/10/17 |



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m


The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 Section 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

3 Test results (enclosure)

| TEST CASE | Para. Number | Required | Test passed | Test failed |
|--------------------------------|--------------------|-------------------------------------|-------------------------------------|--------------------------|
| Output Power Field Strength | 15.225 (a) (b) (c) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Out of Band Radiated Emissions | 15.225 (d) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Band Edge | 15.225 (d) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Occupied Bandwidth | 2.1049 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Frequency Stability | 15.225 (e) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Power Line Conducted Emission | 15.207 (a) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

The following is intentionally left blank.



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

3.1 Output Power (Field Strength)

FCC Rules: 15.225 (a) (b) (c), 15.205, 15.209, 15.35

Operation within the band 13.110 - 14.010 MHz

Limit

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Measurement Results:


The field strength at 3 meter distance as 67.54 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 27.54 dB μ V/m.

Test date: August 15, 2022

Temperature: 25.2 °C


Humidity: 53.4 %

Tester: Sky



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22207-21991-C-1
 FCC ID: PWQ-GV-RKR1355

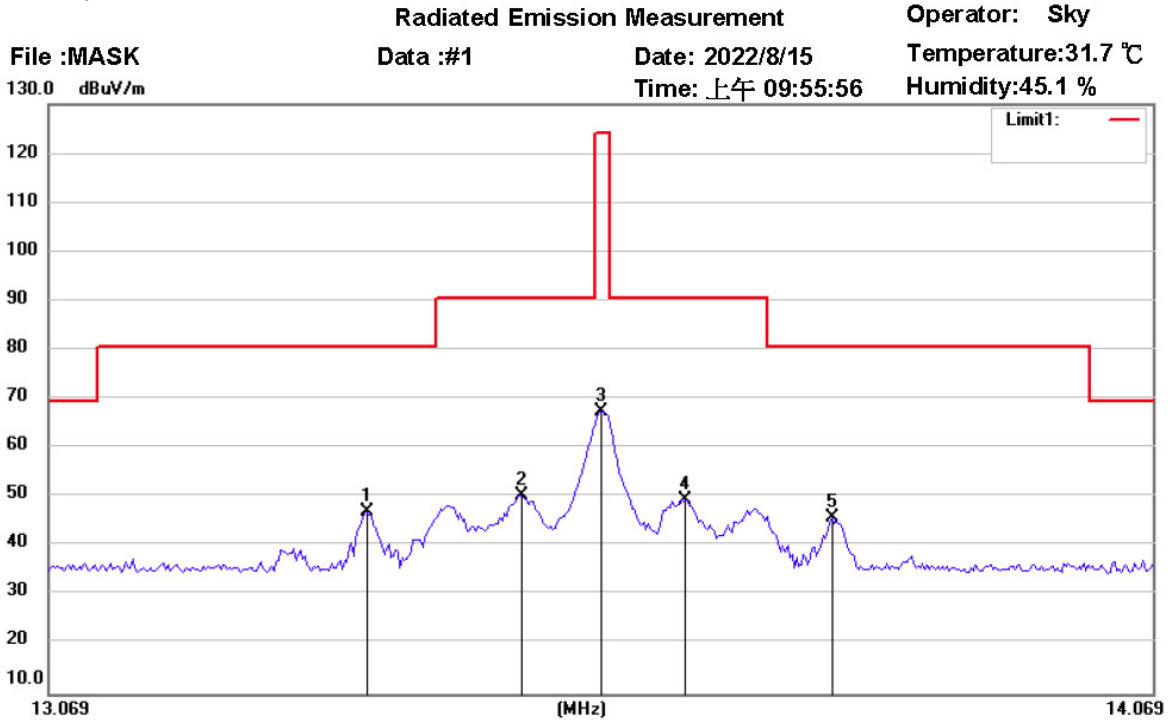

Site : Chamber

Condition : FCC 15.225 power (3m)(13.56MHz)

EUT : W6M22207-21991

M/N:

Test Mode : TX 13.56MHz

Note :


Polarization:

Power : 12 Vd.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|----------|
| * | 13.3500 | 13.38 | peak | 33.78 | 47.16 | 80.50 | 100 | 21 | -33.34 | |
| | 13.4888 | 16.60 | peak | 33.76 | 50.36 | 90.50 | 100 | 221 | -40.14 | |
| | 13.5608 | 33.78 | peak | 33.76 | 67.54 | 124.00 | | | -56.46 | RF Power |
| | 13.6371 | 15.80 | peak | 33.75 | 49.55 | 90.50 | 100 | 320 | -40.95 | |
| | 13.7708 | 11.96 | peak | 33.74 | 45.70 | 80.50 | 100 | 110 | -34.80 | |

Test equipment used: ETSTW-RE 027, ETSTW-RE 055



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

3.2 Out of Band Radiated Emissions

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

| Frequency of Emission (MHz) | Limit | Measurement distance |
|-----------------------------|-----------------|----------------------|
| 0.009 – 0.490 | 2400 / f (KHz) | 300 |
| 0.49 – 1.705 | 24000 / f (KHz) | 30 |
| 1.705 – 30 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 – 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

Summary table with radiated data of the test plots

Model: GV-RKR1355 Date: --
 Mode: -- Temperature: -- °C Engineer: --
 Polarization: Horizontal Humidity: -- %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| -- | -- | -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- | -- | -- |

Polarization: Vertical

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| -- | -- | -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- | -- | -- |

Note


- Correction Factor = Antenna factor + Cable loss - Preamplifier**
- The formula of measured value as: Test Result = Reading + Correction Factor**
- Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- All not in the table noted test results are more than 20 dB below the relevant limits.**
- See attached diagrams in appendix. For receiver part of above 30 MHz, please refer to test report no.:W6M22207-21991-P-15B.**

All other not noted test plots do not contain significant test results in relation to the limits
 Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 142, ETSTW-RE 152, ETSTW-RE 062



Registration number: W6M22207-21991-C-1
 FCC ID: PWQ-GV-RKR1355
 Test result of Band Edge

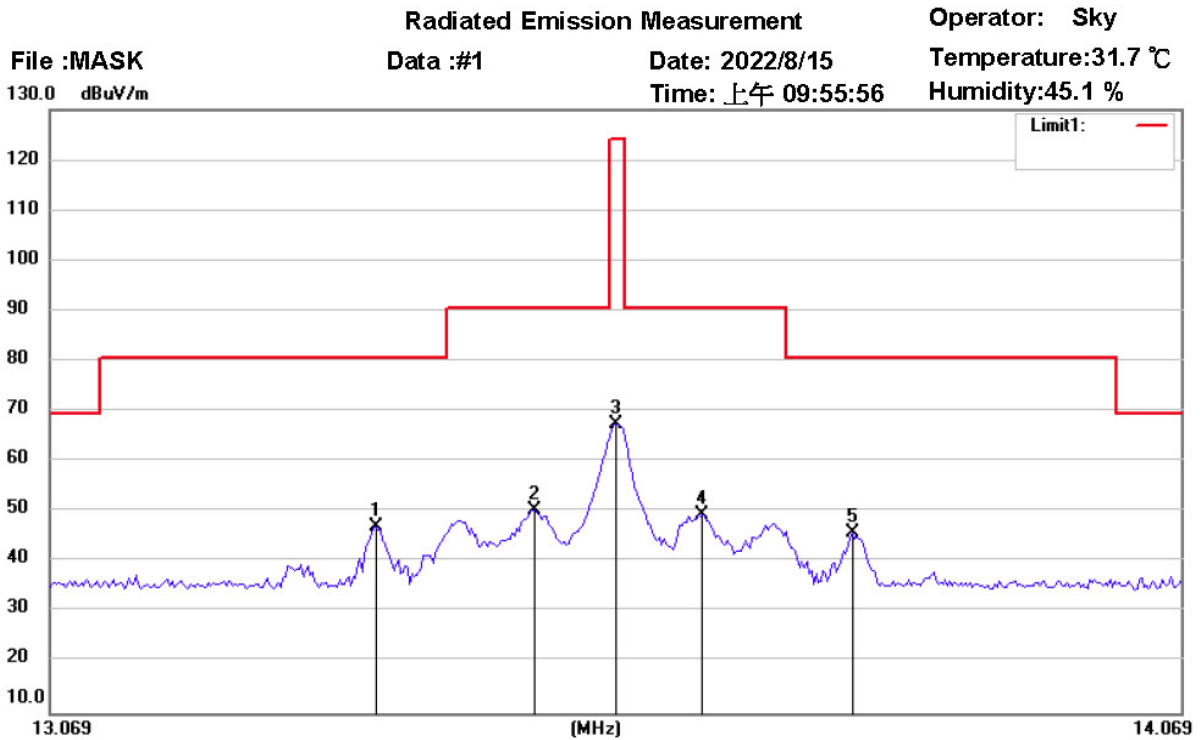

Site : Chamber

Condition : FCC 15.225 bandedge (3m)(13.56MHz)

EUT : W6M22207-21991

M/N:

Test Mode : TX 13.56MHz

Note :


Polarization:

Power : 12 Vd.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|----------|
| * | 13.3500 | 13.38 | peak | 33.78 | 47.16 | 80.50 | 100 | 21 | -33.34 | |
| | 13.4888 | 16.60 | peak | 33.76 | 50.36 | 90.50 | 100 | 221 | -40.14 | |
| | 13.5608 | 33.78 | peak | 33.76 | 67.54 | 124.00 | | | -56.46 | RF Power |
| | 13.6371 | 15.80 | peak | 33.75 | 49.55 | 90.50 | 100 | 320 | -40.95 | |
| | 13.7708 | 11.96 | peak | 33.74 | 45.70 | 80.50 | 100 | 110 | -34.80 | |

Test equipment used: ETSTW-RE 055



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355


3.3 Occupied Bandwidth

Test date: August 15, 2022


Temperature: 25.2 °C

Humidity: 53.4 %

Tester: Sky

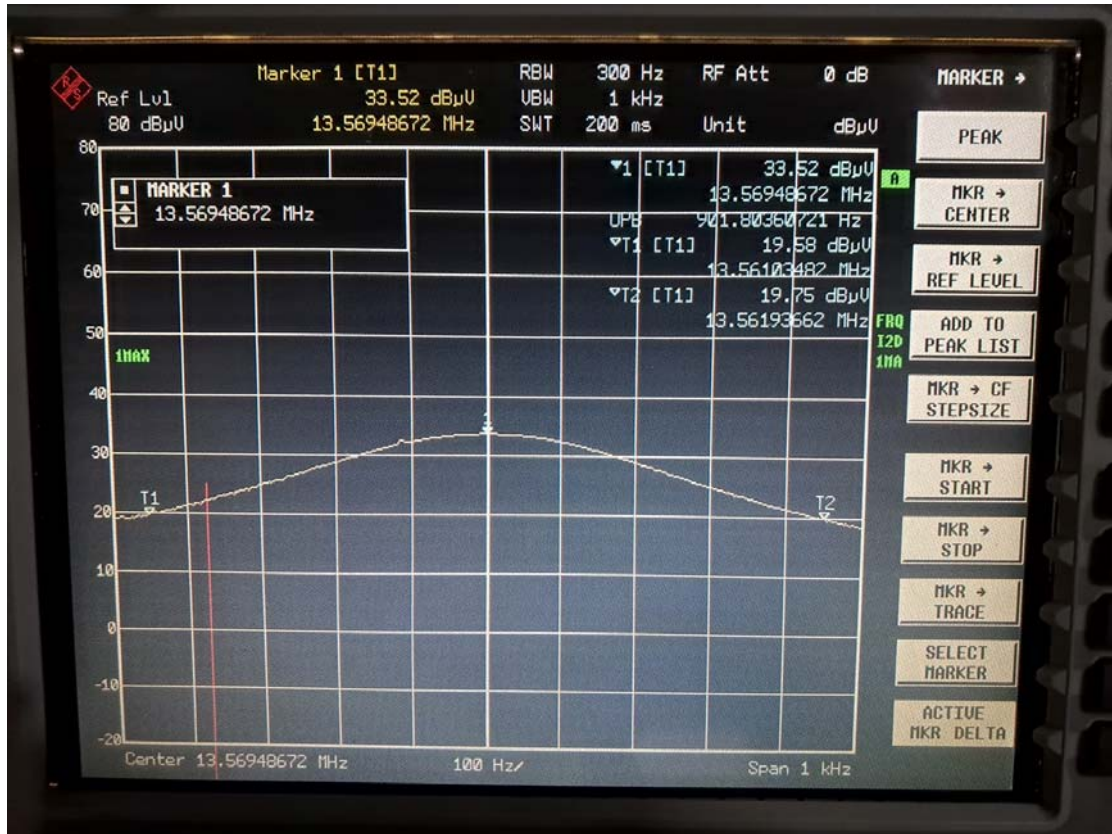

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

3.4 Frequency tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test date: July 31, 2022

Temperature: 24.2 °C

Humidity: 50.0 %


Tester: Ken

Measurement Results:

| Temperature Degrees | Voltage(V d.c.) | Frequency MHz | Frequency deviation kHz | Limit kHz(0.01%) |
|---------------------|-----------------|---------------|-------------------------|------------------|
| 20°C | 10.2 | 13.560272 | 0.849 | 1.356 |
| 20°C | 13.8 | 13.560304 | 0.817 | 1.356 |
| 50°C | 12 | 13.561282 | -0.160 | 1.356 |
| 40°C | 12 | 13.561122 | 0.000 | 1.356 |
| 30°C | 12 | 13.561282 | -0.160 | 1.356 |
| *20°C | 12 | 13.561122 | 0.000 | 1.356 |
| 10°C | 12 | 13.561122 | 0.000 | 1.356 |
| 0°C | 12 | 13.561763 | -0.641 | 1.356 |
| -10°C | 12 | 13.561763 | -0.641 | 1.356 |
| -20°C | 12 | 13.561923 | -0.801 | 1.356 |

*Represent test standard frequency

Test equipment used: ETSTW-RE 055, ETSTW-CE 009



Registration number: W6M22207-21991-C-1

FCC ID: PWQ-GV-RKR1355

3.5 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

| Frequency | Level (dBμV) | |
|-----------|------------------|------------------|
| | quasi-peak | average |
| 150 kHz | lower limit line | Lower limit line |


Note:

1. The formula of measured value as: **Test Result = Reading + Correction Factor**
2. The **Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
3. Detector function in the form : **PK = Peak, QP = Quasi Peak, AV = Average**
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.
6. This test is not required because the EUT is powered by DC.

Limits:

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|----------|
| | Quasi Peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Registration number: W6M22207-21991-C-1
FCC ID: PWQ-GV-RKR1355

Appendix

Measurement diagrams

Radiated Emissions



Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 2022/8/15

Temperature:31.7 °C

142.0 dBuV/m

Time: 上午 10:15:03

Humidity:45.1 %

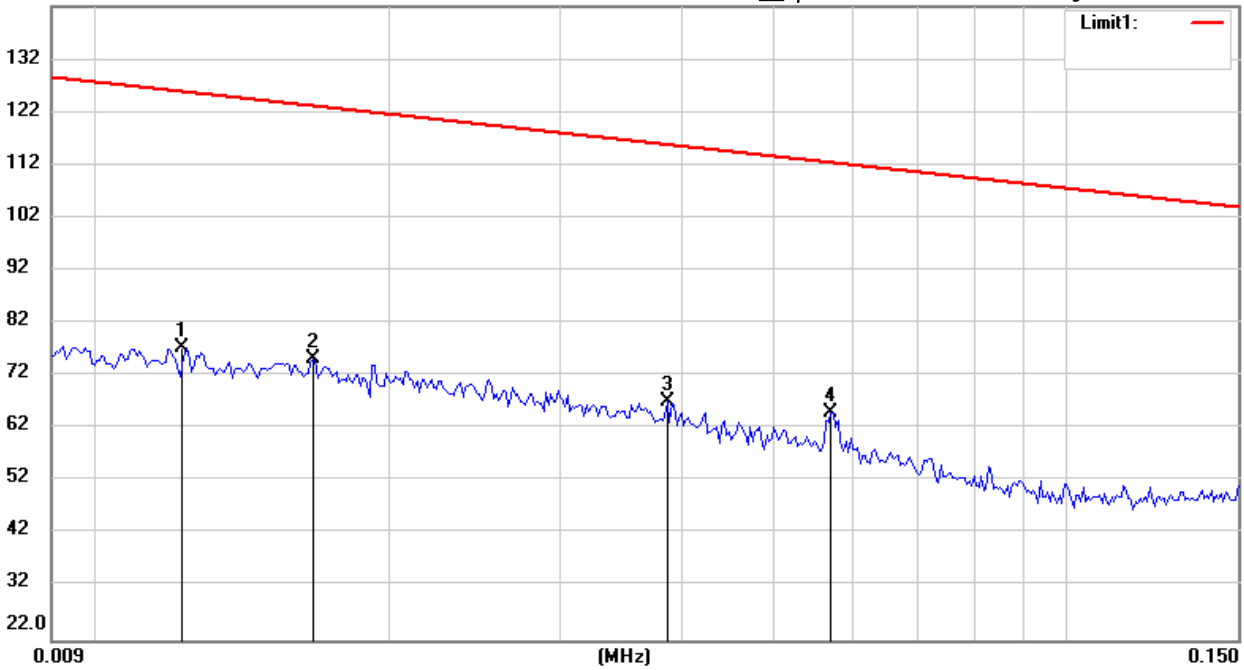

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

Polarization:

EUT : W6M22207-21991

Power : 12 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 13.56MHz

Note :

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| | 0.0123 | -5.83 | peak | 83.05 | 77.22 | 125.80 | 100 | 32 | -48.58 | |
| | 0.0167 | -6.25 | peak | 81.38 | 75.13 | 123.14 | 100 | 106 | -48.01 | |
| | 0.0388 | -7.29 | peak | 74.30 | 67.01 | 115.82 | 100 | 109 | -48.81 | |
| * | 0.0572 | -5.62 | peak | 70.75 | 65.13 | 112.45 | 100 | 224 | -47.32 | |



Radiated Emission Measurement


Operator: Sky

File :2
 122.0 dBuV/m

Data :#1

Date: 2022/8/15
 Time: 上午 10:18:47

Temperature:31.7 °C
 Humidity:45.1 %

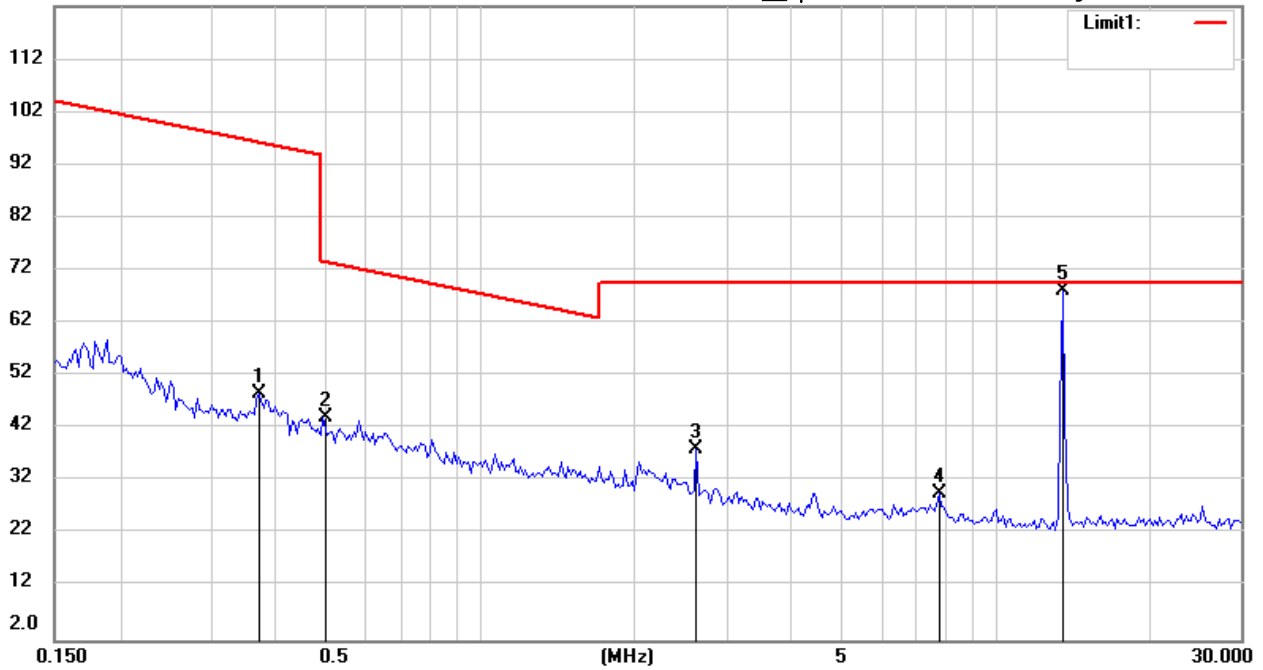

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22207-21991

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 12 Vd.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|----------|
| | 0.3738 | -5.76 | peak | 54.50 | 48.74 | 96.15 | 100 | 3 | -47.41 | |
| | 0.4980 | -7.93 | peak | 51.94 | 44.01 | 73.66 | 100 | 302 | -29.65 | |
| | 2.6371 | -1.48 | peak | 39.71 | 38.23 | 69.54 | 100 | 192 | -31.31 | |
| | 7.7891 | -4.73 | peak | 34.46 | 29.73 | 69.54 | 100 | 106 | -39.81 | |
| * | 13.5293 | 34.53 | peak | 33.76 | 68.29 | 69.54 | | | -1.25 | RF Power |



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#1


Date: 2022/8/4

Temperature:28.7 °C

80.0 dBuV/m

Time: 下午 09:38:13

Humidity:48.8 %

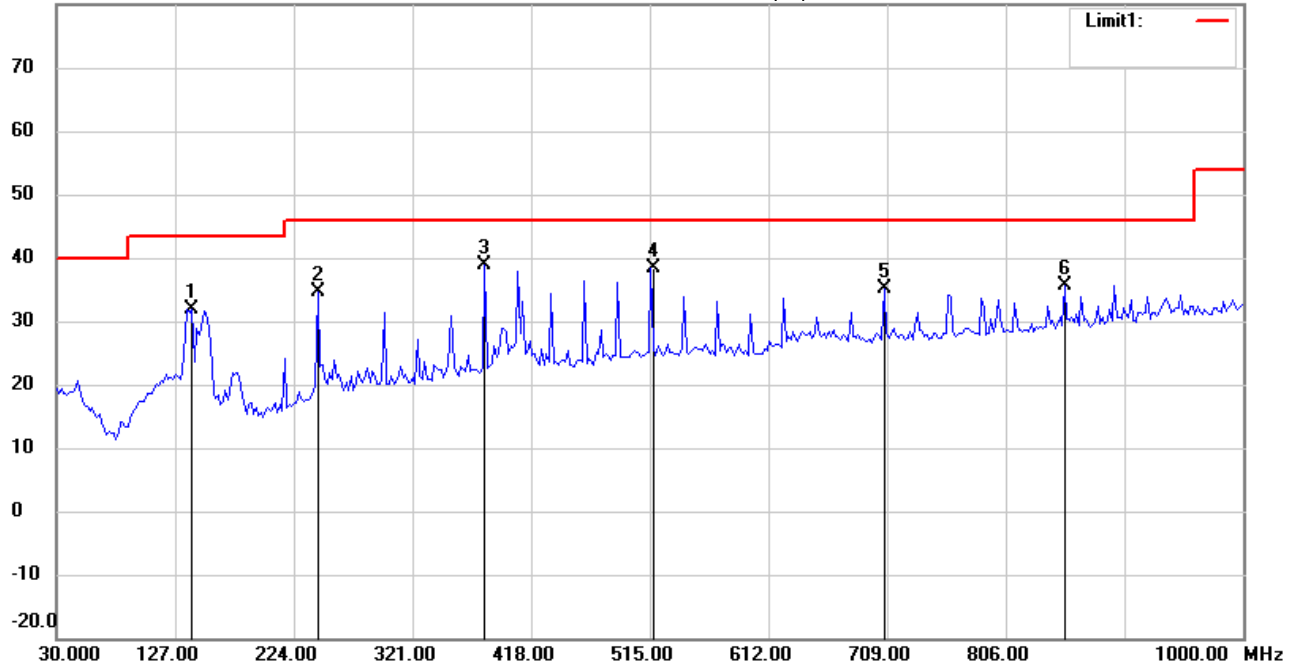

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M22207-21991

Power : 12 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 13.56MHz

Note :

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| | 140.8015 | 38.73 | peak | -6.74 | 31.99 | 43.50 | 102 | 162 | -11.51 | |
| | 243.8276 | 42.66 | peak | -8.00 | 34.66 | 46.00 | 100 | 222 | -11.34 | |
| * | 379.8998 | 43.18 | peak | -4.23 | 38.95 | 46.00 | 100 | 258 | -7.05 | |
| | 515.9720 | 40.90 | peak | -2.51 | 38.39 | 46.00 | 101 | 194 | -7.61 | |
| | 706.4728 | 35.03 | peak | 0.22 | 35.25 | 46.00 | 100 | 30 | -10.75 | |
| | 854.2083 | 32.79 | peak | 2.94 | 35.73 | 46.00 | 101 | 227 | -10.27 | |



Radiated Emission Measurement

Operator: Vincent

File :3

Data :#2


Date: 2022/8/4

Temperature:28.7 °C

80.0 dBuV/m

Time: 下午 09:39:14

Humidity:48.8 %

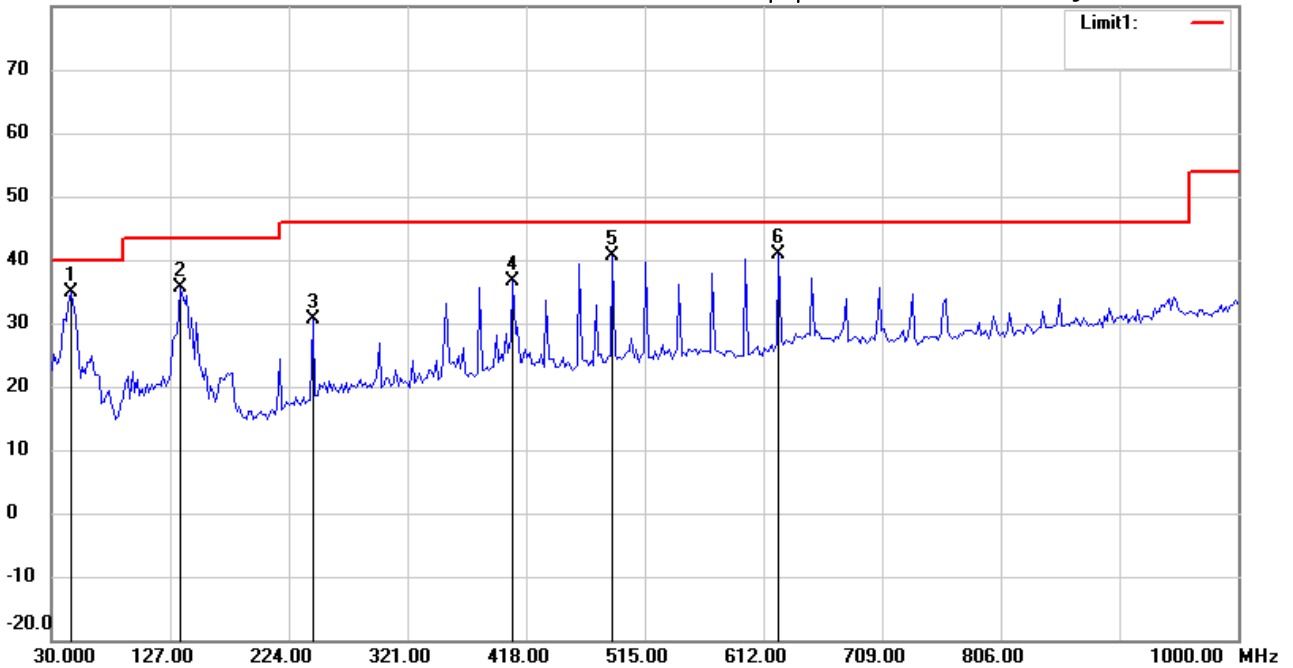

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M22207-21991

Power : 12 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 13.56MHz

Note :

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| * | 45.5510 | 44.19 | peak | -9.42 | 34.77 | 40.00 | 102 | 114 | -5.23 | |
| | 134.9698 | 42.03 | peak | -6.40 | 35.63 | 43.50 | 100 | 160 | -7.87 | |
| | 243.8276 | 38.75 | peak | -8.00 | 30.75 | 46.00 | 100 | 30 | -15.25 | |
| | 407.1141 | 40.48 | peak | -3.74 | 36.74 | 46.00 | 102 | 285 | -9.26 | |
| | 488.7574 | 43.79 | peak | -3.04 | 40.75 | 46.00 | 100 | 119 | -5.25 | |
| | 624.8297 | 41.49 | peak | -0.72 | 40.77 | 46.00 | 101 | 257 | -5.23 | |



Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 2022/8/15

Temperature:31.7 °C

142.0 dBuV/m

Time: 上午 10:16:26

Humidity:45.1 %

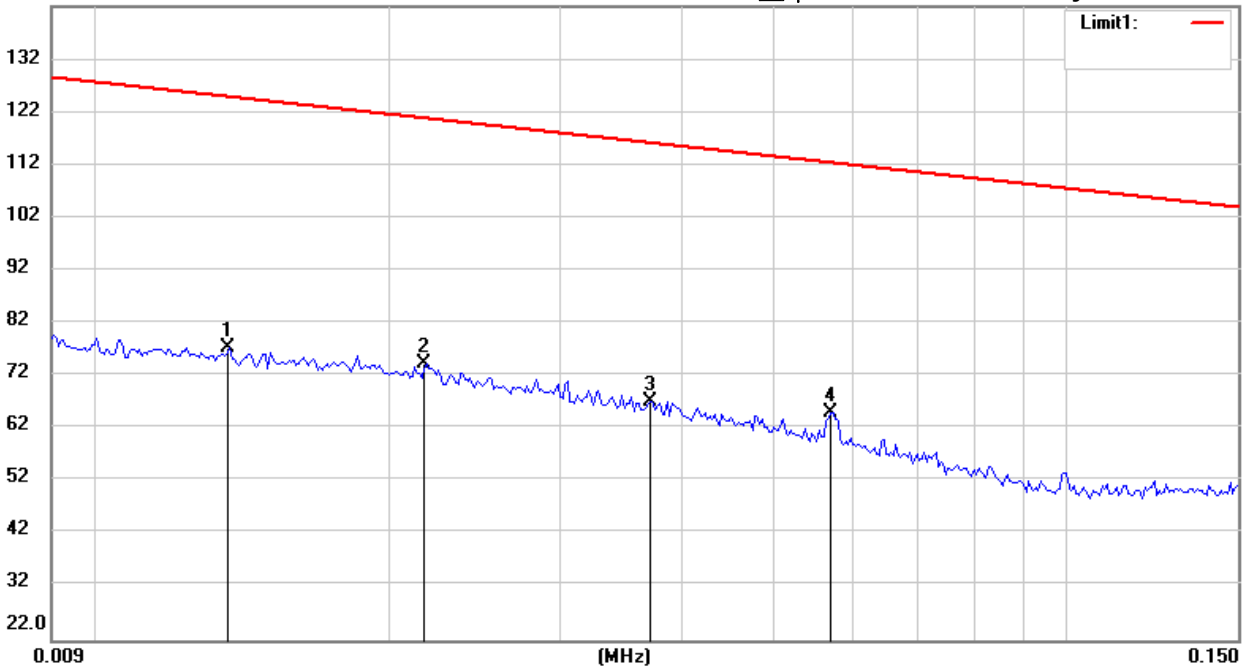

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

Polarization:

EUT : W6M22207-21991

Power : 12 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 13.56MHz

Note :

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| | 0.0137 | -5.32 | peak | 82.52 | 77.20 | 124.86 | 100 | 108 | -47.66 | |
| * | 0.0218 | -5.15 | peak | 79.44 | 74.29 | 120.83 | 100 | 120 | -46.54 | |
| | 0.0372 | -7.53 | peak | 74.67 | 67.14 | 116.19 | 100 | 6 | -49.05 | |
| | 0.0572 | -5.62 | peak | 70.75 | 65.13 | 112.45 | 100 | 93 | -47.32 | |



Radiated Emission Measurement

Operator: Sky

File :2

Data :#1


Date: 2022/8/15

Temperature:31.7 °C

122.0 dBuV/m

Time: 上午 10:19:37

Humidity:45.1 %

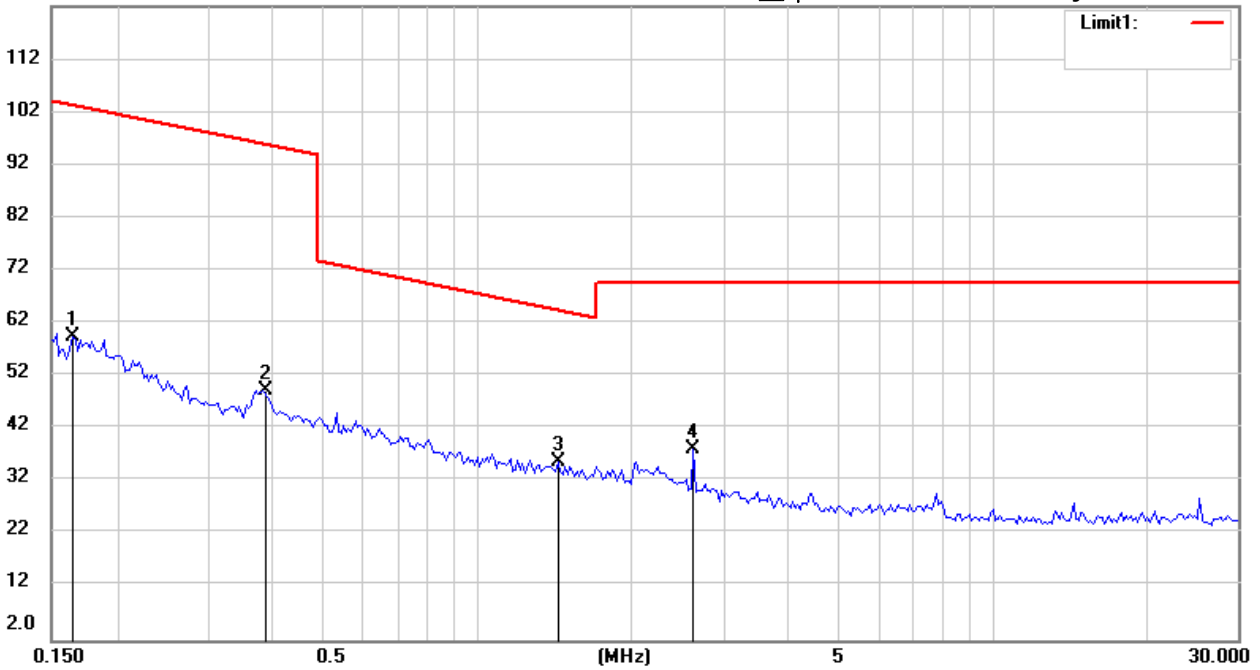

Site : Chamber

Condition : FCC 15.225 RE (3m)(13.56MHz)

EUT : W6M22207-21991

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 12 Vd.c.

Distance: 3m

| Mk. | Frequency (MHz) | Reading (dBuV) | Detector | Corr. factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Ant.Pos (cm) | Tab.Pos (deg.) | Margin (dB) | Comment |
|-----|-----------------|----------------|----------|---------------------|-----------------|----------------|--------------|----------------|-------------|---------|
| | 0.1650 | -2.69 | peak | 62.03 | 59.34 | 103.25 | 100 | 72 | -43.91 | |
| | 0.3860 | -4.92 | peak | 54.25 | 49.33 | 95.87 | 100 | 24 | -46.54 | |
| * | 1.4398 | -8.69 | peak | 44.54 | 35.85 | 64.43 | 100 | 210 | -28.58 | |
| | 2.6371 | -1.48 | peak | 39.71 | 38.23 | 69.54 | 100 | 118 | -31.31 | |