


ENGINEERING TEST REPORT



2.4 GHz FHSS OEM Transceiver Model No.: PKLR2400

FCC ID: KQL-PKLR2400

Applicant: **AEROCOMM INC.**
13256 West, 98th Street
Lenexa, Kansas
USA, 66215

Tested in Accordance With

**FCC Part 15, Subpart C, Para. 15.247
Frequency Hopping Spread Spectrum Transmitters
Operating in Frequency Band from 2402 – 2478 MHz**

UltraTech's File No.: AER20-FTX

This Test report is Issued under the Authority of Tri M. Luu, Professional Engineer, Vice President of Engineering UltraTech Group of Labs	
Date:	
Report Prepared by: Dan Huynh	Tested by: Hien Luu, RFI Technician
Issued Date: August 23, 1999	Test Dates: July 20-28, 1999

The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Telephone (905) 829-1570 Facsimile (905) 829-8050
Website: www.ultratech-labs.com Email: vhk.ultratech@sympatico.ca

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION.....	3
1.1. SCOPE.....	3
1.2. RELATED SUBMITAL(S)/GRANT(S).....	3
1.3. NORMATIVE REFERENCES.....	3
EXHIBIT 2. PERFORMANCE ASSESSMENT	4
2.1. CLIENT INFORMATION.....	4
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	4
2.3. EUT’S TECHNICAL SPECIFICATIONS	5
2.4. LIST OF EUT’S PORTS.....	5
2.5. ANCILLARY EQUIPMENT.....	6
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	7
3.1. CLIMATE TEST CONDITIONS.....	7
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS.....	7
EXHIBIT 4. SUMMARY OF TEST RESULTS.....	8
4.1. LOCATION OF TESTS	8
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	8
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	8
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS.....	9
5.1. TEST PROCEDURES	9
5.2. MEASUREMENT UNCERTAINTIES.....	9
5.3. MEASUREMENT EQUIPMENT USED:	9
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:	9
5.5. AC POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPART B, PARA.15.107(A).....	10
5.6. HOPPING CHANNEL CARRIER FREQUENCY CHARACTERISTICS @ FCC CFR 47, PARA 15.247(A)(1) & (A)(1)(II) 11	
5.6.1. <i>Limits</i>	11
5.6.2. <i>Method of Measurements</i>	11
5.6.3. <i>Test Arrangement</i>	11
5.6.4. <i>Test Equipment List</i>	11
5.6.5. <i>Test data</i>	12
5.6.6. <i>Plots</i>	12
5.6.7. <i>Photographs of Test Setup</i>	12
5.7. MAXIMUM PEAK OUTPUT POWER @ FCC 15.247(B) AND RF EXPOSURE LIMIT FCC 1.1310.....	13
5.7.1. <i>Limits</i>	13
5.7.2. <i>Method of Measurements</i>	13
5.7.3. <i>Test Arrangement</i>	14
5.7.4. <i>Test Equipment List</i>	14
5.7.5. <i>Test data</i>	14
5.7.6. <i>Photographs of Test Setup</i>	16
5.7.7. <i>Plots</i>	16
5.8. TRANSMITTER ANTENNA CONDUCTED EMISSIONS, FCC CFR 47, PARA. 15.247	17
5.8.1. <i>Limits</i>	17
5.8.2. <i>Method of Measurements</i>	17
<i>Test Arrangement</i>	17

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.4. Test Equipment List 17
5.8.5. Test Data 17
5.8.6. Plots 18
5.8.7. Photographs of Test Setup 18
5.9. TRANSMITTER RADIATED EMISSIONS @ 3 METERS, FCC CFR 47, PARA. 15.247(C), 15.209 & 15.205 19
5.9.1. Limits 19
5.9.2. Method of Measurements 20
5.9.3. Test Arrangement 21
5.9.4. Test Equipment List 21
5.9.5. Test data 22
5.9.6. Plots 43
5.9.7. Photographs of Test Setup 43
EXHIBIT 6. MEASUREMENT UNCERTAINTY 44
6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY 44
6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY 45
EXHIBIT 7. MEASUREMENT METHODS 46
7.1. GENERAL TEST CONDITIONS 46
7.1.1. Test Conditions 46
7.1.2. Method of Measurements - AC Mains Conducted Emissions 46
7.1.3. Method of Measurements - Electric Field Radiated Disturbance 50
EXHIBIT 8. FCC FORM 731, APPLICANT’S LETTERS & STATEMENT 54
8.1. FCC FORM 731 54
8.2. APPLICANT’S AUTHORIZATION TO APPOINT ULTRATECH ENGINEERING LABS INC. TO ACT AS AN AGENT 54
8.3. LETTER REQUEST FOR FCC CONFIDENTIALITY FILING 54
8.4. DESCRIPTION OF THE FREQUENCY HOPPING METHOD 54
8.5. OEM RADIO BOM 54
8.6. BLOCK DIAGRAM OF PROPRIETARY MMCX ANTENNA CONNECTOR 54
EXHIBIT 9. FCC ID LABEL & SKETCH OF LABEL LOCATION 55
EXHIBIT 10. “FCC INFORMATION TO USER” 56
EXHIBIT 11. PHOTOGRAPHS OF TEST SETUP 57
EXHIBIT 12. PHOTOGRAPHS OF EQUIPMENT UNDER TEST 58
EXHIBIT 13. SYSTEM BLOCK DIAGRAM(S) & SCHEMATIC DIAGRAMS 59
EXHIBIT 14. USER’S MANUAL 60
EXHIBIT 15. TEST RESULTS PLOTS 61
EXHIBIT 15A. 20 dB BANDWIDTH AND AVERAGE TIME OF OCCUPANCY 61
EXHIBIT 15B. TRANSMITTER CONDUCTED EMISSIONS 62
EXHIBIT 15C. TRANSMITTER RADIATED EMISSIONS 63

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Section 15.247: 1998
Title	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Certification Authorization for Frequency Hopping Spread Spectrum Transmitters operating in the Frequency Band 2400 - 2483.5 MHz .
Test Procedures	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	<ul style="list-style-type: none"> • Light-industry, Commercial • Industry

1.2. RELATED SUBMITAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Note: When the international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

Publication	YEAR	Title
FCC CFR Parts 0-19	1998	Code of Federal Regulations – Telecommunication
ANSI C63.4	1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1		Specification for Radio Disturbance and Immunity measuring apparatus and methods

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT:	
Name:	AEROCOMM INC.
Address:	13256 West, 98th Street Lenexa, Kansas USA, 66215
Contact Person:	Mr. Daniel A. Miller Phone #: (800)492-2320 or (913)492-2320 Fax #: (913)492-1243 Email Address: N/A

MANUFACTURER:	
Name:	AEROCOMM INC.
Address:	13256 West, 98th Street Lenexa, Kansas USA, 66215
Contact Person:	Mr. Daniel A. Miller Phone #: (913)492-2320 Fax #: (913)492-1243 Email Address: N/A

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name	AEROCOMM INC.
Product Name	2.4 GHz FHSS OEM Transceiver
Model Name or Number	PKLR2400
Serial Number	Pre-production
Type of Equipment	Frequency Hopping Spread Spectrum Transmitters
External Power Supply	N/A
Transmitting/Receiving Antenna Type	Non-integral
Primary User Functions of EUT:	2.4 GHz FHSS Radio operate in transparent and packet modes.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable, mobile and fixed stations
Intended Operating Environment:	Commercial, light industry & heavy industry
Power Supply Requirement:	5VDC
RF Output Power Rating:	10 mW peak
Operating Frequency Range:	2402 - 2478 MHz
RF Output Impedance:	50 Ohms
Channel Spacing:	1 MHz
Duty Cycle:	Continuous
20 dB Bandwidth:	1 MHz
Emission Designation:	Frequency Hopping Spread Spectrum
Oscillator Frequencies:	2402-2478 MHz
Antenna Connector Type:	MMCX

Antenna Description					
The following items are alternative antennas, which will be provided with EUT.					
Manufacturer	Type	Model	Frequency Range (GHz)	In/Out Impedance (Ω)	Gain (dBi)
CENTURION	Omni	WXE2400	2.4-2.5	50	2
MAXRAD	Omni	MFB24008	2.4-2.4835	50	8
MAXRAD	Omni-Mobile	BMMG24000MMCX6'	2.4	50	unity
MAXRAD	Omni-Mobile	BMMG24000RPSMA12'	2.4	50	5
AeroComm	Omni	NZH2400	2.4	50	unity
MAXRAD	Panel	MP24013FC	2.4-2.4835	50	13
MAXRAD	Omni-Mobile	MUF24005	2.4	50	5

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Antenna	1	MMCX	Shielded
2	COM	1	DB9	Shielded
3	DC Connector	1	DC Jack	Non-shielded

NOTE:

- *Ports of the EUT which in normal operation were connected to ancillary equipment through interconnecting cables via a representative interconnecting cable to simulate the input/output characteristics. RF input/output was correctly terminated to the associated antenna.*
- *Ports which are not connected to cables during normal intended operation: None*

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	OMNIBOOK Laptop
Brand name:	Hewlett Packard
Model Name or Number:	DN-2100
Serial Number:	TW63403246
Connected to EUT's Port:	Serial Port

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	101 kPa
Power input source:	5VDC

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	<ul style="list-style-type: none"> ▪ Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. ▪ The EUT operates in normal frequency hopping mode for occupancy duration, and frequency separation.
Special Test Software:	<ul style="list-style-type: none"> ▪ Special software is provided by the Applicant to select and operate the EUT at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
Special Hardware Used:	A class 2 transformer was used to provide 5Vdc to the radio for modular radio test purposes. In normal application, the radio will use 5Vdc power from the system in which it will be installed.
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as a non-integral antenna equipment.

Transmitter Test Signals:	
Frequencies:	Center of each of frequency bands that the transmitter covers:
<ul style="list-style-type: none"> ▪ 2402 - 2478 MHz band: 	<ul style="list-style-type: none"> ▪ 2402 MHz, 2443 MHz and 2478 MHz
Transmitter Wanted Output Test Signals:	
<ul style="list-style-type: none"> ▪ RF Power Output (measured maximum output power): ▪ Normal Test Modulation ▪ Modulating signal source: 	<ul style="list-style-type: none"> ▪ 10 mW Peak Direct or 39 mW EIRP max. ▪ Each channel is FSK modulated with data @ 441 Kbps ▪ Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Sep. 20, 1998.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	APPLICABILITY (YES/NO)
15.107(a)	AC Power Line Conducted Emissions Measurements (Transmit & Receive)	Not applicable for DC supplied device.
15.247(a)(1) & 15.247(a)(1)(ii)	Hopping Channel Frequency Characteristics	Yes
15.247(b)(2) & 1.1310	Peak Output Power and RF Exposure Limit	Yes
15.247(c)	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
15.247(c), 15.209 & 15.205	Transmitter Radiated Emissions	Yes

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 7 of this report

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 6 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C64-3:1992, FCC 15.247 and CISPR 16-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

5.5. AC POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPART B, PARA.15.107(A)

Not applicable for DC supplied device.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

5.6. HOPPING CHANNEL CARRIER FREQUENCY CHARACTERISTICS @ FCC CFR 47, PARA 15.247(A)(1) & (A)(1)(II)


5.6.1. Limits

- **FCC CFR 47, Para 15.247(a)(1)**:- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
- **FCC CFR 47, Para 15.247(a)(1)(ii)**:- Frequency hopping systems operating in the 2400 - 2483.5 MHz and 5725-5850 MHz bands shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

5.6.2. Method of Measurements

Refer to FCC 15.247(a)(1) & ANSI C63-4:1992

5.6.3. Test Arrangement



5.6.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Microwave Amplifier	Hewlett Packard	83017A	..	1 GHz – 26.5 GHz 34-38 dB gain
Horn Antenna	EMCO	3115	9701-5061	1 – 18 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6.5. Test data

Test Description	FCC Specification	Measured Values	Comments
Channel Hopping Frequency Separation	minimum of 25 KHz or 20dB BW whichever is greater.	1 MHz	Pass
Channel frequency hopping method	See Note (1)	Refer to the manufacturer's description of the frequency hopping method in Exhibit 8 of this report.	Nil.
Number hopping frequencies	75 minimum	77 channels starting from 2402 MHz to 2478 MHz	Pass
20 dB BW of the hopping channel	1 MHz maximum	1 MHz	Pass
Average Time of Occupancy	0.4 seconds max. within 30 seconds period	0.388 seconds within 30 seconds period	Pass

Note (1):- The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals

5.6.6. Plots

Please refer to EXHIBIT 15A.

5.6.7. Photographs of Test Setup

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. MAXIMUM PEAK OUTPUT POWER @ FCC 15.247(B) AND RF EXPOSURE LIMIT FCC 1.1310

5.7.1. Limits

- **FCC 15.247(b)(1):** Maximum peak output power of the transmitter shall not exceed 1 Watt.
- **FCC 15.247(b)(3):** If the antenna of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- **FCC 15.247(b)(3)(i):** Systems operating in the 2400 - 2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduce by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi..
- **FCC 1.1310:-** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Control Exposures				
300-1500	F/300	6
1500-100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
300-1500	F/1500	6
1500-100,000	1.0	30

F = Frequency in MHz

5.7.2. Method of Measurements

Refer to FCC 15.247(b)(1)&(3), ANSI C63-4:1992, FCC @ 1.1310 & OST Bulletin No. 65-October 1985

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW
 EIRP: Equivalent (effective) isotropic radiated power.
 S: power density mW/cm²
 G: numeric gain of antenna relative to isotropic radiator
 r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{PG/4\pi S}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.3. Test Arrangement



5.7.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Peak Power Meter & Peak Power Sensor	Hewlett Packard	8900 8481A	2131A00124 2551A01965	0.1-18 GHz 50 Ohms Input
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

5.7.5. Test data

5.7.5.1. DIRECT PEAK POWER MEASUREMENTS AT THE ANTENNA TERMINAL

TRANSMITTER CHANNEL OUTPUT	FUNDAMENTAL FREQUENCY (MHz)	DATA RATE/ MODULATION	MEASURED PEAK TOTAL POWER @ ANTENNA TERMINAL (mW)	PEAK POWER LIMIT (mW)
Lowest	2402	FSK @ 441Kbps	10	1000
Middle	2443	FSK @ 441Kbps	8.5	1000
Highest	2478	FSK @ 441Kbps	8.1	1000

5.7.5.2. EFFECTIVE ISOTROPIC RADIATED POWER (EIRP) MEASURED AT 3 METER DISTANCE

(Substitution Method)

Test Configuration # 1: 2.4GHz FHSS OEM Transceiver with Centurion WXE2400 External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	2	105.38	0.007	0.72
2443	FSK @ 441Kbps	2	107.78	0.011	0.95
2478	FSK @ 441Kbps	2	106.22	0.008	0.80

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Test Configuration # 2: 2.4GHz FHSS OEM Transceiver with Maxrad MFB24008 External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	8	117.56	0.027	1.47
2443	FSK @ 441Kbps	8	118.75	0.036	1.68
2478	FSK @ 441Kbps	8	117.22	0.025	1.41

Test Configuration # 3: 2.4GHz FHSS OEM Transceiver with Maxrad BMMG24000MMCX6' External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	unity	108.63	0.022	1.32
2443	FSK @ 441Kbps	unity	111.09	0.039	1.75
2478	FSK @ 441Kbps	unity	109.19	0.025	1.41

Test Configuration # 4: 2.4GHz FHSS OEM Transceiver with Maxrad BMMG24000RPSMA12' External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	5	107.03	0.005	0.62
2443	FSK @ 441Kbps	5	109.94	0.009	0.86
2478	FSK @ 441Kbps	5	111.56	0.014	1.04

Test Configuration # 5: 2.4GHz FHSS OEM Transceiver with AEROCOMM NZH2400 External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	unity	107.97	0.019	1.22
2443	FSK @ 441Kbps	unity	108.97	0.024	1.37
2478	FSK @ 441Kbps	unity	108.97	0.024	1.37

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Test Configuration # 6: 2.4GHz FHSS OEM Transceiver with Maxrad MP24013FC External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	13	109.09	0.001	0.31
2443	FSK @ 441Kbps	13	111.44	0.002	0.41
2478	FSK @ 441Kbps	13	109.59	0.001	0.33

Test Configuration # 7: 2.4GHz FHSS OEM Transceiver with Maxrad MUF24005 External Antenna

CHANNEL FREQUENCY (MHz)	DATA RATE / MODULATION	Tx Antenna Gain (dBi)	Max. Field Strength Level @ 1 MHz BW At 3 m (dBuV/m)	EIRP Power (Watts)	(Note 1) Min. Allowable Distance @ from Skin (Centi-Meter)
2402	FSK @ 441Kbps	5	113.06	0.019	1.24
2443	FSK @ 441Kbps	5	107.72	0.006	0.67
2478	FSK @ 441Kbps	5	108.44	0.007	0.73

Note (1):

RF EXPOSURE DISTANCE LIMITS: $r = (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2}$

Since the power density of 1 mW/cm² is at a very short distance from the radiating antenna and due to very low operating RF power required, the RF exposure limit warning or SAR tests are not necessary.

5.7.6. Photographs of Test Setup

None

5.7.7. Plots

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. TRANSMITTER ANTENNA CONDUCTED EMISSIONS, FCC CFR 47, PARA. 15.247


5.8.1. Limits

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power.

5.8.2. Method of Measurements

Refer to FCC 15.247(c) & ANSI C63-4:1992

5.8.3. Test Arrangement

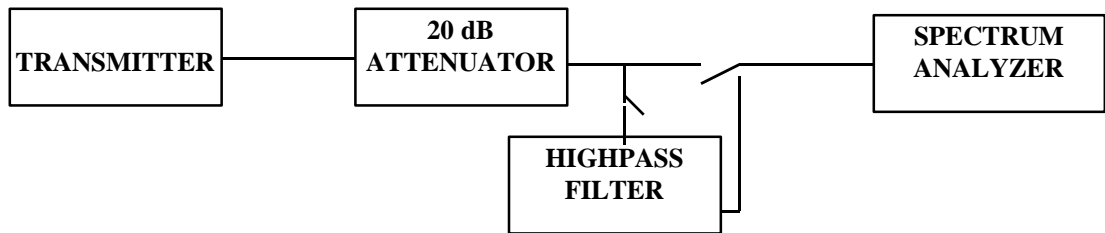

5.8.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz

5.8.5. Test Data

5.8.5.1. Lowest Frequency (2402 MHz)

There were no significant signal found from the frequency range of 10MHz to 25GHz.

5.8.5.2. Middle Frequency (2441MHz)

There were no significant signal found from the frequency range of 10MHz to 25GHz.

5.8.5.3. Highest Frequency (2478 MHz)

There were no significant signal found from the frequency range of 10MHz to 25GHz.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.6. Plots

Please refer to EXHIBIT 15B

5.8.7. Photographs of Test Setup

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

5.9. TRANSMITTER RADIATED EMISSIONS @ 3 METERS, FCC CFR 47, PARA. 15.247(C), 15.209 & 15.205

5.9.1. Limits

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in @ 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in @ 15.205(a) shall not exceed the general radiated emission limits specified in @ 15.209(a)

Remarks:

- Applies to harmonics/spurious emissions that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209.
- @ **FCC CFR 47, Para. 15.237(c)** - The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in @**15.35** for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) - Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	162.0125 - 167.17	2310 - 2390	9.3 - 9.5
0.49 - 0.51	167.72 - 173.2	2483.5 - 2500	10.6 - 12.7
2.1735 - 2.1905	240 - 285	2655 - 2900	13.25 - 13.4
8.362 - 8.366	322 - 335.4	3260 - 3267	14.47 - 14.5
13.36 - 13.41	399.9 - 410	3332 - 3339	14.35 - 16.2
25.5 - 25.67	608 - 614	3345.8 - 3358	17.7 - 21.4
37.5 - 38.25	960 - 1240	3600 - 4400	22.01 - 23.12
73 - 75.4	1300 - 1427	4500 - 5250	23.6 - 24.0
108 - 121.94	1435 - 1626.5	5350 - 5460	31.2 - 31.8
123 - 138	1660 - 1710	7250 - 7750	36.43 - 36.5
149.9 - 150.05	1718.8 - 1722.2	8025 - 8500	Above 38.6
156.7 - 156.9	2200 - 2300	9000 - 9200	

FCC CFR 47, Part 15, Subpart C, Para. 15.209(a)

-- Field Strength Limits within Restricted Frequency Bands --

FREQUENCY (MHz)	FIELD STRENGTH LIMITS (microvolts/m)	DISTANCE (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.2. Method of Measurements

Refer to ANSI 63.4-1992, Para. 8 for detailed radiated emissions measurement procedures.

Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.

For measurement below 1 GHz, set RBW = 100 KHz, VBW \geq 100 KHz, SWEEP=AUTO.

For measurement above 1 GHz, set RBW = 1 MHz, VBW = 1 MHz (Peak) & VBW = 10 Hz (Average), SWEEP=AUTO.

If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated

The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.993 - Field Strength Spurious Emissions

- (a) Measurements was made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 1 GHz, an Open Field Test is normally required, with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25 MHz
 - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
 - (4) Other types of equipment as required, when deemed necessary by the commission.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.3. Test Arrangement

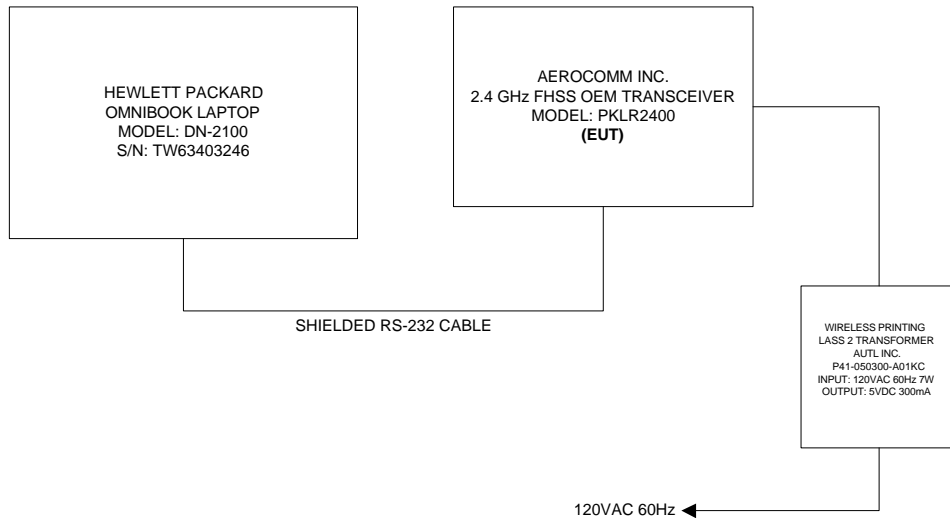

5.9.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Advantest	R3271	15050203	100 Hz to 32 GHz with external mixer for frequency above 32 GHz
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-09	..	18 GHz – 26.5 GHz
Horn Antenna	EMCO	3160-10	..	26.5 GHz – 40 GHz
Mixer	Tektronix	118-0098-00	..	18 GHz – 26.5 GHz
Mixer	Tektronix	119-0098-00	..	26.5 GHz – 40 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5. Test data


REMARK: ** Indicate that the frequency are the restricted band

5.9.5.1. Test Configuration # 1: 2.4GHz FHSS OEM Transceiver with Centurion WXE2400 External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2402.0	105.38	--	V	54.0	85.4	--	--
2402.0	102.47	--	H	54.0	85.4	--	--
4804.0	59.41	52.38	V	54.0	85.4	-1.6	**PASS
4804.0	53.72	43.94	H	54.0	85.4	-10.1	**PASS
7206.0	58.42	48.85	V	54.0	85.4	-36.6	PASS
7206.0	54.13	43.84	H	54.0	85.4	-41.6	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

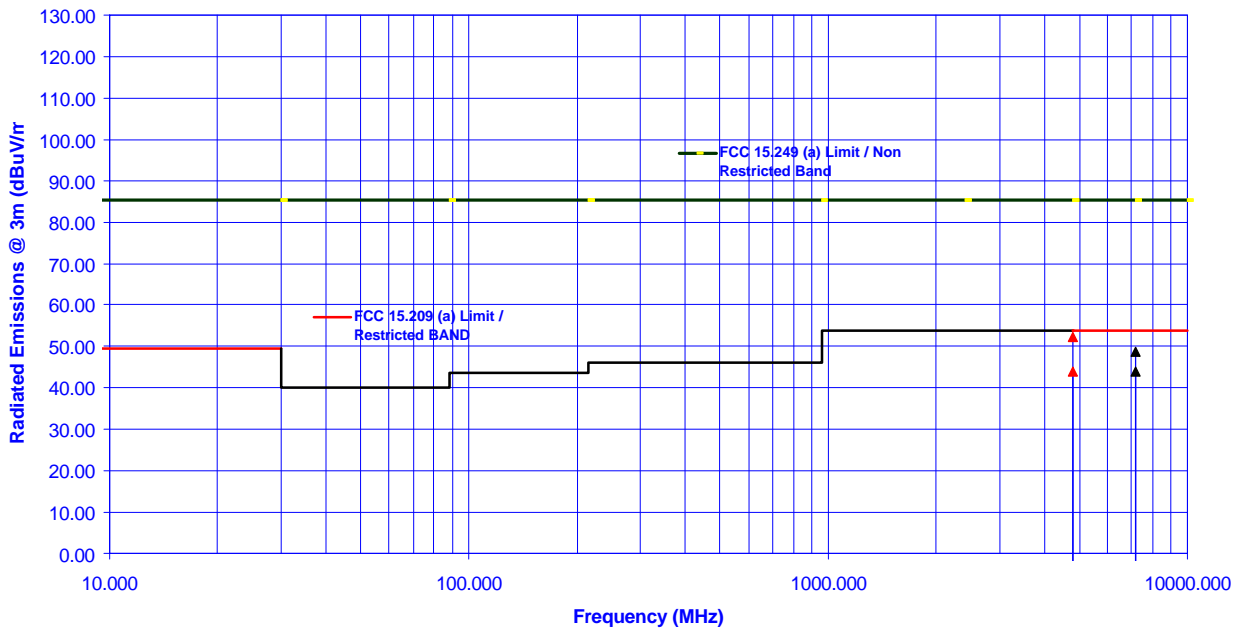

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	107.78	--	V	54.0	--	--	--
2443.0	104.47	--	H	54.0	--	--	--
4886.0	51.72	41.59	V	54.0	87.8	-12.4	**PASS
4886.0	52.41	42.09	H	54.0	87.8	-11.9	**PASS
7329.0	55.72	45.94	V	54.0	87.8	-41.9	PASS
7329.0	54.94	44.13	H	54.0	87.8	-43.7	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz HFSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2443 MHz

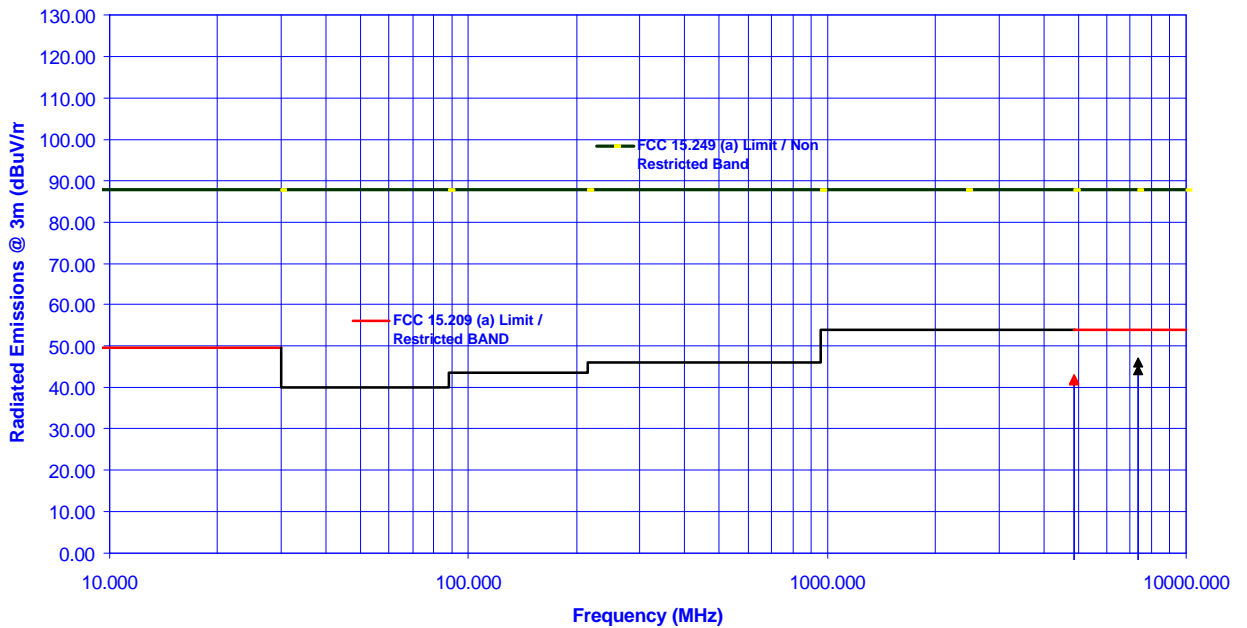

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	106.22	--	V	54.0	--	--	--
2478.0	102.69	--	H	54.0	--	--	--
4956.0	51.98	42.00	V	54.0	86.2	-12.0	**PASS
4956.0	52.03	40.56	H	54.0	86.2	-13.4	**PASS
7434.0	60.53	49.81	V	54.0	86.2	-4.2	**PASS
7434.0	55.63	46.00	H	54.0	86.2	-8.0	**PASS

The emissions were scanned from 100 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz HFSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

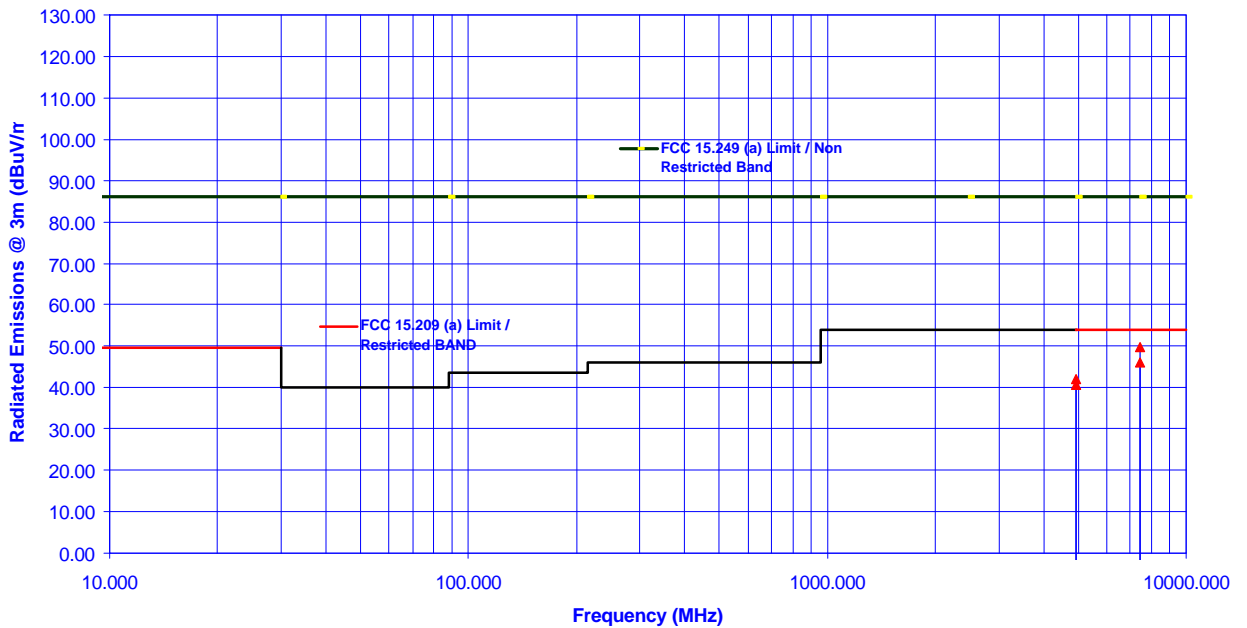

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.2. Test Configuration # 2: 2.4GHz FHSS OEM Transceiver with Maxrad – MFB24008 External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2402.0	117.56	--	V	54.0	--	--	--
2402.0	99.47	--	H	54.0	--	--	--
4804.0	58.81	51.78	V	54.0	97.6	-2.2	**PASS
4804.0	53.00	44.00	H	54.0	97.6	-10.0	**PASS
7206.0	56.19	46.13	V	54.0	97.6	-51.4	PASS
7206.0	53.56	43.88	H	54.0	97.6	-53.7	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 50 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

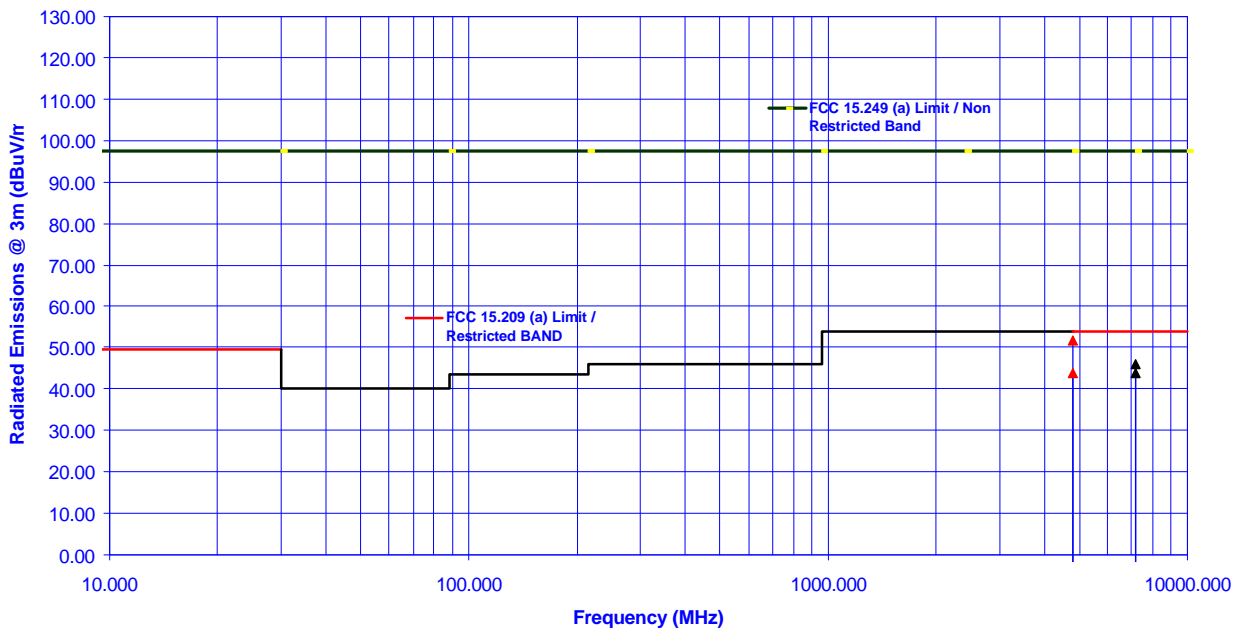

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	118.75	--	V	54.0	--	--	--
2443.0	100.41	--	H	54.0	--	--	--
4886.0	55.91	47.50	V	54.0	98.8	-6.5	**PASS
4886.0	53.44	43.34	H	54.0	98.8	-10.7	**PASS
7329.0	54.81	44.09	V	54.0	98.8	-54.7	PASS
7329.0	54.53	43.88	H	54.0	98.8	-54.9	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 50 dB below the permissible value were recorded.

**Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2443 MHz**

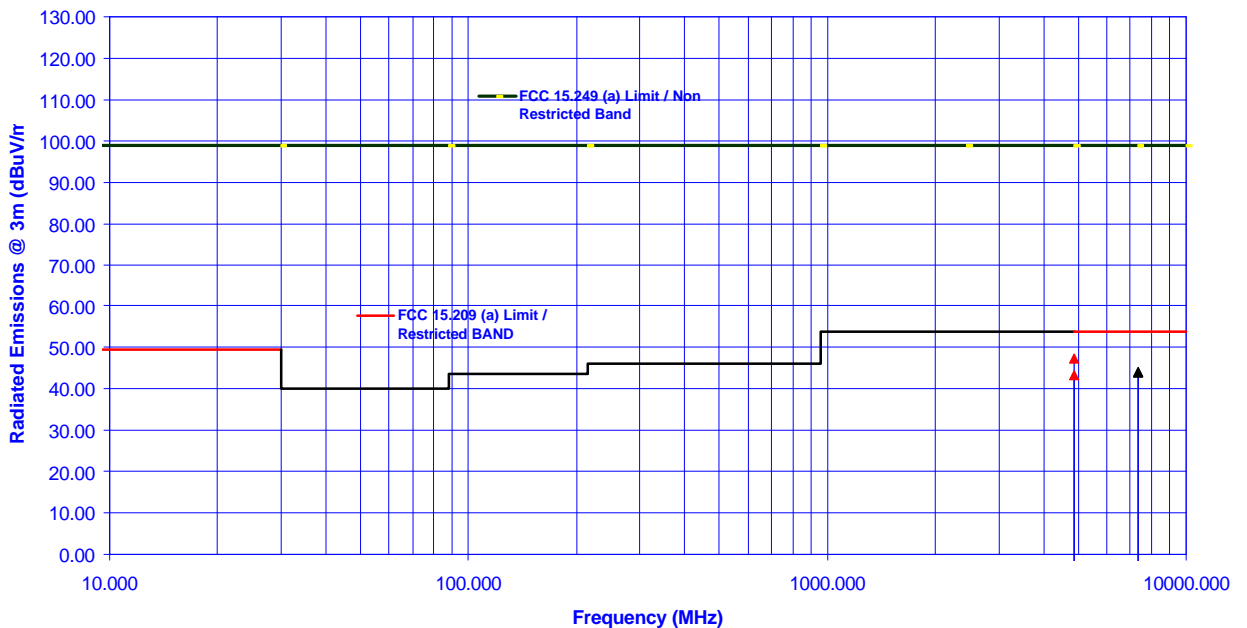

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	117.22	--	V	54.0	--	--	--
2478.0	100.94	--	H	54.0	--	--	--
4956.0	56.95	49.88	V	54.0	97.2	-4.1	**PASS
4956.0	55.09	46.19	H	54.0	97.2	-7.8	**PASS
7434.0	60.88	50.81	V	54.0	97.2	-3.2	**PASS
7434.0	60.34	49.94	H	54.0	97.2	-4.1	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

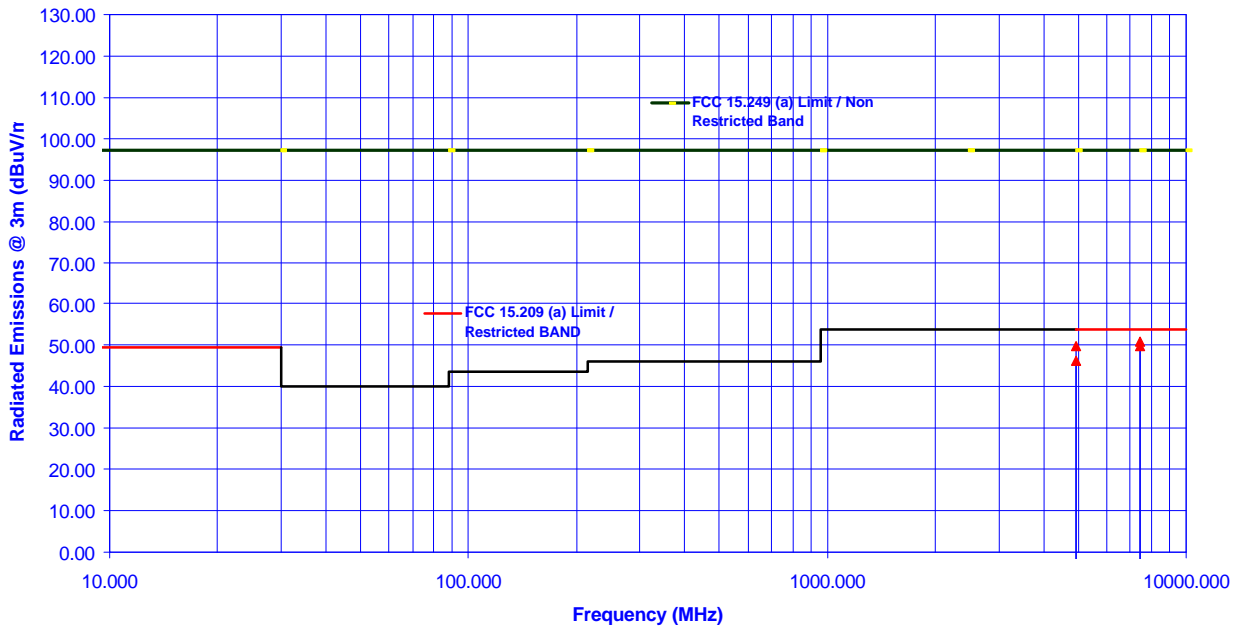

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.3. Test Configuration # 3: 2.4GHz FHSS OEM Transceiver with Maxrad – BMMG2400MMCX6’
 External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2402.0	108.63	--	V	54.0	--	--	--
2402.0	102.28	--	H	54.0	--	--	--
4804.0	57.66	49.88	V	54.0	88.6	-4.1	**PASS
4804.0	55.94	47.06	H	54.0	88.6	-6.9	**PASS
7206.0	54.13	44.44	V	54.0	88.6	-44.2	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

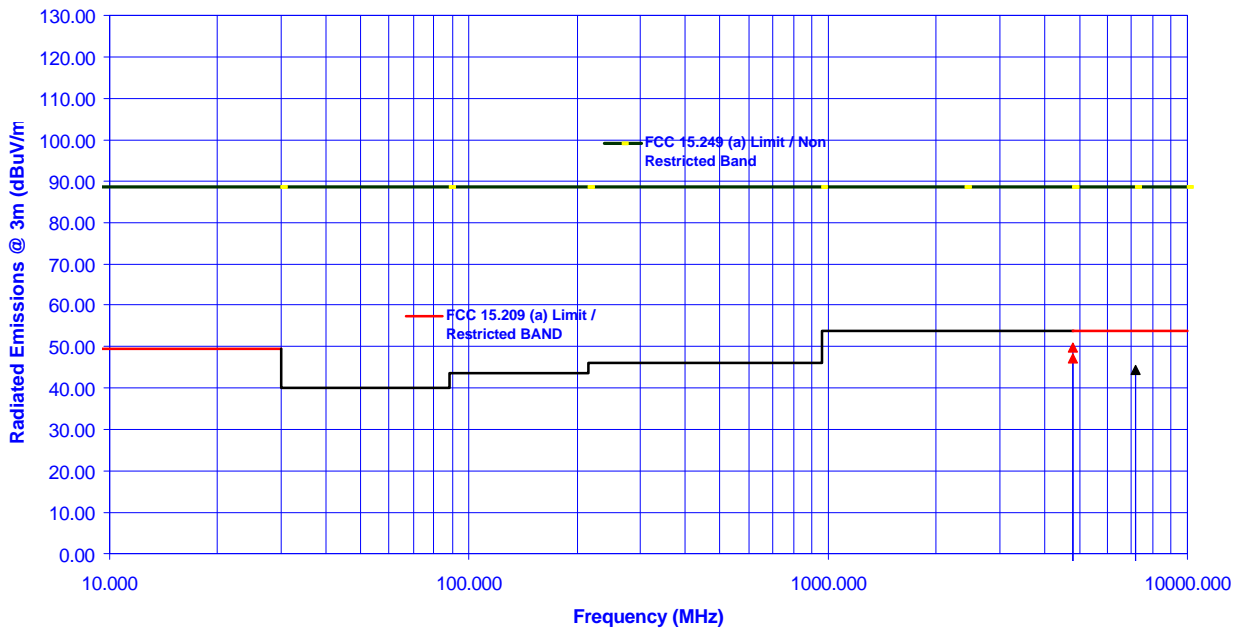

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	111.09	--	V	54.0	--	--	--
2443.0	103.88	--	H	54.0	--	--	--
4886.0	54.69	46.28	V	54.0	91.1	-7.7	**PASS
4886.0	53.16	43.78	H	54.0	91.1	-10.2	**PASS
7329.0	54.38	44.34	V	54.0	91.1	-46.8	PASS
7329.0	53.72	43.81	H	54.0	91.1	-47.3	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz HFSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2443 MHz

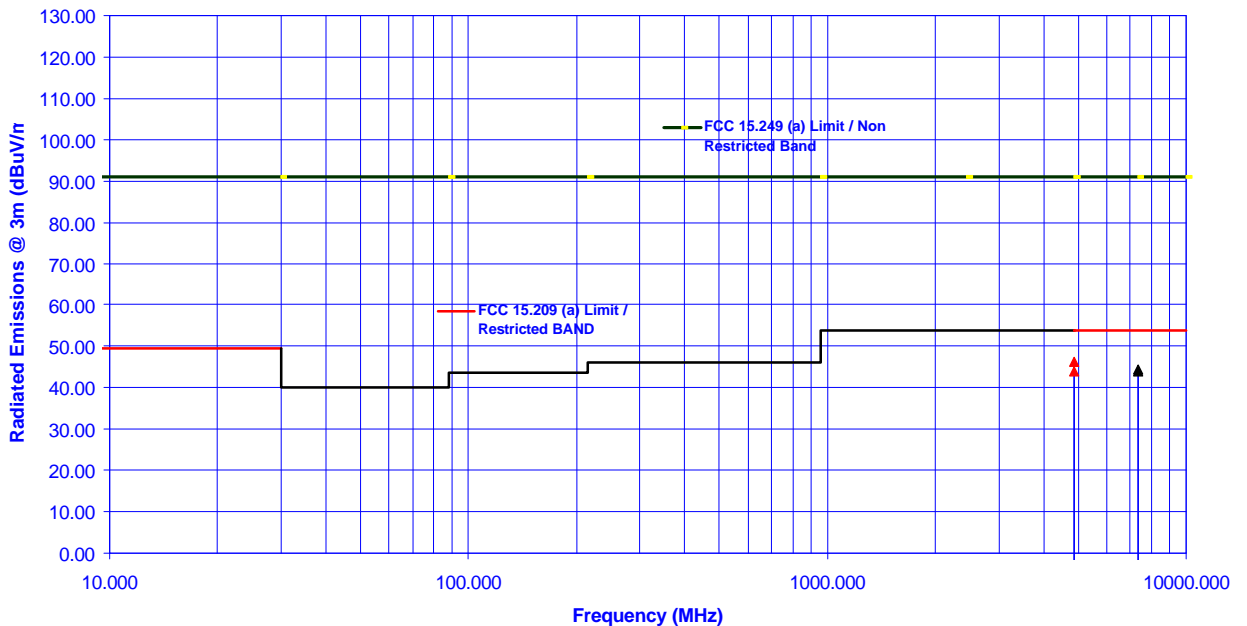

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	109.19	--	V	54.0	--	--	--
2478.0	102.91	--	H	54.0	--	--	--
4956.0	56.28	49.69	V	54.0	89.2	-4.3	**PASS
4956.0	53.63	44.31	H	54.0	89.2	-9.7	**PASS
7434.0	55.69	45.84	V	54.0	89.2	-8.2	**PASS
7434.0	56.25	46.16	H	54.0	89.2	-7.8	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

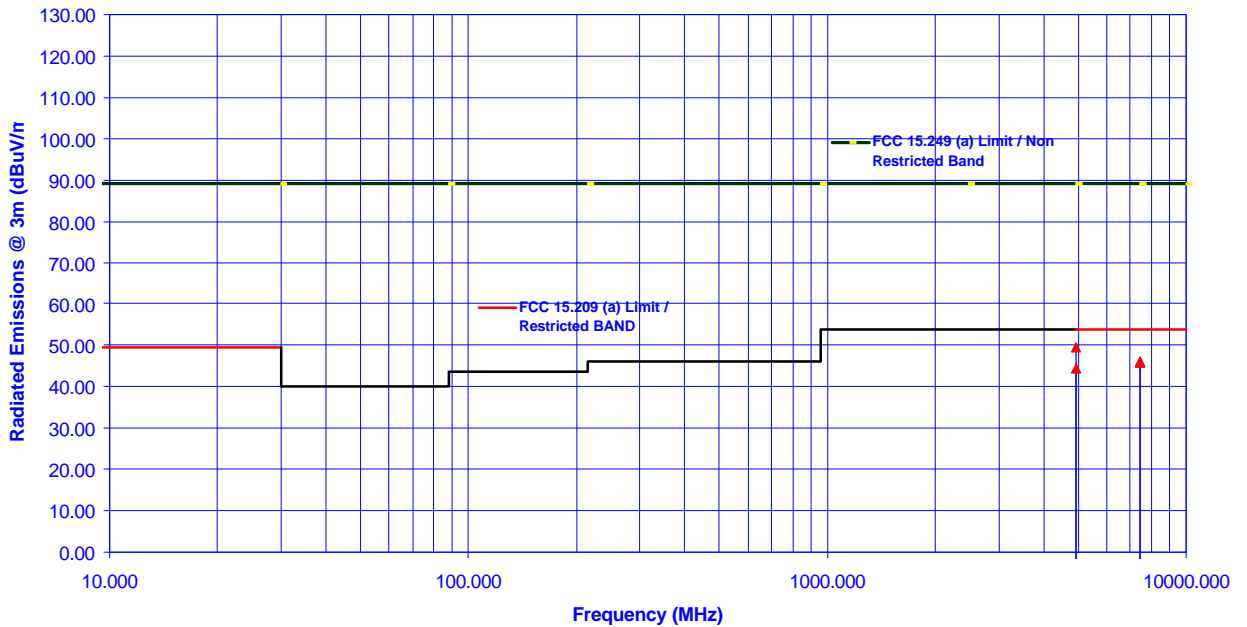

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.4. Test Configuration # 4: 2.4GHz FHSS OEM Transceiver with Maxrad – BMMG24000RPSMA12’ External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2402.0	107.03	--	V	54.0	--	--	--
2402.0	99.66	--	H	54.0	--	--	--
4804.0	54.69	46.41	V	54.0	87.0	-7.6	**PASS
4804.0	51.84	40.39	H	54.0	87.0	-13.6	**PASS
7206.0	54.59	43.72	V	54.0	87.0	-43.3	PASS
7206.0	54.53	43.31	H	54.0	87.0	-43.7	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

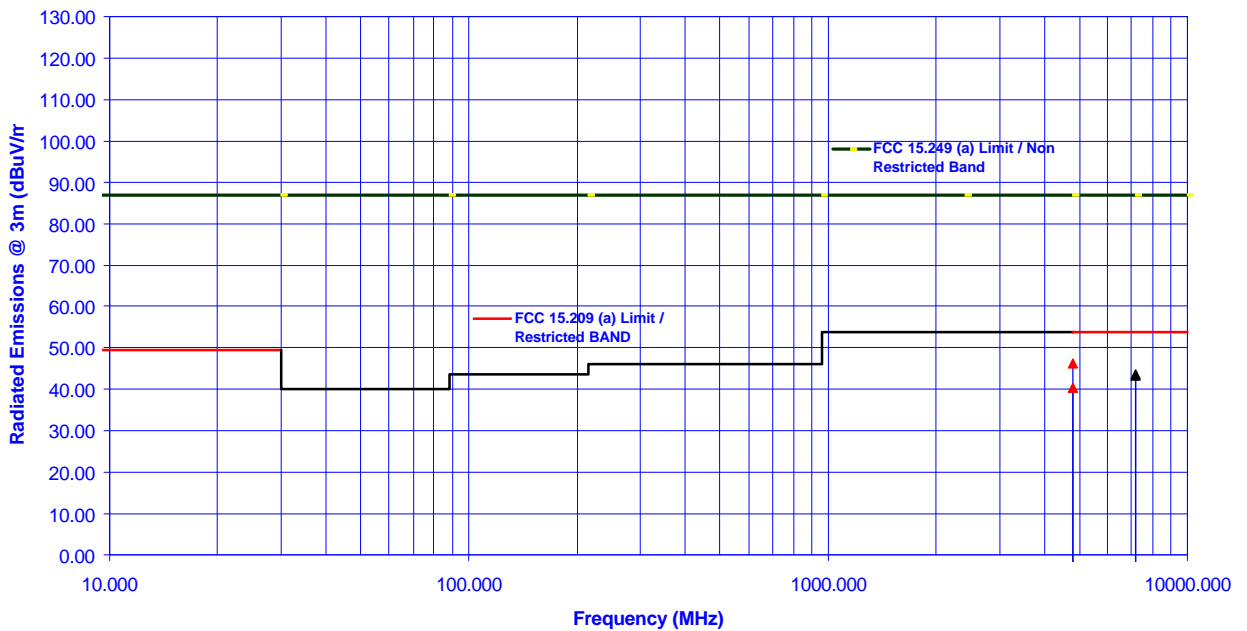

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	109.94	--	V	54.0	--	--	--
2443.0	99.69	--	H	54.0	--	--	--
4886.0	58.06	49.25	V	54.0	89.9	-4.8	**PASS
4886.0	54.44	44.72	H	54.0	89.9	-9.3	**PASS
7329.0	53.63	42.59	V	54.0	89.9	-47.4	PASS
7329.0	53.53	42.00	H	54.0	89.9	-47.9	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2443 MHz

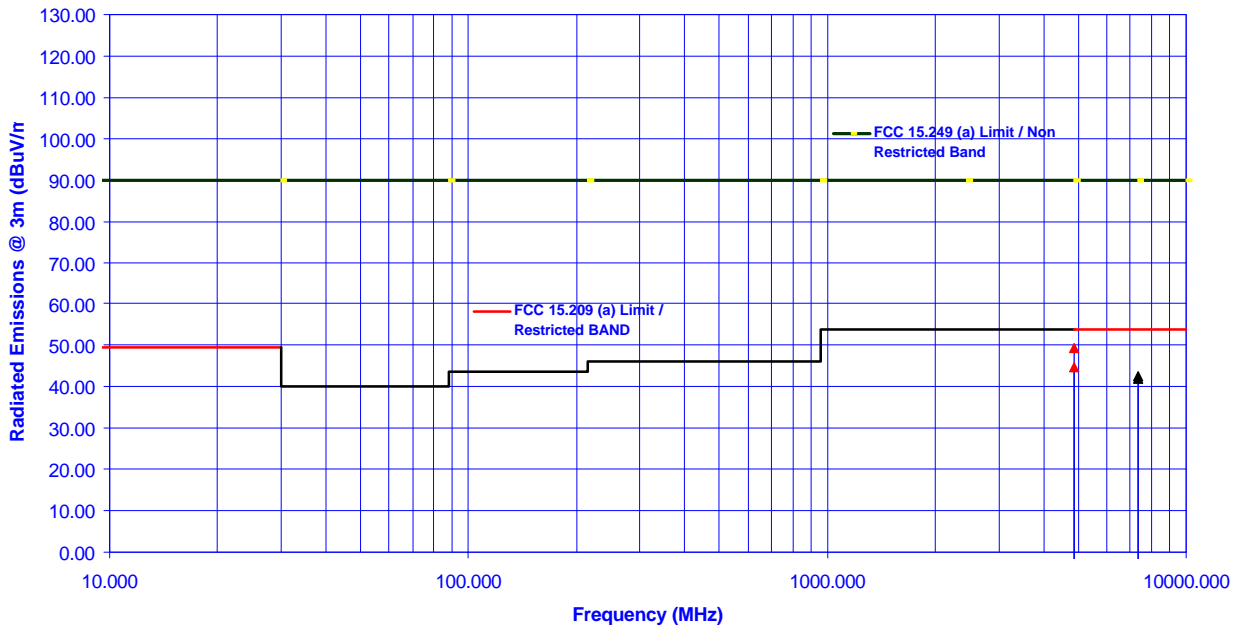

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	111.56	--	V	54.0	--	--	--
2478.0	102.22	--	H	54.0	--	--	--
4956.0	57.56	52.72	V	54.0	91.6	-1.3	**PASS
4956.0	54.66	46.53	H	54.0	91.6	-7.5	**PASS
7434.0	56.25	45.03	V	54.0	91.6	-9.0	**PASS
7434.0	57.84	46.97	H	54.0	91.6	-7.0	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

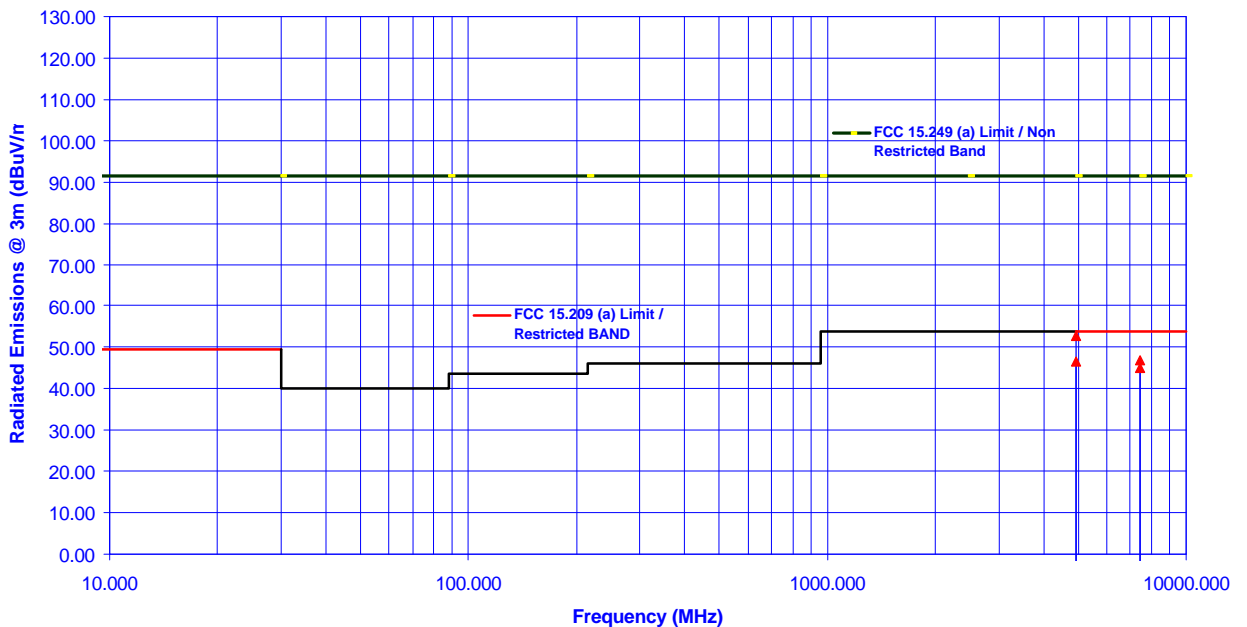

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.5. Test Configuration # 5: 2.4GHz FHSS OEM Transceiver with AEROCOMM – NZH2400 External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2402.0	107.78	--	V	54.0	--	--	--
2402.0	105.38	--	H	54.0	--	--	--
4804.0	58.97	51.75	V	54.0	87.8	-2.3	**PASS
4804.0	54.25	44.45	H	54.0	87.8	-9.6	**PASS
7206.0	56.06	45.69	V	54.0	87.8	-42.1	PASS
7206.0	55.09	45.00	H	54.0	87.8	-42.8	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

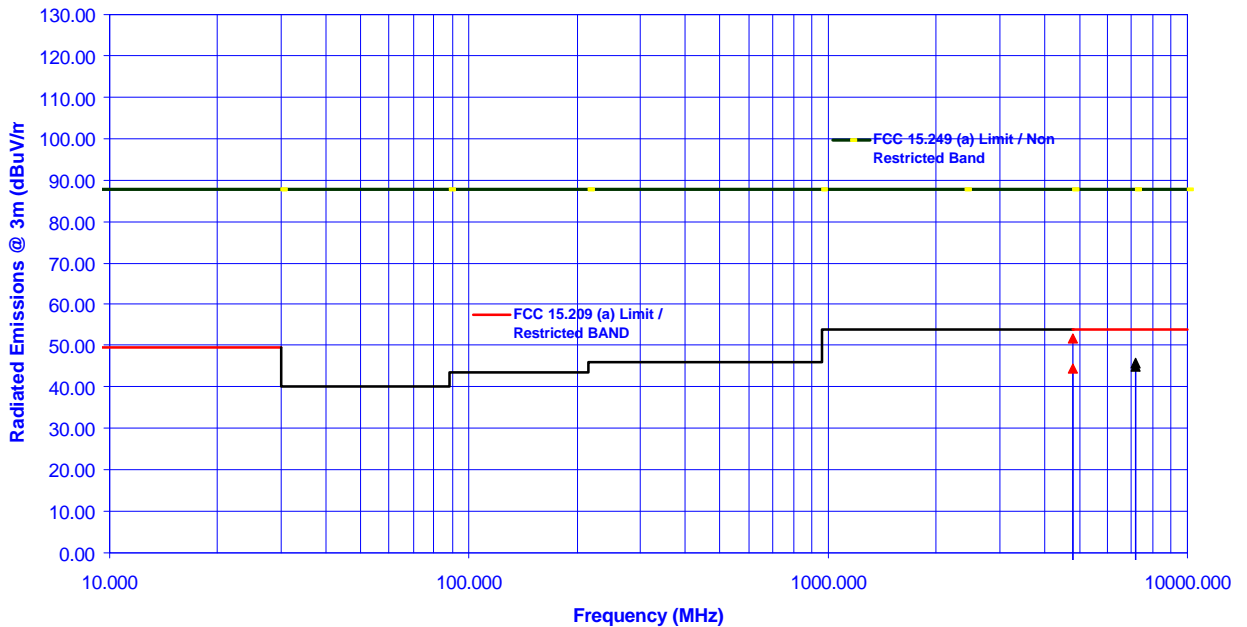

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	105.31	--	V	54.0	--	--	--
2443.0	108.97	--	H	54.0	--	--	--
4886.0	50.72	40.45	V	54.0	89.0	-13.6	**PASS
4886.0	49.56	39.25	H	54.0	89.0	-14.8	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2443 MHz

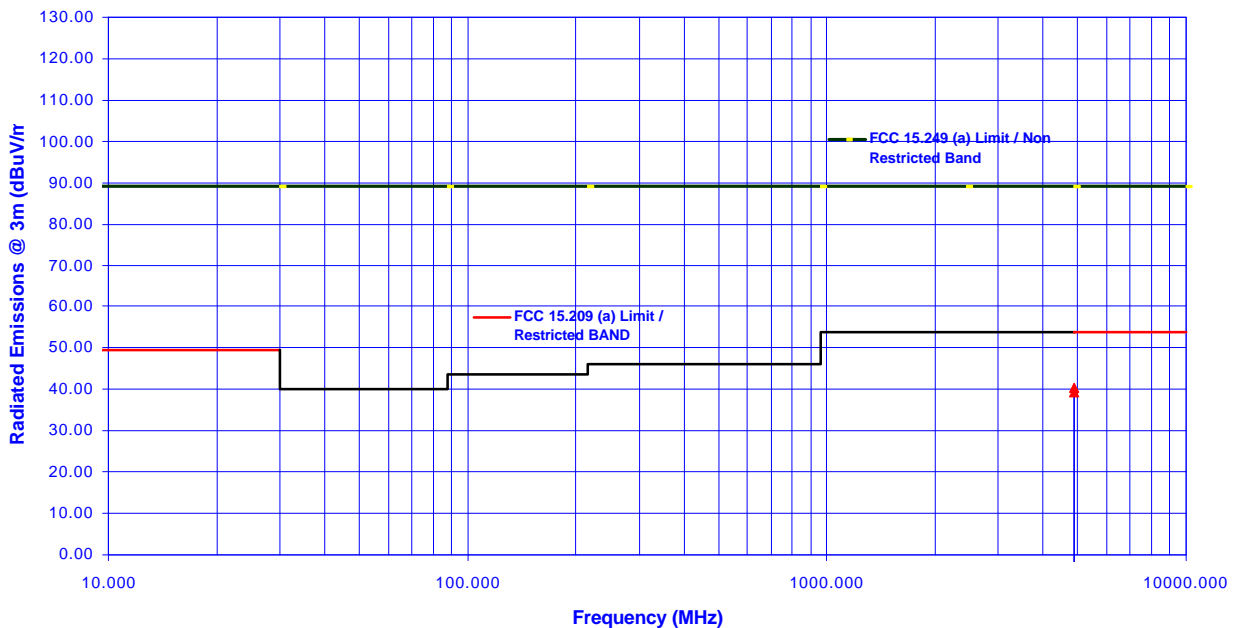

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	106.38	--	V	54.0	--	--	--
2478.0	108.41	--	H	54.0	--	--	--
4956.0	50.75	40.34	V	54.0	88.4	-13.7	**PASS
4956.0	50.50	39.22	H	54.0	88.4	-14.8	**PASS
7434.0	52.90	42.00	V	54.0	88.4	-12.0	**PASS
7434.0	52.19	41.13	H	54.0	88.4	-12.9	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

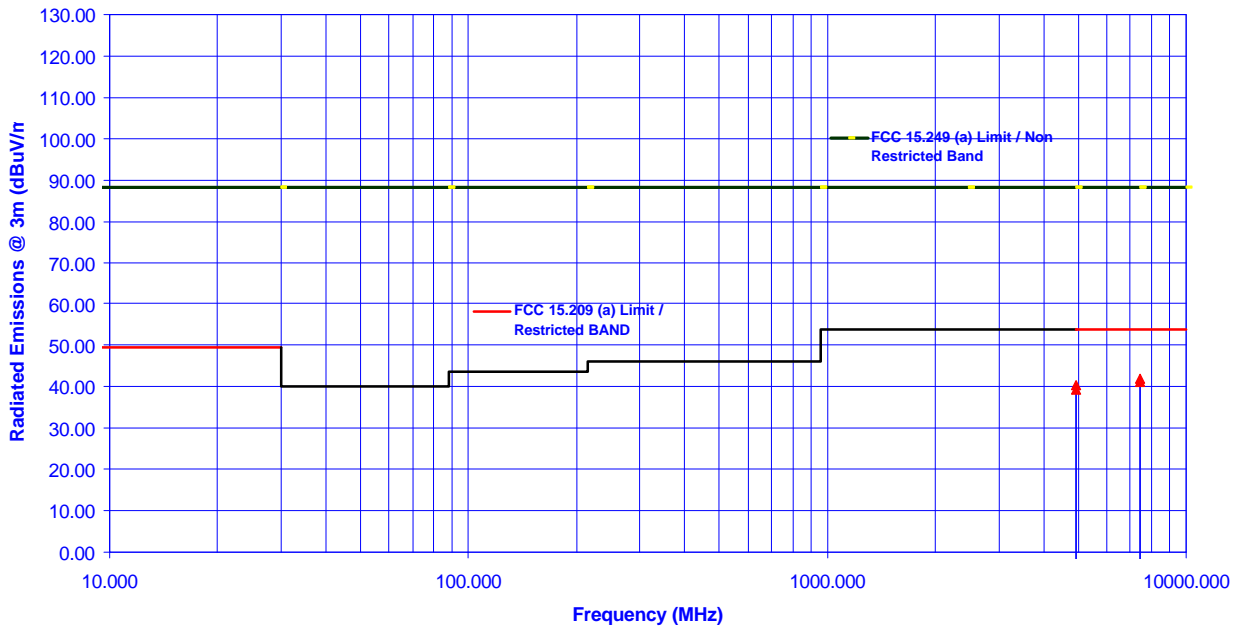

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.6. Test Configuration # 6: 2.4GHz FHSS OEM Transceiver with Maxrad – MP24013FC External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2402.0	102.19	--	V	54.0	--	--	--
2402.0	109.09	--	H	54.0	--	--	--
4804.0	58.03	51.28	V	54.0	89.1	-2.7	**PASS
4804.0	53.81	44.69	H	54.0	89.1	-9.3	**PASS
7206.0	57.09	47.19	V	54.0	89.1	-41.9	PASS
7206.0	56.97	46.09	H	54.0	89.1	-43.0	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OETS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

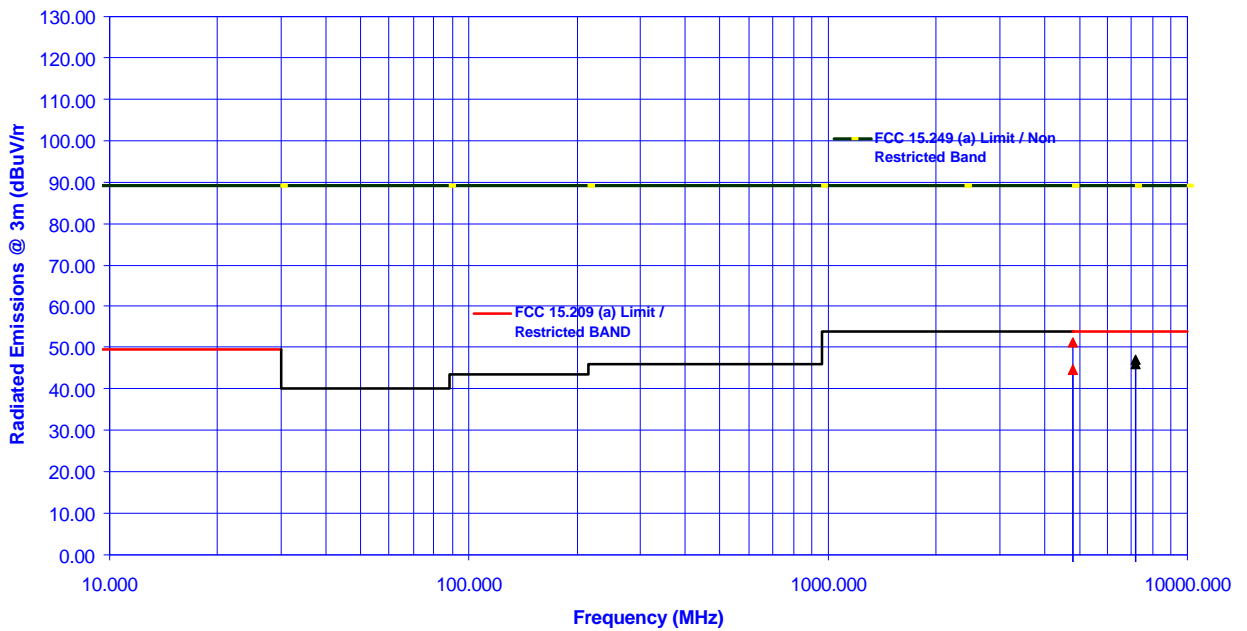

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	103.72	--	V	54.0	--	--	--
2443.0	111.44	--	H	54.0	--	--	--
4886.0	56.47	48.66	V	54.0	91.4	-5.3	**PASS
4886.0	53.84	44.47	H	54.0	91.4	-9.5	**PASS
7329.0	55.97	45.53	V	54.0	91.4	-45.9	PASS
7329.0	54.47	44.53	H	54.0	91.4	-46.9	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2443 MHz

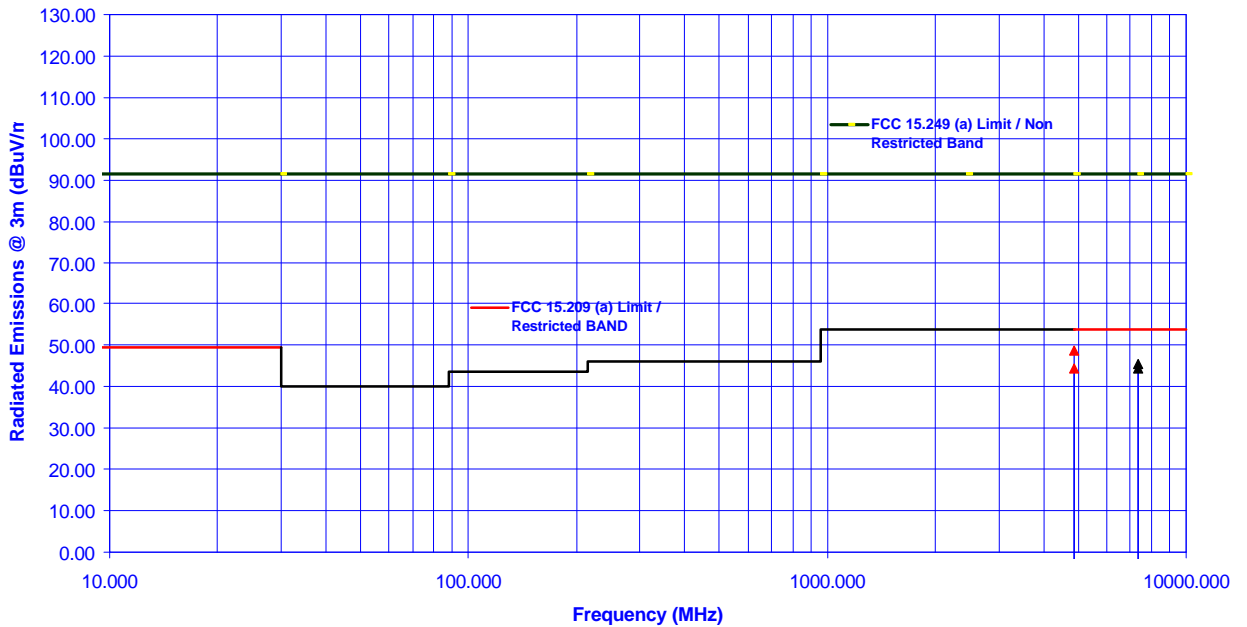

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	102.19	--	V	54.0	--	--	--
2478.0	109.59	--	H	54.0	--	--	--
4956.0	54.72	46.34	V	54.0	89.6	-7.7	**PASS
4956.0	51.78	39.56	H	54.0	89.6	-14.4	**PASS
7434.0	55.31	44.88	V	54.0	89.6	-9.1	**PASS
7434.0	56.50	46.63	H	54.0	89.6	-7.4	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz FHSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

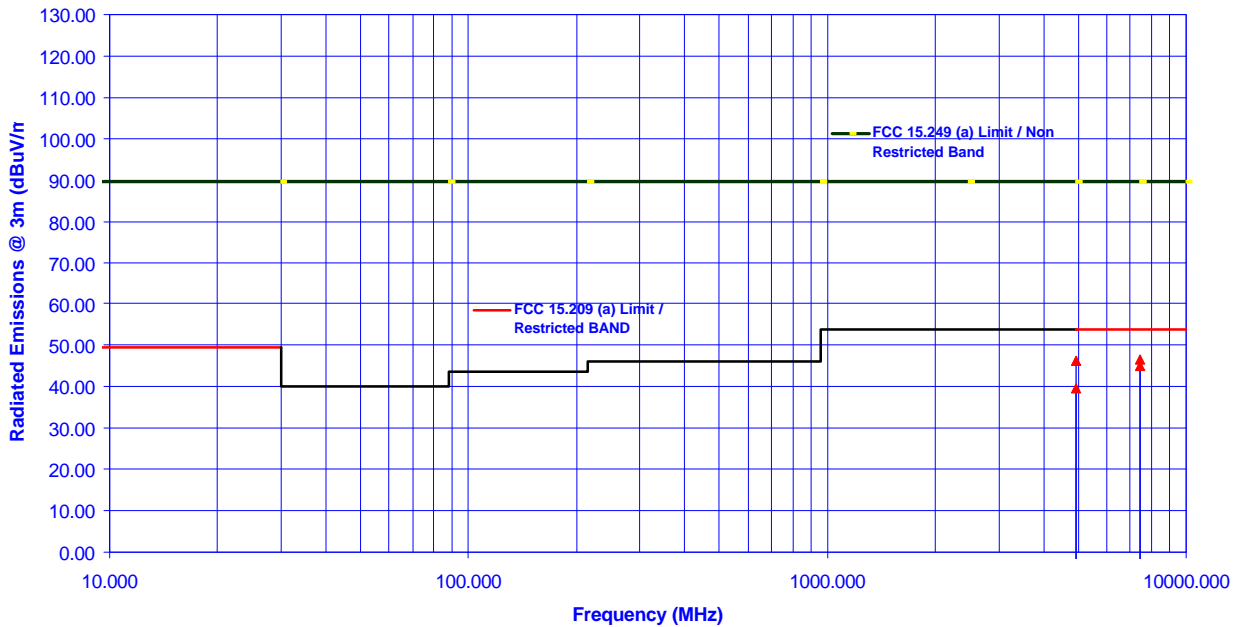

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.7. Test Configuration # 7: 2.4GHz FHSS OEM Transceiver with Maxrad – MUF24005 External Antenna

Lowest Frequency (2402 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
2402.0	113.06	--	V	54.0	--	--	--
2402.0	103.66	--	H	54.0	--	--	--
4804.0	55.78	49.84	V	54.0	93.1	-4.2	**PASS
4804.0	53.34	43.81	H	54.0	93.1	-10.2	**PASS
7206.0	54.87	45.53	V	54.0	93.1	-47.5	PASS
7206.0	57.38	46.25	H	54.0	93.1	-46.8	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 AeroComm Inc.
 2.4 GHz HFSS OEM Transceiver
 Model PKLR2400
 TRANSMIT Freq.: 2402 MHz

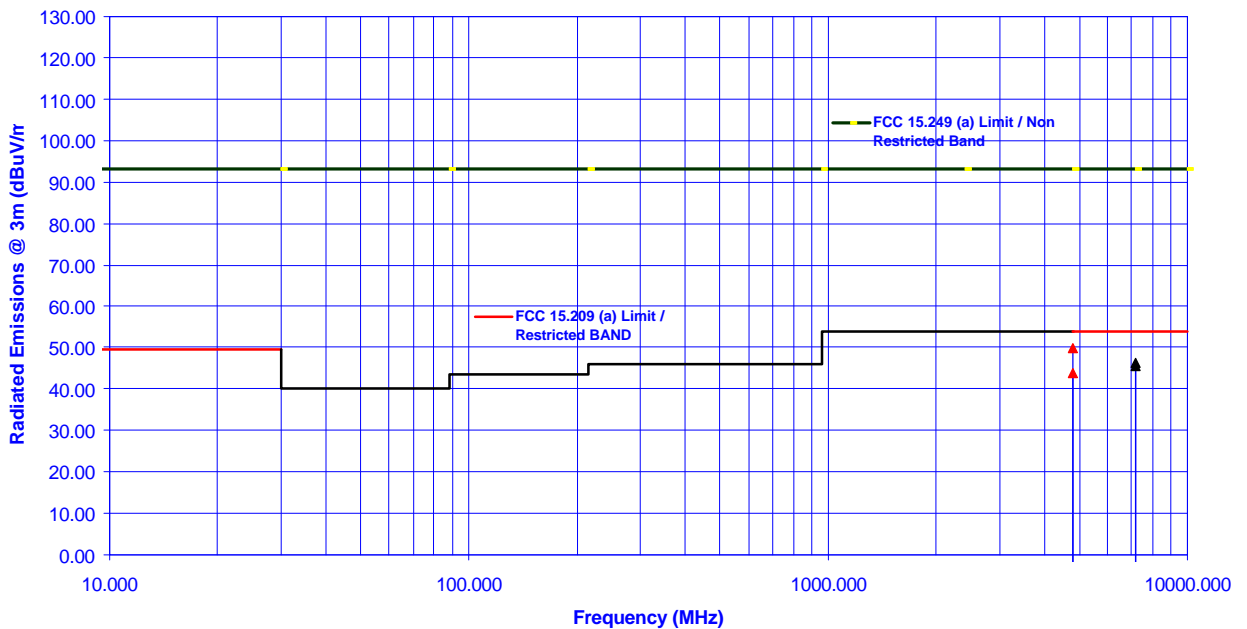

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Middle Frequency (2443 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2443.0	107.72	--	V	54.0	--	--	--
2443.0	101.00	--	H	54.0	--	--	--
4886.0	56.69	49.66	V	54.0	87.7	-4.3	**PASS
7329.0	53.41	43.84	V	54.0	87.7	-43.9	PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz HFSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2443 MHz

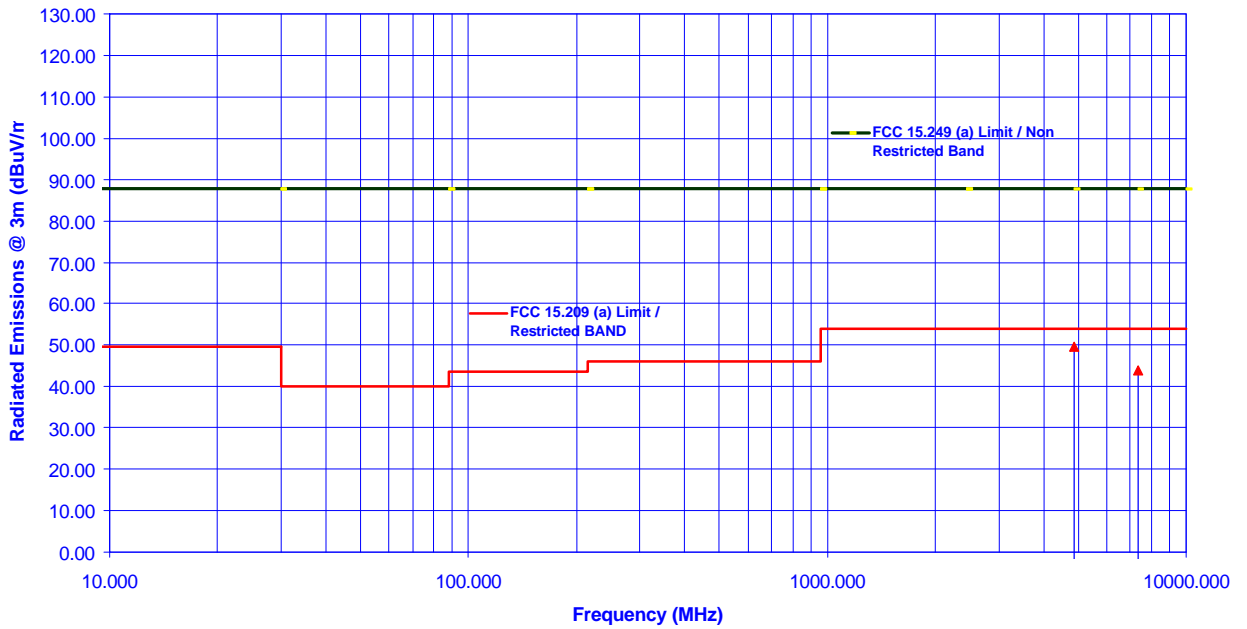

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Highest Frequency (2478 MHz)							
FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
2478.0	108.44	--	V	54.0	--	--	--
2478.0	98.53	--	H	54.0	--	--	--
4956.0	59.94	53.72	V	54.0	88.4	-0.3	**PASS
4956.0	56.72	49.78	H	54.0	88.4	-4.2	**PASS
7434.0	58.56	48.59	V	54.0	88.4	-5.4	**PASS
7434.0	59.16	49.22	H	54.0	88.4	-4.8	**PASS

The emissions were scanned from 10 MHz to 25 GHz and all emissions not more than 40 dB below the permissible value were recorded.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
AeroComm Inc.
2.4 GHz HFSS OEM Transceiver
Model PKLR2400
TRANSMIT Freq.: 2478 MHz

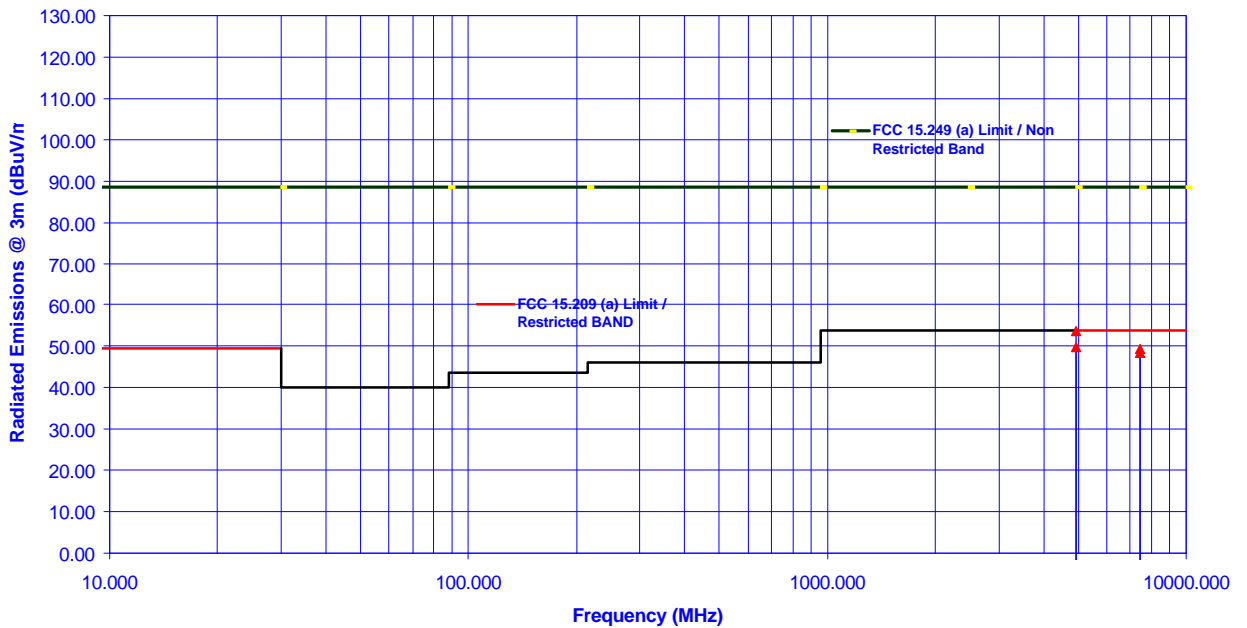

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
 August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.6. Plots

Please refer to EXHIBIT 15C for Transmitter Radiated Emissions plots.

5.9.7. Photographs of Test Setup

Please refer to EXHIBIT 11.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	+1.5	+1.5
LISN coupling specification	Rectangular	+1.5	+1.5
Cable and Input Transient Limiter calibration	Normal (k=2)	+0.3	+0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	± 0.2	± 0.3
System repeatability	Std. deviation	+0.2	+0.05
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	+1.25	+1.30
Expanded uncertainty U	Normal (k=2)	+2.50	+2.60

Sample Calculation for Measurement Accuracy in 150 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (\pm dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	± 0.5	± 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT METHODS

7.1. GENERAL TEST CONDITIONS

7.1.1. Test Conditions

- The measurement shall be made in the operational mode producing the largest emission in the frequency band being investigated consistent with normal applications.
- An attempt shall be made to maximize the detected radiated emissions, for example moving cables of the equipment, rotating the equipment by 360° and moving the measuring receiving antenna up and down within 1 to 4 meters high.
- Where appropriate, a single tone or a bit stream shall be used to modulate the receiver. The manufacturer shall define the modulation with the highest emission in transmit mode.

7.1.2. Method of Measurements - AC Mains Conducted Emissions

- AC Mains conducted emissions measurements were performed in accordance with the standard against appropriate limits for each detector function.
- The test was performed in the shielded room, 16'(L) by 16'(W) by 12'(H).
- The test was performed over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio noise voltage which was conducted from the EUT power-input terminals that were directly connected to a public power network.
- The EUT normally received power from another device that connects to the public utility ac power lines, measurements would be made on that device with the EUT in operation to ensure that the device continues to comply with the appropriate limits while providing the EUT with power.
- If the EUT operates only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines, AC Mains conducted measurements are not required.
- Table-top devices were placed on a platform of nominal size 1 m by 1.5m raised 80 cm above the conducting ground plane.
- The EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the power source. All unused 50-Ohm connectors of the LISN was terminated in 50-ohm when not connected to the measuring instruments.
- The line cord of the EUT connected to one LISN which was connected to the measuring instrument. Those power cords for the units of devices not under measurement were connected to a separate multiple ac outlet. Drawings and photographs of typically conducted emission test setups were shown in the Test Report. Each current-carrying conductor of the EUT shall be individually tested.
- The EUT was normally operated with a ground (safety) connection, the EUT was connected to the ground at the LISN through a conductor provided in the lead from the ac power mains to the LISN.
- The excess length of the power cord was folded back and forth in an 8-shape on a wooden strip with a vertical prong located on the top of the LISN case.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- A preliminary scan was made by using spectrum analyzer system with the detector function set to PEAK mode (9 KHz RBW, VBW > RBW), frequency span 150KHz-30MHz.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- The maximum conducted emission for a given mode of operation was found by using the following step-by-step procedure:
 - Step1. Monitor the frequency range of interest at a fixed EUT azimuth.
 - Step2. Manipulate the system cables and peripheral devices to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
 - Step3. The effects of various modes of operation is examined. This is done by varying equipment operation modes as step 2 is being performed.
 - Step4. After completing step 1 through 3, record EUT and peripheral device configuration, mode of operation, cable configuration, signal levels and frequencies for final test.
- Each highest signal level at the maximized test configuration was zoomed in a small frequency span on the spectrum analyzer's display (the manipulation of cables and peripheral devices and EUT operation modes might have to be repeated to obtain the highest signal level with the spectrum analyzer set to PEAK detector mode 9 KHz RBW and VBW > RBW). The spectrum analyzer was then set to CISPR QUASI-PEAK detector mode (9 KHz RBW, 1 MHz VBW) and AVERAGE detector mode (9 kHz RBW, 1 MHz VBW). The final highest RF signal levels and frequencies were record.
- **Broad-band ac Powerline conducted emissions:-** If the EUT exhibits ac Powerline conducted emissions that exceed the limit with the instrument set to the quasi-peak mode, then measurements should be made in the average mode. If the amplitude measured in the quasi-peak mode is at least 6 dB higher than the amplitude measured in the average mode, the level measured in quasi peak mode may be reduced by 13 dB before comparing it to the limit.

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

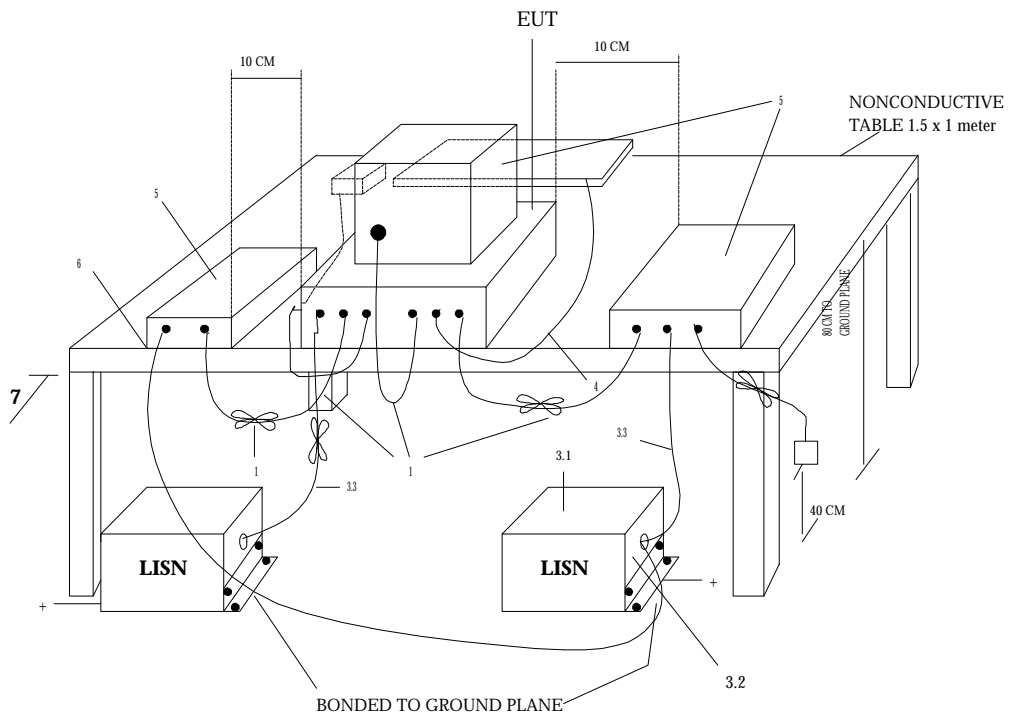

+LISNs may have to be moved to the side to meet 3.3 below

LEGEND:

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back at forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between ground plane and table.
2. I/O cables that are connected to a peripheral shall be bundled in center. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1m.
3. EUT connected to one LISN. Unused LISN connectors shall be terminated in 50 Ohm. LISN can be placed on top of, or immediately beneath, ground plane.
 - 3.1 All other equipment powered from second LISN.
 - 3.2 Multiple outlet strip can be used for multiple power cords of non-EU equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Cables of hand-operated devices, such as keyboards, mice, etc., have to be placed as close as possible to the host.
5. Non-EUT components being tested.
6. Rear of EUT, including peripherals, shall be all aligned and flush with rear of tabletop.
7. Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the floor ground plane (see 5.2)

Tabletop Equipment Conducted Emissions

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

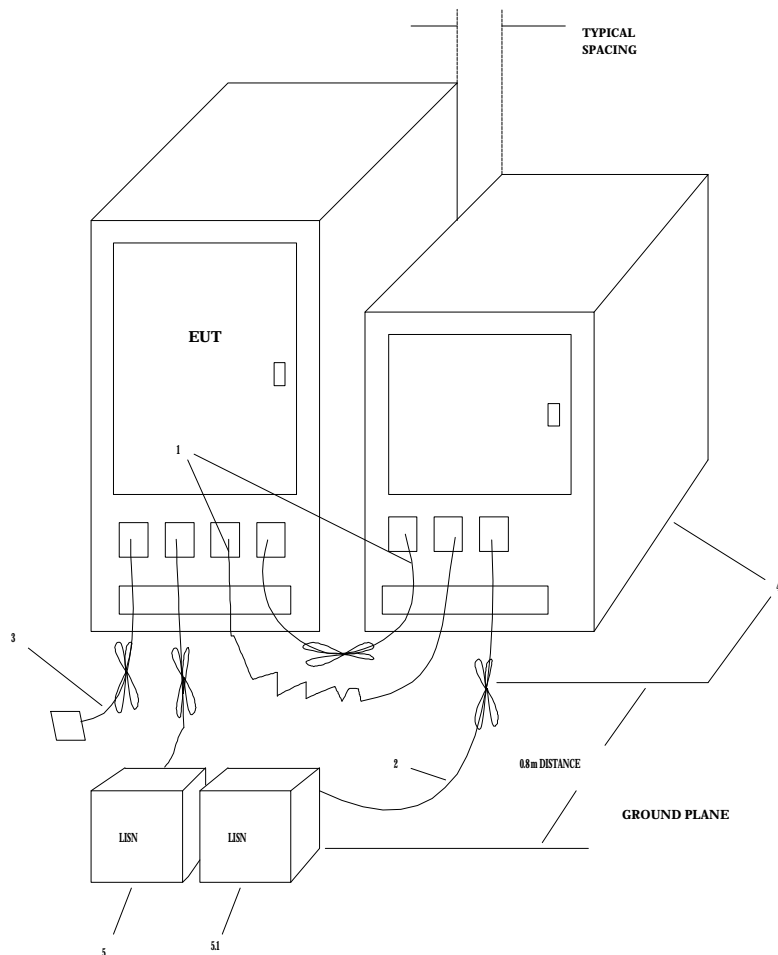

LEGENEND:

1. Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling shall not exceed 40 cm in length.
2. Excess power cords shall be bundled in the center or shortened to appropriated length.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.
4. EUT and all cables shall be insulated from ground plane by 3 to 12 mm of insulating material.
5. EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, ground plane.
- 5.1 All other equipment powered from second LISN.

Floor-Standing Equipment Conducted Emissions

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

7.1.3. Method of Measurements - Electric Field Radiated Disturbance

- The radiated emission measurements were performed at the UltraTech's 10 or 30 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC, Industry Canada, ACA/Austel, NVLap and ITI.
- Radiated emissions measurements were made using the following test instruments:
 1. Calibrated EMCO BiconiLog antenna in the frequency range from 30 MHz to 2000 MHz.
 2. Calibrated Emco Horn antennas in the frequency range above 1000 MHz (1GHz - 40 GHz).
 3. 3.Calibrated Advantest spectrum analyzer and pre-selector. In general, the spectrum analyzer would be used as follows:
 - The rf electric field levels were measured with the spectrum analyzer set to PEAK detector (120 KHz VBW and VBW \geq RBW).
 - If any rf emission was observed to be a broadband noise, the spectrum analyzer's CISPR QUASI-PEAK detector (120 KHz RBW and VBW \geq RBW) was then set to measure the signal level.
 - If the signal being measured was narrowband and the ambient field was broadband, the bandwidth of the spectrum analyzer was reduced.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowed range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

Calculation of Field Strength:

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength
RA = Receiver/Analyzer Reading
AF = Antenna Factor
CF = Cable Attenuation Factor
AG = Amplifier Gain

Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:.

Field Level = 60 + 7.0 + 1.0 - 30 = 38.0 dBuV/m.

Field Level = $10^{(38/20)}$ = 79.43 uV/m.


NOTE: The frequency and amplitude of at least six highest conducted emissions relative to the limit are recorded unless such emissions are more than 20 dB below the limit. If less than six emissions are within 20dB of the limit, the background or receiver noise level shall be reported at representative frequencies.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX
August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

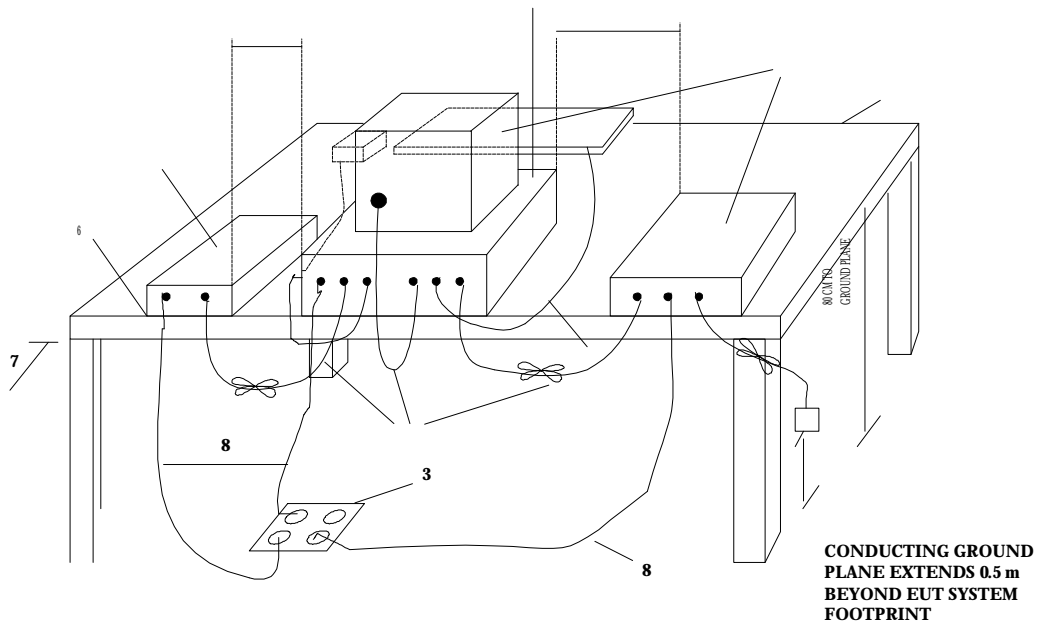

LEGEND:

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between ground plane and table.
2. I/O cables that are connected to a peripheral shall be bundled in center. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1m.
3. If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground plane with the receptacle flush with the ground plane.
4. Cables of hand-operated devices, such as keyboards, mice, etc., have to be placed as close as possible to the controller.
5. Non-EUT components of EUT system being tested.
6. The rear of all components of the system under test shall be located flush with the rear of the table.
7. No vertical conducting wall used.
8. Power cords drape to the floor and are routed over to receptacle.

Tabletop Equipment Radiated Emissions

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

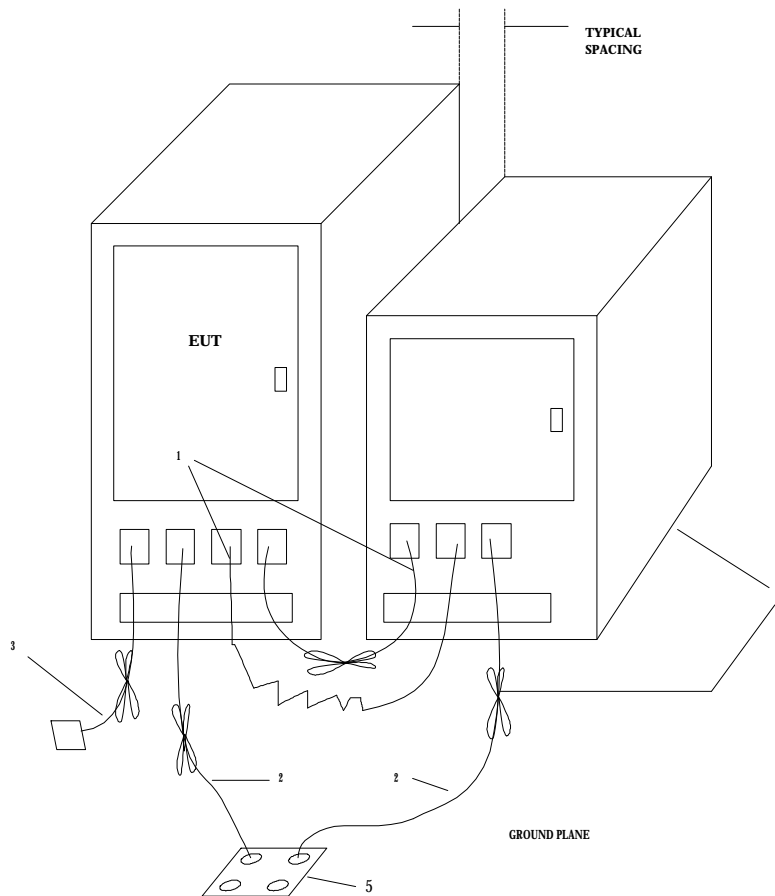

LEGEND:

1. Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion.
2. Excess power cords shall be bundled in the center or shortened to appropriated length.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.
4. EUT and all cables shall be insulated from ground plane by 3 to 12 mm of insulating material.
5. If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground plane with the receptacle flush with the ground plane.

Floor-Standing Equipment Radiated Emissions

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 8. FCC FORM 731, APPLICANT'S LETTERS & STATEMENT

8.1. FCC FORM 731

8.2. APPLICANT'S AUTHORIZATION TO APPOINT ULTRATECH ENGINEERING LABS INC. TO ACT AS AN AGENT

8.3. LETTER REQUEST FOR FCC CONFIDENTIALITY FILING

8.4. DESCRIPTION OF THE FREQUENCY HOPPING METHOD

8.5. OEM RADIO BOM

8.6. BLOCK DIAGRAM OF PROPRIETARY MMCX ANTENNA CONNECTOR

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 9. FCC ID LABEL & SKETCH OF LABEL LOCATION

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 10. “FCC INFORMATION TO USER”

Please refer to AeroComm PKLR2400 Radio user’s manual.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 11. PHOTOGRAPHS OF TEST SETUP

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 12. PHOTOGRAPHS OF EQUIPMENT UNDER TEST

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 13. SYSTEM BLOCK DIAGRAM(S) & SCHEMATIC DIAGRAMS

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 14. USER'S MANUAL

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 15. TEST RESULTS PLOTS

EXHIBIT 15A. 20 dB BANDWIDTH AND AVERAGE TIME OF OCCUPANCY

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 15B. TRANSMITTER CONDUCTED EMISSIONS

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 15C. TRANSMITTER RADIATED EMISSIONS

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: AER20-FTX

August 23, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

20dB BANDWIDTH



AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
 Tx Frequency: _____ MHz, RF Output Power: *10m* Watts

Date: July 1999
 Tested by: En Fab, F Eng

MARKER Δ
 -1.65 MHz
 1.16 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 9.68 kHz
 .86 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.44108 GHz
 -3.02 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.47866 GHz
 -3.52 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.44108 GHz
 -3.02 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.47866 GHz
 -3.52 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.44108 GHz
 -3.02 dB

ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.47866 GHz
 -3.52 dB






ACTY DET: PEAK
 MEAS DET: MCR

NO USER
 Menu

MARKER Δ
 2.44108 GHz
 -3.02 dB

ACTY DET: PEAK
 MEAS DET: MCR


NO USER
 Menu




AVERAGE TIME OF OCCUPANCY

Date: July /1999
 Tested by: Tri Lou, P.Eng.

AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
 Tx Frequency: 2402 MHz, RF Output Power: _____ Watts

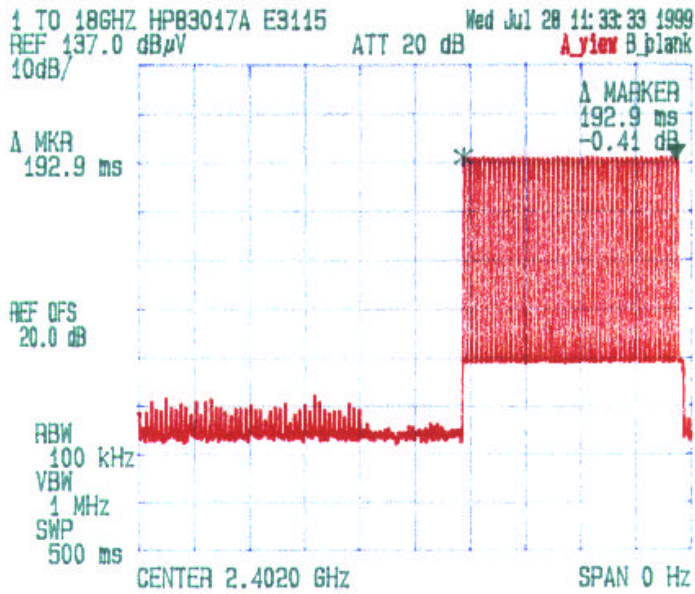


occupancy time in 30 sec PERIOD = 2 x 193 = 386 ms

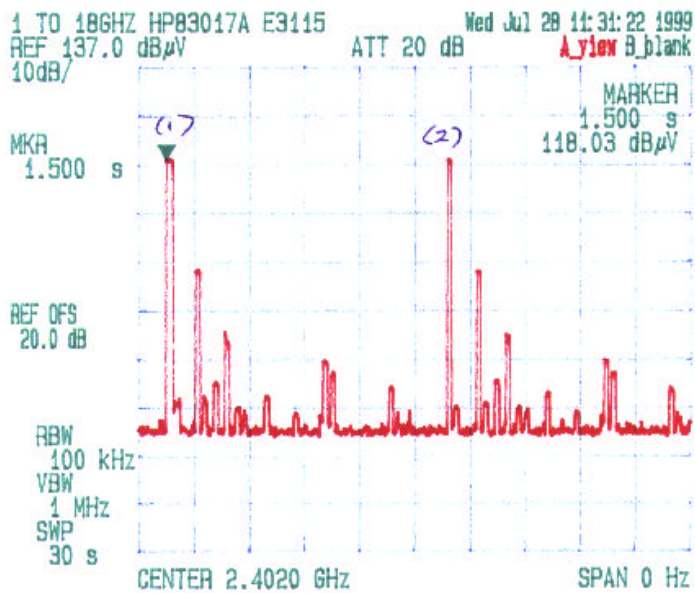


Date: July /1999
Tested by: Tri Lam, P.Eng.

AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
Tx Frequency: 2441 MHz, RF Output Power: Watts

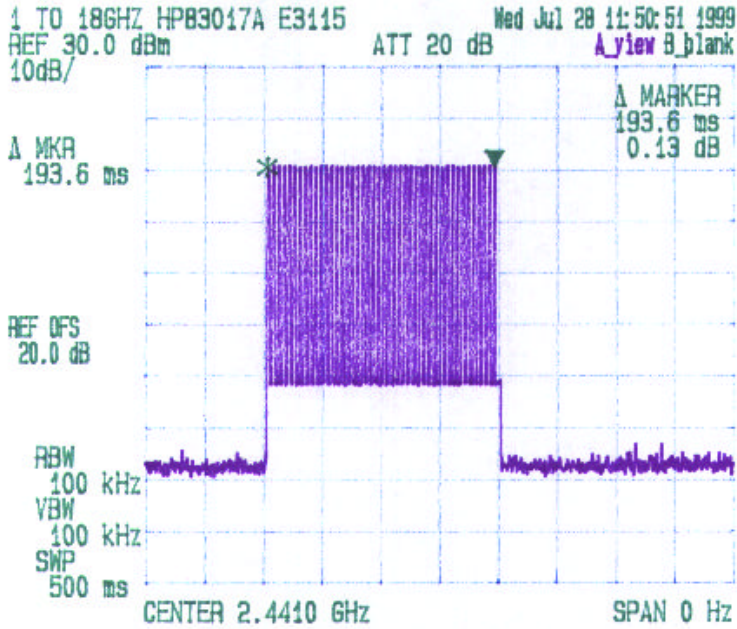


OCCUPANCY TIME DURING 30SEC = $2 \times 194ms = 388mSec.$

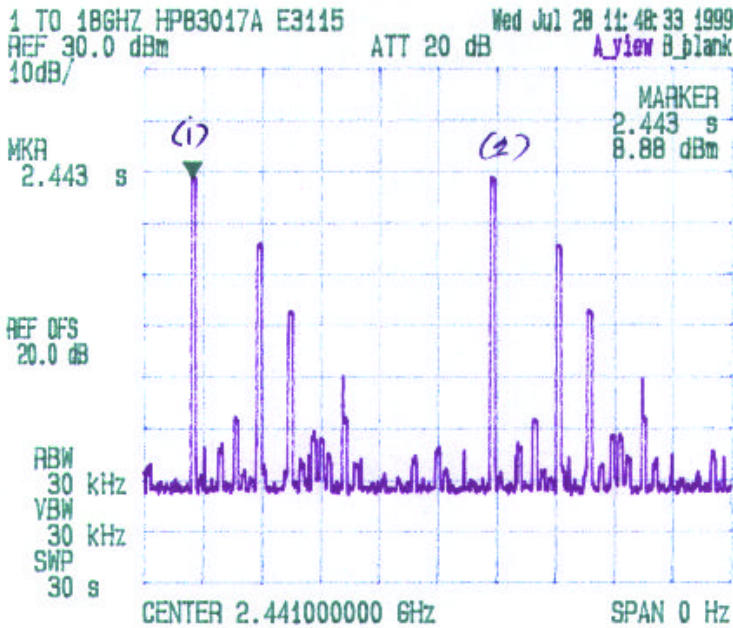


Date: July 28 / 1999
 Tested by: Tri Lau, P.Eng

AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
 Tx Frequency: 2478 MHz, RF Output Power: _____ Watts

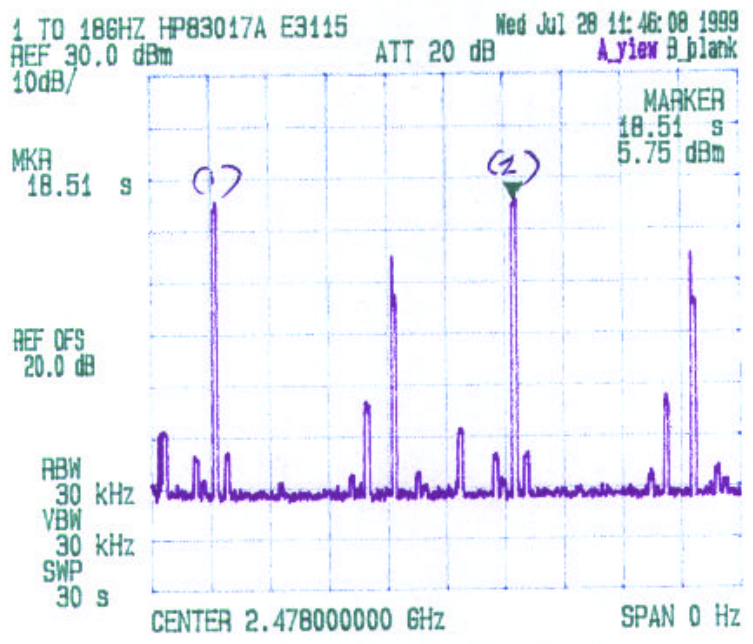

OCCUPANCY IN 30 SEC PERIOD = $2 \times 193 \text{ ms} = 386 \text{ mSec}$.

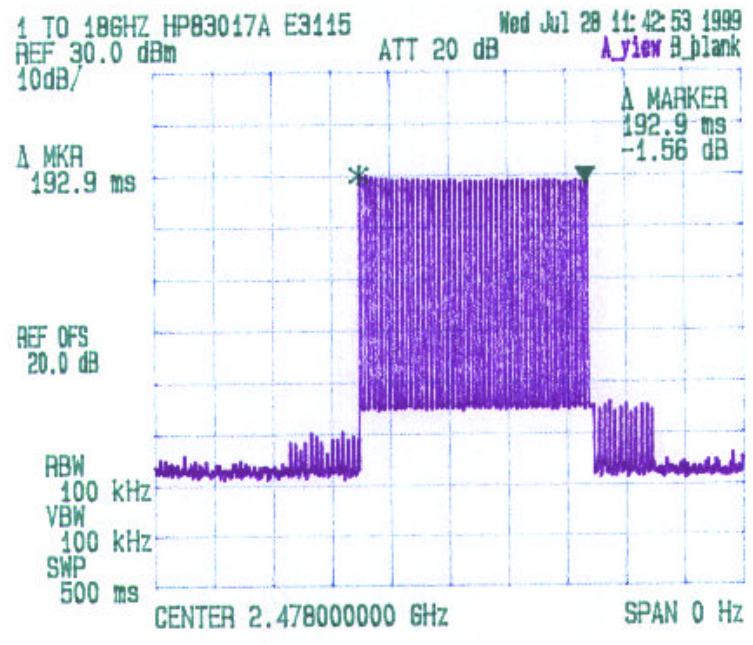




UltraTech
Engineering Labs Inc.


AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
Tx Frequency: 2402 MHz RF Output Power: 10mW Watts

Date: July 22, 1999
Tested by: Tin Lam, P. Eng.


STOP 2.966 GHz
ACTY DET: PEAK No user
MEAS DET: PEAK GP AVS Menu
MKR 22.34 MHz
-38.98 dBm

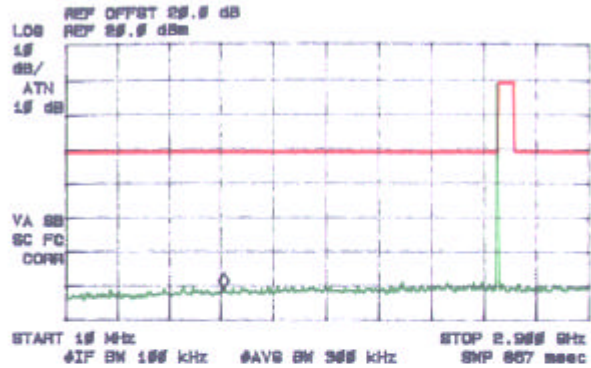


STOP 10.000 GHz
ACTY DET: PEAK No user
MEAS DET: PEAK GP AVS Menu
MKR 5.000 GHz
-51.88 dBm

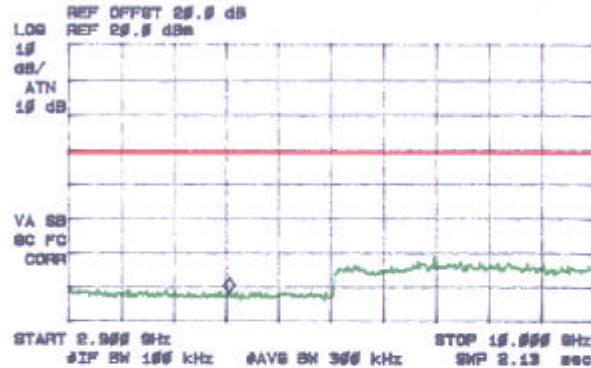

MARKER 22.34 GHz
-38.98 dBm
ACTY DET: PEAK
MEAS DET: PEAK GP AVS
MKR 22.34 GHz
-38.98 dBm

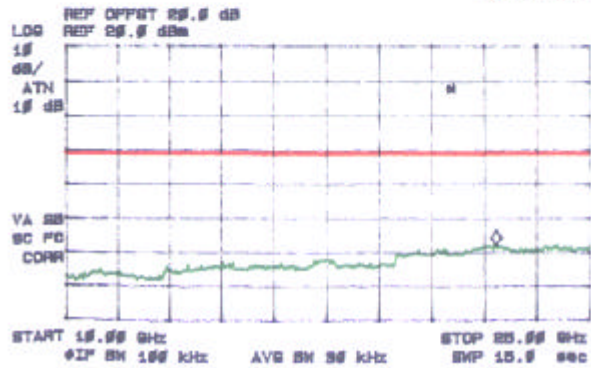





SPAN 200.0 MHz
ACTY DET: PEAK No user
MEAS DET: PEAK GP AVS Menu
MKR 2.4020 GHz
9.92 dBm

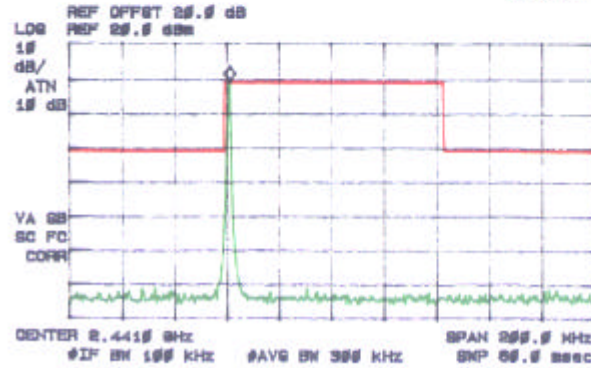



AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
 Tx Frequency: 2441 MHz, RF Output Power: 8.5 Watts

Date: July 1999
 Tested by: Tri Lou, P. Eng

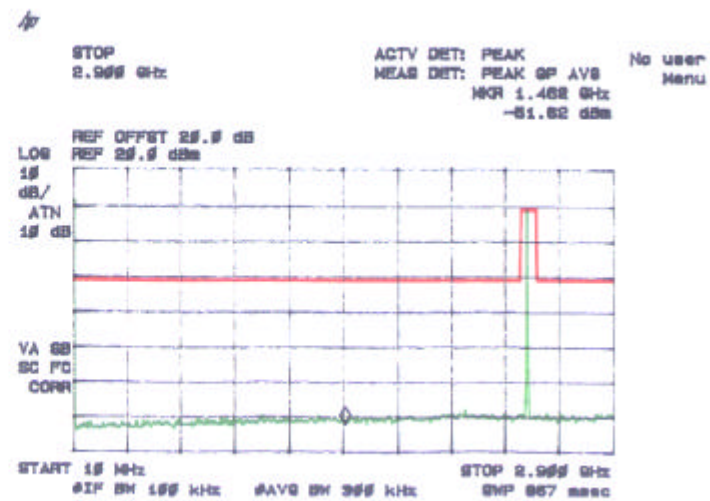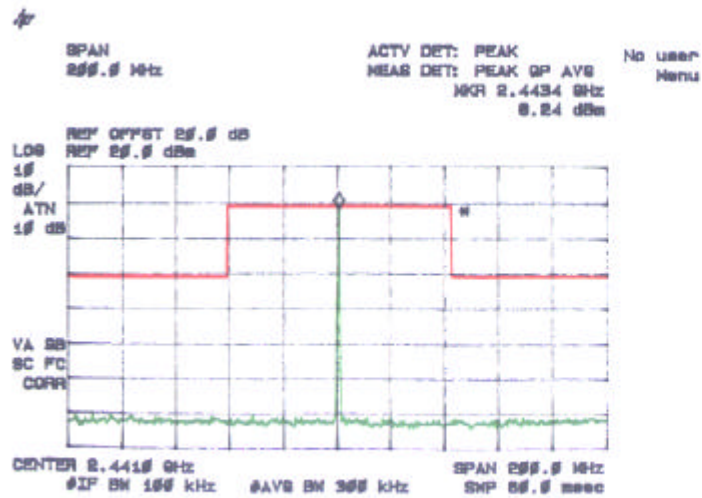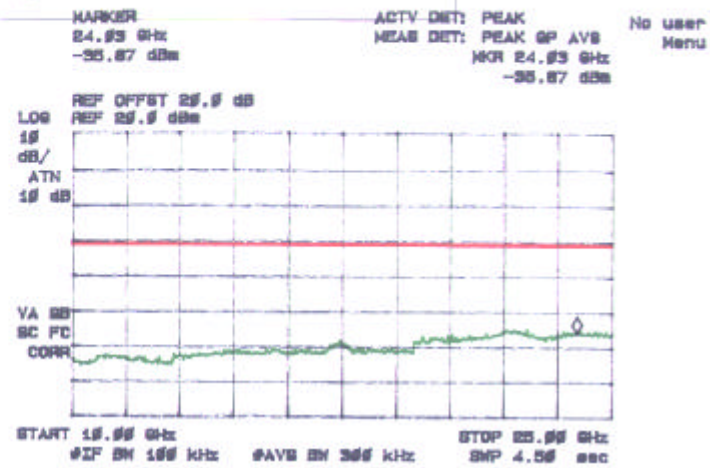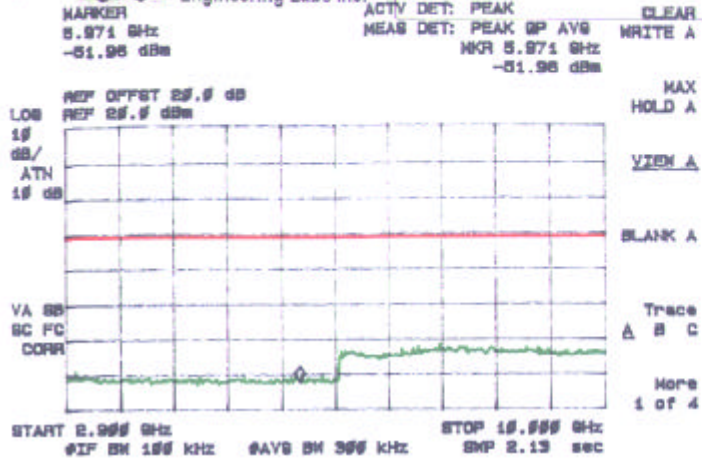





AEROCOMM 2.4 GHz OEM Data Radio, Model PKLR2400
 Tx Frequency: 2.478 MHz, RF Output Power: 8.1 m Watts

Date: July 1, 1999
 Tested by: T. L. P. Log


ACTV DET: PEAK No user
 MEAS DET: PEAK QP AVG Menu
 MKR 1.999 GHz
 -49.67 dBm

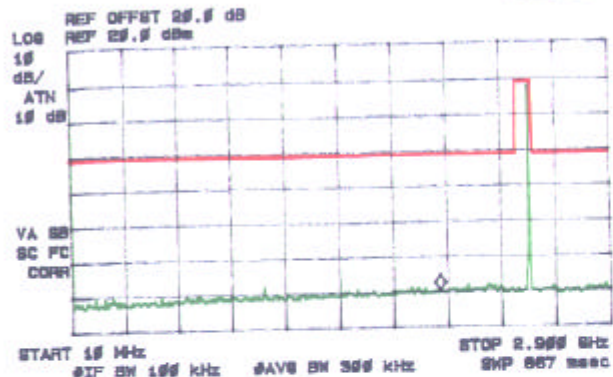


ACTV DET: PEAK No user
 MEAS DET: PEAK QP AVG Menu
 MKR 7.444 GHz
 -49.61 dBm

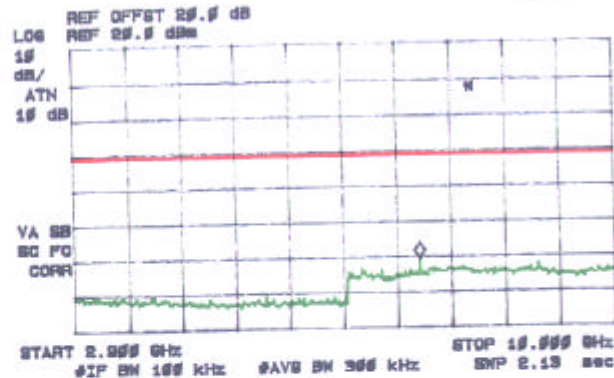

ACTV DET: PEAK No user
 MEAS DET: PEAK QP AVG Menu
 MKR 19.83 GHz
 -38.28 dBm

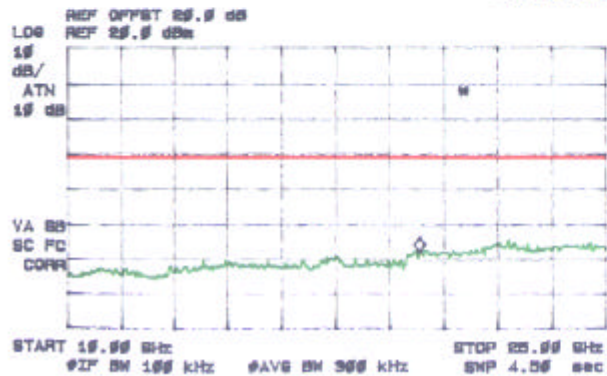

ACTV DET: PEAK No user
 MEAS DET: PEAK QP AVG Menu
 MKR 2.478 GHz
 8.92 dBm

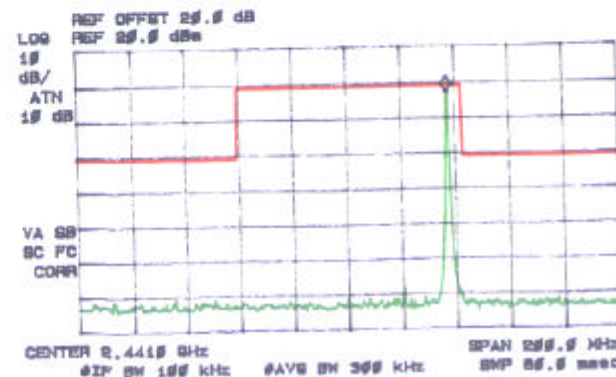

EMC - TEST REPORT

UNITED STATES STANDARD 47 CFR PART 15, SUBPART C

Test Report File No. : **AJ107259-06** Date of Issue: 22 January 2002

Model / Serial No. : GL722 / P046

Product Type : GL700 Series Laser Systems

Applicant : TRIMBLE

Manufacturer : TRIMBLE

License holder : TRIMBLE

Address : 5475 Kellenburger Road
 : Dayton, OH 452601

Test Result : **Positive*** **Negative**

Test Project Number Reference(s) : **AJ107259-06**

Total pages - Test Report : _____

(*) See General Remarks (page 9).

NOTE: All test equipment used during testing is calibrated and traceable to NIST.

TÜV Product Service reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV Product Service, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service, Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service, Inc. and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

Emissions Test Conditions: Radiated Emission (FCC Part 15. Paragraphs 15.247)

The *EMISSIONS* measurements were performed at the following test location:

- Test not applicable

■ - Roof (Small Open Area Test Site) (Calibration Due Date: 16 July 2002)

Testing was performed at a test distance of:

■ - 3 meters

Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Cal Due Date
3146	244	LP Antenna	EMCO	1063	02/02
ESVS30	466	Receiver	Rhode & Schwarz	833825/003	02/02
3115	453	Antenna, Double Ridge	EMCO	9412-4364	12/02
LPB 2520/A	738	Antenna, LPB	Antenna Research	1169	06/02
8566B	823	Spectrum Analyzer and Display	Hewlett Packard	2332A02751/ 2318A05571	07/02

Result:

■ - Pass

- Fail

Remarks: _____

Radiated Emissions (FCC Part 15, Paragraph 15.247)

■ - PASS

- FAIL

- NOT APPLICABLE

Minimum limit margin (Antennas S181FL-5-2450S & S151AH-2450S) See Data Record.

Remarks: _____

GENERAL REMARKS:

NOTE: All photographs are representative of setup for maximum emissions.

SUMMARY:

All tests according to the regulations cited on page 3 were

- Performed
- **Not** Performed

The Equipment Under Test

- **Fulfills** CFR 47, Part 15, Paragraph 15.247, Radiated Emissions
- **Does not** fulfill the general approval requirements cited on page 3.

Statement of Measurement Uncertainty

The data and results referenced in this document are true and accurate. The measurement uncertainty is calculated to be ± 2 dB for conducted emissions and ± 4 dB for radiated emissions.

Equipment Received Date: 15 January 2002
Testing Start Date: 15 January 2002
Testing End Date: 16 January 2002


- TÜV PRODUCT SERVICE, INC. -

Responsible Engineer:



Jim Owen
(EMC Chief Engineer)

Responsible Engineer:



Dave Bernardin
(EMC Engineer)

Report No. AJ107259-06



Technical Documentation

Test Data Sheets

REPORT No: AJ107259 TESTER: Dave Bernardin SPEC: FCC Part 15.247
 CUSTOMER: Trimble *DB* TEST DIST: 3 Meters
 E U T: GL700 Series Laser Systems TEST SITE: Roof
 EUT MODE: Continuous Transmit with S151AH-2450S antenna BICONICAL: N/A
 DATE: Jan15,2002 LOG: N/A
 NOTES: HORN: 453

above 1GHz: RBW & VBW 1 MHz for Pk; RBW 1MHz and VBW 10Hz for AVG
 below 1GHz: RBW & VBW 100 kHz for Pk; RBW 100kHz and VBW 10Hz for AVG
 CF = Antenna Factor + Cable Loss - Preamp Gain + Preselector Loss

v.beta1a

FREQ (MHz)	VERTICAL (dBuv)		HORIZONTAL (dBuv)		CF (dB/m)	MAX LEVEL (dBuV/m)		SPEC LIMIT (dBuV/m)		MARGIN (dB)		EUT Rotation	Antenna Height	Notes
	pk	av	pk	av		pk	av	pk	av	pk	av			
2402	75.2	74.9	59.6	59.5	30.8	106.0	105.7			106	106	92	1.2	Fundamental (Low Band)
4804	49.4	49.4	45.4	35.9	0.9	50.3	50.3	74.0	54.0	-23.7	-3.7	91	1	
7206	45.7	33.6	46.5	36.1	9.2	55.7	45.3	74.0	54.0	-18.3	-8.71	90	1	
9608					11.3	11.3	11.3	74.0	54.0	-62.7	-42.7			Noise Level
12010					15.0	15.0	15.0	74.0	54.0	-59	-39			Noise Level
14412					16.6	16.6	16.6	74.0	54.0	-57.4	-37.4			Noise Level
16814					29.4	29.4	29.4	74.0	54.0	-44.6	-24.6			Noise Level
2440	75.3	75.2	61.8	60.9	31.8	107.1	107.0			107.1	107	84	1	Fundamental (Mid Band)
4880	47.4	36	45.8	37.2	1.2	48.6	39.2	74.0	54.0	-25.4	-14.8	82	1	
7320	44.9	33.9	45.3	32.8	9.3	54.6	43.2	74.0	54.0	-19.4	-10.8	85	1	
9760					11.8	11.8	11.8	74.0	54.0	-62.2	-42.2			Noise Level
12200					15.3	15.3	15.3	74.0	54.0	-58.7	-38.7			Noise Level
14640					17.1	17.1	17.1	74.0	54.0	-56.9	-36.9			Noise Level
17080					23.4	23.4	23.4	74.0	54.0	-50.6	-30.6			Noise Level
2478	76.5	76.5	62.8	62.8	32.7	109.2	109.2			109.2	109	76	1	Fundamental (High Band)
4956	46.7	39	47.7	37.6	1.6	49.3	40.6	74.0	54.0	-24.7	-13.4	78	1	
7434	47.9	40.1	45.7	35.6	9.5	57.4	49.6	74.0	54.0	-16.6	-4.39	79	1	
9912					12.2	12.2	12.2	74.0	54.0	-61.8	-41.8			Noise Level
12390					15.6	15.6	15.6	74.0	54.0	-58.4	-38.4			Noise Level
14868					17.7	17.7	17.7	74.0	54.0	-56.3	-36.3			Noise Level
17346					24.5	24.5	24.5	74.0	54.0	-49.5	-29.5			Noise Level

REPORT No: AJ107259 TESTER: Dave Bernardin SPEC: FCC Part 15.247
 CUSTOMER: Trimble *DBB* TEST DIST: 3 Meters
 E U T: GL700 Series Laser Systems TEST SITE: Roof
 EUT MODE: Continuous Transmit with S181FL-5-2450S antenna BICONICAL: N/A
 DATE: Jan15,2002 LOG: N/A
 NOTES: HORN: 453

above 1GHz: RBW & VBW 1 MHz for Pk; RBW 1MHz and VBW 10Hz for AVG
 below 1GHz: RBW & VBW 100 kHz for Pk; RBW 100kHz and VBW 10Hz for AVG
 CF = Antenna Factor + Cable Loss - Preamplifier Gain + Preselector Loss

v.beta1a

FREQ (MHz)	VERTICAL (dBuv)		HORIZONTAL (dBuv)		CF (dB/m)	MAX LEVEL (dBuV/m)		SPEC LIMIT (dBuV/m)		MARGIN (dB)		EUT Rotation	Antenna Height	Notes
	pk	av	pk	av		pk	av	pk	av	pk	av			
2402	71.5	71.5	67.3	67	30.8	102.3	102.3			102.3	102	92	1.2	Fundamental (Low Band)
4804	49.7	41.5	50.5	42.1	0.9	51.4	43.0	74.0	54.0	-22.6	-11	91	1	
7206	46.9	37.6	46.5	36.1	9.2	56.1	46.8	74.0	54.0	-17.9	-7.21	90	1	
9608					11.3	11.3	11.3	74.0	54.0	-62.7	-42.7			Noise Level
12010					15.0	15.0	15.0	74.0	54.0	-59	-39			Noise Level
14412					16.6	16.6	16.6	74.0	54.0	-57.4	-37.4			Noise Level
16814					29.4	29.4	29.4	74.0	54.0	-44.6	-24.6			Noise Level
2440	71.5	71.5	68.4	68	31.8	103.3	103.3			103.3	103	84	1	Fundamental (Mid Band)
4880	47.7	42.7	48.8	40.5	1.2	50.0	43.9	74.0	54.0	-24	-10.1	82	1	
7320	42.8	33.4	43.1	32.4	9.3	52.4	42.7	74.0	54.0	-21.6	-11.3	85	1	
9760					11.8	11.8	11.8	74.0	54.0	-62.2	-42.2			Noise Level
12200					15.3	15.3	15.3	74.0	54.0	-58.7	-38.7			Noise Level
14640					17.1	17.1	17.1	74.0	54.0	-56.9	-36.9			Noise Level
17080					23.4	23.4	23.4	74.0	54.0	-50.6	-30.6			Noise Level
2478	73.6	73.5	67	66	32.7	106.3	106.2			106.3	106	76	1	Fundamental (High Band)
4956	47.2	42.8	48.5	40.8	1.6	50.1	44.4	74.0	54.0	-23.9	-9.6	78	1	
7434	44.3	40.1	43.6	36	9.5	53.8	49.6	74.0	54.0	-20.2	-4.39	79	1	
9912					12.2	12.2	12.2	74.0	54.0	-61.8	-41.8			Noise Level
12390					15.6	15.6	15.6	74.0	54.0	-58.4	-38.4			Noise Level
14868					17.7	17.7	17.7	74.0	54.0	-56.3	-36.3			Noise Level
17346					24.5	24.5	24.5	74.0	54.0	-49.5	-29.5			Noise Level