



# FCC Test Report

Test report no.: EMC\_902FCC15.247\_2005\_M75

FCC Part 15.247 for FHSS systems / CANADA RSS-210

Model: M75

FCC ID: PWX-M75

IC: 267E-M75



**TTI-P-G 081/94-A0**

Accredited according to **ISO/IEC 17025**



**Bluetooth Qualification  
Test Facility  
(BQTF)**



FCC listed # 101450

IC recognized # 3925

## **CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

**Table of Contents**

<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>
<b>1.2</b>	<b>Testing laboratory</b>
<b>1.3</b>	<b>Details of applicant</b>
<b>1.4</b>	<b>Application details</b>
<b>1.5</b>	<b>Test item</b>
<b>1.6</b>	<b>Test standards</b>
<b>2</b>	<b>Technical test</b>
<b>2.1</b>	<b>Summary of test results</b>
<b>2.2</b>	<b>Test report</b>
<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

**TEST REPORT PREPARED BY:****EMC Engineer: Harpreet Sidhu**

**1.2 Testing laboratory**  
**CETECOM Inc.**  
**411 Dixon Landing Road, Milpitas, CA-95035, USA**  
**Phone: +1 408 586 6200 Fax: +1 408 586 6299**  
**E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)**  
**Internet: [www.cetecom.com](http://www.cetecom.com)**

**1.3 Details of applicant**

**Name** : SIEMENS Information and Communication Mobile LLC  
**Street** : 16745 West Bernardo Drive Suite 400  
**City / Zip Code** : San Diego, CA 92127  
**Country** : USA  
**Contact** : Kevin Wolentarski  
**Telephone** : 858-521-3352  
**Tele-fax** : 858-521-3105  
**e-mail** : [kevin.wolentarski@siemens.com](mailto:kevin.wolentarski@siemens.com)

**1.4 Application details**

Date of receipt test item : 2005-04-15  
Date of test : 2005-04-15/18/19/20/25

**1.5 Test item**

Manufacturer : SIEMENS Communications, Inc.  
Street Address : Sudstr. 9  
City / Zip Code : D-47475 Kamp-Lintfort  
Country : Germany  
Marketing Name : M75  
Model No. : **M75**  
Description : GSM 1900 Mobile phone with BT  
FCC-ID : PWX-M75  
IC ID : 267E-M75

**Additional information**

Test Sample : IMEI: 00-4400-00-939544-1  
Frequency : 2402MHz – 2480MHz for BT  
Type of modulation : GFSK  
Number of channels : 79  
Antenna : External  
Power supply : Battery or Charger (AC Adaptor)  
Output power : -2.05dBm (0.623mW) max. conducted peak power  
Extreme vol. Limits : 3.6VDC to 4.5VDC (nominal: 3.7VDC)  
Extreme temp. Tolerance : -30°C to +50°C

**1.6 Test standards: FCC Part 15 §15.247 (DA00-705) / RSS 210**

**Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.**

**2 Technical test****2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests  
Performed

Final Verdict:  
(only “passed” if all single measurements are “passed”)

**Passed**

**Technical responsibility for area of testing:**

2005-05-27    EMC & Radio    Lothar Schmidt (Manager)



Date

Section

Name

Signature

**Responsible for test report and project leader:**

2005-05-27    EMC & Radio    Harpreet Sidhu (EMC Engineer)



Date

Section

Name

Signature

## **2.2 Test report**

### **TEST REPORT**

**Test report no.: EMC\_902FCC15.247\_2005\_M75**

**TEST REPORT REFERENCE**

<b>LIST OF MEASUREMENTS</b>	<b>PAGE</b>
<b>CARRIER FREQUENCY SEPERATION §15.247(a)</b>	<b>7</b>
<b>NUMBER OF HOPPING CHANNELS §15.247(a)</b>	<b>8</b>
<b>TIME OF OCCUPANCY (DWELL TIME) §15.247(a)</b>	<b>12</b>
<b>SPECTRUM BANDWIDTH OF FHSS SYSTEM §15.247(a)</b>	<b>15</b>
<b>MAXIMUM PEAK OUTPUT POWER (CONDUCTED) § 15.247 (b) (1)</b>	<b>19</b>
<b>MAXIMUM PEAK OUTPUT POWER (RADIATED) § 15.247 (b) (1)</b>	<b>23</b>
<b>BAND EDGE COMPLIANCE §15.247 (c)</b>	<b>27</b>
<b>EMISSION LIMITATIONS Transmitter (Conducted) § 15.247 (c) (1)</b>	<b>31</b>
<b>EMISSION LIMITATIONS Transmitter (Radiated) § 15.247 (c) (1)</b>	<b>35</b>
<b>CO-LOCATION – (Radiated) Transmitter</b>	<b>46</b>
<b>CONDUCTED EMISSIONS § 15.107/207</b>	<b>51</b>
<b>RECEIVER SPURIOUS RADIATION § 15.209</b>	<b>53</b>
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>	<b>59</b>
<b>BLOCK DIAGRAMS</b>	<b>60</b>

## CARRIER FREQUENCY SEPERATION

§15.247(a)



Marker 1 [T1]

RBW 30 kHz RF Att 40 dB

Ref Lvl

-2.89 dBm

VBW 100 kHz

25.2 dBm


2.43999900 GHz

SWT

8.5 ms

Unit

dBm

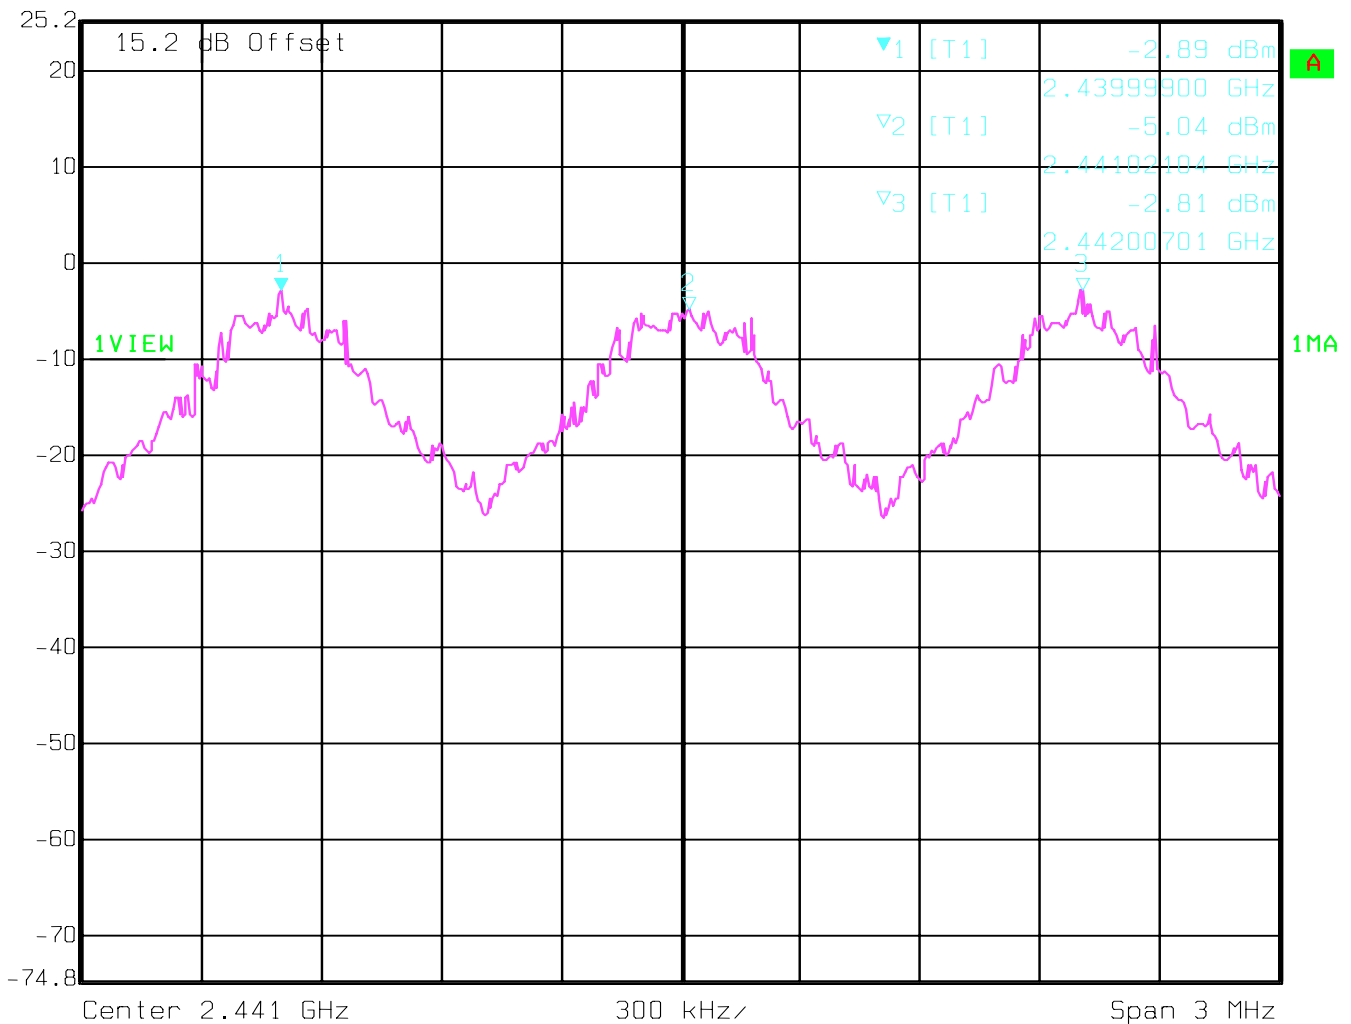


Date: 05.MAY 2005 15:18:31

## NUMBER OF HOPPING CHANNELS

§15.247(a)

The number of hopping channels is 79 (see next 4 plots)  
The F1 line corresponds to the F2 line from the next plot.


### Plot 1: Total 24

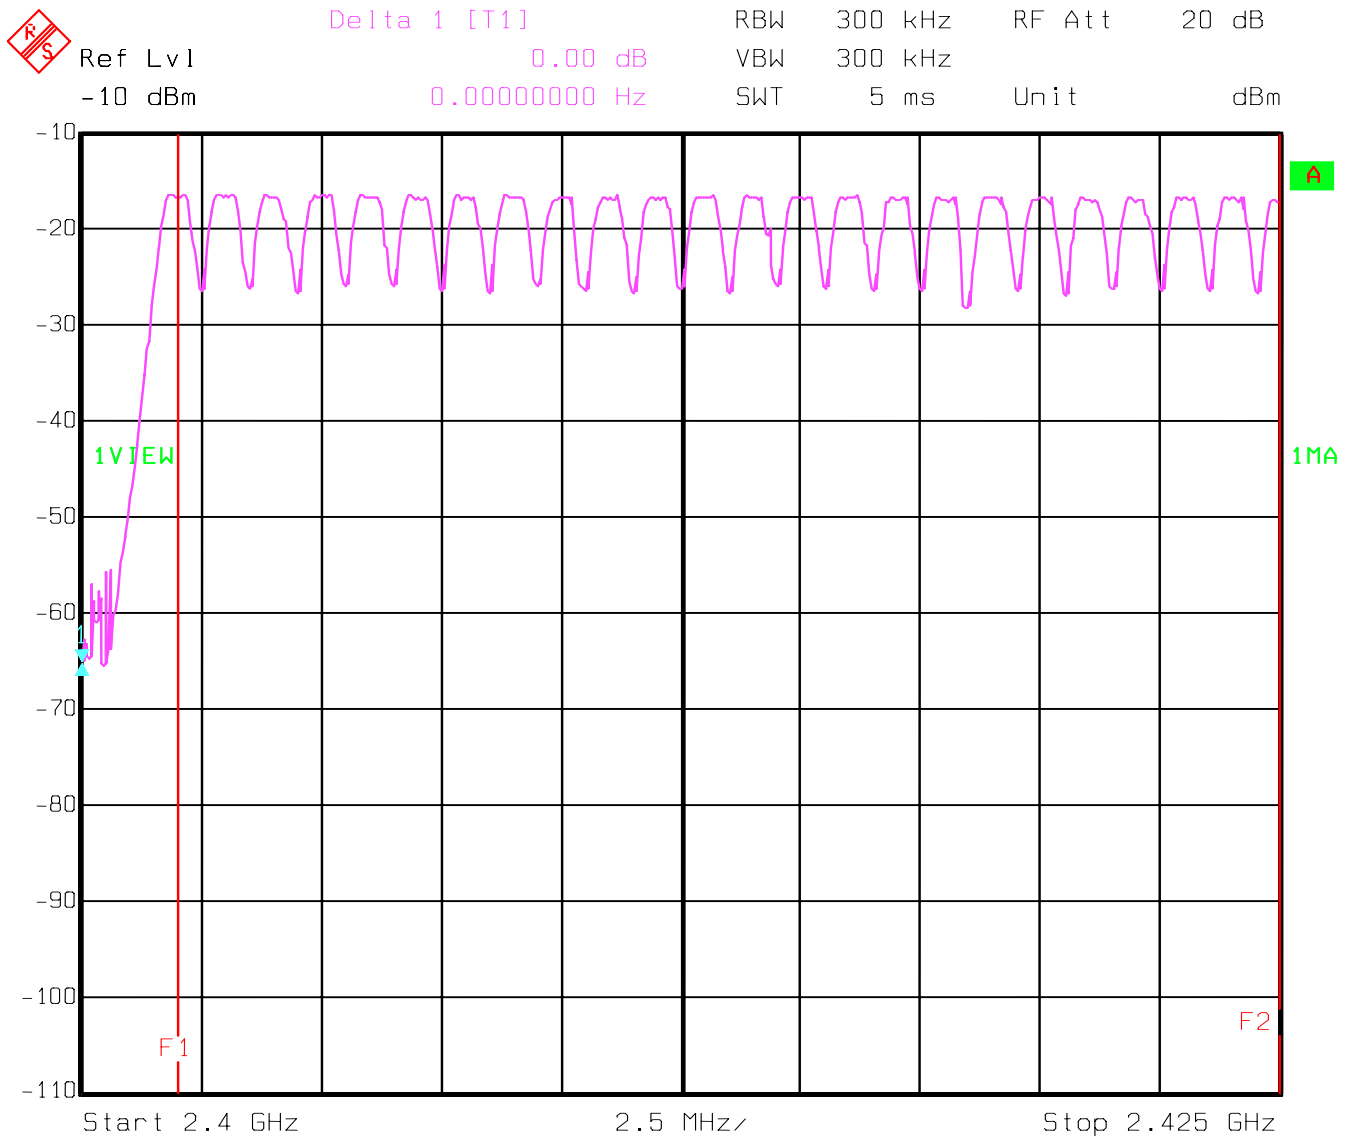

Date: 05.MAY 2005 15:56:32




## Plot 2: Total 25

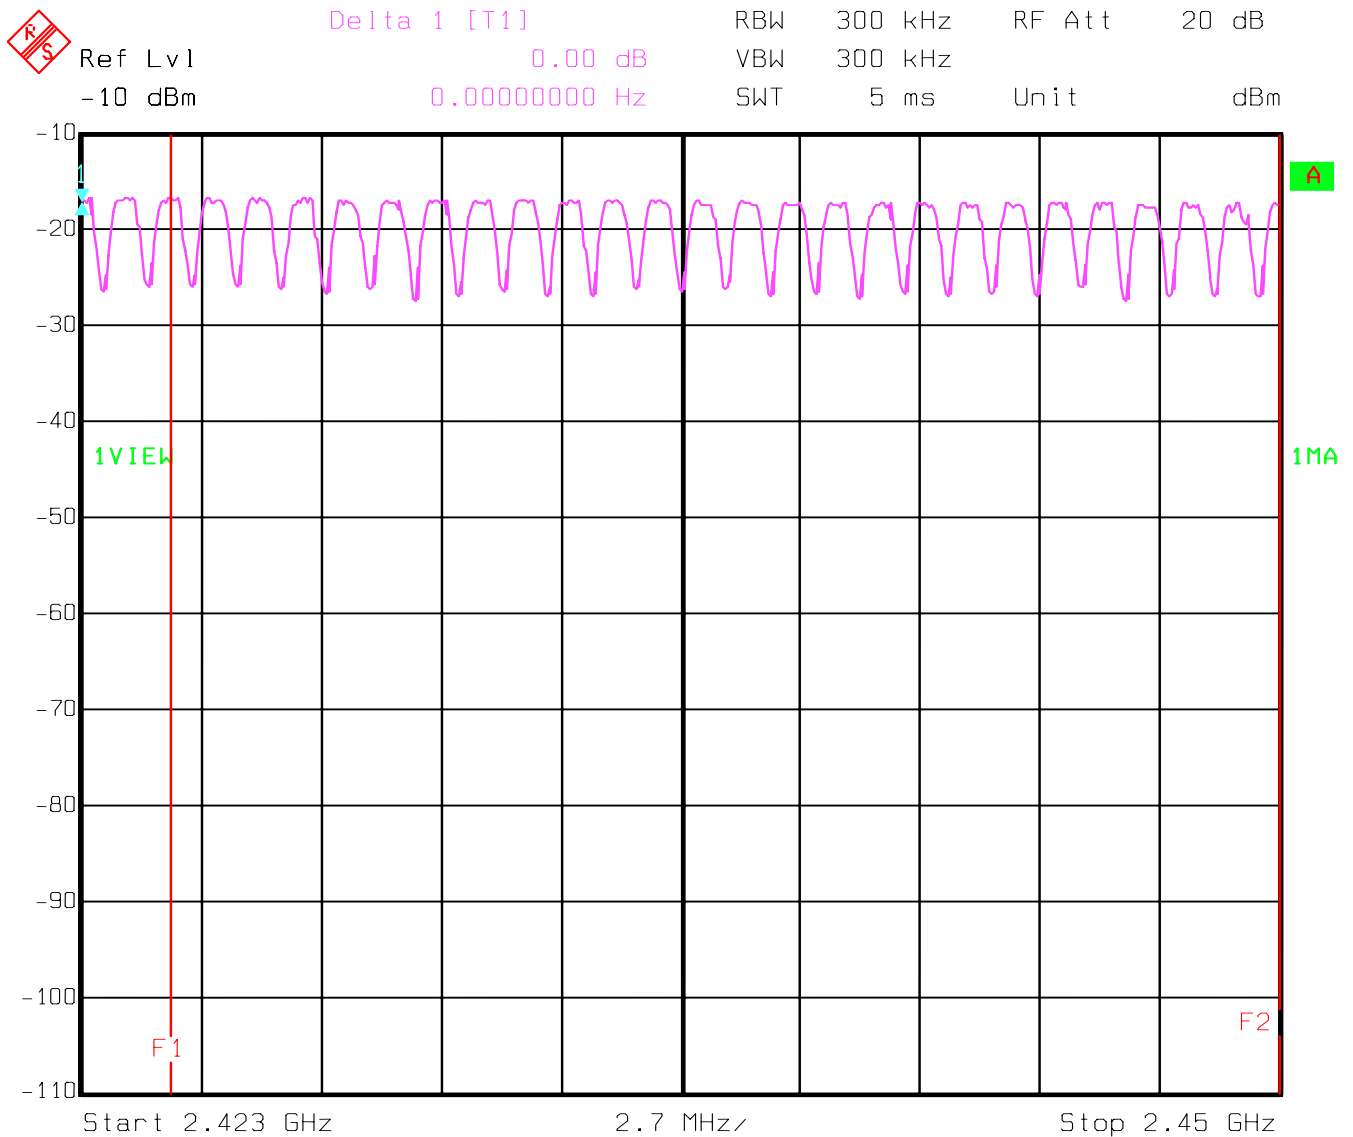


Date: 05.MAY 2005 15:58:31

## Plot 3: Total 20

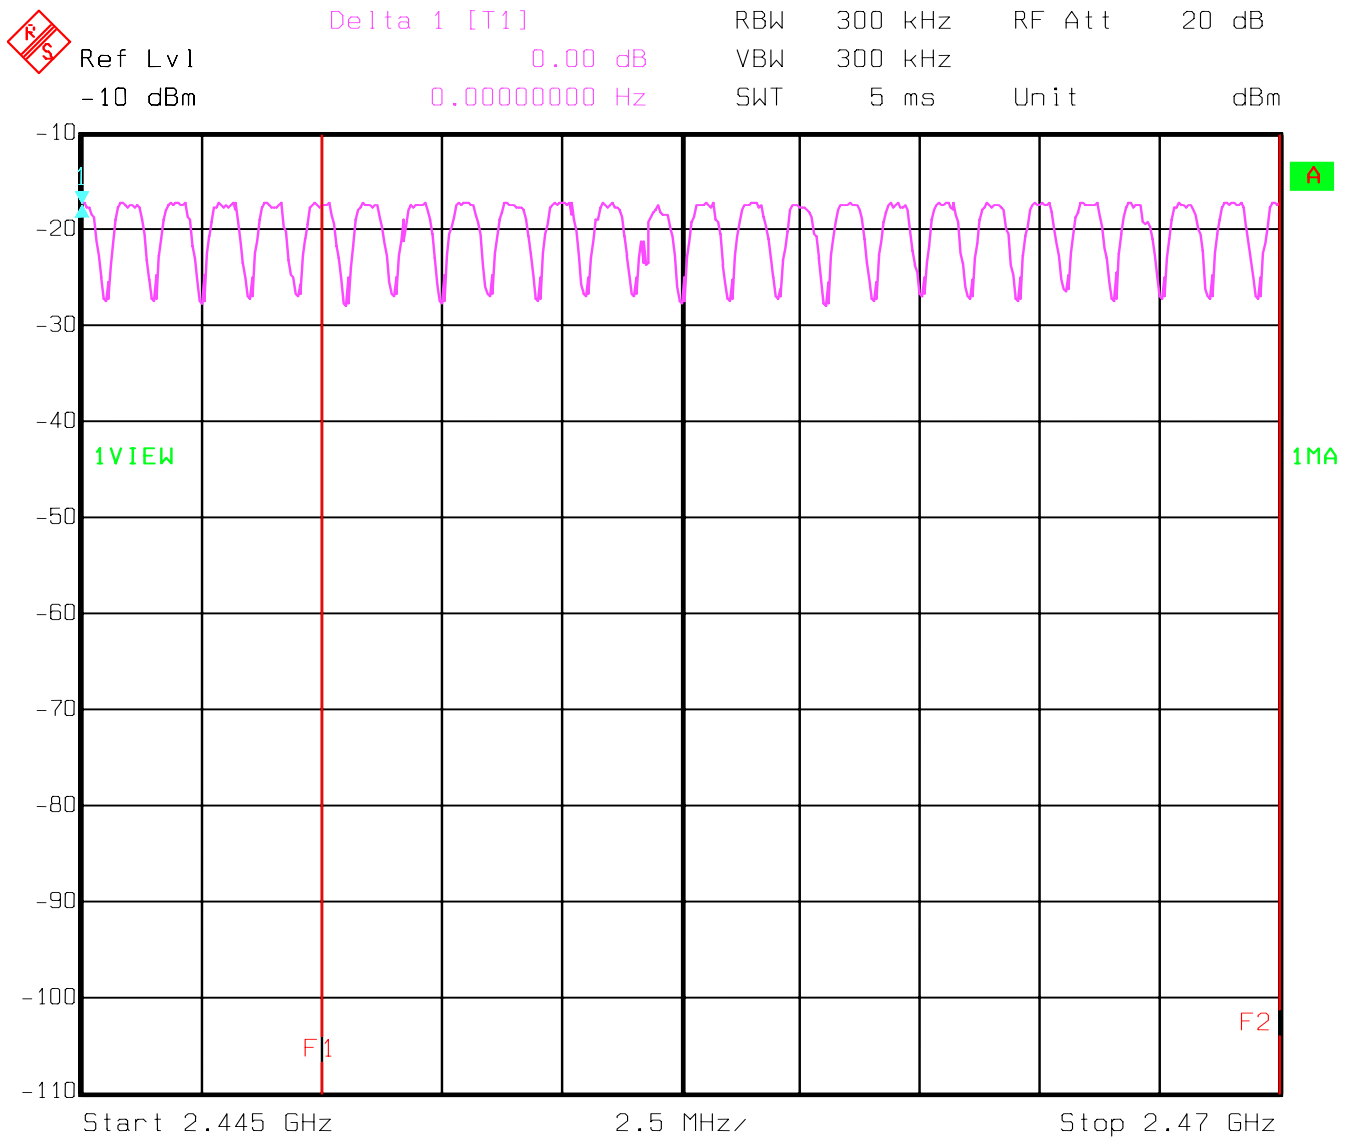

Date: 05.MAY 2005 15:50:39

## Plot 4: Total 10

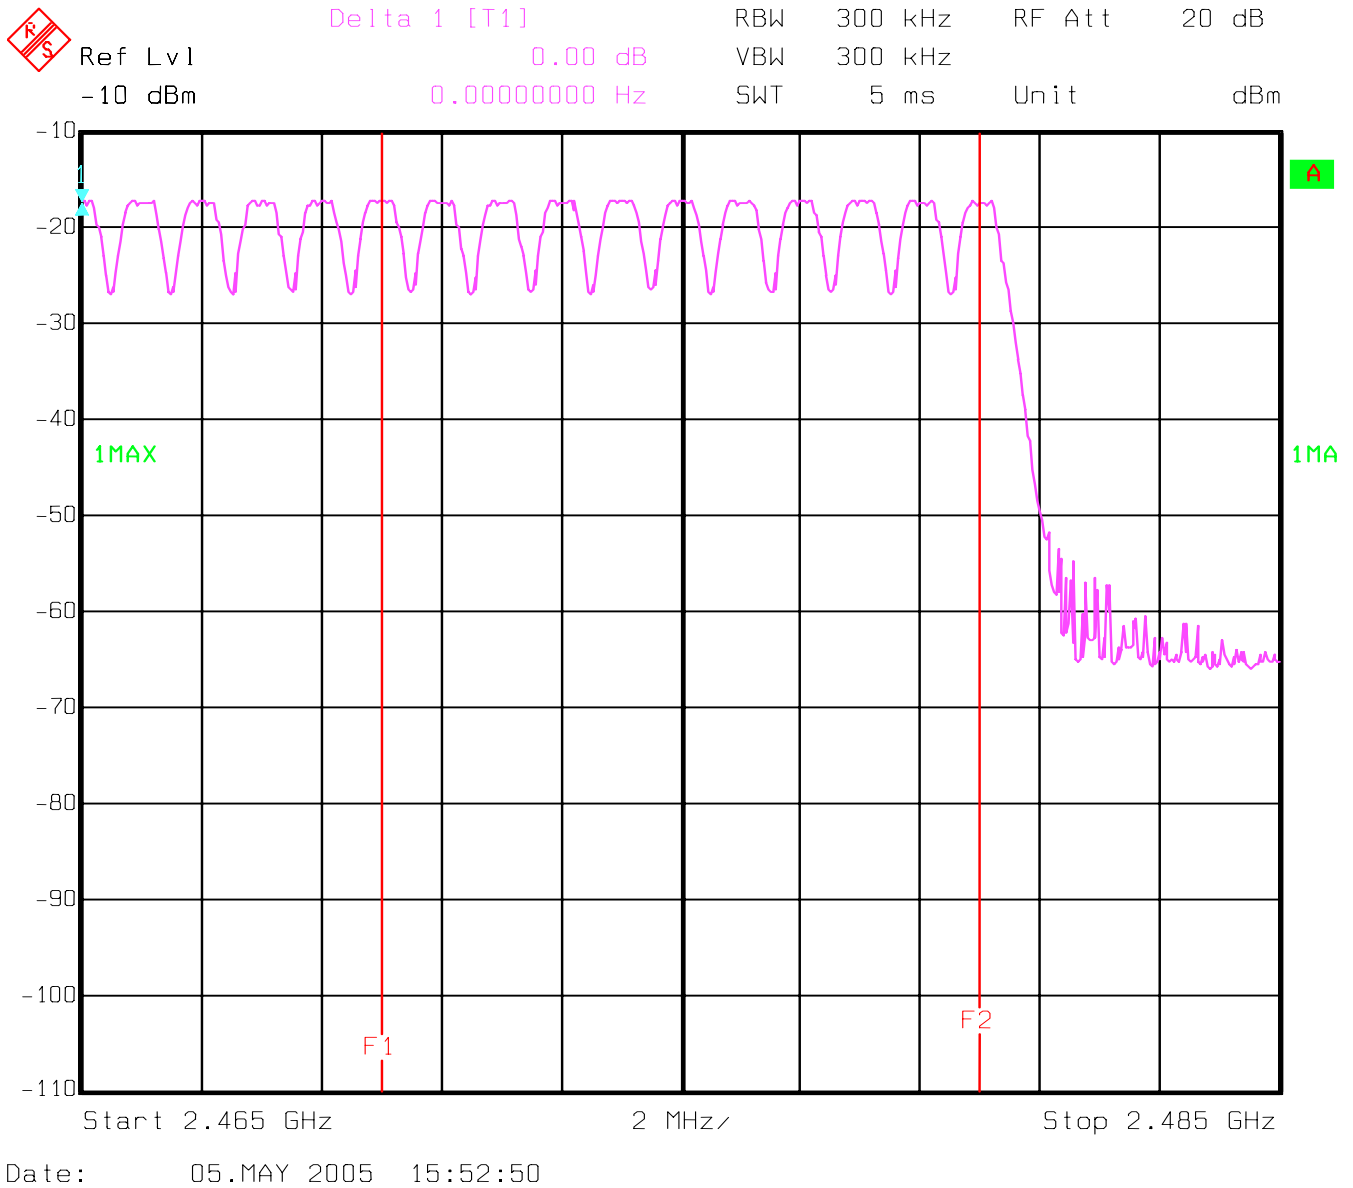

## TIME OF OCCUPANCY (DWEELL TIME)


§15.247(a)

### DH1 – Packet

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and so for 31.6 seconds you have 320.108 times of appearance.

Each Tx-time per appearance is 417.38µs.

So we have  $320.108 * 417.38\mu s = 133.6ms$  per 31.6 seconds.

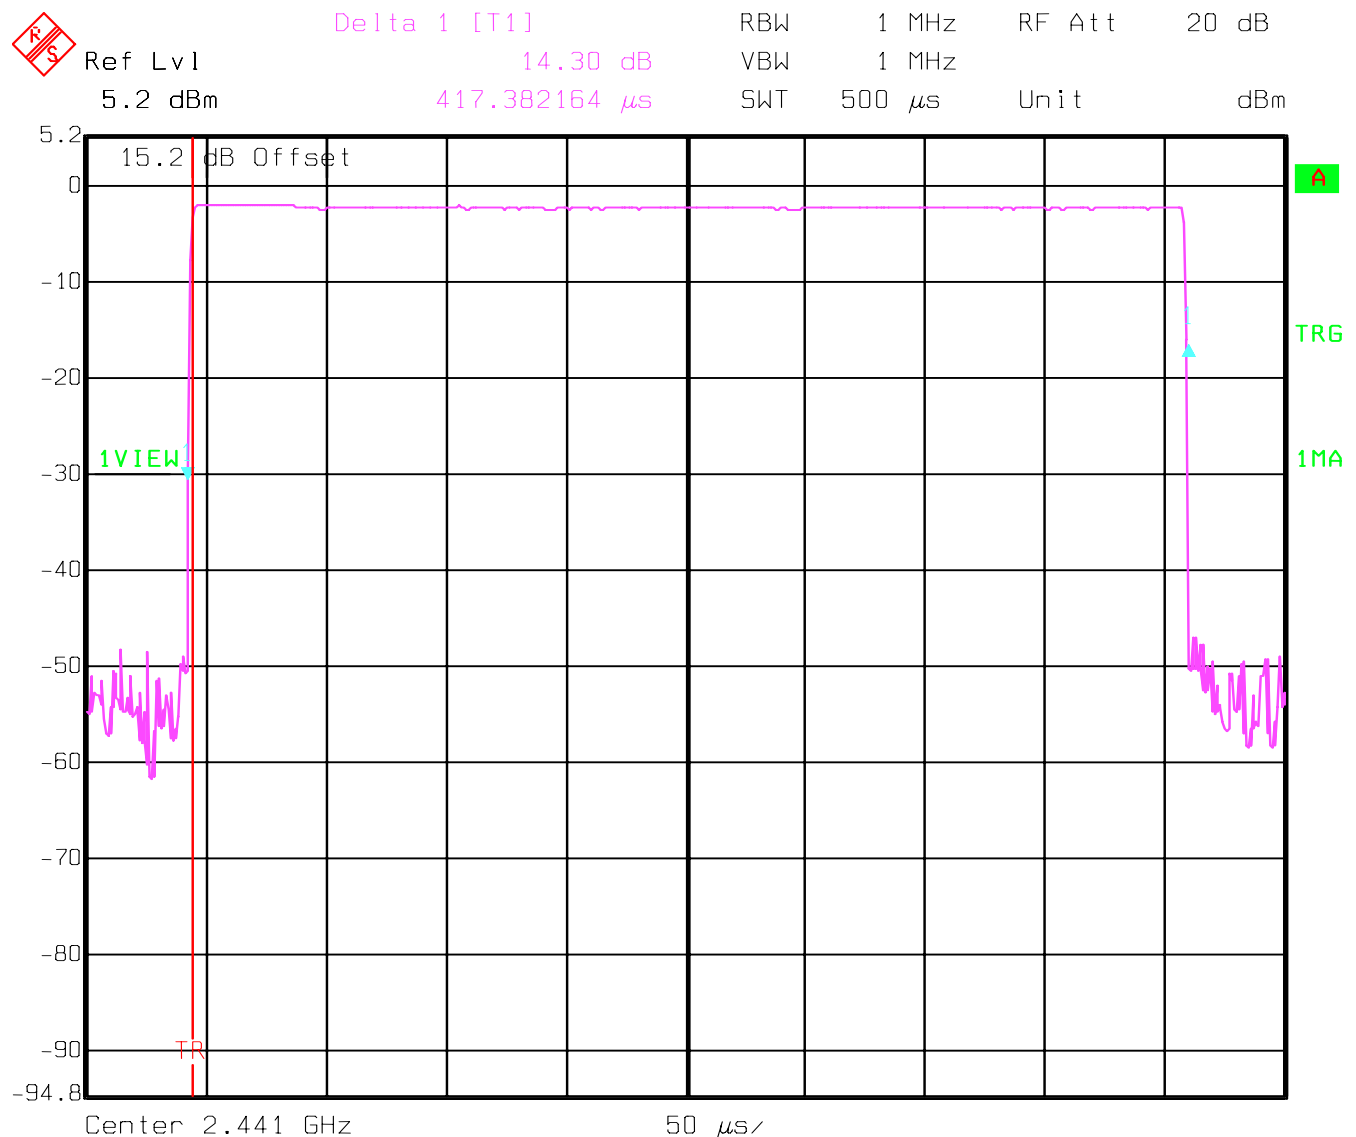

Date: 05.MAY 2005 15:42:26


## TIME OF OCCUPANCY (DWELL TIME) DH3 – Packet

§15.247(a)

A DH3 Packets need 3 time slots for transmit and 1 for receiving, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 31.6 seconds you have 161.16 times of appearance.

Each Tx-time per appearance is 1.676ms.

So we have  $161.16 * 1.676\text{ms} = 270.10\text{ms}$  per 31.6 seconds.

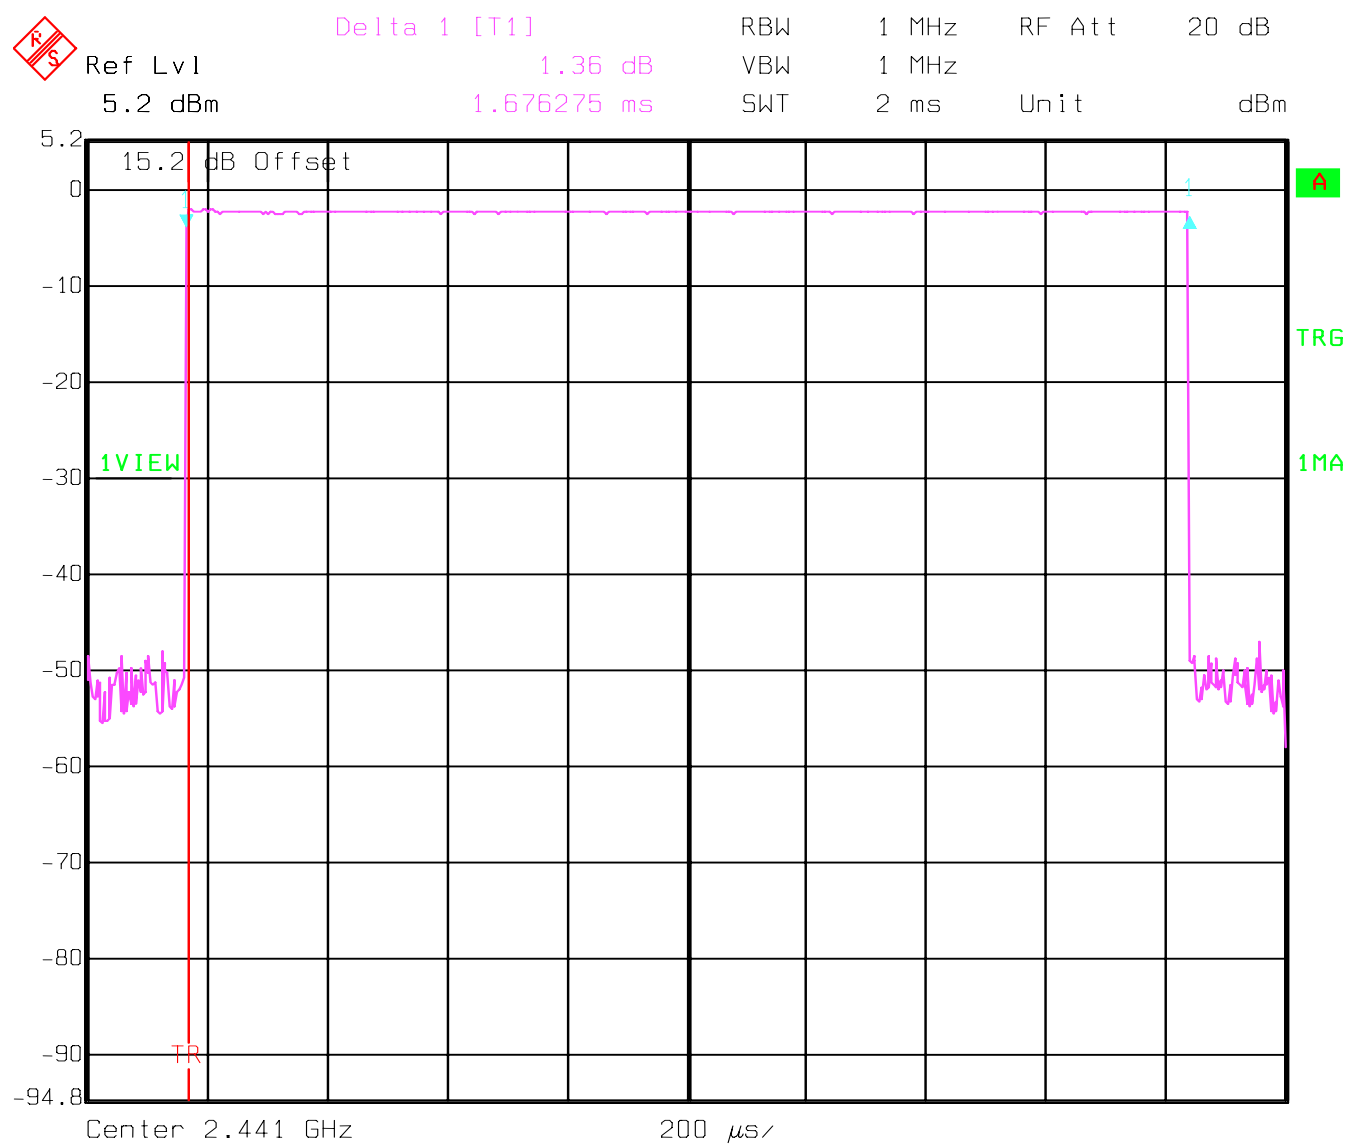

Date: 05.MAY 2005 15:40:03


## TIME OF OCCUPANCY (DWELL TIME) DH5 – Packet

§15.247(a)

At DH5 Packets you need 5 time slots for transmit and 1 for receiving, then the system makes worst case 266.7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 106.176 times of appearance.

Each Tx-time per appearance is 2.925ms.

So we have  $106.176 * 2.925\text{ms} = 310.65\text{ms}$  per 31.6 seconds.

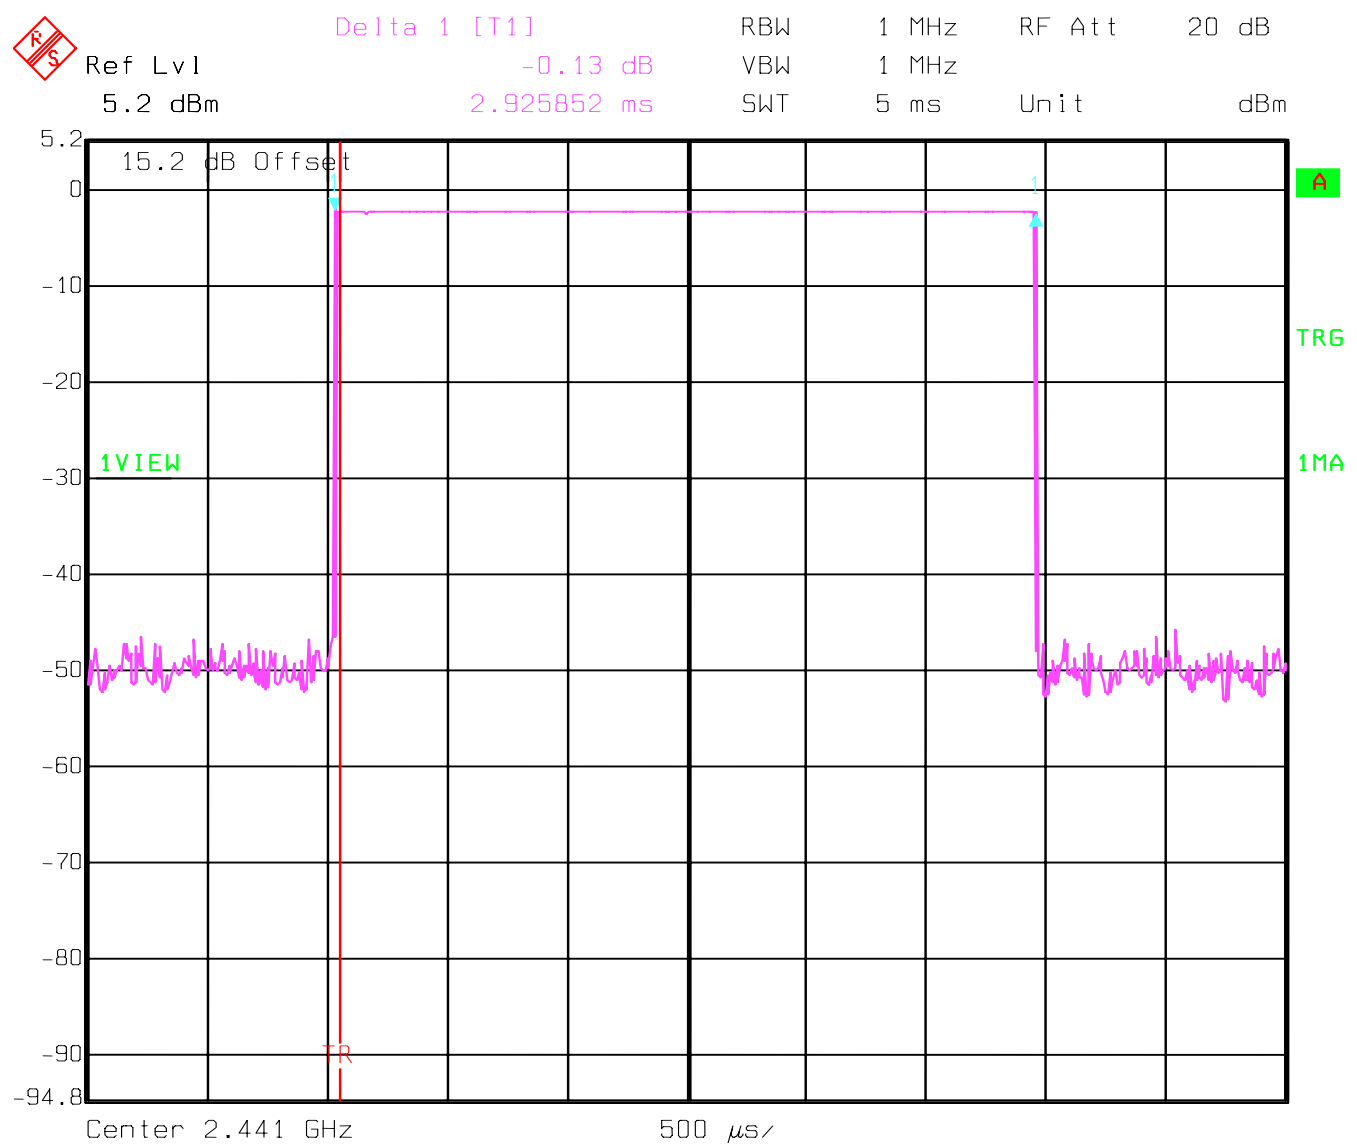

Date: 05.MAY 2005 15:37:38

**SPECTRUM BANDWIDTH OF FHSS SYSTEM**  
**20 dB bandwidth****§15.247(a)**

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
Frequency (MHz)		2402	2441	2480
<b>T<sub>nom</sub>(23)°C</b>	<b>V<sub>nom</sub>(2.5)VDC</b>	<b>925.85</b>	<b>925.85</b>	<b>925.85</b>


RBW / VBW as provided in the "Measurement Guidelines" (DA 00-705, March 30, 2000)

**LIMIT****SUBCLAUSE §15.247(a) (1)****The maximum 20dB bandwidth shall be at maximum 1000 KHz**

## SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)

Lowest Channel: 2402MHz

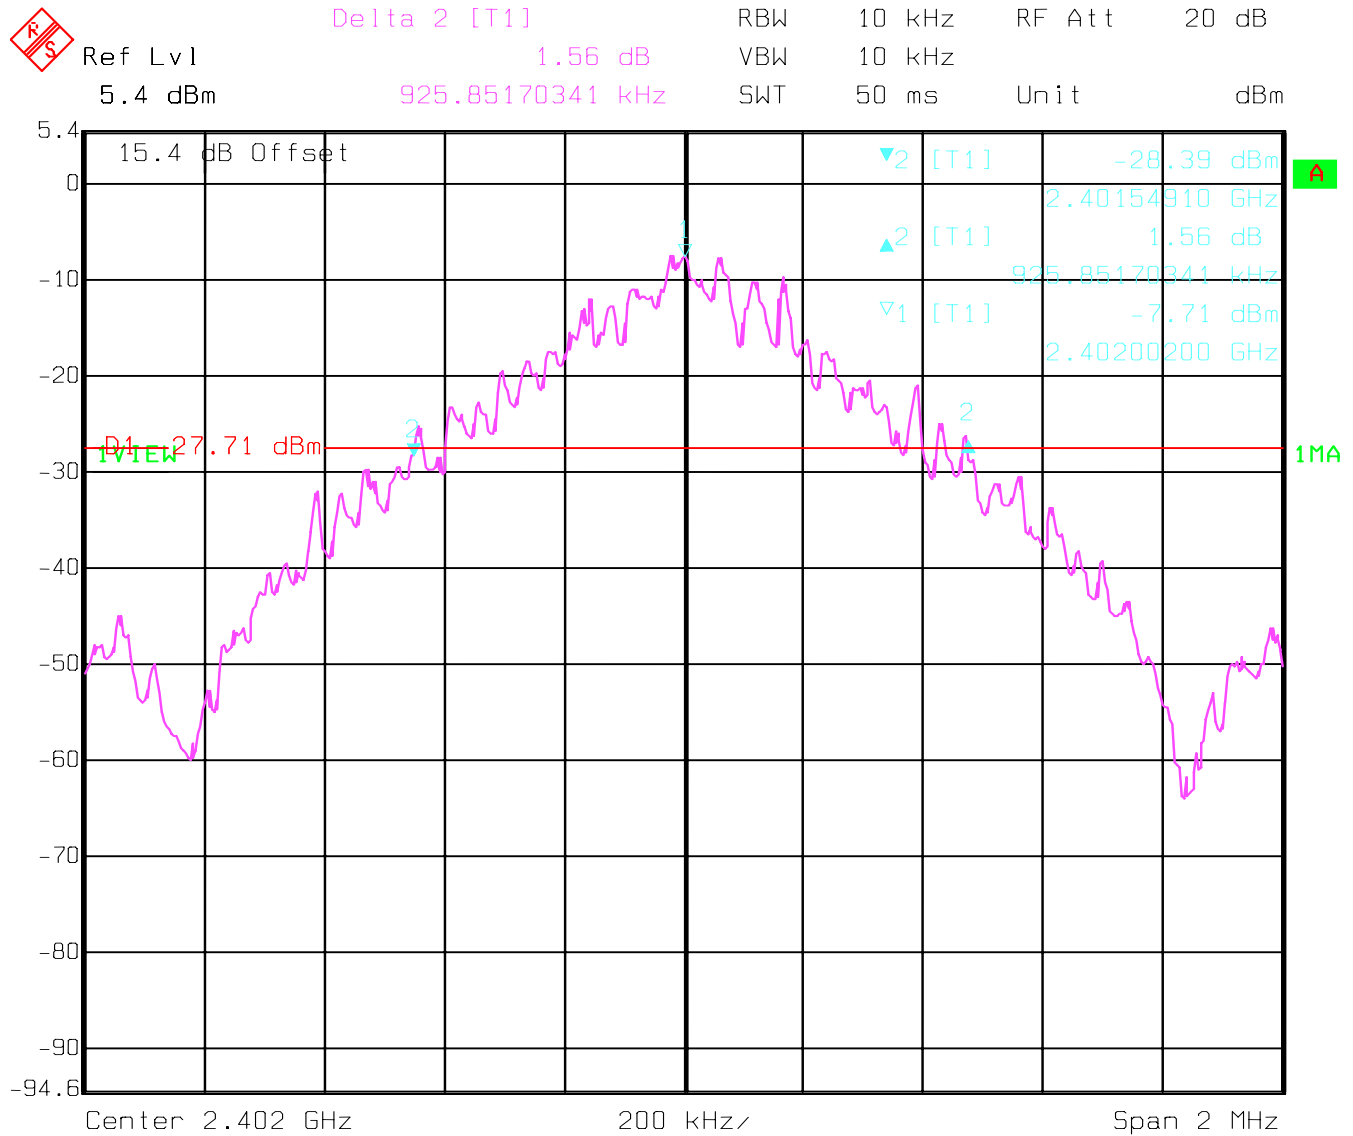


Date: 05.MAY 2005 15:11:45



## SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)

Mid Channel: 2441MHz

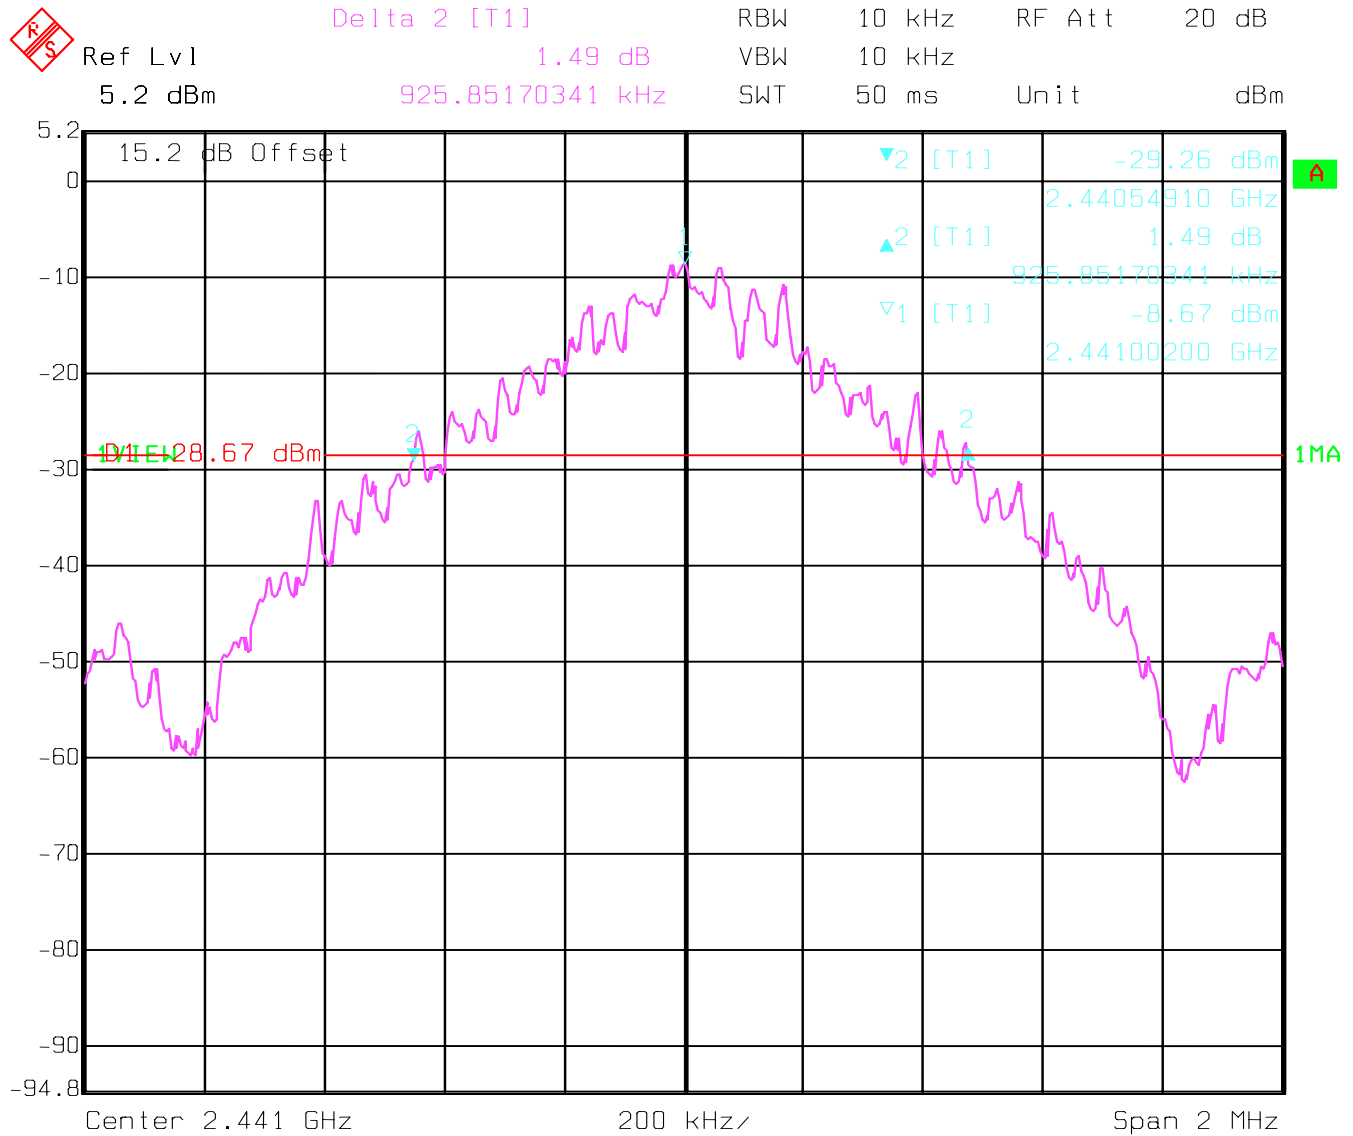


Date: 05.MAY 2005 15:09:49

## SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)

Highest Channel: 2480MHz

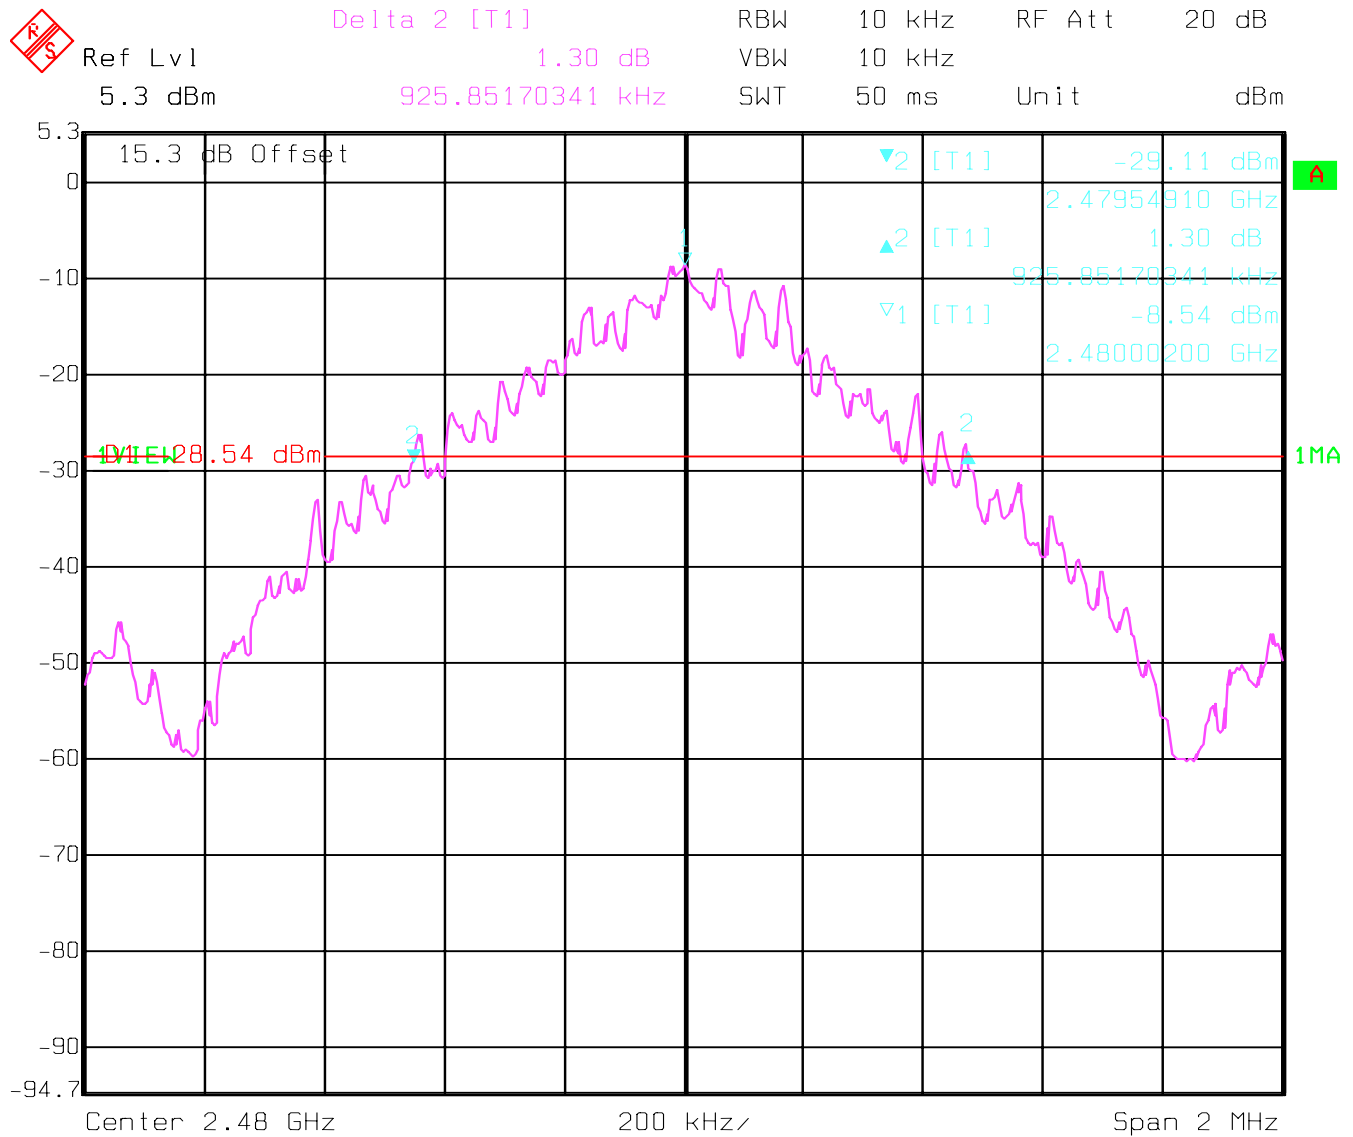

Date: 05.MAY 2005 15:06:13

**MAXIMUM PEAK OUTPUT POWER (CONDUCTED)****§ 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (2.5)VDC	-2.07	-2.55	-2.04
Measurement uncertainty		±0.5dBm		

RBW / VBW: 3 MHz


**LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

## PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Lowest Channel: 2402MHz

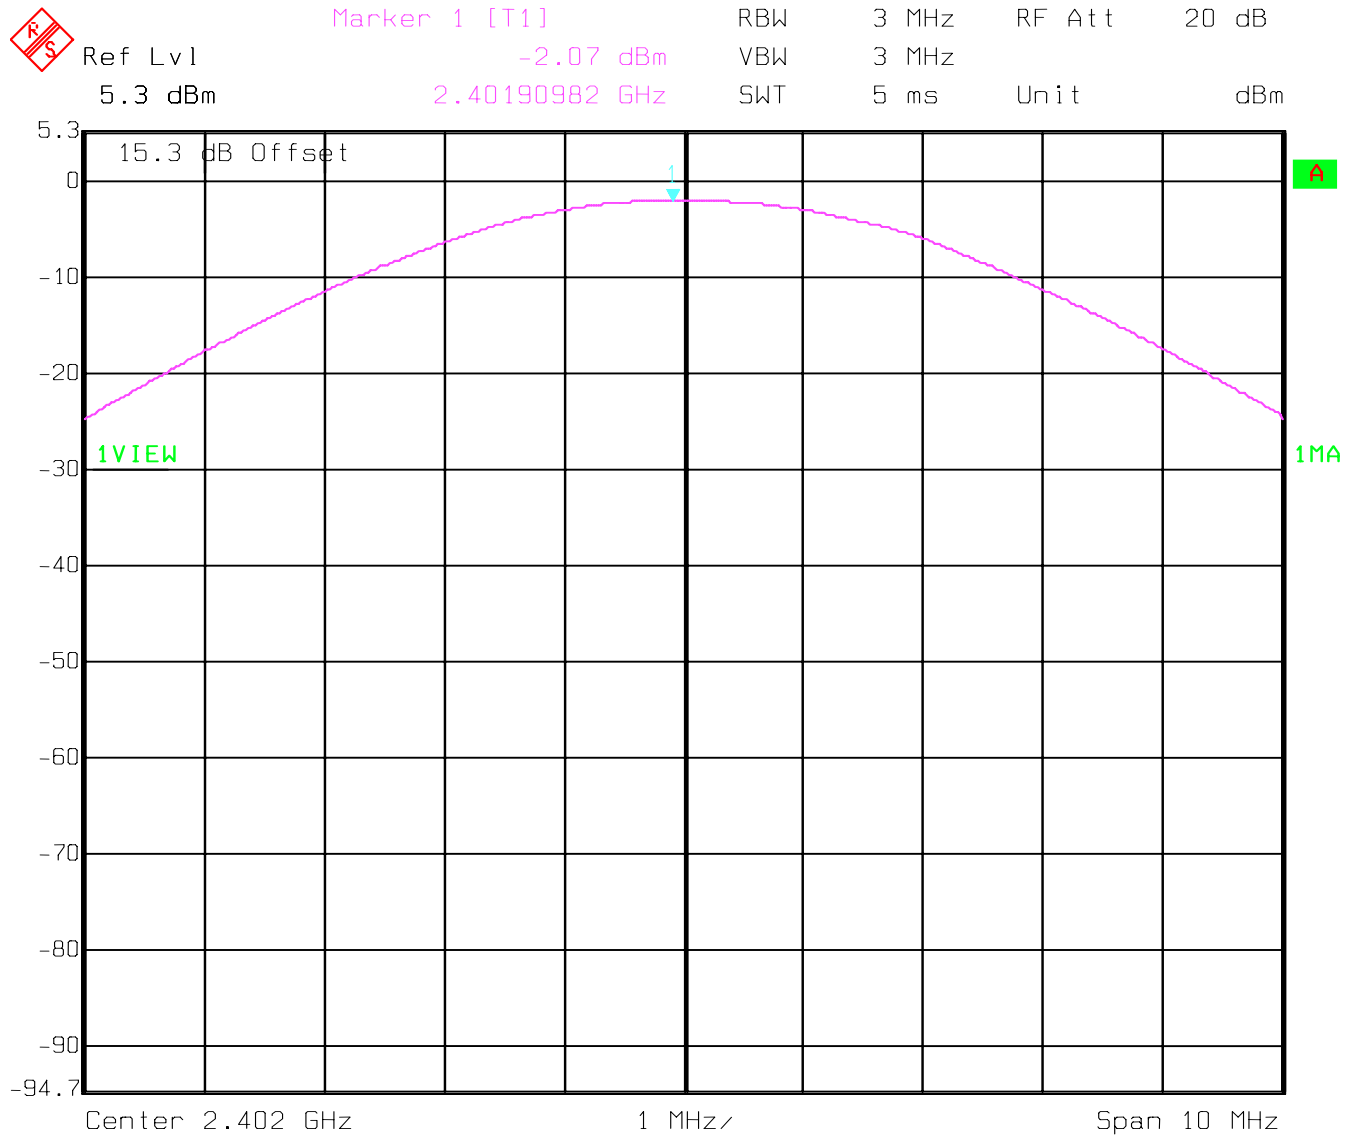


Date: 05.MAY 2005 15:01:08

## PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Mid Channel: 2441MHz

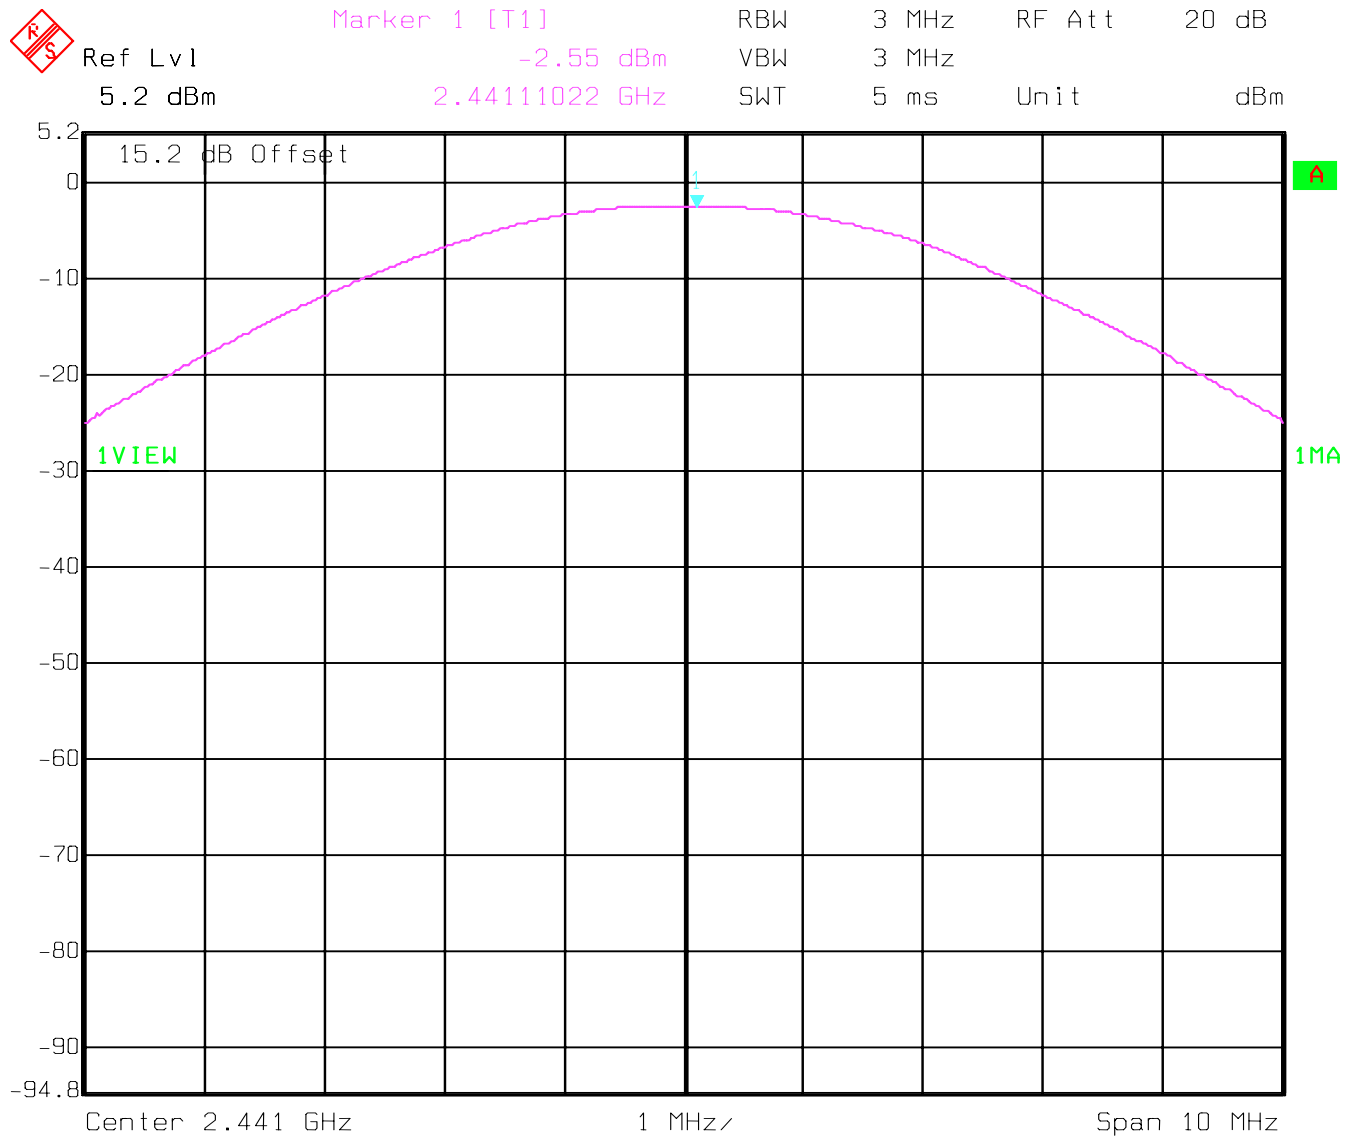


Date: 05.MAY 2005 15:02:05

## PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Highest Channel: 2480MHz

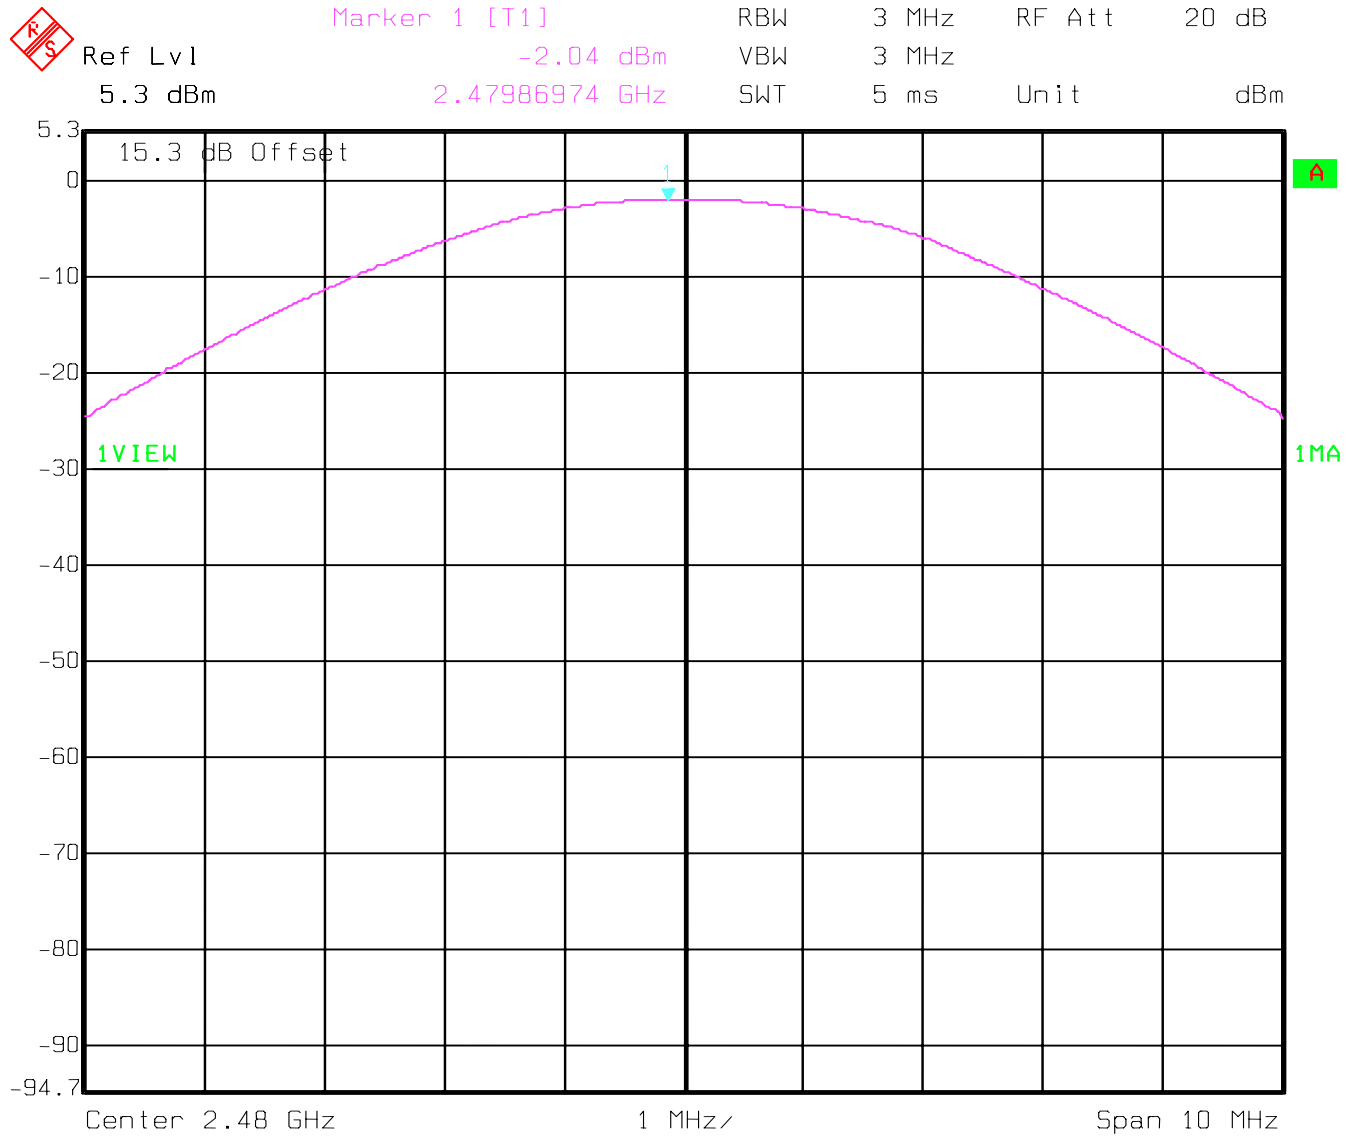

Date: 05.MAY 2005 15:04:03

**MAXIMUM PEAK OUTPUT POWER (RADIATED)****§ 15.247 (b) (1)****EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (2.5)VDC	-1.48	-1.10	0.30
Measurement uncertainty		±0.5dBm		
Substitution Method				

RBW/VBW: 3 MHz

**LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

# PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Lowest Channel: 2402MHz

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2.397GHz	2.407GHz	Max Peak	Coupled	3 MHz

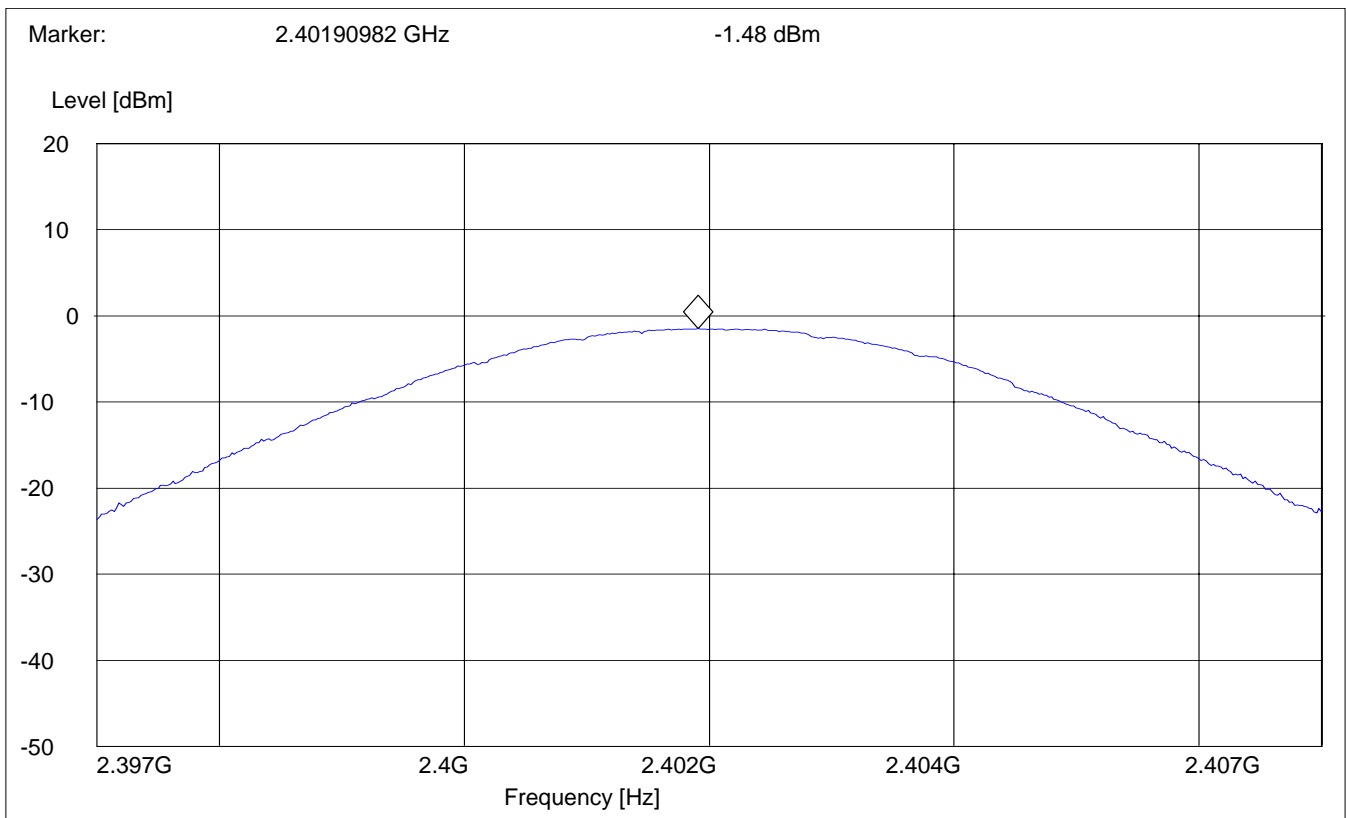



# PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Mid Channel: 2441MHz

SWEEP TABLE: "EIRP BT Mid channel"

Short Description: EIRP Bluetooth channel-2441MHz

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2.436GHz	2.446GHz	Max Peak	Coupled	3 MHz

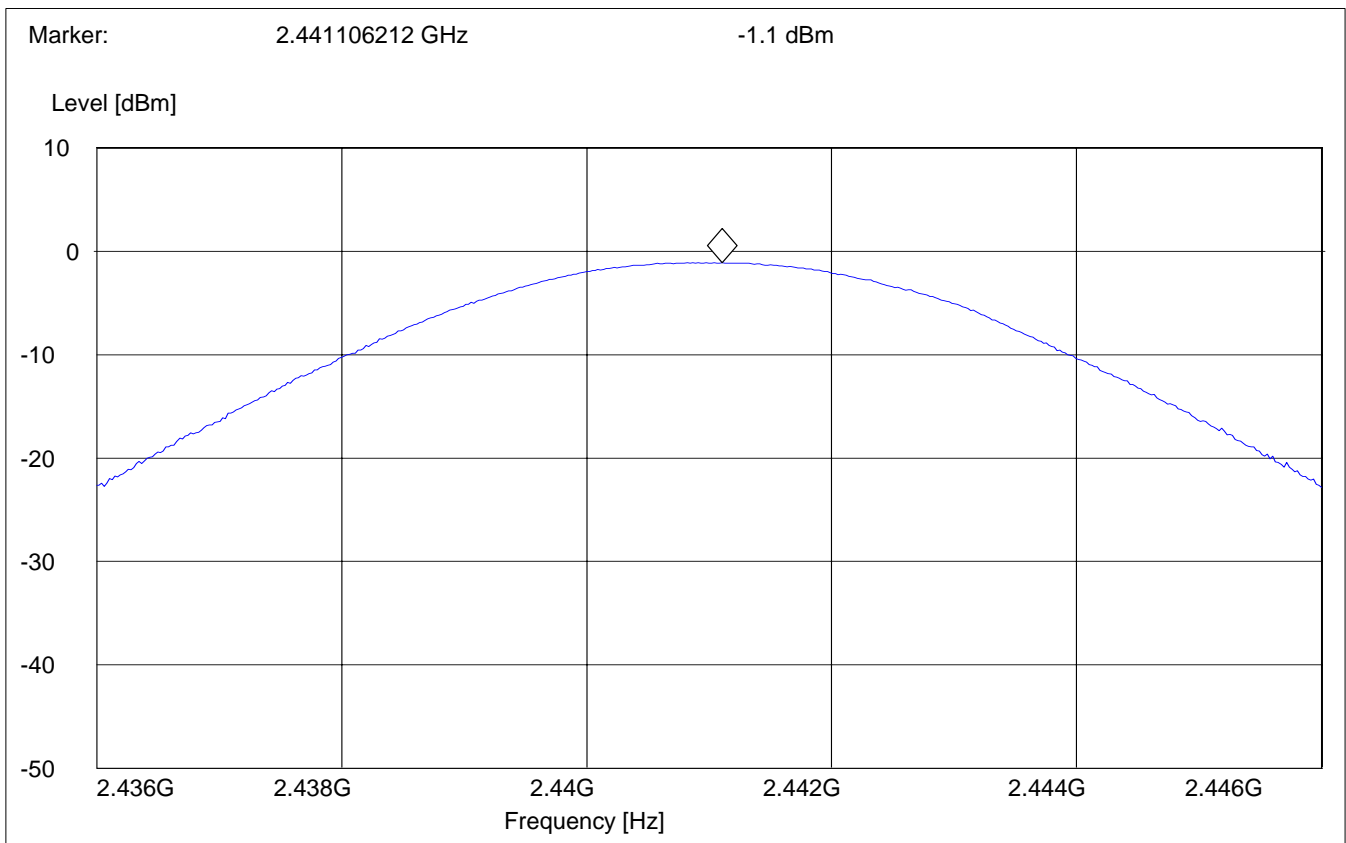

# PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Highest Channel: 2480MHz

SWEEP TABLE: "EIRP BT High channel"

Short Description: EIRP Bluetooth channel-2480MHz

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2.475GHz	2.485GHz	Max Peak	Coupled	3 MHz

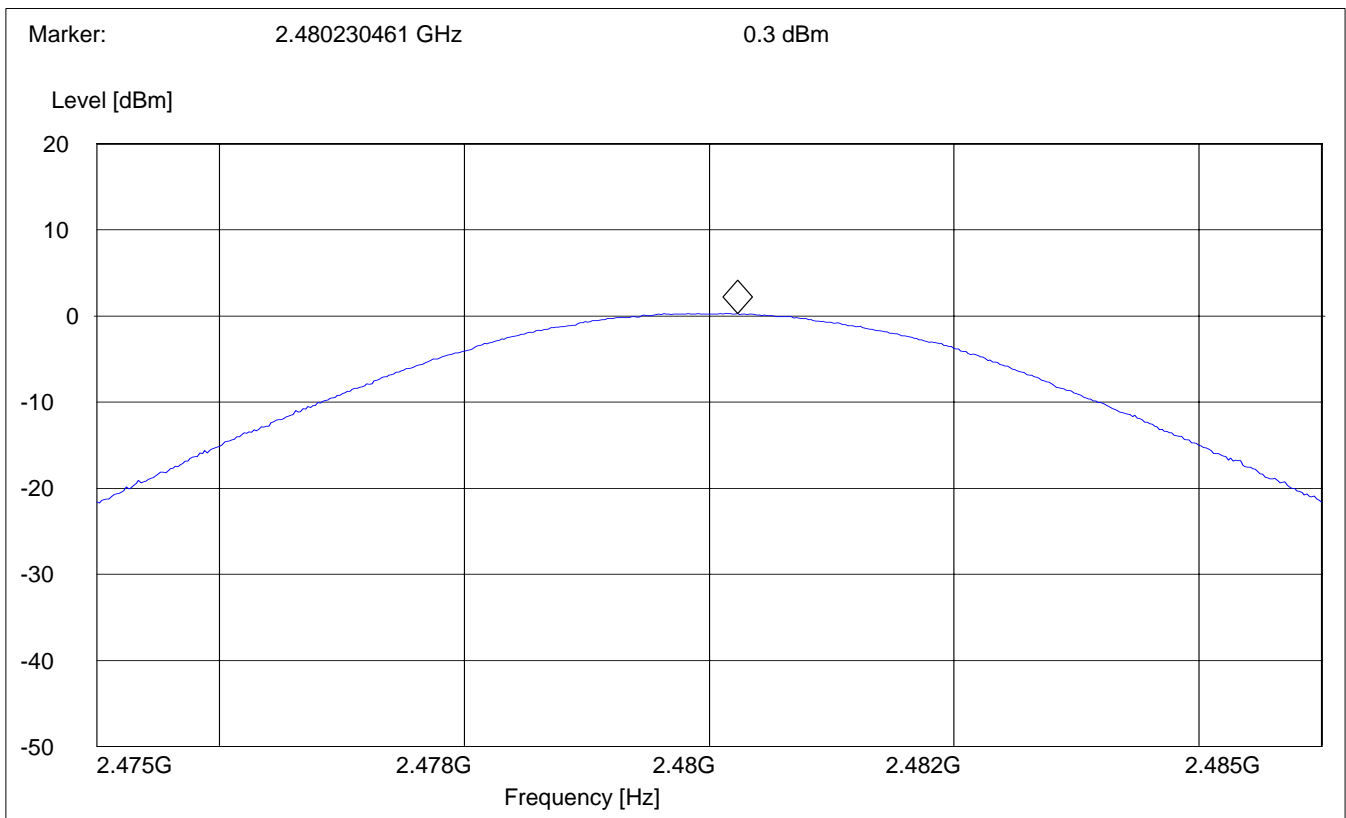

# BAND EDGE COMPLIANCE

## §15.247 (c)


Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

Average Measurement

(This plot is valid for both Hopping ON & OFF)

SWEEP TABLE: "FCC15.247 LBE\_AVG"  
Short Description: FCC15.247 BT Low-band-edge  
Limit Line: 54dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	Max Peak	Coupled	1 MHz	10 Hz	#326 horn (dBi)

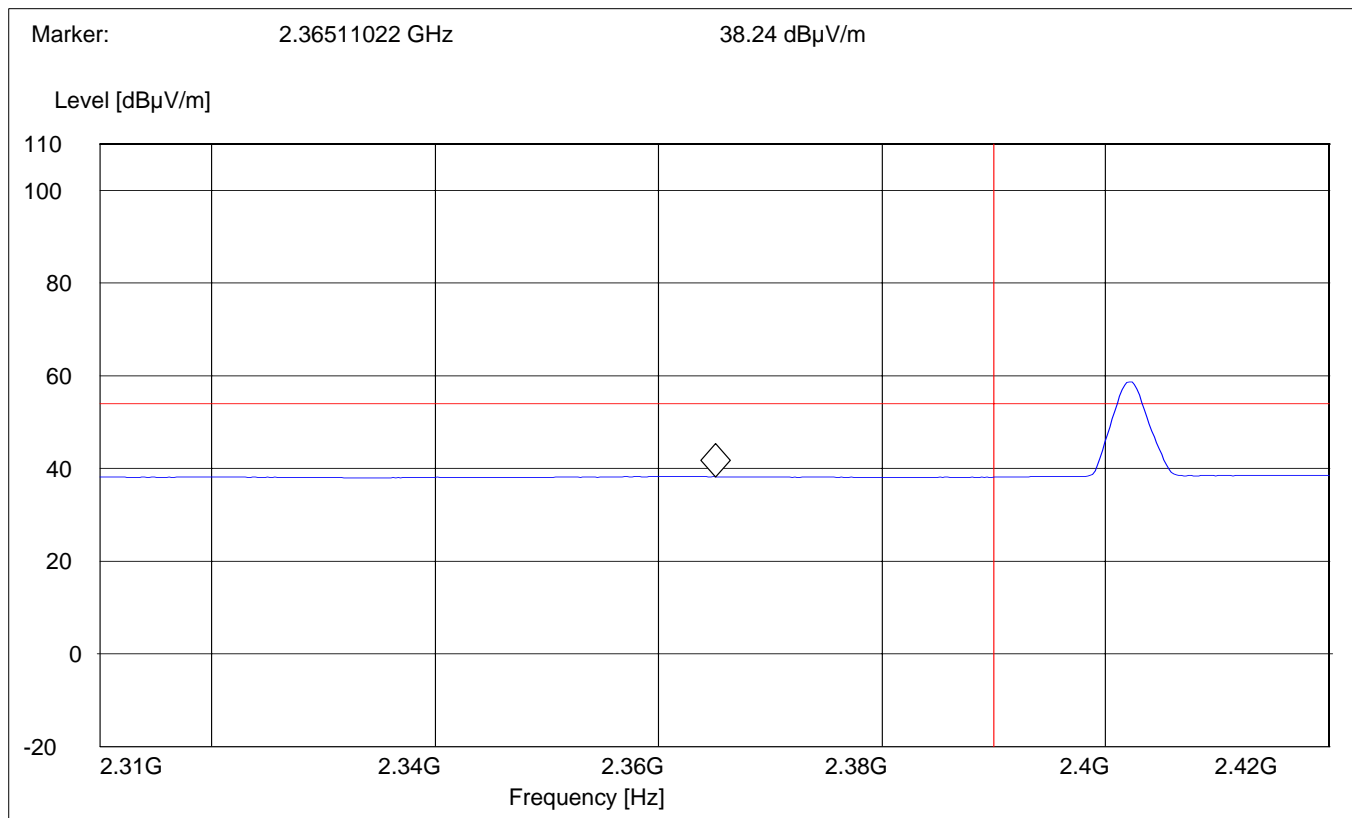

# BAND EDGE COMPLIANCE

§15.247 (c)


Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

Peak Measurement

(This plot is valid for both Hopping ON & OFF)

SWEEP TABLE: "FCC15.247 LBE\_AVG"  
Short Description: FCC15.247 BT Low-band-edge  
Limit Line: 74dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	Max Peak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

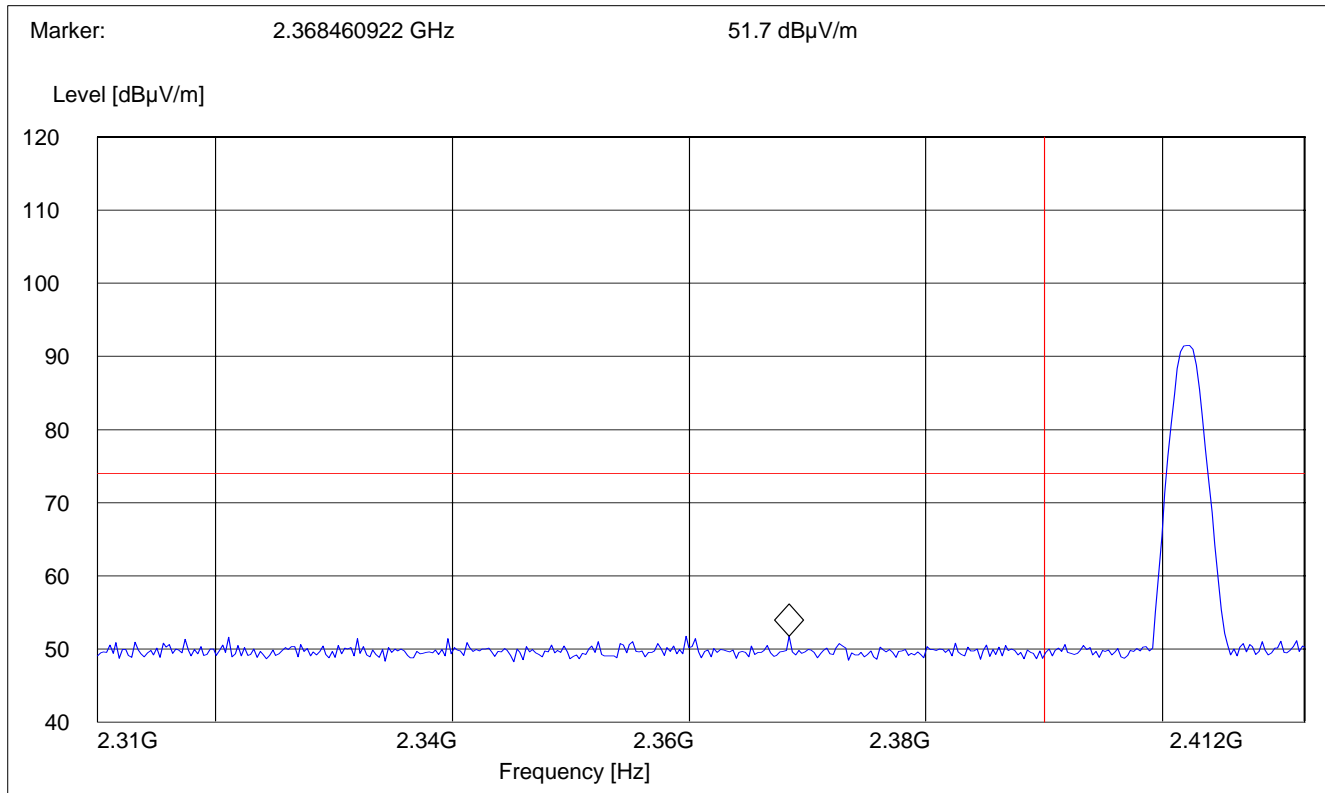

# BAND EDGE COMPLIANCE

§15.247 (c)


**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)**

**Average Measurement**

**(This plot is valid for both Hopping ON & OFF)**

SWEEP TABLE: "FCC15.247 HBE\_AVG"  
Short Description: FCC15.247 BT High-band-edge  
Limit Line: 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	Max Peak	Coupled	1 MHz	10Hz	#326 horn (dBi)

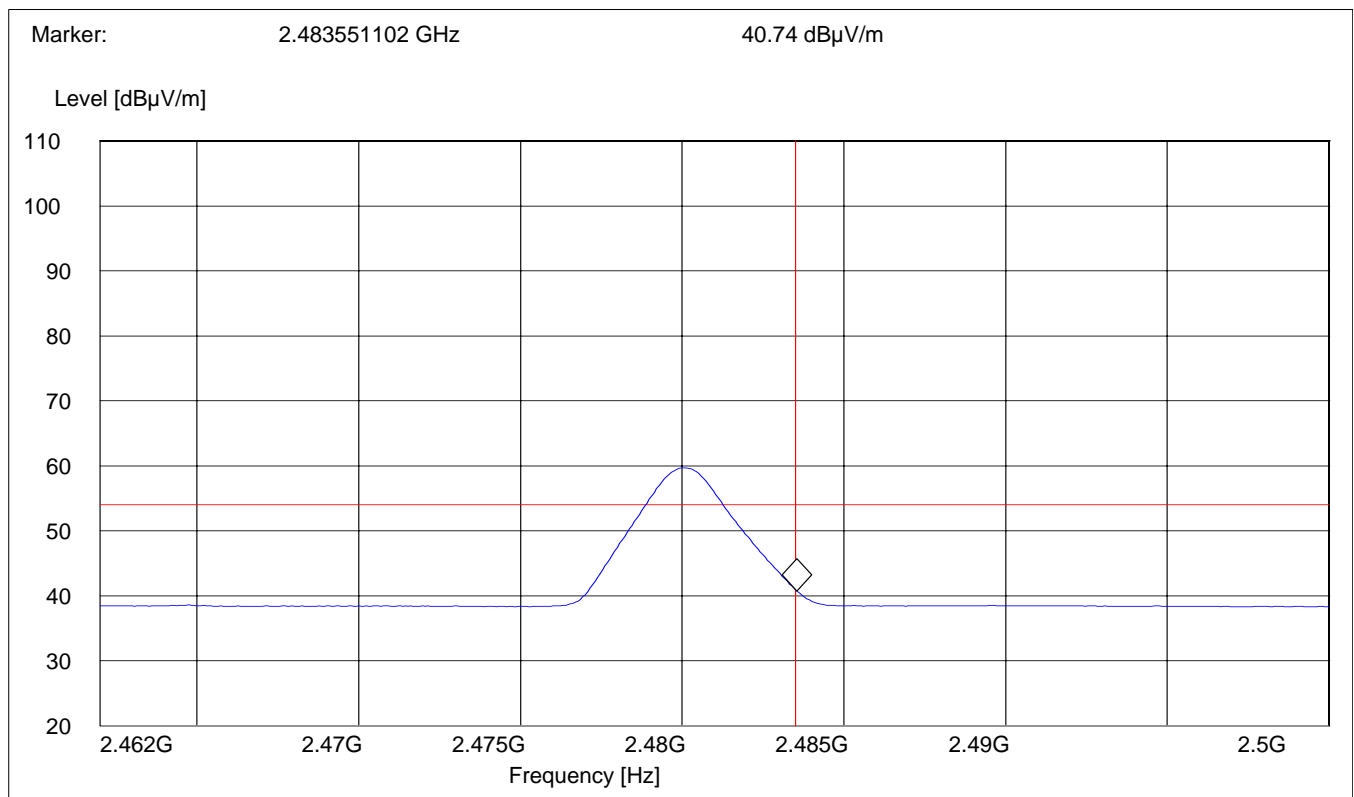

# BAND EDGE COMPLIANCE

§15.247 (c)


High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

Peak Measurement

(This plot is valid for both Hopping ON & OFF)

SWEEP TABLE: "FCC15.247 HBE\_AVG"  
Short Description: FCC15.247 BT High-band-edge  
Limit Line: 74dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	Max Peak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

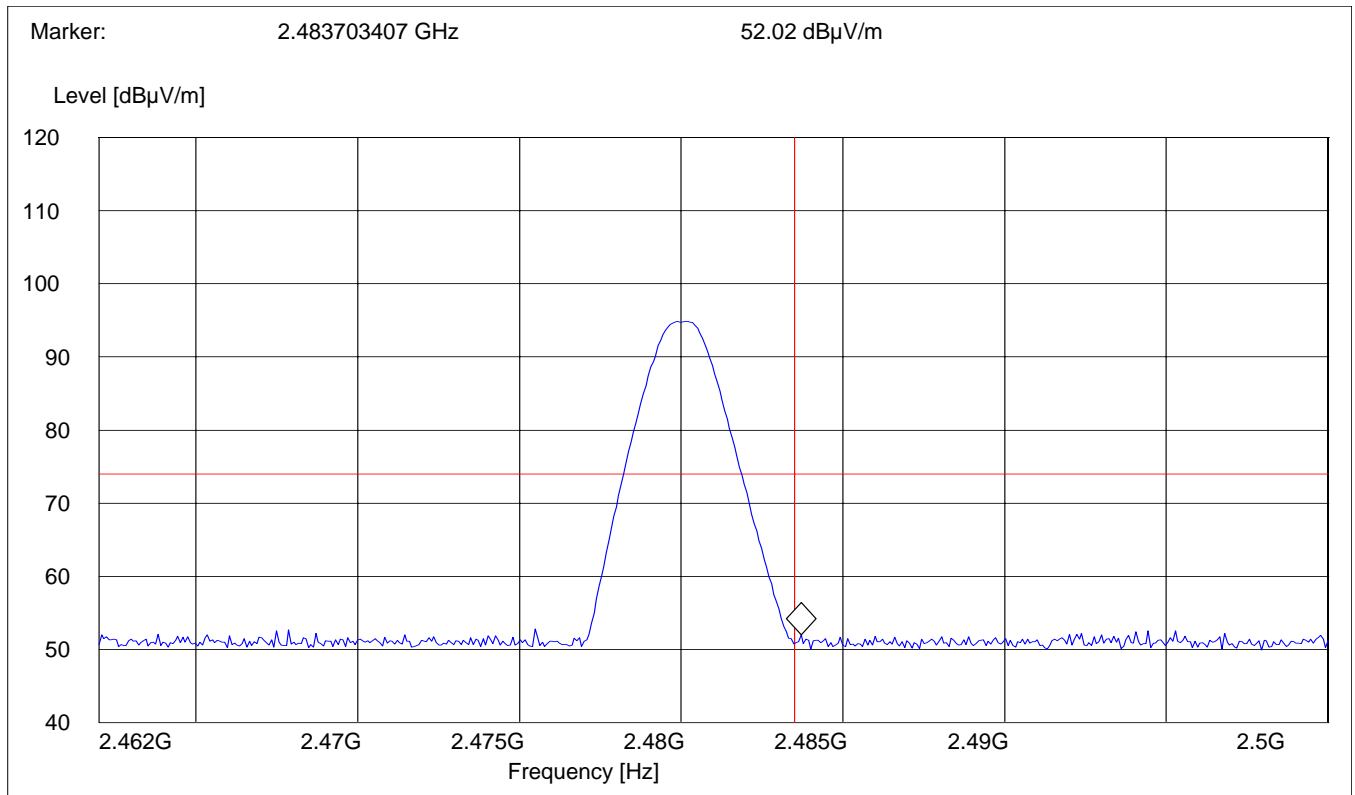

**EMISSION LIMITATIONS Transmitter (Conducted)  
LIMITS****§ 15.247 (c) (1)**


**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions that fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

**NOTE: Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.**

## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2402MHz): 9 KHz - 25GHz

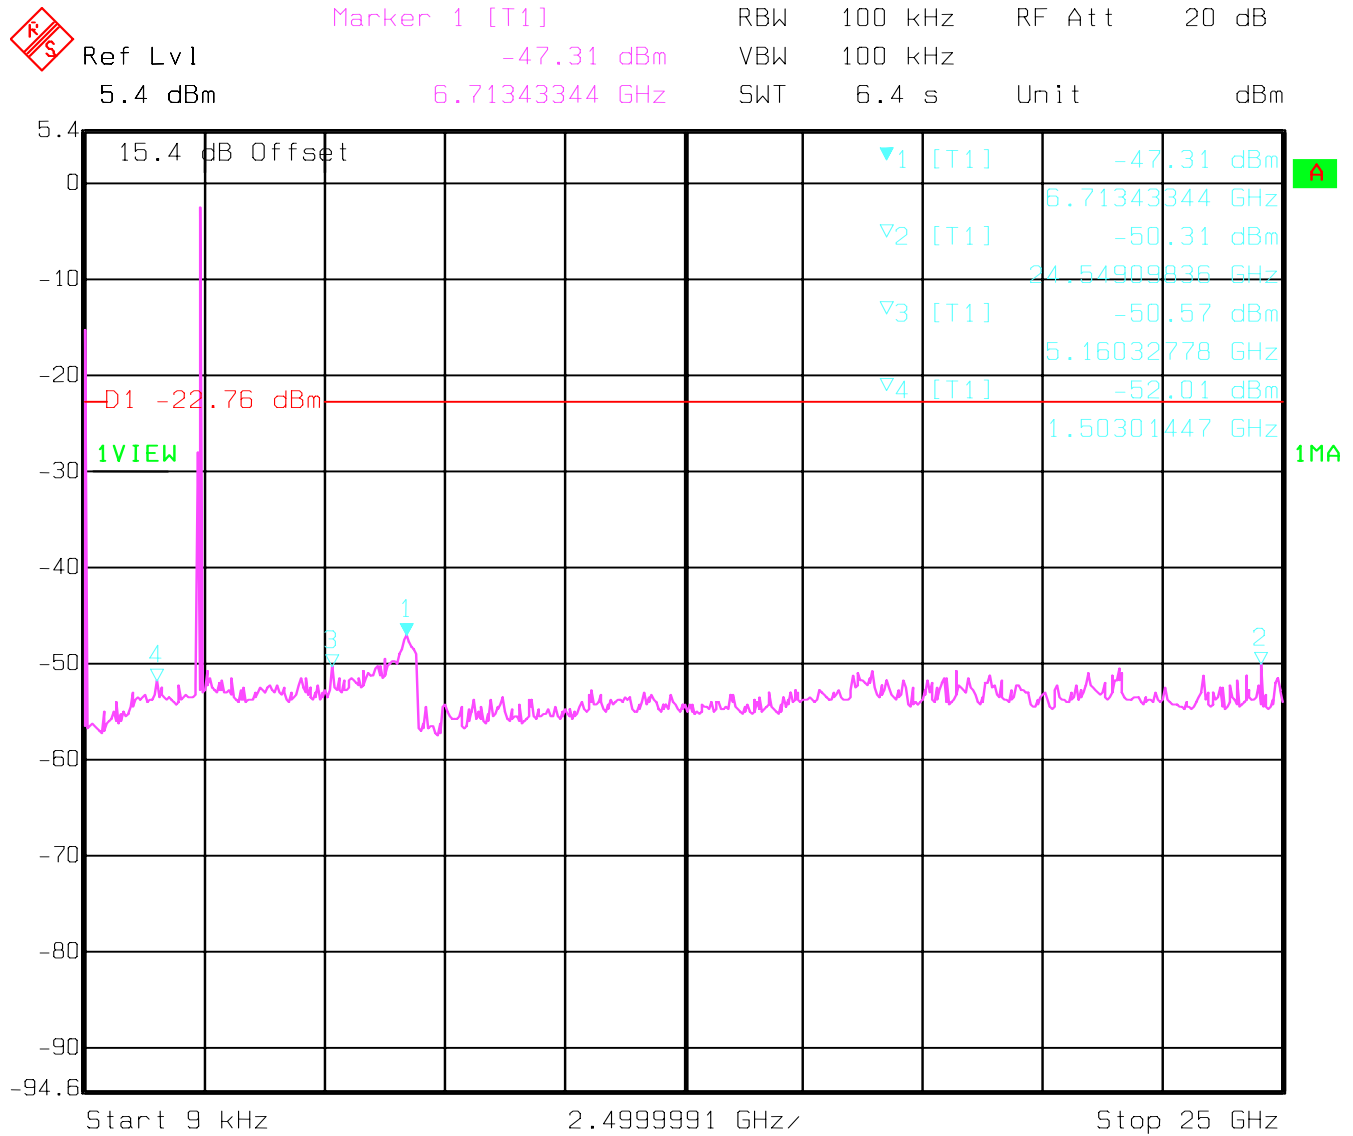


Date: 05.MAY 2005 16:12:43



## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Mid Channel (2441MHz): 9KHz - 25GHz

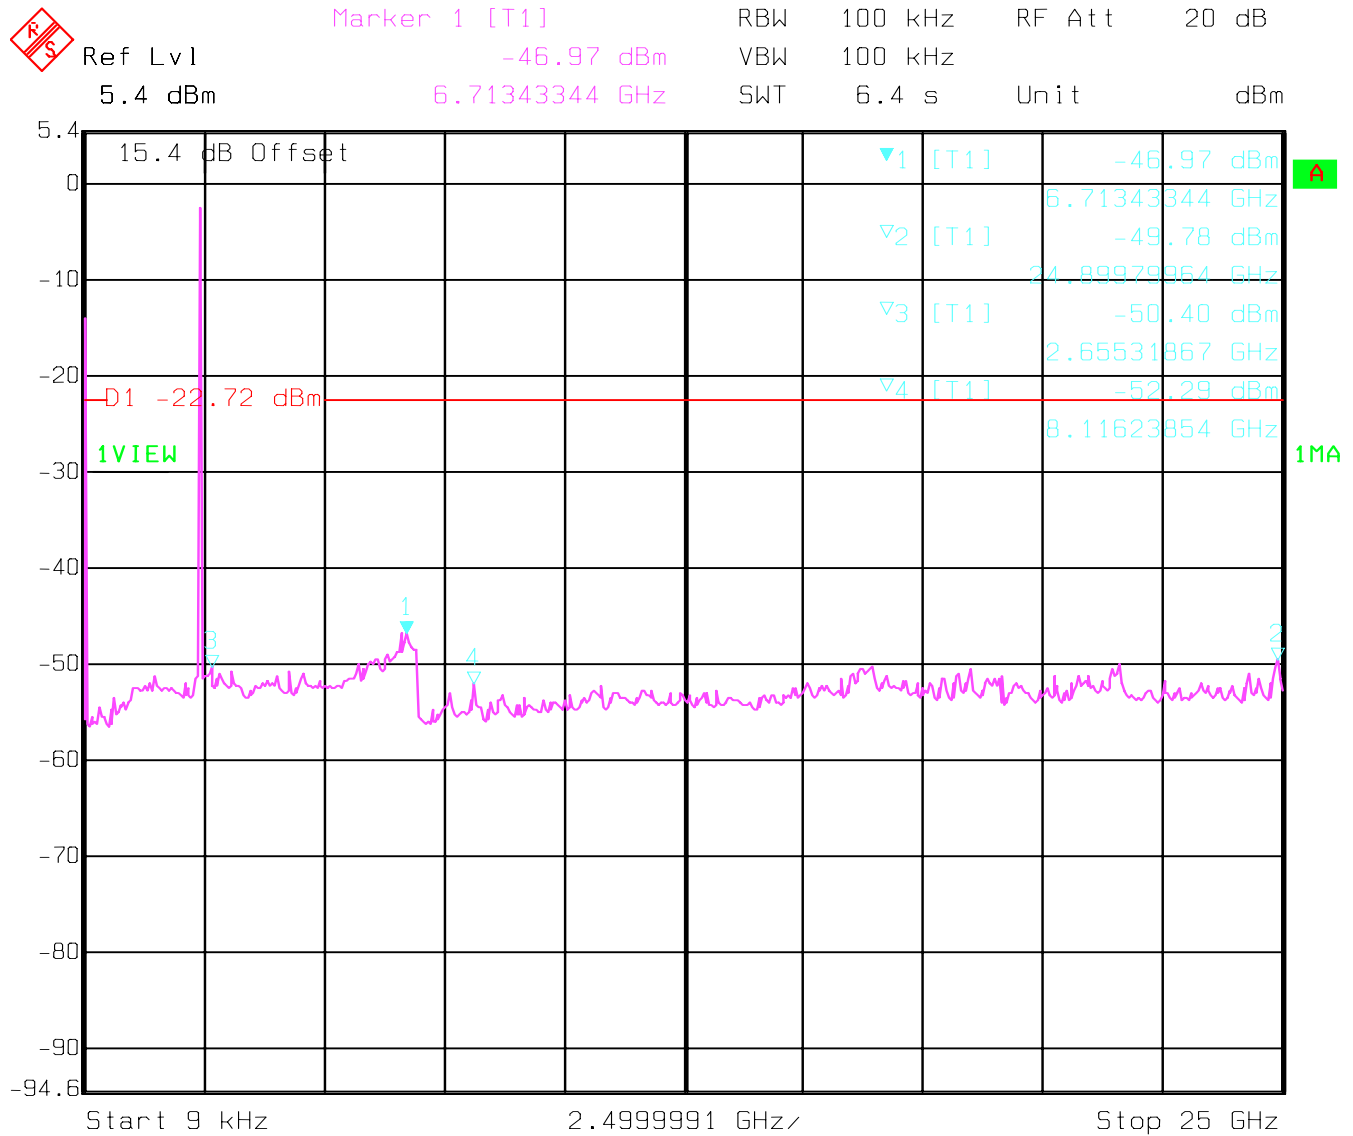


Date: 05.MAY 2005 16:07:24

## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Highest Channel (2480MHz): 9KHz - 25GHz

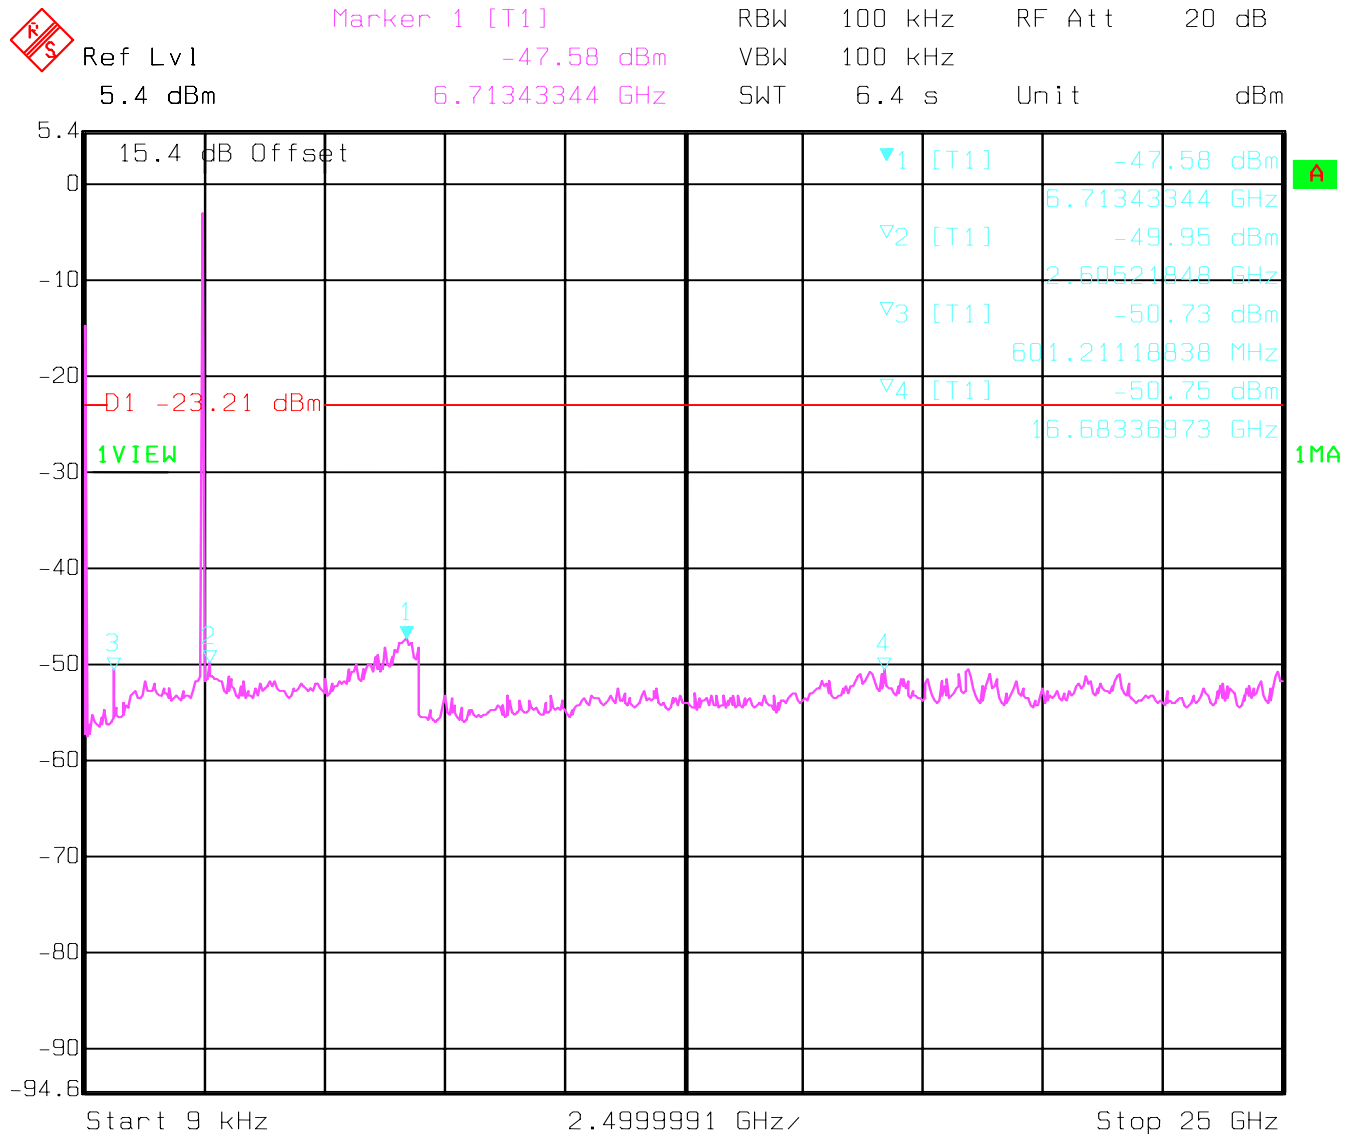

Date: 05.MAY 2005 16:09:31

**EMISSION LIMITATIONS Transmitter (Radiated)****§ 15.247 (c) (1)****LIMITS**

**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions that fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.
3. All measurements are done in peak mode unless specified with plots.

**Results for the radiated measurements below 30MHz according § 15.33**

<b>Frequency</b>	<b>Measured values</b>	<b>Remarks</b>
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

**EMISSION LIMITATIONS - Radiated (Transmitter) § 15.247 (c) (1)**

**Note:** All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

Transmit at Lowest channel Frequency 2402MHz			
Frequency (MHz)	Level (dB $\mu$ V/m)		
	Peak	Quasi-Peak	Average
Noise floor			
Transmit at Middle channel Frequency 2441MHz			
Frequency (MHz)	Level (dB $\mu$ V/m)		
	Peak	Quasi-Peak	Average
Noise floor			
Transmit at Highest channel Frequency 2480MHz			
Frequency (MHz)	Level (dB $\mu$ V/m)		
	Peak	Quasi-Peak	Average
Noise floor			

**EMISSION LIMITATIONS - Radiated (Transmitter)**

**§ 15.247 (c) (1)**


**30MHz – 1GHz**

**Antenna: vertical**

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

SWEEP TABLE: "BT Spuri hi 30-1G"  
Short Description: Bluetooth 30MHz-1GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
30.0 MHz	1.0 GHz	Max Peak	Coupled	100 kHz	3141-#1186

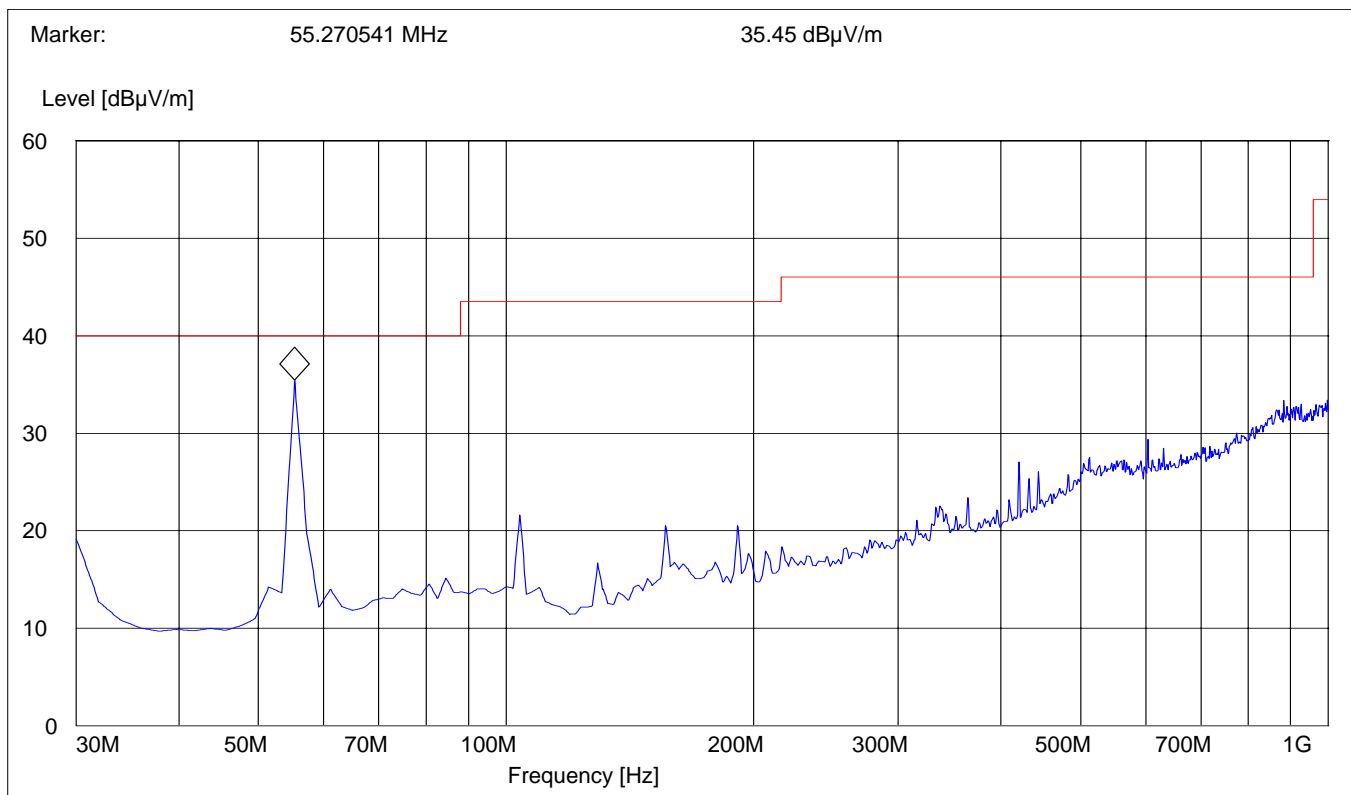

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


30MHz – 1GHz

Antenna: horizontal

**Note: This plot is valid for low, mid & high channels (worst-case plot)**

SWEEP TABLE: "BT Spuri hi 30-1G"  
Short Description: Bluetooth 30MHz-1GHz


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
30.0 MHz	1.0 GHz	Max Peak	Coupled	100 kHz	3141-#1186

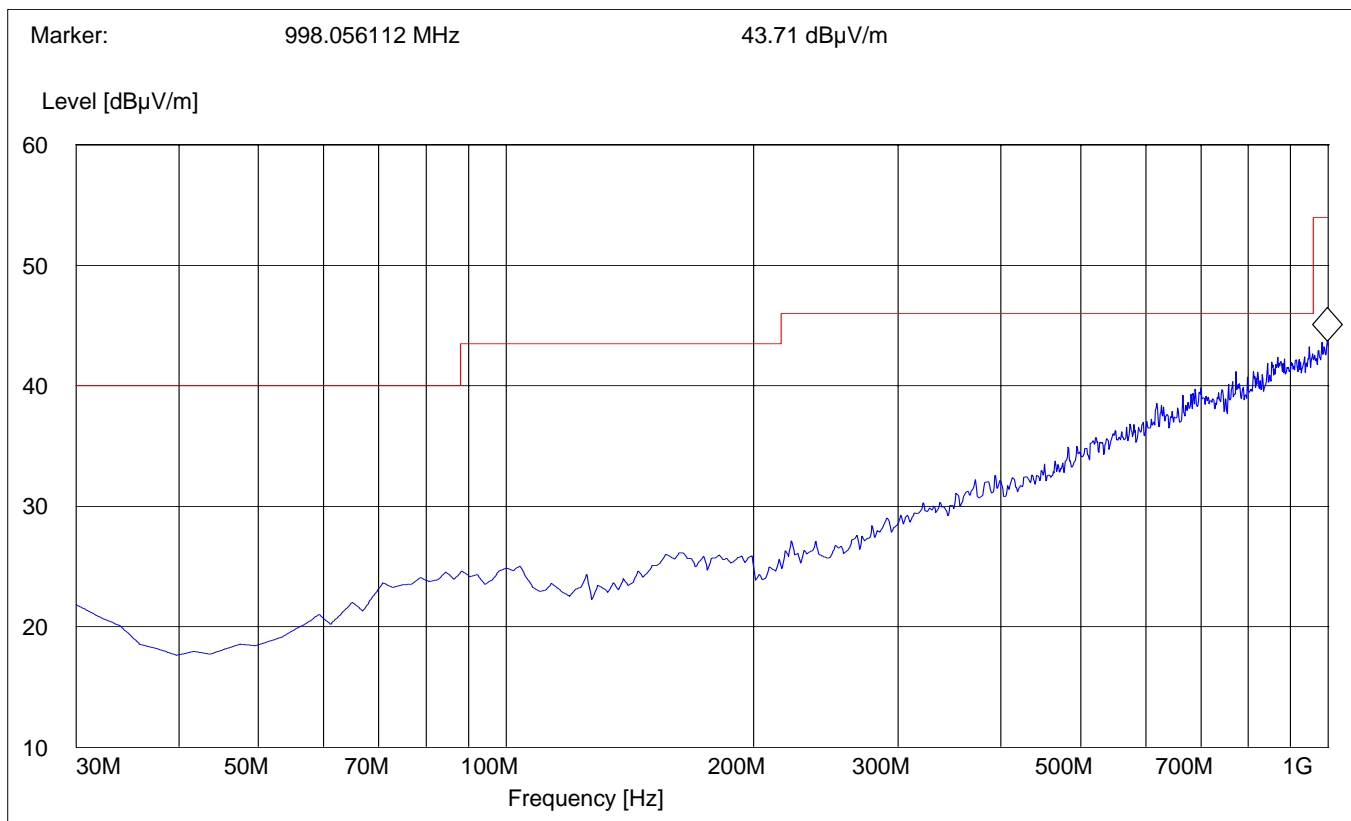

**EMISSION LIMITATIONS - Radiated (Transmitter)**
**§ 15.247 (c) (1)**
**Lowest Channel (2402MHz): 1GHz – 3GHz**
**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE: "BT Spuri hi 1-3G"  
Short Description: Bluetooth Spurious 1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
1.0 GHz	3.0 GHz	Max Peak	Coupled	1 MHz	#326 horn (dBi)

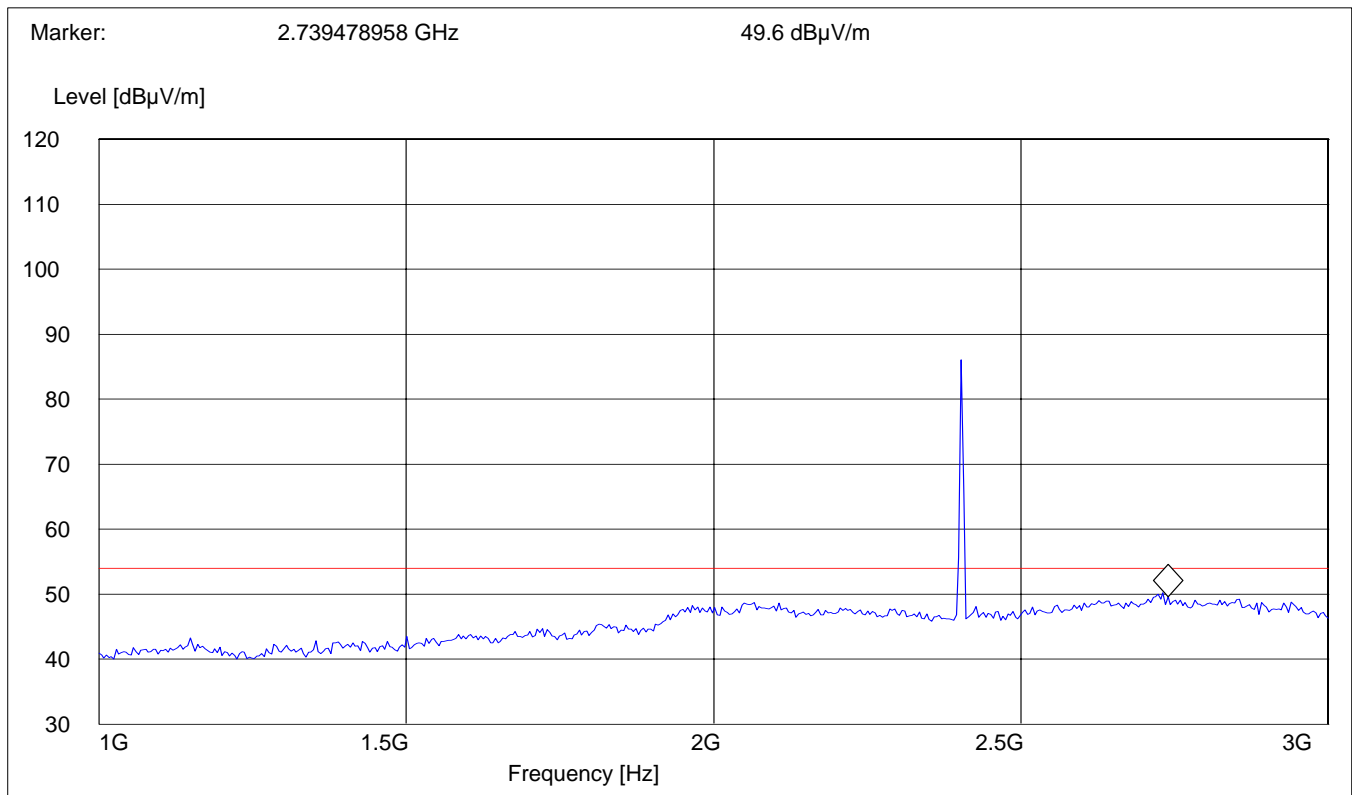


**EMISSION LIMITATIONS - Radiated (Transmitter)**
**§ 15.247 (c) (1)**
**Lowest Channel (2402MHz): 3GHz – 18GHz**
**NOTE: Peak readings are below Average limit.**

SWEEP TABLE: "BT Spuri hi 3-18G"

Short Description: Bluetooth Spurious 3-18 GHZ

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
3.0 GHz	18.0 GHz	Max Peak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

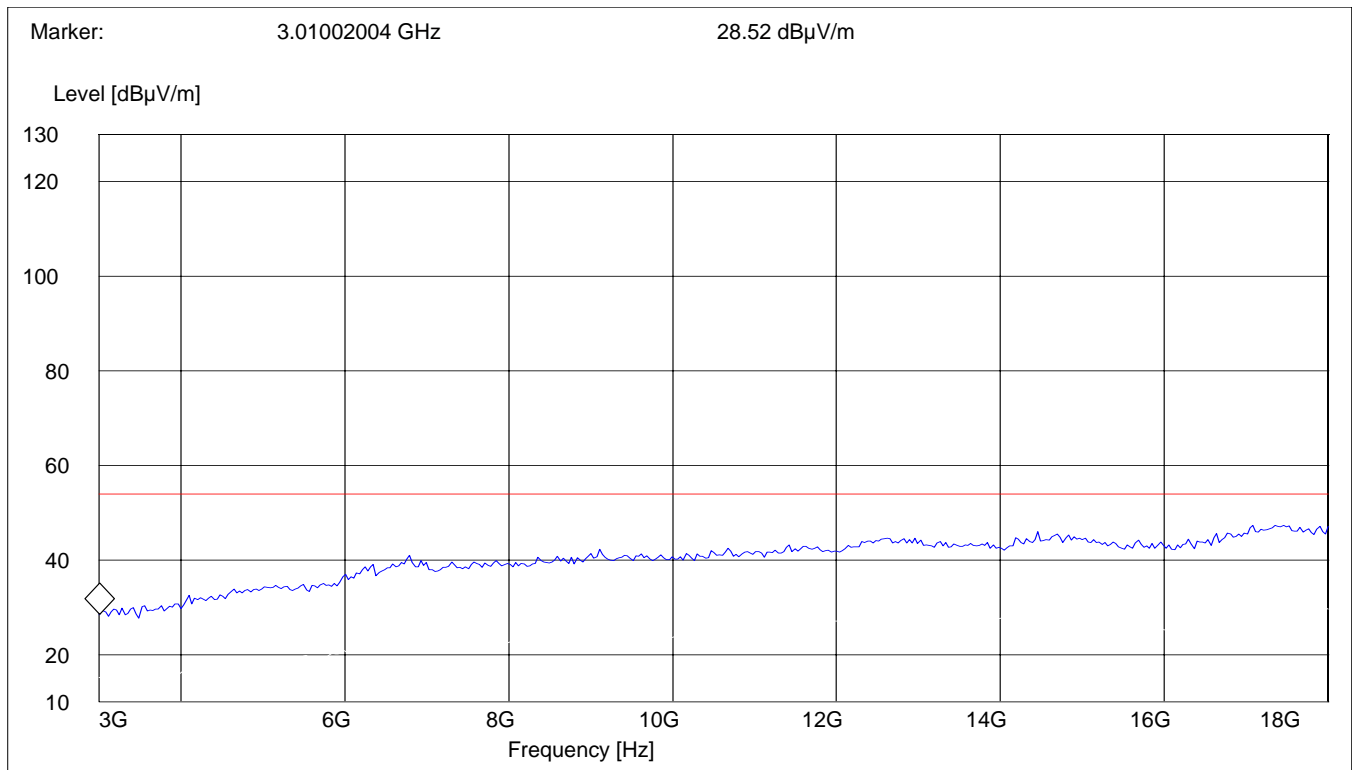




**EMISSION LIMITATIONS - Radiated (Transmitter)**
**§ 15.247 (c) (1)**
**Middle Channel (2441MHz): 1GHz – 3GHz**
**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE: "BT Spuri hi 1-3G"

Short Description: Bluetooth Spurious 1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
1.0 GHz	3.0 GHz	Max Peak	Coupled	1 MHz	#326 horn (dBi)

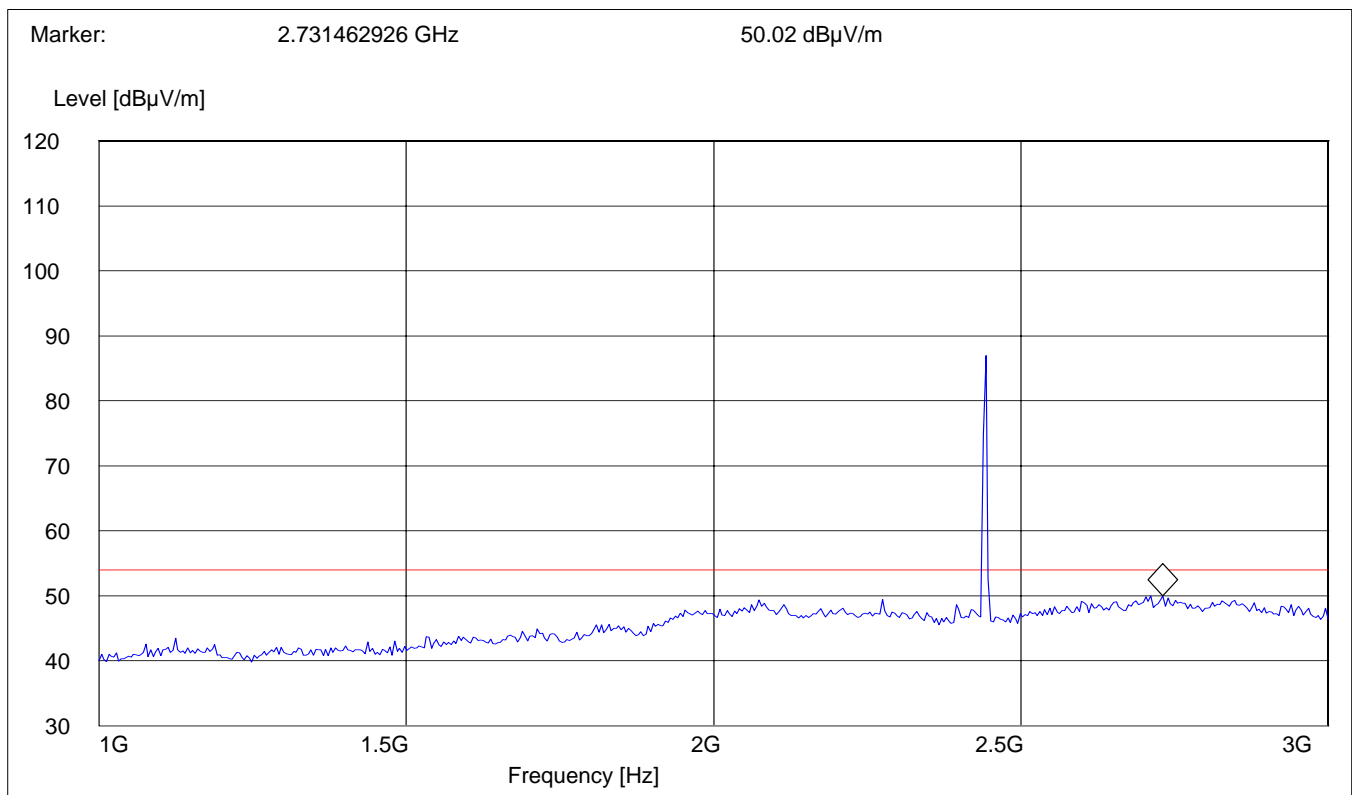

**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**Middle Channel (2441MHz): 3GHz – 18GHz**


§ 15.247 (c) (1)

**NOTE: Peak readings are below Average limit.**

SWEEP TABLE: "BT Spuri hi 3-18G"

Short Description: Bluetooth Spurious 3-18 GHZ


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
3.0 GHz	18.0 GHz	Max Peak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

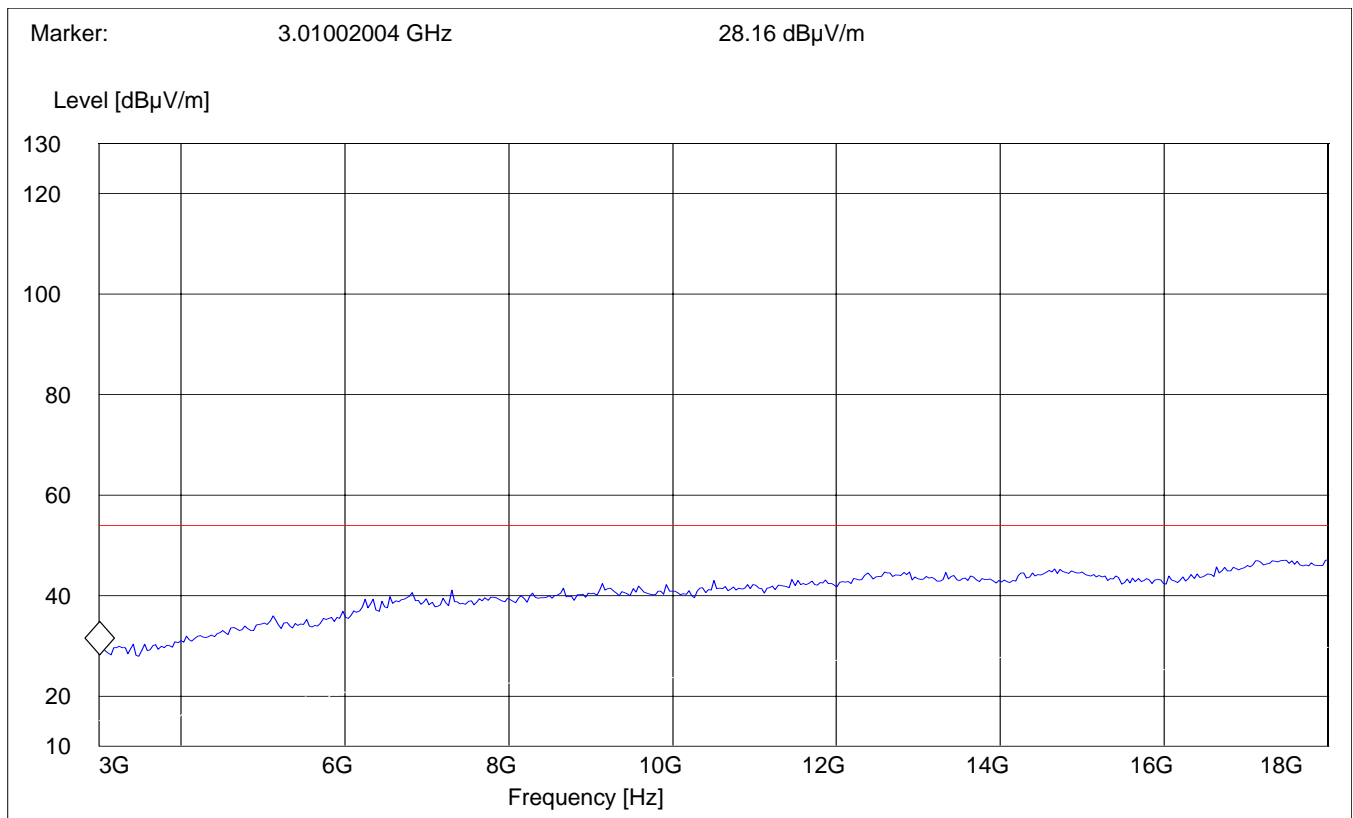

**EMISSION LIMITATIONS - Radiated (Transmitter)**
**§ 15.247 (c) (1)**
**Highest Channel (2480MHz): 1GHz – 3GHz**
**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE: "BT Spuri hi 1-3G"  
Short Description: Bluetooth Spurious 1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
1.0 GHz	3.0 GHz	Max Peak	Coupled	1 MHz	#326 horn (dBi)

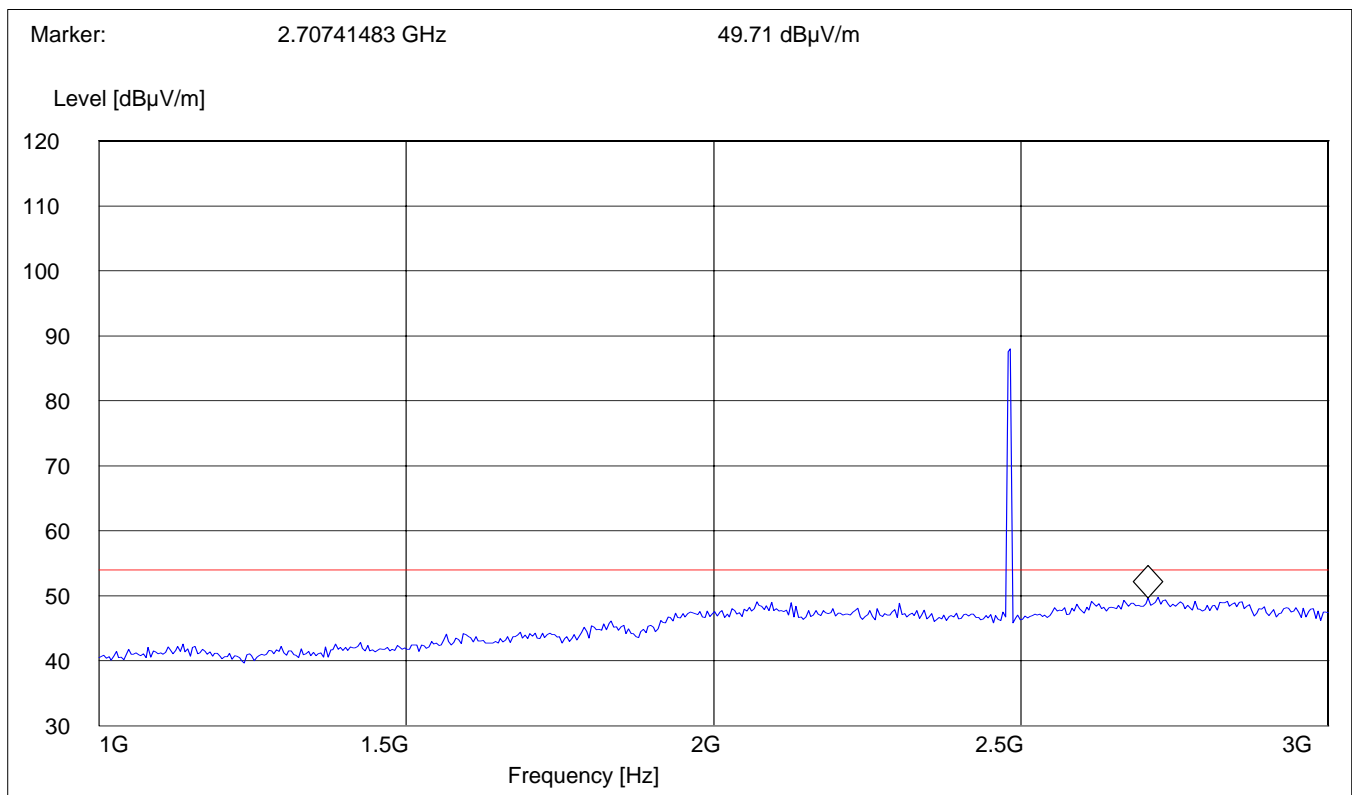


**EMISSION LIMITATIONS - Radiated (Transmitter)**
**§ 15.247 (c) (1)**
**Highest Channel (2480MHz): 3GHz – 18GHz**
**NOTE: Peak readings are below Average limit.**

SWEEP TABLE: "BT Spuri hi 3-18G"

Short Description: Bluetooth Spurious 3-18 GHZ

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
3.0 GHz	18.0 GHz	Max Peak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

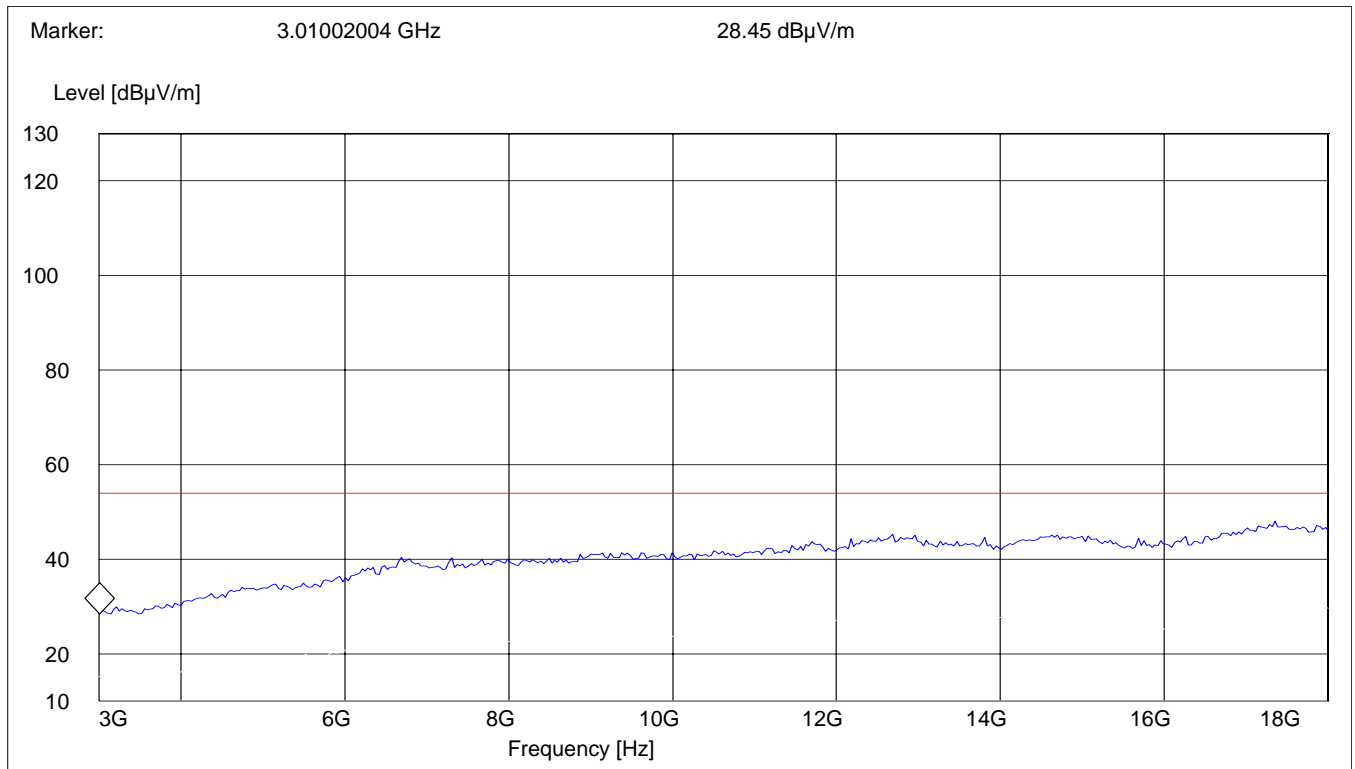

# EMISSION LIMITATIONS - Radiated (Transmitter)

## 18GHz – 25GHz


§ 15.247 (c) (1)

**Note 1: This plot is valid for low, mid & high channels (worst-case plot)**

**Note 2: Peak readings are below Average limit**

SWEEP TABLE: "BT Spuri hi 18-25G"  
Short Description: Bluetooth Spurious 18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
18 GHz	25 GHz	Max Peak	Coupled	1 MHz	1 MHz	#141 horn (dBi)

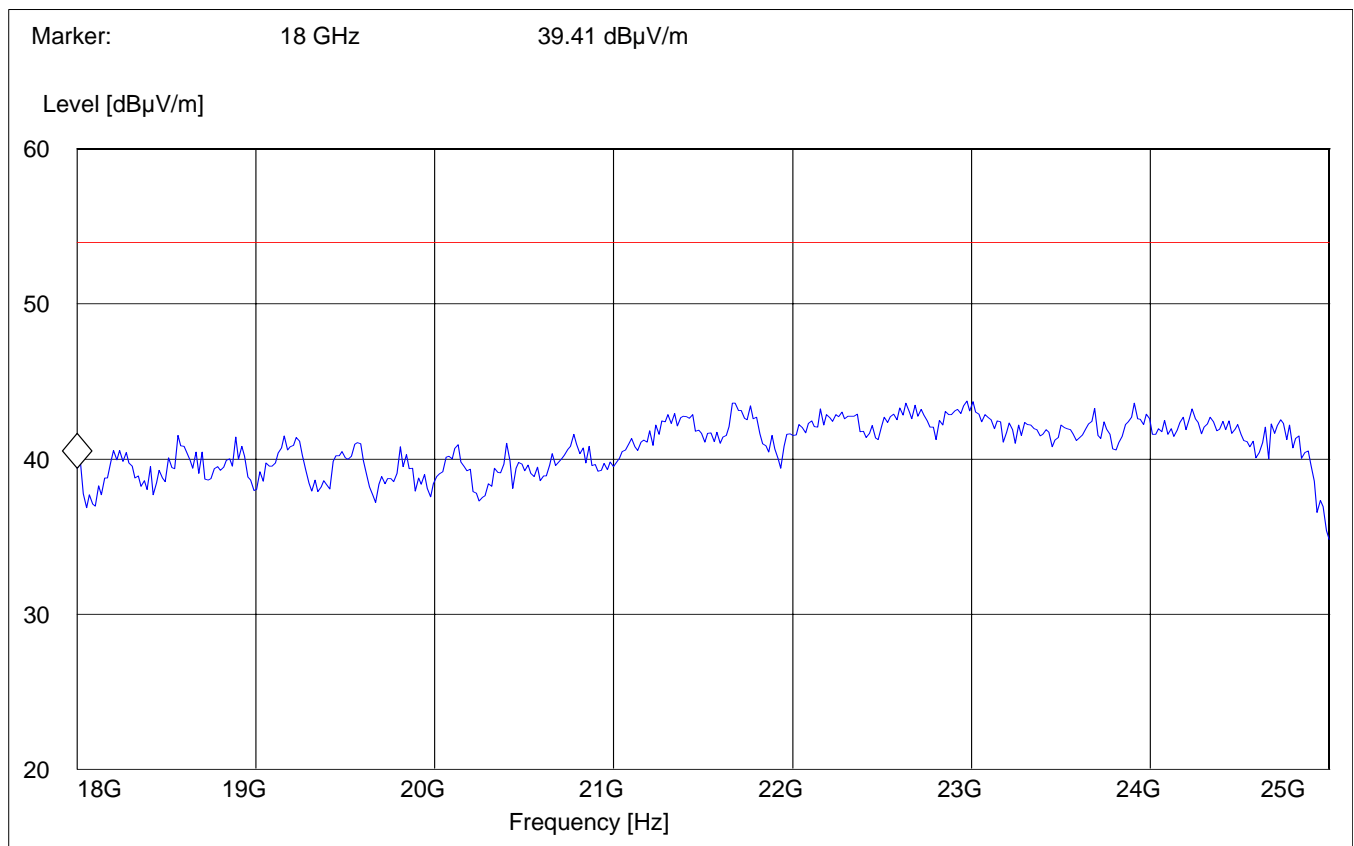


**CO-LOCATION – (Radiated) Transmitter**

The Bluetooth transmitter was co-located with the GSM transmitter. The GSM transmitter was the dominant transmitter. FCC 15.247 limits/test method were used due to the fact FCC 15.247 limits are more stringent. The channels were selected according to the highest EIRP readings of each transmitter .

**EMISSION LIMITATIONS - Radiated (Transmitter)****§ 15.247 (c) (1)****30MHz – 1GHz****Antenna: vertical****Operating Mode:** GSM TX@1850.2MHz AND BLUETOOTH TX@2480MHz**SWEEP TABLE:** "BT Spuri hi 30-1G"**Short Description:** Bluetooth 30MHz-1GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
30.0 MHz	1.0 GHz	Max Peak	Coupled	100 kHz	3141-#1186

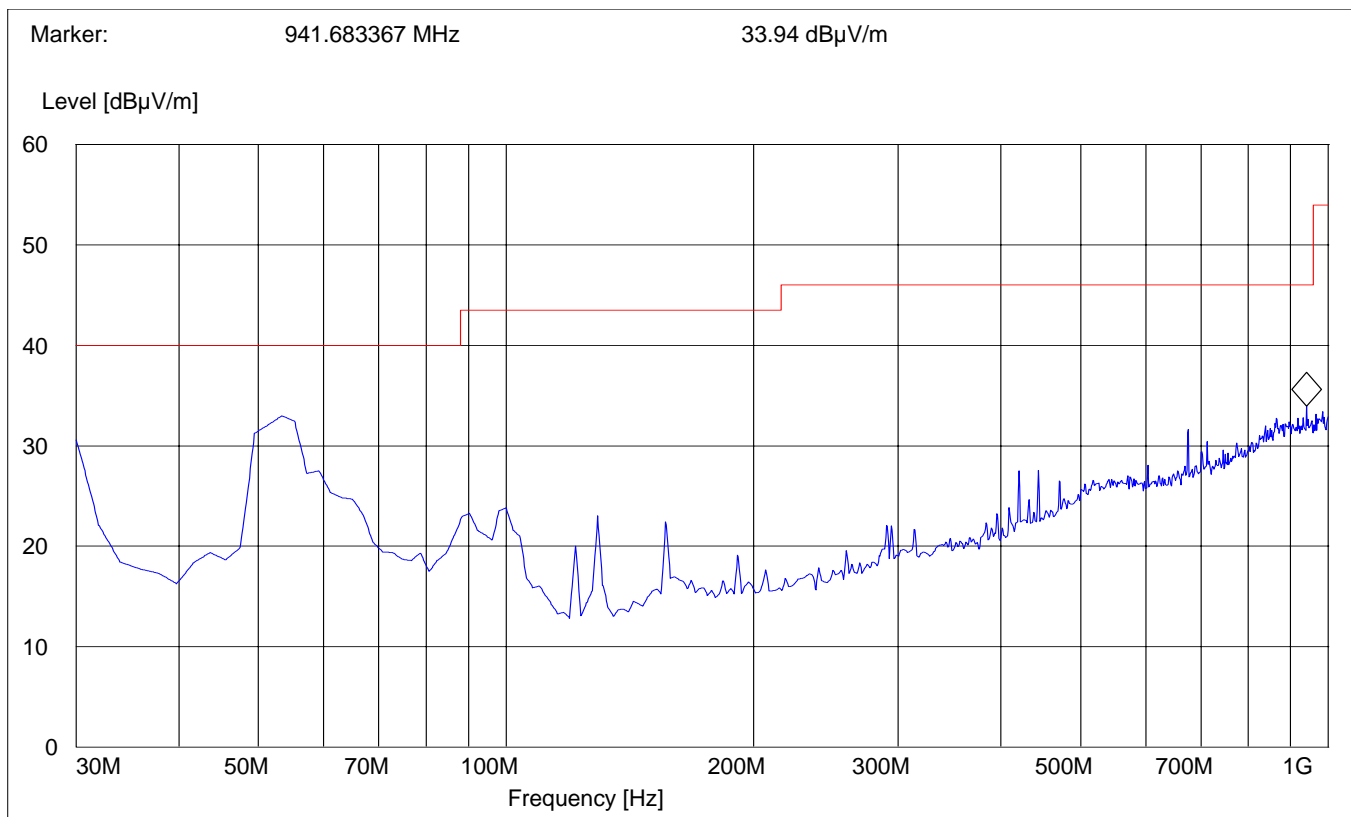


**EMISSION LIMITATIONS - Radiated (Transmitter)**
**§ 15.247 (c) (1)**
**30MHz – 1GHz**
**Antenna: horizontal**
**Operating Mode: GSM TX@1850.2MHz AND BLUETOOTH TX@2480MHz**

SWEEP TABLE: "BT Spuri hi 30-1G"

Short Description: Bluetooth 30MHz-1GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
30.0 MHz	1.0 GHz	Max Peak	Coupled	100 kHz	3141-#1186

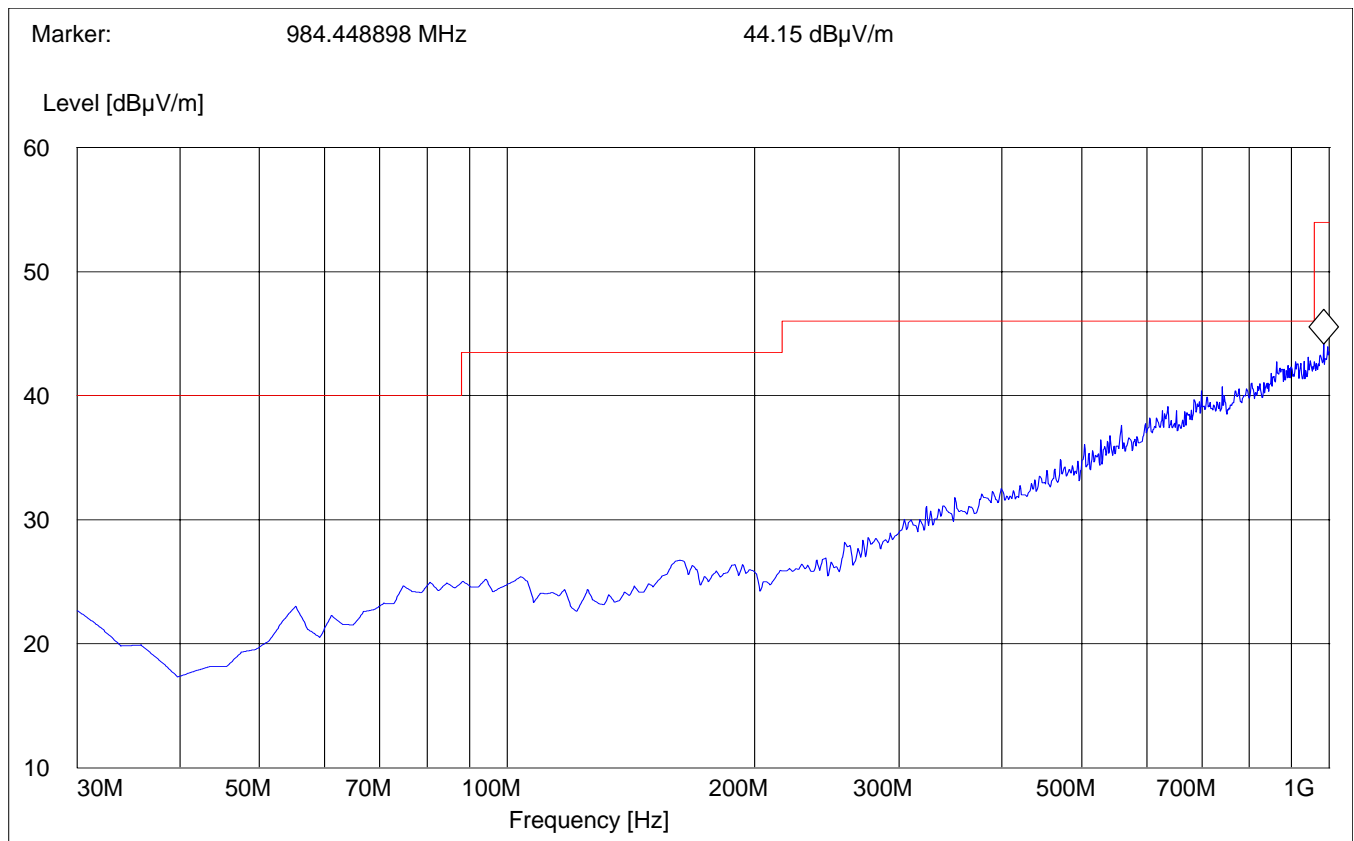

# EMISSION LIMITATIONS - Radiated (Transmitter)

## 1GHz – 3GHz

§ 15.247 (c) (1)


**NOTE:** The peaks above the limit are the carrier frequency of each transmitter.

**Operating Mode:** GSM TX@1850.2MHz AND BLUETOOTH TX@2480MHz

**SWEEP TABLE:** "BT Spuri hi 1-3G"

**Short Description:** Bluetooth Spurious 1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
1.0 GHz	3.0 GHz	Max Peak	Coupled	1 MHz	#326 horn (dBi)

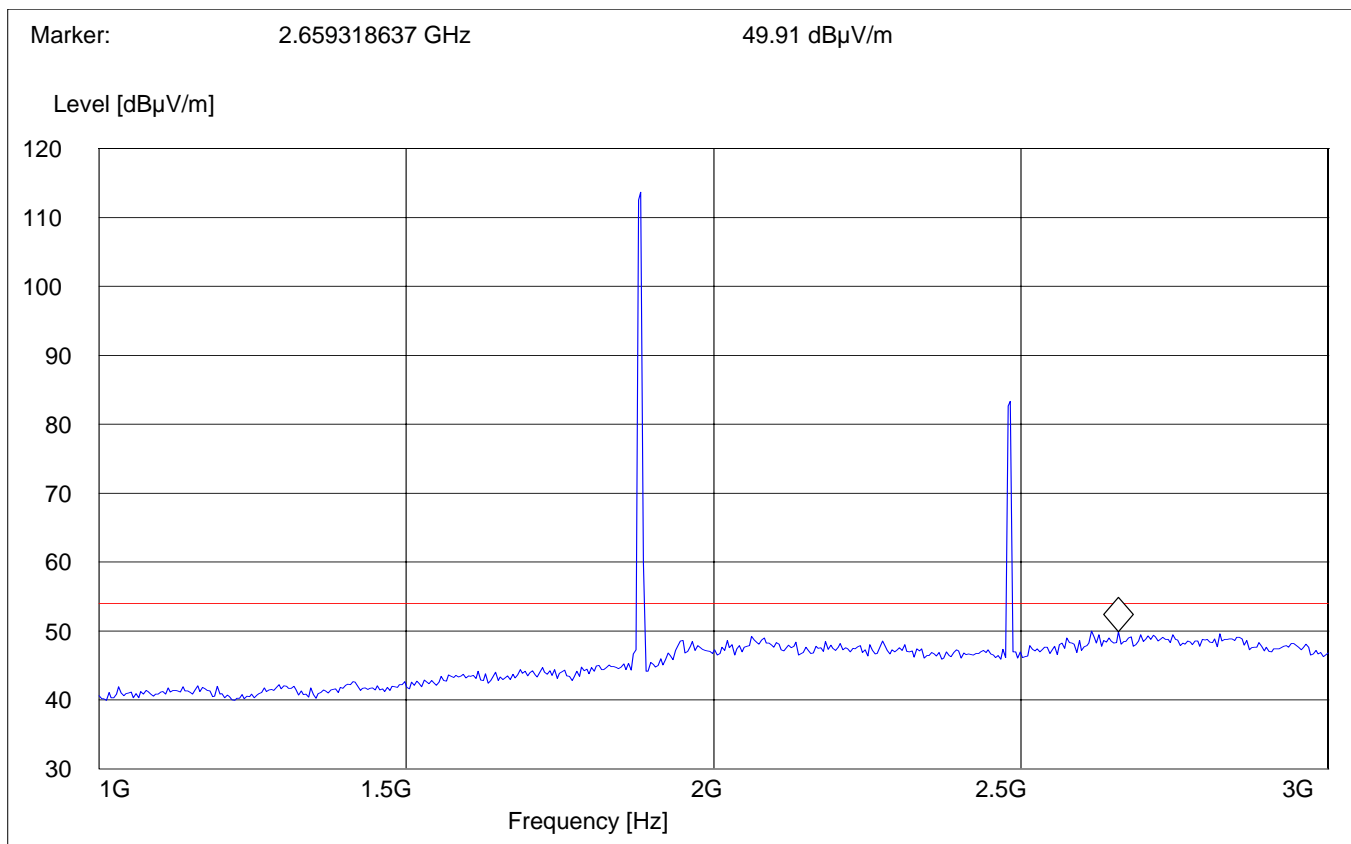



**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**3GHz – 18GHz**

§ 15.247 (c) (1)


**Average measurement**

**Operating Mode:** GSM TX@1850.2MHz AND BLUETOOTH TX@2480MHz

**SWEEP TABLE:** "BT Spuri hi 3-18G"

**Short Description:** Bluetooth Spurious 3-18 GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
3.0 GHz	18.0 GHz	Max Peak	Coupled	10Hz	1 MHz	#326 horn (dBi)

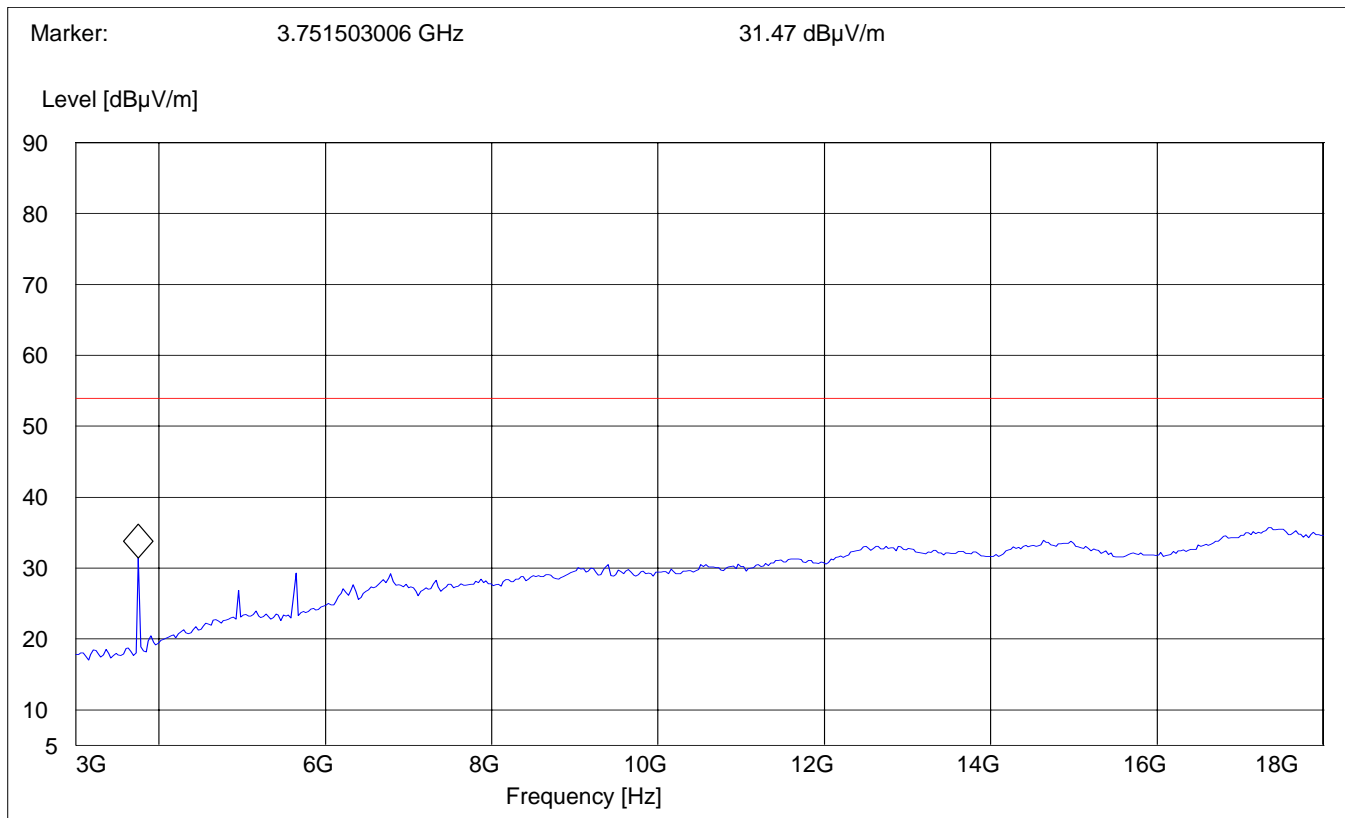

# EMISSION LIMITATIONS - Radiated (Transmitter) 18GHz – 26.5GHz

§ 15.247 (c) (1)


**Note: Peak readings are below Average limit**

**Operating Mode:** GSM TX@1850.2MHz AND BLUETOOTH TX@2480MHz

**SWEEP TABLE:** "BT Spuri hi 18-26.5G"

**Short Description:** Bluetooth Spurious 18-26.5GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
18 GHz	26.5 GHz	Max Peak	Coupled	1 MHz	1 MHz	#141 horn (dBi)

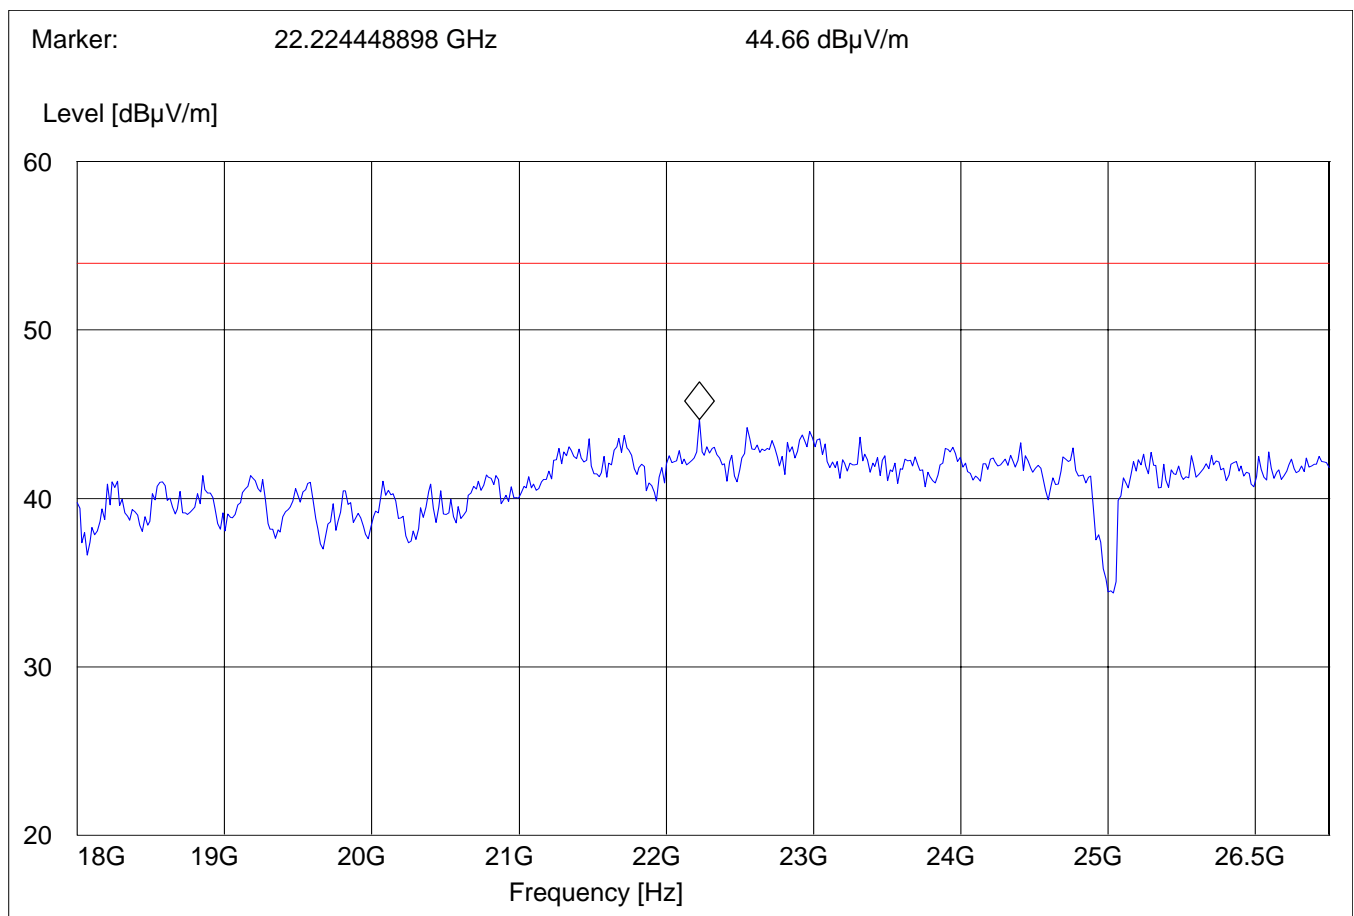

## CONDUCTED EMISSIONS

§ 15.107/207

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


### Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

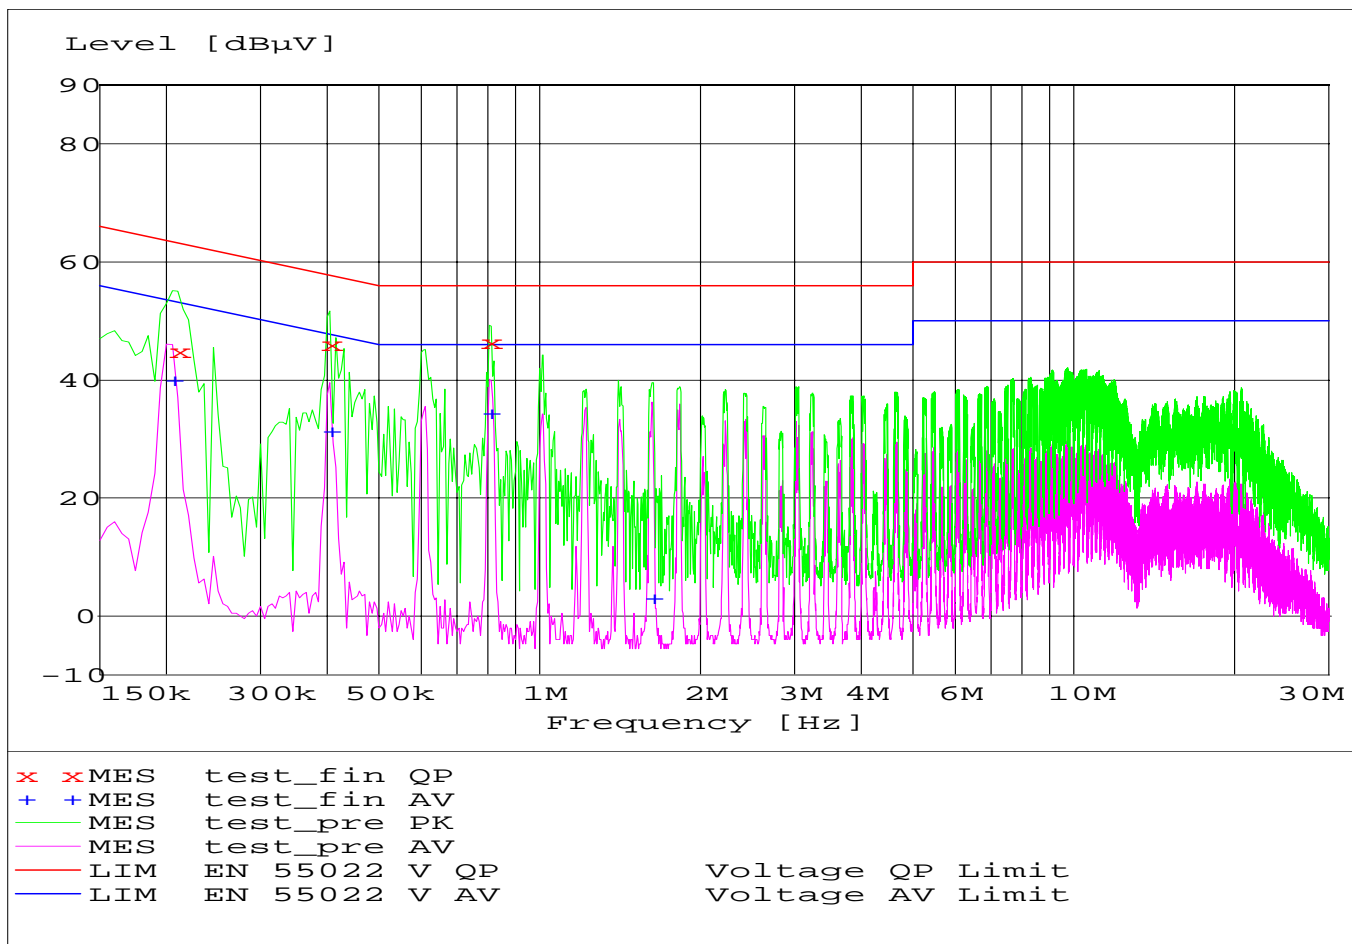

**MEASUREMENT RESULT: "test\_fin QP"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.210000	44.80	0.0	63	18.4	N	GND
0.405000	46.20	0.0	58	11.6	N	GND
0.805000	46.50	0.0	56	9.5	N	GND

**MEASUREMENT RESULT: "test\_fin AV"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.205000	40.00	0.0	53	13.4	N	GND
0.405000	31.30	0.0	48	16.4	N	GND
0.805000	34.40	0.0	46	11.6	N	GND
1.620000	3.10	0.0	46	42.9	N	GND

**RECEIVER SPURIOUS RADIATION****§ 15.209****Limits**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
<b>0.009 - 0.490</b>	<b>2400/F(kHz)</b>	<b>300</b>
<b>0.490 - 1.705</b>	<b>24000/F(kHz)</b>	<b>30</b>
<b>1.705 - 30.0</b>	<b>30</b>	<b>30</b>
<b>30 - 88</b>	<b>100</b>	<b>3</b>
<b>88 - 216</b>	<b>150</b>	<b>3</b>
<b>216 - 960</b>	<b>200</b>	<b>3</b>
<b>above 960</b>	<b>500</b>	<b>3</b>

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode unless specified with the plots. Worst case reported.

**RECEIVER SPURIOUS RADIATION**


§ 15.209

**30MHz – 1GHz**

**Antenna: vertical**

SWEEP TABLE: "BT Spuri hi 30-1G"  
Short Description: Bluetooth 30MHz-1GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
30.0 MHz	1.0 GHz	Max Peak	Coupled	100 kHz	3141-#1186

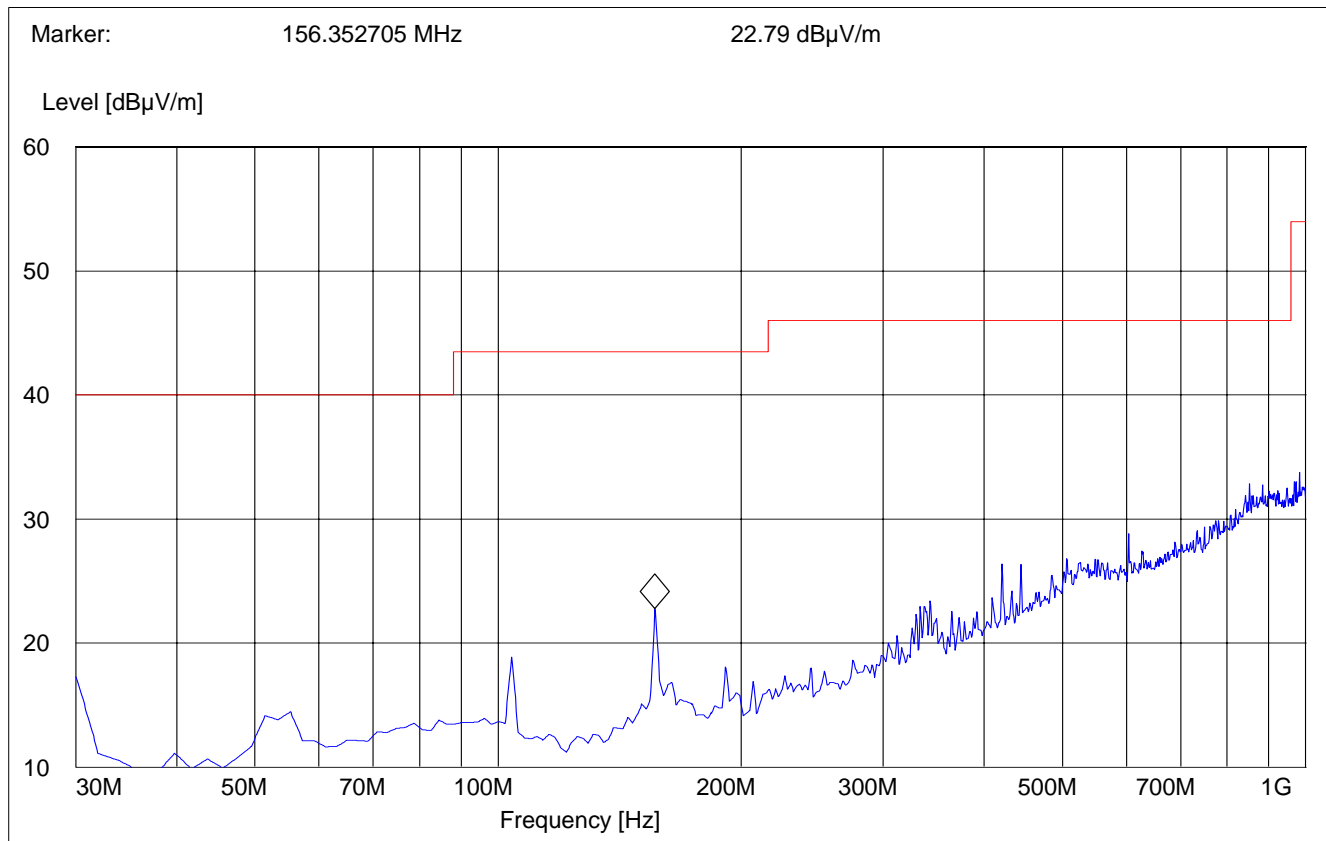

# RECEIVER SPURIOUS RADIATION


§ 15.209

30MHz – 1GHz

Antenna: horizontal

SWEEP TABLE: "BT Spuri hi 30-1G"  
Short Description: Bluetooth 30MHz-1GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
30.0 MHz	1.0 GHz	Max Peak	Coupled	100 kHz	3141-#1186

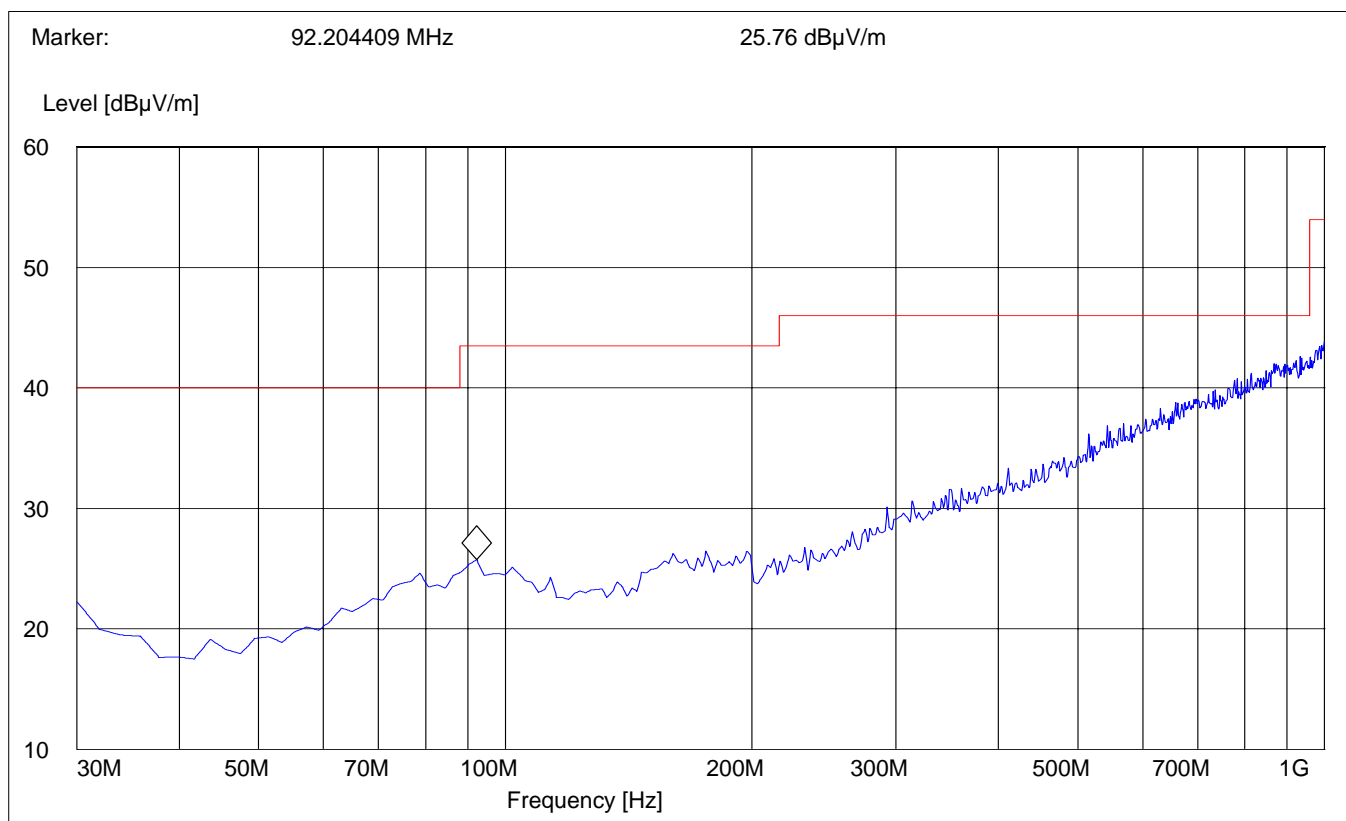


# RECEIVER SPURIOUS RADIATION 1GHz – 3GHz

§ 15.209

SWEEP TABLE: "BT Spuri hi 1-3G"  
Short Description: Bluetooth Spurious 1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW=VBW	Transducer
1.0 GHz	3.0 GHz	Max Peak	Coupled	1 MHz	#326 horn (dBi)

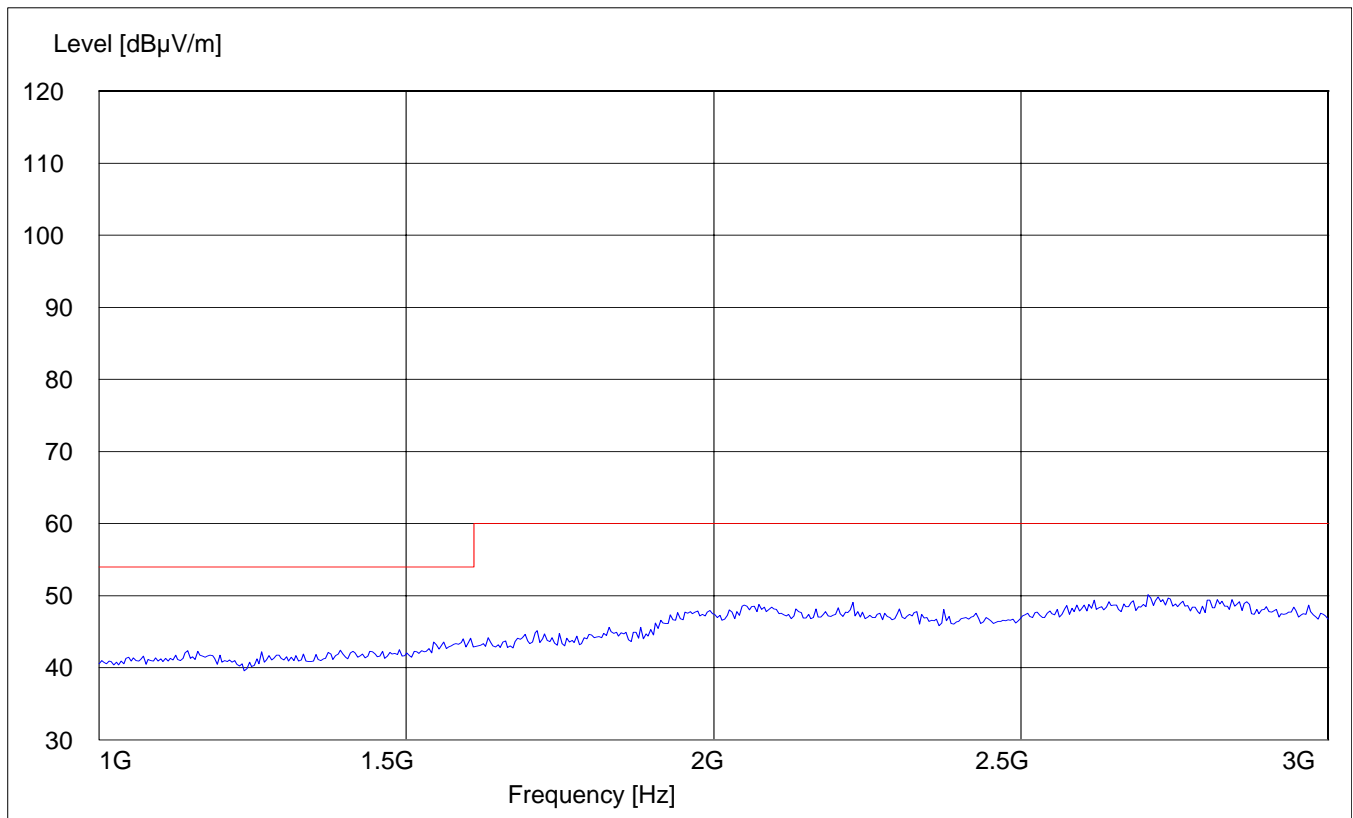




# RECEIVER SPURIOUS RADIATION 3GHz – 18GHz

§ 15.209

SWEEP TABLE: "BT Spuri hi 3-18G"

Short Description: Bluetooth Spurious 3-18 GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
3.0 GHz	18.0 GHz	Max Peak	Coupled	1 MHz	1 MHz	#326 horn (dBi)

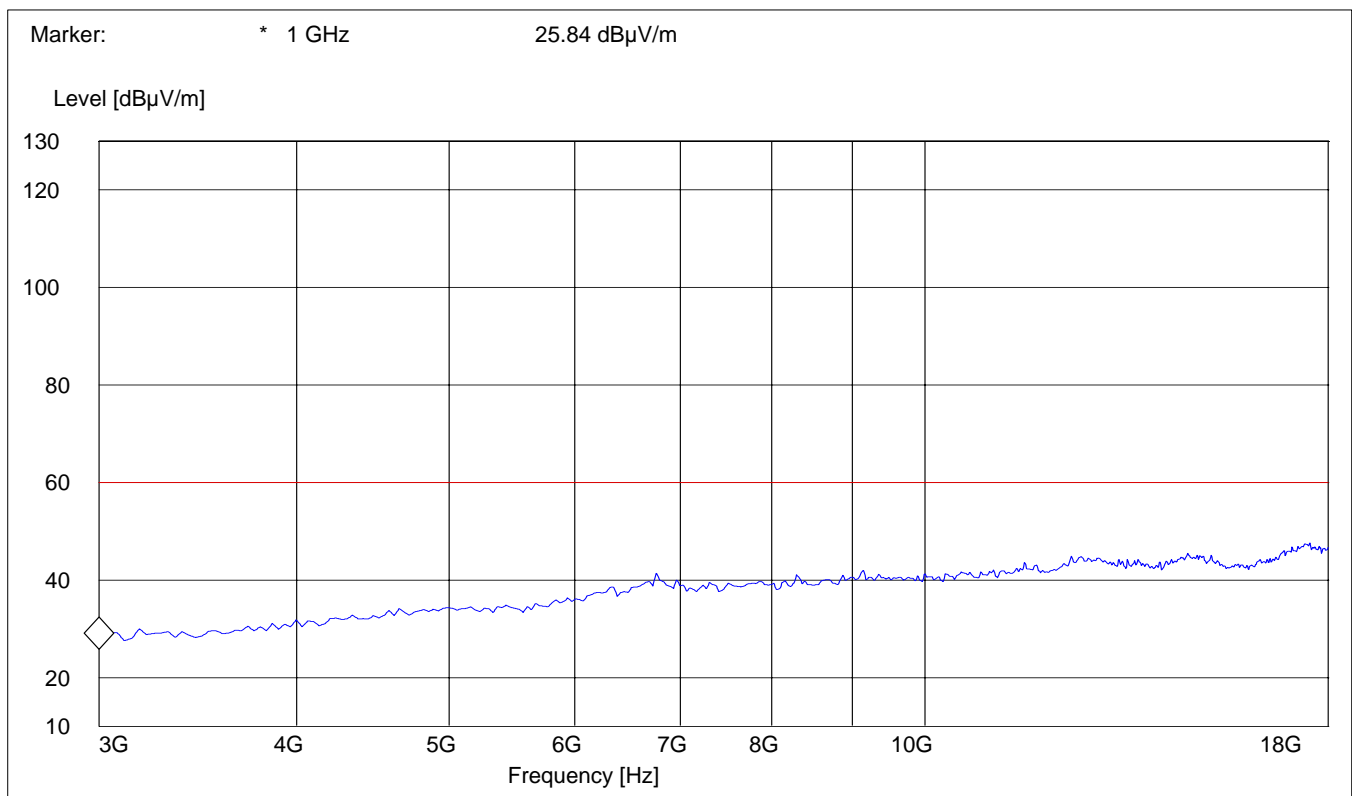


# RECEIVER SPURIOUS RADIATION 18GHz – 25GHz

§ 15.209

SWEEP TABLE: "BT Spuri hi 18-25G"


Short Description: Bluetooth Spurious 18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
18 GHz	25 GHz	Max Peak	Coupled	1 MHz	1 MHz	#141 horn (dBi)

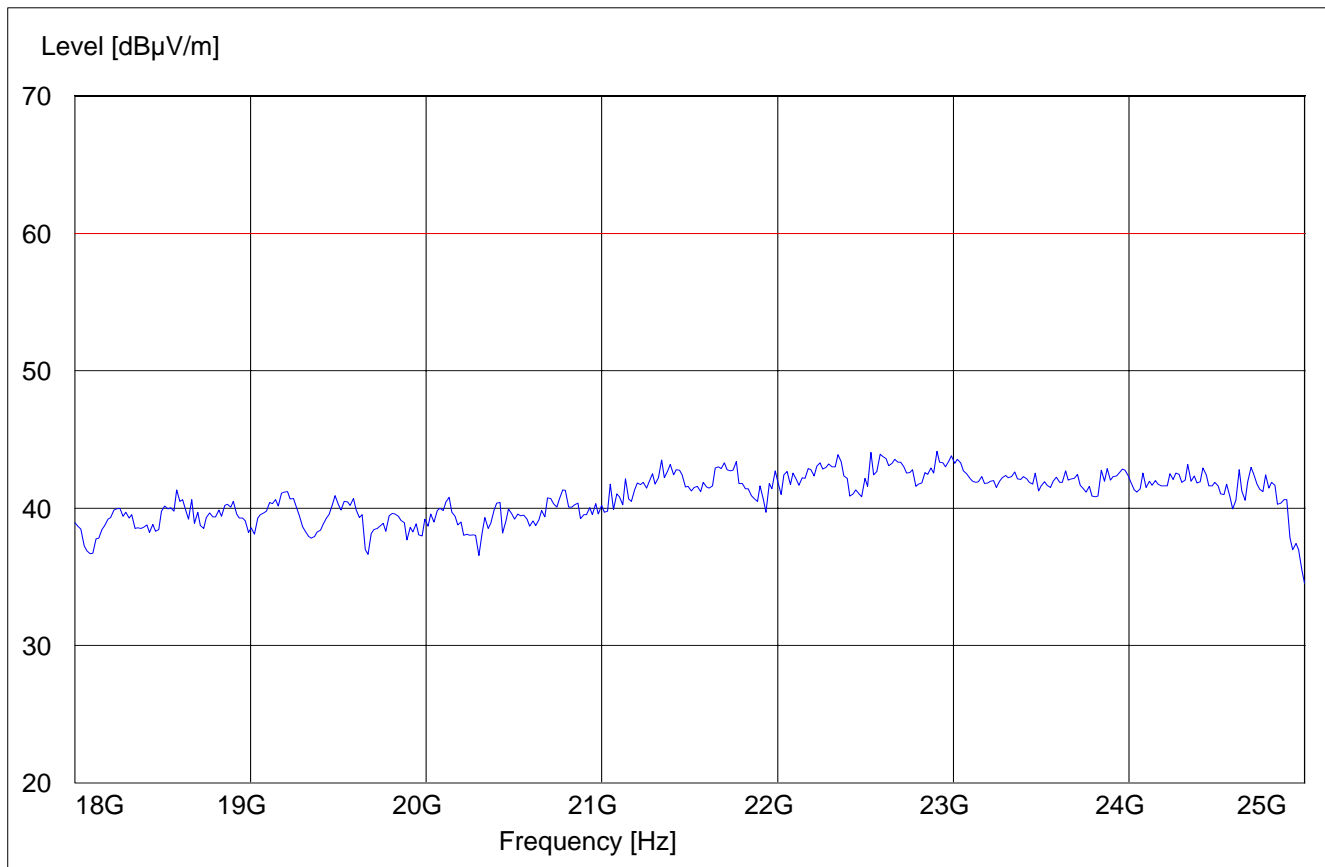

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	2-3GHz Band reject filter	BRM50701	Microtronics	6
07	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
08	Pre-Amplifier	JS4-00102600	Miteq	00616

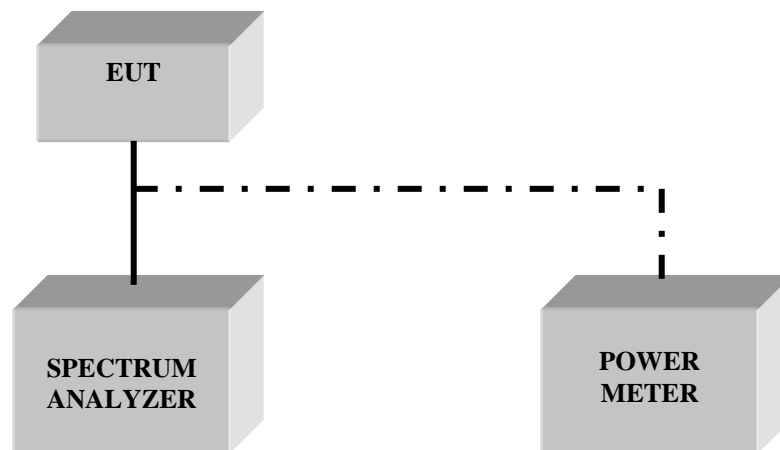**BLOCK DIAGRAMS****Conducted Testing**

## Radiated Testing

### ANECHOIC CHAMBER

