

**CETECOM Inc.**



**CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA  
Phone: +1 408 586 6200 Fax: +1 408 586 6299  
www.cetecom.com

---

Issued test report consists of 65 Pages

Page 1 (65)

---

<p><b>FCC LISTED, REG. NO.: 101450</b> <b>&amp;</b> <b>RECOGNIZED BY INDUSTRY CANADA</b> <b>IC – 3925</b></p>
---

**Test report no.: 304FCC15.247/2002**  
**FCC Part 15.247**  
**(S55)**

**Table of Contents**

<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>
<b>1.2</b>	<b>Testing laboratory</b>
<b>1.3</b>	<b>Details of applicant</b>
<b>1.4</b>	<b>Application details</b>
<b>1.5</b>	<b>Test item</b>
<b>1.6</b>	<b>Test standards</b>
<b>2</b>	<b>Technical test</b>
<b>2.1</b>	<b>Summary of test results</b>
<b>2.2</b>	<b>Test report</b>
<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

**TEST REPORT PREPARED BY:****EMC Engineer: Harpreet Sidhu****1.2 Testing laboratory****CETECOM Inc.****411 Dixon Landing Road, Milpitas, CA-95035, USA****Phone: +1 408 586 6200 Fax: +1 408 586 6299****E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)****Internet: [www.cetecom.com](http://www.cetecom.com)**

**1.3 Details of applicant**

**Name** : SIEMENS Mobile LLC  
**Street** : 16745 West Bernardo Dr.  
**City / Zip Code** : San Diego, CA 92129  
**Country** : U.S.A  
**Contact** : Dr. Peter Nevermann  
**Telephone** : (858) 521 3282  
**Tele-fax** : (858) 521 3105  
**e-mail** : [peter.nevermann@icm.siemens.com](mailto:peter.nevermann@icm.siemens.com)

**1.4 Application details**

Date of receipt of application : 2002-07-01  
Date of receipt test item : 2002-07-02  
Date of test : 2002-07-03

**1.5 Test item**

Manufacturer : SIEMENS  
Street Address : Suedstr. 9  
City / Zip Code : 47475 Kamp-Lintfort  
Country : Germany  
Marketing Name : S55  
Model No. : L55 Marlin  
**Description** : [GSM 1900 PCS mobile phone + Bluetooth](#)  
FCC-ID : PWX-S55

**Additional information**

Frequency : 2402 MHz – 2480 MHz for Bluetooth  
Type of modulation : GFSK / FHSS for Bluetooth  
Number of channels : 79 for Bluetooth  
Antenna : embedded  
Power supply : Battery or charger (AC adaptor)  
Output power : 1.38dBm (1.374mW)  
Extreme vol. Limits : 3.6 VDC – 5.2 VDC  
Extreme temp. Tolerance : -30 C to +50 C

**1.6 Test standards:** **FCC Part 15 §15.247 (DA00-705)**

**2 Technical test****2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests  
Performed

Final Verdict:  
(only “passed” if all single measurements are “passed”)

**Passed**

**Technical responsibility for area of testing:**

**2002-07-10    EMC & Radio    Lothar Schmidt (Manager)**

---

Date	Section	Name	Signature
------	---------	------	-----------

**Responsible for test report and project leader:**

**2002-07-10    EMC & Radio    Harpreet Sidhu (EMC Engineer)**

---

Date	Section	Name	Signature
------	---------	------	-----------

**2.2 Test report**

**TEST REPORT**

**Test report no. : 304FCC15.247/2002  
(S55)**

**TEST REPORT REFERENCE**

<b>LIST OF MEASUREMENTS</b>		<b>PAGE</b>
<b>ANTENNA GAIN</b>	<b>§ 15.204</b>	<b>7</b>
<b>CARRIER FREQUENCY SEPERATION</b>	<b>§15.247(a)</b>	<b>8</b>
<b>NUMBER OF HOPPING CHANNELS</b>	<b>§15.247(a)</b>	<b>9</b>
<b>TIME OF OCCUPANCY (DWELL TIME)</b>	<b>§15.247(a)</b>	<b>13</b>
<b>SPECTRUM BANDWIDTH OF FHSS SYSTEM</b>	<b>§15.247(a)</b>	<b>16</b>
<b>POWER SPECTRAL DENSITY</b>	<b>§15.247 (d)</b>	<b>20</b>
<b>MAXIMUM PEAK OUTPUT POWER</b>	<b>§ 15.247 (b) (1)</b>	<b>24</b>
<b>BAND EDGE COMPLIANCE</b>	<b>§15.247 (c)</b>	<b>32</b>
<b>EMISSION LIMITATIONS</b>	<b>§ 15.247 (c) (1)</b>	<b>40</b>
<b>CONDUCTED EMISSIONS</b>	<b>§ 15.107/207</b>	<b>57</b>
<b>RECEIVER SPURIOUS RADIATION</b>	<b>§ 15.209</b>	<b>58</b>
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>		<b>63</b>
<b>BLOCK DIAGRAMS</b>		<b>64</b>

**ANTENNA GAIN**

§ 15.204


The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

	Low channel	Mid channel	High channel
Conducted Power	0.17 dBm	-2.01 dBm	-2.23 dBm
Raidated Power (EIRP)	1.38 dBm	0.37 dBm	1.01 dBm
Antenna Gain	1.21 dBi	2.38 dBi	3.24dBi

The calculated antenna gain is between 1.21 and 3.24 dBi.

## CARRIER FREQUENCY SEPERATION

§15.247(a)

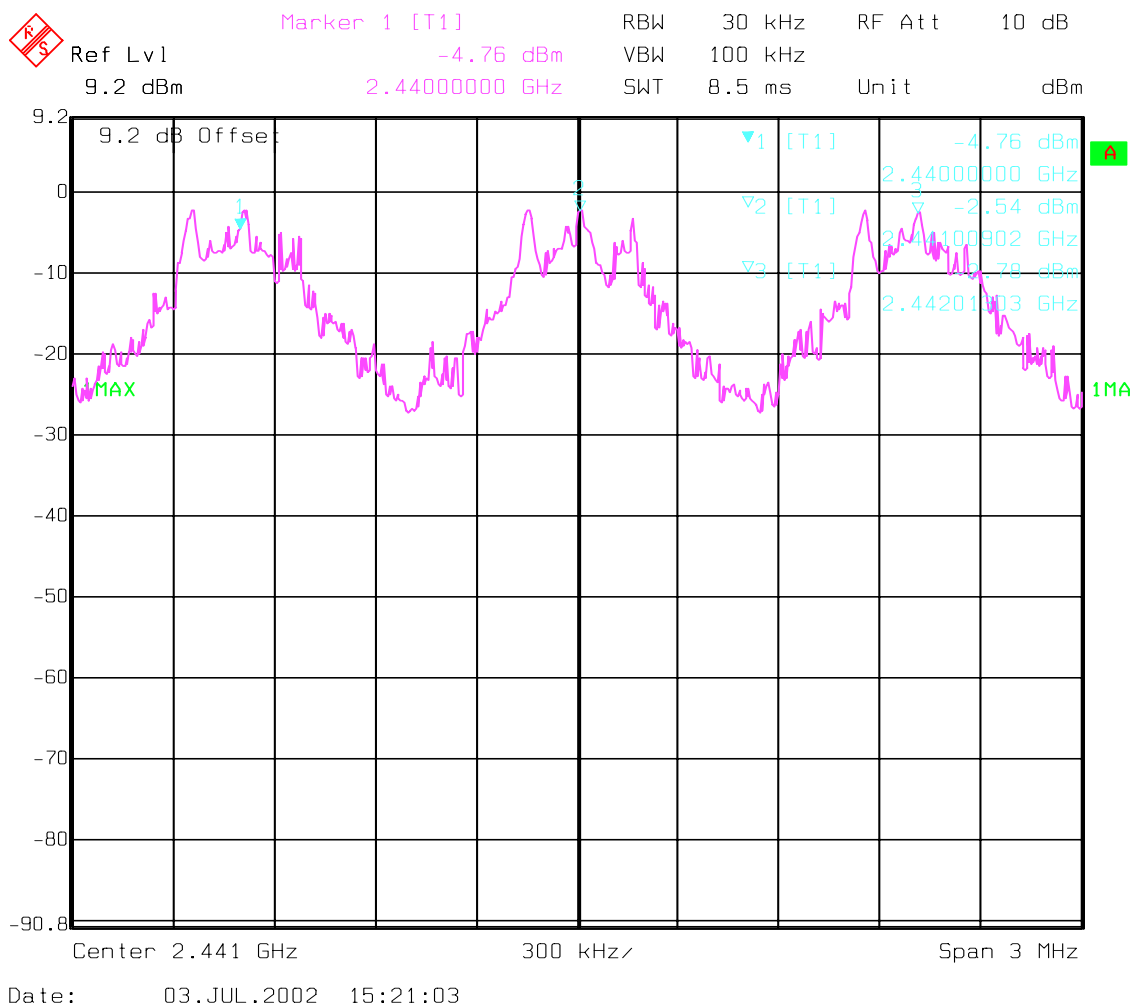




## NUMBER OF HOPPING CHANNELS

§15.247(a)

The number of hopping channels is 79 (see next 4 plots)


The right red line corresponds to the left red line from the next plot.

### Plot 1: Total 23

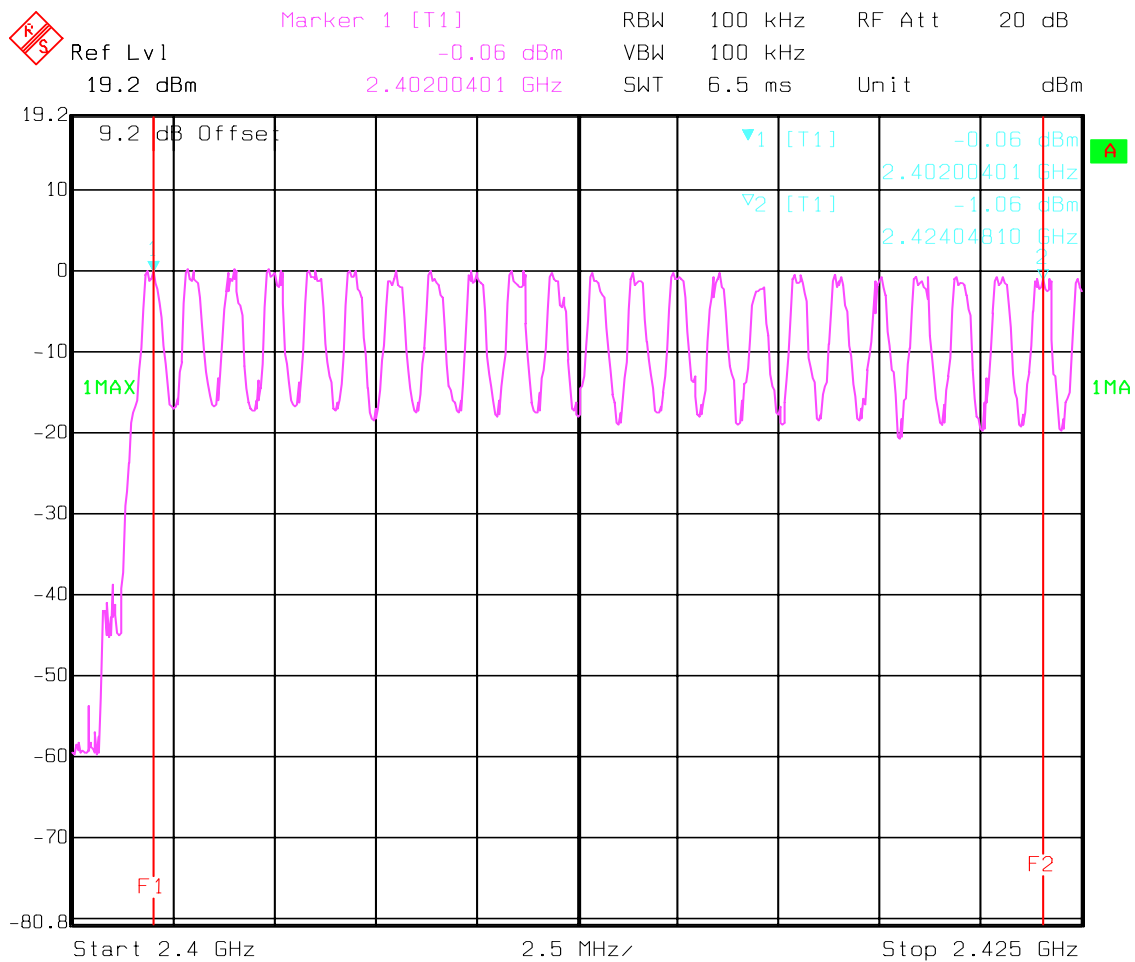


Date: 03.JUL.2002 15:25:29

Plot 2: Total 24

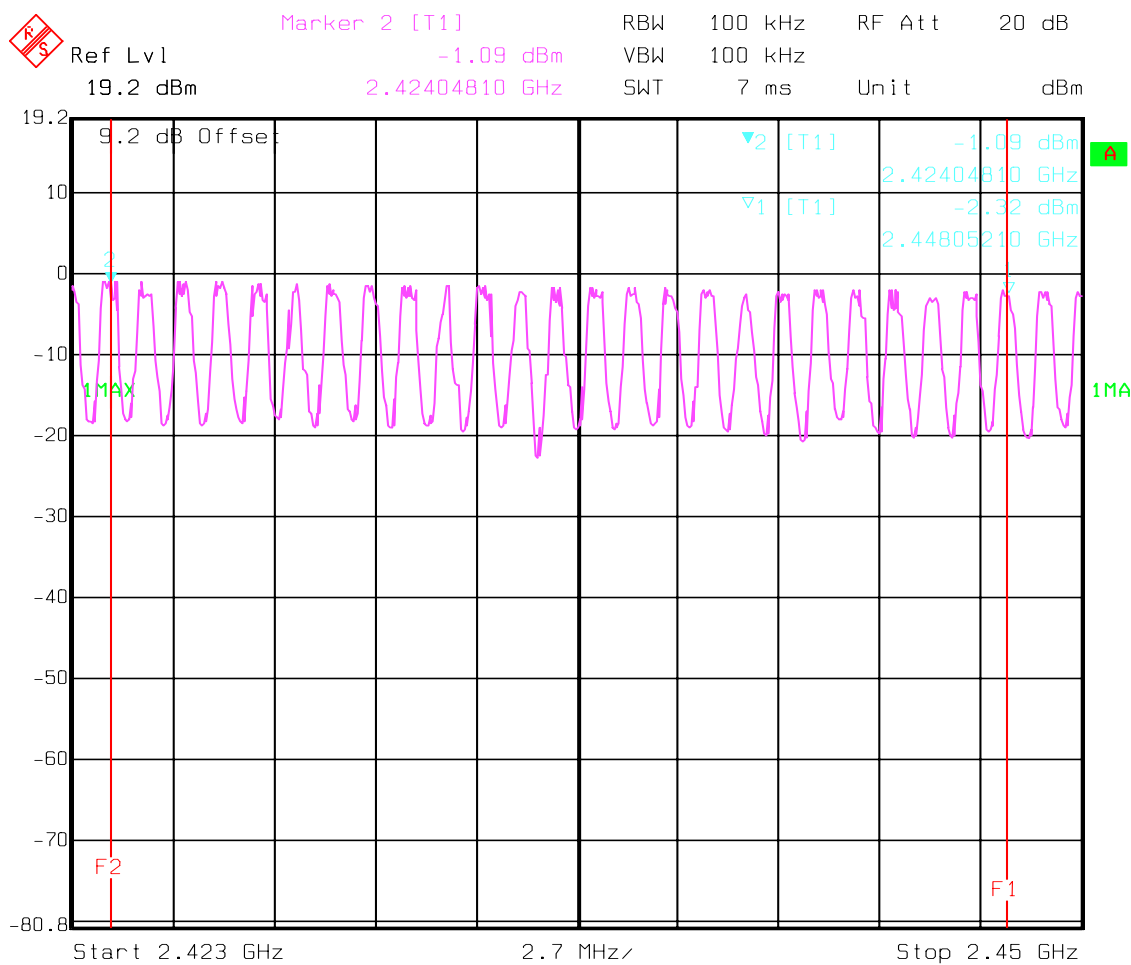


Date: 03.JUL.2002 15:29:44

Plot 3: Total 20

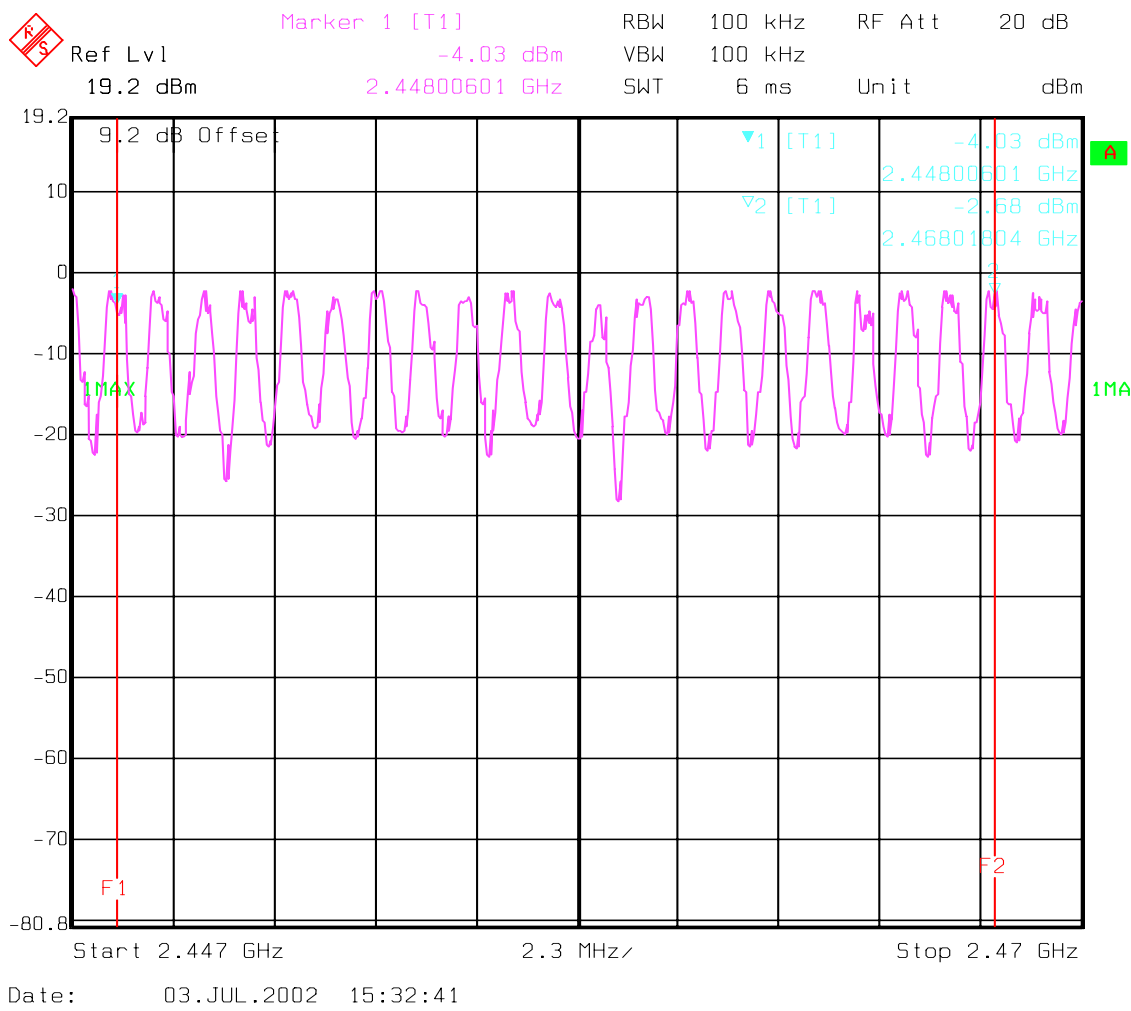

Plot 4: Total 12

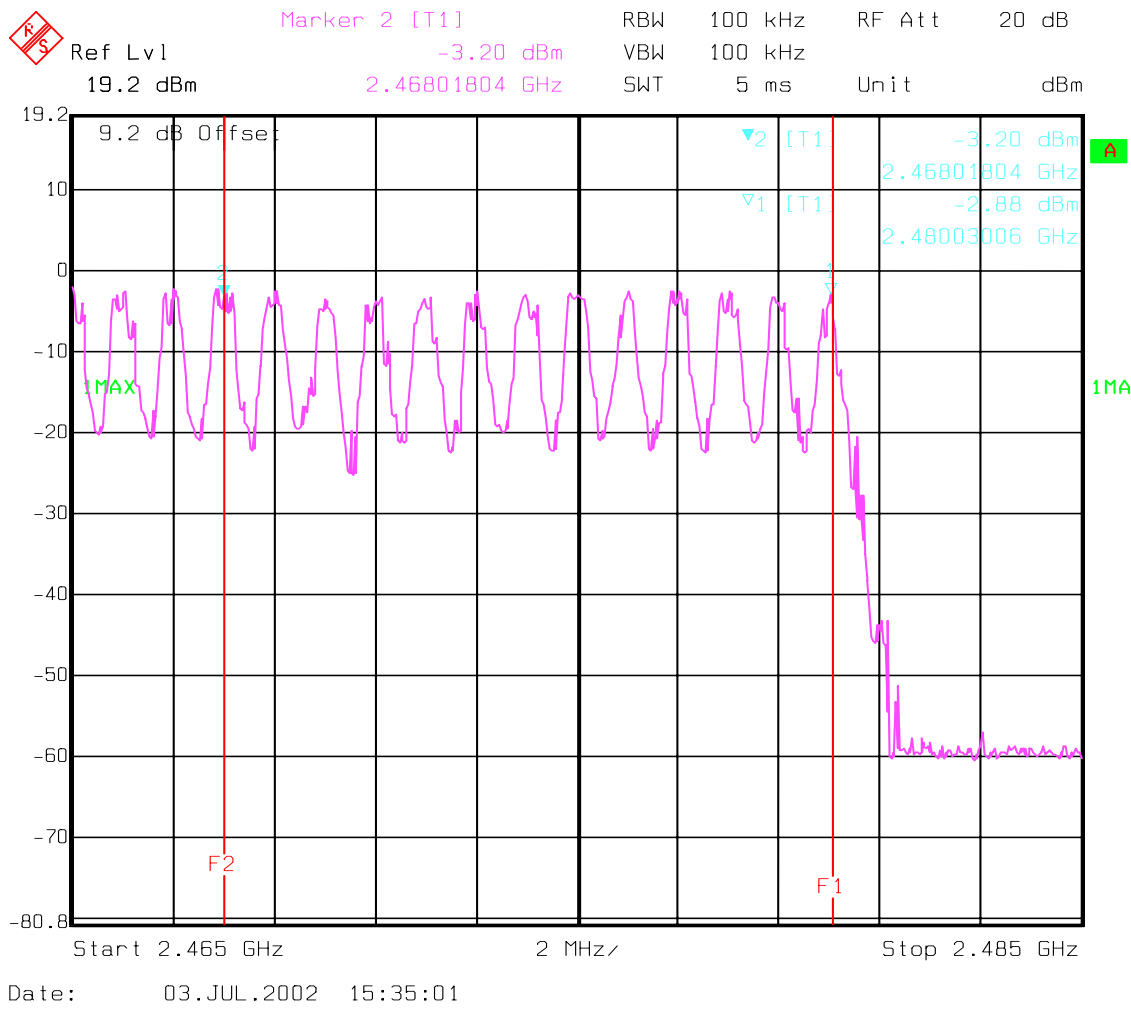

## TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

### DH1 – Packet

The system makes worst case 1600 hops per second or 1 time slot has a length of 625μs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and so for 30 seconds you have 303.9 times of appearance .

Each Tx-time per appearance is 413.2 μs.

So we have  $303.9 * 413.2 \mu s = 125.57 \text{ ms}$  per 30 seconds.

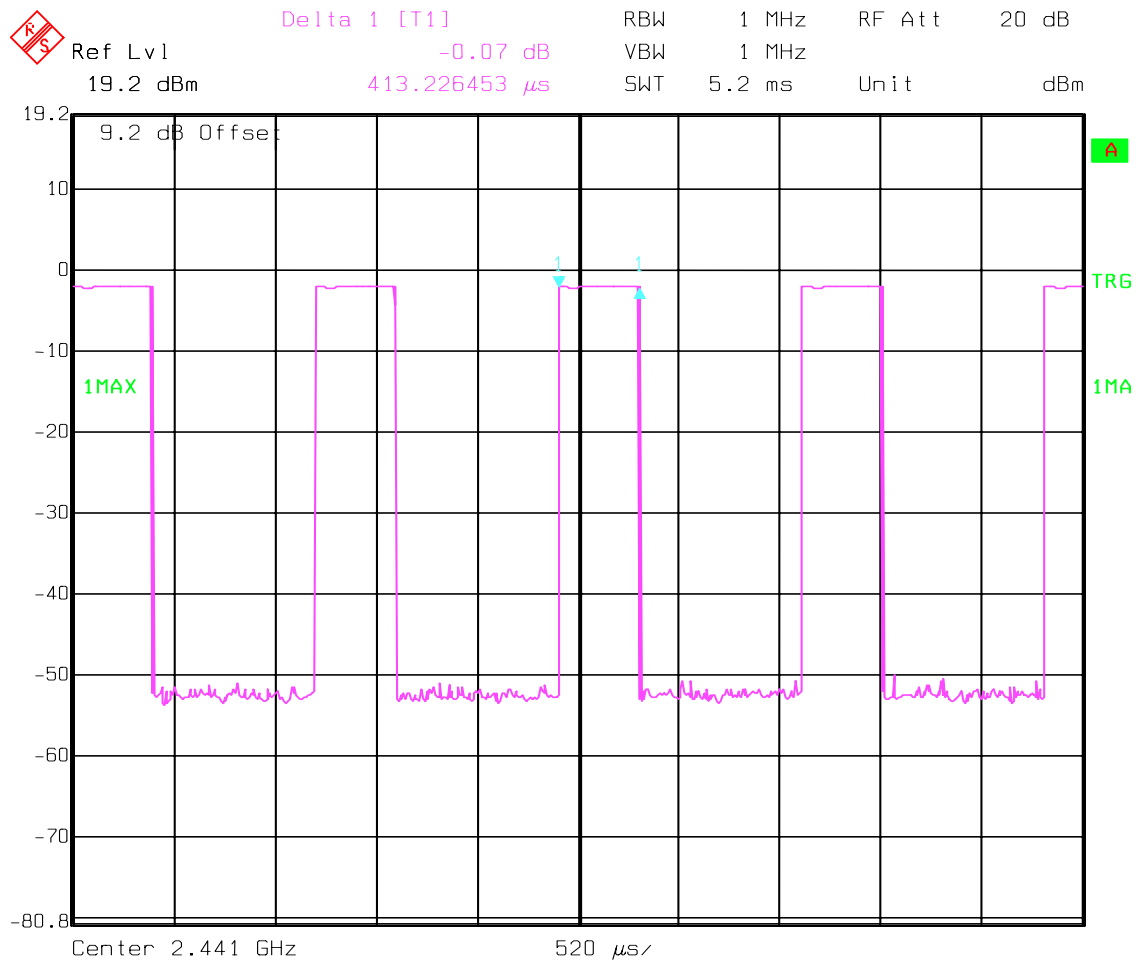

Date: 03.JUL.2002 15:38:28

## TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

### DH3 – Packet

A DH3 Packets need 3 time slots for transmit and 1 for receicing, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 30 seconds you have 153 times of appearance .

Each Tx-time per appearance is 1.66 ms.

So we have  $153 * 1.66 \text{ ms} = 253.98 \text{ ms}$  per 30 seconds.

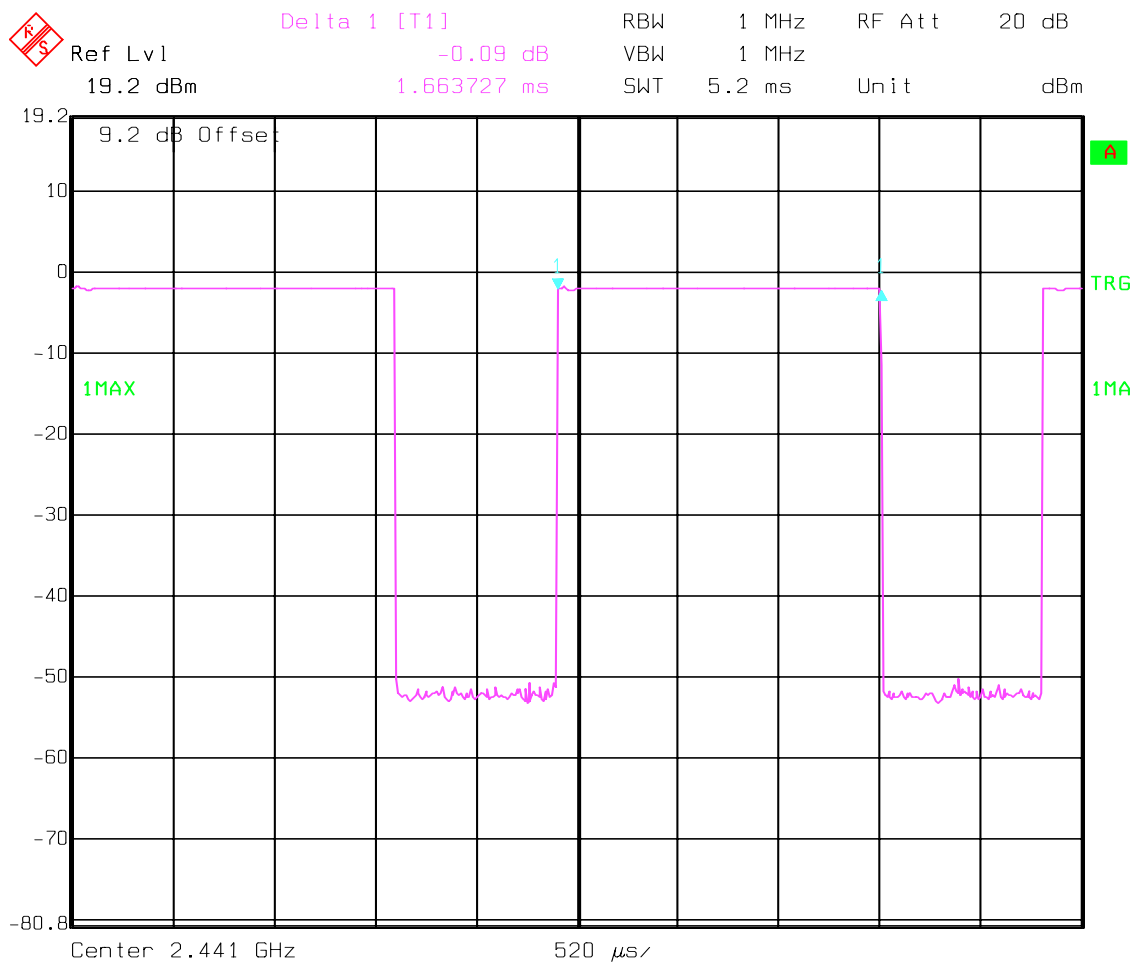

Date: 03.JUL.2002 15:56:40

## TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

### DH5 – Packet

At DH5 Packets you need 5 time slots for transmit and 1 for receicing,then the system makes worst case 266,7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 100.8 times of appearance .

Each tx-time per appearance is 2.91ms.

So we have  $100.8 * 2.91\text{ms} = 293.32 \text{ ms}$  per 30 seconds.

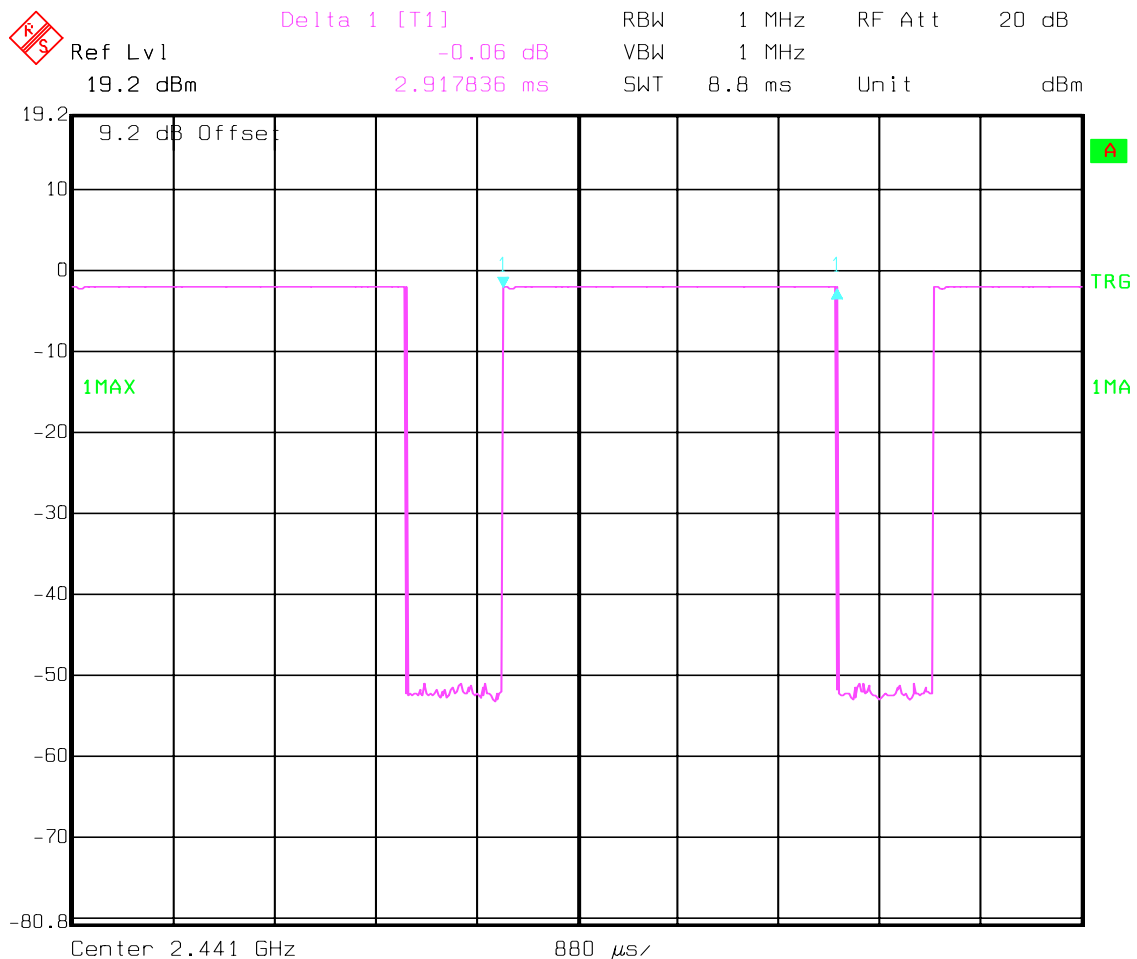

Date: 03.JUL.2002 16:19:23

**SPECTRUM BANDWIDTH OF FHSS SYSTEM**  
**20 dB bandwidth**

§15.247(a)

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
Frequency (MHz)		2402	2440	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.8)VDC	897.8	897.8	893.8

RBW / VBW as provided in the "Measurement Guidelines" (DA 00-705, March 30, 2000)


**LIMIT****SUBCLAUSE §15.247(a) (1)****The maximum 20dB bandwith shall be at maximum 1000 KHz**



## SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)

Lowest Channel: 2402MHz

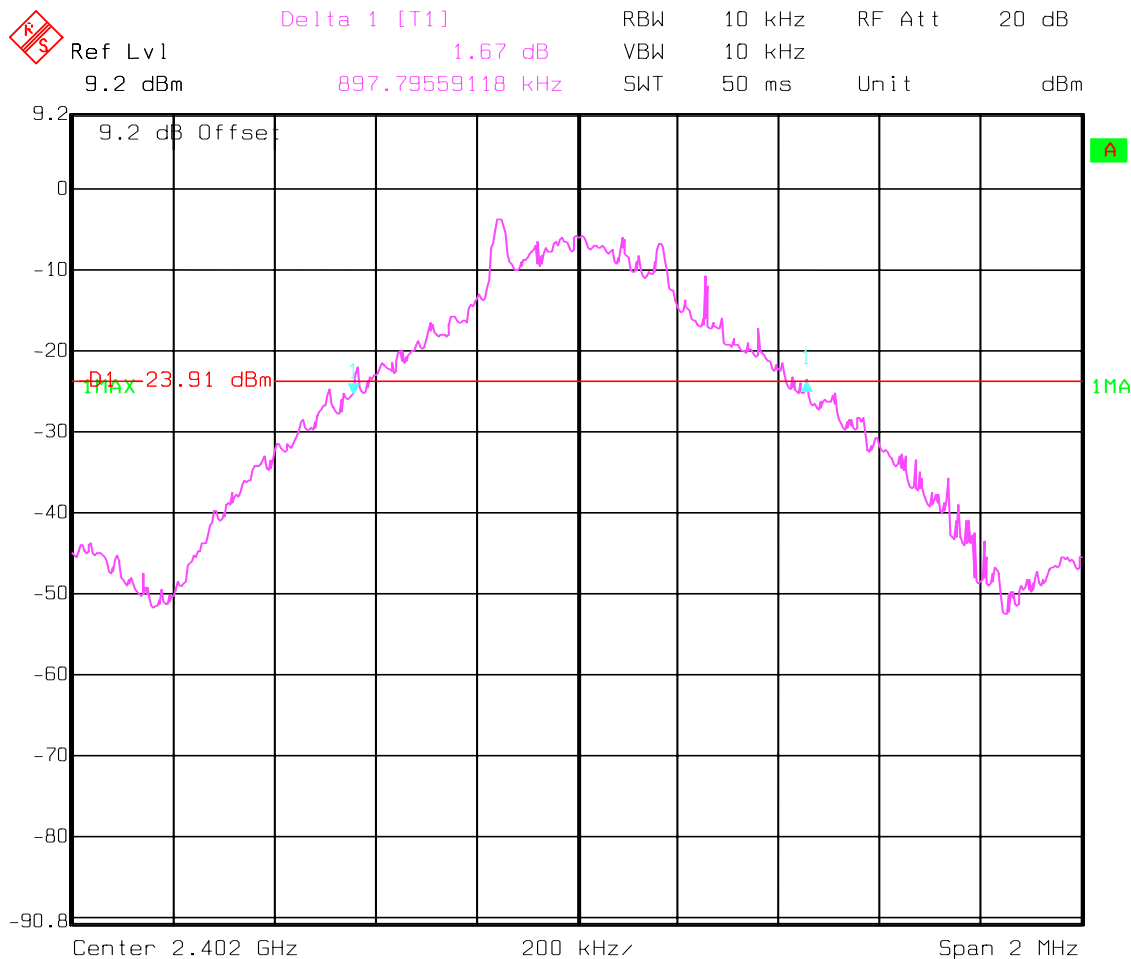


Date: 03.JUL.2002 18:09:23

## SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth


§15.247(a)

Mid Channel: 2440MHz

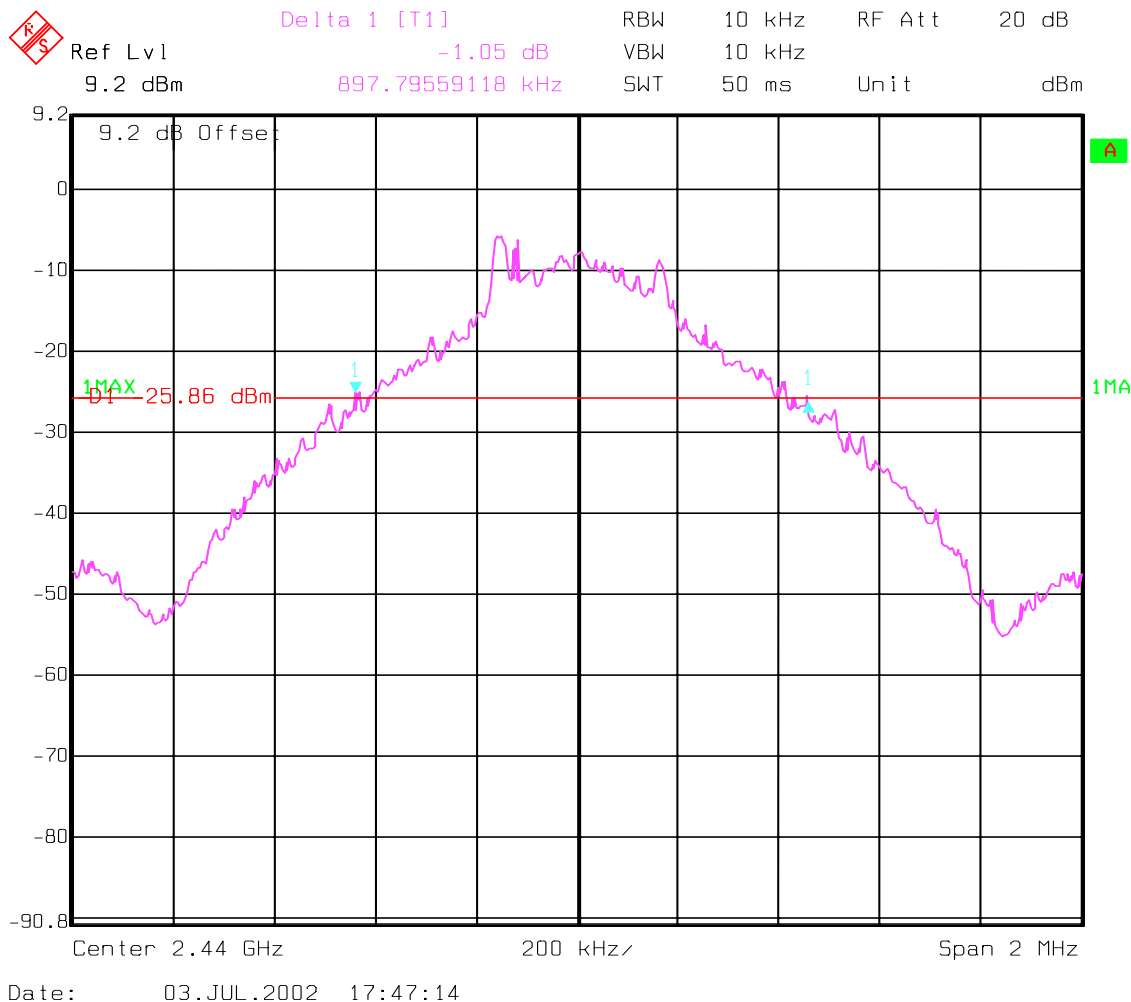

SPECTRUM BANDWIDTH OF FHSS SYSTEM      §15.247(a)  
20 dB bandwidth

Highest Channel: 2480MHz

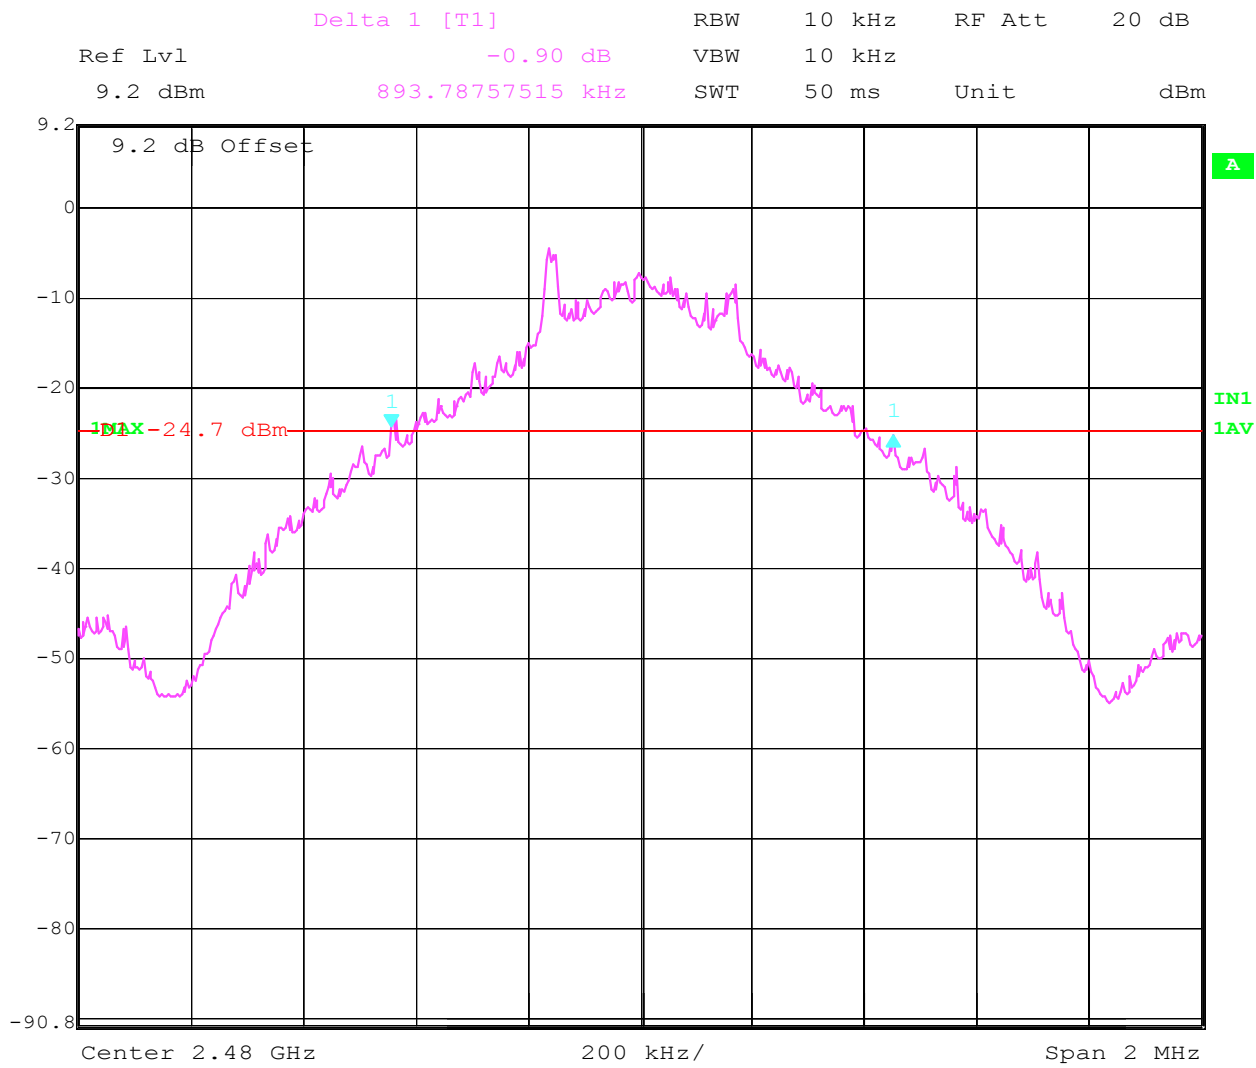

Date: 5.JUL.2002 17:15:52

**POWER SPECTRAL DENSITY****§15.247 (d)**

TEST CONDITIONS		POWER SPECTRAL DENSITY (dBm)		
Frequency (MHz)		2402	2440	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.8)VDC	-0.06	-2.54	-3.20

**LIMIT****SUBCLAUSE §15.247(d)**


The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

ANALYZER SETTINGS: RBW=3KHz, VBW=3KHz

## POWER SPECTRAL DENSITY

§15.247(d)

Lowest Channel: 2402MHz

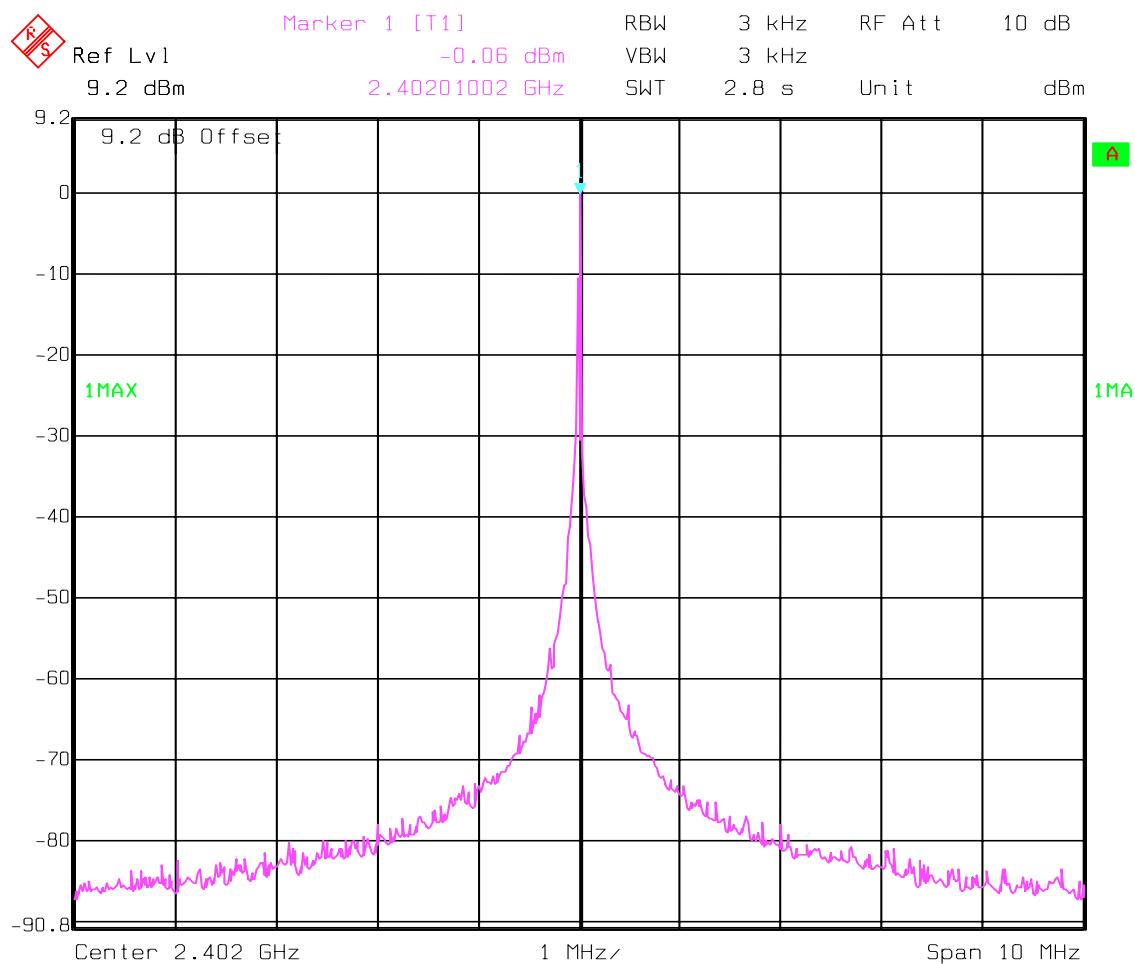


Date: 03.JUL.2002 13:59:11

## POWER SPECTRAL DENSITY

§15.247(d)

Middle Channel: 2440MHz

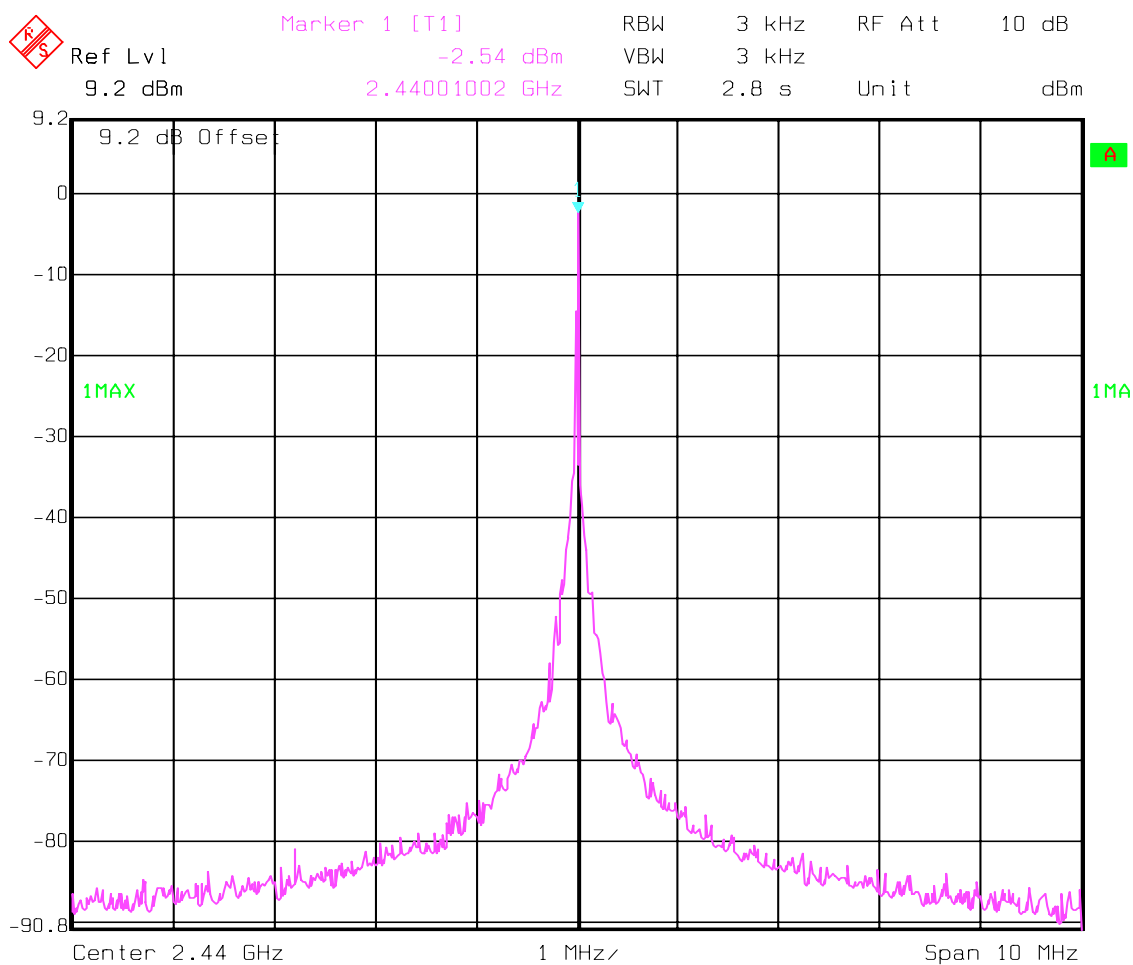


Date: 03.JUL.2002 14:28:44

## POWER SPECTRAL DENSITY

§15.247(d)

Highest Channel: 2480MHz

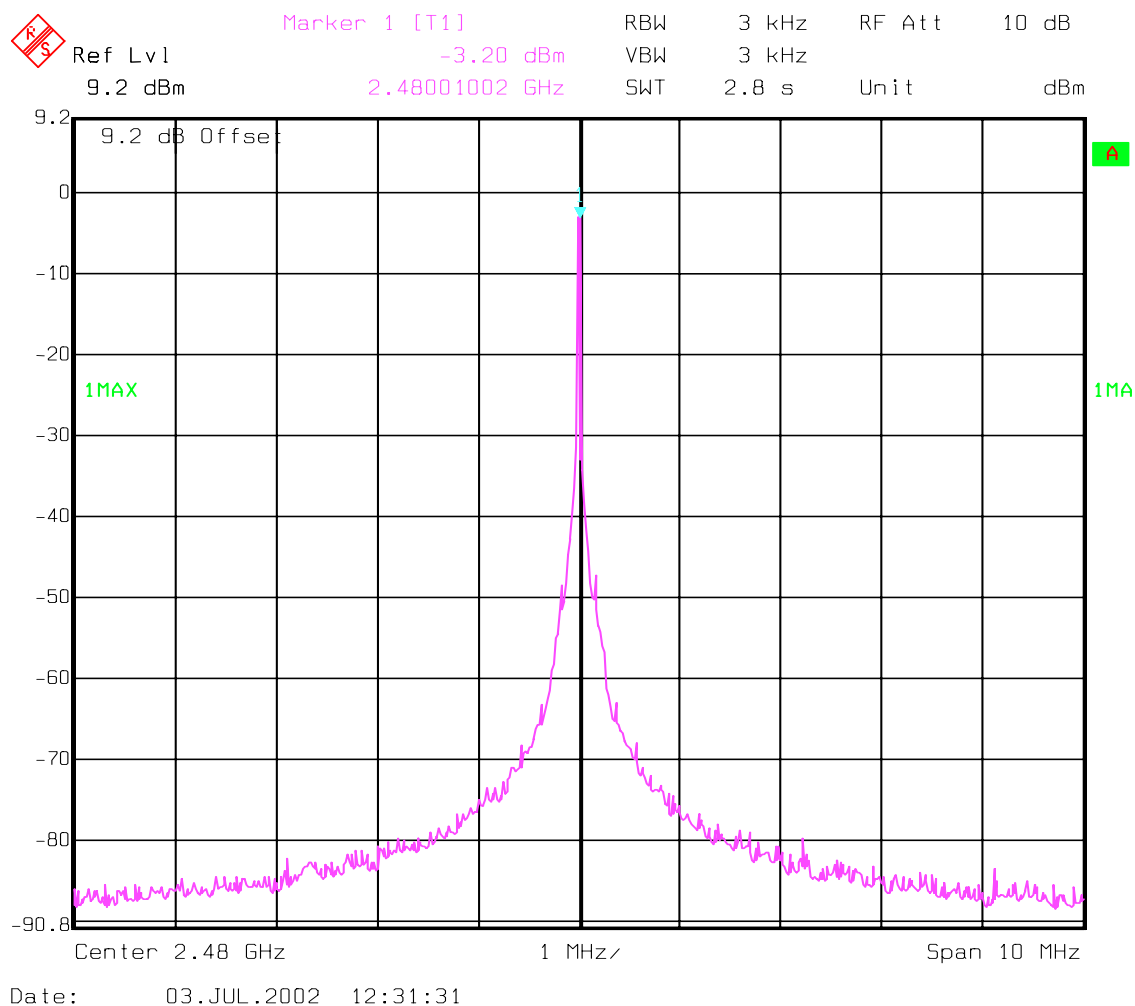

**MAXIMUM PEAK OUTPUT POWER  
(conducted)****§ 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2440	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.8)VDC	0.17	-2.01	-2.23
Measurement uncertainty		±0.5dBm		

RBW / VBW : 3 MHz


**LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt



PEAK OUTPUT POWER (CONDUCTED)      §15.247 (b)


Lowest Channel: 2402MHz

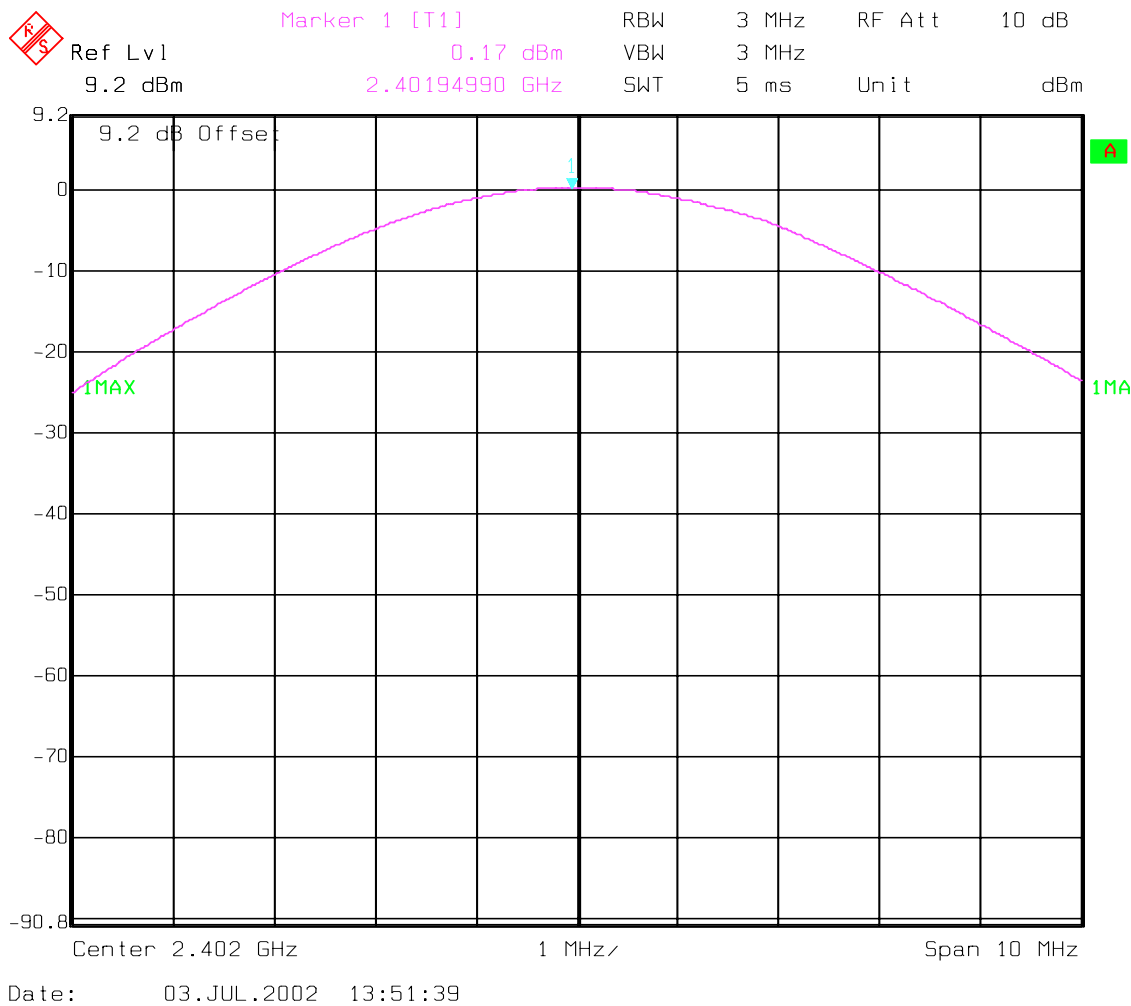

## PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)


Mid Channel: 2440MHz

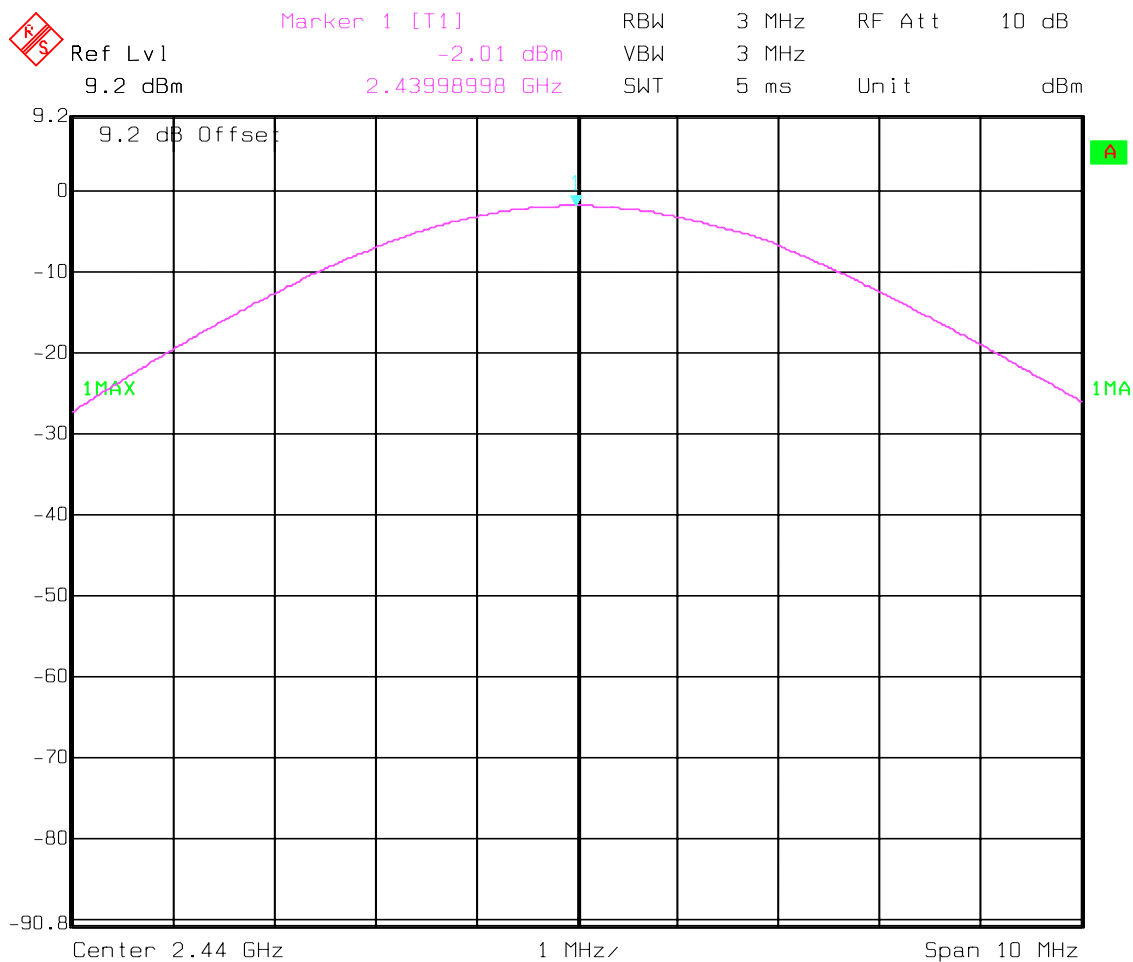

Date: 03.JUL.2002 14:23:00

PEAK OUTPUT POWER (CONDUCTED) §15.247 (b)

Highest Channel: 2480MHz

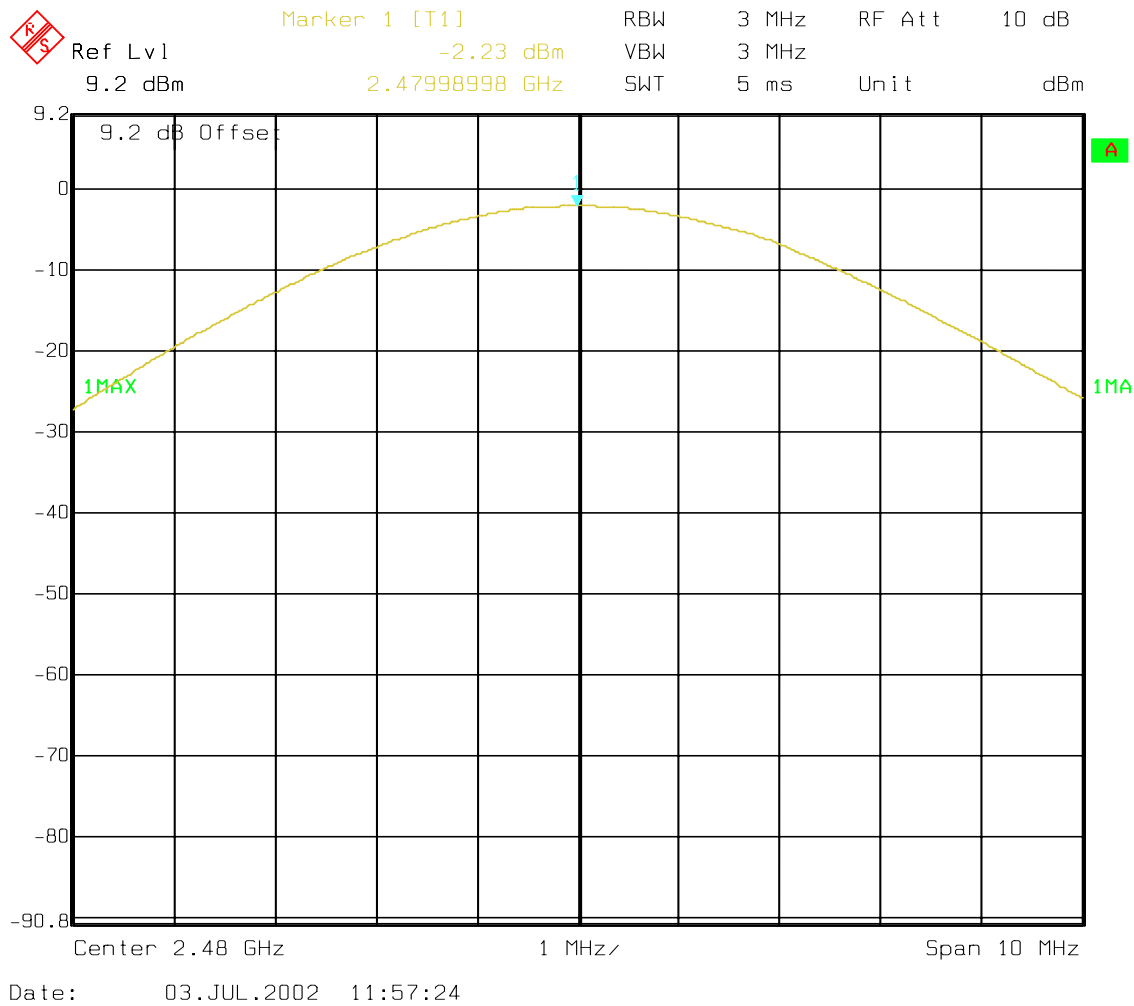

**MAXIMUM PEAK OUTPUT POWER  
(RADIATED)**

§ 15.247 (b) (1)

**EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2440	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.8)VDC	1.38	0.37	1.01
Measurement uncertainty		±0.5dBm		

RBW/VBW : 3 MHz

**LIMIT**

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

## PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

### Lowest Channel: 2402MHz

SWEEP TABLE: "EIRP BT low channel"

Short Description: EIRP Bluetooth channel-2402MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.397GHz	2.407GHz	MaxPeak	Coupled	3 MHz

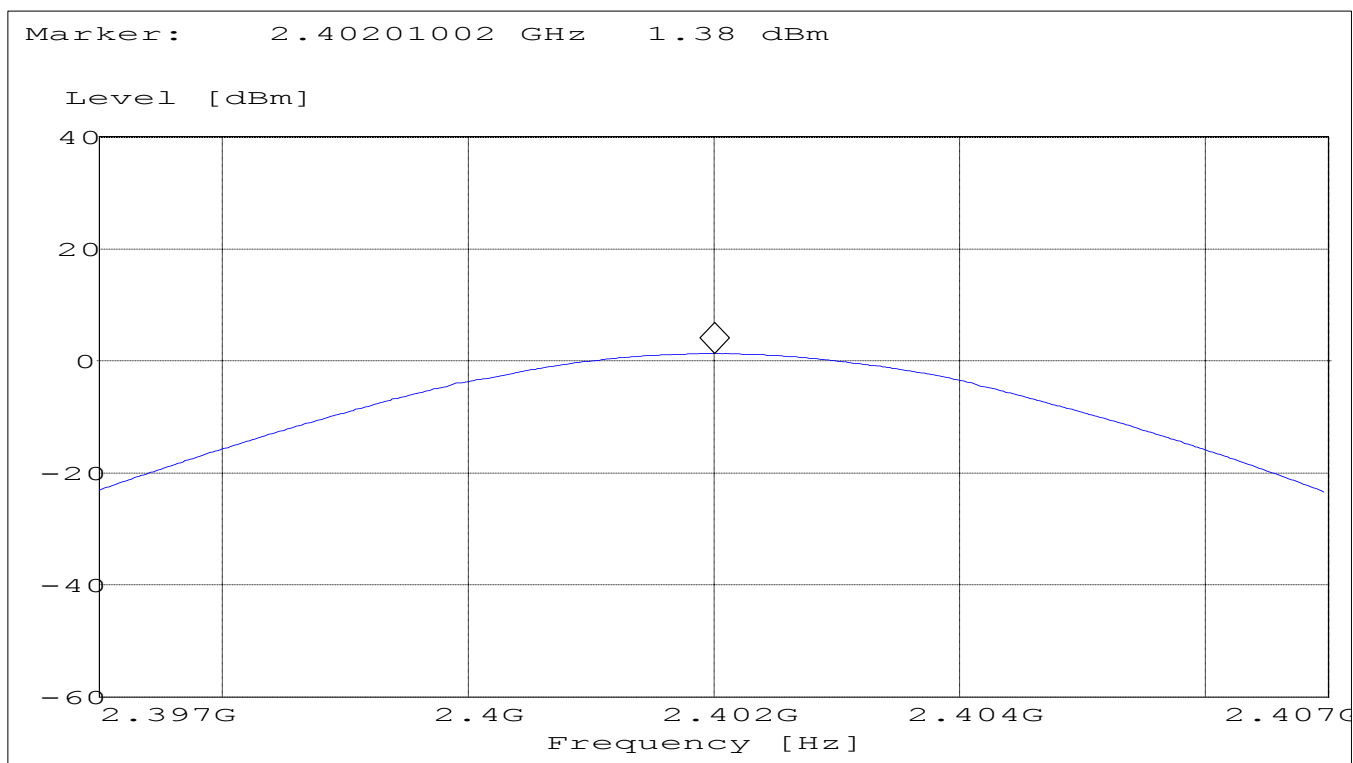


**PEAK OUTPUT POWER (RADIATED)**

**§15.247 (b) (1)**

**Mid Channel: 2440MHz**

SWEEP TABLE: "EIRP BT Mid channel"

Short Description:		EIRP Bluetooth channel-2441MHz		
Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.435GHz	2.445GHz	MaxPeak	Coupled	3 MHz

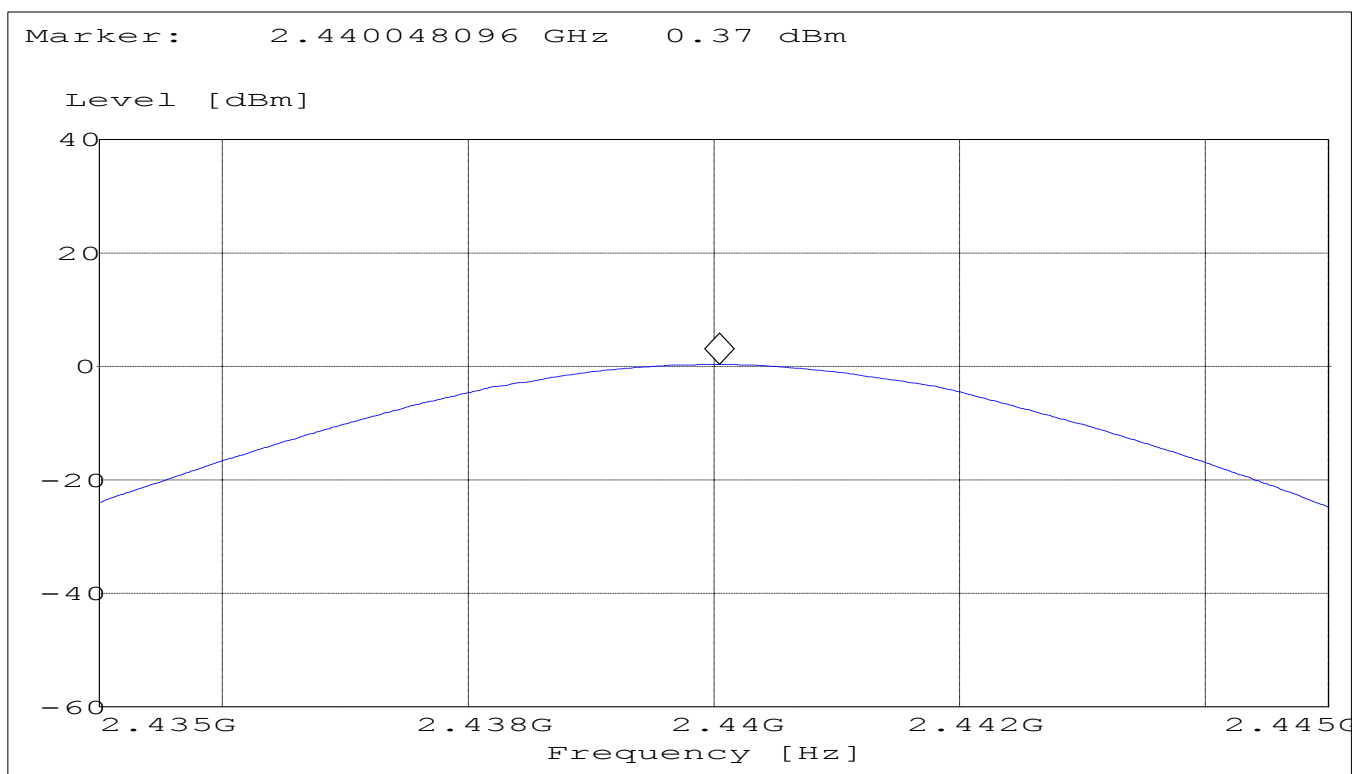

## PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

### Highest Channel: 2480MHz

SWEEP TABLE: "EIRP BT High channel"

Short Description: EIRP Bluetooth channel-2480MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.475GHz	2.485GHz	MaxPeak	Coupled	3 MHz

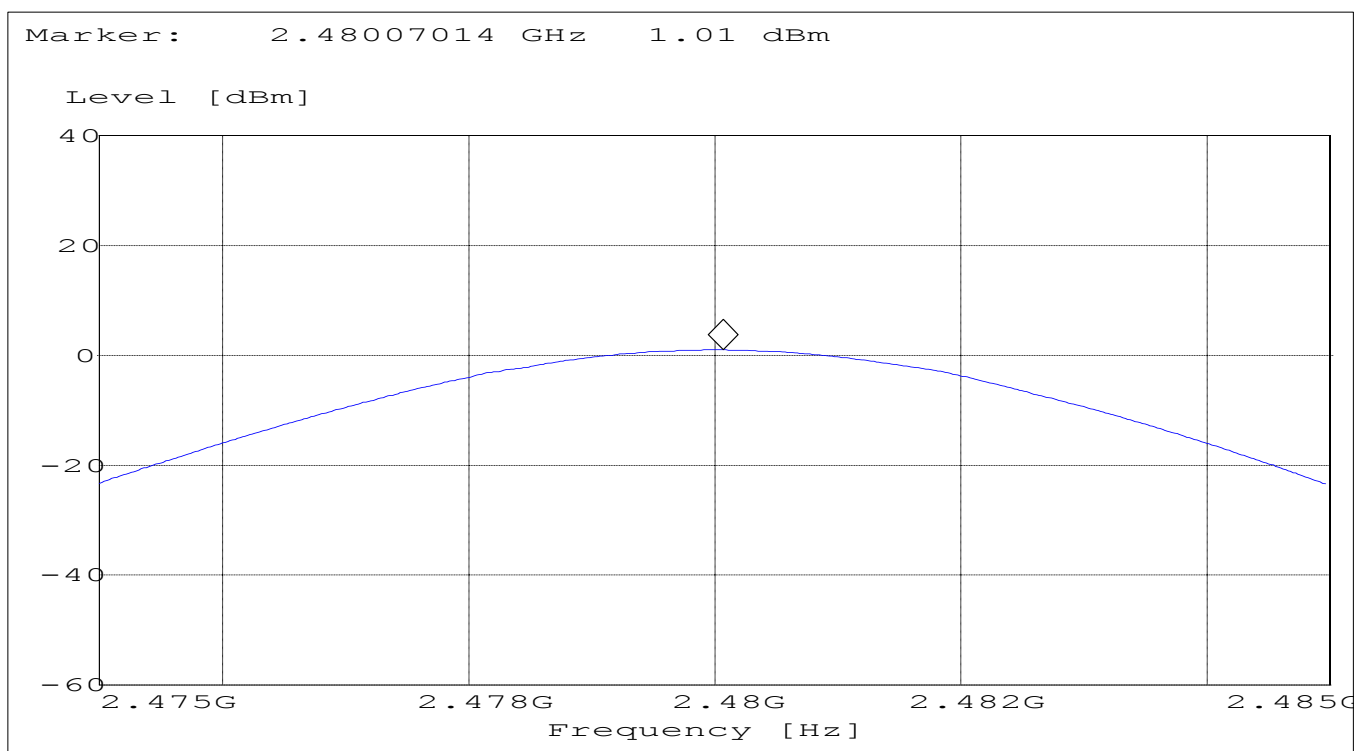

## BAND EDGE COMPLIANCE


§15.247 (c)

### Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

#### (Hopping – OFF, Average measurement)

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_AVG"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

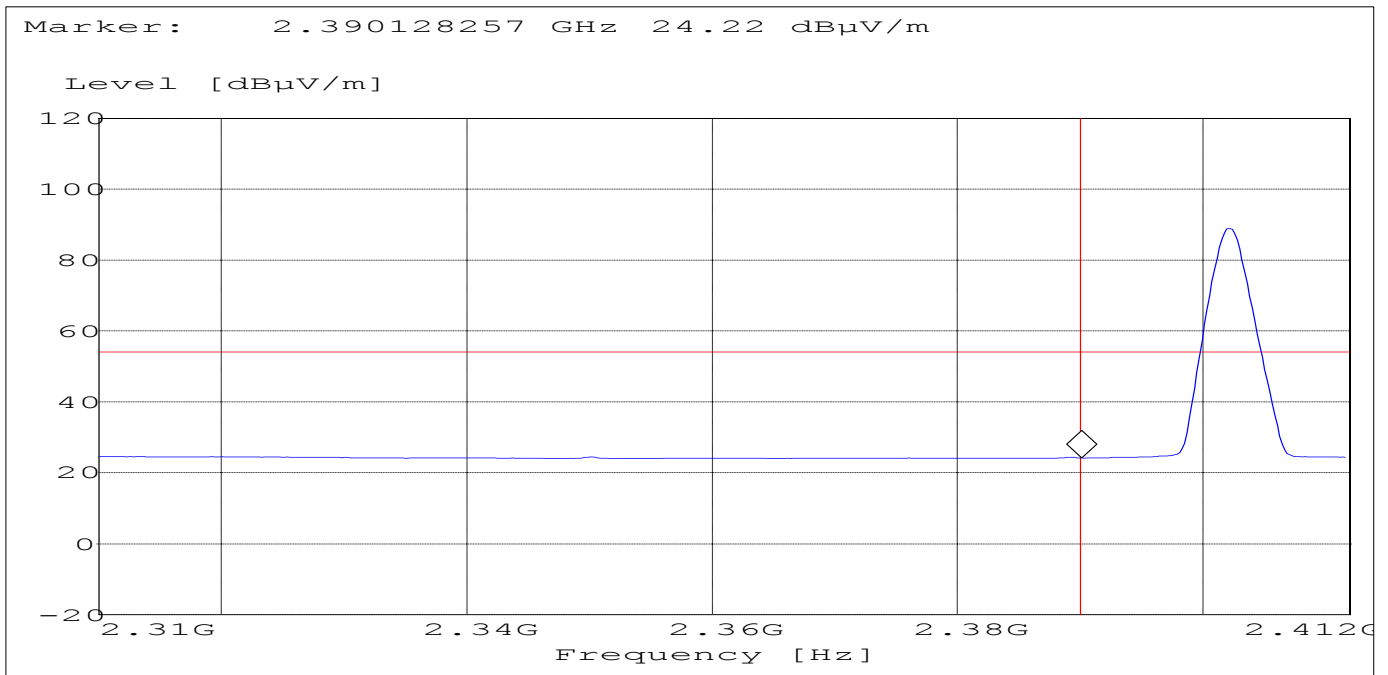



## BAND EDGE COMPLIANCE


§15.247 (c)

### Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

#### (Hopping – OFF, Peak measurement)

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_Pk"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

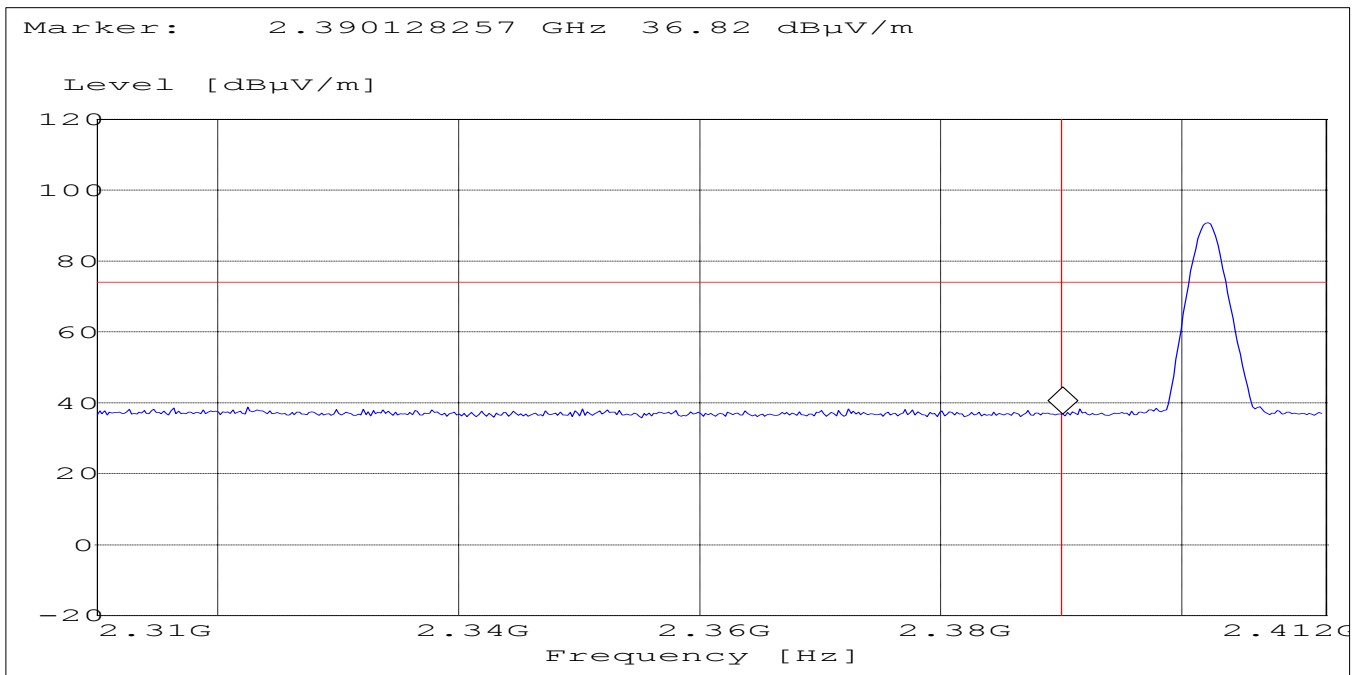

## BAND EDGE COMPLIANCE


§15.247 (c)

### Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

#### (Hopping – ON, Average measurement)

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_AVG"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

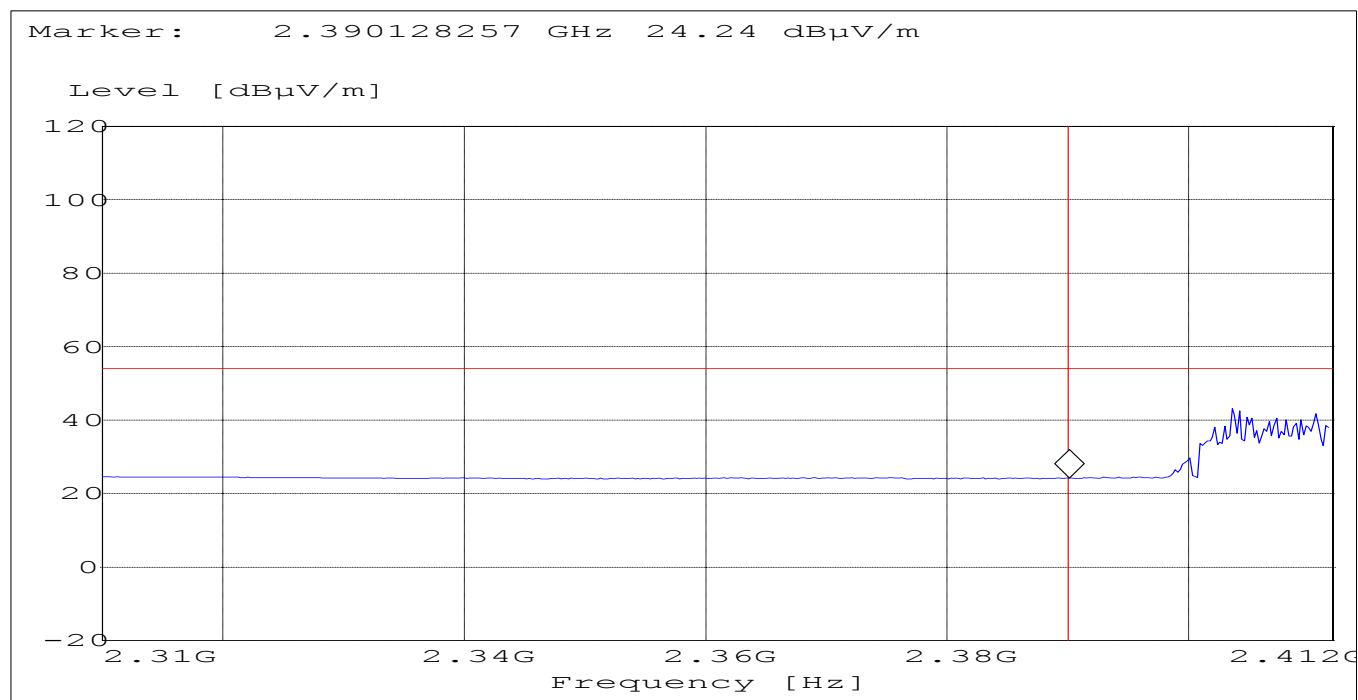

## BAND EDGE COMPLIANCE

§15.247 (c)


### Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

#### (Hopping – ON, Peak measurement)

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_Pk"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

Marker: 2.390128257 GHz 36.83 dBμV/m

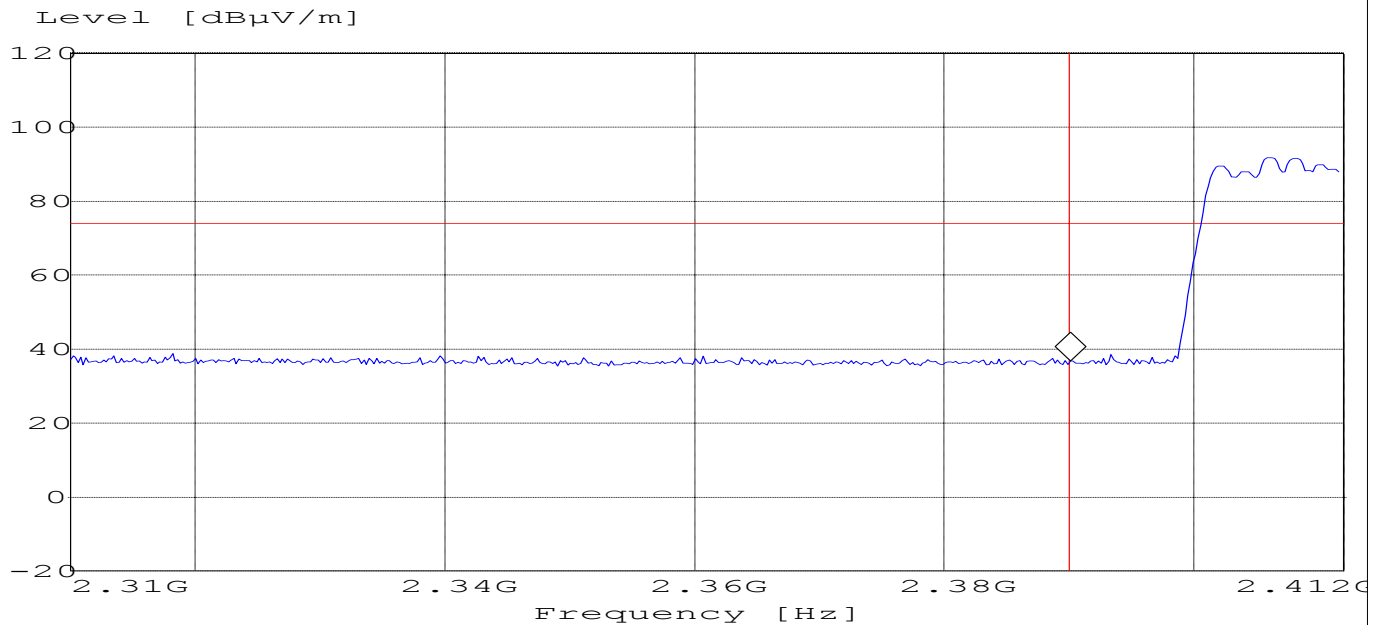

## BAND EDGE COMPLIANCE


§15.247 (c)

### High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

#### (Hopping – OFF, Average measurement)

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_AVG"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.472 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

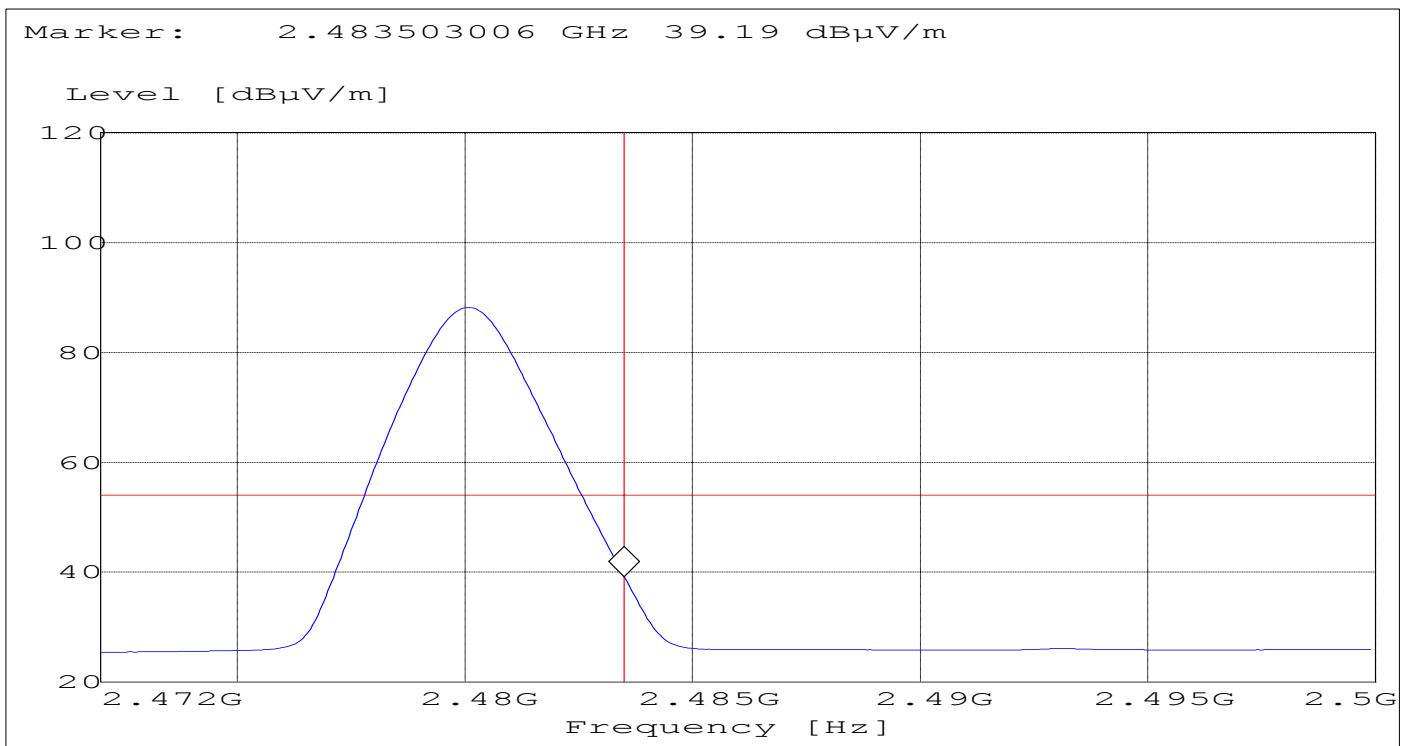

## BAND EDGE COMPLIANCE


§15.247 (c)

### High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

#### (Hopping – OFF, Peak measurement)

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_PK"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.472 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

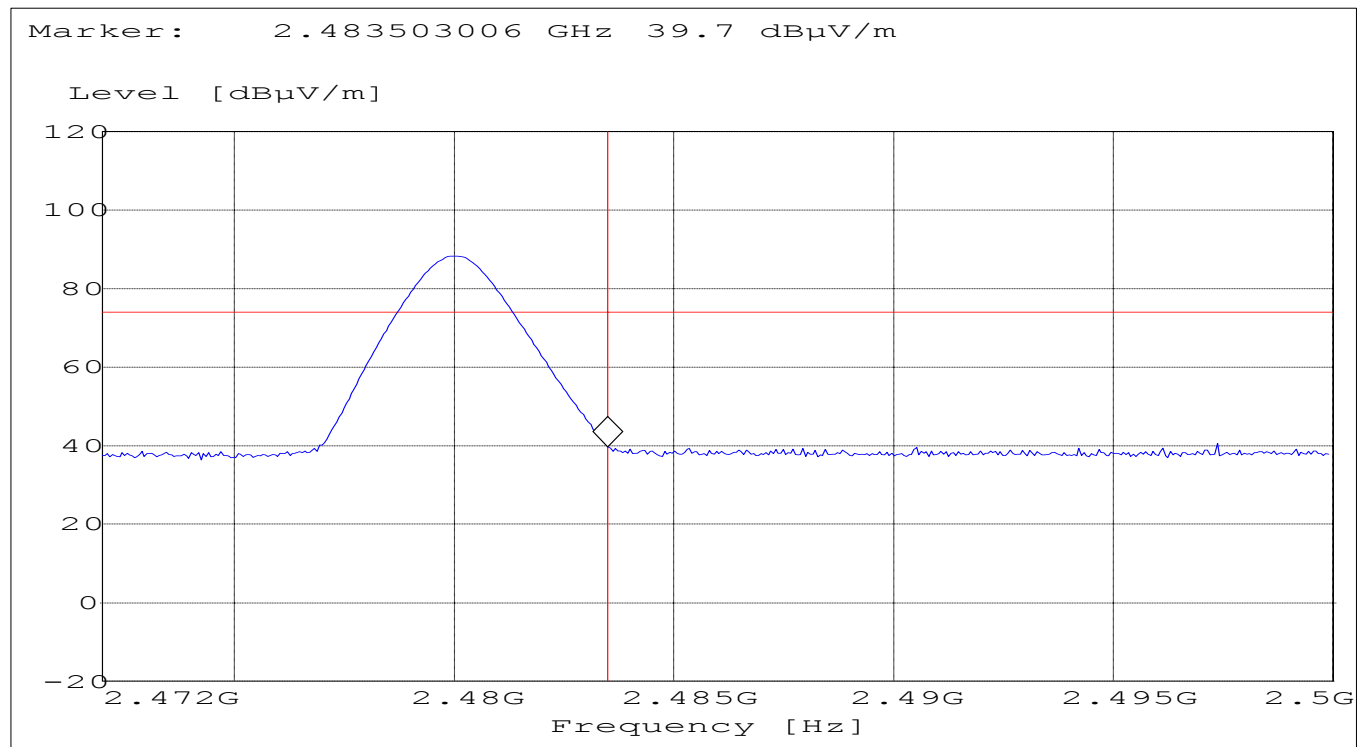

## BAND EDGE COMPLIANCE

§15.247 (c)


### High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

#### (Hopping – ON, Average measurement)

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_AVG"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.472 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

Marker: 2.483503006 GHz 26.58 dBμV/m

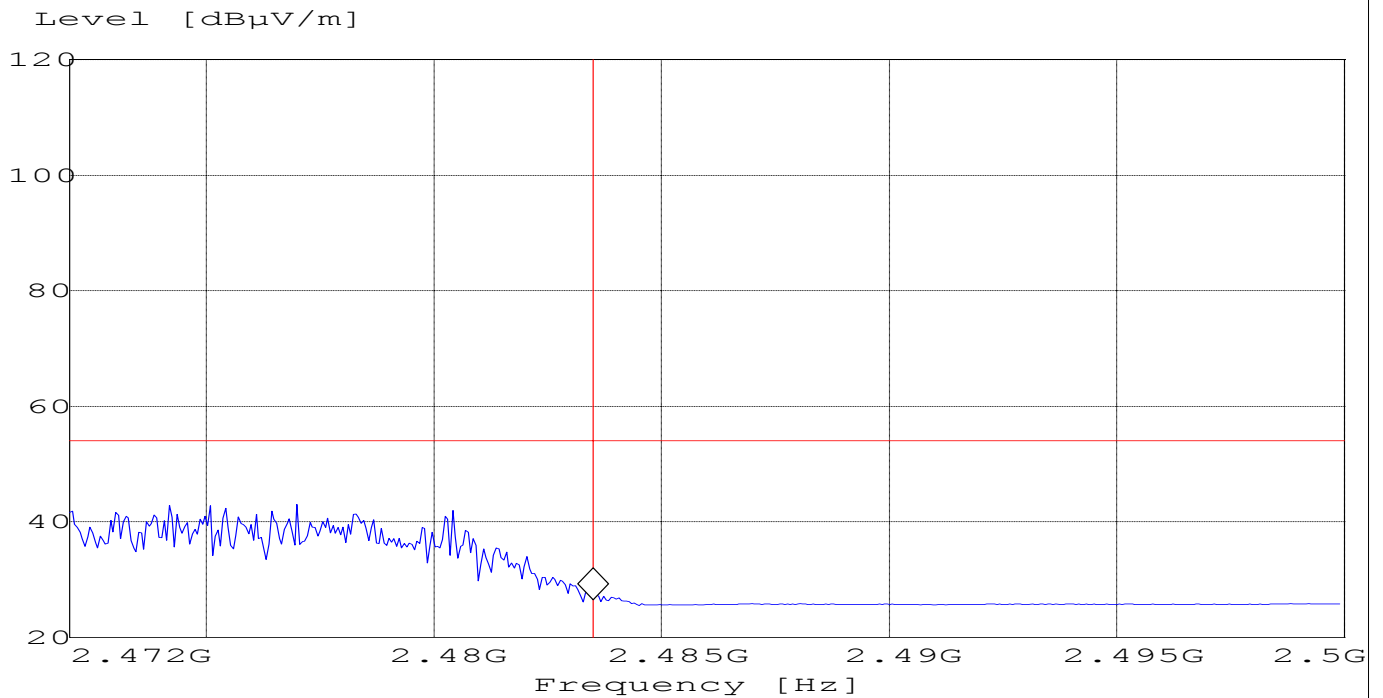

## BAND EDGE COMPLIANCE

§15.247 (c)


High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Hopping – ON, Peak measurement)

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_PK"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.472 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

Marker: 2.483503006 GHz 40.73 dBμV/m

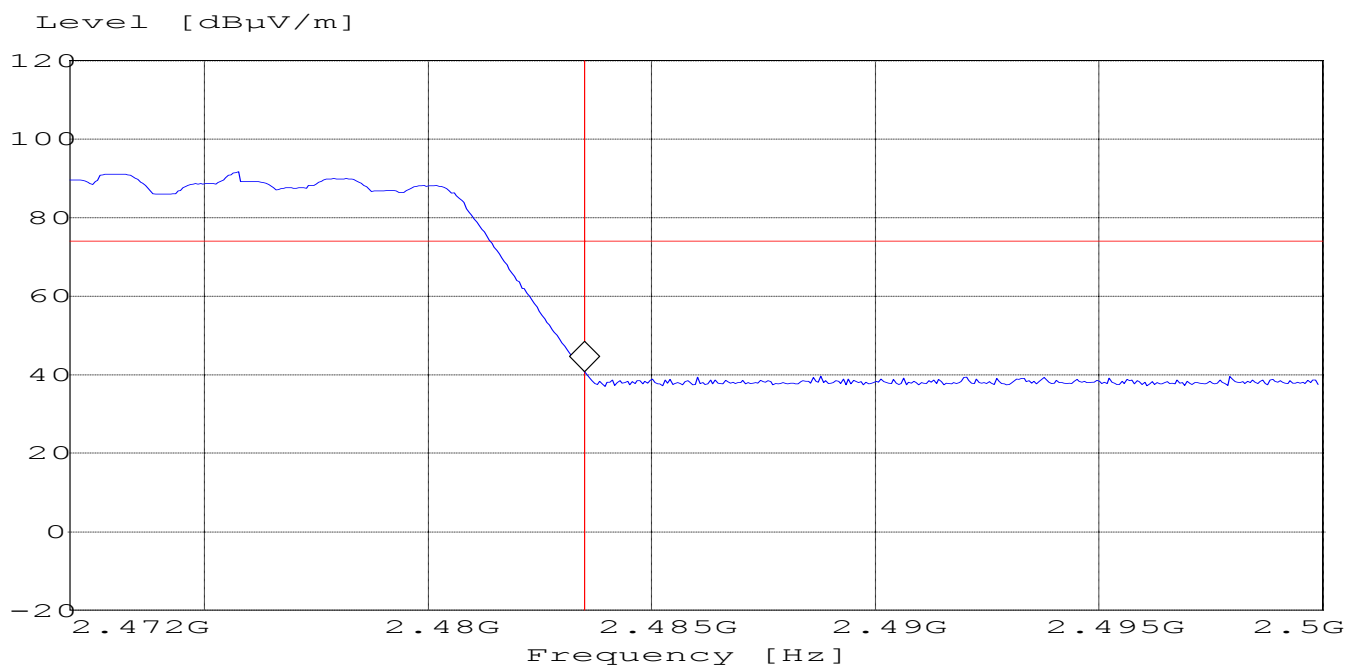

**EMISSION LIMITATIONS****§ 15.247 (c) (1)****Transmitter (Conducted)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**NOTE:** Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.




## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Lowest Channel(2402MHz): 30MHz - 3GHz

NOTE: The peak above the limit line is the carrier frequency.

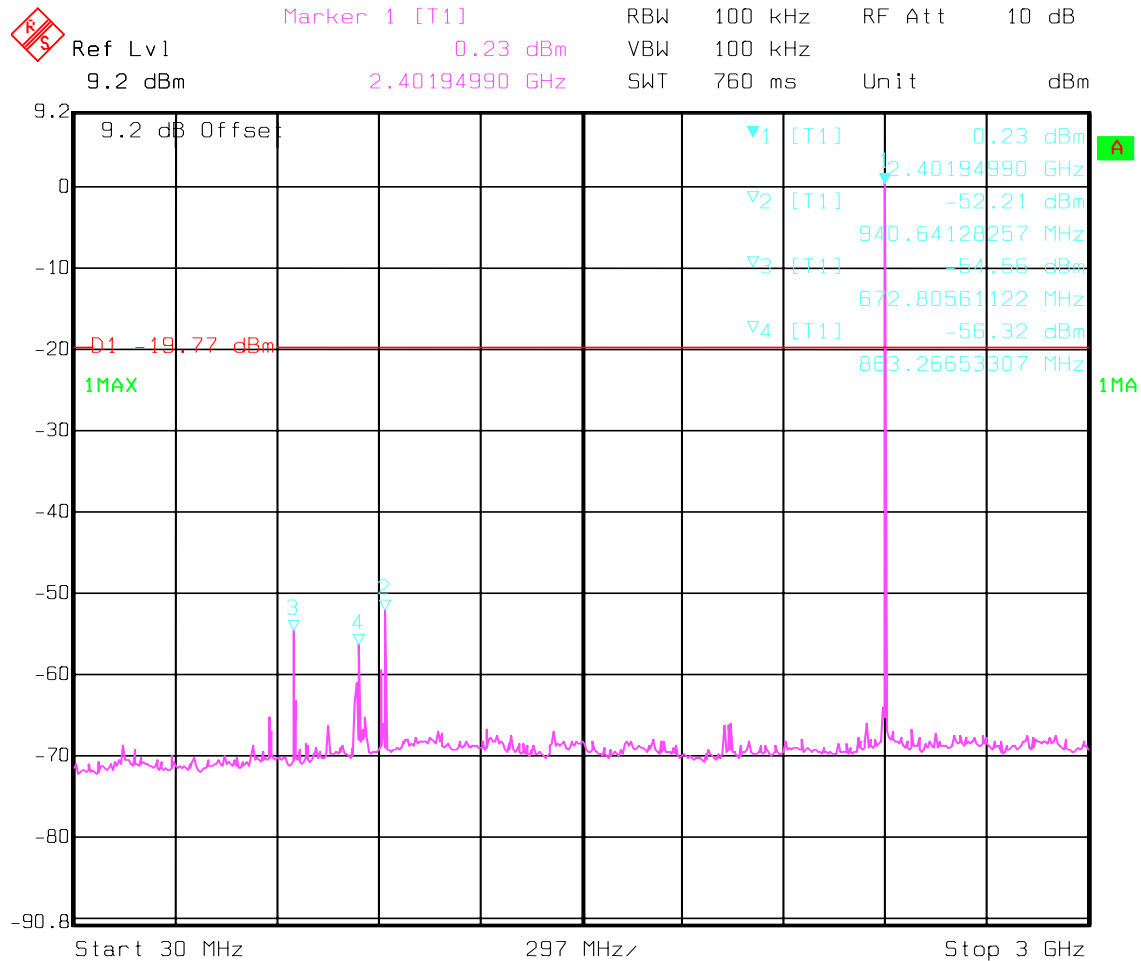


Date: 03.JUL.2002 13:54:25

## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Lowest Channel(2402MHz): 1GHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

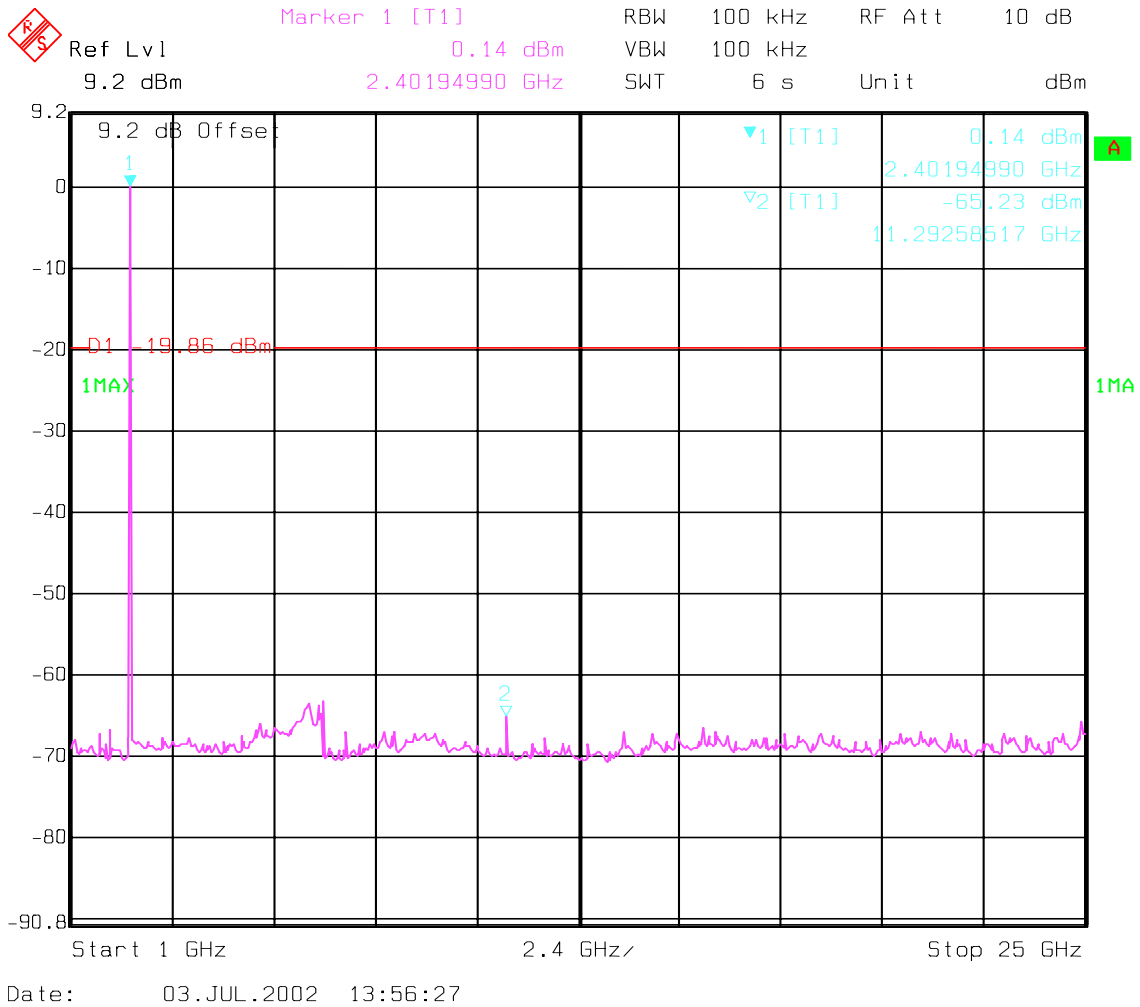


## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Mid Channel(2440MHz): 30MHz - 3GHz

NOTE: The peak above the limit line is the carrier frequency.

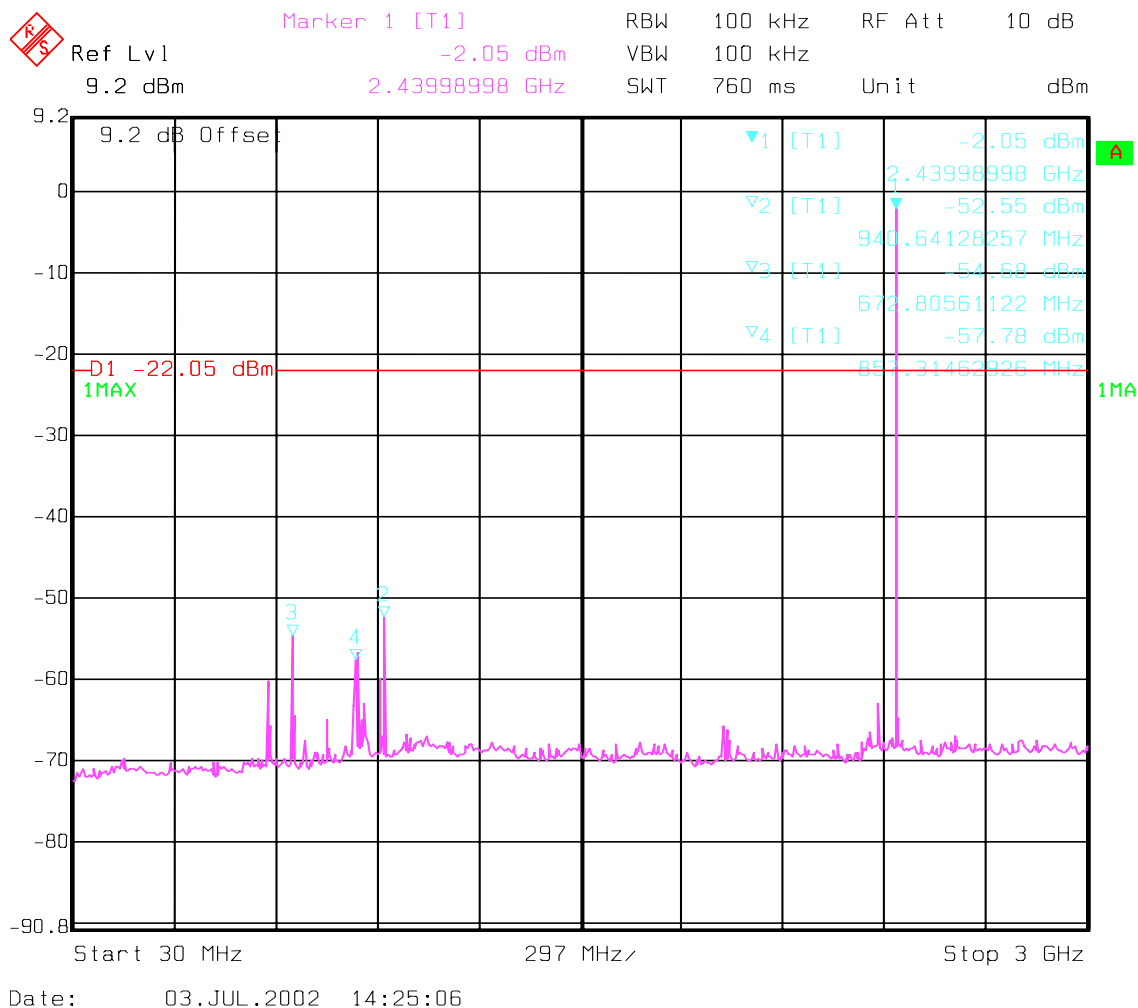


## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Mid Channel(2440MHz): 1GHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

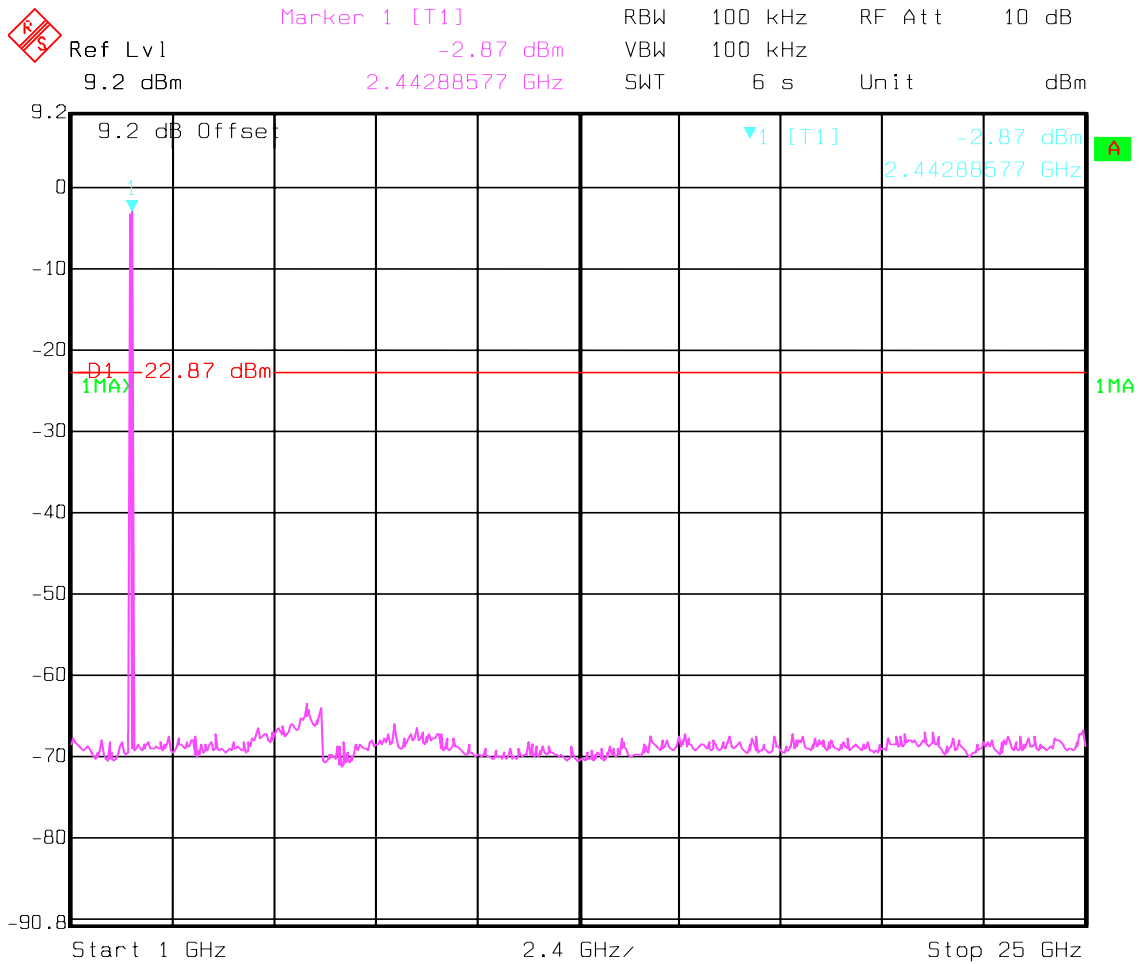


Date: 03.JUL.2002 14:26:56

## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 30MHz - 3GHz

NOTE: The peak above the limit line is the carrier frequency.

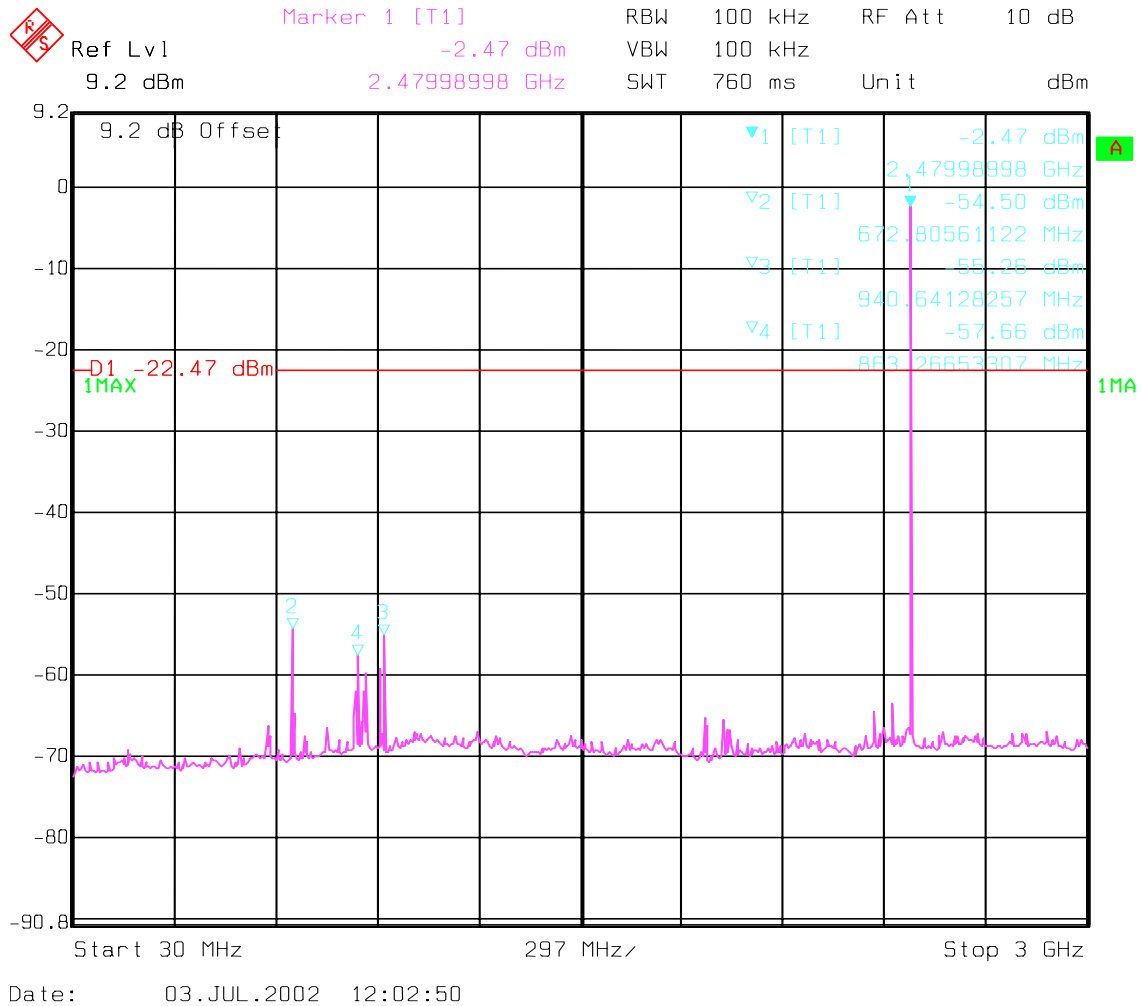


## EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 1GHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

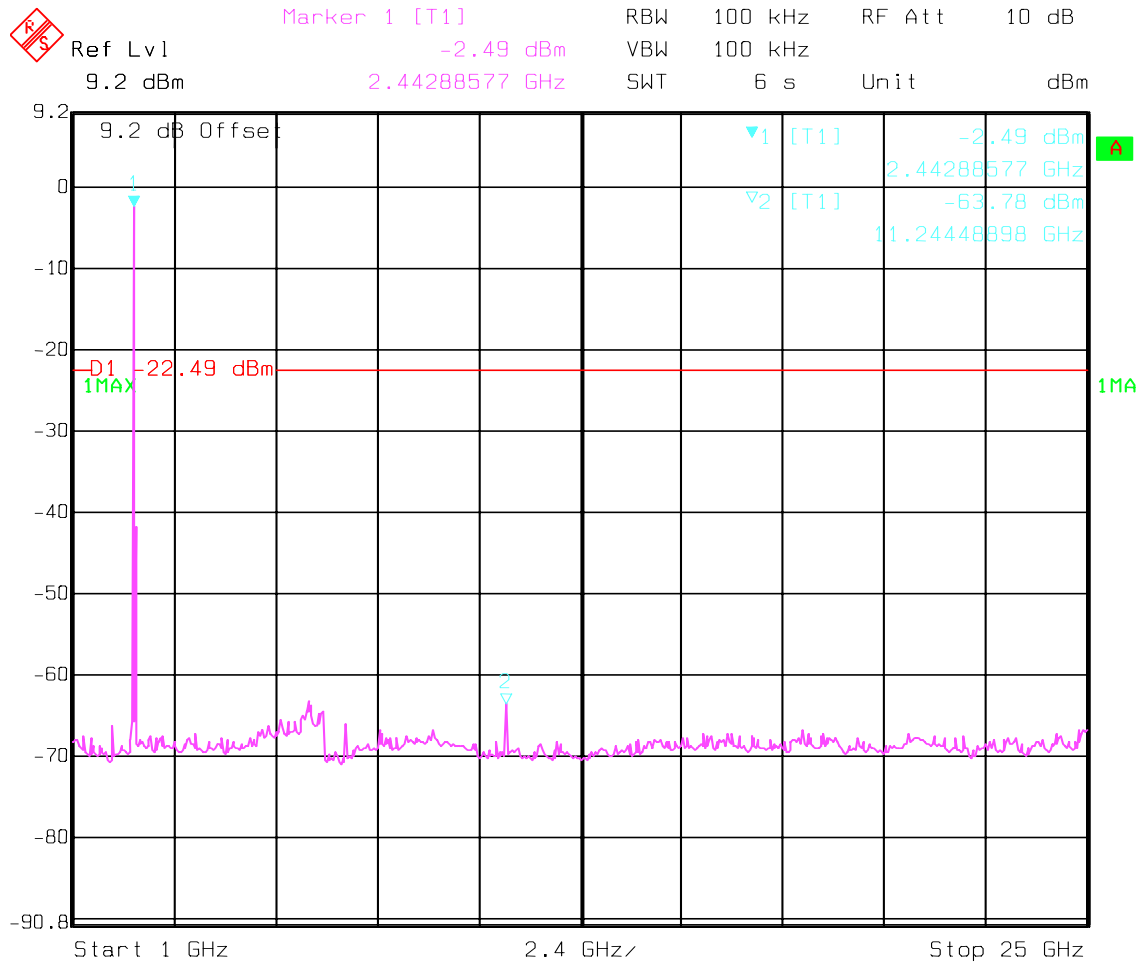

Date: 03.JUL.2002 12:11:01

**EMISSION LIMITATIONS****§ 15.247 (c) (1)****Transmitter (Radiated)****LIMITS**

**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

**Results for the radiated measurements below 30MHz according § 15.33**

<b>Frequency</b>	<b>Measured values</b>	<b>Remarks</b>
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

**§ 15.247 (c) (1)**

[illegible]



## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel(2402MHz): 30MHz – 1GHz

SWEEP TABLE:

"BT Spuri hi 30-1G"

Short Description:

Bluetooth 30MHz-1GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency Frequency

Time

VBW

30.0 MHz


1.0 GHz

MaxPeak

Coupled

100 kHz

3141-#1186

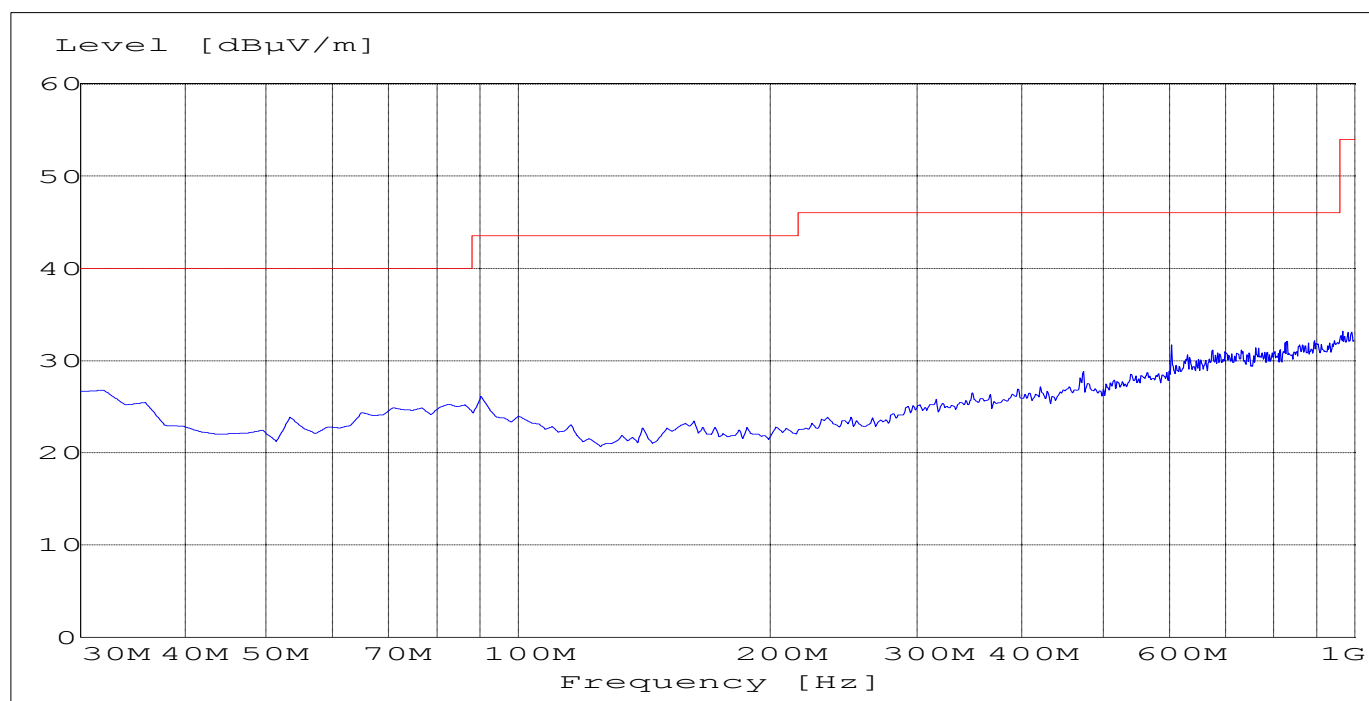

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel(2402MHz): 1GHz – 8GHz

**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE: "BT Spuri hi 1-8G"

Short Description: Bluetooth Spurious 1-8 GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	8.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

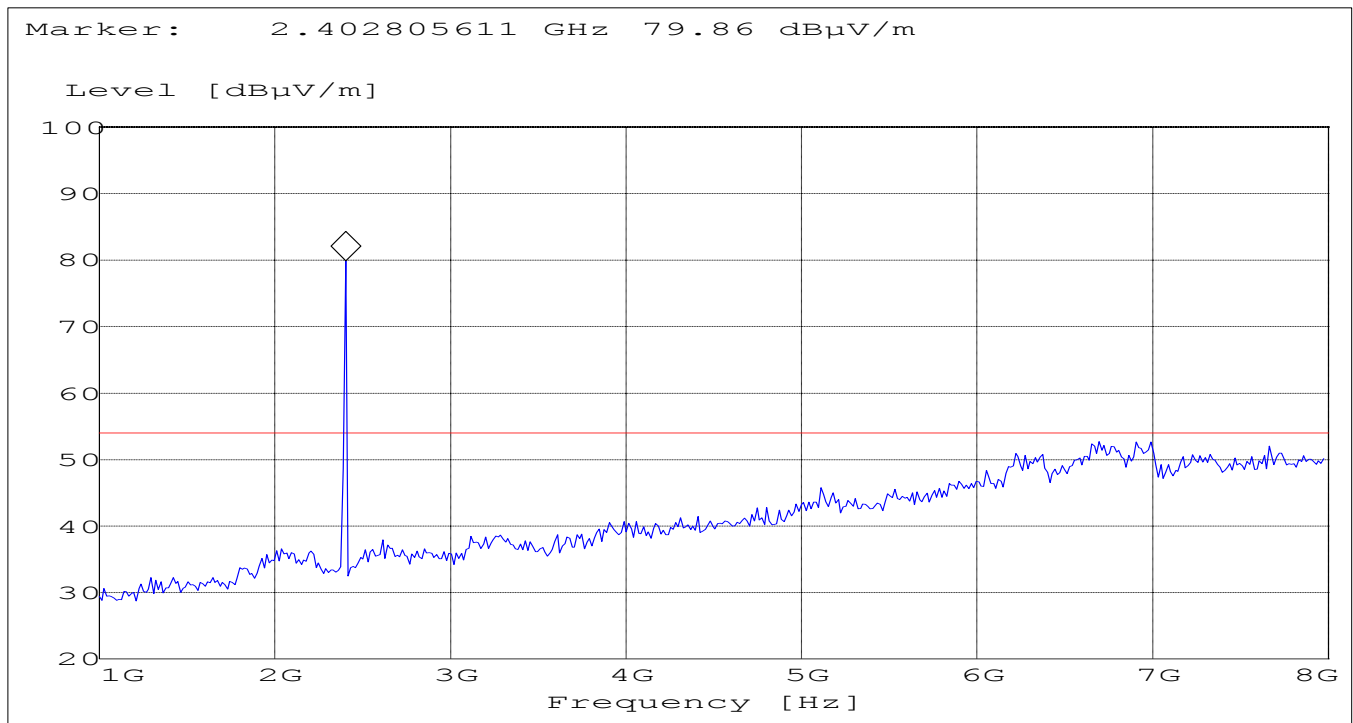


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Middle Channel(2440MHz): 30MHz – 1GHz

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	VBW		
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

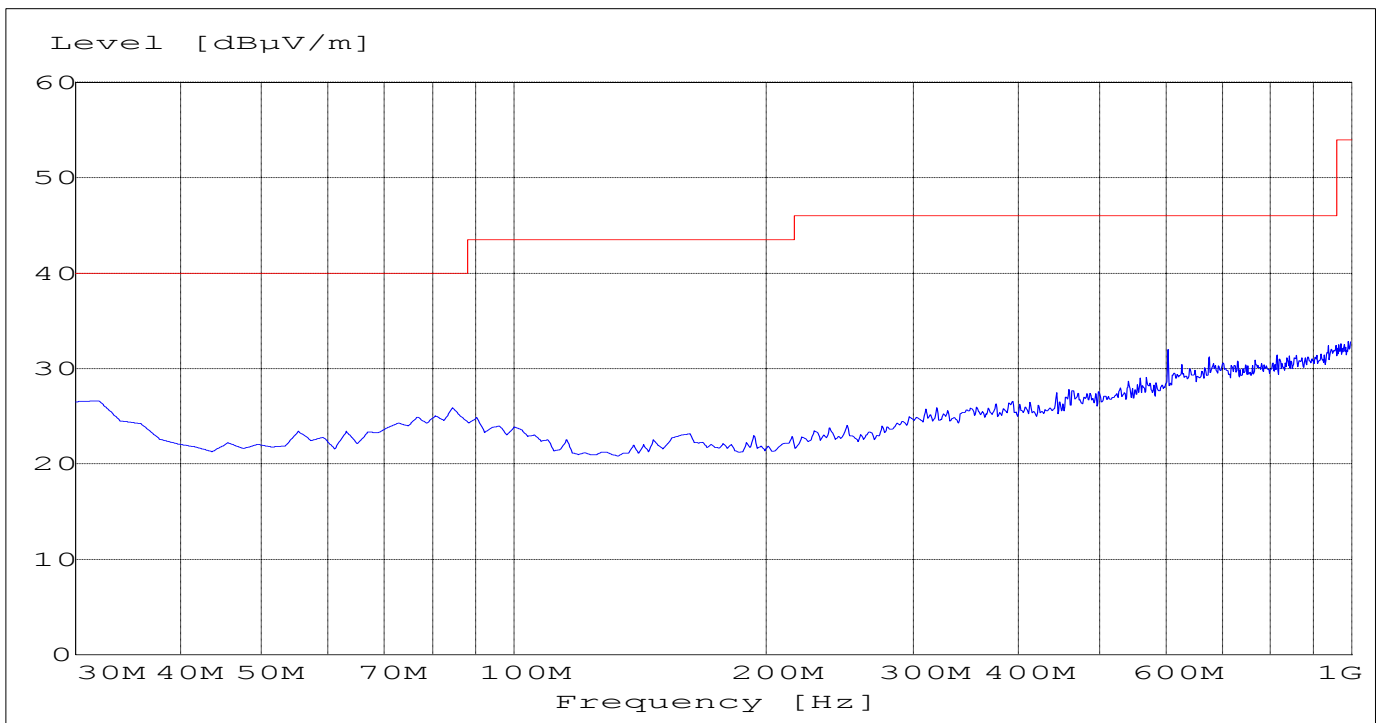

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Middle Channel(2440MHz): 1GHz – 8GHz

**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE: "BT Spuri hi 1-8G"

Short Description: Bluetooth Spurious 1-8GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	8.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

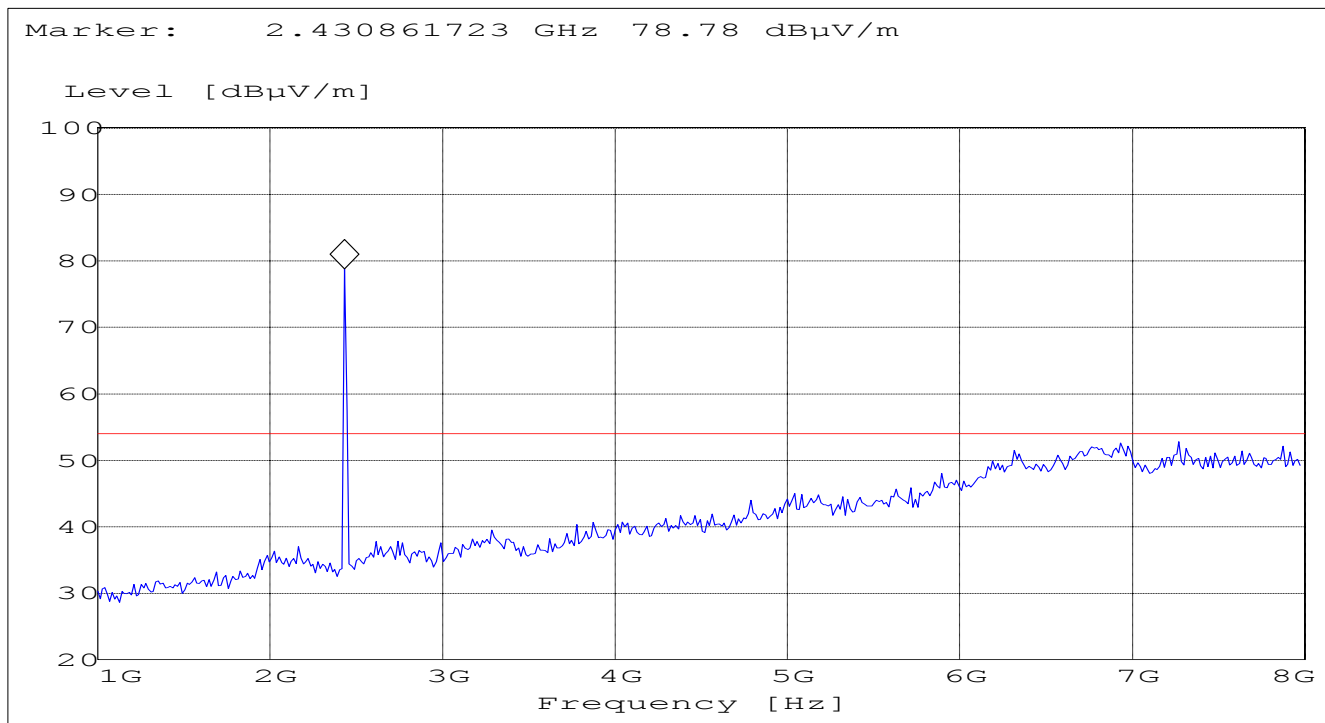


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 30MHz – 1GHz

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

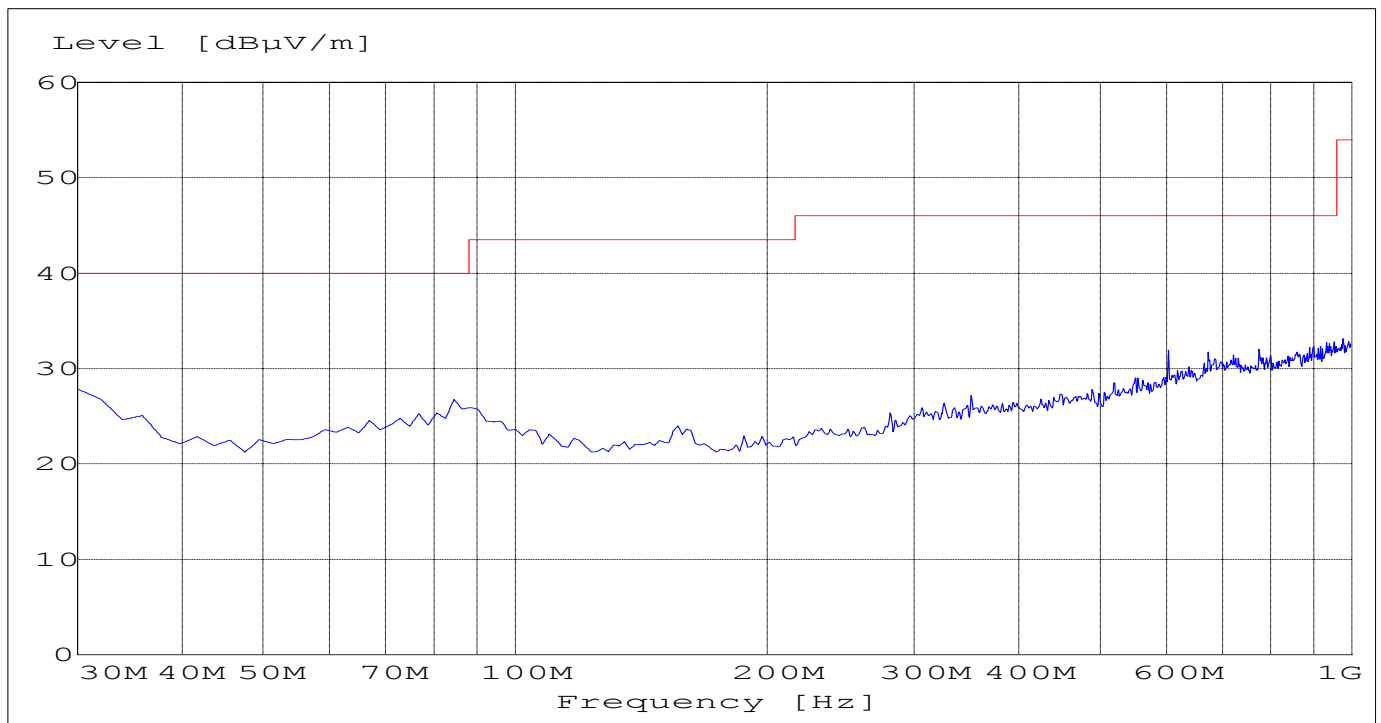

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 1GHz – 8GHz


**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE: "BT Spuri hi 1-8G"

Short Description: Bluetooth Spurious 1-8GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	8.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

Marker: 2.472945892 GHz 75.43 dBμV/m

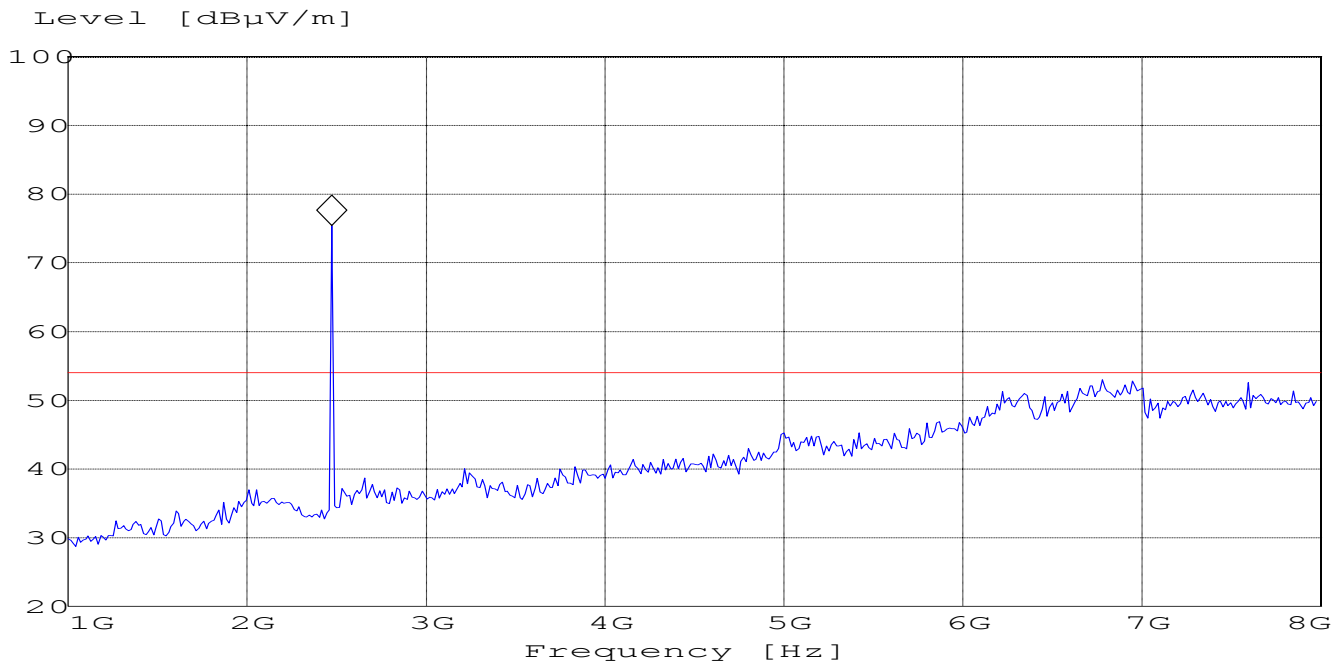

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

8GHz – 18GHz

(This plot is valid for all three channels)

SWEEP TABLE:

"BT Spuri hi 8-18G"

Short Description:

Bluetooth Spurious 8-18GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency

Frequency

Time

Bandw.

VBW

8.0 GHz


18 GHz

MaxPeak

Coupled

1 MHz

#326 horn (dBi)

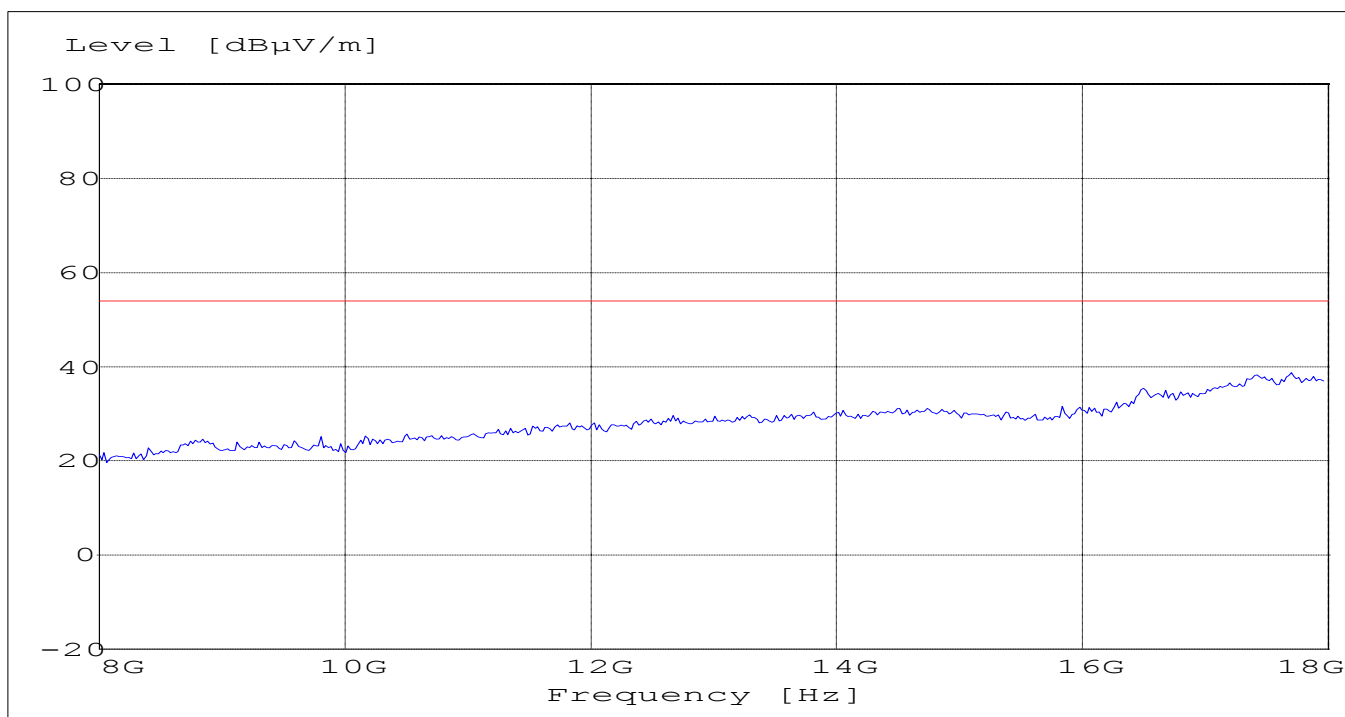

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

18GHz – 25GHz

(This plot is valid for all three channels)

SWEEP TABLE:

"BT Spuri hi 18-25G"

Short Description:

Bluetooth Spurious 18-25GHz

Start

Stop

Detector

Meas.

RBW

Transducer

Frequency

Frequency

Time

Bandw.

VBW

18 GHz


25 GHz

MaxPeak

Coupled

1 MHz

#141 horn (dBi)

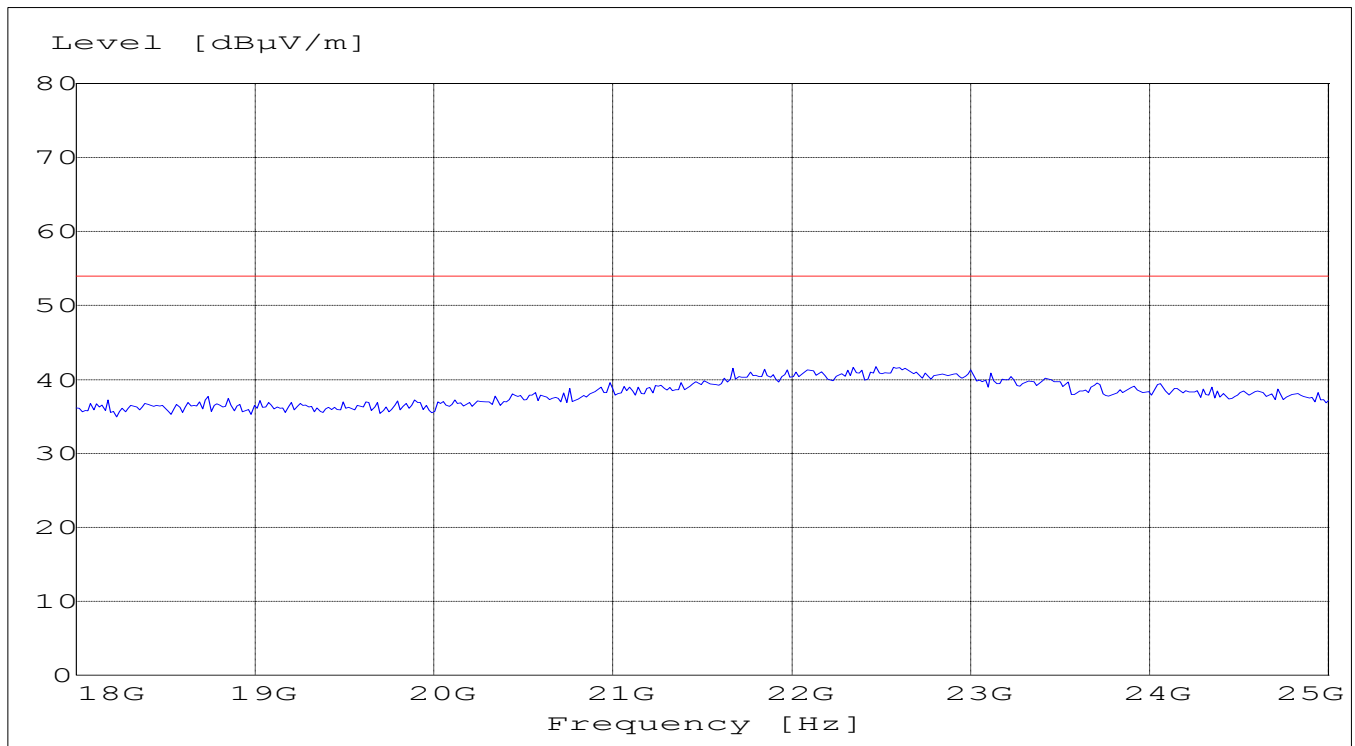




CONDUCTED EMISSIONS      § 15.107/207

Measured with AC/DC power adapter  
(Limit: CISPR 22 class-B)

Note: This measurement is carried out according to guidelines of FCC 02-157

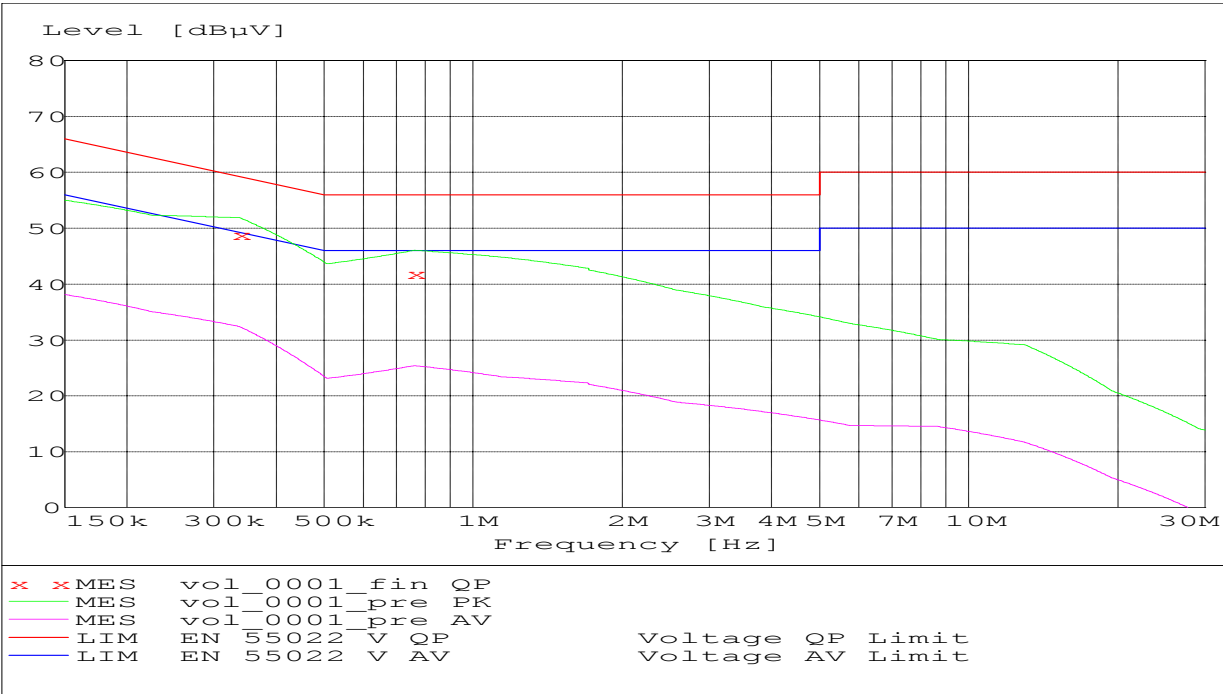

Technical specification : 15.107 / 15.207 (Revised as of October 1, 1991 )

Limit

0.45 to 30 MHz	250 μV / 47.96 dBμV
ANALYZER SETTINGS: RBW = 10KHz      VBW = 10KHz	

**RECEIVER SPURIOUS RADIATION**

§ 15.209

**Limits**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

**NOTE:**

The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

## RECEIVER SPURIOUS RADIATION


§ 15.209

### 30MHz – 1GHz

SWEEP TABLE: "BT Spuri hi 30-1G"

Short Description: Bluetooth 30MHz-1GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

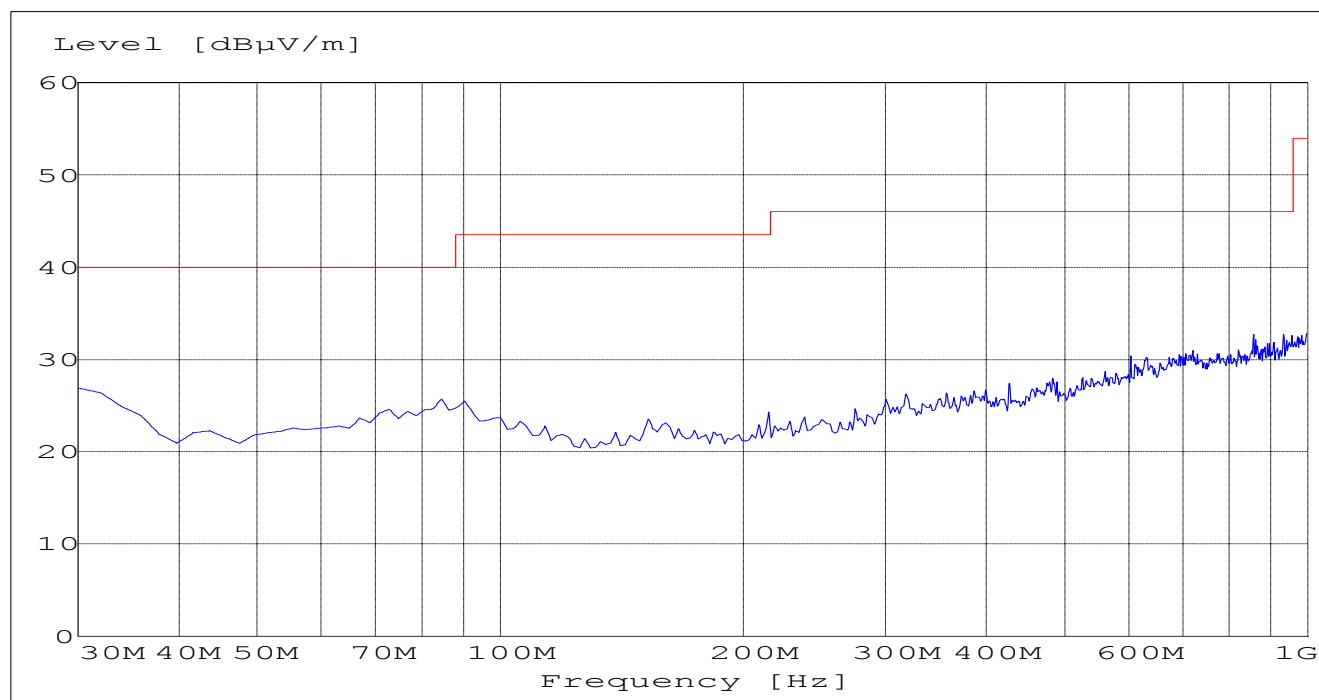

## RECEIVER SPURIOUS RADIATION

§ 15.209

### 1GHz – 8GHz


SWEEP TABLE:

"BT Spuri hi 1-8G"

Short Description:

Bluetooth Spurious 1-8 GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	8.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

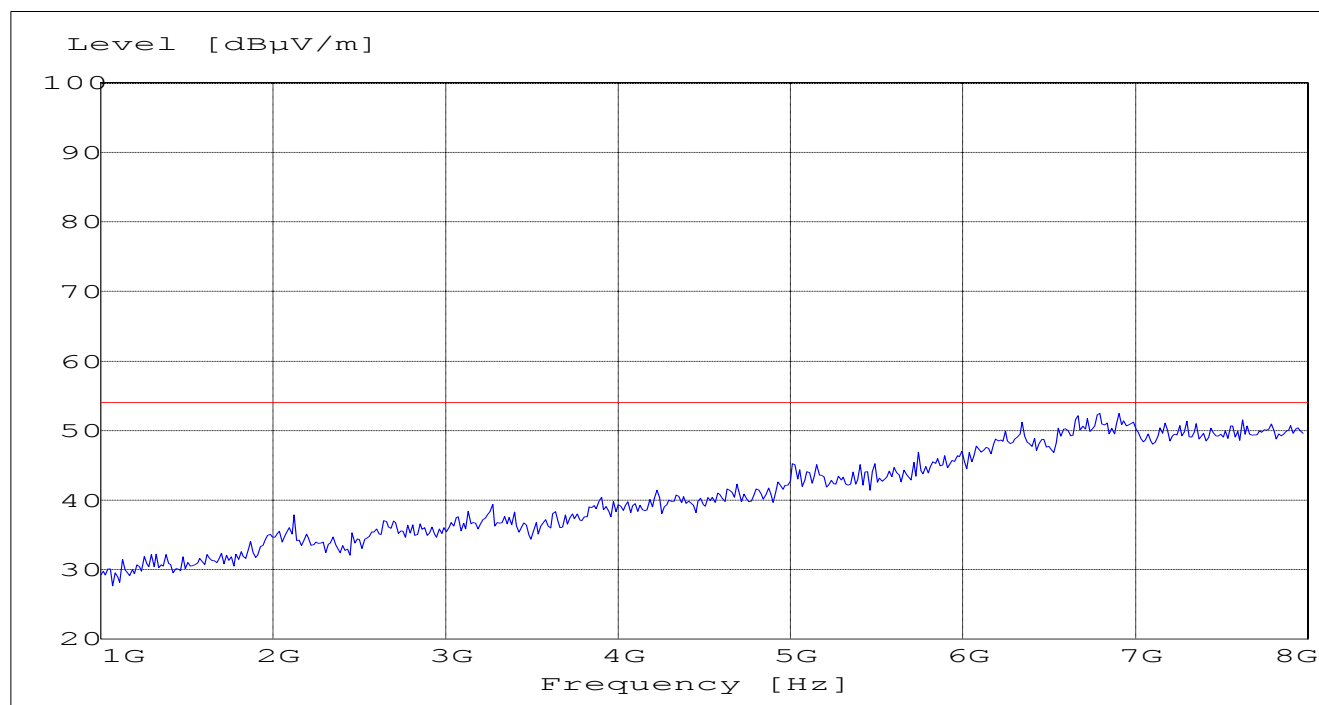

## RECEIVER SPURIOUS RADIATION

§ 15.209

### 8GHz – 18GHz

SWEEP TABLE:

"BT Spuri hi 8-18G"

Short Description:

Bluetooth Spurious 8-18GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency

Frequency

Time

Bandw.

VBW

8.0 GHz


18 GHz

MaxPeak

Coupled

1 MHz

#326 horn (dBi)

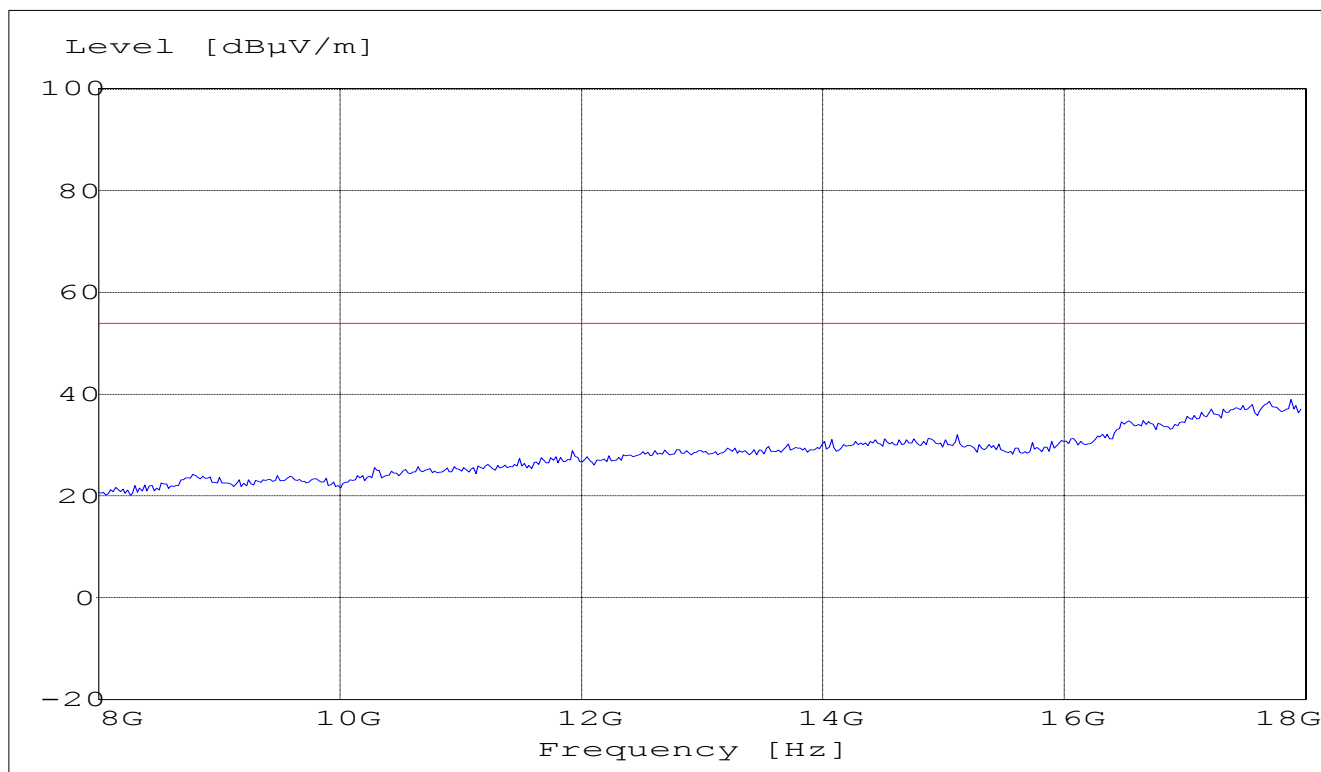

## RECEIVER SPURIOUS RADIATION


§ 15.209

### 18GHz – 25GHz

SWEEP TABLE: "BT Spuri hi 18-25G"

Short Description: Bluetooth Spurious 18-25GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

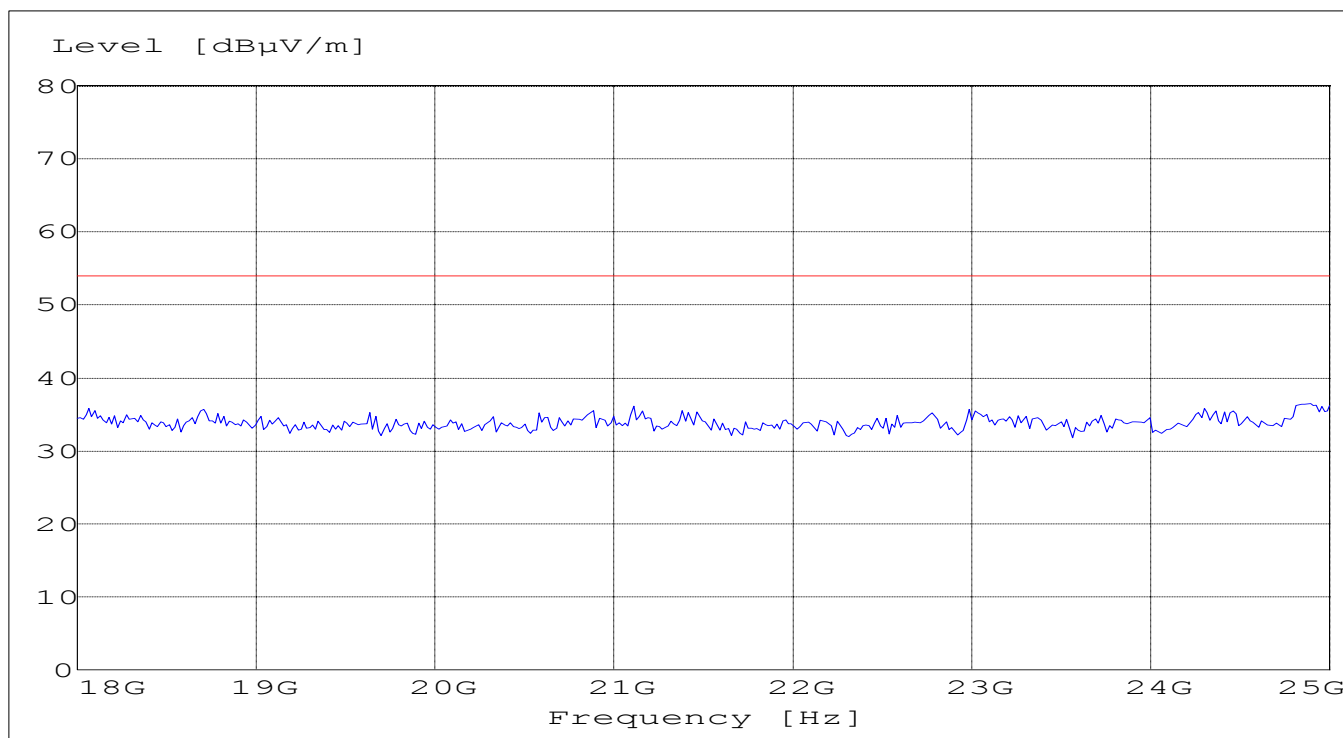


**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

<b>No</b>	<b>Instrument/Ancillary</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Serial No.</b>
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
<b>03</b>	Signal Generator	SMY02	Rohde & Schwarz	836878/011
<b>04</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
<b>05</b>	Power Amlifier	250W1000	Amplifier Research	300031
<b>06</b>	Biconilog Antenna	3141	EMCO	0005-1186
<b>07</b>	Horn Antenna	SAS-200/571	AH Systems	325
<b>08</b>	Power Splitter	11667B	Hewlett Packard	645348
<b>09</b>	Climatic Chamber	VT4004	Votch	G1115
<b>10</b>	Pre-Amplifier	JS4-00102600	Miteq	00616
<b>11</b>	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
<b>12</b>	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008

**BLOCK DIAGRAMS**

**Conducted Testing**

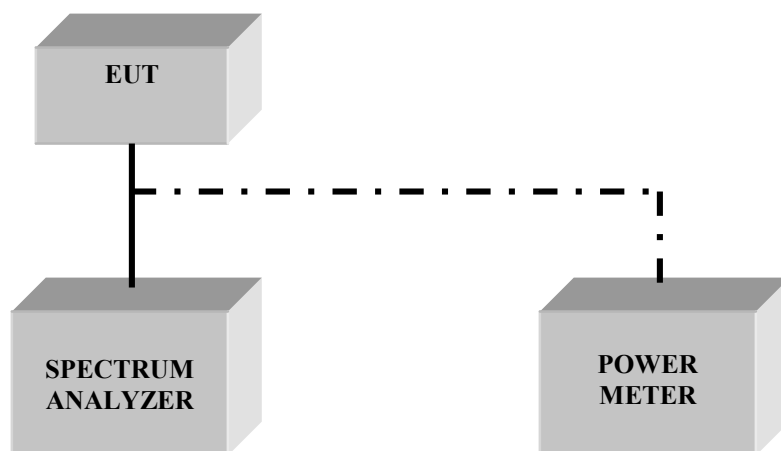



**Radiated Testing**

**ANECHOIC CHAMBER**

