

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
DAT-P-176/94-D1



Independent ETSI
compliance test house



Accredited Bluetooth® Test Facility (BQTF)

Test report no.	:	2-4375-05-03/06
Applicant	:	BenQ Mobile
Type	:	SL 91
Test Standard	:	FCC Part 15.247 RSS-210
FCC ID	:	PWX-SL91
Certification No. IC	:	6175C-SL91

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,
Inc. and any use of such marks by Cetecom ICT is under license*

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items.....	3
1.1.3 Applicant's details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
1.3.2 If RF component testing only, description of additional used HW/SW	5
1.3.3 Additional EUT information For IC Canada (appendix 2).....	6
1.3.4 EUT operating modes	7
1.3.5 Extreme conditions testing values.....	7
2. TESTSTANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	8
3. RF MEASUREMENT TESTING	9
3.1 DESCRIPTION OF TEST SET-UP	9
3.1.1 Radiated measurements	9
3.1.2 Conducted measurements	9
3.2 REFERENCED DOCUMENTS.....	10
3.3 ADDITIONAL COMMENTS	10
3.4 ANTENNA GAIN	10
3.5 CARRIER FREQUENCY SEPARATION §15.247(A)(1)	11
3.6 NUMBER OF HOPPING CHANNELS §15.247(A)(1).....	12
3.7 TIME OF OCCUPANCY (DWELL TIME) §15.247(A)(1)(III).....	13
3.8 POWER SPECTRAL DENSITY (HYBRID SYSTEM IN INQUIRY MODE/PAGE SCAN) §15.247(E)	14
3.9 SPECTRUM BANDWIDTH OF A FHSS SYSTEM / 20dB BANDWIDTH §15.247(A)(1).....	15
3.10 MAXIMUM OUTPUT POWER (CONDUCTED) § 15.247 (B)(1)	17
3.11 MAX. PEAK OUTPUT POWER (RADIATED) § 15.247 (B)(1)	19
3.12 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (D)	20
3.13 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205	23
3.14 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) § 15.247 (C)(1)	27
3.15 SPURIOUS EMISSIONS > 30 MHz- RADIATED (TRANSMITTER) § 15.247 (C)(1)	29
3.16 SPURIOUS EMISSIONS - RADIATED (RECEIVER) § 15.109	33
3.17 SPURIOUS EMISSIONS < 30 MHz - TRANSMITTER RADIATED § 15.209	35
3.18 CONDUCTED EMISSIONS <30 MHz § 15.107/207	36
4 PHOTOGRAPHS OF TEST SET-UP	39
5 PHOTOGRAPHS OF EUT	42

ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-176/94-D1 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Dirk Hausknecht Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de




Responsible for testing
(Jakob Reschke)

1.1.2 Organizational items

Reference No.:	2-4375-05-03/06
Receipt of EUT:	2006-08-18
Date(s) of test:	2006-08-22 to 2006-08-25
Date of report:	2006-08-25
Number of report pages:	49

Version of template:	1.8



Responsible for laboratory
(Dirk Hausknecht)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	BenQ Mobile
Address:	Haidenauplatz 1 81667 München Germany
Contact person:	Mr. Martin Weinberger Tel.: +49 (0) 89 4111 37 48 Fax: +49 (0) 89 4111 21 68 Email: martin.weinberger@benq.com

1.2 Administrative data of manufacturer / member

Manufacturer's name:	BenQ Mobile
Address:	Suedstrasse 9 47475 Kamp-Lintfort Germany

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name : SL 91
Description : GSM Mobile Phone 900/1800/1900 + CDMA 2100
S/N serial number : S/N: 004401 41 021069 0 and 004401 41 021049 2
HW hardware status : B2
SW software status : ONYS_0001_11
Frequency Band [MHz] : ISM 2.400 - 2.483,5
Type of Modulation : FHSS
Number of channels : 79
Antenna : Integrated antenna
Power Supply : 3.7 V DC by Li-Polymer battery
Temperature Range : -30°C - +50°C

Max. power radiated: -3.5 dBm

Max. power conducted: -2.0 dBm

FCC ID: PWX-SL91

IC: 6175C-SL91

1.3.2 If RF component testing only, description of additional used HW/SW

	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						
3						
4						

1.3.3 Additional EUT information For IC Canada (appendix 2)

Company Number:	6175C
Model Name:	SL 91
Manufacturer (complete Address):	BenQ Mobile Suedstrasse 9 47475 Kamp-Lintfort Germany
Tested to Radio Standards Specification (RSS) No.:	RSS-210
Open Area Test Site Industry Canada Number:	3463
Frequency Range (or fixed frequency) [MHz]:	2400 – 2483.5 MHz
RF: Power [W] (max):	Rad. EIRP: 0.45 mW Conducted : 0.63 mW
Antenna Type:	Integrated antenna
Occupied Bandwidth (99% BW) [kHz]:	964.22 kHz
Type of Modulation:	FSK
Emission Designator (TRC-43):	964KFXD
Transmitter Spurious (worst case) [μ V/m in 3m]:	Nothing found
Receiver Spurious (worst case) [μ V/m in 3m]:	Nothing found

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all the applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2006-08-25

Testengineer: Jakob Reschke

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the testplan

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	+21 / 51
Low Temperature	T _{low}	°C	-30
High Temperature	T _{high}	°C	+50
Nominal Power Source	V _{nom}	V	3.7
Low Power Source	V _{low}	V	3.6
High Power Source	V _{high}	V	4.5

Type of powersource: V DC

Deviations from this values are reported in chapter 2

2. Teststandard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS	2006-08-25	PASS

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247(a1)	Carrier frequency separation	Yes			
§15.247(a1)	Number of hopping channels	Yes			
§15.247(a)(1)(iii)	Time of occupancy (dwell time)	Yes			
§15.247(e)	Power Spectral density (Hybrid system in Inquiry mode/Page scan)			Yes	
§15.247(a)(1)	Spectrum Bandwidth of a FHSS System / 20dB Bandwidth	Yes			
§ 15.247 (b)(1)	Maximum output power (conducted)	Yes			
§ 15.247 (b)(1)	Max. peak output power (radiated)	Yes			
§ 15.247 (d)	Band-edge compliance of conducted emissions	Yes			
§ 15.205	Band-edge compliance of radiated emissions	Yes			
§ 15.247 (d)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.247 (d)	Spurious Emission - radiated (Transmitter) >30 MHz	Yes			
§ 15.109	Spurious Emissions - radiated (Receiver)	Yes			
§ 15.209	Spurious Emissions - radiated (Transmitter) <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3. RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

9 kHz - 150 kHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna


>1GHz: Average, RBW 1MHz, VBW 10 Hz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by airlink using signaling antenna.

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal path is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

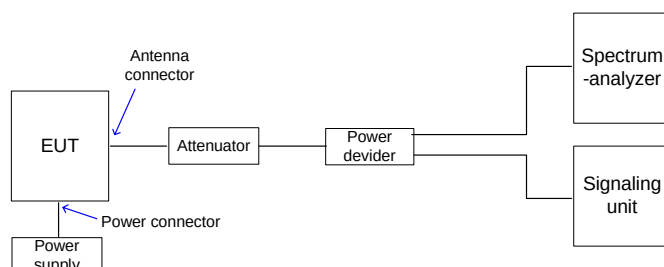

3.2 Referenced documents

none

3.3 Additional comments

Hardware / software changes during testing (only for pretesting)

Setup revision	Description of change	Change referenced to setup revision	Already perf. testcases influenced yes (repeated) / no


3.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

	low channel	mid channel	high channel
Conducted power [dBm]	-2.0	-3.9	-3.3
Radiated power [dBm]	-6.9	-6.2	-3.5
Gain [dB]	-4.9	-2.3	-0.2

3.5 Carrier frequency separation §15.247(a)(1)

Plot 1 of 1:

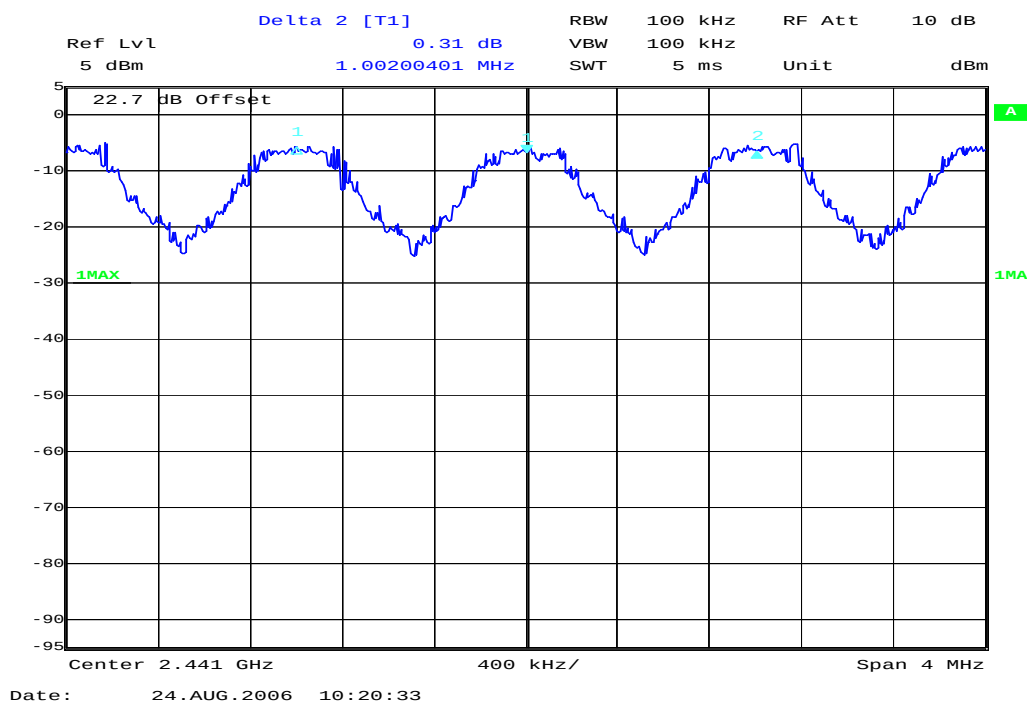


Result : Channel separation is: ~ 1 MHz

Limits :


Under normal test conditions only	Minimum 25 kHz or 20 dB Bandwidth of the hopping system
-----------------------------------	---

3.6 Number of hopping channels §15.247(a)(1)

Plot 1 of 2:

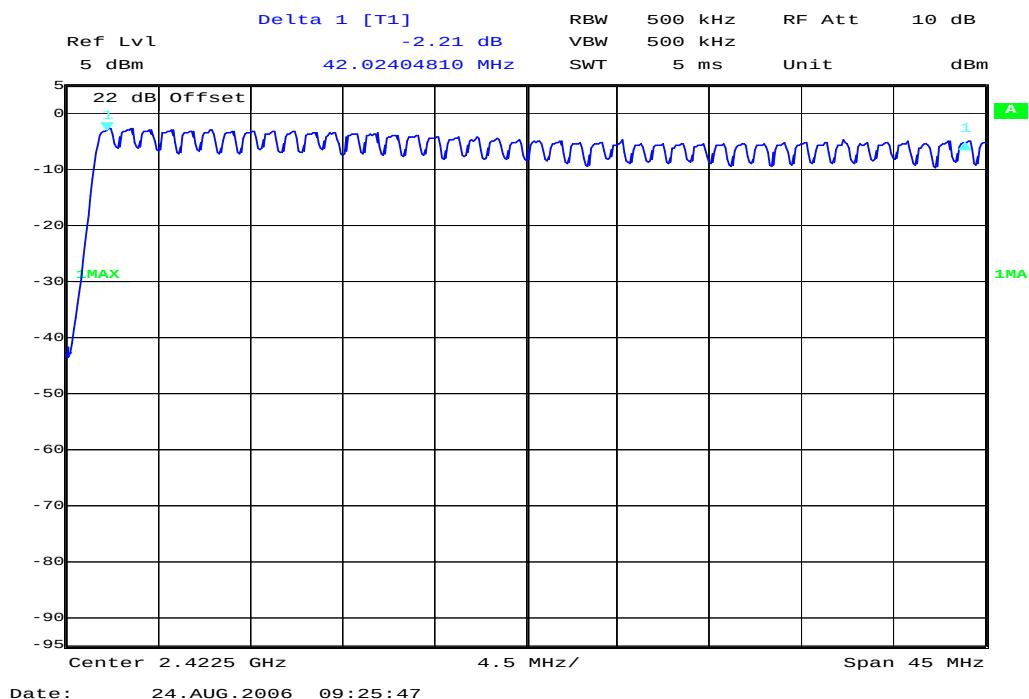

Plot 2 of 2:

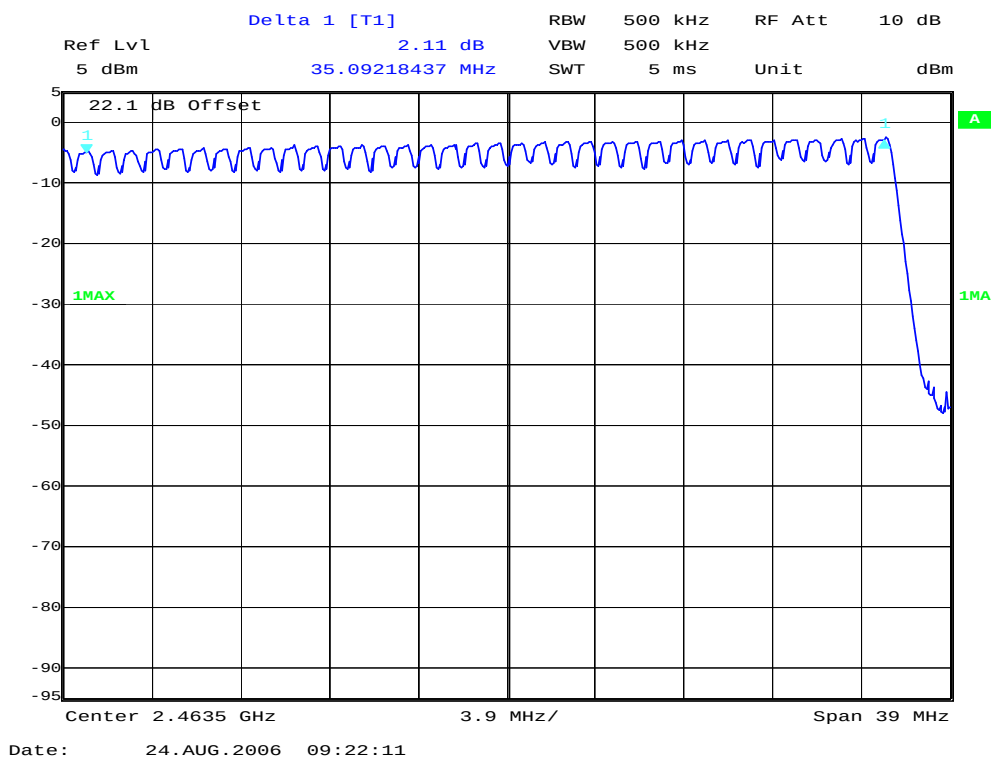

Result : The number of hopping channels is: 79

Limits :

Under normal test conditions only	at least 15 non-overlapping channels
-----------------------------------	--------------------------------------

3.7 Time of occupancy (dwell time) §15.247(a)(1)(iii)

For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length).
The calculation for a 31.6 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

This is according to the Bluetooth Core Specification V 1.1 & V 1.2 (+ critical errata) for all Bluetooth devices.

Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

3.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e)

not applicable


Result: Power density : - dBm/Hz = - dBm / 3 KHz
Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :


Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

3.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1)


Plot 1 of 3

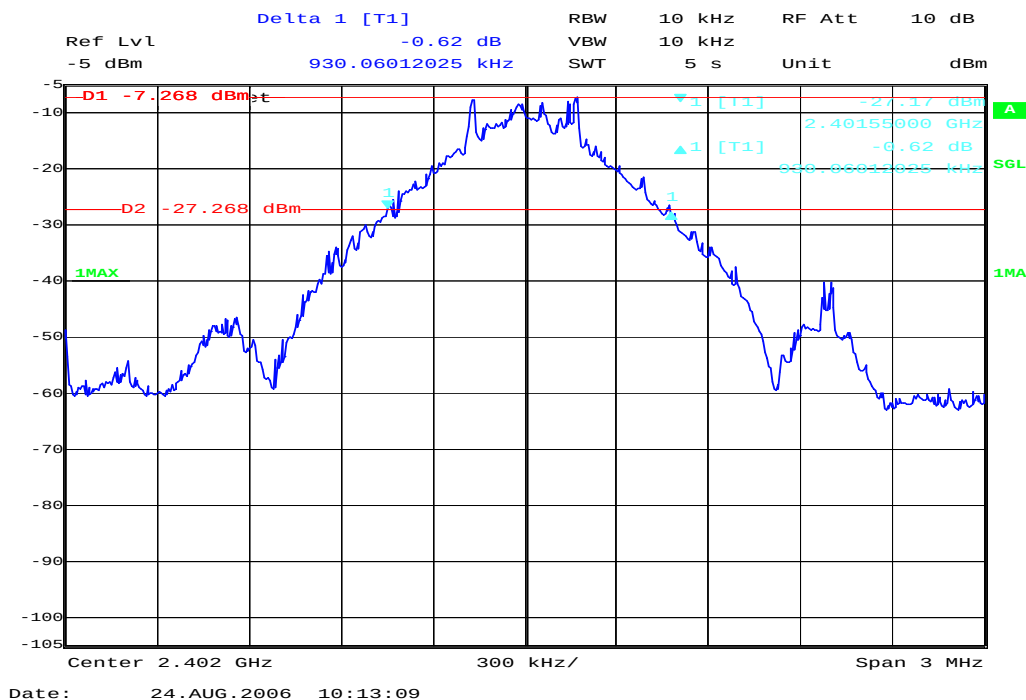

Plot 2 of 3

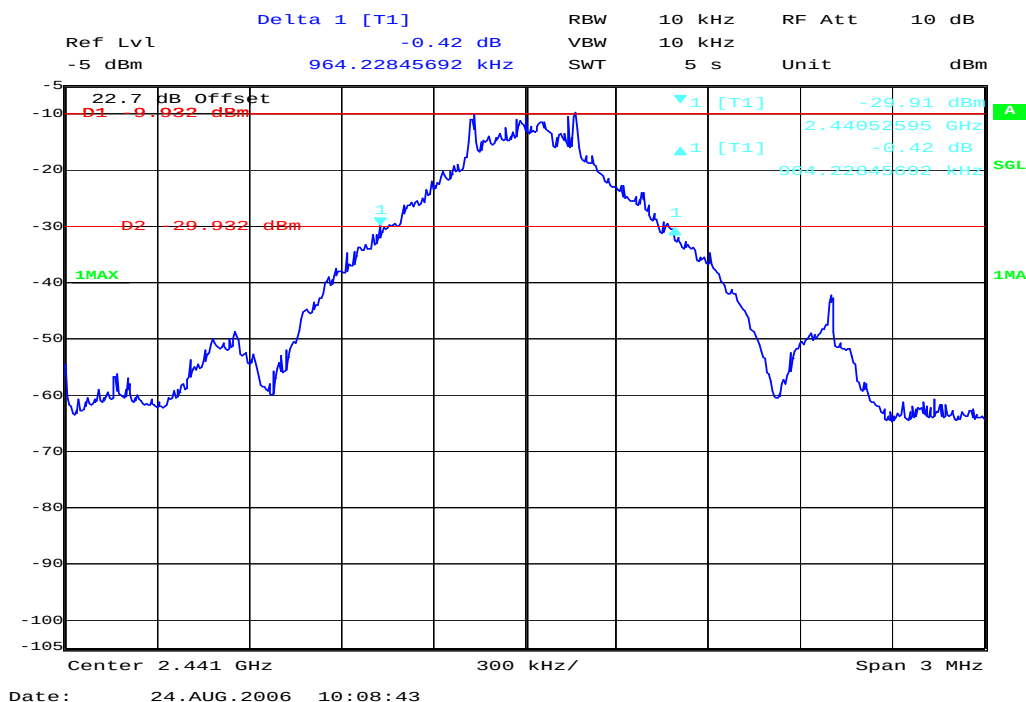

Plot 3 of 3

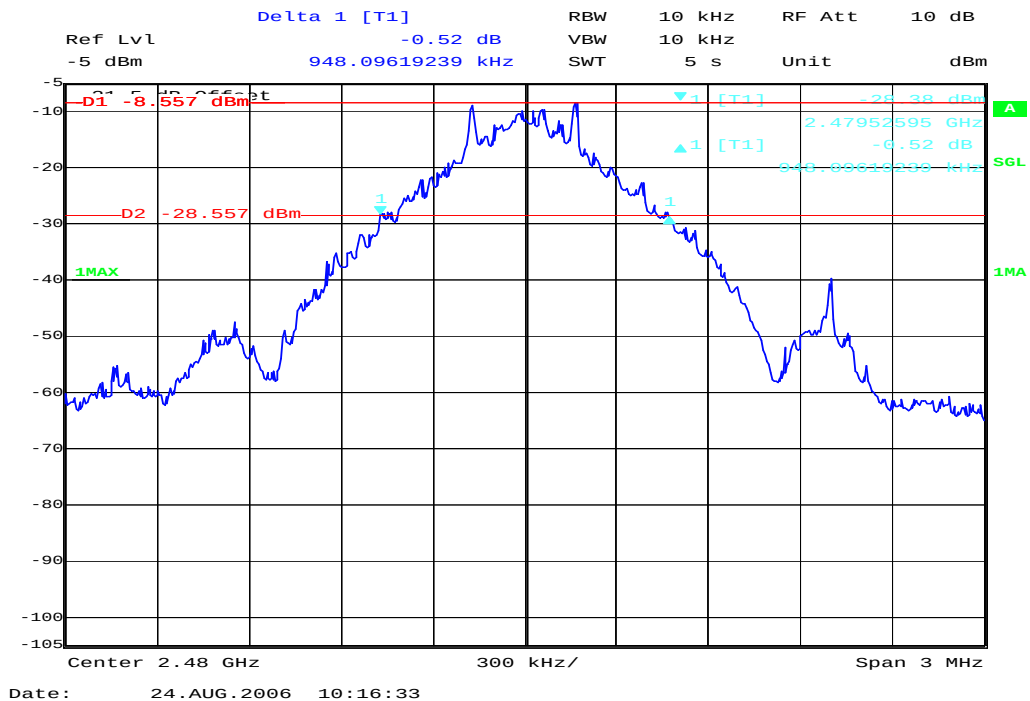

Results:

Test conditions		20 dB BANDWIDTH [KHz]		
Frequency [MHz]		2402	2441	2480
T_{nom}	V_{nom}	930.06	964.22	948.09
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)


RBW: 10 kHz / VBW 10 kHz

Limits :


Under normal test conditions only	< 1000 KHz
-----------------------------------	------------

3.10 Maximum output power (conducted) § 15.247 (b)(1)


Plot 1 of 3

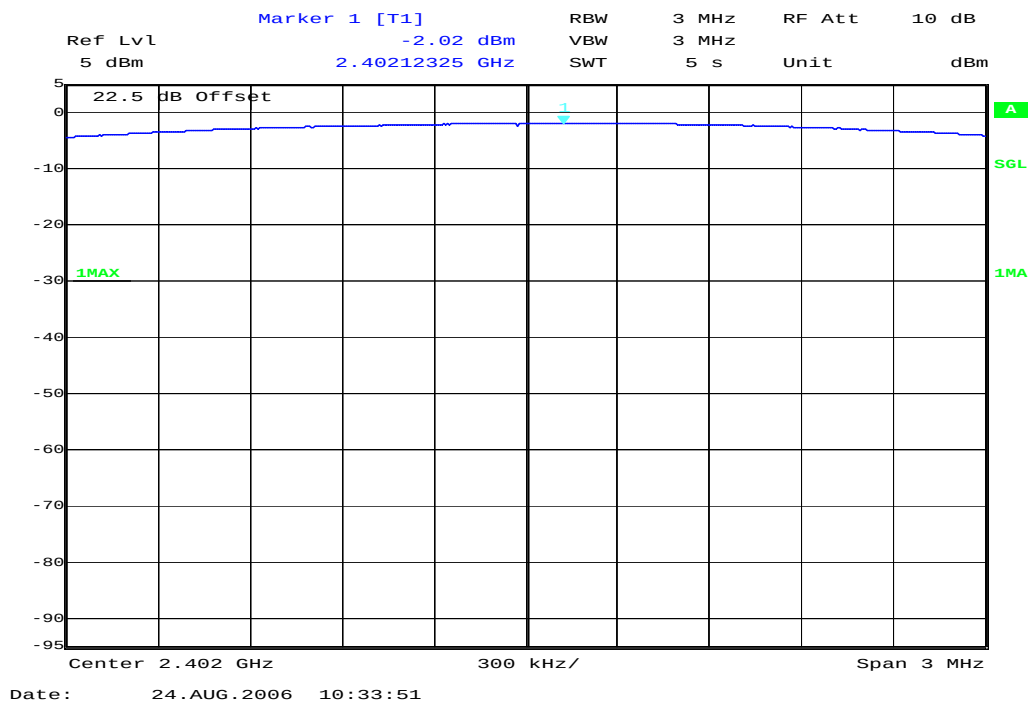

Plot 2 of 3

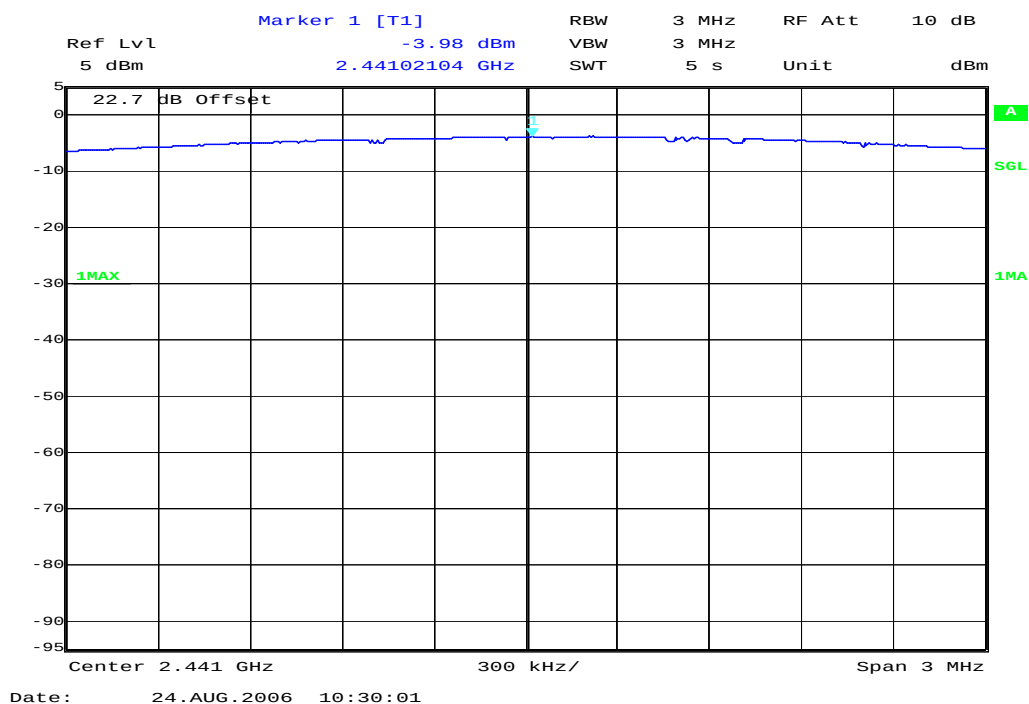

Plot 3 of 3

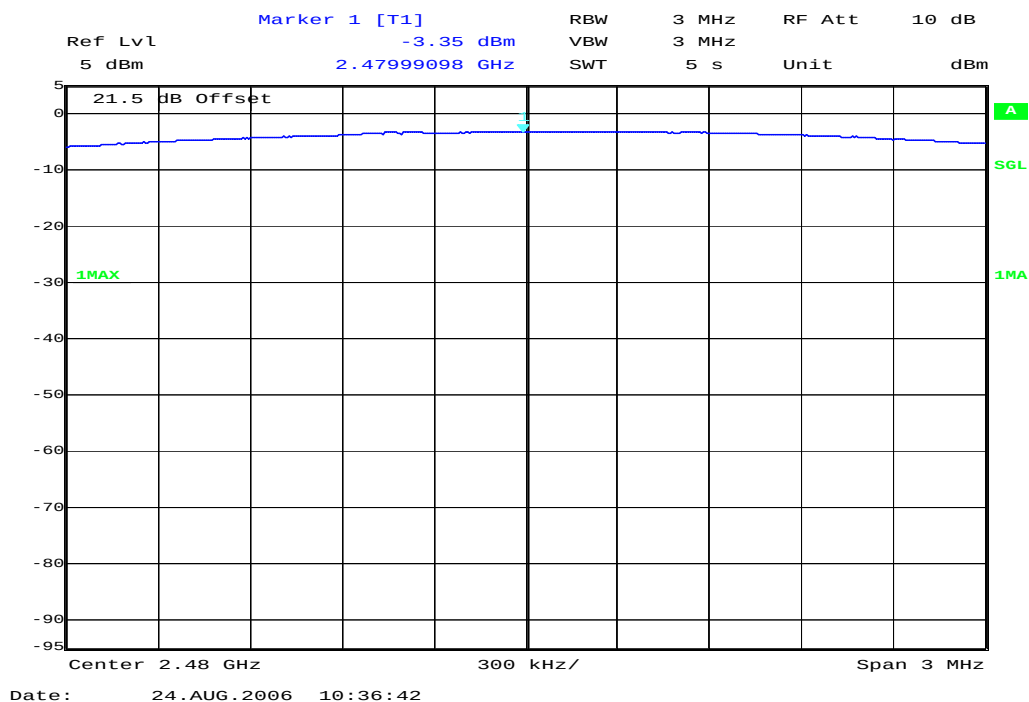

Results:

Test conditions		Max. peak output power [dBm]					
Frequency [MHz]		2402		2442		2480	
T _{nom}	V _{nom}	PK	-2.0	PK	-3.9	PK	-3.3
Measurement uncertainty		±3dB					

RBW / VBW : 3 MHz

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.11 Max. peak output power (radiated) § 15.247 (b)(1)

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2402	2442	2480
T _{nom}	V _{nom}	-6.9	-6.2	-3.5
Measurement uncertainty		±3dB		

RBW / VBW : 3 MHz


Measured at a distance of 3m

Limits:


Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.12 Band-edge compliance of conducted emissions §15.247 (d)


Plot 1 of 4 (hopping off, lowest frequency):

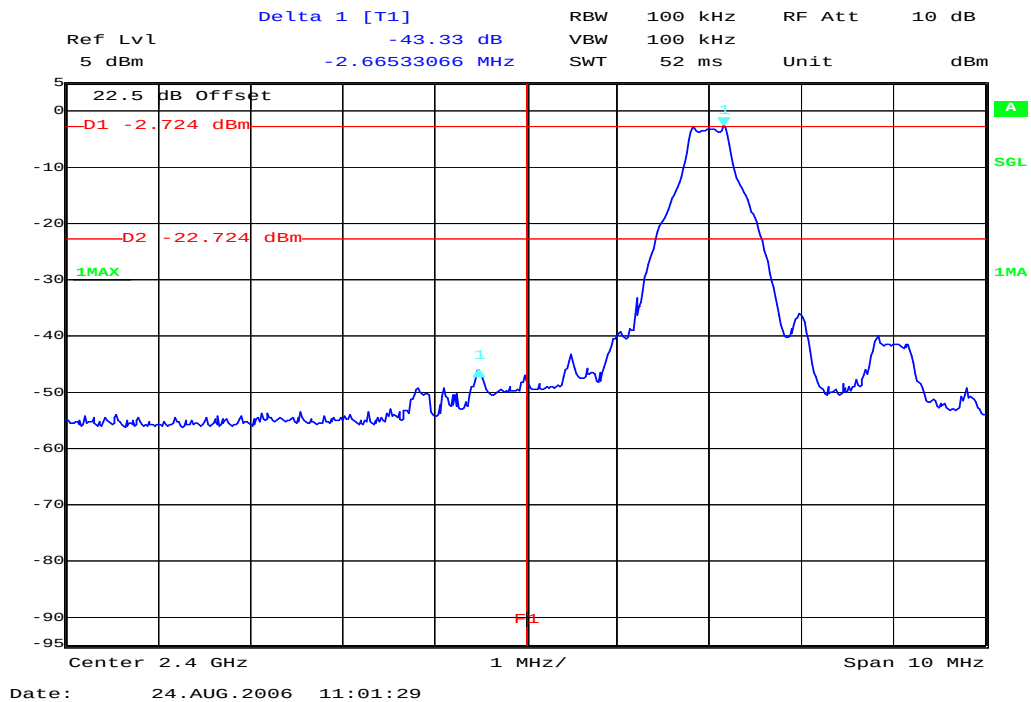


Plot 2 of 4 (hopping on, lowest frequency):

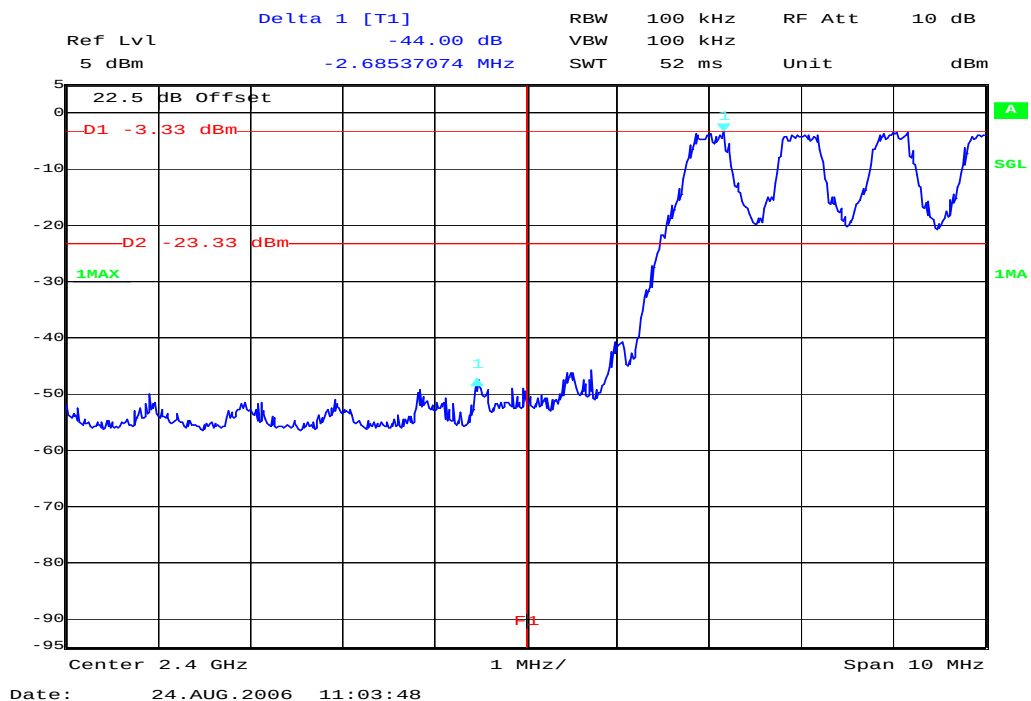

Plot 3 of 4 (hopping off, highest frequency):

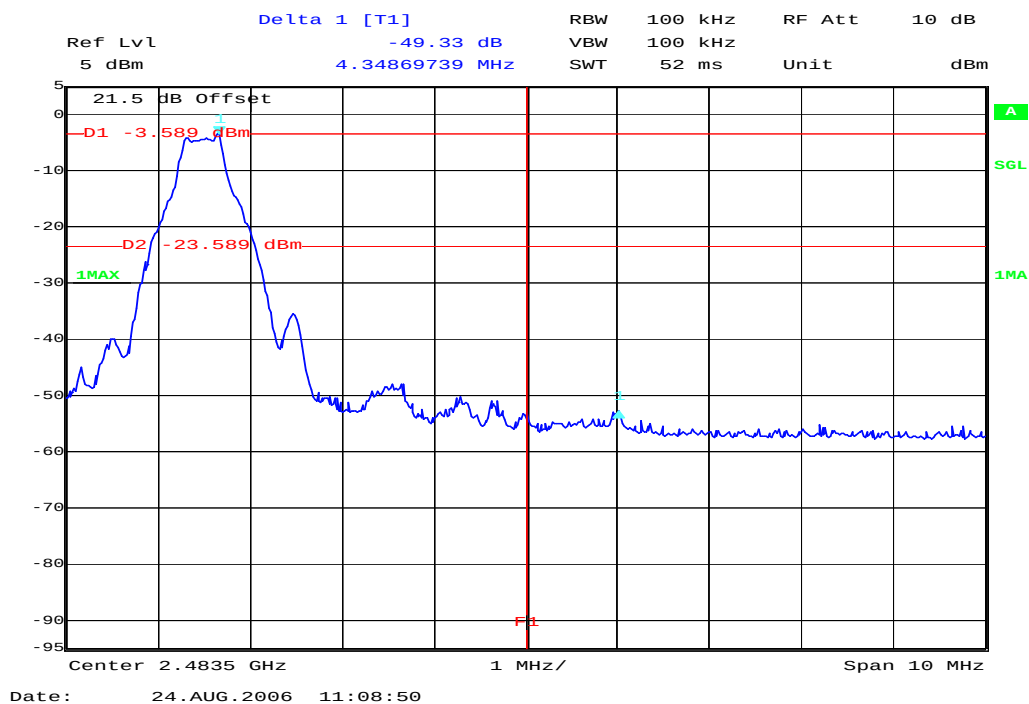

Plot 4 of 4 (hopping on, highest frequency):

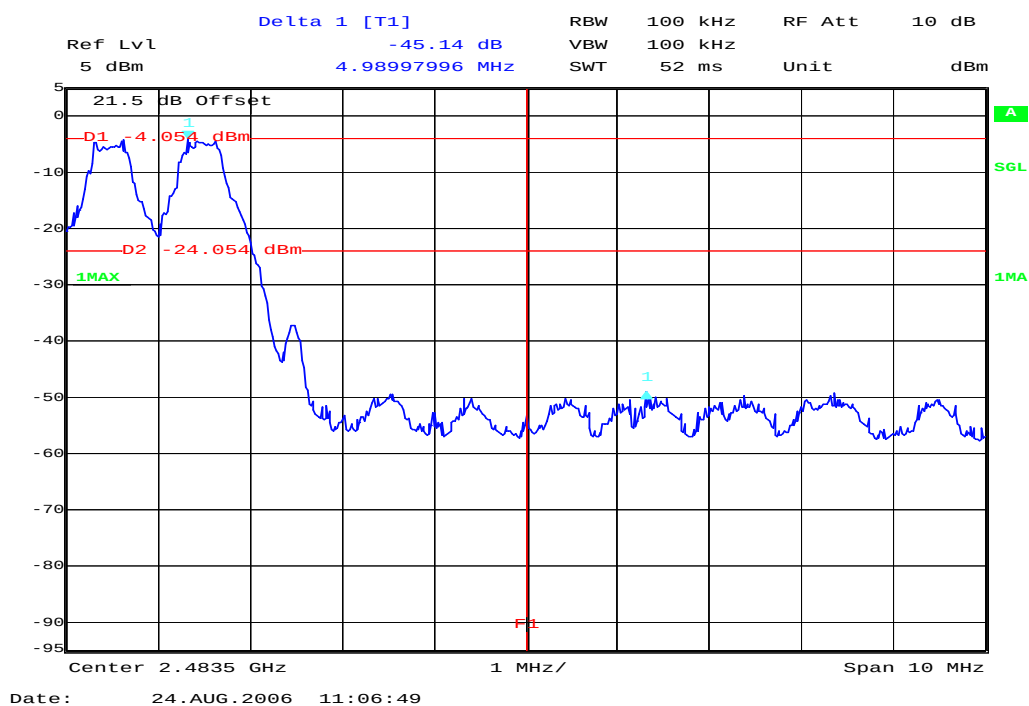

Results:


SZENARIO	DELTA VALUE [DB]
hopping off, lowest frequency	> 20 dB
hopping on, lowest frequency	> 20 dB
hopping off, highest frequency	> 20 dB
hopping on, highest frequency	> 20 dB
Measurement uncertainty	±1,5dB

Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--


3.13 Band-edge compliance of radiated emissions §15.205

Plot 1 : Max field strength in 3m distance (single frequency)

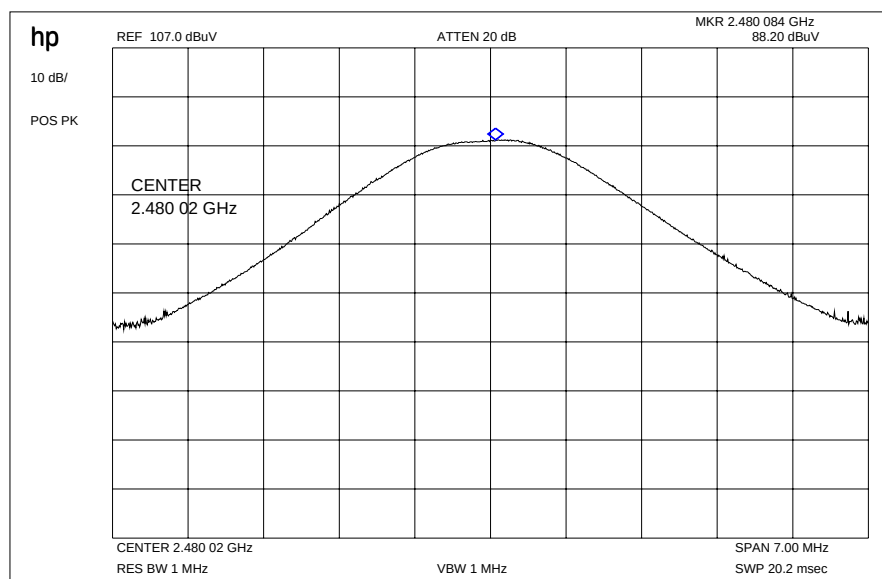

Result: 88.20 dB μ V/m


Plot 2: Marker-Delta Method (single carrier)

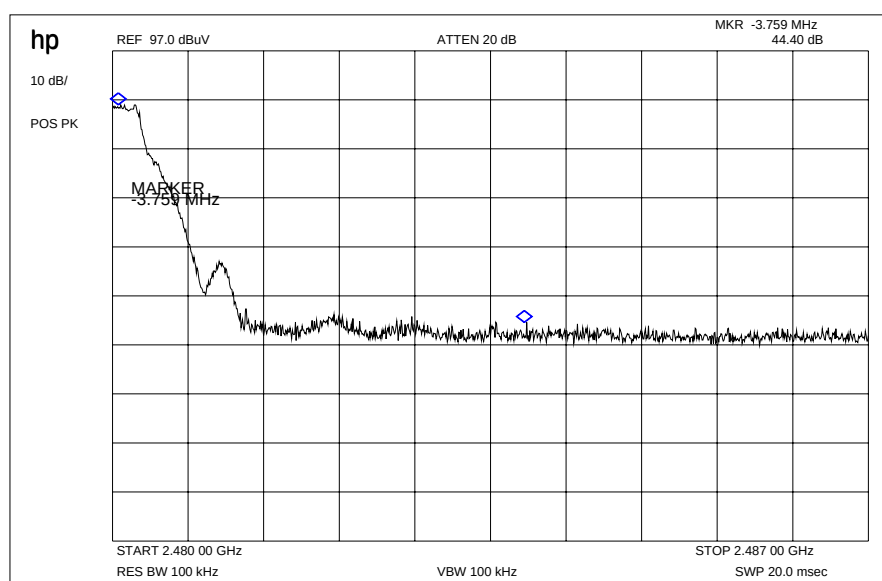

Marker-Delta-Value : 44.40 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)


Plot 3: Marker-Delta Method (hopping)

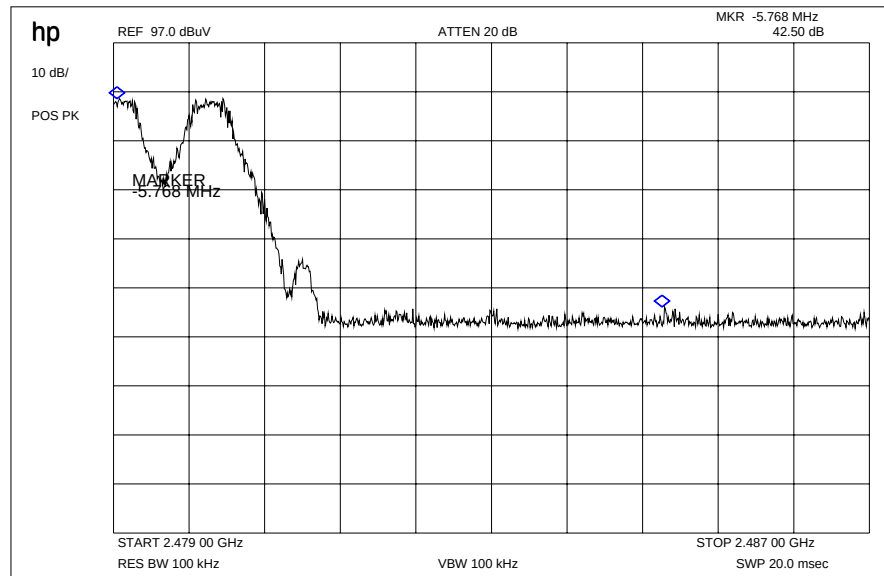


Marker-Delta-Value : 42.50 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Plot 4: Restricted Bands low

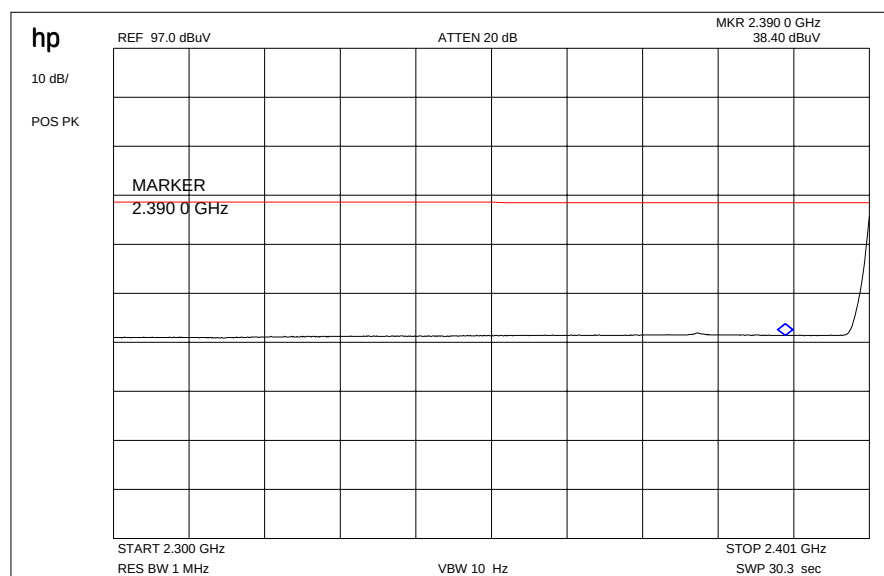

Plot 5: Restricted Bands high

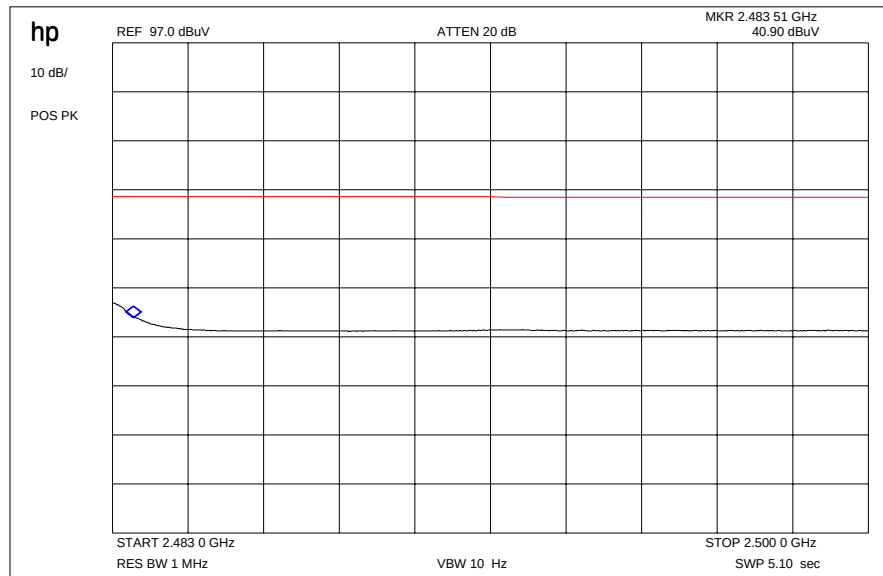

Results & Limits:


Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.


high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	88.20 dB μ V/m	3.2	85.00 dB μ V/m
Max. average value	Calculated with duty cycle correction factor	85.00 dB μ V/m peak	-1,07dB duty cycle correction factor (worst case DH5)	83.93 dB μ V/m
Delta value	Peak 30 kHz RBW/VBW	44.40 dB (single carrier) 42.50 dB (hopping mode)	-	-
Value at band edge	limit 54 dB μ V/m			39.53 dB μ V/m (single carrier) 41.43 dB μ V/m (hopping mode)
Statement:				Complies

3.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1)


Plot 1 of 3: lowest channel

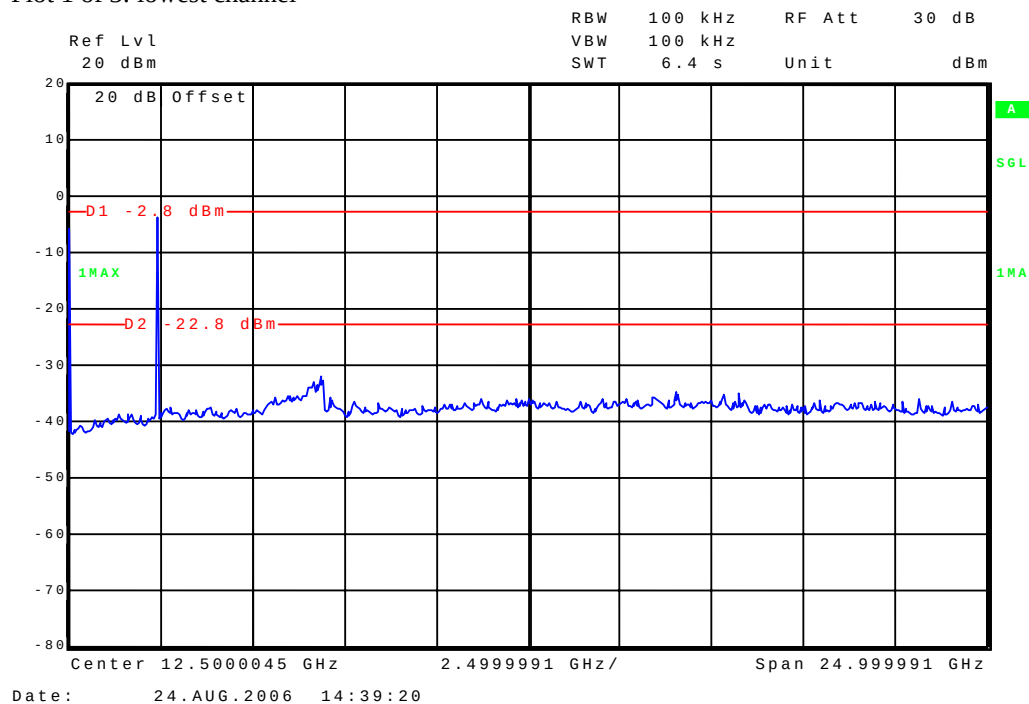

Plot 2 of 3: middle channel

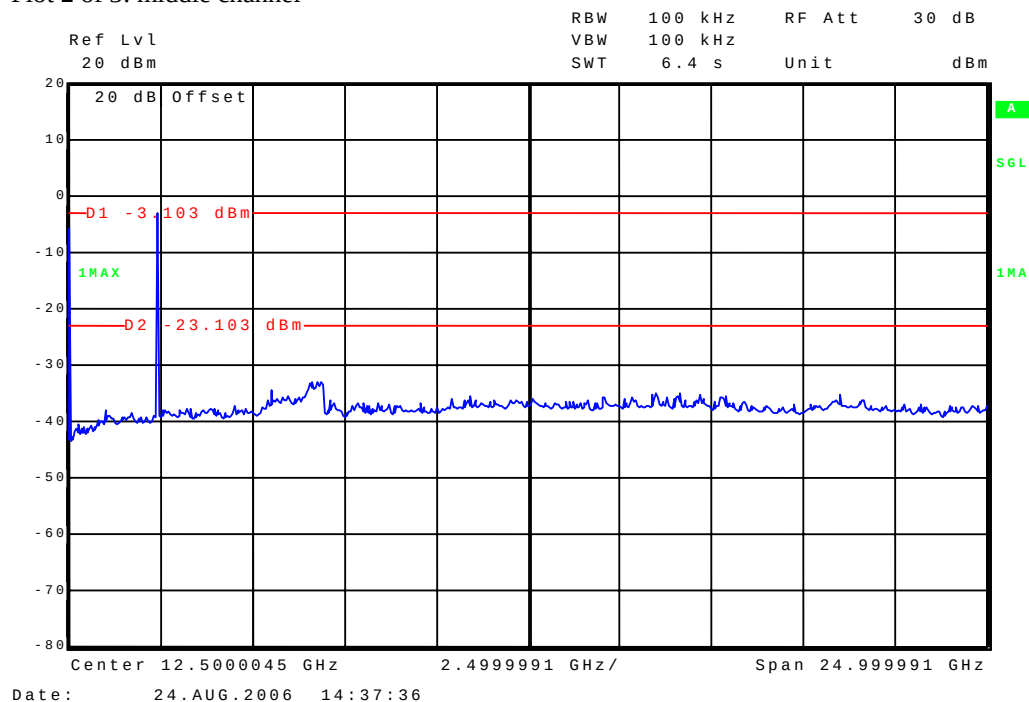

Plot 3 of 3: highest channel

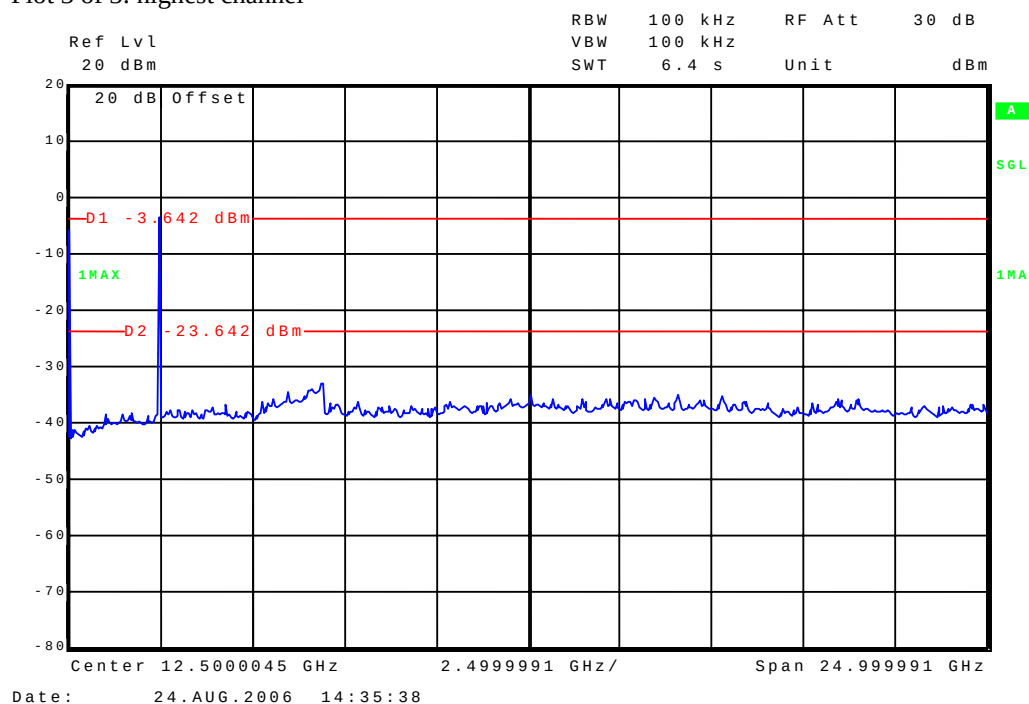

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		-2.0	30 dBm		Operating frequency
			-20 dBc		
2441		-3.9	30 dBm		Operating frequency
			-20 dBc		
2480		-3.3	30 dBm		Operating frequency
			-20 dBc		
Measurement uncertainty		± 3dB			


RBW : 100 kHz VBW: 100 MHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

3.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1)


Plot : 0.03 - 4 GHz vertical worst case (lowest channel)

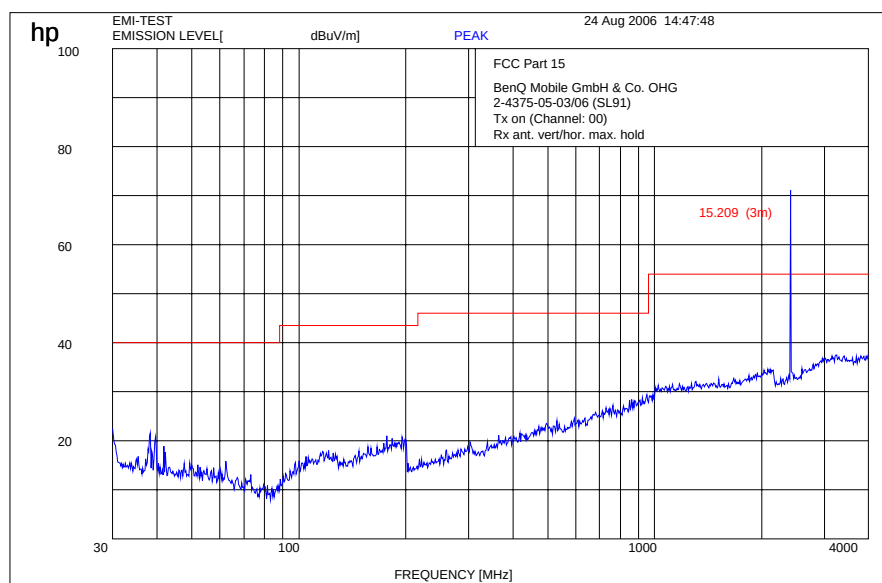


Plot : 4- 12 GHz vertical worst case (lowest channel)

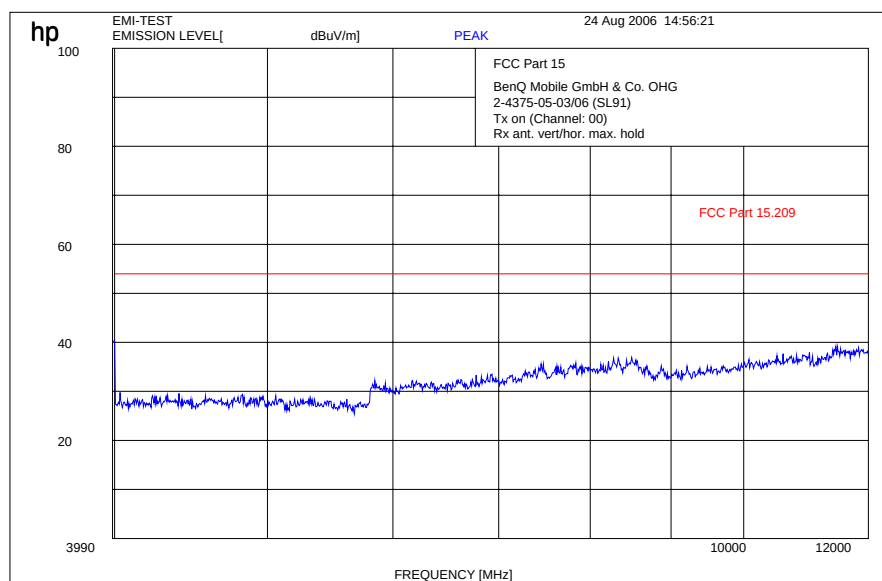


Plot : 12- 25 GHz vertical worst case (valid for all three channels)

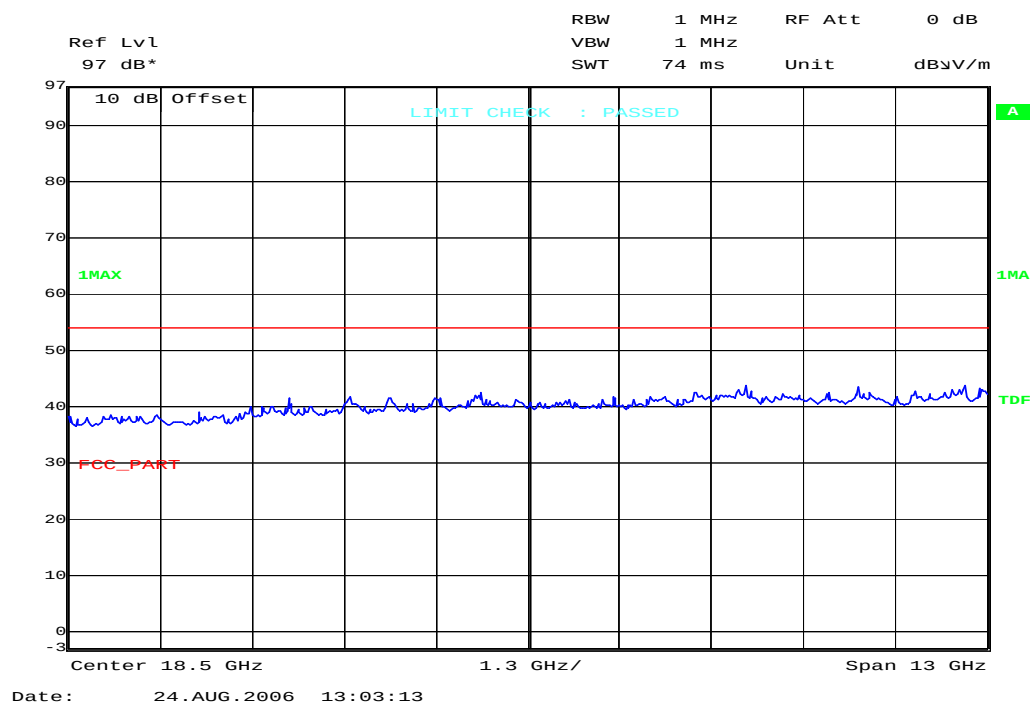


Plot : 0.03 - 4 GHz vertical/horizontal (middle channel)

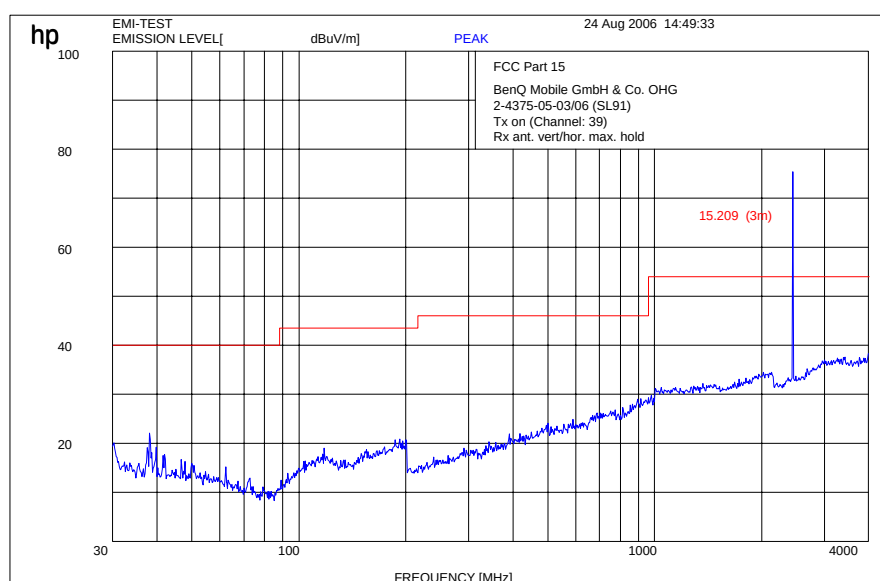


Plot : 4- 12 GHz vertical/horizontal (middle channel)

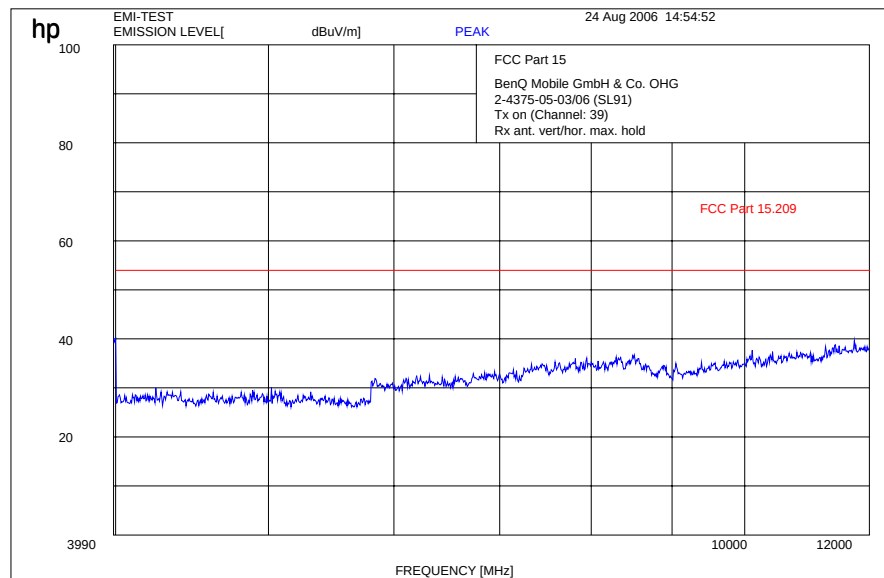

Plot : 0.03 - 4 GHz vertical/horizontal (highest channel)

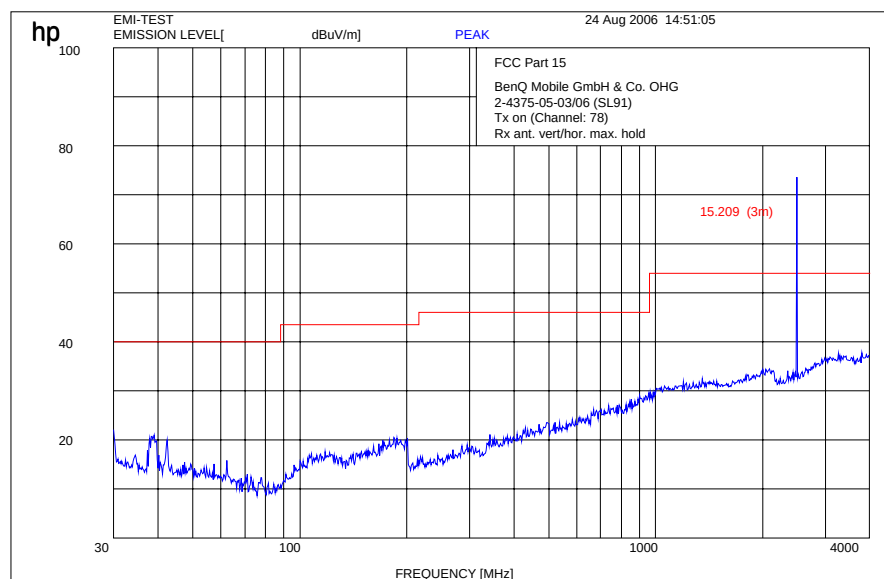

Plot : 4- 12 GHz vertical/horizontal (highest channel)

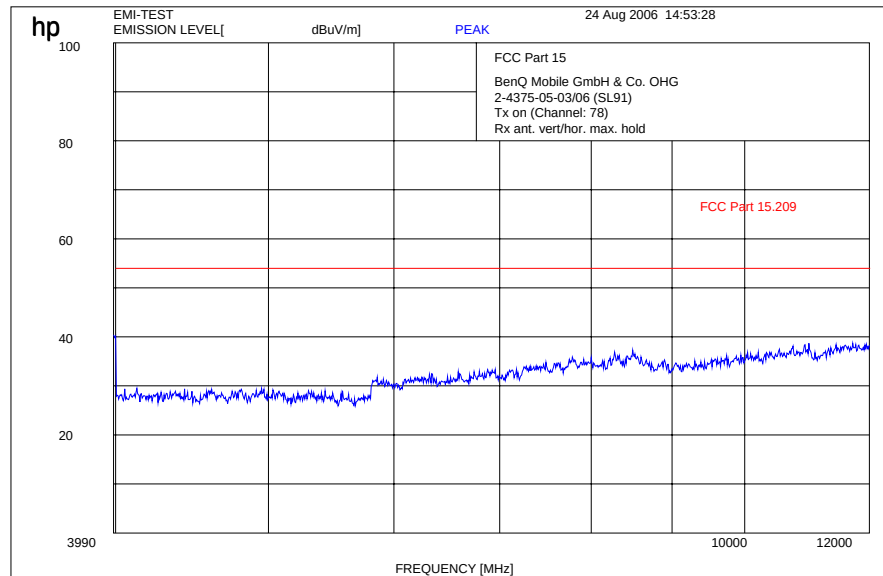

Results:

SPURIOUS EMISSIONS LEVEL (dBμV/m)								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [μV/m]
No peaks found			No peaks found			No peaks found		
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209


Frequency [MHz]	Field strength [μV/m]	Measurement distance (m)
30 - 88	100 (40 dBμV/m)	3
88 - 216	150 (43.5 dBμV/m)	3
216 - 960	200 (46 dBμV/m)	3
above 960	500 (54 dBμV/m)	3

3.16 Spurious Emissions - radiated (Receiver) § 15.109


Plot : 0.03 - 4 GHz vertical/horizontal (receiver)

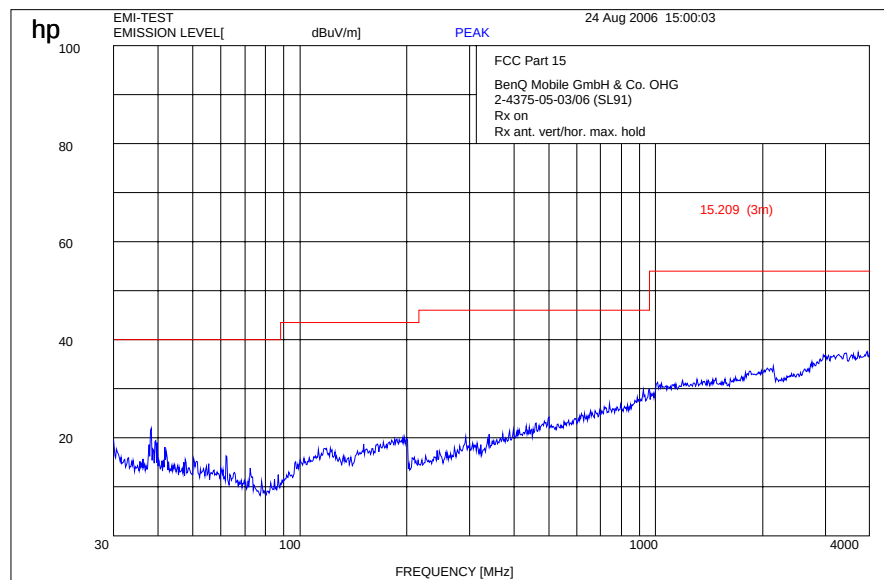

Plot : 4- 12 GHz vertical/horizontal (receiver)

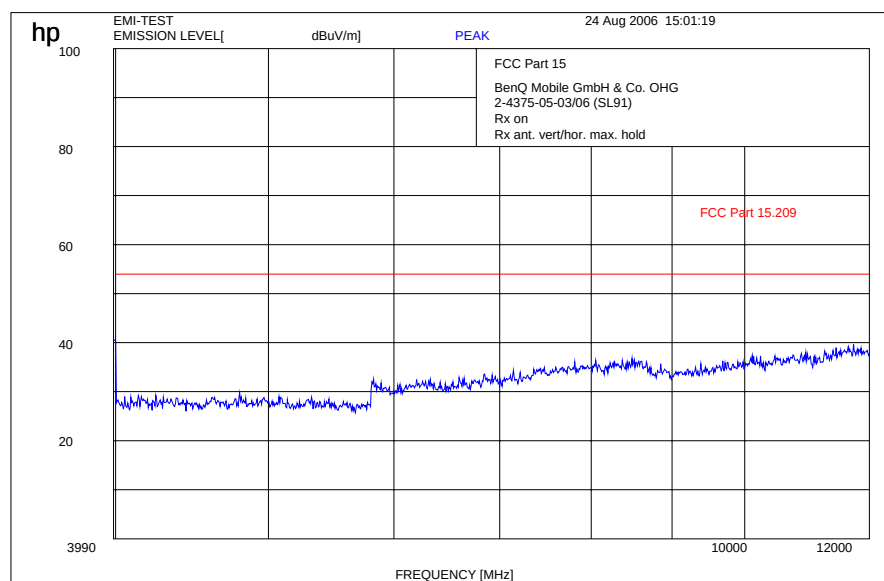

Plot : 12- 25 GHz vertical/horizontal (receiver)

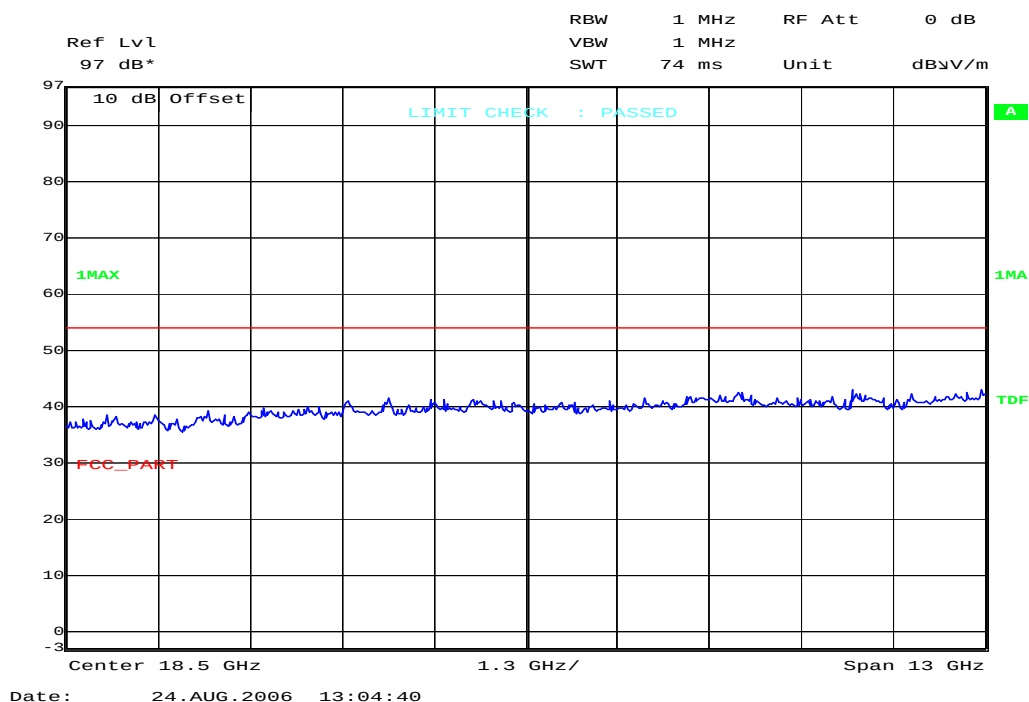

Spurious Emissions level [dB μ V/m]								
Receiving Mode								
f[MHz]	Detector	Level [dB μ V/m]	f[MHz]	Detector	Level [dB μ V/m]	f[MHz]	Detector	Level [dB μ V/m]
No peaks found								
Measurement uncertainty			± 3 dB					

 $f < 1$ GHz : RBW/VBW: 100 kHz $f \geq 1$ GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table

Limits : § 15.109


Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

3.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

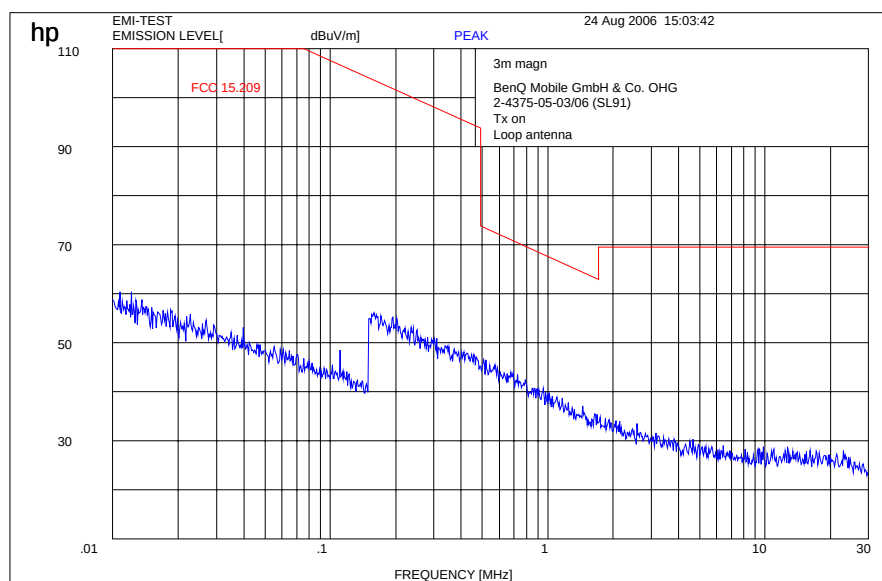

Limits:

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30

3.18 Conducted Emissions <30 MHz § 15.107/207


Plot 1:

EN 55022 V AC Class B

EUT: BenQ Siemens SL91
Manufacturer: BenQ Mobile
Operating Condition: Traffic Mode
Test Site: CETECOM ICT Services Room 006
Operator: RES
Power Supply: 110V AC
Line: L, N
Start of Test: 25.08.2006 / 08:30:55

SCAN TABLE: "EN 55022 V"

Short Description:			Voltage Mains 1.60			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458
			Average			

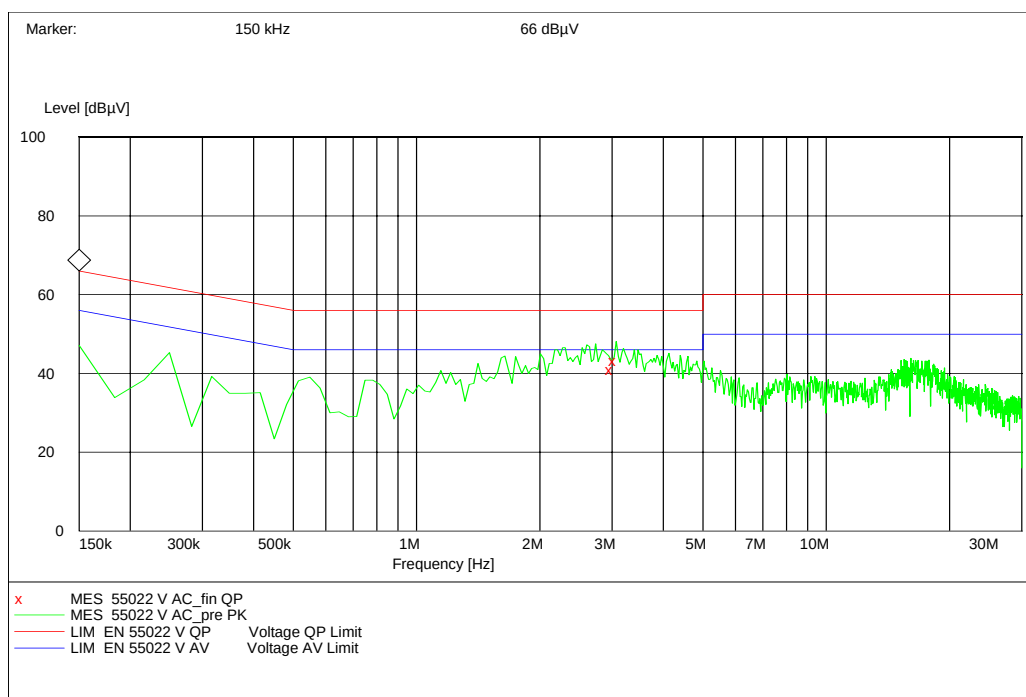

MEASUREMENT RESULT: "55022 V AC_fin QP"

25.08.2006 08:34

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
3.022500	41.00	10.6	56	15.0	L1	FLO
3.082500	43.10	10.6	56	12.9	L1	FLO

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.19 Used Testequipment

Anechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Supply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Biconical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory: (Bluetooth System)

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	System Controller PSM 12	R&S	835259/007	3000002681
2	Memory Extension PSM-K10	R&S	To 1	3000002681
3	Operating Software PSM-B2	R&S	To 1	3000002681
4	19'' Monitor		22759020-ED	3000002681
5	Mouse		LZE 0095/6639	3000002681
6	Keyboard		G00013834L461	3000002681
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681
12	Data Generator SMIQ-B11	R&S	To 10	3000002681
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681
14	Fast CPU SM-B50	R&S	To 10	3000002681
15	FM Modulator SM-B5	R&S	835676/033	3000002681
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681

17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681
18	Data Generator SMIQ-B11	R&S	To 16	3000002681
19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681
20	Fast CPU SM-B50	R&S	To 16	3000002681
21	FM Modulator SM-B5	R&S	836061/022	3000002681
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681
23	Attenuator SMP-B15	R&S	835136/014	3000002681
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681
25	Power Meter NRVD	R&S	835430/044	3000002681
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681
28	Rubidium Standard RUB	R&S	6197	3000002681
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681
31	19'' Rack	R&S	11138363000004	3000002681
32	RF-cable set	R&S	N/A	3000002681
33	IEEE-cables	R&S	N/A	3000002681
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681
35	RSP programmable attenuator	R&S	834500/010	3000002681
36	Signalling Unit	R&S	838312/011	3000002681
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681

SRD Laboratory:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Climatic box	Heraeus Vötsch	VT 4002	--	300003019
Signaling Unit	R&S	CMU200	832221/0055	300002862
Power Splitter	Inmet Corp.	6005-3	none	300002841
SMA Cables	Insulated Wire	SPS-1151-985-SPS	different	different

4 Photographs of Test Set-up

Photo 1: Radiated Emissions

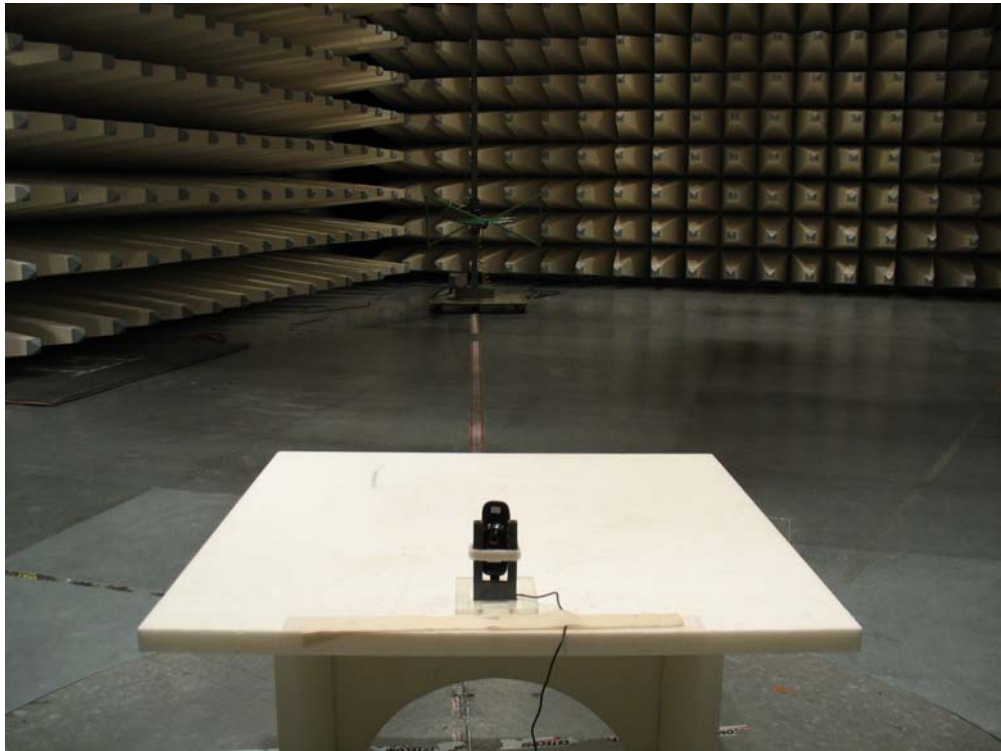


Photo 2: Radiated Emissions



Photo 3: Conducted Emissions

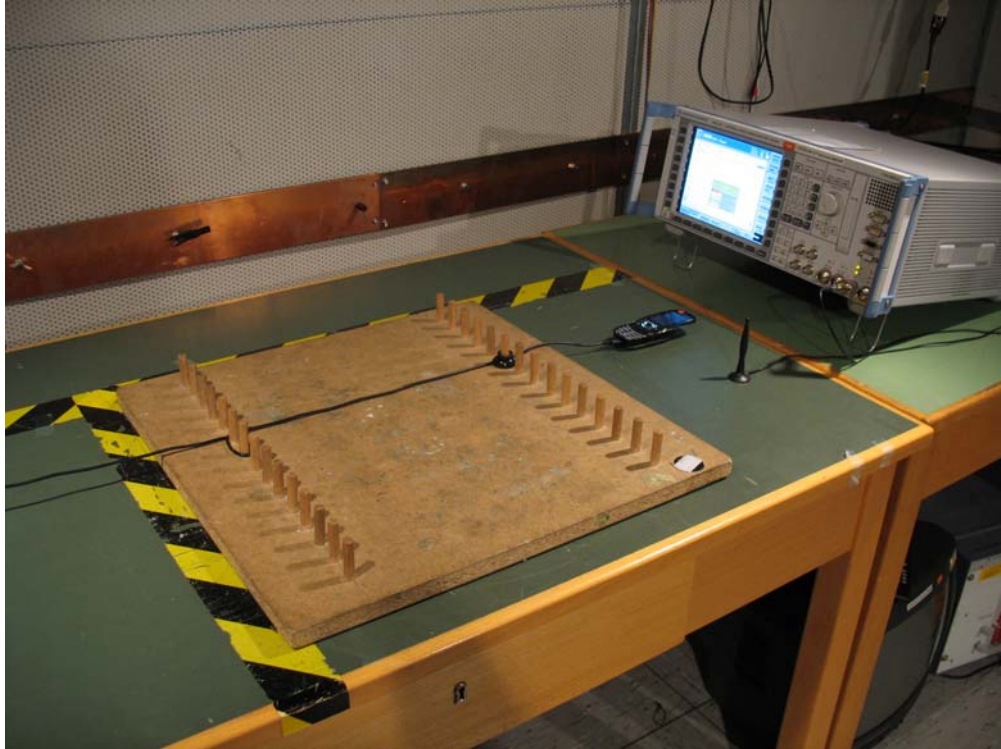


Photo 4: Measurement of Bluetooth conducted



All conducted measurements were made with the test fixture which is pictured above.
The Parameters (attenuation) of the Bluetooth antenna coupler (3 channels) was provided by BenQ.

Photo 5: Measurement of Bluetooth conducted



5 Photographs of EUT

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:



Photo 6:



Photo 7:



Photo 8:



Photo 9:

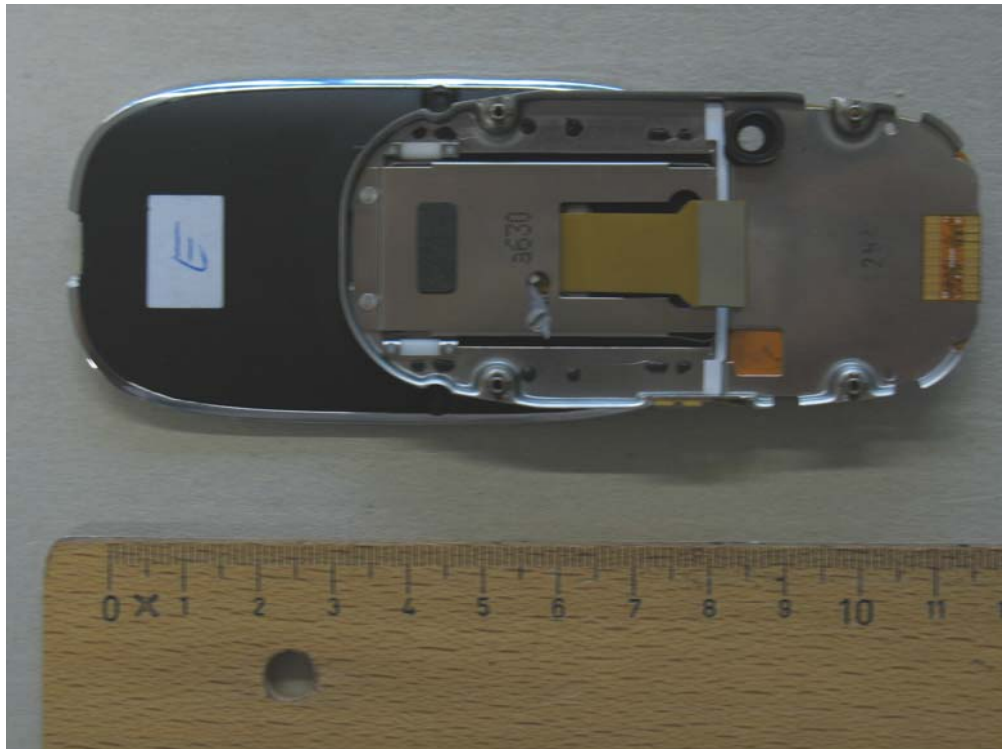


Photo 10:

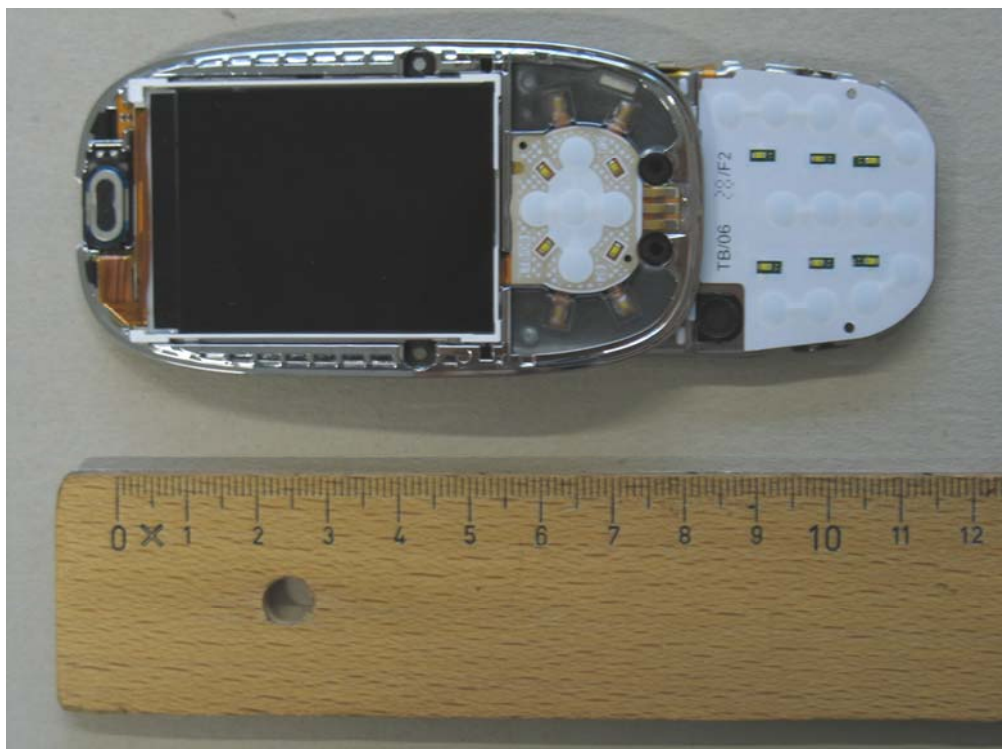


Photo 11:

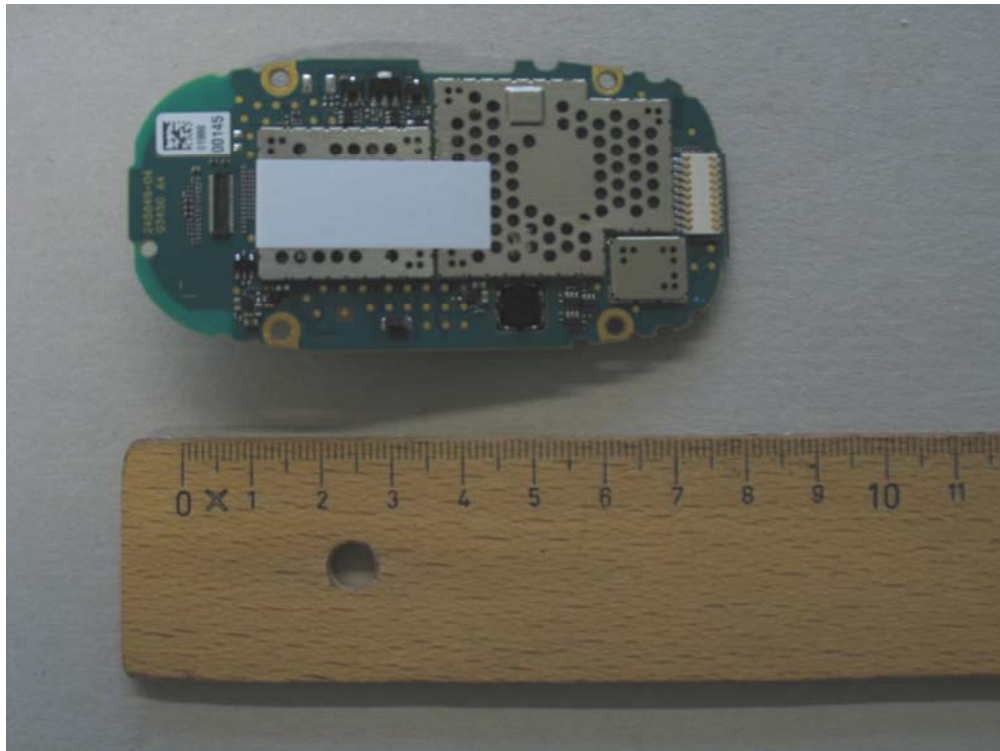


Photo 12:

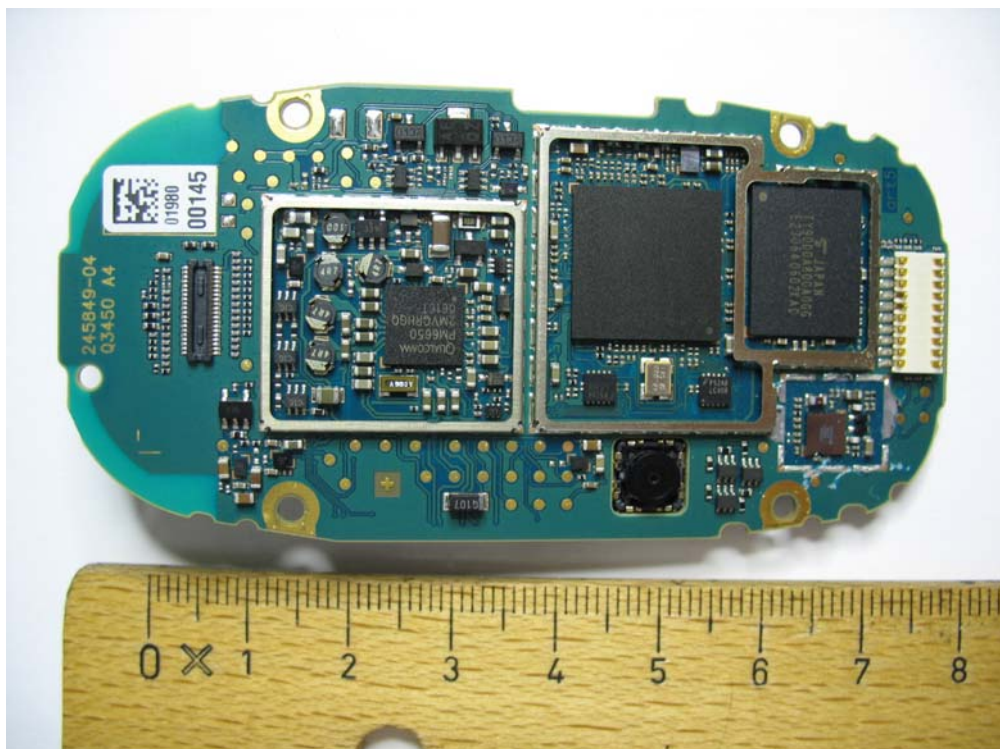


Photo 13:

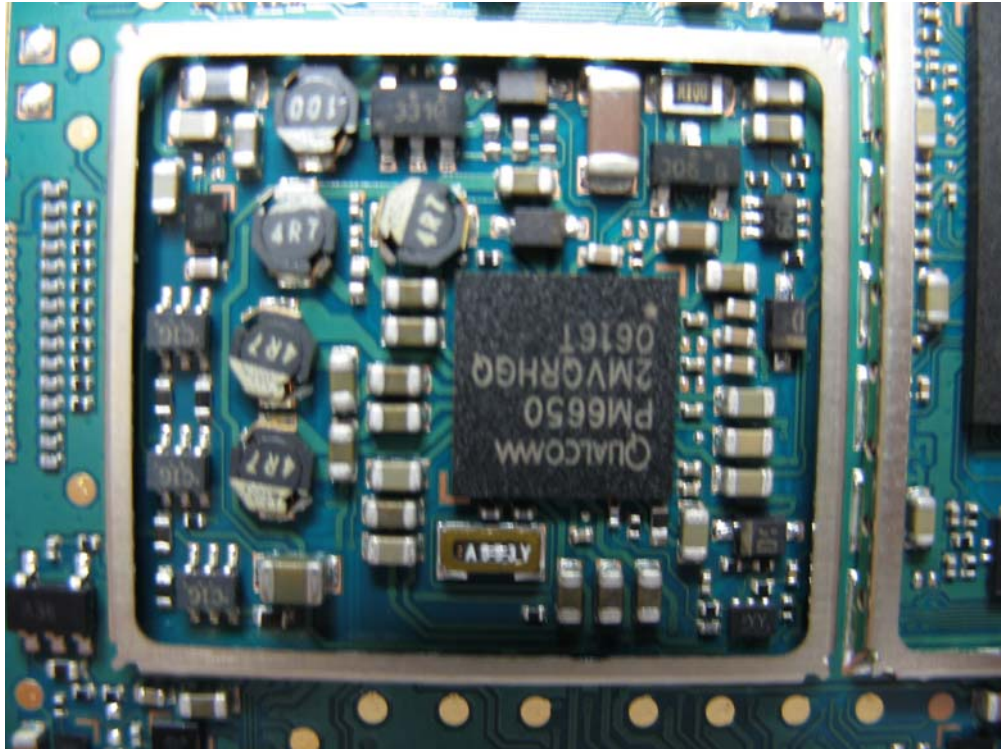


Photo 14:

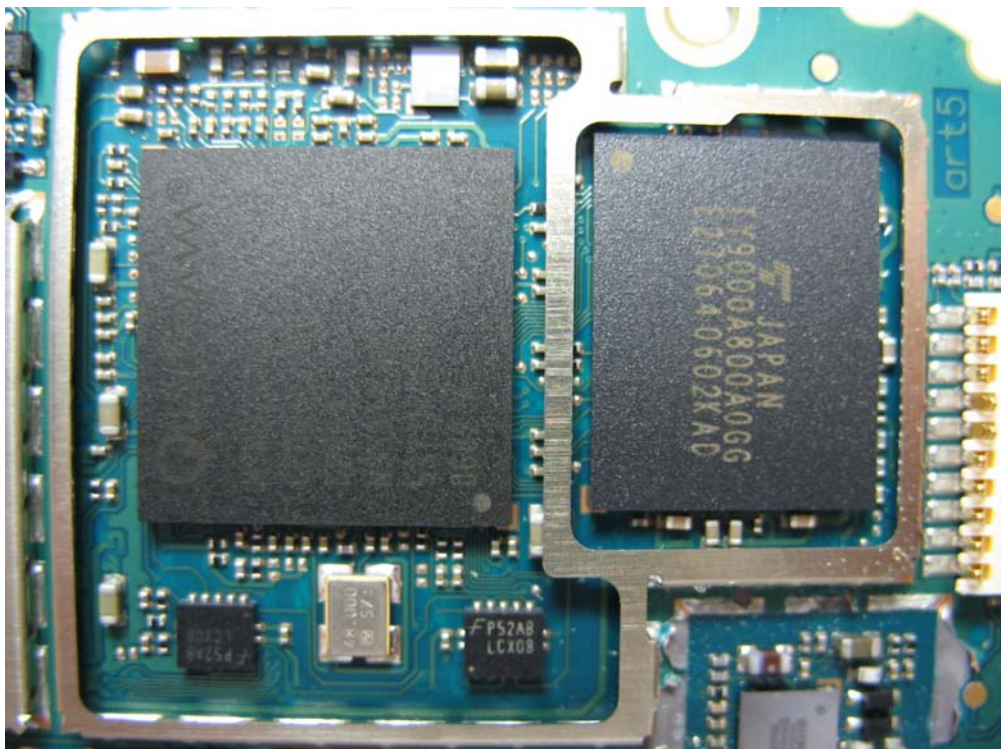


Photo 15:

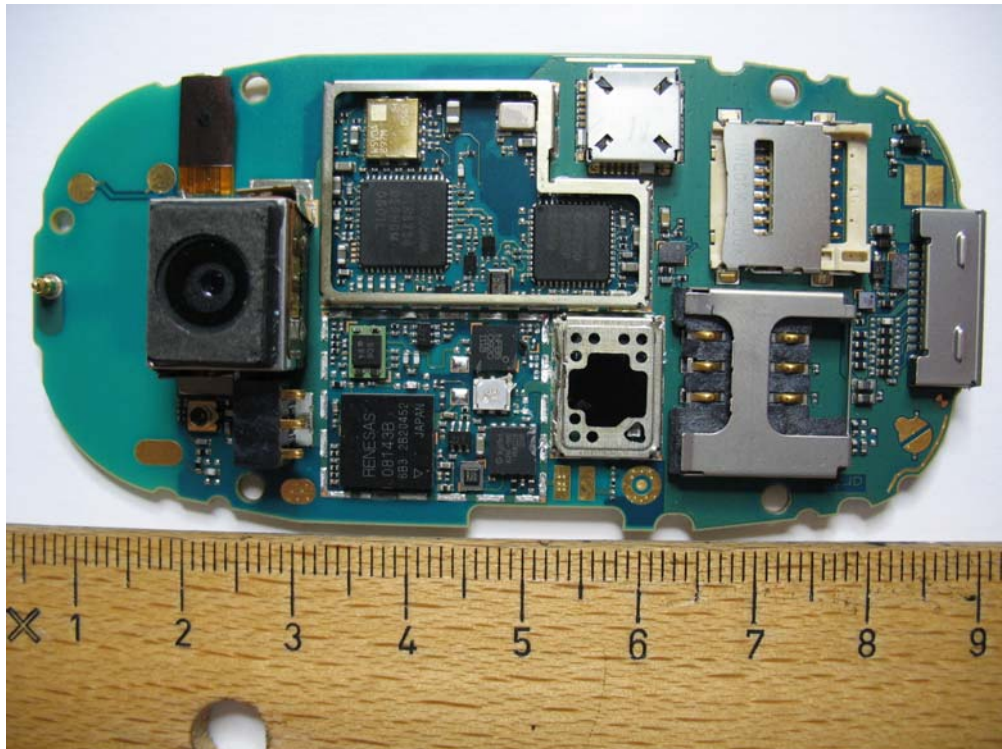


Photo 16:

