

## RF Test Report

Applicant : Winmate Inc.

Product Name : Rugged Tablet PC

Trade Name : Winmate

Model Number : M140TG, M140TGXXXXXXXXXXXXX ("X"= A~Z,a~z,0~9,"-" Blank or Slash for marketing purpose only, no impact safety related constructions or critical components)

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Received Date : Jul. 25, 2022

Test Period : Aug. 10 ~ Oct. 07, 2022

Issued Date : Oct. 13, 2022

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range: 9 kHz to 325 GHz (Bade test site)  
Frequency Range: 9 kHz to 40 GHz (Wugu test site)  
Test Firm MRA designation number: TW0010

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

**Revision History**

Rev.	Issued Date	Revisions	Revised By
00	Oct. 13, 2022	Initial Issue	Abby Huang

## Verification of Compliance

Applicant : Winmate Inc.

Product Name : Rugged Tablet PC

Trade Name : Winmate

Model Number : M140TG, M140TGXXXXXXXXXXXX ("X"= A~Z,a~z,0~9,"-"  
Blank or Slash for marketing purpose only, no impact safety  
related constructions or critical components)

FCC ID : PX9M140TG

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
1.1.	Summary of Test Result .....	5
1.2.	Measurement Uncertainty .....	6
<b>2</b>	<b>EUT Description.....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step.....	8
3.3.	Configuration of Test System Details.....	9
3.4.	Test Instruments .....	11
3.5.	Test Site Environment.....	13
<b>4</b>	<b>Measurement Procedure.....</b>	<b>14</b>
4.1.	AC Power Line Conducted Emission Measurement.....	14
4.2.	Radiated Emission Measurement.....	16
4.3.	Maximum Conducted Output Power Measurement.....	20
4.4.	6 dB RF Bandwidth Measurement.....	21
4.5.	Maximum Power Density Measurement.....	22
4.6.	Out of Band Conducted Emissions Measurement.....	23
4.7.	Antenna Measurement .....	23
<b>5</b>	<b>Test Results .....</b>	<b>24</b>
5.1.	Conducted Emission.....	24
5.2.	Conducted Test Results.....	26
5.3.	Radiated Emission Measurement.....	41
 <b>Appendix A. Test Setup Photographs</b>		

# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

## 1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	

## 2 EUT Description

Applicant	Winmate Inc. 9F, No.111-6, Shing-De Rd., San-Chung District, New Taipei City 241, Taiwan	
Product Name	Rugged Tablet PC	
Trade Name	Winmate	
Model No.	M140TG, M140TGXXXXXXXXXXXXX ("X"= A~Z,a~z,0~9,"-" Blank or Slash for marketing purpose only, no impact safety related constructions or critical components)	
Model Different Description	All models are electrically identical, different model names are for marketing purpose.	
FCC ID	PX9M140TG	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK	
Operate Temp. Range	0 ~ +35 °C	
EUT Power Rating	DC 19 V, 3.42 A	
Antenna information	Type	Max. Gain (dBi)
	Dipole	1.41
RF Output Power	LE, GFSK:	0.00780 W
	2LE, GFSK:	0.00785 W
	BLR C2, GFSK:	0.00778 W
	BLR C8, GFSK:	0.00782 W

### 3 Test Methodology

#### 3.1. Mode of Operation

In the test report use EUT model: M140TG to operate testing.

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit Mode
Mode 2: LE, GFSK Continuous TX Mode
Mode 3: 2LE, GFSK Continuous TX Mode
Mode 4: BLR C2, GFSK Continuous TX Mode
Mode 5: BLR C8, GFSK Continuous TX Mode

Final-Test Mode
Mode 1: Transmit Mode
Mode 3: 2LE, GFSK Continuous TX Mode
Mode 5: BLR C8, GFSK Continuous TX Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.


#### 3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	Turn on TX function.
4	EUT run test program.




### 3.3. Configuration of Test System Details

Conducted Emission

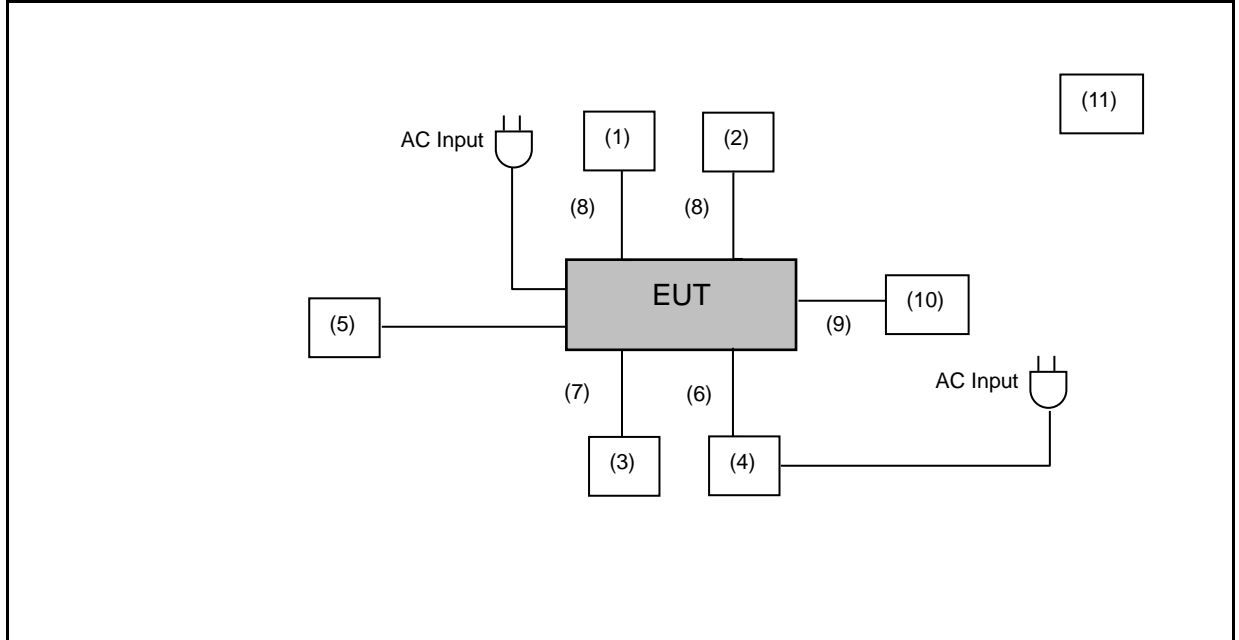

Radiated Emission (Below 1G / Above 1G)

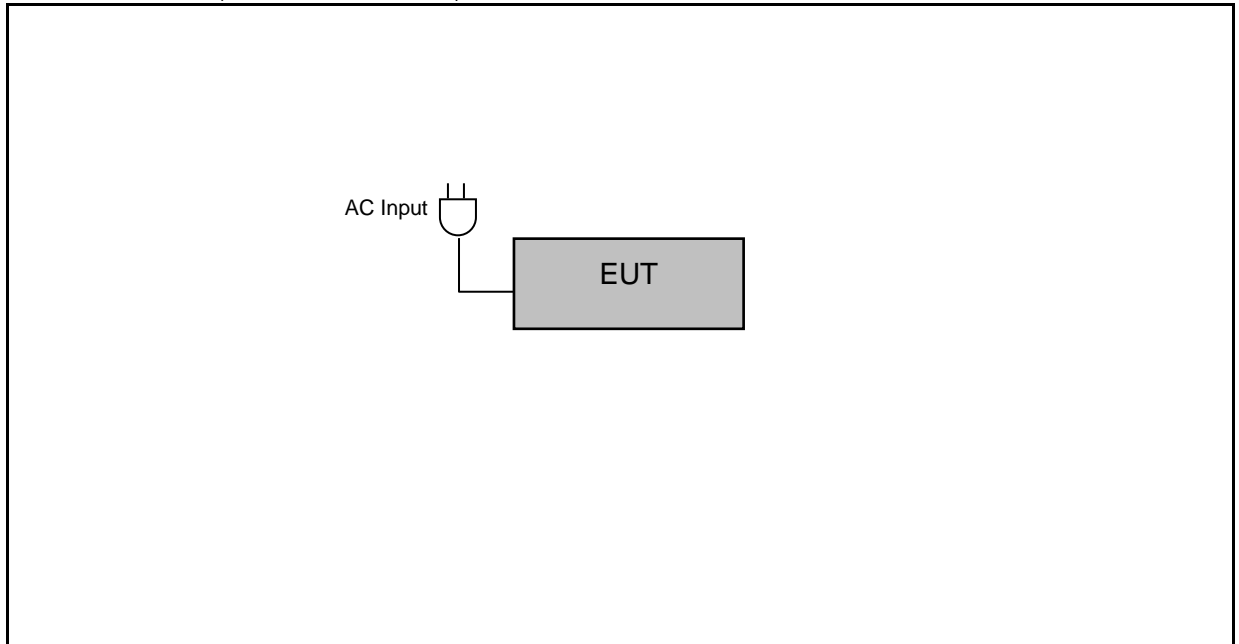

Devices Description				
	Product	Manufacturer	Model Number	Power Cord
(1)	External Hard Drive	Transcend	TS1TSJ25A3K	---
(2)	External Hard Drive	Transcend	TS1TSJ25A3K	---
(3)	External Hard Drive	Transcend	TS1TSJ25A3K	---
(4)	LCD MONITOR	ASUS	MX27U	---
(5)	Earphone	YUJI	Y201	---
(6)	HDMI Cable	BENEVO	BHDMINI100	---
(7)	USB Cable	UGREEN	20103	---
(8)	USB Cable	Transcend	TS1TSJ25A3K	---
(9)	LAN Cable	TATUNG	CAT5E	---
(10)	Access Point	NETGEAR	R7800	---
(11)	Portable Bluetooth Speaker	Harman/kardon	HK NEO	---

### 3.4. Test Instruments

For Conducted Emission

Test Period: Aug. 17 ~ Oct. 07, 2022

Testing Engineer: Amber Cheng

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI	100367	May 19, 2022	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101040	Apr. 06, 2022	1 year
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	101140	Jan. 25, 2022	1 year
<input checked="" type="checkbox"/>	RF Cable	Woken	00100D1380194M	TE-02-03	May 27, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

For Radiated Emissions

Test Period: Aug. 10 ~ Aug. 30, 2022

Testing Engineer: Eason Lee, Jayson Hsieh, Ricky Liu

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 13, 2022	1 year
<input checked="" type="checkbox"/>	Amplifier (10 kHz~3 GHz)	Agilent	EMC001330	980862	Nov. 29, 2022	1 year
<input checked="" type="checkbox"/>	Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02455	Jul. 12, 2021 Jul. 07, 2022	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 MHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 24, 2021	1 year
<input checked="" type="checkbox"/>	Double Ridged Horn Antenna (1 GHz~18 GHz)	ETS	3117	00152321	Sep. 17, 2021	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 24, 2021	1 year
<input checked="" type="checkbox"/>	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2021	1 year
<input checked="" type="checkbox"/>	Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	Feb. 18, 2022	1 year
<input checked="" type="checkbox"/>	Microwave Cable	EMCI	EMCCFD400-NM-NM-6000	210902	Feb. 18, 2022	1 year
<input checked="" type="checkbox"/>	Microwave Cable	SUHNER	suflex104	313229/4	Feb. 18, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request

For Conducted

Test Period: Aug. 15 ~ Aug. 31, 2022

Testing Engineer: Brian Lin

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
<input checked="" type="checkbox"/>	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 16, 2022	1 year

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


## 4 Measurement Procedure

### 4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

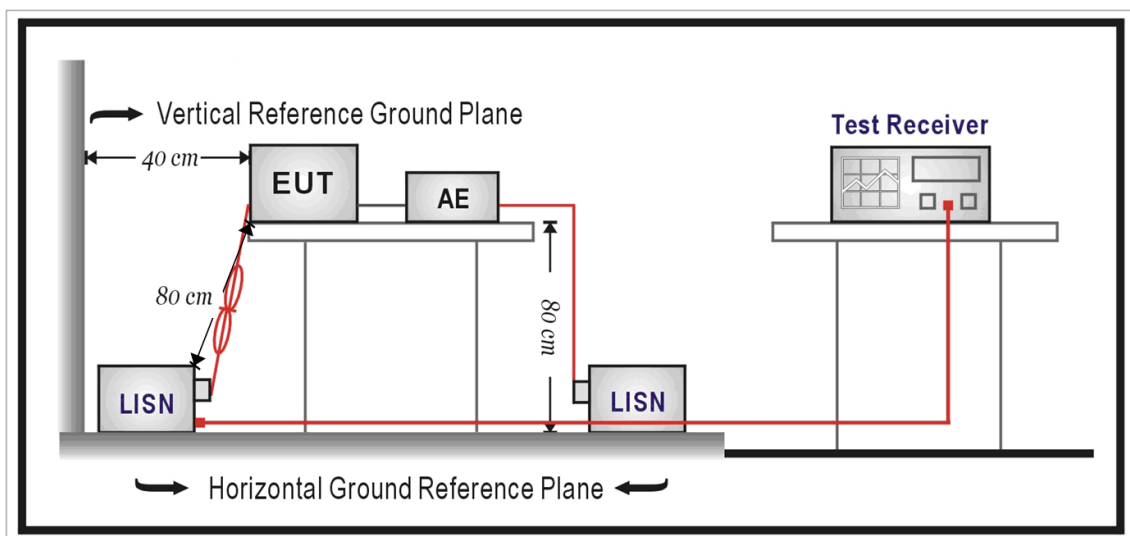

#### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50  $\Omega$  ports of the LISN shall be resistively terminated into 50  $\Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

## 4.2. Radiated Emission Measurement

### ■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


### ■ Setup

9 kHz ~ 30 MHz

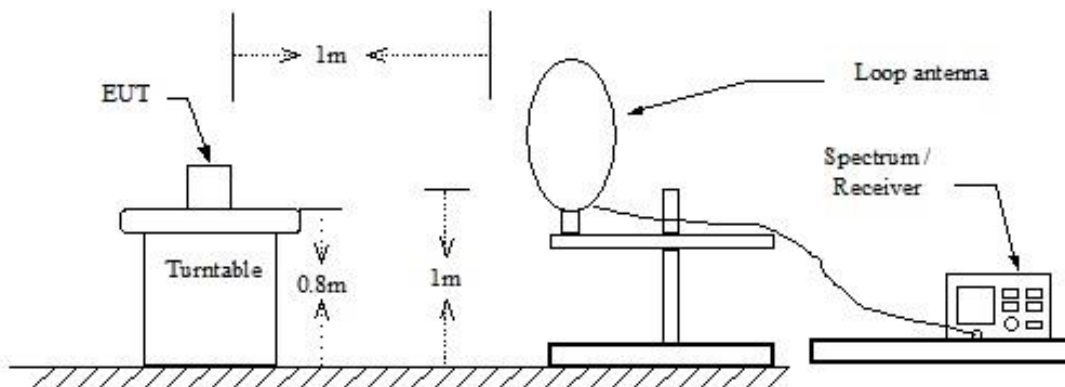




Below 1 GHz

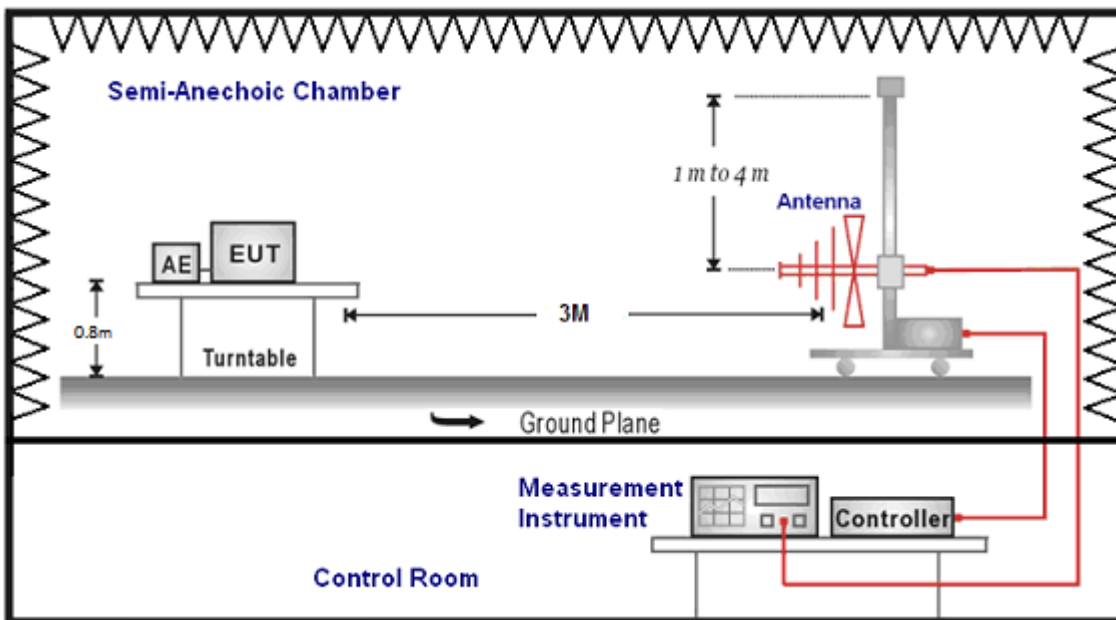

Above 1 GHz

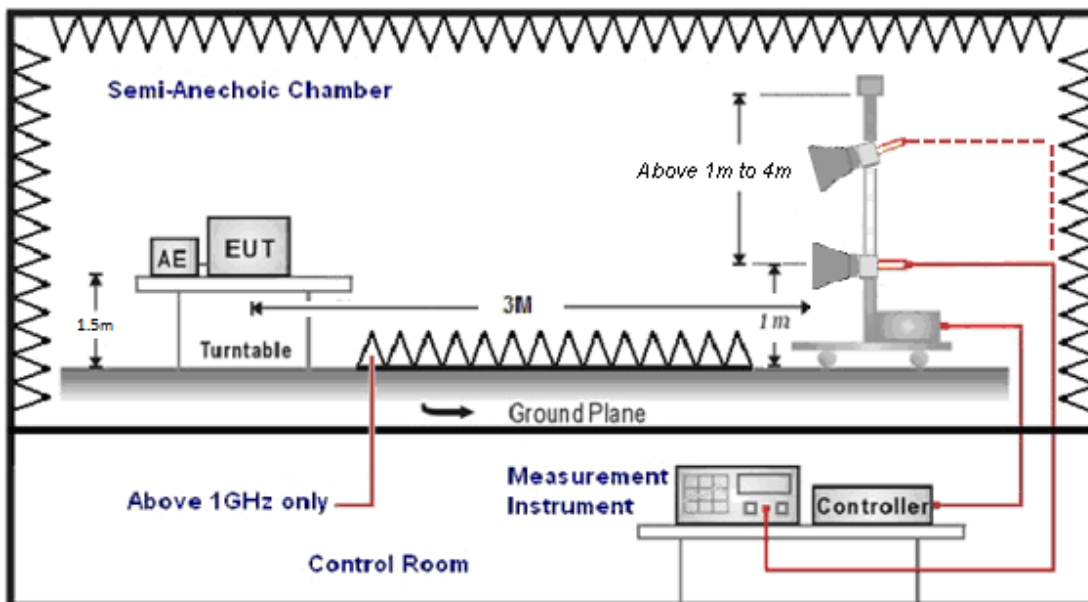

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle  $>0.98$  /  $1/T$  for average measurements when Duty cycle  $<0.98$ . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter ( $\mu\text{V}/\text{m}$ ).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter ( $\text{dBuV}/\text{m}$ ).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

### 4.3. Maximum Conducted Output Power Measurement

■ **Limit**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

■ **Test Setup**

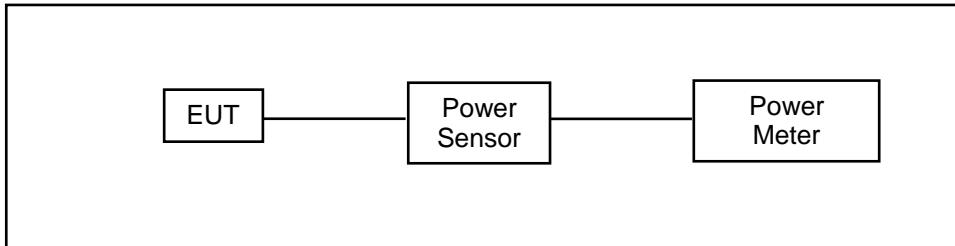

■ **Test Procedure**

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


#### 4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ **Test Setup**

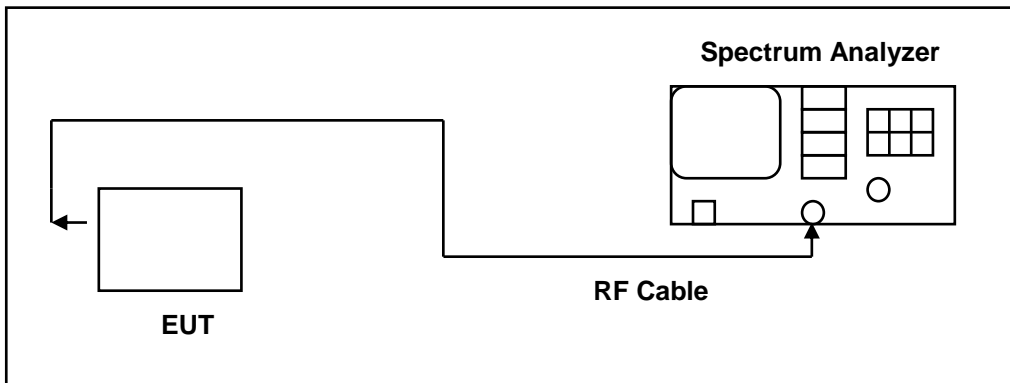

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

## 4.5. Maximum Power Density Measurement

### ■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### ■ Test Setup

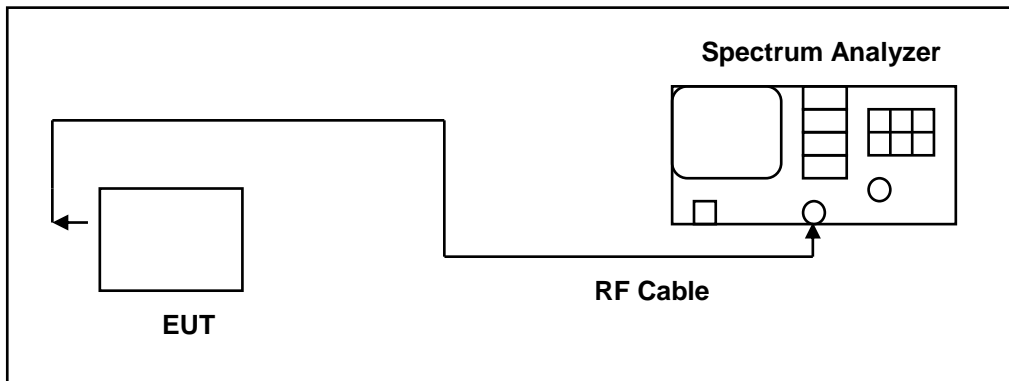

### ■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 4.6. Out of Band Conducted Emissions Measurement

### ■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### ■ Test Setup

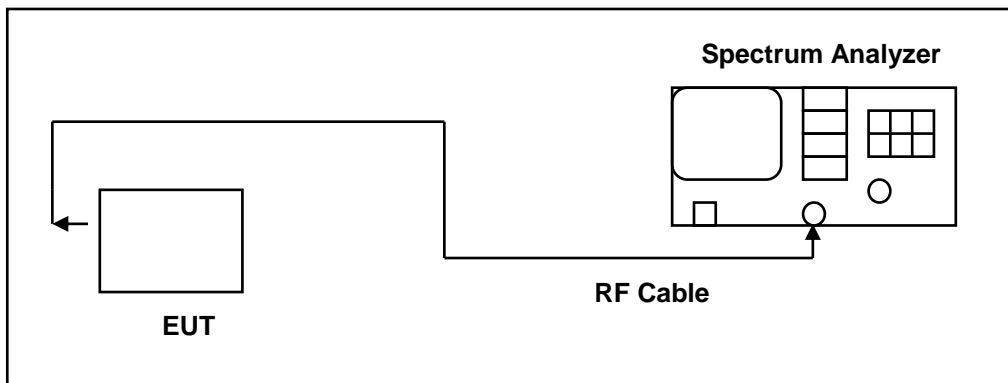

### ■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

## 4.7. Antenna Measurement

### ■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### ■ Antenna Connector Construction

See section 2 – antenna information.

## 5 Test Results

### 5.1. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

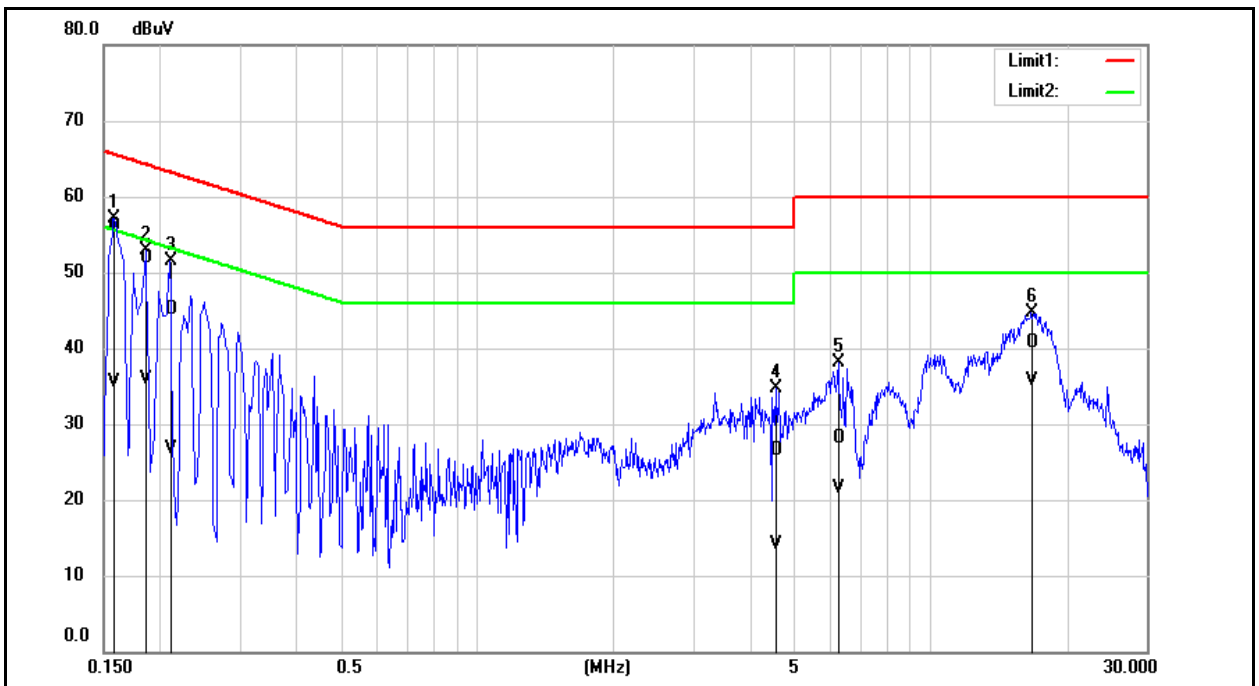


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	46.54	25.97	9.54	56.08	35.51	65.57	55.57	-9.49	-20.06	Pass
2	0.1860	42.27	26.31	9.54	51.81	35.85	64.21	54.21	-12.40	-18.36	Pass
3	0.2100	35.60	17.13	9.54	45.14	26.67	63.21	53.21	-18.07	-26.54	Pass
4	4.5660	16.92	4.40	9.68	26.60	14.08	56.00	46.00	-29.40	-31.92	Pass
5	6.2740	18.41	11.73	9.71	28.12	21.44	60.00	50.00	-31.88	-28.56	Pass
6	16.6900	30.89	25.83	9.84	40.73	35.67	60.00	50.00	-19.27	-14.33	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

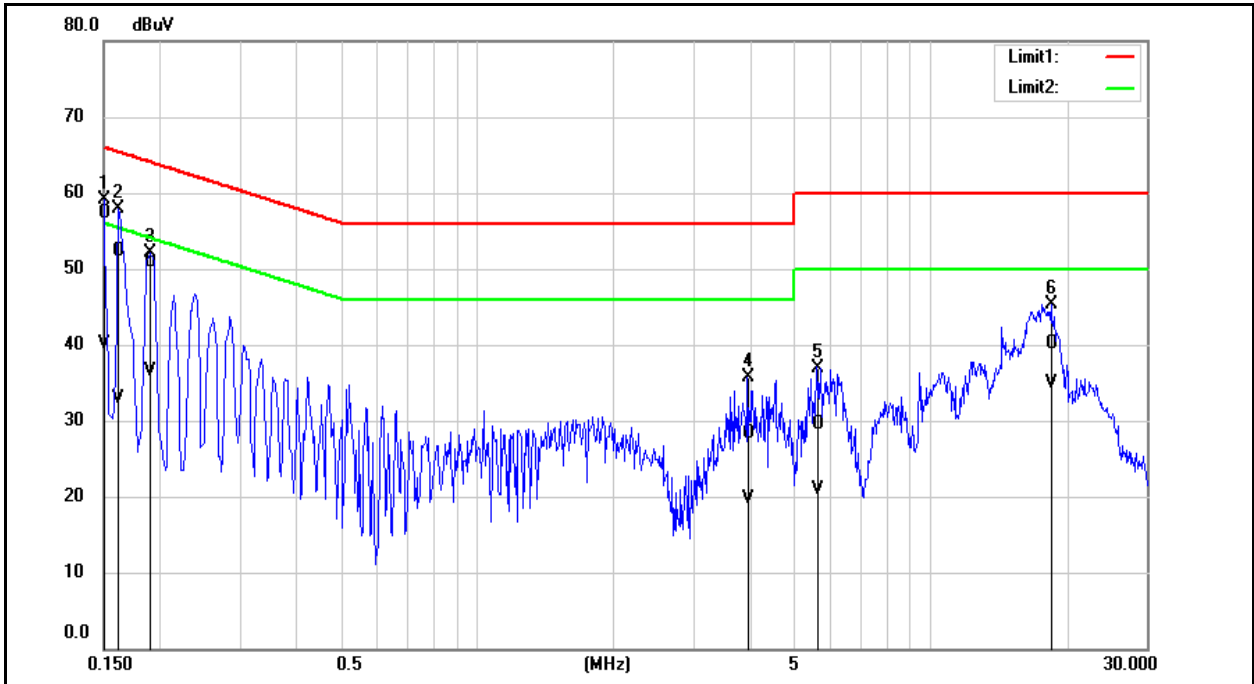



No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	47.61	30.46	9.60	57.21	40.06	66.00	56.00	-8.79	-15.94	Pass
2	0.1620	42.76	23.30	9.60	52.36	32.90	65.36	55.36	-13.00	-22.46	Pass
3	0.1900	41.30	26.83	9.60	50.90	36.43	64.04	54.04	-13.14	-17.61	Pass
4	3.9580	18.53	10.06	9.73	28.26	19.79	56.00	46.00	-27.74	-26.21	Pass
5	5.6100	19.66	11.12	9.78	29.44	20.90	60.00	50.00	-30.56	-29.10	Pass
6	18.4340	30.17	24.99	10.01	40.18	35.00	60.00	50.00	-19.82	-15.00	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).  
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## 5.2. Conducted Test Results

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 3	2402	0.222	0.622	0.357	4.474	4.505
Mode 5	2402	3.210	3.765	0.853	0.693	0.312

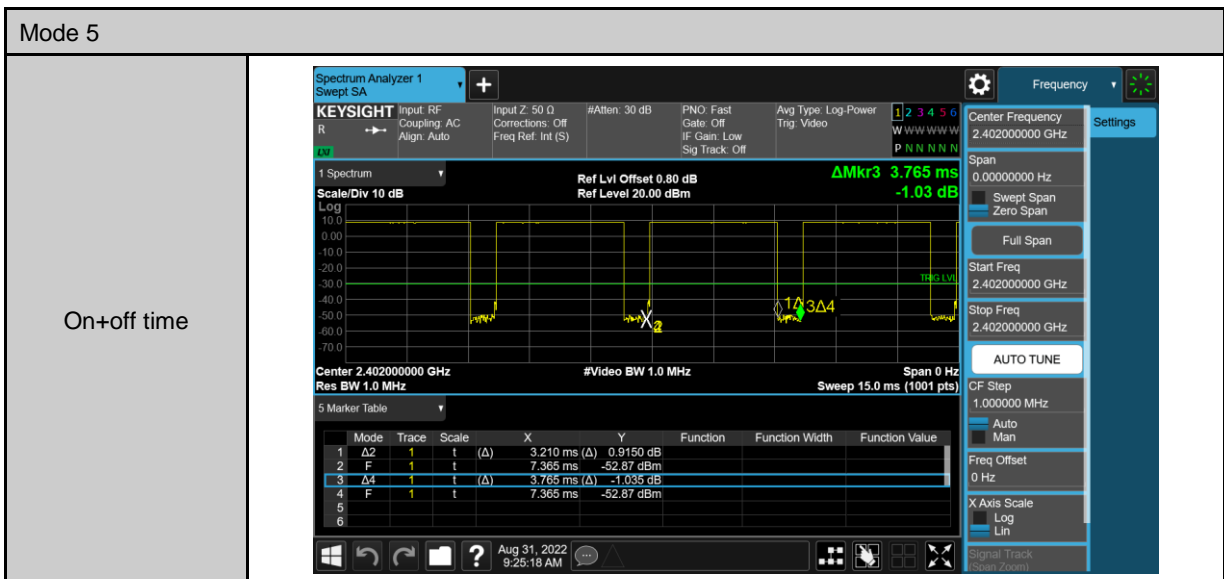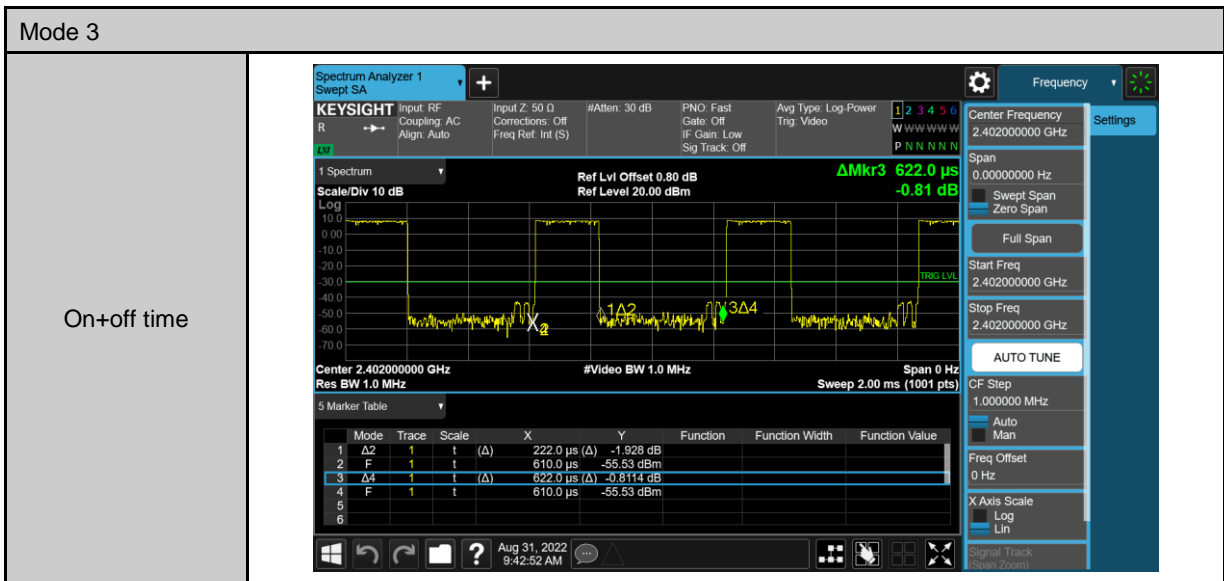

**Maximum Conducted Output Power Measurement**

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
Mode 2	2402	16.00	DRTU 22.21080.0.0-OEM .DRTU.12817
	2440	16.00	
	2480	16.00	
Mode 3	2402	16.00	
	2440	16.00	
	2480	16.00	
Mode 4	2402	16.00	
	2440	16.00	
	2480	16.00	
Mode 5	2402	16.00	
	2440	16.00	
	2480	16.00	

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	8.72	0.00745	8.92	0.00780	≤ 30
2440	8.68	0.00738	8.90	0.00776	≤ 30
2480	8.31	0.00678	8.53	0.00713	≤ 30

Test Mode	Mode 3				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	8.73	0.00746	8.95	0.00785	≤ 30
2440	8.71	0.00743	8.93	0.00782	≤ 30
2480	8.34	0.00682	8.56	0.00718	≤ 30

Test Mode	Mode 4				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	8.70	0.00741	8.91	0.00778	≤ 30
2440	8.67	0.00736	8.88	0.00773	≤ 30
2480	8.29	0.00675	8.50	0.00708	≤ 30

Test Mode	Mode 5				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	8.73	0.00746	8.93	0.00782	≤ 30
2440	8.70	0.00741	8.91	0.00778	≤ 30
2480	8.33	0.00681	8.55	0.00716	≤ 30

Note: The relevant measured result has the offset with cable loss already.

**6 dB RF Bandwidth Measurement**

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	1125.000	≥ 500
2440	1133.000	≥ 500
2480	1155.000	≥ 500

Test Mode	Mode 5	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	607.600	≥ 500
2440	605.900	≥ 500
2480	610.800	≥ 500

■ Test Graphs

Mode 3													
2402 MHz	<p>Center Frequency: 2.40200000 GHz Span: 6.0000 MHz OF Step: 600.000 kHz Freq Offset: 0 Hz</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>2.0756 MHz</td> <td>Total Power</td> <td>15.9 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>6.517 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.125 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	2.0756 MHz	Total Power	15.9 dBm	Transmit Freq Error	6.517 kHz	% of OBW Power	99.00 %	x dB Bandwidth	1.125 MHz	x dB	-6.00 dB
Occupied Bandwidth	2.0756 MHz	Total Power	15.9 dBm										
Transmit Freq Error	6.517 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	1.125 MHz	x dB	-6.00 dB										
2440 MHz	<p>Center Frequency: 2.44000000 GHz Span: 6.0000 MHz OF Step: 600.000 kHz Freq Offset: 0 Hz</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>2.0722 MHz</td> <td>Total Power</td> <td>16.1 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>7.739 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.133 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	2.0722 MHz	Total Power	16.1 dBm	Transmit Freq Error	7.739 kHz	% of OBW Power	99.00 %	x dB Bandwidth	1.133 MHz	x dB	-6.00 dB
Occupied Bandwidth	2.0722 MHz	Total Power	16.1 dBm										
Transmit Freq Error	7.739 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	1.133 MHz	x dB	-6.00 dB										
2480 MHz	<p>Center Frequency: 2.48000000 GHz Span: 6.0000 MHz OF Step: 600.000 kHz Freq Offset: 0 Hz</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>2.0744 MHz</td> <td>Total Power</td> <td>15.9 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>4.852 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.155 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	2.0744 MHz	Total Power	15.9 dBm	Transmit Freq Error	4.852 kHz	% of OBW Power	99.00 %	x dB Bandwidth	1.155 MHz	x dB	-6.00 dB
Occupied Bandwidth	2.0744 MHz	Total Power	15.9 dBm										
Transmit Freq Error	4.852 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	1.155 MHz	x dB	-6.00 dB										

Mode 5													
2402 MHz	<p><b>Keysight Spectrum Analyzer 1 - Occupied BW</b></p> <p>Center Freq: 2.4020000 GHz Span: 3.0000 MHz Scale/Div: 10.0 dB Ref Lvl Offset: 0.80 dB Ref Value: 20.00 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>1.0484 MHz</td> <td>Total Power</td> <td>13.1 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-7.091 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>607.6 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	1.0484 MHz	Total Power	13.1 dBm	Transmit Freq Error	-7.091 kHz	% of OBW Power	99.00 %	x dB Bandwidth	607.6 kHz	x dB	-6.00 dB
Occupied Bandwidth	1.0484 MHz	Total Power	13.1 dBm										
Transmit Freq Error	-7.091 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	607.6 kHz	x dB	-6.00 dB										
2440 MHz	<p><b>Keysight Spectrum Analyzer 1 - Occupied BW</b></p> <p>Center Freq: 2.4400000 GHz Span: 3.0000 MHz Scale/Div: 10.0 dB Ref Lvl Offset: 0.80 dB Ref Value: 20.00 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>1.0472 MHz</td> <td>Total Power</td> <td>13.2 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-5.713 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>605.9 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	1.0472 MHz	Total Power	13.2 dBm	Transmit Freq Error	-5.713 kHz	% of OBW Power	99.00 %	x dB Bandwidth	605.9 kHz	x dB	-6.00 dB
Occupied Bandwidth	1.0472 MHz	Total Power	13.2 dBm										
Transmit Freq Error	-5.713 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	605.9 kHz	x dB	-6.00 dB										
2480 MHz	<p><b>Keysight Spectrum Analyzer 1 - Occupied BW</b></p> <p>Center Freq: 2.4800000 GHz Span: 3.0000 MHz Scale/Div: 10.0 dB Ref Lvl Offset: 0.80 dB Ref Value: 20.00 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>1.0500 MHz</td> <td>Total Power</td> <td>13.0 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-8.529 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>610.8 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	1.0500 MHz	Total Power	13.0 dBm	Transmit Freq Error	-8.529 kHz	% of OBW Power	99.00 %	x dB Bandwidth	610.8 kHz	x dB	-6.00 dB
Occupied Bandwidth	1.0500 MHz	Total Power	13.0 dBm										
Transmit Freq Error	-8.529 kHz	% of OBW Power	99.00 %										
x dB Bandwidth	610.8 kHz	x dB	-6.00 dB										

**Maximum Power Density Measurement**

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-9.140	≤ 8
2440	-9.140	≤ 8
2480	-9.230	≤ 8

Test Mode	Mode 5	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	2.500	≤ 8
2440	2.550	≤ 8
2480	2.480	≤ 8



■ Test Graphs

Mode 3	
2402 MHz	<p>Center Frequency: 2.40200000 GHz Span: 1.68822600 MHz Start Freq: 2.401155987 GHz Stop Freq: 2.402844113 GHz Mkr1 2.4019781 GHz -9.14 dBm Center 2.4020000 GHz #Video BW 10 kHz Span 1.688 MHz #Res BW 3.0 kHz Sweep 178 ms (1001 pts)</p>
2440 MHz	<p>Center Frequency: 2.44000000 GHz Span: 1.70008200 MHz Start Freq: 2.439149959 GHz Stop Freq: 2.440850041 GHz Mkr1 2.4399915 GHz -9.14 dBm Center 2.4400000 GHz #Video BW 10 kHz Span 1.700 MHz #Res BW 3.0 kHz Sweep 179 ms (1001 pts)</p>
2480 MHz	<p>Center Frequency: 2.48000000 GHz Span: 1.7320200 MHz Start Freq: 2.479133849 GHz Stop Freq: 2.480866151 GHz Mkr1 2.4800104 GHz -9.23 dBm Center 2.4800000 GHz #Video BW 10 kHz Span 1.732 MHz #Res BW 3.0 kHz Sweep 183 ms (1001 pts)</p>

Mode 5	
<p>2402 MHz</p>	
<p>2440 MHz</p>	
<p>2480 MHz</p>	

Out of Band Conducted Emissions Measurement


■ Test Graphs


Reference level




Mode 5	
2402 MHz	<p>Center Frequency: 2.40200000 GHz Span: 911.348000 kHz Start Freq: 2.401544326 GHz Stop Freq: 2.402455674 GHz Mkr1 2.4019927 GHz 8.57 dBm #Res BW 100 kHz #Video BW 300 kHz Sweep 1.00 ms (1001 pts)</p>
2440 MHz	<p>Center Frequency: 2.44000000 GHz Span: 908.852000 kHz Start Freq: 2.439545574 GHz Stop Freq: 2.440454426 GHz Mkr1 2.4399936 GHz 8.64 dBm #Res BW 100 kHz #Video BW 300 kHz Sweep 1.00 ms (1001 pts)</p>
2480 MHz	<p>Center Frequency: 2.48000000 GHz Span: 916.176000 kHz Start Freq: 2.479541912 GHz Stop Freq: 2.480458088 GHz Mkr1 2.4799927 GHz 8.48 dBm #Res BW 100 kHz #Video BW 300 kHz Sweep 1.00 ms (1001 pts)</p>


Out of Band Conducted Emissions

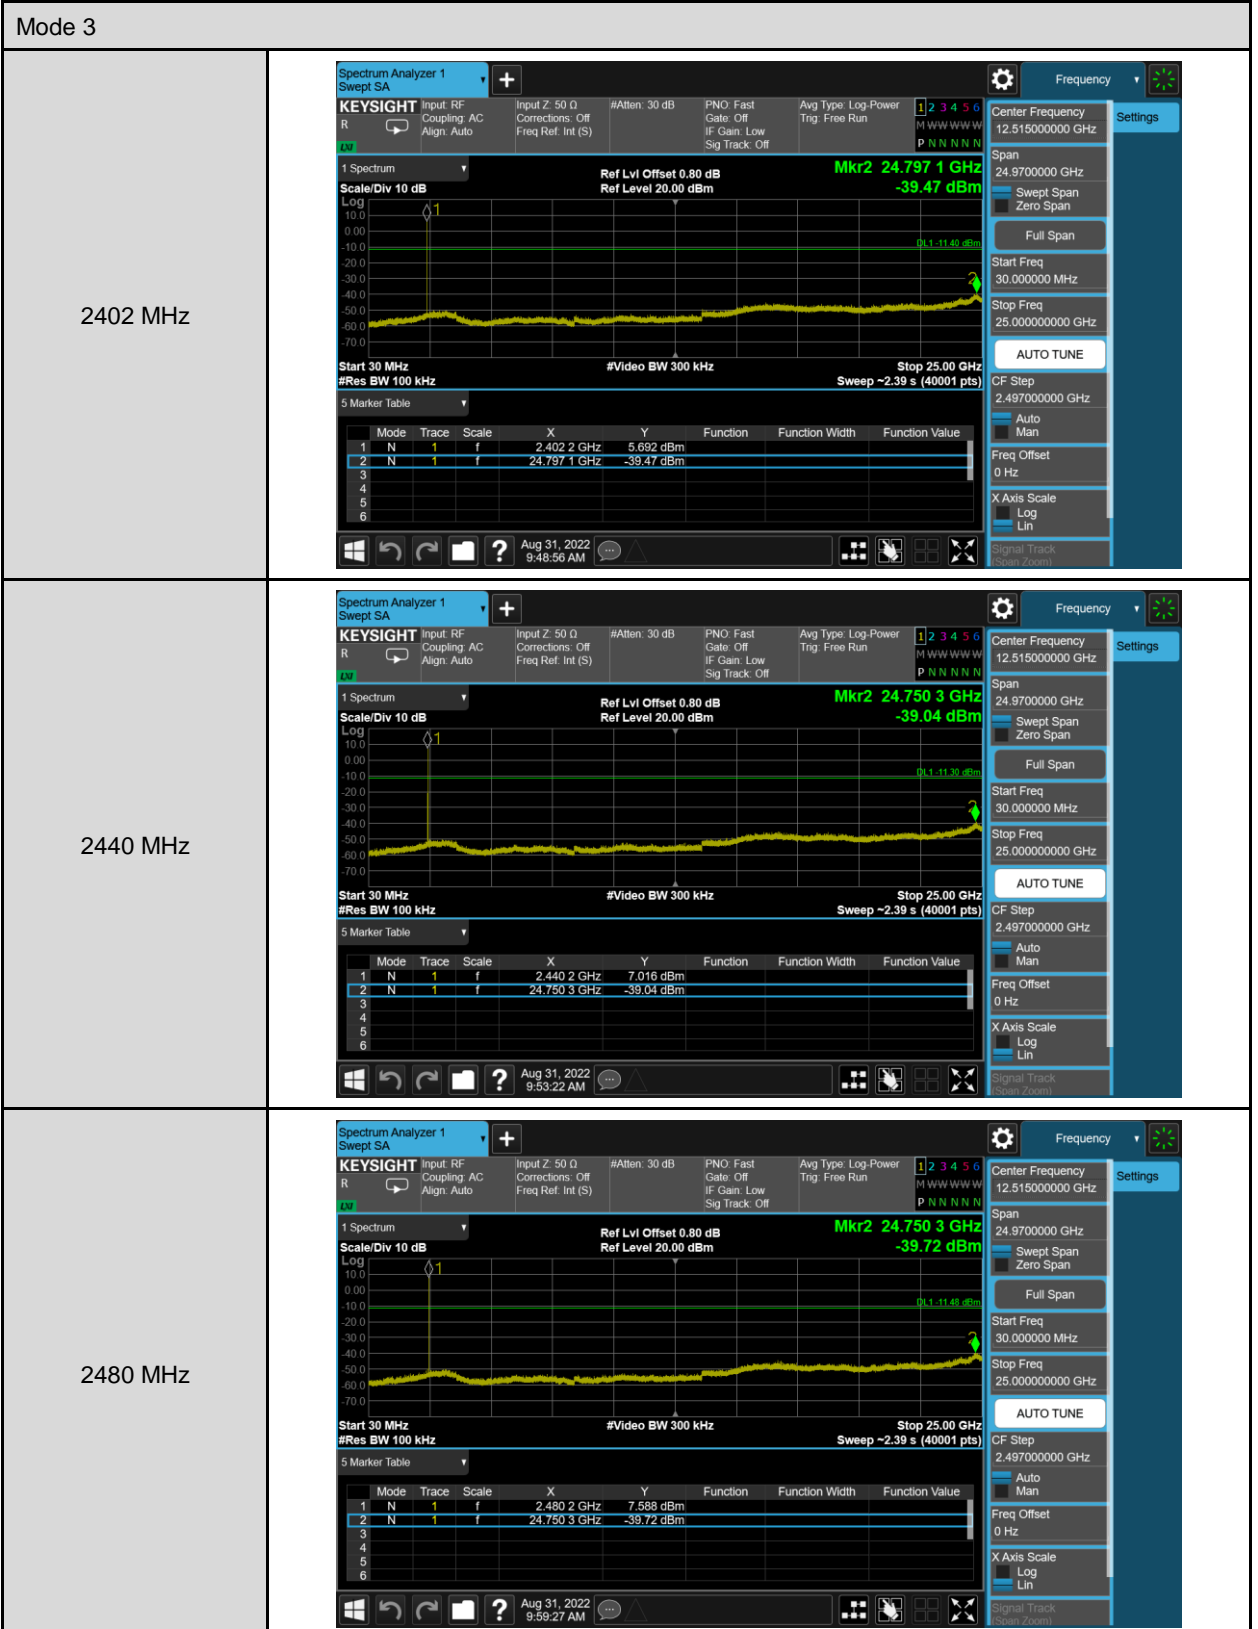

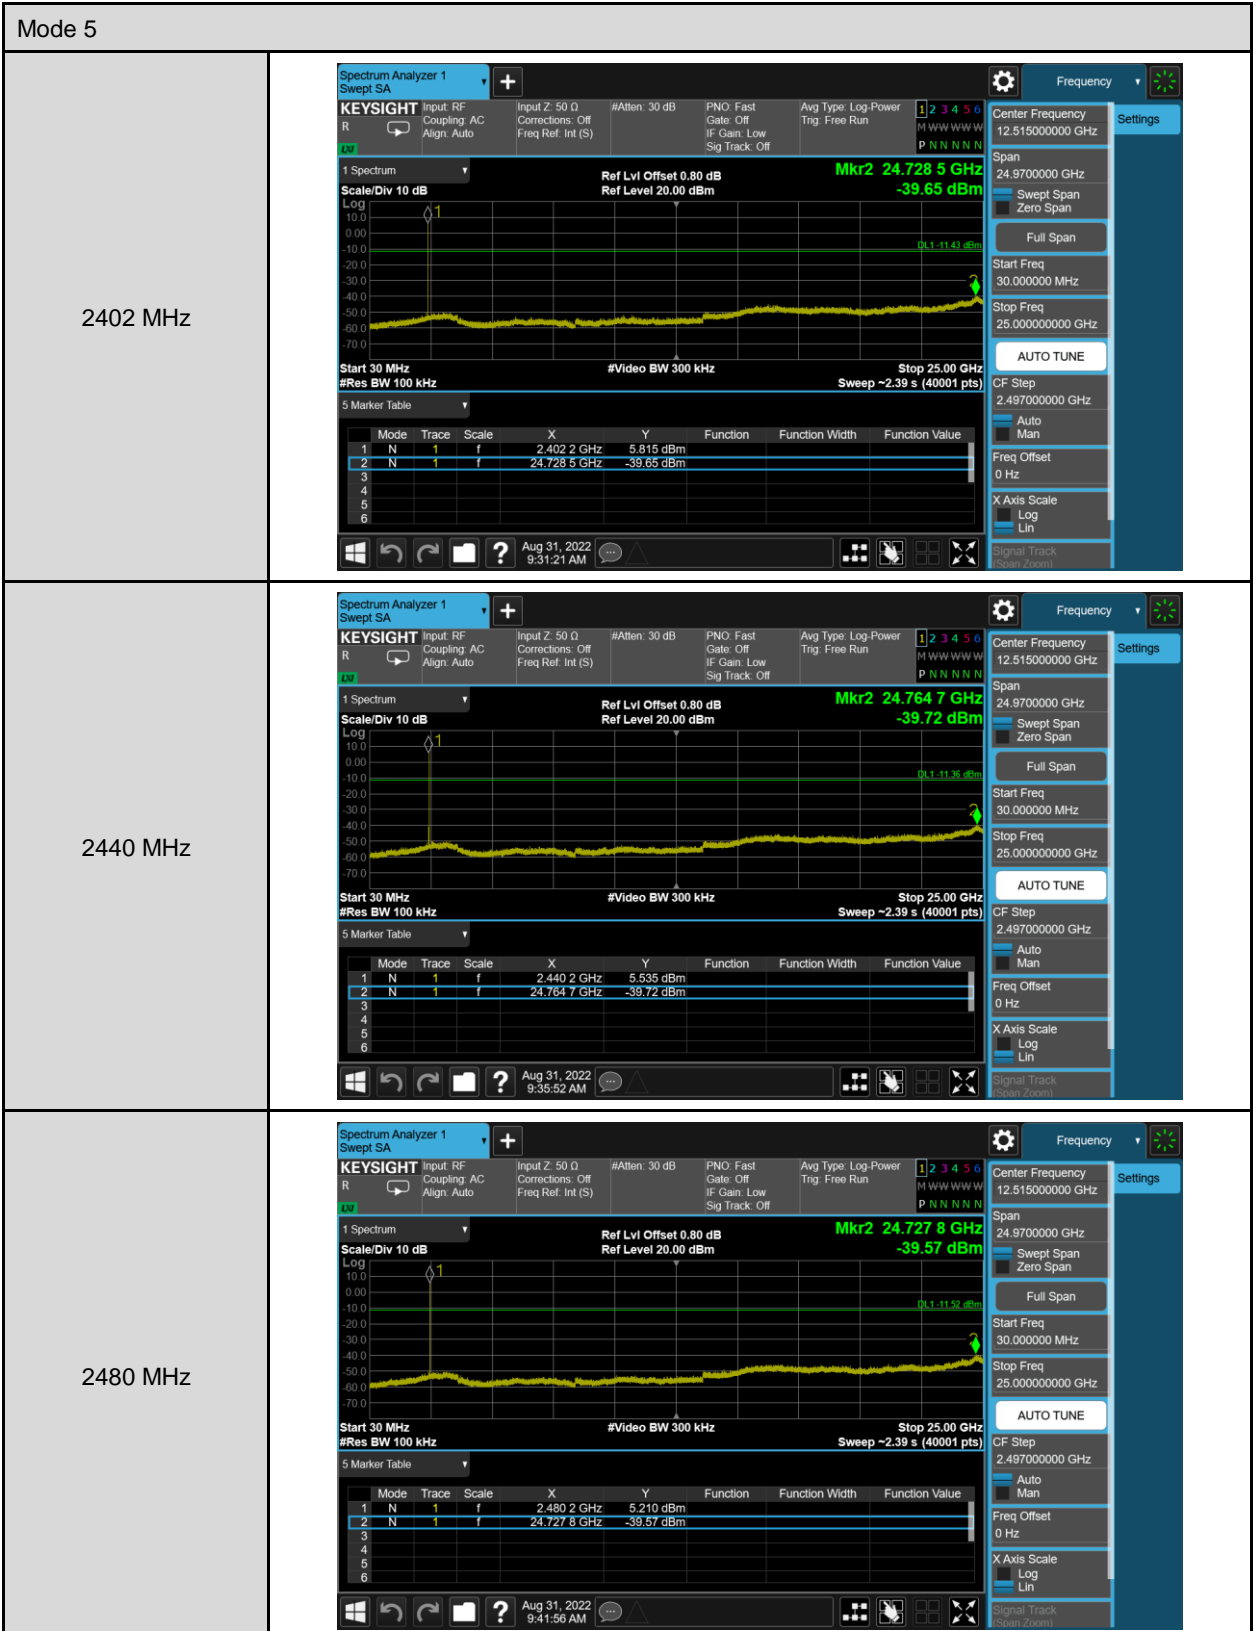

Conducted Band Edge

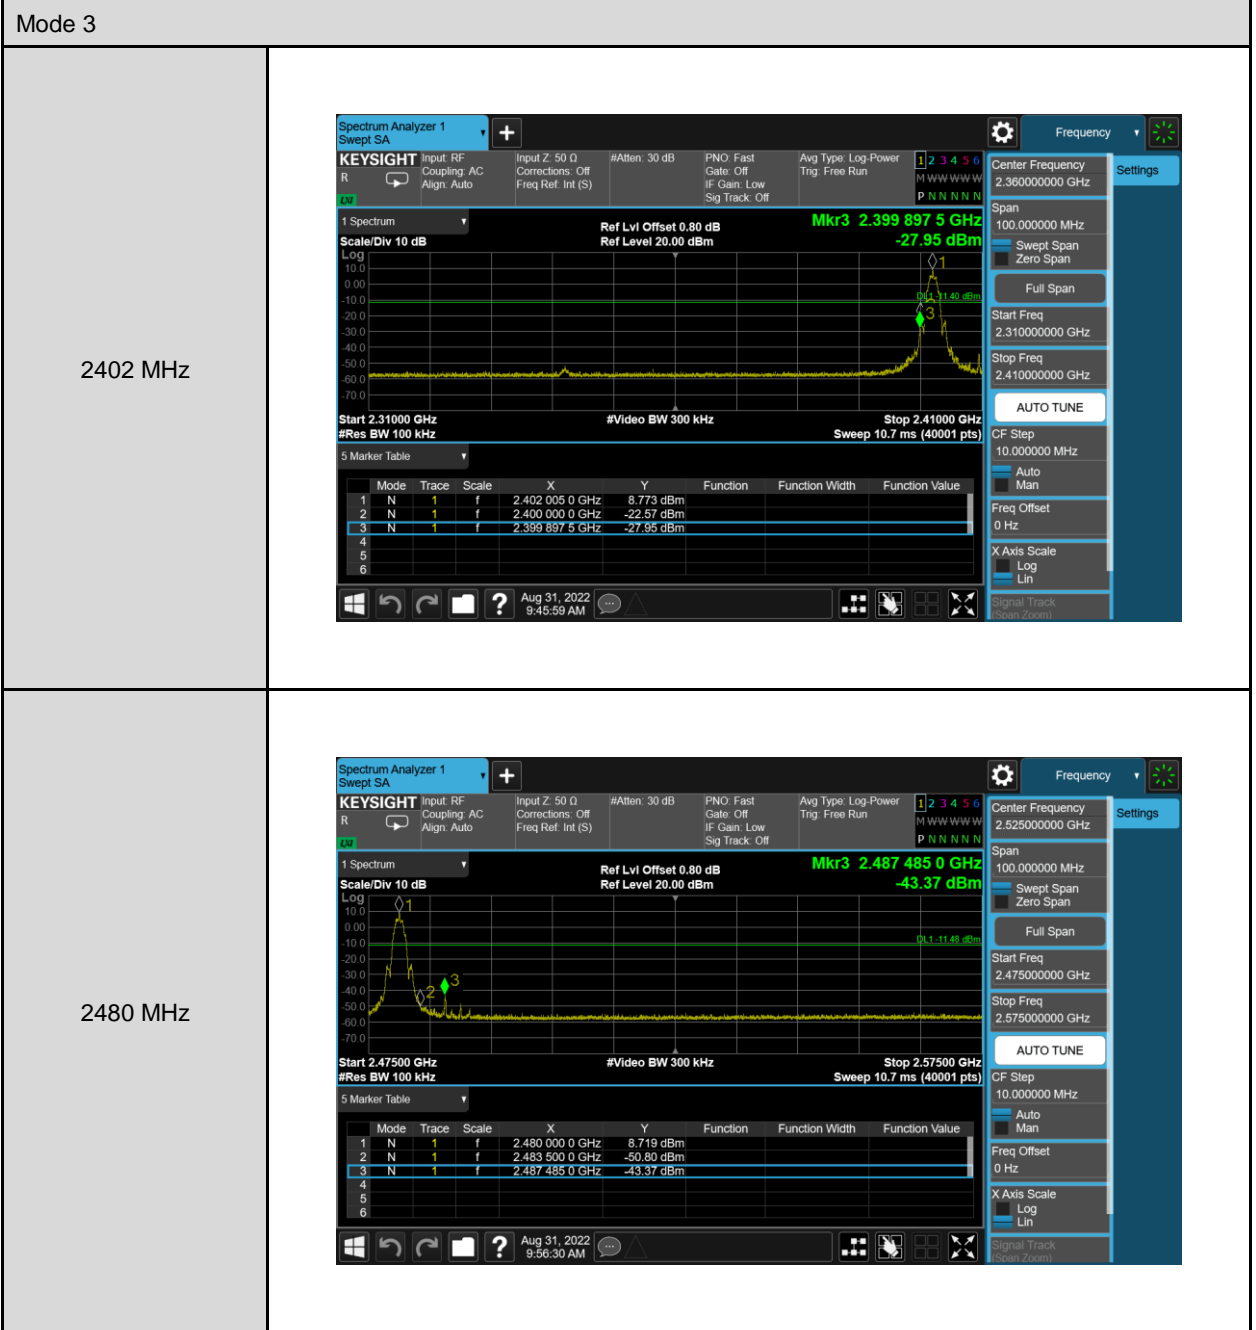

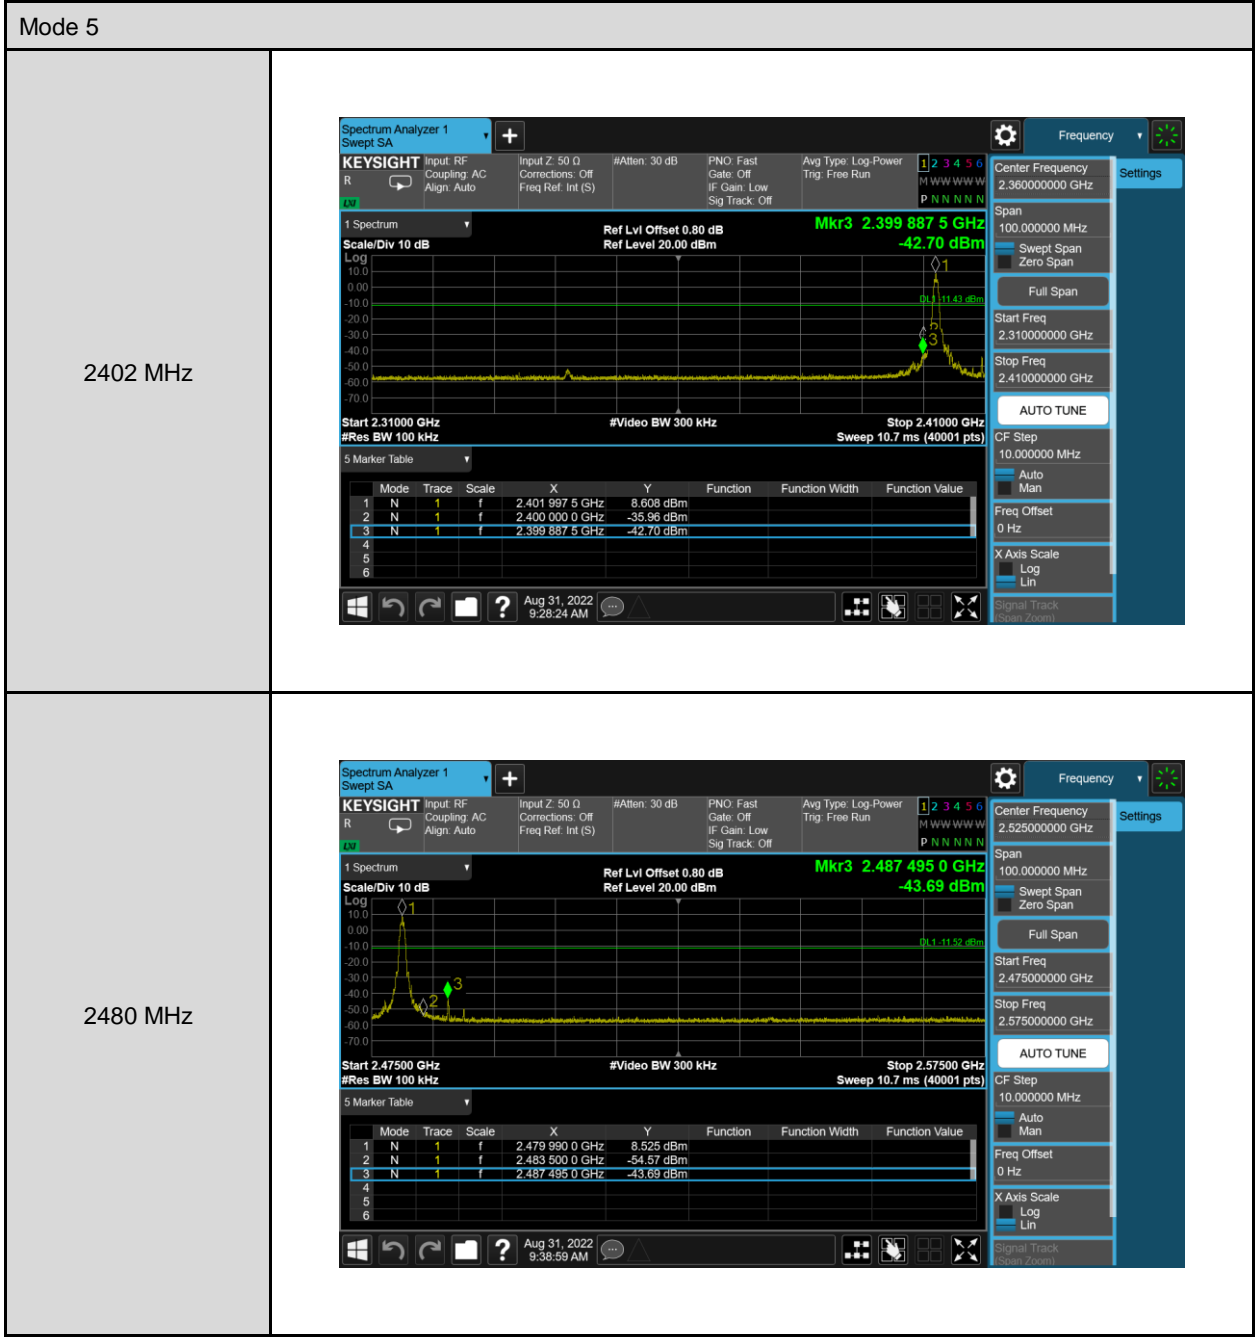




### 5.3. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

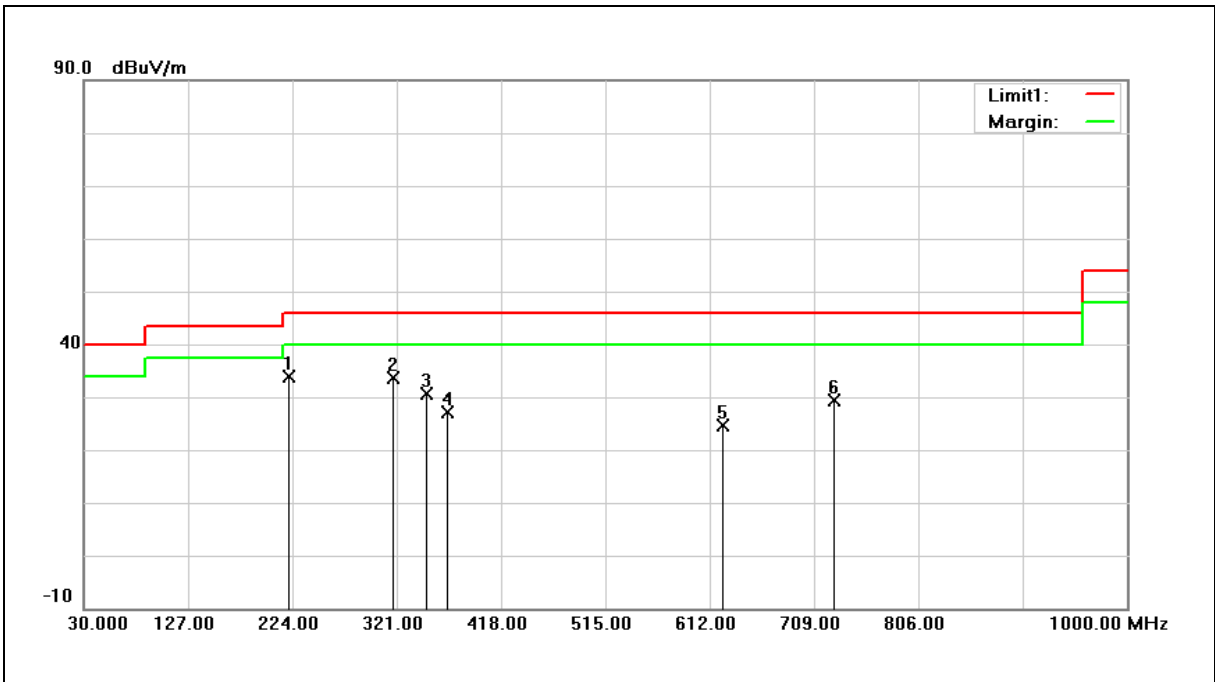


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	221.0900	47.00	-13.21	33.79	46.00	-12.21	QP
2	318.0900	42.84	-9.14	33.70	46.00	-12.30	QP
3	349.1300	39.09	-8.49	30.60	46.00	-15.40	QP
4	368.5300	34.86	-7.85	27.01	46.00	-18.99	QP
5	623.6400	26.51	-1.83	24.68	46.00	-21.32	QP
6	727.4300	29.54	-0.22	29.32	46.00	-16.68	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

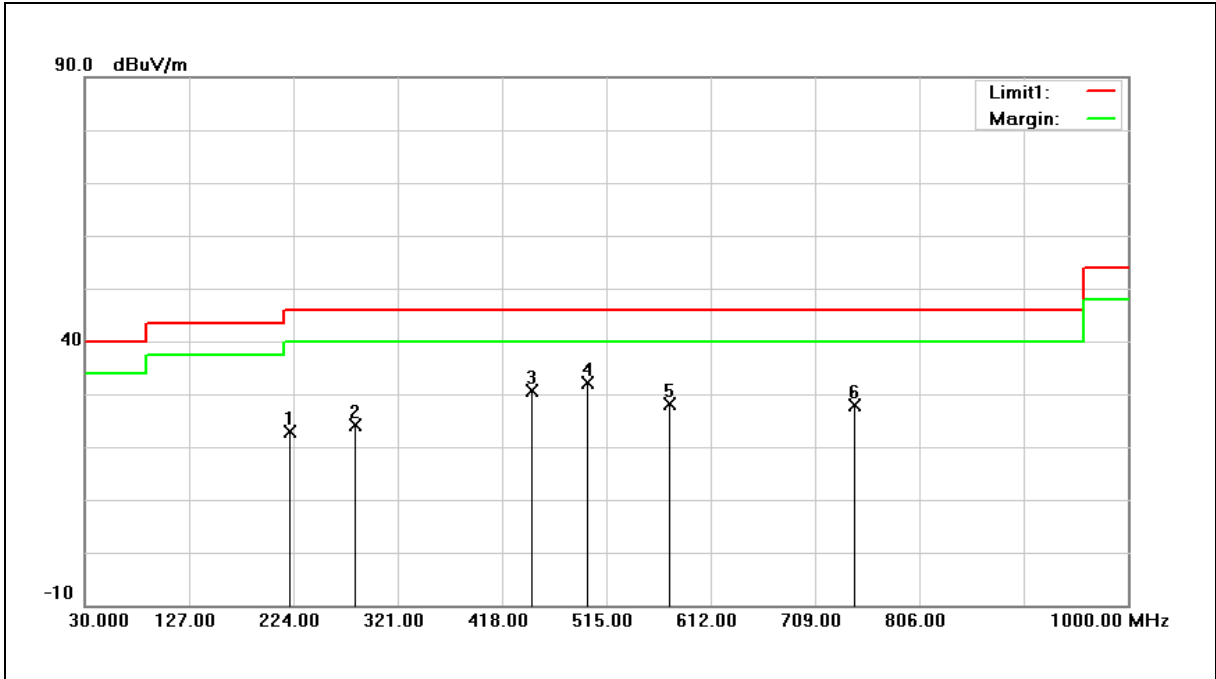

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	221.0900	36.09	-13.21	22.88	46.00	-23.12	QP
2	281.2300	34.10	-9.98	24.12	46.00	-21.88	QP
3	445.1600	36.09	-5.49	30.60	46.00	-15.40	QP
4	497.5400	36.58	-4.56	32.02	46.00	-13.98	QP
5	574.1700	31.02	-2.96	28.06	46.00	-17.94	QP
6	745.8600	27.55	0.25	27.80	46.00	-18.20	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

**Harmonic**

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

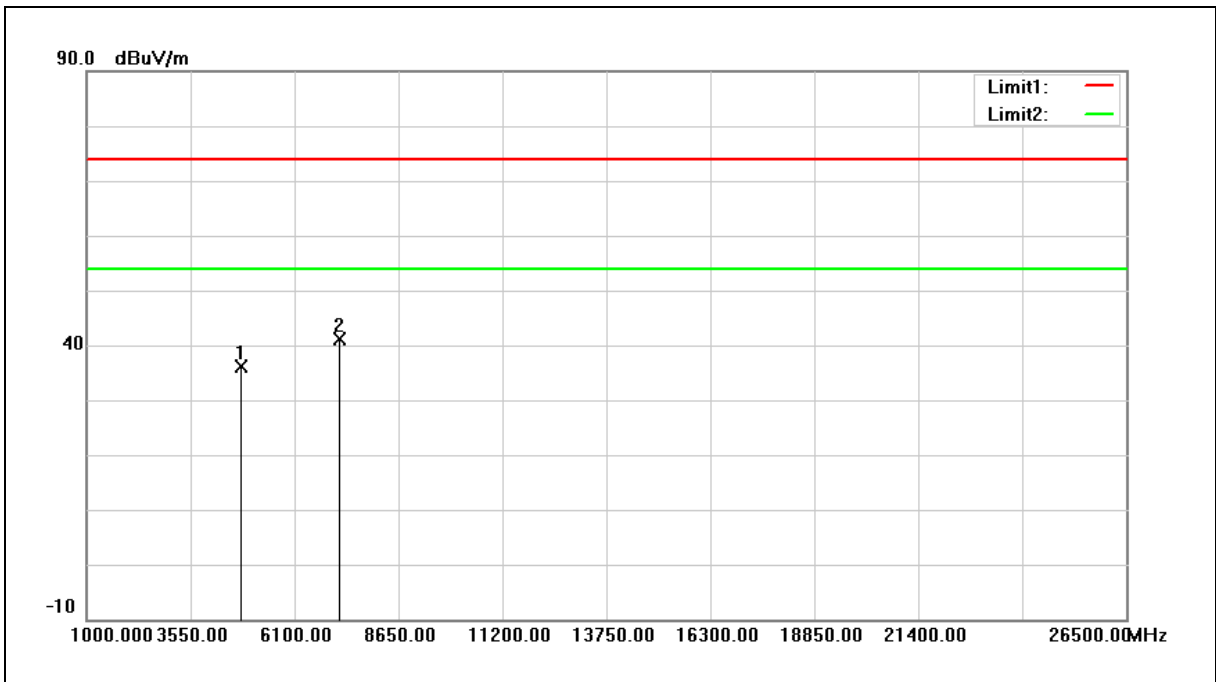


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	30.91	5.28	36.19	74.00	-37.81	peak
2	7206.000	28.48	12.56	41.04	74.00	-32.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

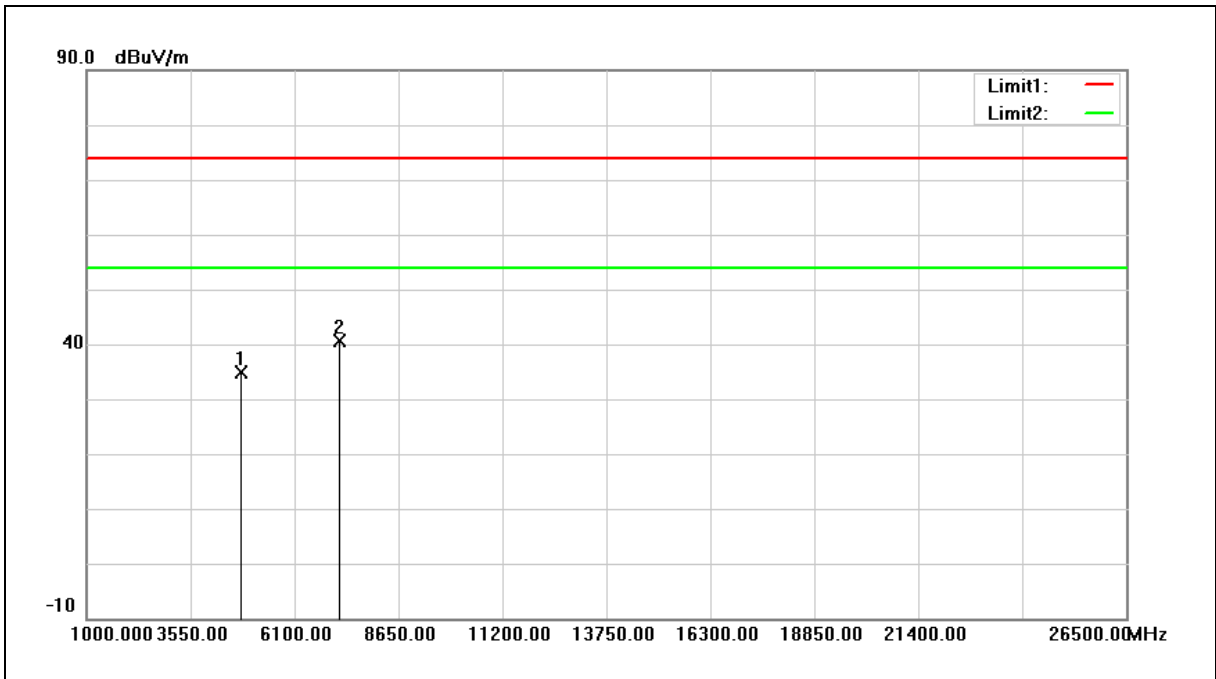


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	29.63	5.28	34.91	74.00	-39.09	peak
2	7206.000	27.99	12.56	40.55	74.00	-33.45	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

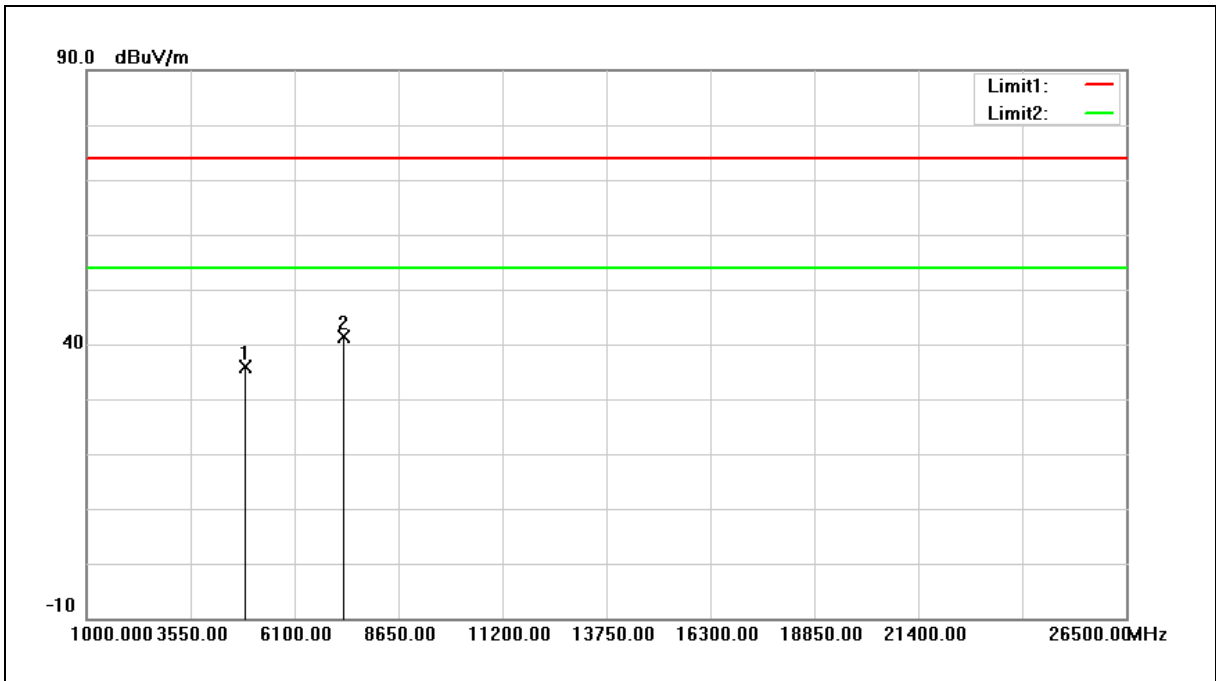


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	30.47	5.49	35.96	74.00	-38.04	peak
2	7320.000	28.64	12.82	41.46	74.00	-32.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

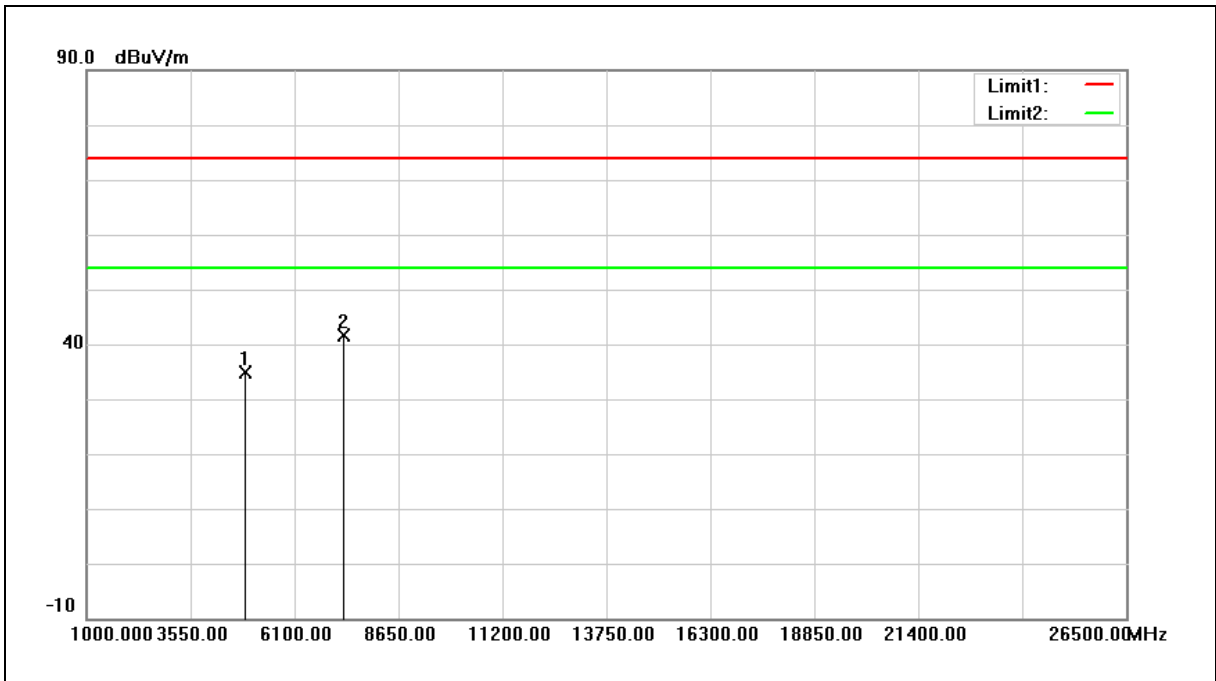


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	29.44	5.49	34.93	74.00	-39.07	peak
2	7320.000	28.90	12.82	41.72	74.00	-32.28	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

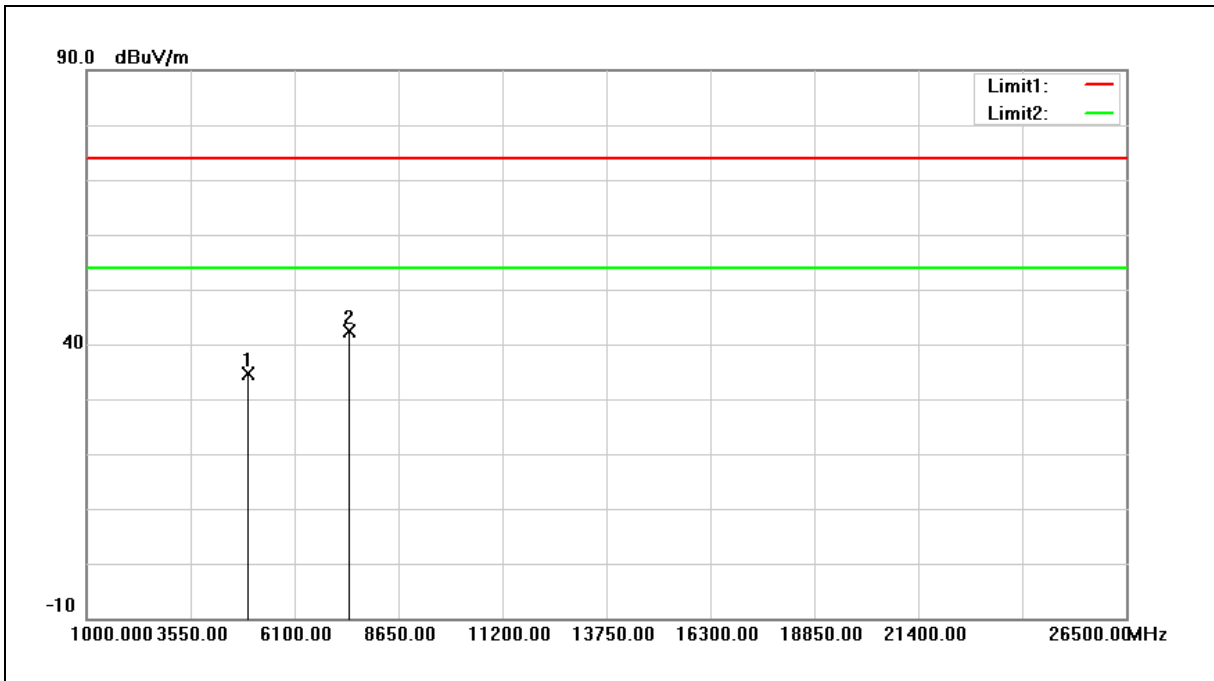


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	28.89	5.72	34.61	74.00	-39.39	peak
2	7440.000	29.36	13.10	42.46	74.00	-31.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

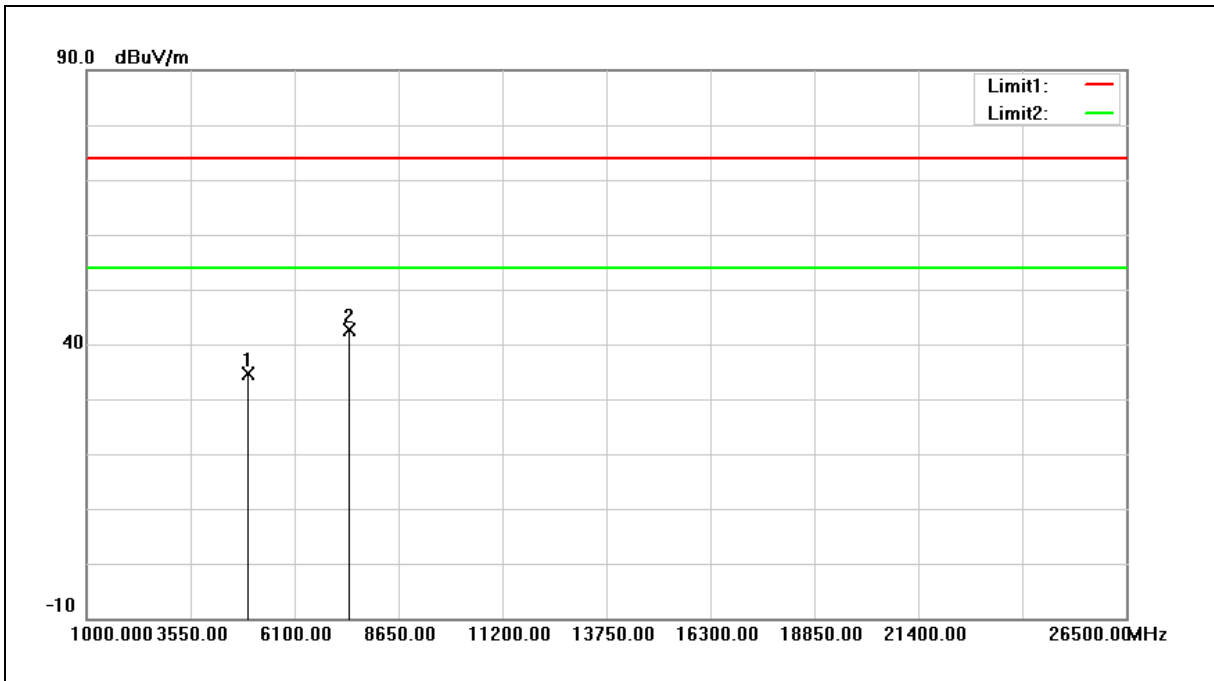

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	28.86	5.72	34.58	74.00	-39.42	peak
2	7440.000	29.51	13.10	42.61	74.00	-31.39	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

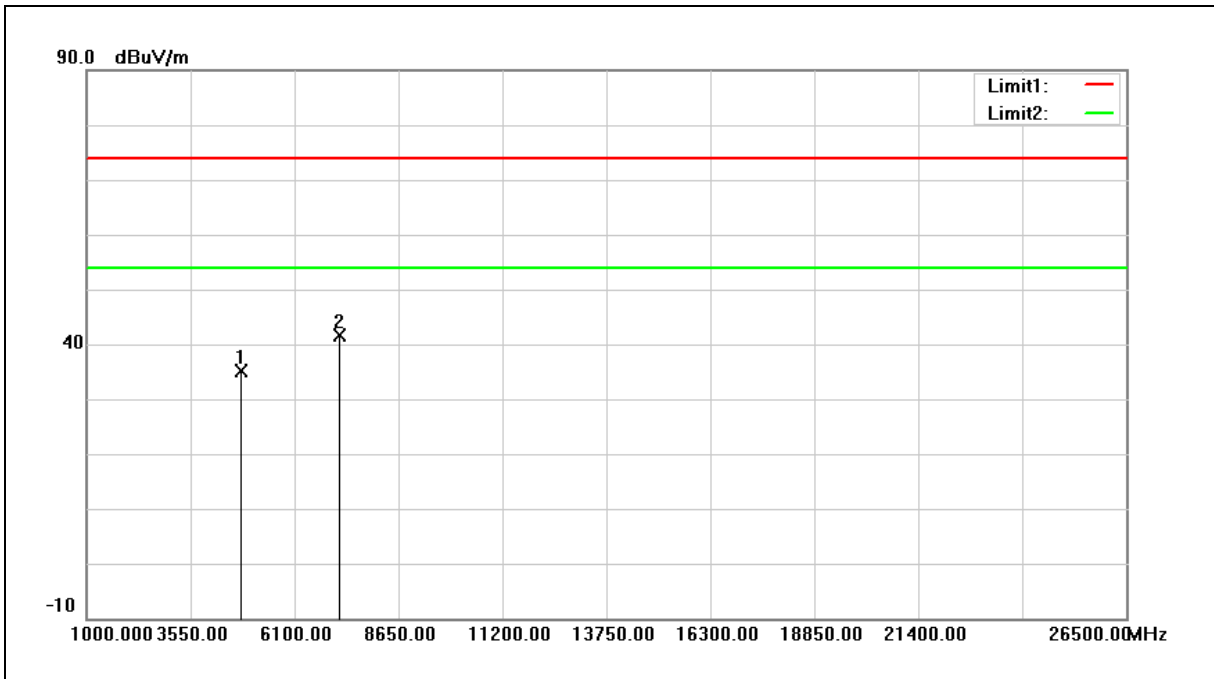


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	29.88	5.28	35.16	74.00	-38.84	peak
2	7206.000	28.99	12.56	41.55	74.00	-32.45	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

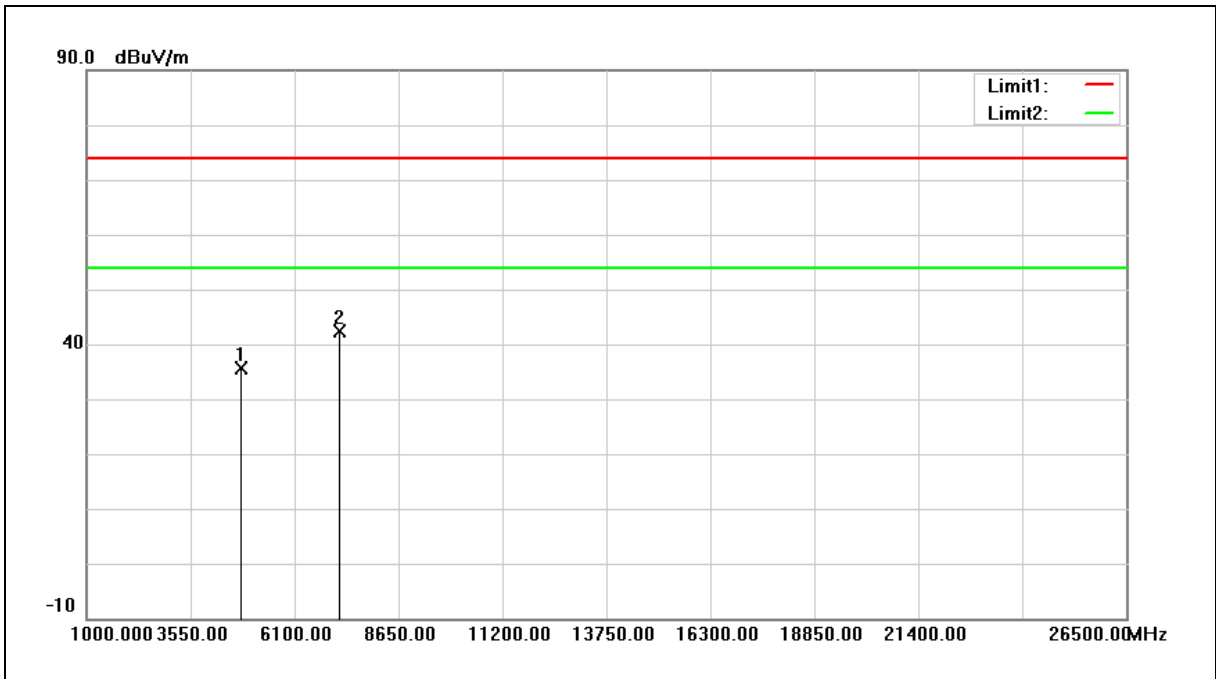


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	30.24	5.28	35.52	74.00	-38.48	peak
2	7206.000	29.90	12.56	42.46	74.00	-31.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

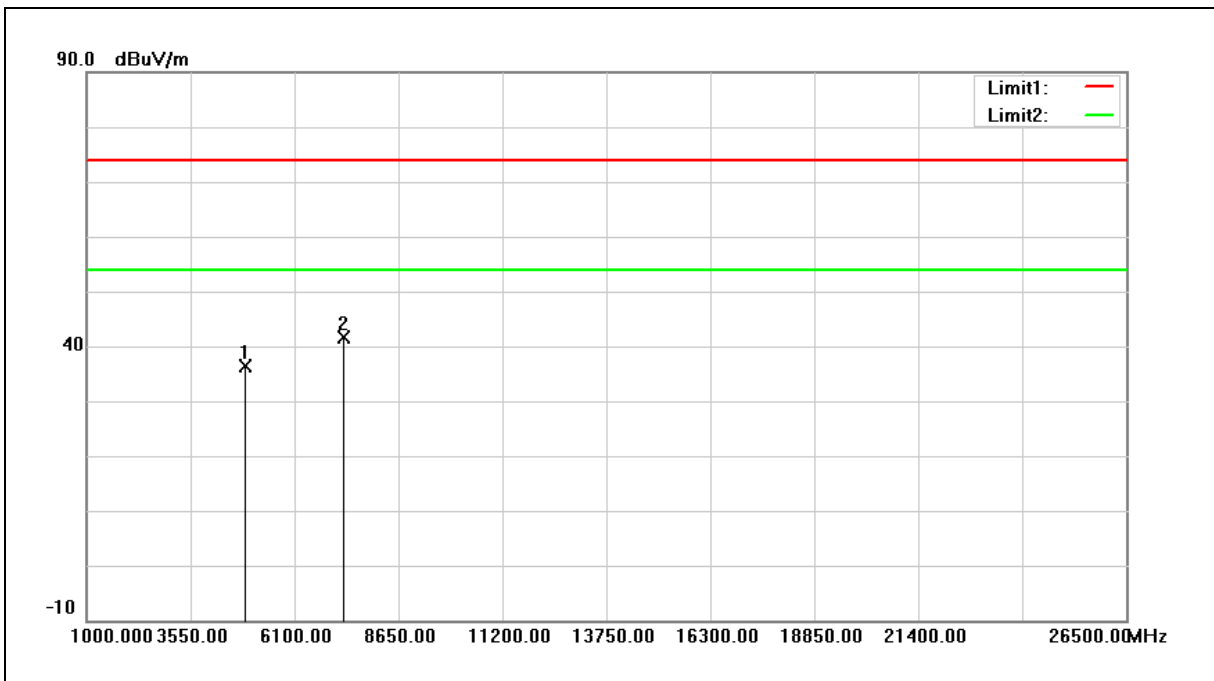


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	30.82	5.49	36.31	74.00	-37.69	peak
2	7320.000	28.84	12.82	41.66	74.00	-32.34	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

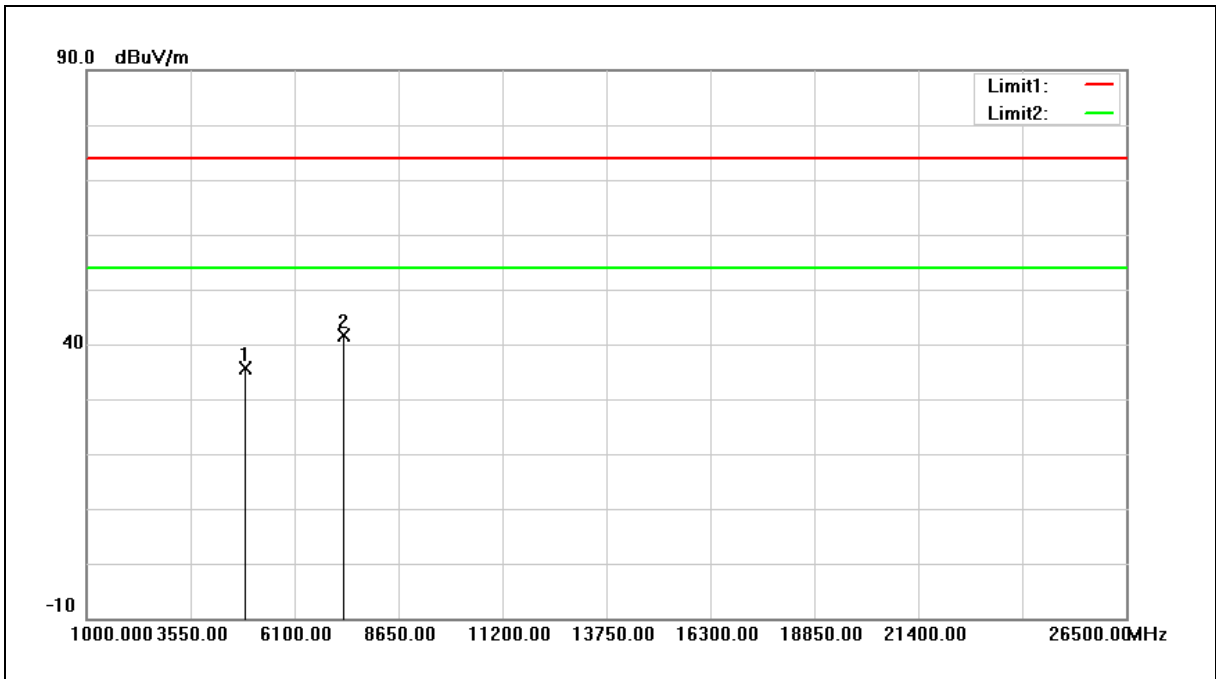


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	30.13	5.49	35.62	74.00	-38.38	peak
2	7320.000	28.92	12.82	41.74	74.00	-32.26	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

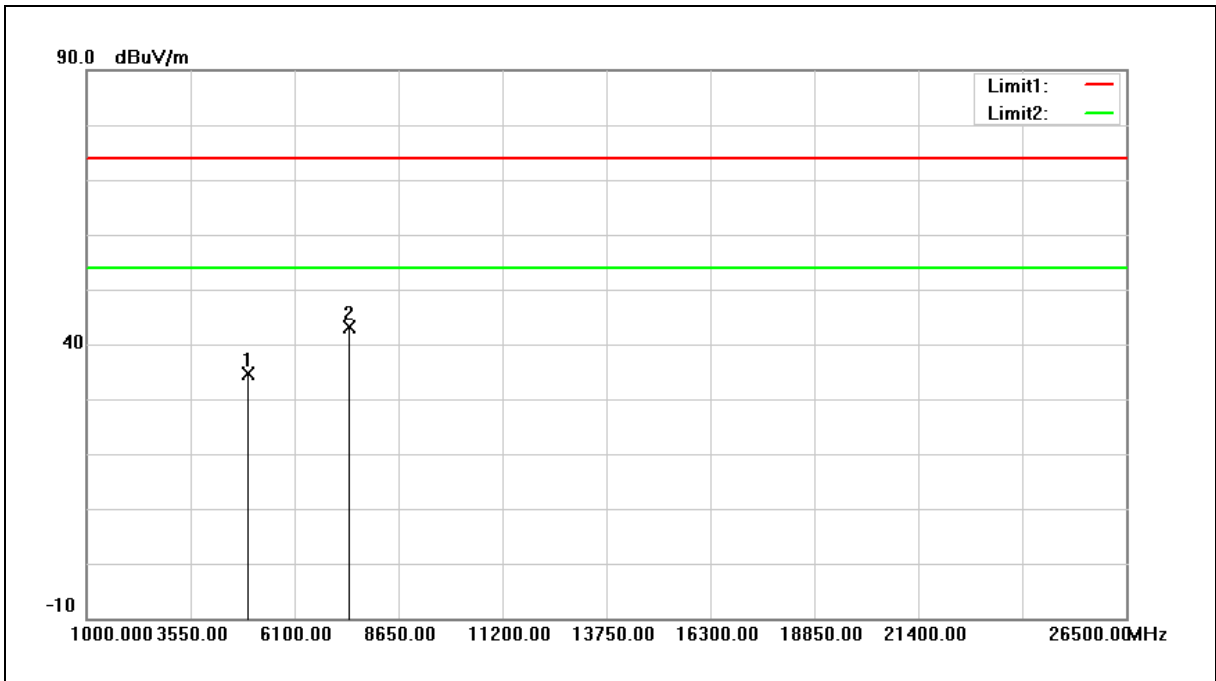

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	29.01	5.72	34.73	74.00	-39.27	peak
2	7440.000	30.10	13.10	43.20	74.00	-30.80	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

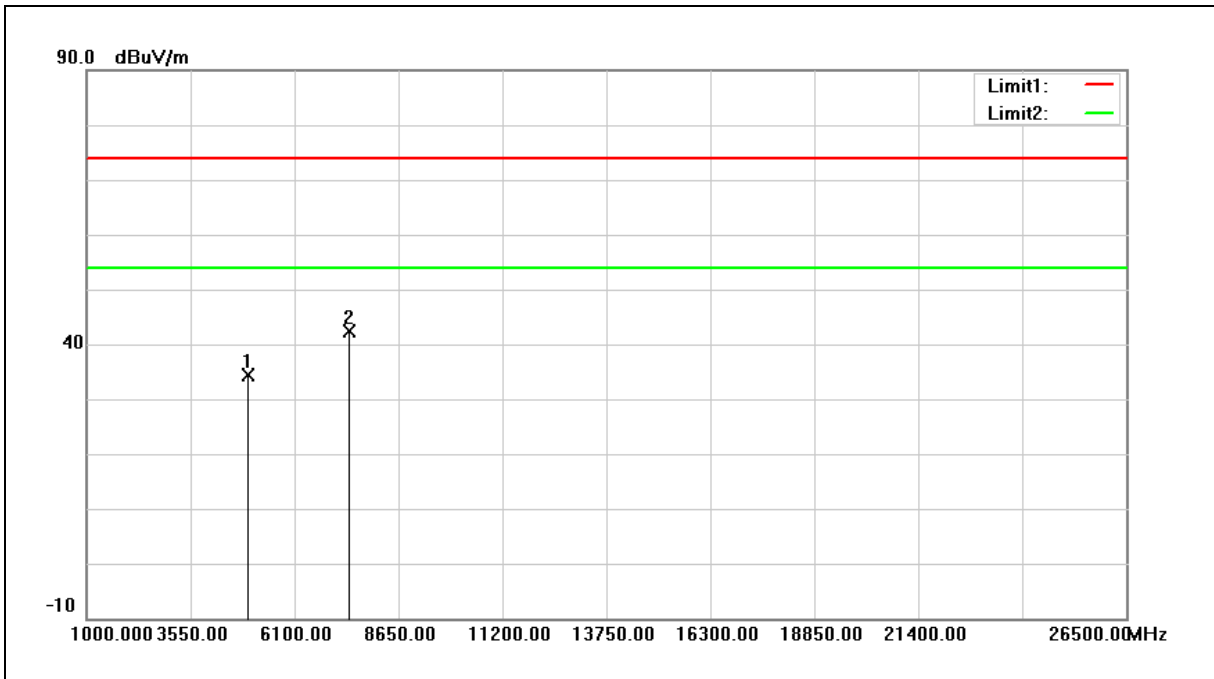

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	28.64	5.72	34.36	74.00	-39.64	peak
2	7440.000	29.39	13.10	42.49	74.00	-31.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

**Band Edge**

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

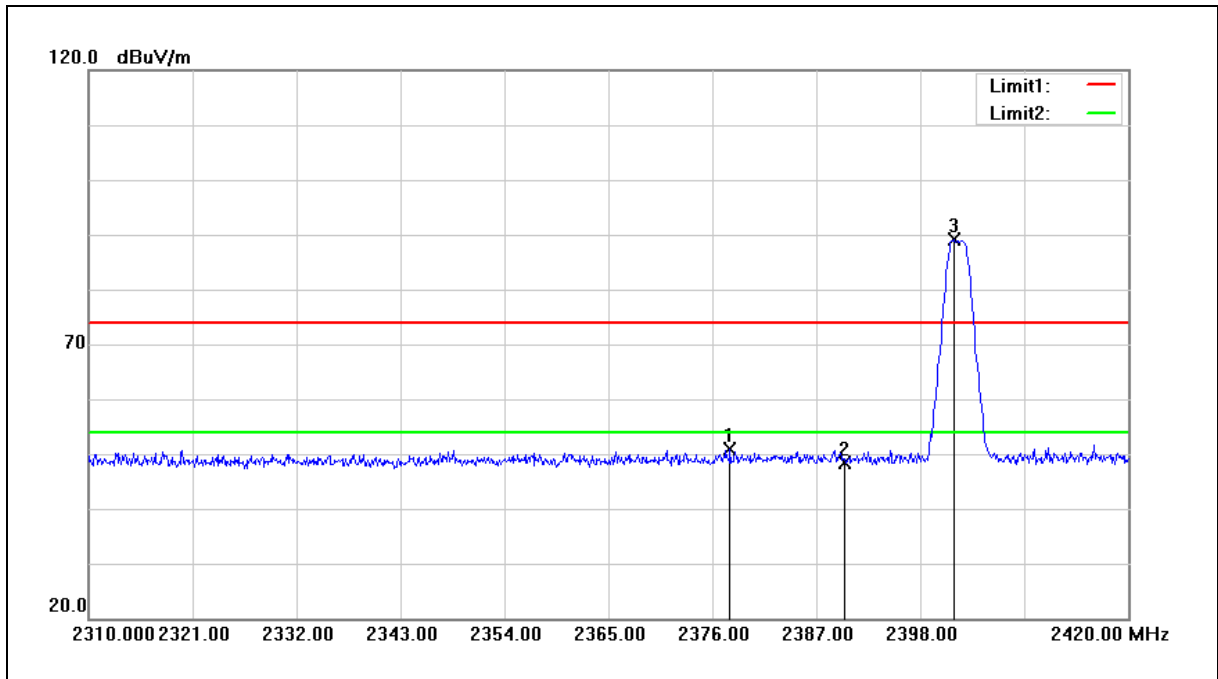


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.870	47.98	2.87	50.85	74.00	-23.15	peak
2	2390.000	45.39	2.91	48.30	74.00	-25.70	peak
3	2401.520	86.15	2.93	89.08	74.00	15.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

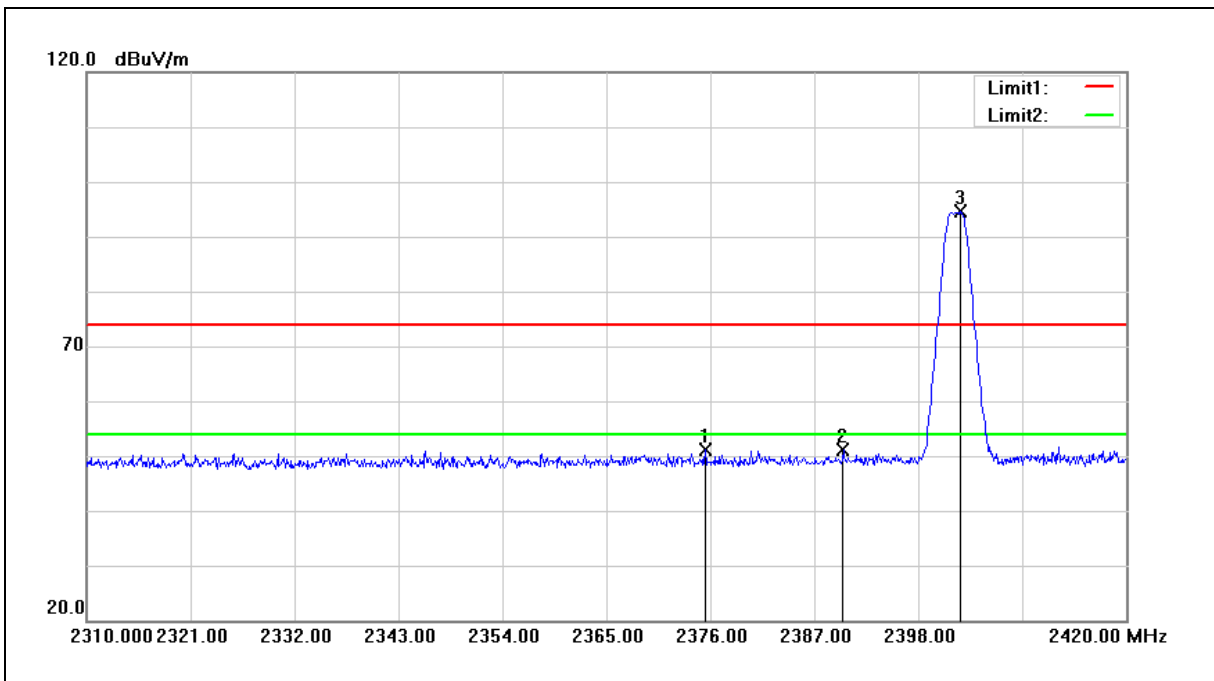

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.450	48.25	2.87	51.12	74.00	-22.88	peak
2	2390.000	48.17	2.91	51.08	74.00	-22.92	peak
3	2402.400	91.59	2.93	94.52	74.00	20.52	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

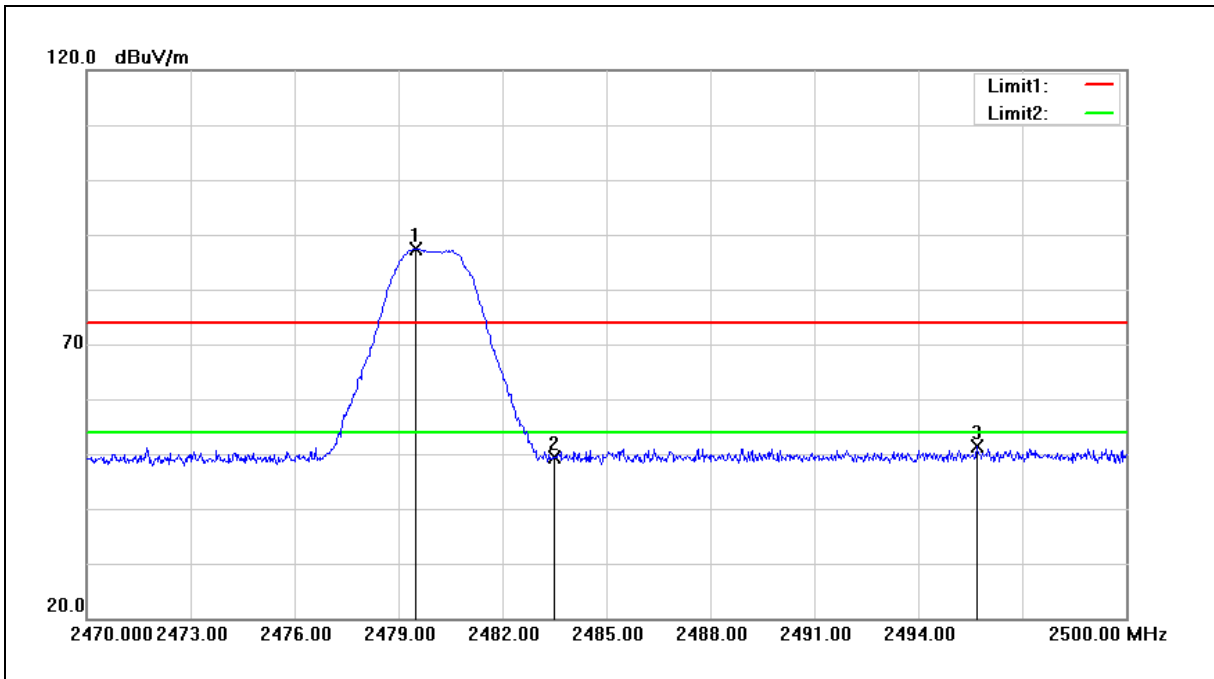


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.480	84.34	3.15	87.49	74.00	13.49	peak
2	2483.500	46.30	3.17	49.47	74.00	-24.53	peak
3	2495.680	48.21	3.19	51.40	74.00	-22.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

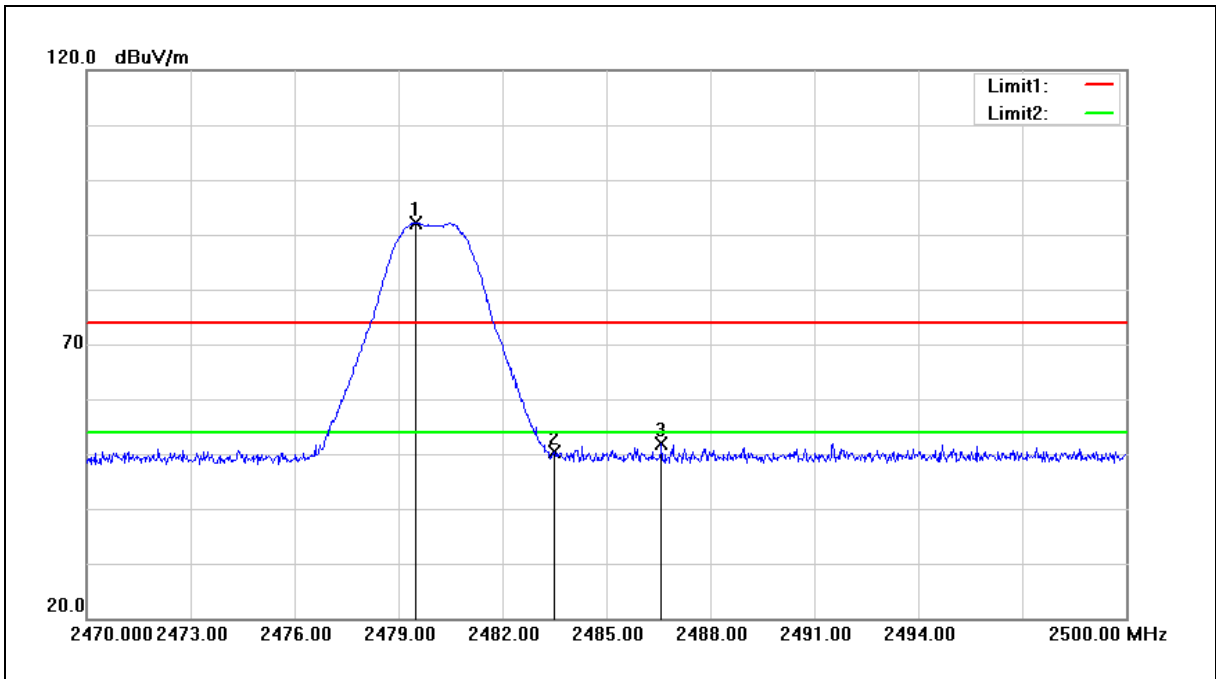


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.480	88.98	3.15	92.13	74.00	18.13	peak
2	2483.500	47.29	3.17	50.46	74.00	-23.54	peak
3	2486.590	48.65	3.17	51.82	74.00	-22.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

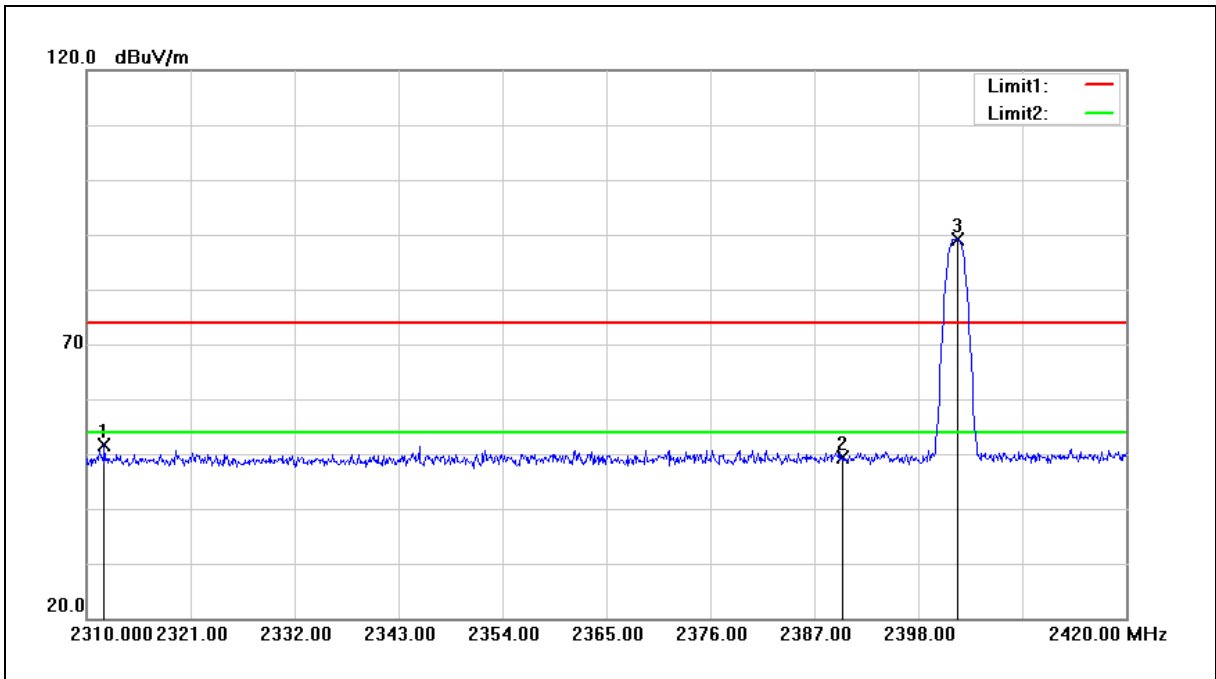


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2311.870	48.86	2.69	51.55	74.00	-22.45	peak
2	2390.000	46.44	2.91	49.35	74.00	-24.65	peak
3	2402.180	86.22	2.93	89.15	74.00	15.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

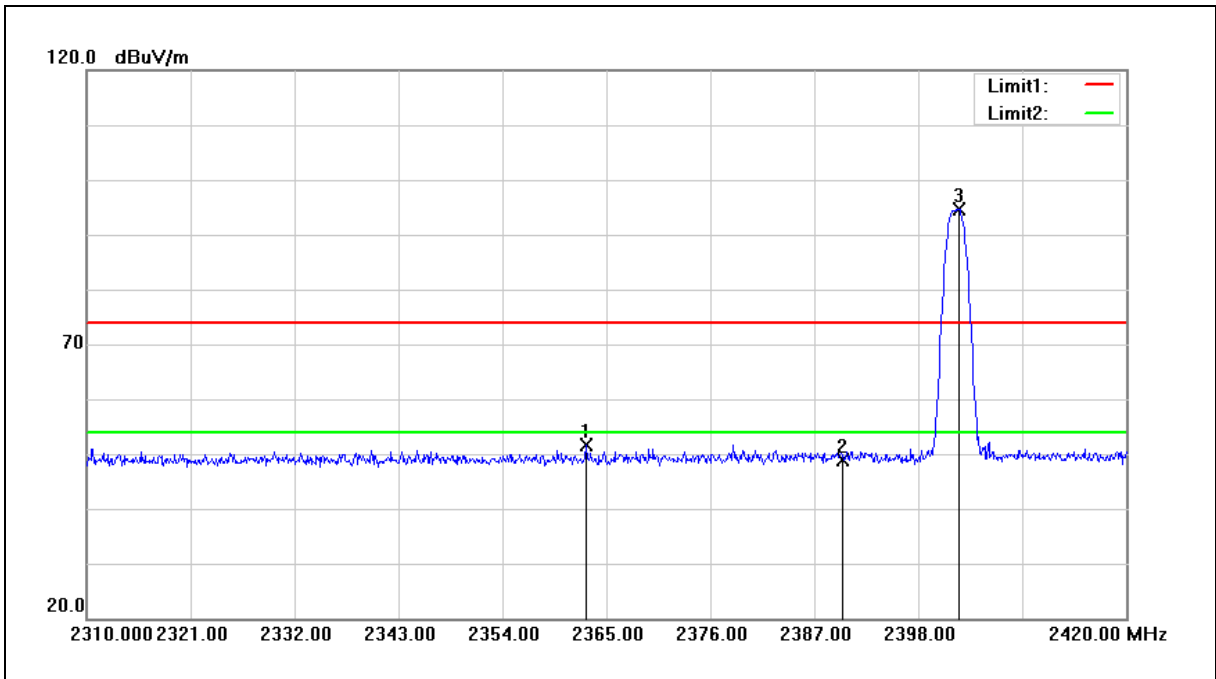


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.800	48.79	2.83	51.62	74.00	-22.38	peak
2	2390.000	45.85	2.91	48.76	74.00	-25.24	peak
3	2402.290	91.76	2.93	94.69	74.00	20.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

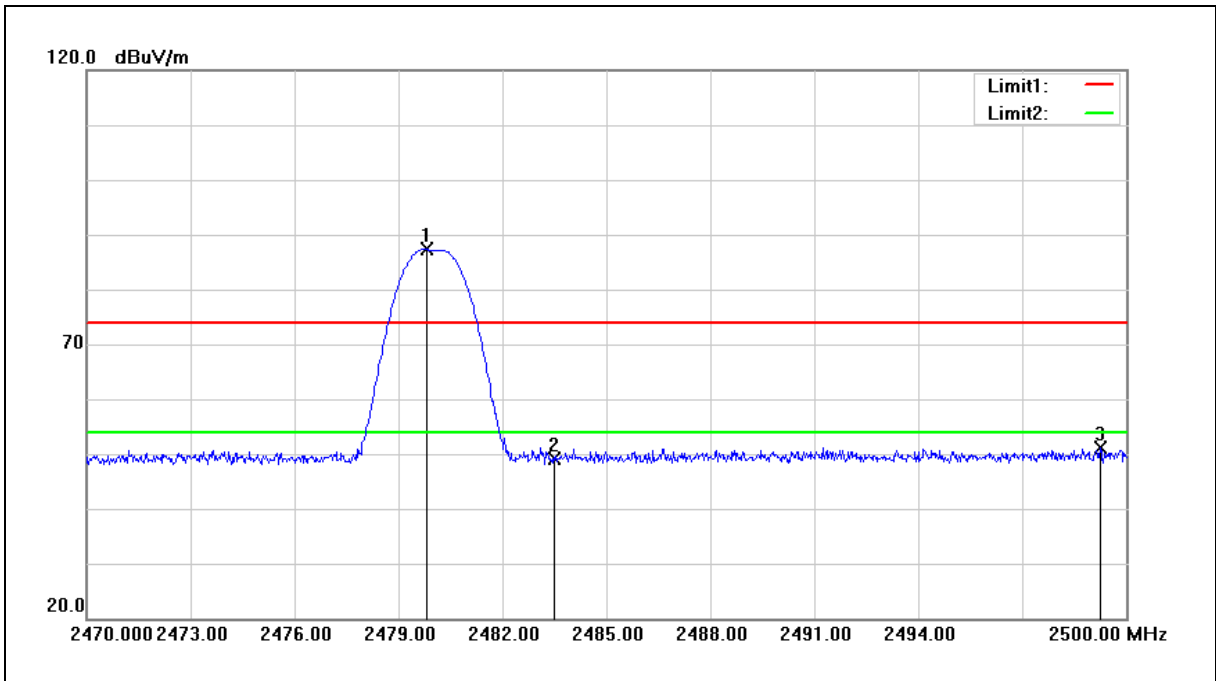


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.810	84.21	3.15	87.36	74.00	13.36	peak
2	2483.500	46.01	3.17	49.18	74.00	-24.82	peak
3	2499.250	47.87	3.21	51.08	74.00	-22.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

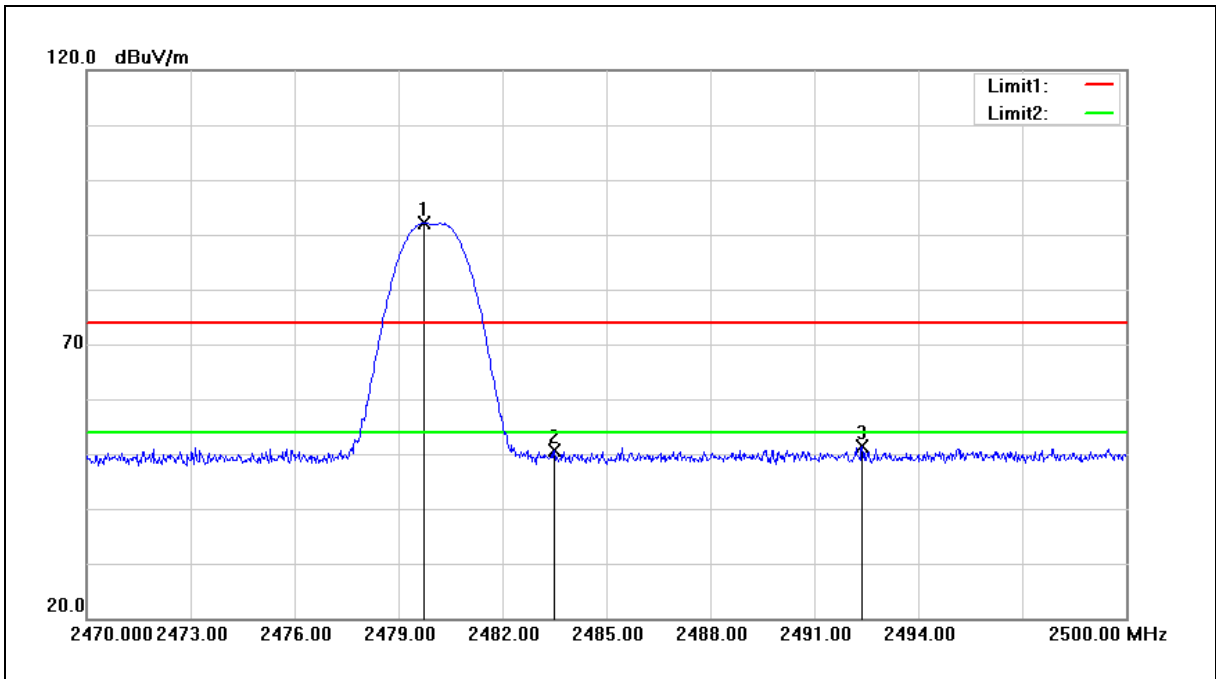

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	88.96	3.15	92.11	74.00	18.11	peak
2	2483.500	47.56	3.17	50.73	74.00	-23.27	peak
3	2492.380	48.13	3.19	51.32	74.00	-22.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

---END---