



FCC RF Test Report

APPLICANT : MobileHelp
EQUIPMENT : Mobile Device Gen3.0
BRAND NAME : MobileHelp
MODEL NAME : MD3-01
MARKETING NAME : MD3-01
FCC ID : PXTMD3-01
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on May 05, 2015 and testing was completed on Jun. 22, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification subjective to this standard 6

 1.5 Modification of EUT 6

 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 7

 1.7 Testing Location 7

 1.8 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Test Mode..... 9

 2.2 Connection Diagram of Test System 11

 2.3 Support Unit used in test configuration 12

 2.4 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 Conducted Output Power Measurement 13

 3.2 Peak-to-Average Ratio 15

 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 25

 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 29

 3.5 Band Edge Measurement..... 43

 3.6 Conducted Spurious Emission Measurement 48

 3.7 Field Strength of Spurious Radiation Measurement 61

 3.8 Frequency Stability Measurement..... 75

4 LIST OF MEASURING EQUIPMENT 79

5 UNCERTAINTY OF EVALUATION 80

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG550502	Rev. 01	Initial issue of report	Sep. 15, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133(6.4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049	RSS-GEN(6.6) RSS-133(2.3)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 19.03 dB at 5768.000 MHz
3.8	§2.1055 §22.355	RSS-GEN(6.11) RSS-132 (5.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	-
	§2.1055 §24.235	RSS-GEN(6.11) RSS-133 (6.3)				



1 General Description

1.1 Applicant

MobileHelp

3701 FAU Blvd., Suite 300. Boca Raton FL, 33431

1.2 Manufacturer

Daviscomms (Malaysia) Sdn Bhd

Plot 18, Lorong Perusahaan Maju 1. Kawasan Perusahaan Perai 4, 13600 Perai, Malaysia

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Device Gen3.0
Brand Name	MobileHelp
Model Name	MD3-01
Marketing Name	MD3-01
FCC ID	PXTMD3-01
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 31.59 dBm GSM1900 : 29.00 dBm WCDMA Band V : 22.45 dBm WCDMA Band II : 22.12 dBm
99% Occupied Bandwidth	GSM850: 0.24MHz GSM1900: 0.25MHz WCDMA Band V: 4.09MHz WCDMA Band II: 4.07MHz
Antenna Type	PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: 16QAM (Downlink) HSUPA: QPSK (Uplink)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.7638	0.0048 ppm	245KGXW
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0931	0.0072 ppm	4M09F9W
Part 24	GSM1900 GPRS class 8	GMSK	1.1967	0.0032 ppm	245KGXW
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2460	0.0027 ppm	4M07F9W

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link
GSM 1900	■ GPRS class 8 Link	■ GPRS class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	31.52	31.40	31.59	29.00	28.79	28.73
GPRS class 10	31.47	31.32	31.50	28.97	28.77	28.70
GPRS class 11	31.09	30.90	31.10	28.20	28.03	28.00
GPRS class 12	30.31	30.16	30.36	27.03	26.91	26.89

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	22.02	22.45	22.17	21.94	22.12	22.06
HSDPA Subtest-1	22.00	22.43	22.15	21.91	22.11	22.04
HSDPA Subtest-2	21.99	22.40	22.12	21.88	22.09	22.03
HSDPA Subtest-3	21.57	21.98	21.66	21.49	21.59	21.55
HSDPA Subtest-4	21.54	21.95	21.64	21.38	21.57	21.52
HSUPA Subtest-1	21.00	21.57	21.16	21.01	21.17	21.11
HSUPA Subtest-2	19.56	20.08	19.74	19.41	19.63	19.67
HSUPA Subtest-3	20.54	21.10	20.75	20.47	20.74	20.69
HSUPA Subtest-4	19.84	20.31	20.01	19.65	19.89	19.95
HSUPA Subtest-5	21.53	22.11	21.76	21.55	21.73	21.74

2.2 Connection Diagram of Test System

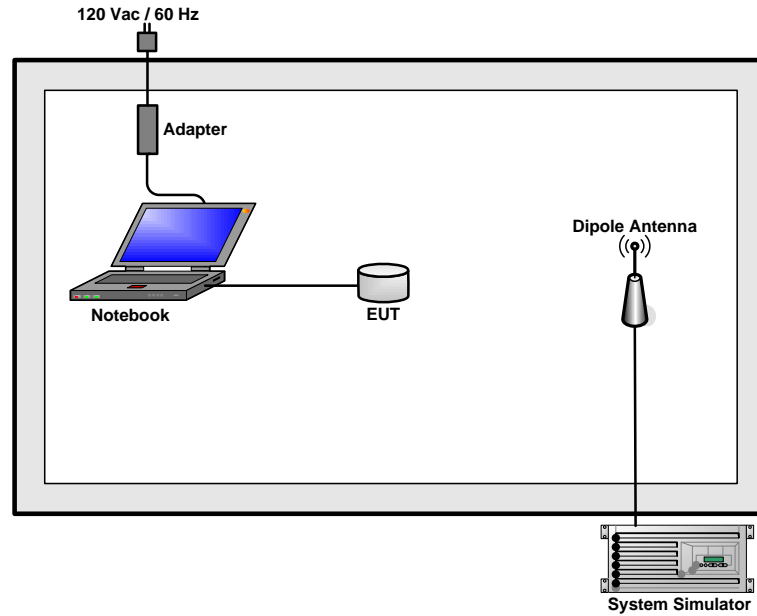



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	notebook-41	PPD-AR5B95	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

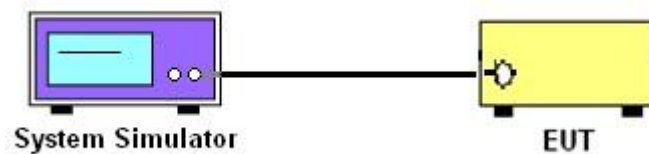



3.1.5 Test Result of Conducted Output Power

Cellular Band						
Modes	GSM850 (GPRS class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	31.52	31.40	31.59	22.02	22.45	22.17

PCS Band						
Modes	GSM1900 (GPRS class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.00	28.79	28.73	21.94	22.12	22.06

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.

3.2.4 Test Setup

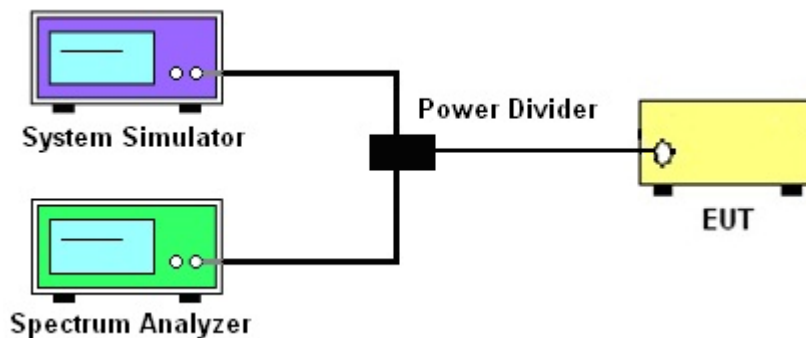



3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band						
Modes	GSM850 (GPRS class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.28	0.28	0.24	3.12	3.12	3.36


PCS Band						
Modes	GSM1900 (GPRS class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.28	0.28	0.24	3.16	3.28	3.20



3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

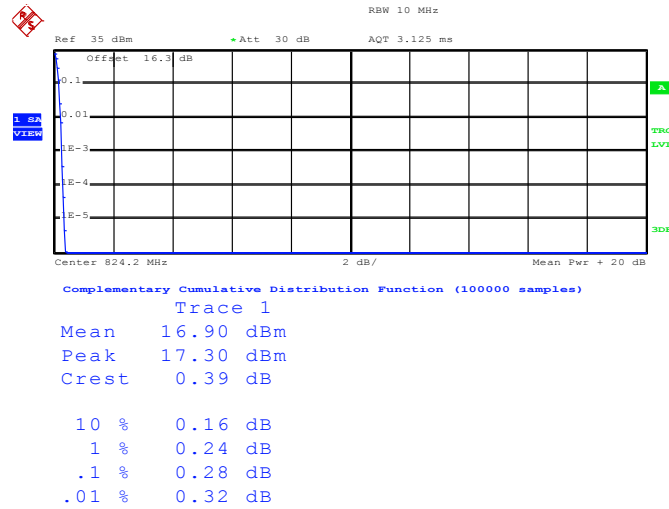

Date: 20.JUN.2015 09:39:38


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

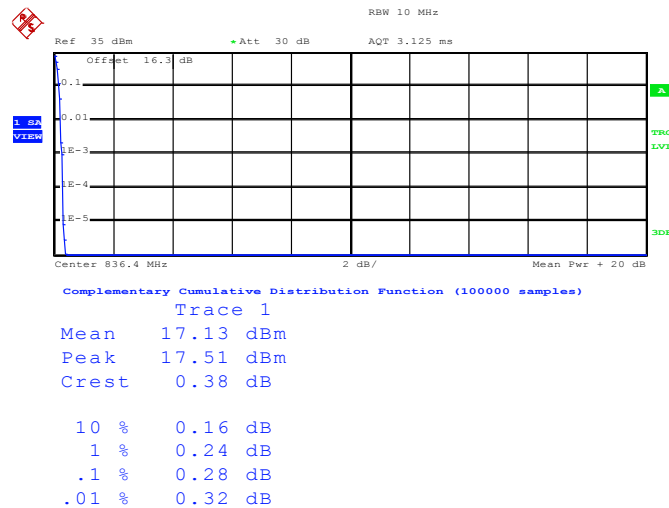

Date: 20.JUN.2015 09:39:58



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

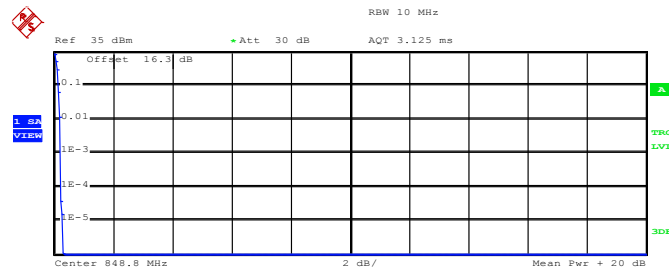

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	19.74 dBm
Peak	20.05 dBm
Crest	0.31 dB
10 %	0.16 dB
1 %	0.20 dB
.1 %	0.24 dB
.01 %	0.24 dB

Date: 20.JUN.2015 09:40:16




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

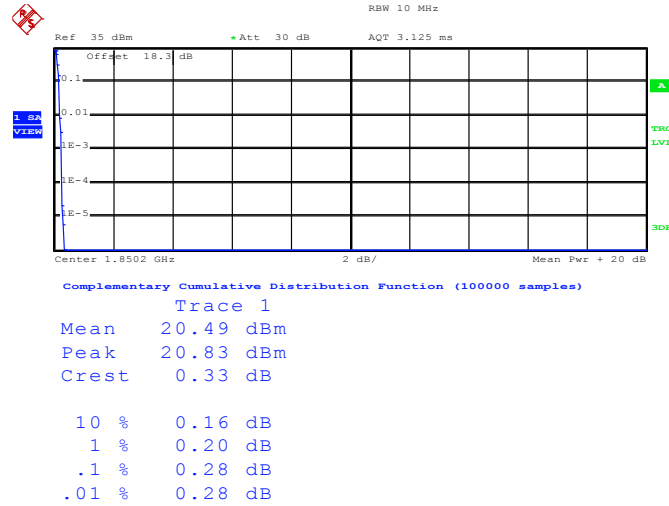

Date: 20.JUN.2015 10:17:41


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

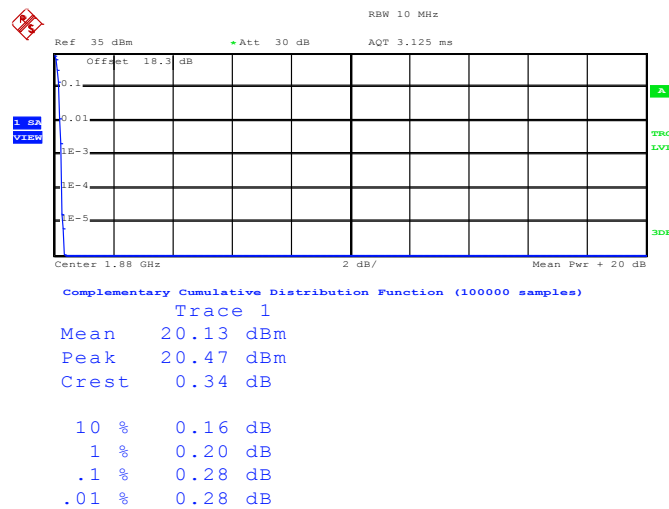

Date: 20.JUN.2015 10:18:04



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

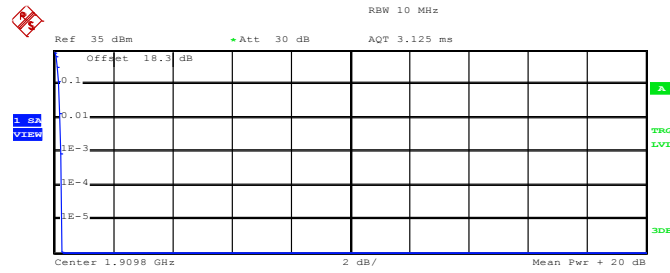

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	20.55 dBm
Peak	20.83 dBm
Crest	0.27 dB
10 %	0.16 dB
1 %	0.20 dB
.1 %	0.24 dB
.01 %	0.28 dB

Date: 20.JUN.2015 10:18:20




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

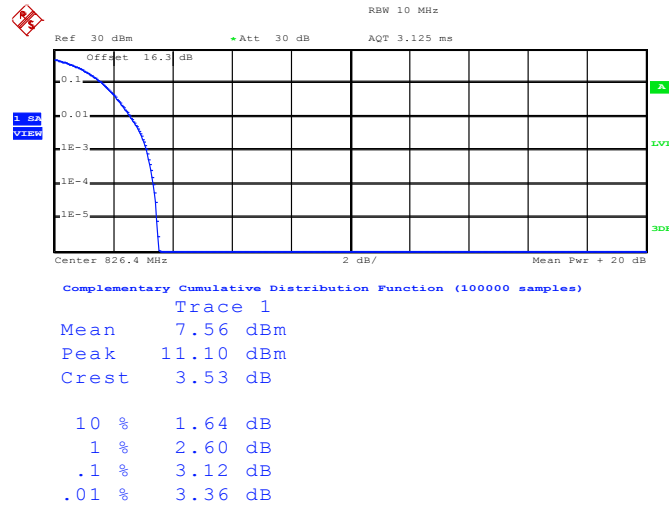

Date: 20.JUN.2015 11:25:54


Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

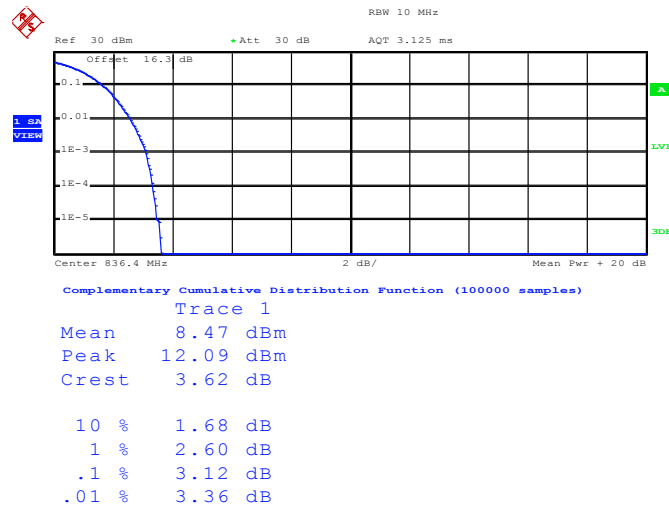

Date: 20.JUN.2015 11:26:09



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

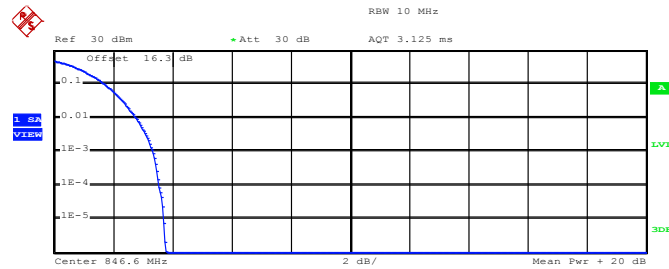

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	10.08 dBm
Peak	13.85 dBm
Crest	3.77 dB
10 %	1.72 dB
1 %	2.76 dB
.1 %	3.36 dB
.01 %	3.56 dB

Date: 20.JUN.2015 11:26:24




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

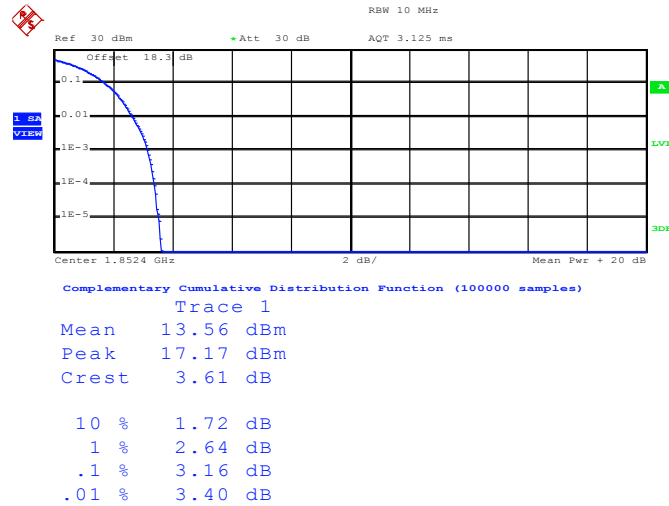

Date: 20.JUN.2015 10:53:03


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

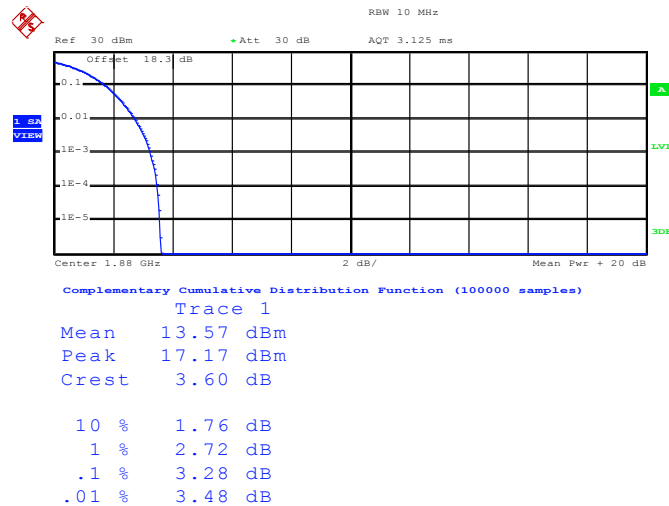

Date: 20.JUN.2015 11:02:04



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

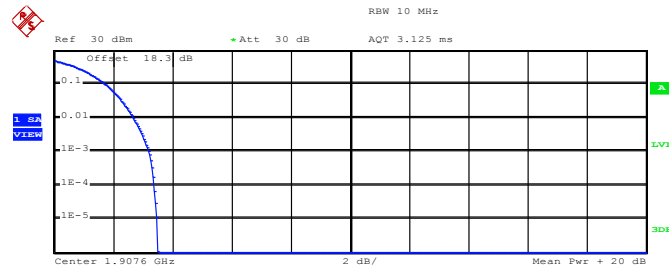

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
 Mean 14.14 dBm
 Peak 17.66 dBm
 Crest 3.52 dB

10 % 1.76 dB
 1 % 2.68 dB
 .1 % 3.20 dB
 .01 % 3.40 dB

Date: 20.JUN.2015 11:02:38



3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.

	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

3.3.4 Test Setup

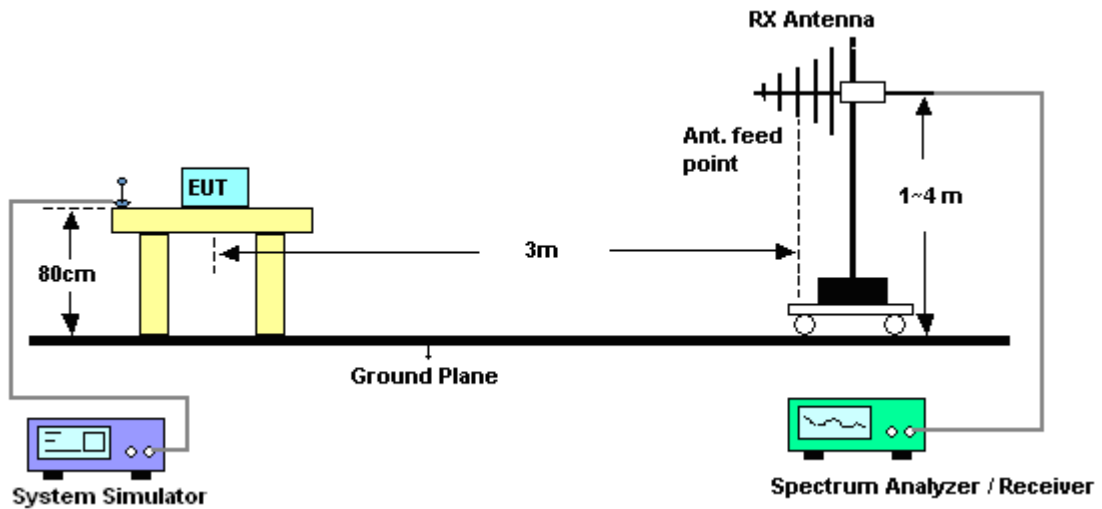



3.3.5 Test Result of ERP

GSM850 (GPRS class 8) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.20	27.22	0.5272	14.51	0.0282
Middle	836.40	28.05	0.6383	15.48	0.0353
Highest	848.80	28.83	0.7638	16.33	0.0430
Limit	ERP < 7W	Result		PASS	

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	826.40	17.58	0.0573	5.13	0.0033
Middle	836.40	19.69	0.0931	7.15	0.0052
Highest	846.60	18.87	0.0771	6.50	0.0045
Limit	ERP < 7W	Result		PASS	



3.3.6 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	1850.20	29.93	0.9840	28.32	0.6792
Middle	1880.00	30.69	1.1722	28.02	0.6339
Highest	1909.80	30.78	1.1967	27.70	0.5888
Limit	EIRP < 2W	Result		PASS	

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	1852.40	23.84	0.2421	22.34	0.1714
Middle	1880.00	23.91	0.2460	21.41	0.1384
Highest	1907.60	22.41	0.1742	19.98	0.0995
Limit	EIRP < 2W	Result		PASS	

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

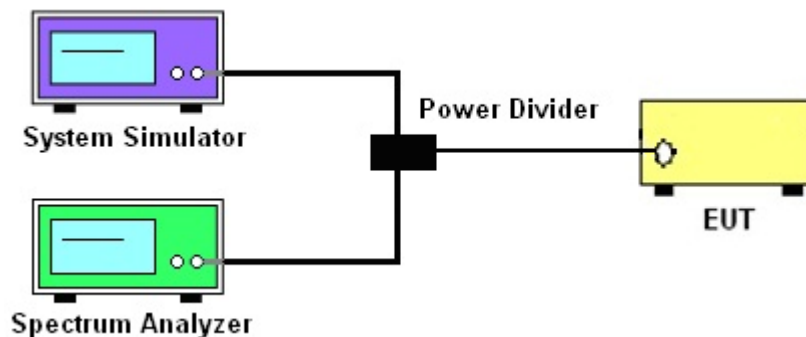



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band			
Modes	GSM850 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8
99% OBW (kHz)	245.00	243.00	243.00
26dB BW (kHz)	302.00	314.00	305.00

PCS Band			
Modes	GSM1900 (GPRS class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8
99% OBW (kHz)	245.00	245.00	240.00
26dB BW (kHz)	309.00	313.00	317.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.09	4.09	4.06
26dB BW (MHz)	4.64	4.66	4.63


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.07	4.07	4.07
26dB BW (MHz)	4.63	4.64	4.62



3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

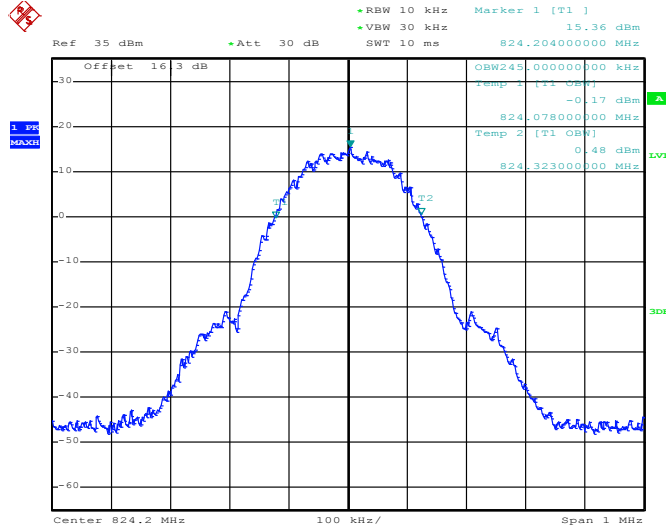

Date: 20.JUN.2015 09:28:22


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

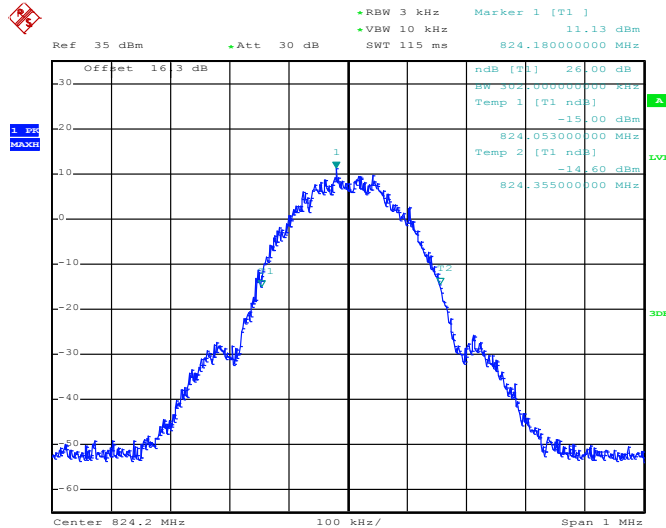

Date: 20.JUN.2015 09:30:17




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

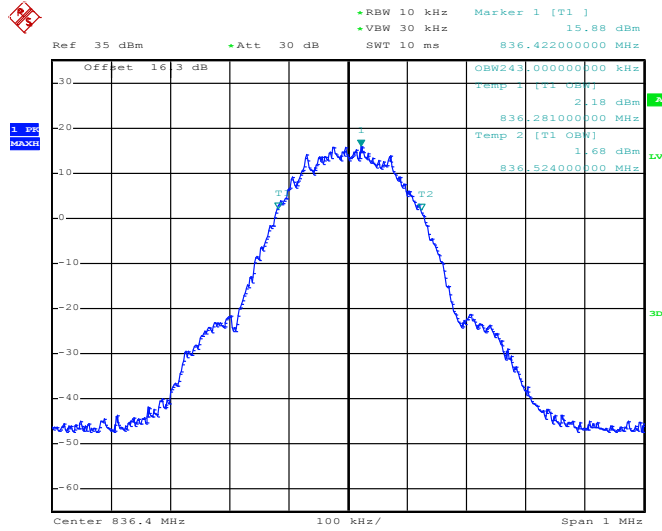

Date: 20.JUN.2015 09:28:56


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

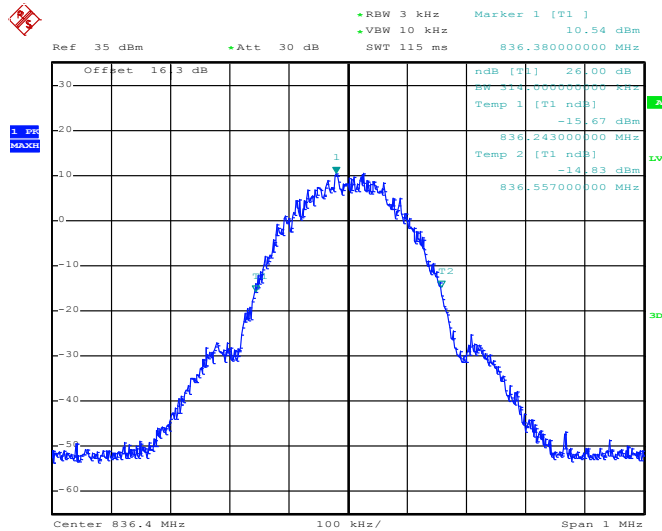

Date: 20.JUN.2015 09:30:50




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

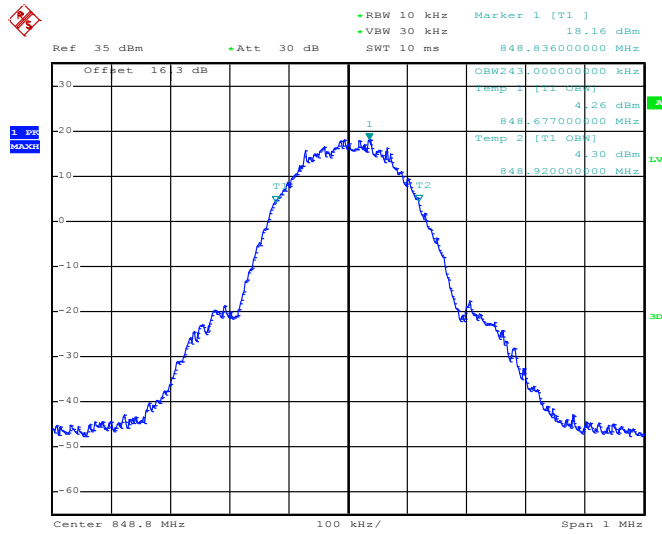

Date: 20.JUN.2015 09:29:31

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

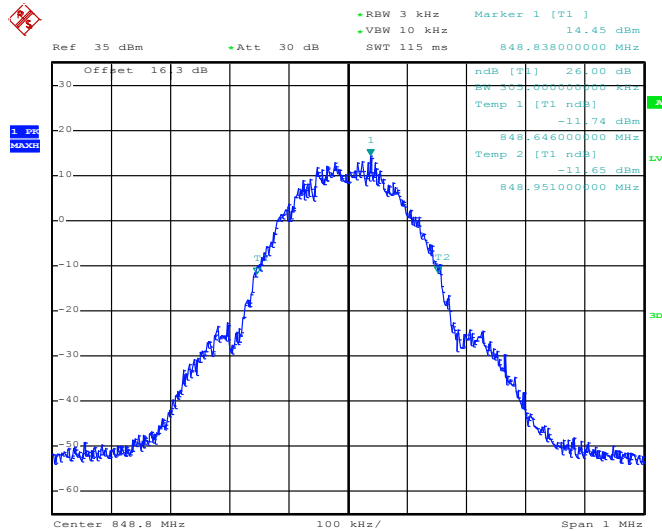


Date: 20.JUN.2015 09:31:24




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
---------------	----------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

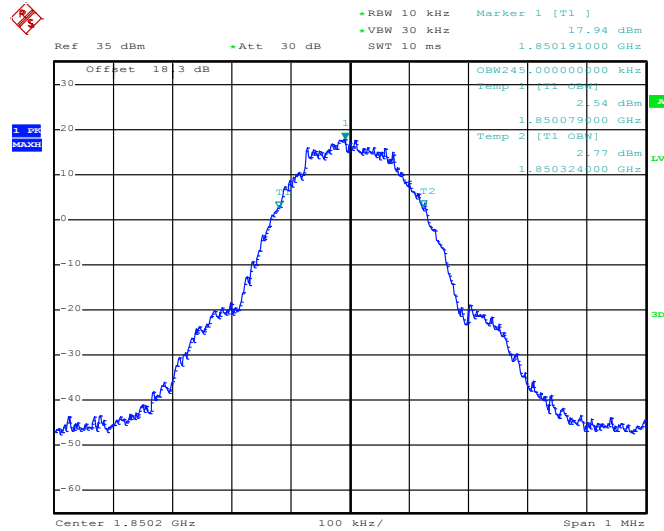

Date: 20.JUN.2015 10:08:42


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

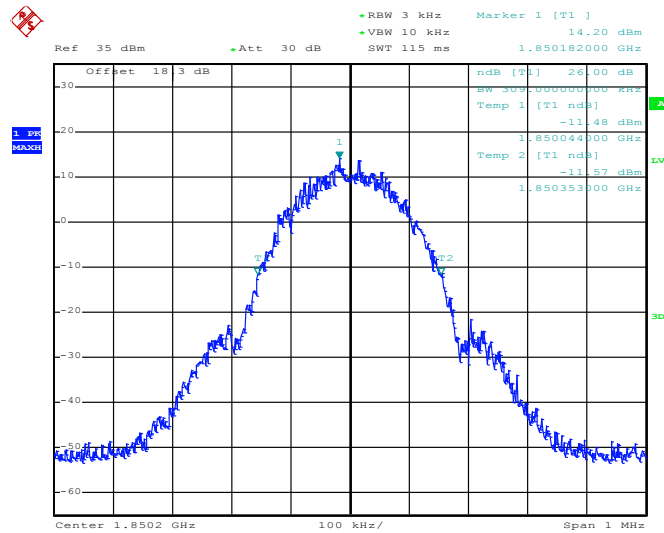

Date: 20.JUN.2015 10:05:04




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

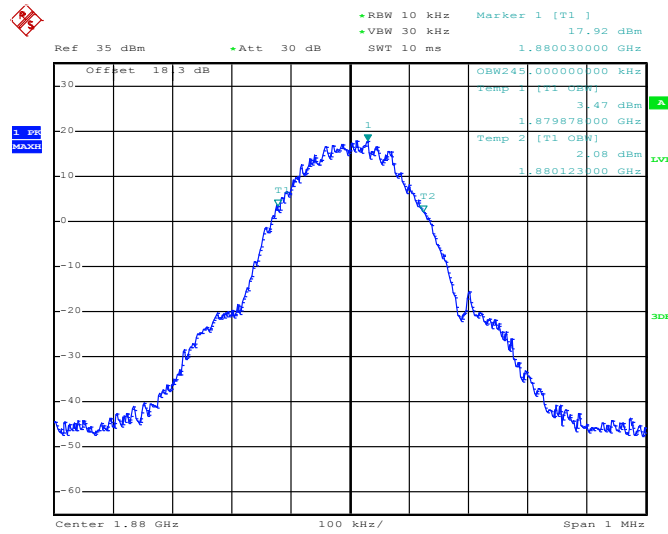

Date: 20.JUN.2015 10:09:24


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

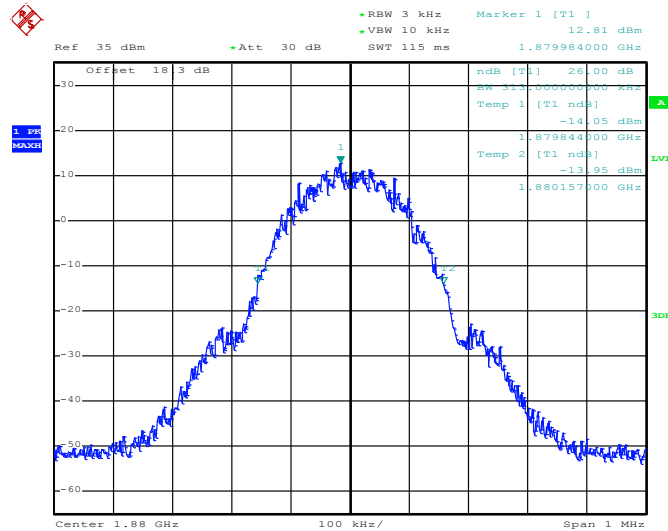

Date: 20.JUN.2015 10:05:53




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

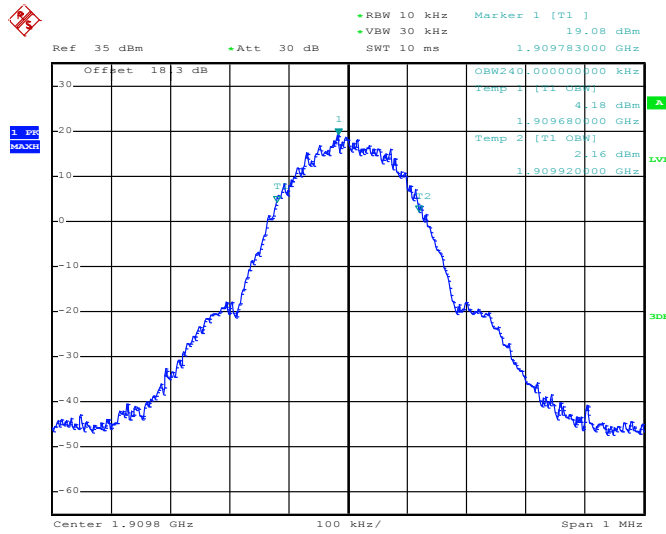

Date: 20.JUN.2015 10:10:03

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

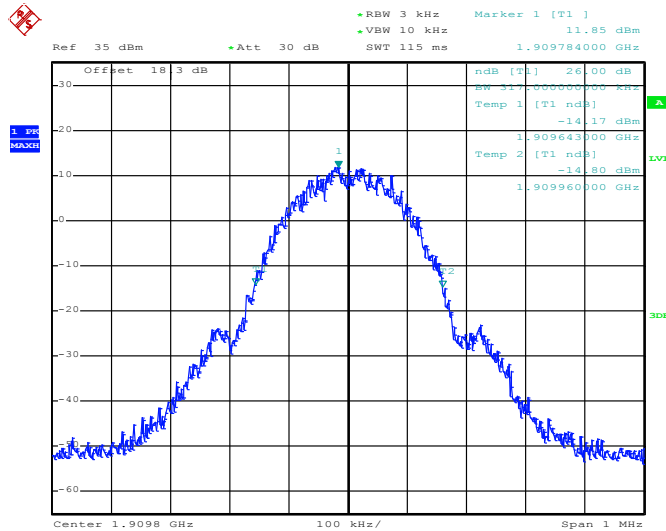


Date: 20.JUN.2015 10:07:24




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

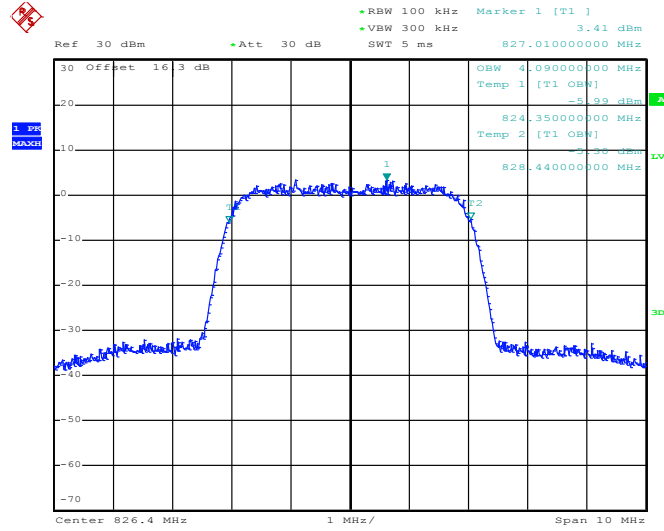

Date: 20.JUN.2015 14:28:19


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

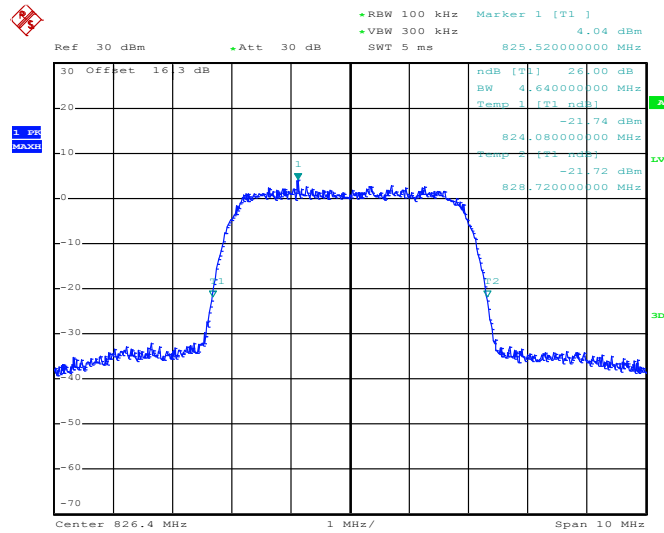

Date: 20.JUN.2015 11:08:22




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

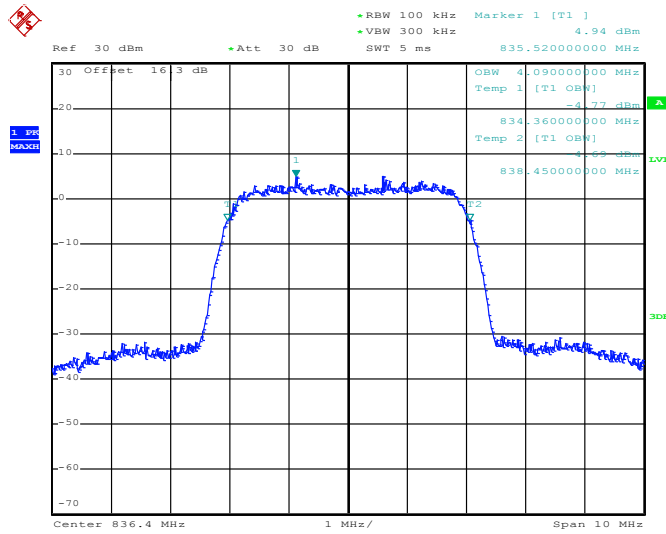

Date: 20.JUN.2015 14:28:56


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

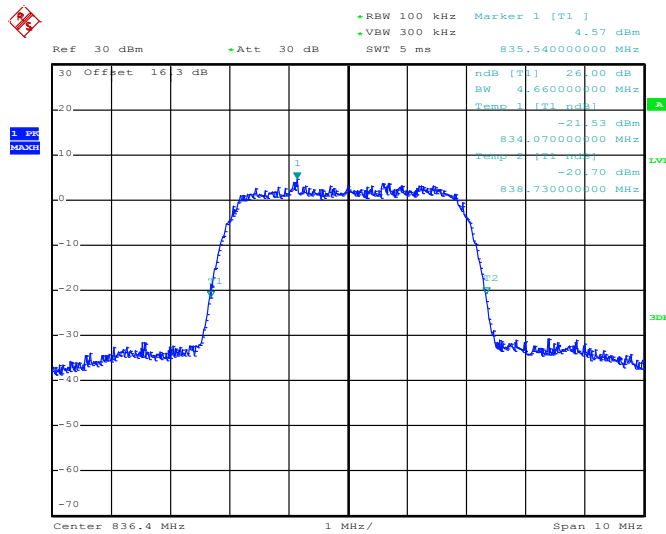

Date: 20.JUN.2015 11:08:58




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

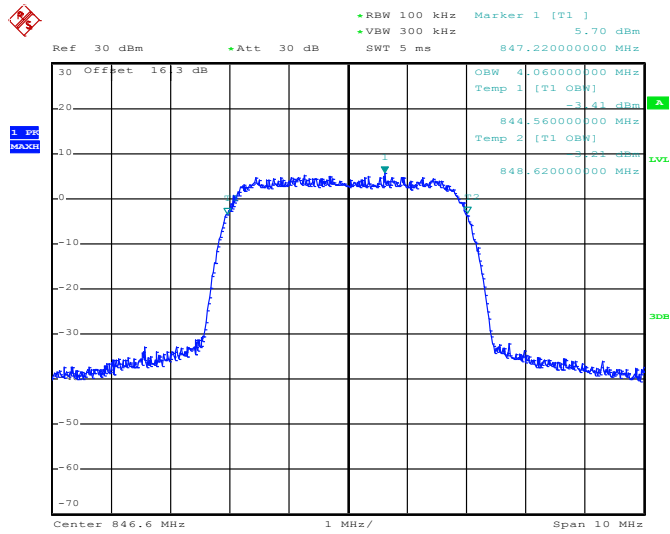

Date: 20.JUN.2015 14:29:33

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

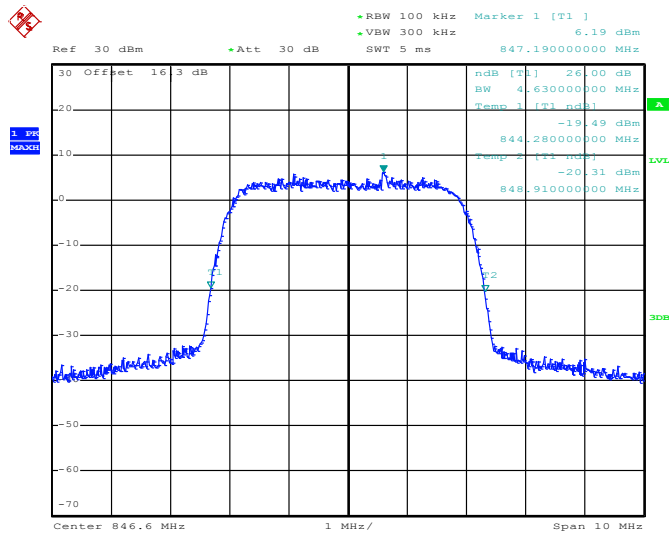


Date: 20.JUN.2015 11:09:35




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

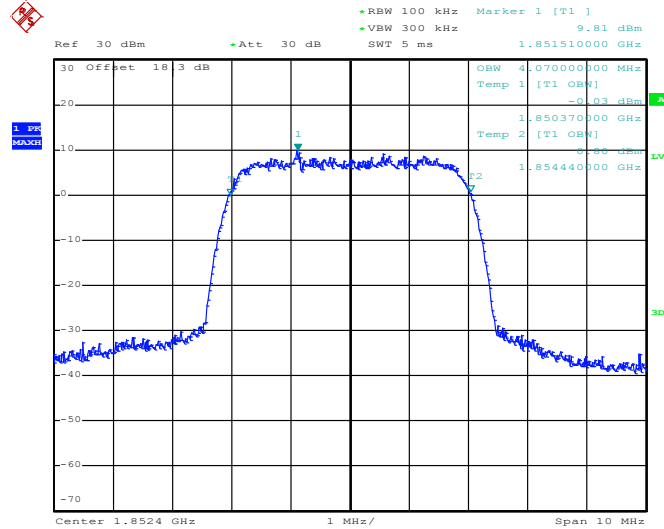

Date: 20.JUN.2015 10:31:04


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

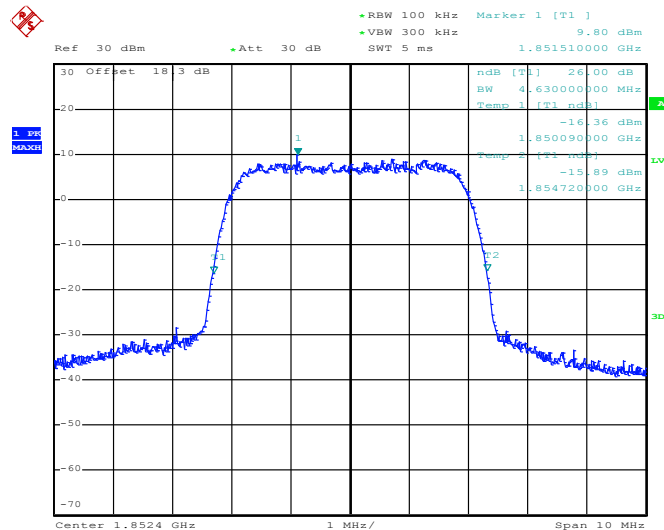

Date: 20.JUN.2015 10:28:38




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

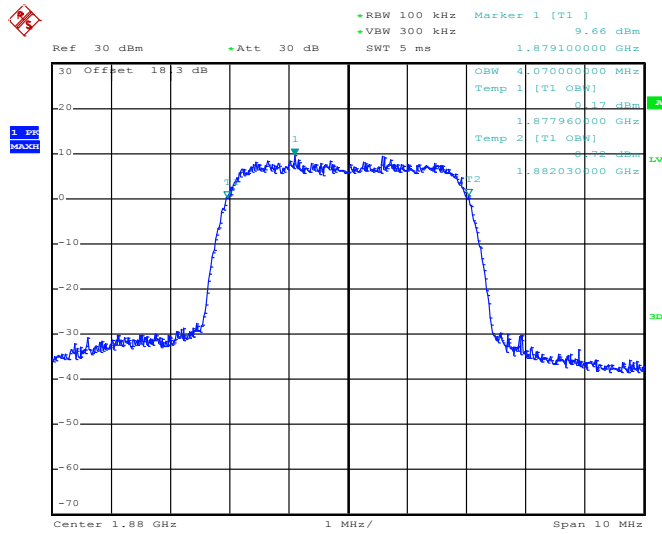

Date: 20.JUN.2015 10:31:43


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

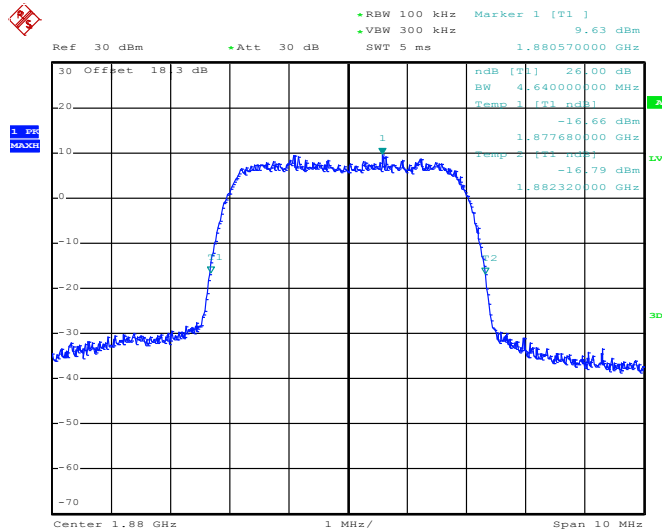

Date: 20.JUN.2015 10:29:16




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

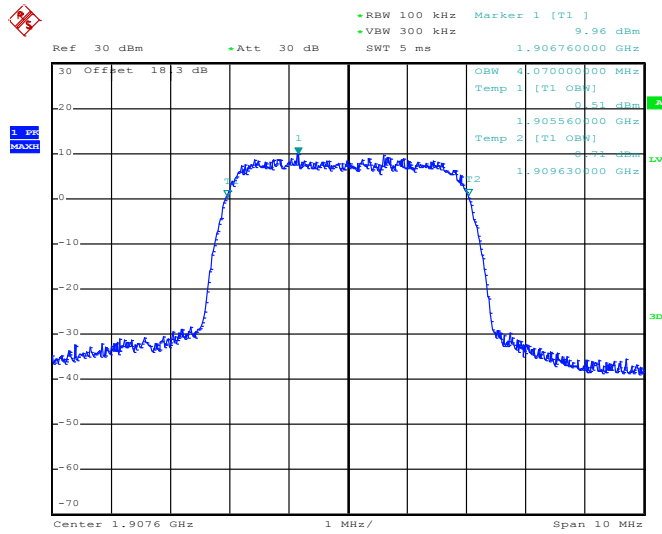

Date: 20.JUN.2015 10:32:28

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

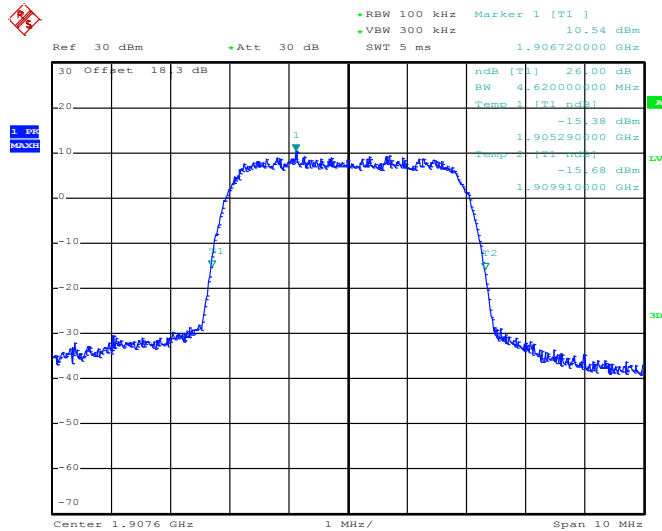

Date: 20.JUN.2015 10:29:54

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.5.4 Test Setup

<Conducted Band Edge >

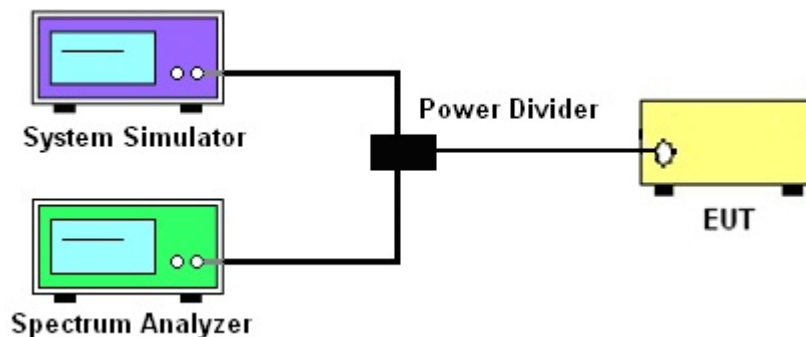




3.5.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

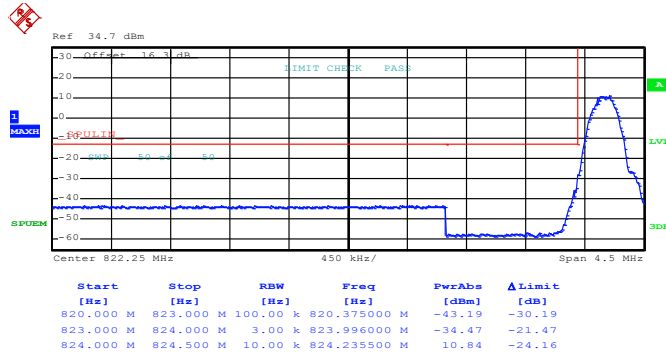

Date: 20.JUN.2015 09:33:27

Higher Band Edge Plot on Channel 251 (848.8 MHz)

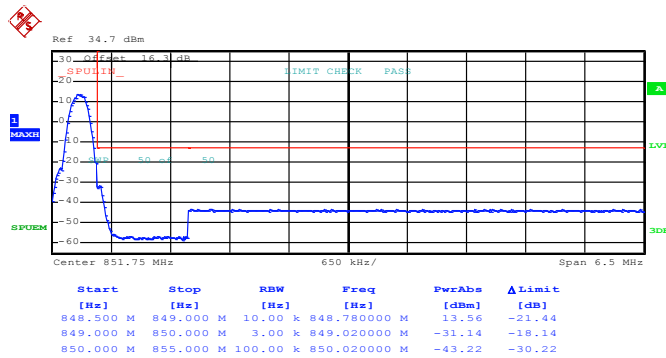


Date: 20.JUN.2015 09:34:56




Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

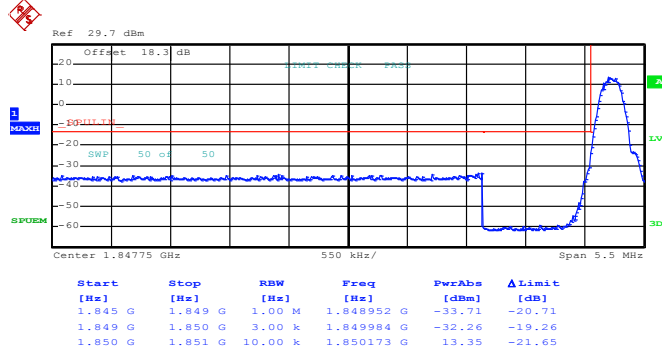

Date: 20.JUN.2015 10:12:11

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

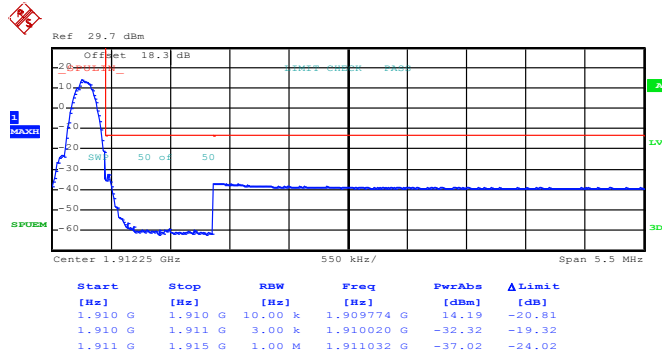


Date: 20.JUN.2015 10:13:42




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

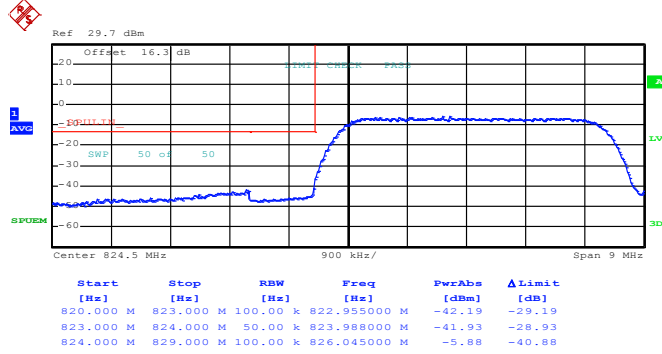

Date: 20.JUN.2015 14:25:38

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

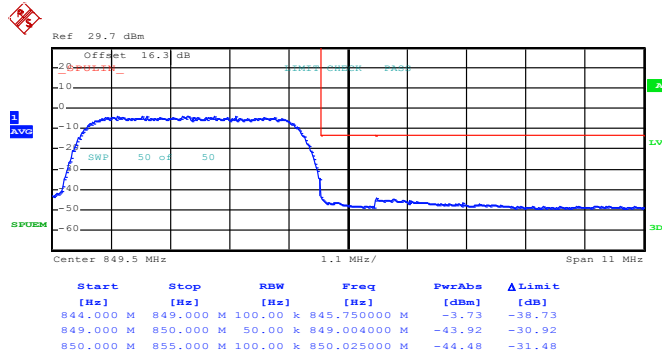


Date: 20.JUN.2015 14:27:08




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

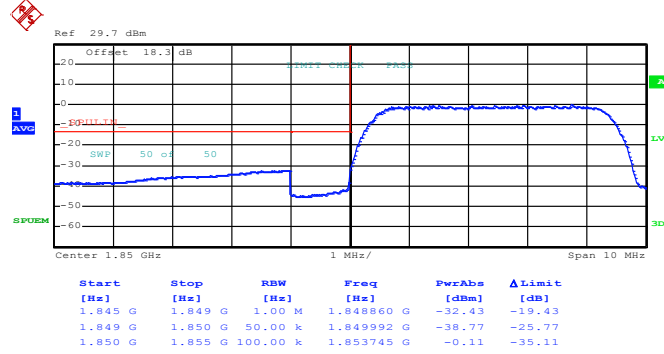

Date: 20.JUN.2015 10:34:56

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

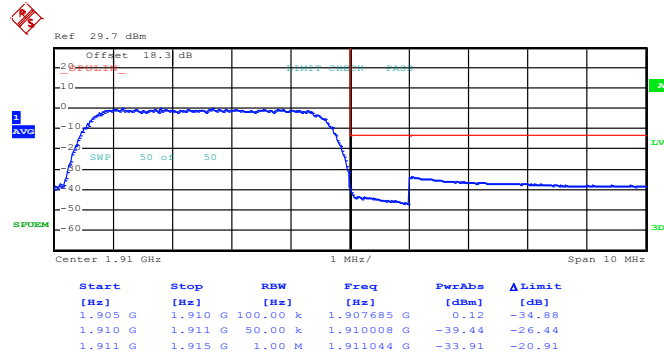

Date: 20.JUN.2015 10:36:27

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.6.4 Test Setup

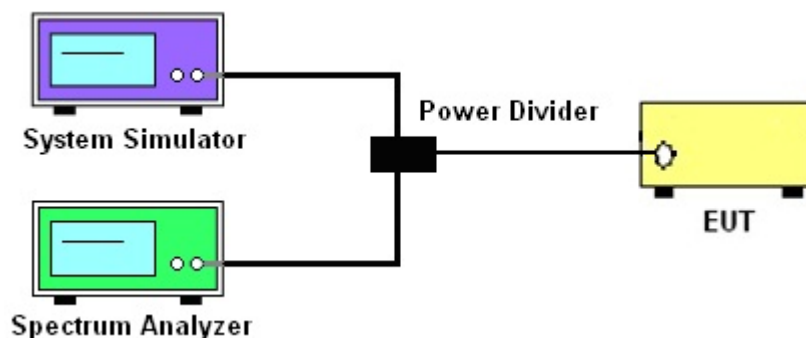




3.6.5 Test Result (Plots) of Conducted Spurious Emission

Band :	GSM850	Channel :	CH128
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

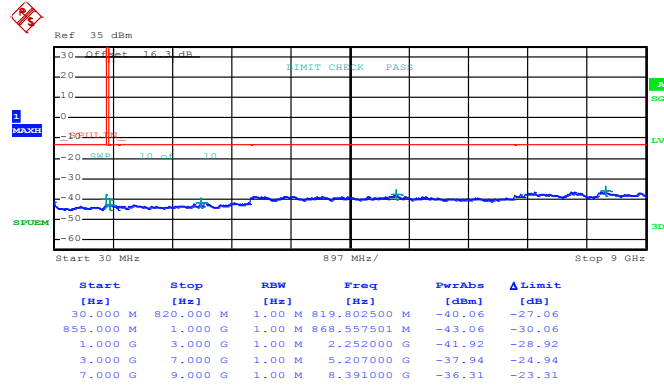


Date: 20.JUN.2015 09:37:34



Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

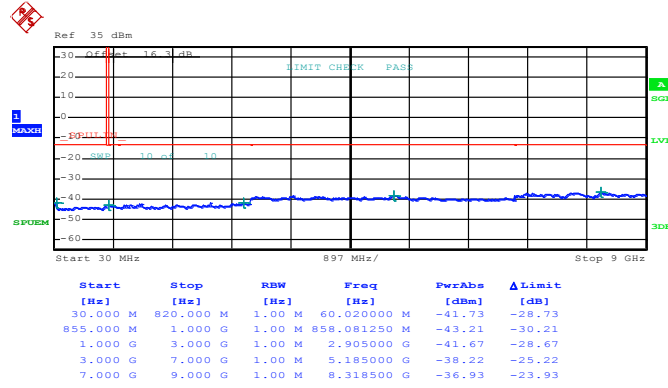


Date: 20.JUN.2015 09:38:15



Band :	GSM850	Channel :	CH251
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

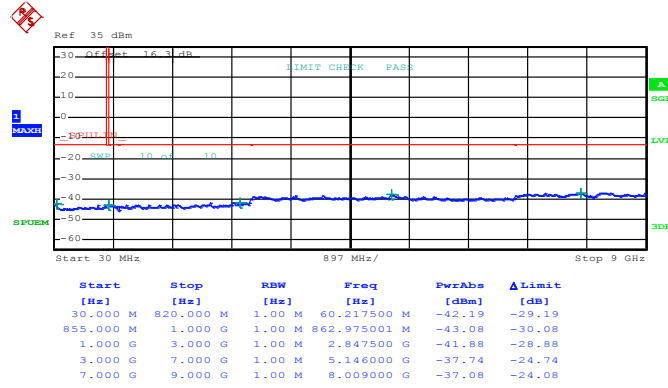


Date: 20.JUN.2015 09:38:47



Band :	GSM1900	Channel :	CH512
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

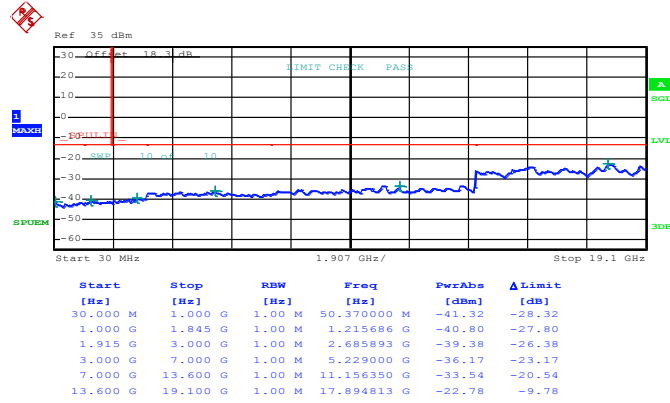


Date: 20.JUN.2015 10:15:32



Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

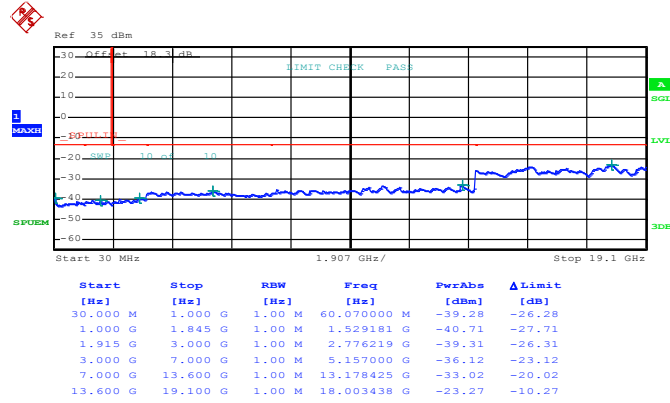


Date: 20.JUN.2015 10:16:03



Band :	GSM1900	Channel :	CH810
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

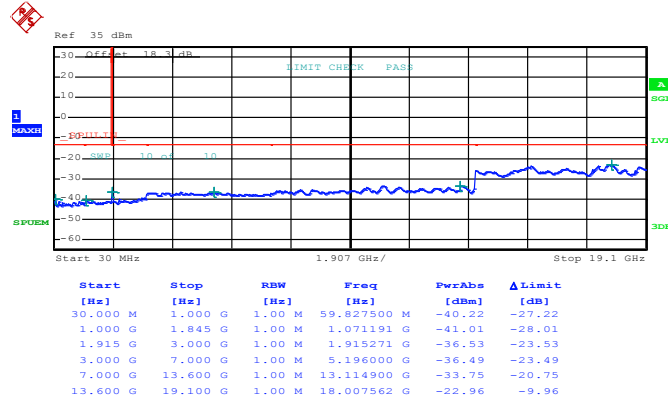


Date: 20.JUN.2015 10:16:45



Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

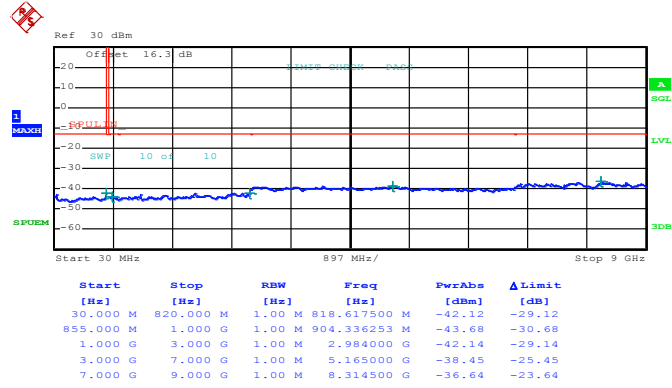


Date: 20.JUN.2015 14:31:10



Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

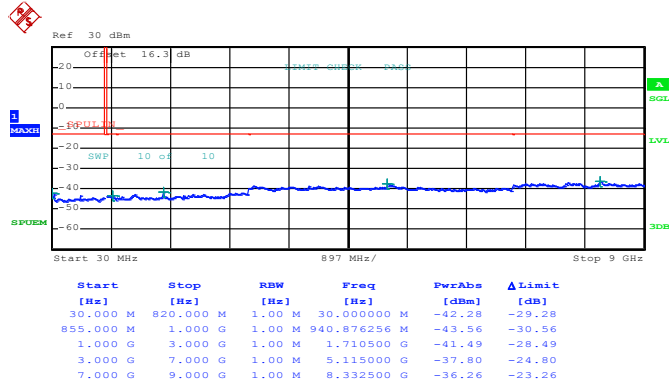


Date: 20.JUN.2015 14:31:41



Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

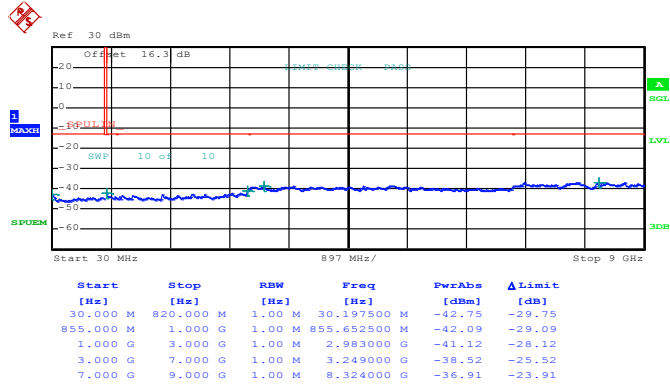


Date: 20.JUN.2015 14:32:28



Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

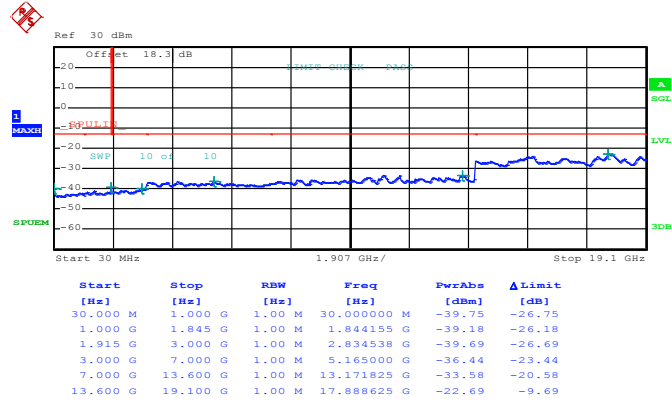


Date: 20.JUN.2015 10:37:20



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

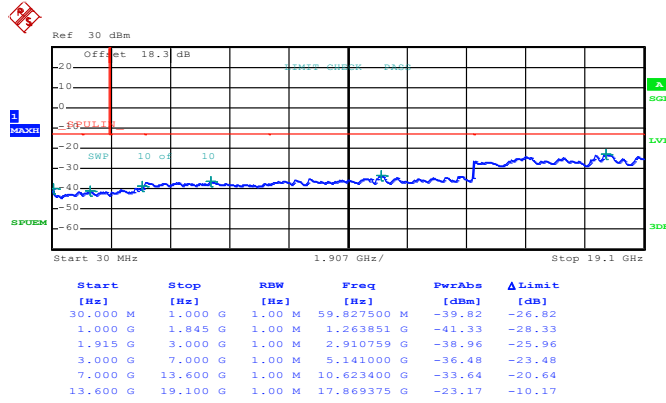


Date: 20.JUN.2015 10:37:52



Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

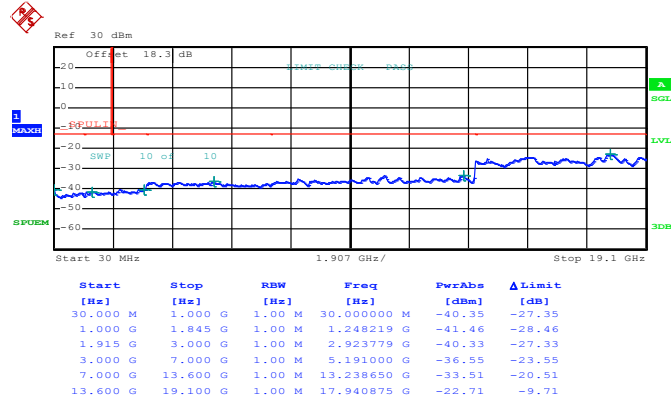

Date: 20.JUN.2015 10:40:21



3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13dBm.$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

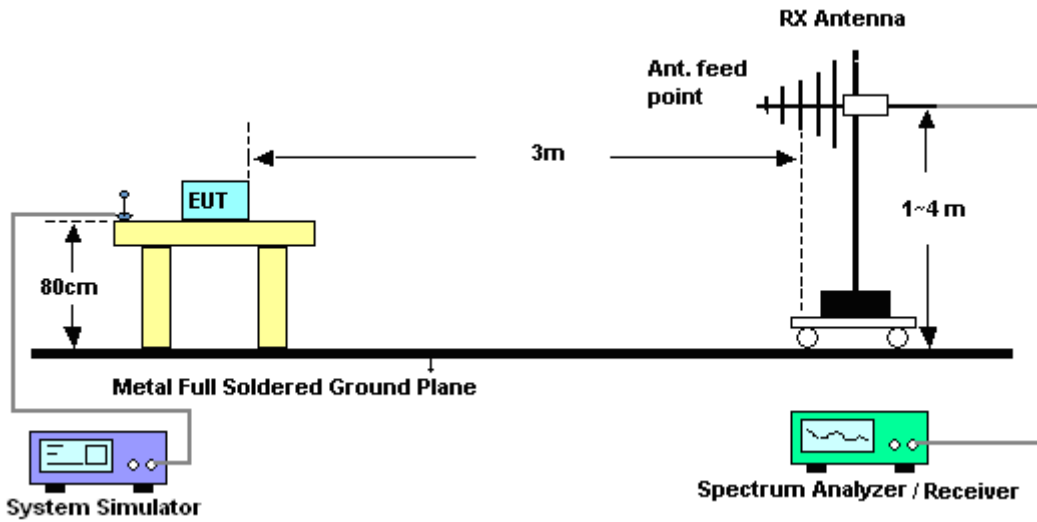

For radiated emissions above 1GHz

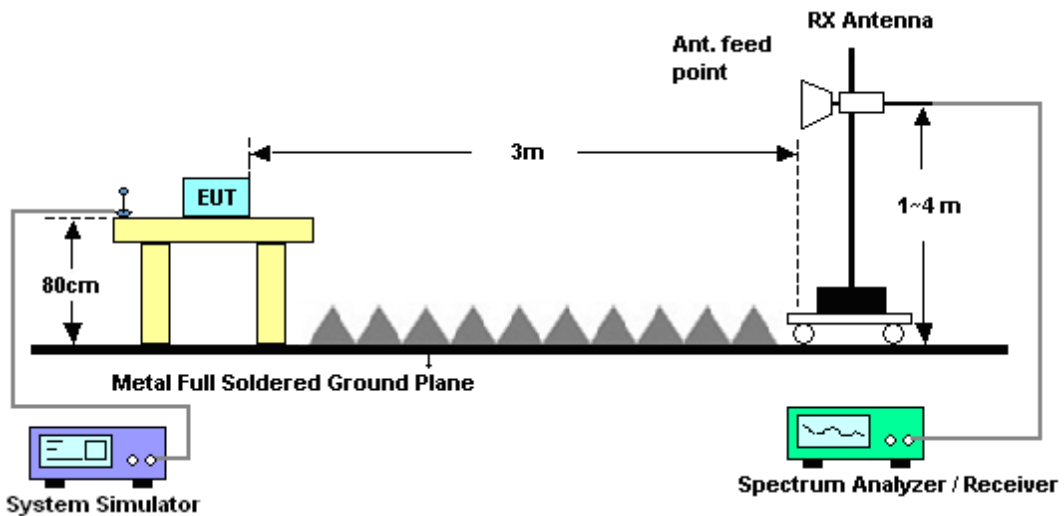



3.7.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

Band :	GSM850					Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)					Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen					Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.									
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result	
1648	-52.58	-13	-39.58	-57.2	-54.34	0.98	4.89	H	Pass	
2472	-44.52	-13	-31.52	-53.8	-46.40	1.28	5.32	H	Pass	
3296	-33.53	-13	-20.53	-45.94	-36.94	1.54	7.10	H	Pass	
4120	-46.53	-13	-33.53	-62.05	-51.17	1.83	8.62	H	Pass	
4944	-44.32	-13	-31.32	-62.96	-49.45	2.30	9.59	H	Pass	
5768	-32.03	-13	-19.03	-52.24	-36.91	2.78	9.81	H	Pass	
6592	-40.34	-13	-27.34	-62.69	-45.78	2.72	10.31	H	Pass	
7416	-47.95	-13	-34.95	-73.32	-54.98	2.46	11.63	H	Pass	

Band :	GSM850					Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)					Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen					Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.									
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result	
1648	-53.87	-13	-40.87	-57.03	-55.63	0.98	4.89	V	Pass	
2472	-40.85	-13	-27.85	-51.11	-42.73	1.28	5.32	V	Pass	
3296	-38.02	-13	-25.02	-49.44	-41.43	1.54	7.10	V	Pass	
4120	-49.15	-13	-36.15	-64.64	-53.79	1.83	8.62	V	Pass	
4944	-45.76	-13	-32.76	-63.22	-50.89	2.30	9.59	V	Pass	
5768	-42.23	-13	-29.23	-61.38	-47.11	2.78	9.81	V	Pass	
6592	-45.63	-13	-32.63	-68.33	-51.07	2.72	10.31	V	Pass	
7416	-52.39	-13	-39.39	-76.55	-59.42	2.46	11.63	V	Pass	



<Middle Channel>

Band :	GSM850				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-53.46	-13	-40.46	-57.95	-55.14	0.99	4.82	H	Pass
2512	-48.98	-13	-35.98	-58.44	-50.95	1.29	5.41	H	Pass
3344	-40.04	-13	-27.04	-52.11	-43.65	1.56	7.31	H	Pass
4184	-45.85	-13	-32.85	-61.51	-50.47	1.87	8.64	H	Pass
5016	-46.27	-13	-33.27	-65.13	-51.47	2.35	9.70	H	Pass
5856	-32.62	-13	-19.62	-53.28	-37.48	2.83	9.84	H	Pass
6688	-46.19	-13	-33.19	-68.86	-51.77	2.69	10.43	H	Pass
7528	-45.73	-13	-32.73	-70.62	-52.98	2.42	11.82	H	Pass

Band :	GSM850				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-61.02	-13	-48.02	-64.72	-62.70	0.99	4.82	V	Pass
2512	-39.40	-13	-26.40	-50.6	-41.37	1.29	5.41	V	Pass
3344	-36.00	-13	-23.00	-50	-39.61	1.56	7.31	V	Pass
4184	-44.76	-13	-31.76	-64.22	-49.38	1.87	8.64	V	Pass
5016	-43.81	-13	-30.81	-65.55	-49.01	2.35	9.70	V	Pass
5856	-37.10	-13	-24.10	-61.04	-41.96	2.83	9.84	V	Pass
6688	-41.87	-13	-28.87	-69.2	-47.45	2.69	10.43	V	Pass
7528	-44.45	-13	-31.45	-74.79	-51.70	2.42	11.82	V	Pass



<High Channel>

Band :	GSM850					Temperature :	22~23°C		
Test Mode :	GPRS class 8 Link (GMSK)					Relative Humidity :	46~47%		
Test Engineer :	Derreck Chen					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-55.68	-13	-42.68	-60.29	-57.28	1.00	4.75	H	Pass
2544	-42.13	-13	-29.13	-51.62	-44.11	1.30	5.44	H	Pass
3392	-39.21	-13	-26.21	-51.38	-43.01	1.57	7.52	H	Pass
4248	-49.61	-13	-36.61	-65.48	-54.21	1.90	8.65	H	Pass
5096	-43.78	-13	-30.78	-62.8	-48.94	2.39	9.70	H	Pass
5944	-33.53	-13	-20.53	-54.54	-38.38	2.88	9.88	H	Pass
6792	-44.95	-13	-31.95	-67.94	-50.69	2.66	10.55	H	Pass
7640	-44.31	-13	-31.31	-68.91	-51.66	2.38	11.88	H	Pass

Band :	GSM850					Temperature :	22~23°C		
Test Mode :	GPRS class 8 Link (GMSK)					Relative Humidity :	46~47%		
Test Engineer :	Derreck Chen					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-63.46	-13	-50.46	-67.13	-65.06	1.00	4.75	V	Pass
2544	-40.78	-13	-27.78	-50.91	-42.76	1.30	5.44	V	Pass
3392	-38.59	-13	-25.59	-50.29	-42.39	1.57	7.52	V	Pass
4248	-44.73	-13	-31.73	-60.35	-49.33	1.90	8.65	V	Pass
5096	-44.06	-13	-31.06	-61.87	-49.22	2.39	9.70	V	Pass
5944	-39.48	-13	-26.48	-60.17	-44.33	2.88	9.88	V	Pass
6792	-48.10	-13	-35.10	-70.71	-53.84	2.66	10.55	V	Pass
7640	-51.25	-13	-38.25	-75.15	-58.60	2.38	11.88	V	Pass



<Low Channel>

Band :	GSM1900				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-54.80	-13	-41.80	-69.19	-61.37	1.67	8.24	H	Pass
5550	-54.35	-13	-41.35	-74.37	-61.42	2.65	9.72	H	Pass
7400	-52.55	-13	-39.55	-77.98	-61.69	2.46	11.60	H	Pass

Band :	GSM1900				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-53.12	-13	-40.12	-67.42	-59.69	1.67	8.24	V	Pass
5550	-54.12	-13	-41.12	-72.6	-61.19	2.65	9.72	V	Pass
7400	-53.87	-13	-40.87	-78.03	-63.01	2.46	11.60	V	Pass



<Middle Channel>

Band :	GSM1900				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-54.49	-13	-41.49	-69.09	-61.12	1.69	8.31	H	Pass
5640	-52.70	-13	-39.70	-72.5	-59.75	2.71	9.76	H	Pass
7520	-53.13	-13	-40.13	-78.02	-62.52	2.42	11.81	H	Pass

Band :	GSM1900				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-55.93	-13	-42.93	-70.21	-62.56	1.69	8.31	V	Pass
5640	-54.12	-13	-41.12	-72.42	-61.17	2.71	9.76	V	Pass
7520	-54.16	-13	-41.16	-78.15	-63.55	2.42	11.81	V	Pass



<High Channel>

Band :	GSM1900				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-51.19	-13	-38.19	-65.87	-57.87	1.70	8.38	H	Pass
5729	-53.09	-13	-40.09	-73.14	-60.12	2.76	9.79	H	Pass
7639	-52.74	-13	-39.74	-77.34	-62.24	2.38	11.88	H	Pass

Band :	GSM1900				Temperature :	22~23°C			
Test Mode :	GPRS class 8 Link (GMSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-53.32	-13	-40.32	-67.35	-60	1.70	8.38	V	Pass
5729	-56.64	-13	-43.64	-75.52	-63.67	2.76	9.79	V	Pass
7639	-54.15	-13	-41.15	-78.05	-63.65	2.38	11.88	V	Pass



<Low Channel>

Band :	WCDMA Band V				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-58.16	-13	-45.16	-63.54	-59.89	0.98	4.86	H	Pass
2479	-52.42	-13	-39.42	-62.7	-54.32	1.28	5.34	H	Pass
3304	-44.83	-13	-31.83	-59.66	-48.27	1.54	7.14	H	Pass
4136	-54.77	-13	-41.77	-74.03	-59.41	1.84	8.63	H	Pass
4958	-53.83	-13	-40.83	-76.78	-58.98	2.31	9.62	H	Pass
5784	-50.64	-13	-37.64	-74.91	-55.52	2.79	9.81	H	Pass

Band :	WCDMA Band V				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-56.04	-13	-43.04	-60.03	-57.77	0.98	4.86	V	Pass
2479	-54.49	-13	-41.49	-65.75	-56.39	1.28	5.34	V	Pass
3304	-50.01	-13	-37.01	-63.93	-53.45	1.54	7.14	V	Pass
4136	-54.31	-13	-41.31	-73.54	-58.95	1.84	8.63	V	Pass
4958	-54.32	-13	-41.32	-76	-59.47	2.31	9.62	V	Pass
5784	-50.17	-13	-37.17	-73.44	-55.05	2.79	9.81	V	Pass



<Middle Channel>

Band :	WCDMA Band V				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-55.97	-13	-42.97	-60.46	-57.65	0.99	4.82	H	Pass
2509	-51.76	-13	-38.76	-61.22	-53.72	1.29	5.41	H	Pass
3345	-45.06	-13	-32.06	-57.13	-48.67	1.56	7.32	H	Pass
4182	-59.48	-13	-46.48	-75.14	-64.10	1.87	8.64	H	Pass
5018	-55.59	-13	-42.59	-74.45	-60.79	2.35	9.70	H	Pass
5854	-52.40	-13	-39.40	-73.06	-57.26	2.83	9.84	H	Pass
6691	-54.66	-13	-41.66	-77.33	-60.25	2.69	10.43	H	Pass

Band :	WCDMA Band V				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-59.45	-13	-46.45	-62.37	-61.13	0.99	4.82	V	Pass
2509	-56.03	-13	-43.03	-66.16	-57.99	1.29	5.41	V	Pass
3345	-49.59	-13	-36.59	-60.88	-53.20	1.56	7.32	V	Pass
4182	-57.80	-13	-44.80	-73.54	-62.42	1.87	8.64	V	Pass
5018	-57.19	-13	-44.19	-74.63	-62.39	2.35	9.70	V	Pass
5854	-52.38	-13	-39.38	-72.36	-57.24	2.83	9.84	V	Pass
6691	-54.38	-13	-41.38	-77.03	-59.97	2.69	10.43	V	Pass



<High Channel>

Band :	WCDMA Band V					Temperature :	22~23°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	46~47%		
Test Engineer :	Derreck Chen					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-53.95	-13	-40.95	-58.56	-55.55	1.00	4.75	H	Pass
2539	-53.48	-13	-40.48	-62.97	-55.46	1.30	5.43	H	Pass
3386	-49.47	-13	-36.47	-61.61	-53.25	1.57	7.50	H	Pass
4233	-54.89	-13	-41.89	-70.7	-59.49	1.90	8.65	H	Pass
5079	-54.90	-13	-41.90	-73.89	-60.07	2.38	9.70	H	Pass
5926	-50.00	-13	-37.00	-70.94	-54.85	2.87	9.87	H	Pass
6772	-54.52	-13	-41.52	-77.46	-60.23	2.66	10.53	H	Pass

Band :	WCDMA Band V					Temperature :	22~23°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	46~47%		
Test Engineer :	Derreck Chen					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-52.96	-13	-39.96	-56.63	-54.56	1.00	4.75	V	Pass
2539	-49.38	-13	-36.38	-59.51	-51.36	1.30	5.43	V	Pass
3386	-49.05	-13	-36.05	-60.61	-52.83	1.57	7.50	V	Pass
4233	-56.87	-13	-43.87	-72.55	-61.47	1.90	8.65	V	Pass
5079	-57.85	-13	-44.85	-75.59	-63.02	2.38	9.70	V	Pass
5926	-54.66	-13	-41.66	-75.21	-59.51	2.87	9.87	V	Pass
6772	-55.52	-13	-42.52	-78.14	-61.23	2.66	10.53	V	Pass



<Low Channel>

Band :	WCDMA Band II				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3704	-62.49	-13	-49.49	-76.89	-69.07	1.67	8.24	H	Pass
5557	-58.62	-13	-45.62	-78.64	-65.68	2.66	9.72	H	Pass
7409	-52.65	-13	-39.65	-78.03	-61.81	2.46	11.62	H	Pass

Band :	WCDMA Band II				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3704	-62.89	-13	-49.89	-77.2	-69.47	1.67	8.24	V	Pass
5557	-60.26	-13	-47.26	-78.74	-67.32	2.66	9.72	V	Pass
7409	-53.74	-13	-40.74	-77.91	-62.9	2.46	11.62	V	Pass



<Middle Channel>

Band :	WCDMA Band II				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-56.43	-13	-43.43	-71.03	-63.06	1.69	8.32	H	Pass
5640	-53.53	-13	-40.53	-73.33	-60.58	2.71	9.76	H	Pass
7520	-53.11	-13	-40.11	-78	-62.5	2.42	11.81	H	Pass

Band :	WCDMA Band II				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-54.64	-13	-41.64	-68.81	-61.27	1.69	8.32	V	Pass
5640	-54.20	-13	-41.20	-72.5	-61.25	2.71	9.76	V	Pass
7520	-53.53	-13	-40.53	-77.52	-62.92	2.42	11.81	V	Pass



<High Channel>

Band :	WCDMA Band II				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3816	-62.28	-13	-49.28	-76.96	-68.96	1.70	8.38	H	Pass
5722	-58.36	-13	-45.36	-78.41	-65.4	2.75	9.79	H	Pass
7630	-53.21	-13	-40.21	-77.8	-62.7	2.39	11.88	H	Pass

Band :	WCDMA Band II				Temperature :	22~23°C			
Test Mode :	RMC 12.2Kbps Link (QPSK)				Relative Humidity :	46~47%			
Test Engineer :	Derreck Chen				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3816	-62.93	-13	-49.93	-76.96	-69.61	1.70	8.38	V	Pass
5722	-59.27	-13	-46.27	-78.15	-66.31	2.75	9.79	V	Pass
7630	-54.11	-13	-41.11	-77.98	-63.6	2.39	11.88	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

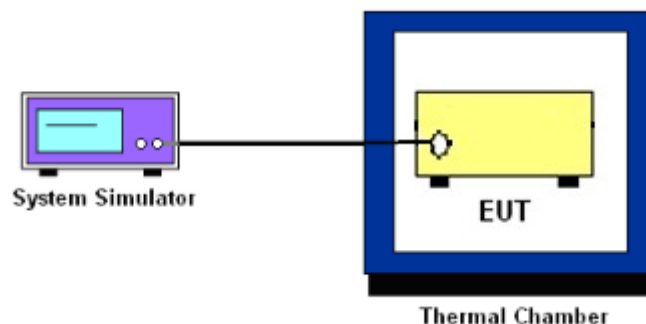



3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8		Result
	Deviation (ppm)		
50	0.0012		PASS
40	0.0024		
30	0.0012		
20(Ref.)	0.0000		
10	0.0036		
0	0.0048		
-10	0.0000		
-20	0.0036		
-30	0.0024		

Band :	GSM 1900	Channel :	661
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8		Result
	Deviation (ppm)		
50	0.0021		PASS
40	0.0011		
30	0.0016		
20(Ref.)	0.0000		
10	0.0005		
0	0.0021		
-10	0.0032		
-20	0.0011		
-30	0.0016		

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Deviation (ppm)		
50	0.0024		PASS
40	0.0072		
30	0.0012		
20(Ref.)	0.0000		
10	0.0036		
0	0.0024		
-10	0.0048		
-20	0.0012		
-30	0.0000		

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Deviation (ppm)		
50	0.0000		PASS
40	0.0027		
30	0.0016		
20(Ref.)	0.0000		
10	0.0016		
0	0.0011		
-10	0.0011		
-20	0.0005		
-30	0.0021		

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	4.2	0.0036	2.5	PASS
		3.7	0.0000		
		BEP	0.0012		
GSM 1900 CH661	GPRS class 8	4.2	0.0027	(Note 3.)	
		3.7	0.0005		
		BEP	0.0000		
WCDMA Band V CH4182	RMC 12.2Kbps	4.2	0.0036	2.5	
		3.7	0.0000		
		BEP	0.0048		
WCDMA Band II CH9400	RMC 12.2Kbps	4.2	0.0021	(Note 3.)	
		3.7	0.0011		
		BEP	0.0032		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Generator	Rohde & Schwarz	SMU200A	102502	9kHz~6GHz	Jul. 07, 2014	Jun. 20, 2015~ Jun. 22, 2015	Jul. 06, 2015	Conducted (TH03-HY)
Kistler	KING DESIGN	8704B100M 1	2019026	50Hz~4000Hz	Apr. 21, 2015	Jun. 20, 2015~ Jun. 22, 2015	Apr. 20, 2016	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°~70°	Dec. 01, 2014	Jun. 20, 2015~ Jun. 22, 2015	Nov. 30, 2015	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	May. 11, 2015	Jun. 20, 2015~ Jun. 22, 2015	May. 10, 2016	Conducted (TH03-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Nov. 03, 2014	Jun. 22, 2015	Nov. 02, 2015	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1325	1GHz ~ 18GHz	Oct. 03, 2014	Jun. 22, 2015	Oct. 02, 2015	Radiation (03CH11-HY)
Double Ridged Guide Horn	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 05, 2014	Jun. 22, 2015	Nov. 04, 2015	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 24, 2014	Jun. 22, 2015	Oct. 23, 2015	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A	MY5413008 5	20Hz ~ 26.5GHz	Nov. 05, 2014	Jun. 22, 2015	Nov. 04, 2015	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 24, 2014	Jun. 22, 2015	Nov. 23, 2015	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY5327008 0	1GHz~26.5GHz	Nov. 20, 2014	Jun. 22, 2015	Nov. 19, 2015	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHZ	Sep. 24, 2014	Jun. 22, 2015	Sep. 23, 2015	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	NA	Jun. 22, 2015	NA	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0-360 degree	NA	Jun. 22, 2015	NA	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2015	Jun. 22, 2015	May 21, 2016	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90
---	------