



FCC TEST REPORT

REPORT NO.: RF950406H04

MODEL NO.: WN511B

RECEIVED: April 06, 2006

TESTED: April 06 to 08, 2006

ISSUED: April 10, 2006

APPLICANT: NETGEAR, Inc.

ADDRESS: 4500 Great America Parkway, Santa Clara, CA
95054 USA

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 109 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



No. 2177-01

TABLE OF CONTENTS

| | | |
|-------|--|----|
| 1. | CERTIFICATION | 4 |
| 2. | SUMMARY OF TEST RESULTS | 5 |
| 2.1 | MEASUREMENT UNCERTAINTY | 6 |
| 3. | GENERAL INFORMATION | 7 |
| 3.1 | GENERAL DESCRIPTION OF EUT..... | 7 |
| 3.2 | DESCRIPTION OF TEST MODES | 8 |
| 3.2.1 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... | 9 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS | 12 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS..... | 13 |
| 3.5 | CONFIGURATION OF SYSTEM UNDER TEST | 14 |
| 4. | TEST TYPES AND RESULTS | 15 |
| 4.1 | CONDUCTED EMISSION MEASUREMENT | 15 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT | 15 |
| 4.1.2 | TEST INSTRUMENTS | 15 |
| 4.1.3 | TEST PROCEDURES | 16 |
| 4.1.4 | DEVIATION FROM TEST STANDARD | 16 |
| 4.1.5 | TEST SETUP..... | 17 |
| 4.1.6 | EUT OPERATING CONDITIONS..... | 17 |
| 4.1.7 | TEST RESULTS | 18 |
| 4.2 | RADIATED EMISSION MEASUREMENT | 24 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 24 |
| 4.2.2 | TEST INSTRUMENTS | 25 |
| 4.2.3 | TEST PROCEDURES | 26 |
| 4.2.4 | DEVIATION FROM TEST STANDARD | 26 |
| 4.2.5 | TEST SETUP..... | 27 |
| 4.2.6 | EUT OPERATING CONDITIONS..... | 27 |
| 4.2.7 | TEST RESULTS | 28 |
| 4.3 | 6dB BANDWIDTH MEASUREMENT | 59 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 59 |
| 4.3.2 | TEST INSTRUMENTS | 59 |
| 4.3.3 | TEST PROCEDURE..... | 59 |
| 4.3.4 | DEVIATION FROM TEST STANDARD | 59 |
| 4.3.5 | TEST SETUP..... | 60 |
| 4.3.6 | EUT OPERATING CONDITIONS..... | 60 |
| 4.3.7 | TEST RESULTS | 61 |
| 4.4 | MAXIMUM PEAK OUTPUT POWER | 73 |



| | | |
|-------|--|-----|
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT..... | 73 |
| 4.4.2 | INSTRUMENTS..... | 73 |
| 4.4.3 | TEST PROCEDURES..... | 73 |
| 4.4.4 | DEVIATION FROM TEST STANDARD..... | 73 |
| 4.4.5 | TEST SETUP..... | 74 |
| 4.4.6 | EUT OPERATING CONDITIONS..... | 74 |
| 4.4.7 | TEST RESULTS..... | 75 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT..... | 77 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT..... | 77 |
| 4.5.2 | TEST INSTRUMENTS..... | 77 |
| 4.5.3 | TEST PROCEDURE..... | 77 |
| 4.5.4 | DEVIATION FROM TEST STANDARD..... | 77 |
| 4.5.5 | TEST SETUP..... | 78 |
| 4.5.6 | EUT OPERATING CONDITION..... | 78 |
| 4.5.7 | TEST RESULTS..... | 79 |
| 4.6 | CONDUCTED EMISSION AND BAND EDGES MEASUREMENT..... | 91 |
| 4.6.1 | LIMITS OF CONDUCTED EMISSION AND BAND EDGES MEASUREMENT..... | 91 |
| 4.6.2 | TEST INSTRUMENTS..... | 91 |
| 4.6.3 | TEST PROCEDURE..... | 91 |
| 4.6.4 | DEVIATION FROM TEST STANDARD..... | 92 |
| 4.6.5 | EUT OPERATING CONDITION..... | 92 |
| 4.6.6 | TEST RESULTS..... | 92 |
| 4.7 | ANTENNA REQUIREMENT..... | 105 |
| 4.7.1 | STANDARD APPLICABLE..... | 105 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION..... | 105 |
| 5. | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 106 |
| 6. | INFORMATION ON THE TESTING LABORATORIES..... | 108 |
| | APPENDIX-A..... | A-1 |



1. CERTIFICATION

PRODUCT : NEXT Wireless Notebook Adapter
MODEL NO.: WN511B
BRAND: NETGEAR
APPLICANT : NETGEAR, Inc.
TESTED: April 06 to 08, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WN511B) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** April 10, 2006
(Carol Liao)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** April 10, 2006
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** April 10, 2006
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|--|--|--------|---|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is – 19.56dB at 0.154MHz. |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Peak Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Transmitter Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is – 2.9dB at 2390.00MHz and 7311.00MHz. |
| 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz ~ 30MHz | 2.26 dB |
| Radiated emissions | 30MHz ~ 1000MHz | 2.98 dB |
| | 1GHz ~ 18GHz | 2.21 dB |
| | 18GHz ~ 40GHz | 1.88 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|---|
| PRODUCT | NEXT Wireless Notebook Adapter |
| MODEL NO. | WN511B |
| FCC ID | PY306100034 |
| POWER SUPPLY | 3.3Vdc from host equipment |
| MODULATION TYPE | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM |
| MODULATION TECHNOLOGY | DSSS, OFDM |
| TRANSFER RATE | 802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps Draft 802.11n (20MHz): 130/117/104/78/65/58.5/52/39/26/19.5/13/6.5Mbps Draft 802.11n (40MHz): 270/ 243/ 216/ 162/135/121.5/108/81/54/40.5/27/13.5Mbps |
| FREQUENCY RANGE | 2412MHz ~ 2462MHz |
| NUMBER OF CHANNEL | 11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz) |
| MAXIMUM OUTPUT POWER | 802.11b: 125.893mW 802.11g: 134.896mW draft 802.11n (20MHz): 64.993mW draft 802.11n (40MHz): 68.776mW |
| ANTENNA TYPE | Printed antenna with 3.49dBi gain |
| DATA CABLE | NA |
| I/O PORTS | NA |

NOTE:

1. The EUT incorporates a MIMO function with 802.11b, 802.11g, draft 802.11n. Physically, the card provides two completed transmit and three receivers.
2. The EUT is 2 * 3 spatial MIMO (2Tx & 3Rx) without beam forming function that only operate dual chain configuration (both chain 0 and chain 1 transceivers are operational).
3. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, set 0~15 of "MCS" (MCS: Modulation and Coding Schemes).
4. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
5. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 270Mbps.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2412MHz | 7 | 2442MHz |
| 2 | 2417MHz | 8 | 2447MHz |
| 3 | 2422MHz | 9 | 2452MHz |
| 4 | 2427MHz | 10 | 2457MHz |
| 5 | 2432MHz | 11 | 2462MHz |
| 6 | 2437MHz | | |

Seven channels are provided for draft 802.11n (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2422MHz | 5 | 2442MHz |
| 2 | 2427MHz | 6 | 2447MHz |
| 3 | 2432MHz | 7 | 2452MHz |
| 4 | 2437MHz | | |

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|---------|---------|------|-------------|
| | PLC | RE < 1G | RE ≥ 1G | APCM | |
| - | √ | √ | √ | √ | - |

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | TX CONDITION |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|--------------|
| 802.11g | 1 to 11 | 11 | OFDM | BPSK | 6 | Single |
| Draft 802.11n (20MHz) | 1 to 11 | 11 | OFDM | BPSK | 6.5 | Dual |
| Draft 802.11n (40MHz) | 1 to 7 | 7 | OFDM | BPSK | 13.5 | Dual |

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | TX CONDITION |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|--------------|
| 802.11g | 1 to 11 | 1 | OFDM | BPSK | 6 | Single |
| Draft 802.11n (20MHz) | 1 to 11 | 1 | OFDM | BPSK | 6.5 | Dual |
| Draft 802.11n (40MHz) | 1 to 7 | 1 | OFDM | BPSK | 13.5 | Dual |



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | TX CONDITION |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|--------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1 | Single |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 | Single |
| Draft 802.11n (20MHz) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.5 | Dual |
| Draft 802.11n (40MHz) | 1 to 7 | 1, 4, 7 | OFDM | BPSK | 13.5 | Dual |

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | TX CONDITION |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|--------------|
| 802.11b | 1 to 11 | 1, 11 | DSSS | DBPSK | 1 | Single |
| 802.11g | 1 to 11 | 1, 11 | OFDM | BPSK | 6 | Single |
| Draft 802.11n (20MHz) | 1 to 11 | 1, 11 | OFDM | BPSK | 6.5 | Dual |
| Draft 802.11n (40MHz) | 1 to 7 | 1, 7 | OFDM | BPSK | 13.5 | Dual |

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | TX CONDITION |
|-----------------------|-------------------|----------------|-----------------------|-----------------|------------------|--------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1 | Single |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 | Single |
| Draft 802.11n (20MHz) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.5 | Dual |
| Draft 802.11n (40MHz) | 1 to 7 | 1, 4, 7 | OFDM | BPSK | 13.5 | Dual |



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-------------------|---------|-------------|--------------------------|--------------|
| 1 | NOTEBOOK COMPUTER | ASUS | A2400H | 49NG038481 | FCC DoC |
| 2 | NOTEBOOK COMPUTER | DELL | PP05L | CN-04Y212-48643-38E-0145 | FCC DoC |
| 3 | PRINTER | HP | C2642A | MY79F1C3MZ | B94C2642X |
| 4 | WIRELESS ROUTER | Linksys | WRT54G v5.1 | NA | Q87-WRT54GV5 |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|--|
| 1 | NA |
| 2 | NA |
| 3 | 1.6 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core |
| 4 | NA |

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

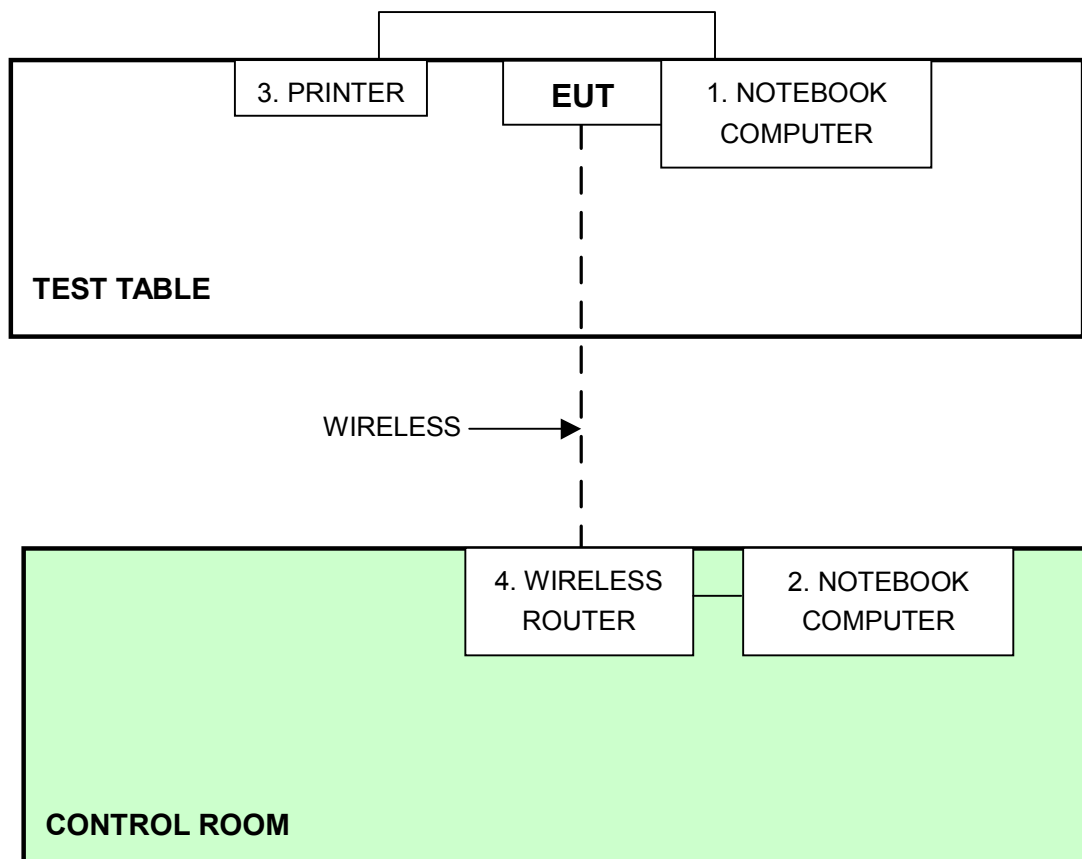

NOTE: 1. Support unit 2-3 were kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 5 also.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|-----------------|-------------|------------------|
| Test Receiver | ESCS 30 | 100375 | Sep. 19, 2006 |
| Line-Impedance Stabilization Network(for EUT) | ENV-216 | 100071 | Nov. 10, 2006 |
| ROHDE & SCHWARZ LISN | KNW-407 | 8/1395/12 | Jul. 19, 2006 |
| RF Signal Cable | RG233/U | Cable_CA_02 | Dec. 10, 2006 |
| Terminator(for KYORITSU) | 50 | 2 | Oct. 08, 2006 |
| Software | ADT_Cond_V7.3.2 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

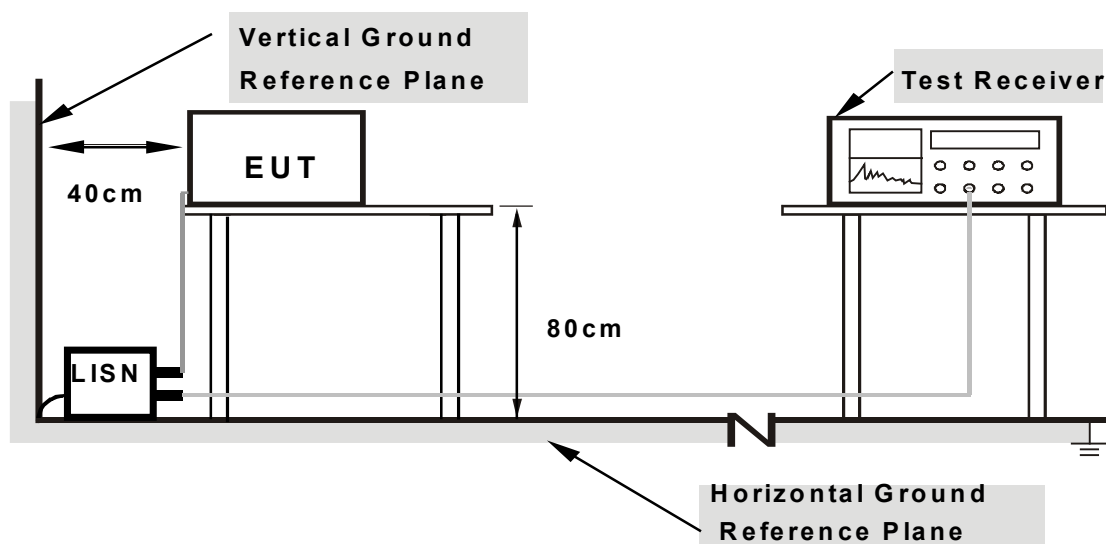

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared other computer system to act as a communication partner and placed it outside of testing area.
- The communication partner run test program “Chariot program” to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- Notebook computer sends "H" messages to printer, and the printer prints them on paper.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11g OFDM MODULATION:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 11 | PHASE | Line (L) |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 964hPa | TESTED BY | Eric Lee |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-------|--------------------------|-------|-----------------|-------|-------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.193 | 9.60 | 34.63 | - | 44.23 | - | 63.91 |
| 2 | 0.213 | 9.60 | 28.49 | - | 38.09 | - | 63.11 | 53.11 | -25.02 | - |
| 3 | 0.248 | 9.60 | 31.57 | - | 41.17 | - | 61.84 | 51.84 | -20.67 | - |
| 4 | 0.287 | 9.60 | 24.36 | - | 33.96 | - | 60.62 | 50.62 | -26.66 | - |
| 5 | 0.435 | 9.60 | 14.23 | - | 23.83 | - | 57.15 | 47.15 | -33.32 | - |
| 6 | 8.117 | 9.84 | 10.98 | - | 20.82 | - | 60.00 | 50.00 | -39.18 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

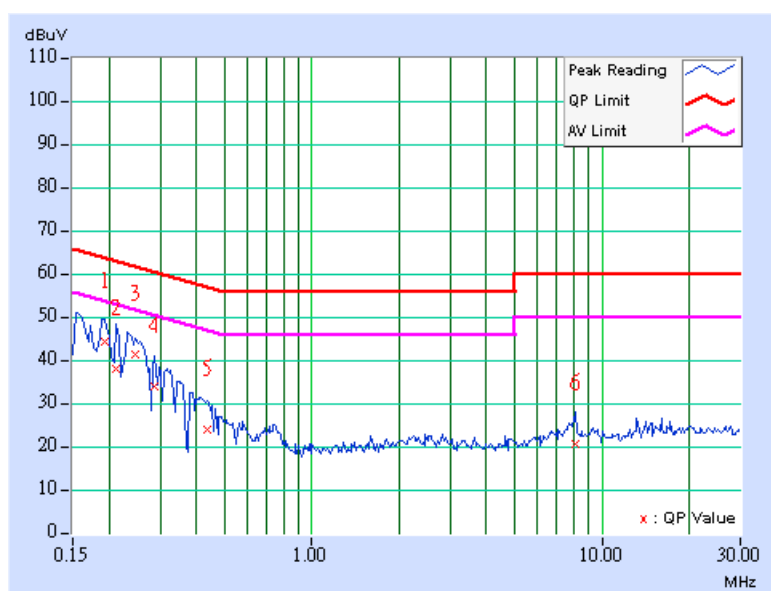

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 11 | PHASE | Neutral (N) |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 964hPa | TESTED BY | Eric Lee |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | 1 | 0.162 | 9.60 | 35.47 | - | 45.07 | - | 65.38 | 55.38 | -20.31 |
| 2 | 0.193 | 9.60 | 28.13 | - | 37.73 | - | 63.91 | 53.91 | -26.18 | - |
| 3 | 0.251 | 9.60 | 29.77 | - | 39.37 | - | 61.71 | 51.71 | -22.34 | - |
| 4 | 0.291 | 9.60 | 21.88 | - | 31.48 | - | 60.51 | 50.51 | -29.03 | - |
| 5 | 0.740 | 9.60 | 6.05 | - | 15.65 | - | 56.00 | 46.00 | -40.35 | - |
| 6 | 19.711 | 10.09 | 8.96 | - | 19.05 | - | 60.00 | 50.00 | -40.95 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

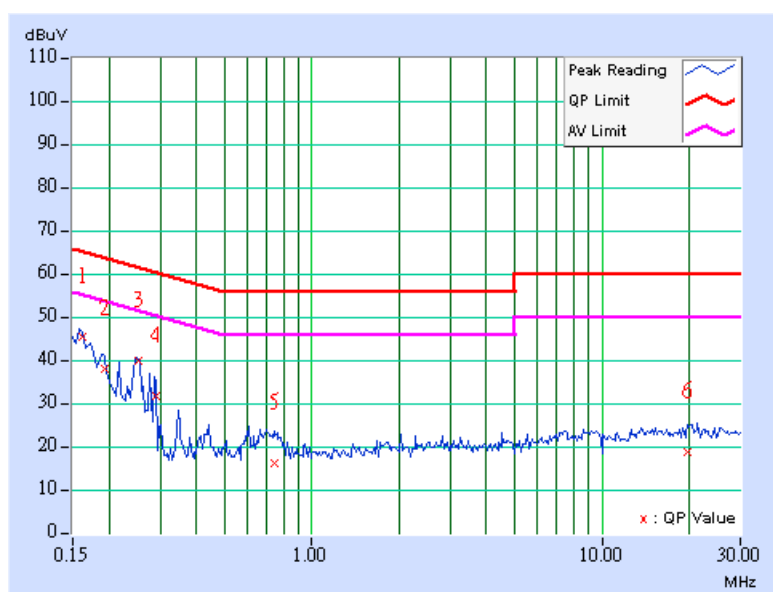


DRAFT 802.11n (20MHz) OFDM MODULATION:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 11 | PHASE | Line (L) |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6.5Mbps | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 964hPa | TESTED BY | Eric Lee |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.154 | 9.60 | 36.63 | - | 46.23 | - | 65.79 |
| 2 | 0.205 | 9.60 | 27.91 | - | 37.51 | - | 63.42 | 53.42 | -25.91 | - |
| 3 | 0.232 | 9.60 | 26.67 | - | 36.27 | - | 62.38 | 52.38 | -26.11 | - |
| 4 | 0.279 | 9.60 | 21.38 | - | 30.98 | - | 60.85 | 50.85 | -29.87 | - |
| 5 | 0.404 | 9.60 | 9.51 | - | 19.11 | - | 57.77 | 47.77 | -38.66 | - |
| 6 | 7.738 | 9.82 | 9.95 | - | 19.77 | - | 60.00 | 50.00 | -40.23 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

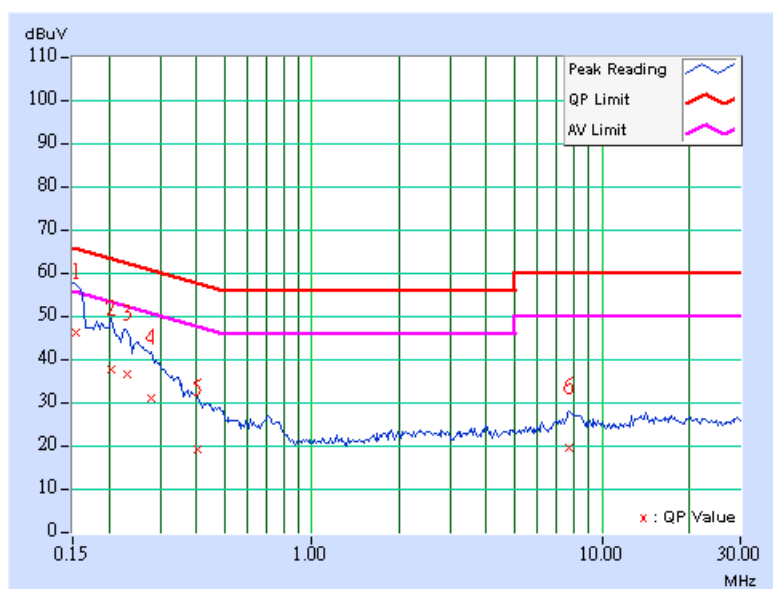

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 11 | PHASE | Neutral (N) |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6.5Mbps | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 964hPa | TESTED BY | Eric Lee |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | | | | | | | | |
| 1 | 0.158 | 9.60 | 35.83 | - | 45.43 | - | 65.58 | 55.58 | -20.15 | - |
| 2 | 0.173 | 9.60 | 30.43 | - | 40.03 | - | 64.79 | 54.79 | -24.76 | - |
| 3 | 0.213 | 9.60 | 27.79 | - | 37.39 | - | 63.11 | 53.11 | -25.72 | - |
| 4 | 0.252 | 9.60 | 29.90 | - | 39.50 | - | 61.71 | 51.71 | -22.21 | - |
| 5 | 0.283 | 9.60 | 22.10 | - | 31.70 | - | 60.73 | 50.73 | -29.03 | - |
| 6 | 9.414 | 9.88 | 7.99 | - | 17.87 | - | 60.00 | 50.00 | -42.13 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

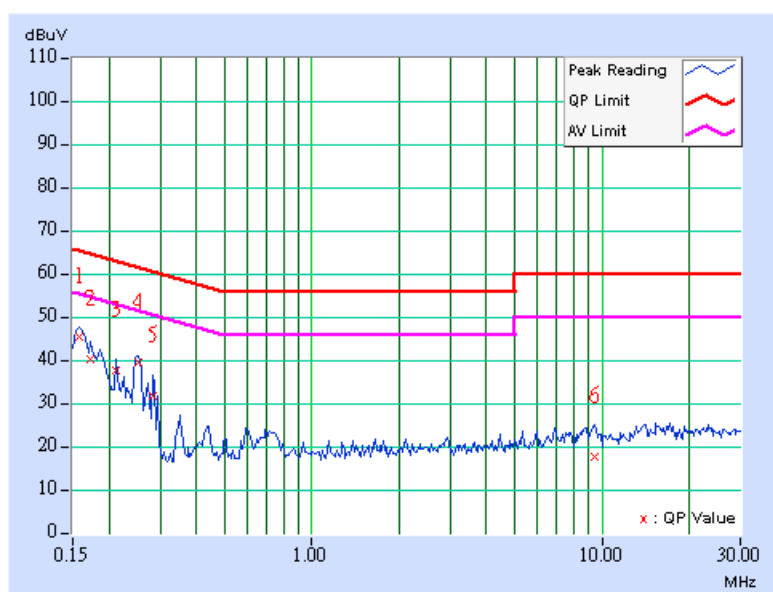


DRAFT 802.11n (40MHz) OFDM MODULATION:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 7 | PHASE | Line (L) |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 13.5Mbps | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 964hPa | TESTED BY | Eric Lee |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.154 | 9.60 | 36.14 | - | 45.74 | - | 65.79 |
| 2 | 0.185 | 9.60 | 30.10 | - | 39.70 | - | 64.25 | 54.25 | -24.55 | - |
| 3 | 0.228 | 9.60 | 25.89 | - | 35.49 | - | 62.52 | 52.52 | -27.03 | - |
| 4 | 0.255 | 9.60 | 28.69 | - | 38.29 | - | 61.58 | 51.58 | -23.29 | - |
| 5 | 0.283 | 9.60 | 25.32 | - | 34.92 | - | 60.73 | 50.73 | -25.81 | - |
| 6 | 8.172 | 9.84 | 11.37 | - | 21.21 | - | 60.00 | 50.00 | -38.79 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

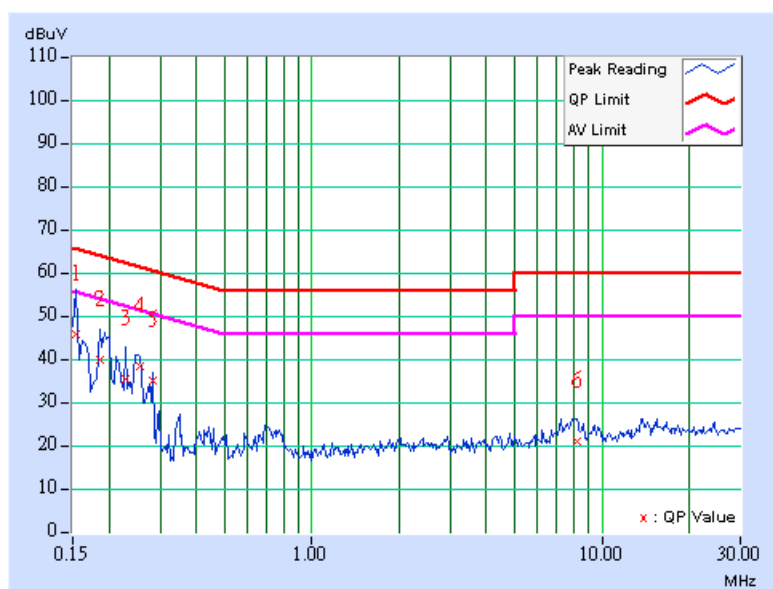

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 7 | PHASE | Neutral (N) |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 13.5Mbps | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 964hPa | TESTED BY | Eric Lee |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | | | | | | | | |
| 1 | 0.156 | 9.60 | 35.94 | - | 45.54 | - | 65.70 | 55.70 | -20.16 | - |
| 2 | 0.216 | 9.60 | 25.25 | - | 34.85 | - | 62.96 | 52.96 | -28.11 | - |
| 3 | 0.252 | 9.60 | 29.81 | - | 39.41 | - | 61.71 | 51.71 | -22.30 | - |
| 4 | 0.291 | 9.60 | 22.40 | - | 32.00 | - | 60.51 | 50.51 | -28.51 | - |
| 5 | 5.113 | 9.74 | 1.86 | - | 11.60 | - | 60.00 | 50.00 | -48.40 | - |
| 6 | 16.746 | 10.03 | 6.42 | - | 16.45 | - | 60.00 | 50.00 | -43.55 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

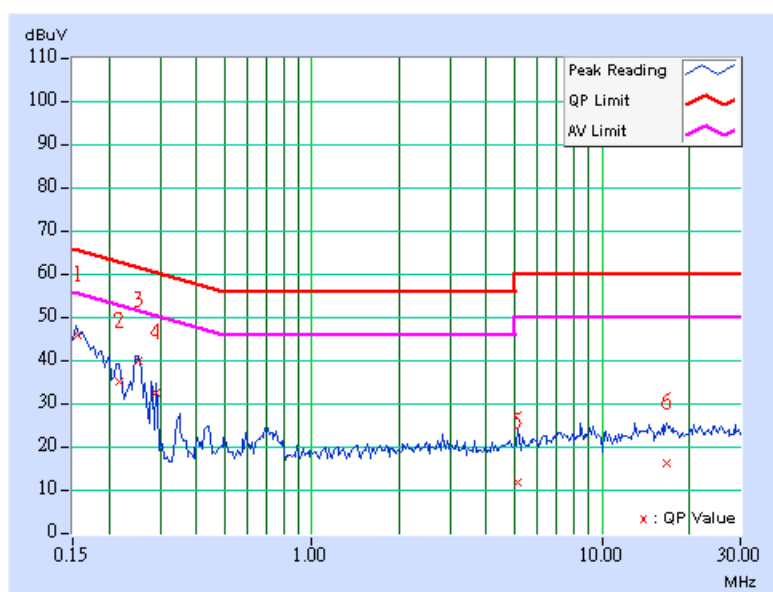

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400 / F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000 / F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|------------------------|-------------------------|------------------|
| ADVANTEST Spectrum Analyzer | R3271A | 85060311 | July 07, 2006 |
| HP Pre_Amplifier | 8449B | 3008A01922 | Oct. 02, 2006 |
| ROHDE & SCHWARZ Test Receiver | ESCS30 | 100287 | Dec. 08, 2006 |
| CHASE Broadband Antenna | VULB9168 | 138 | Dec. 21, 2006 |
| Schwarzbeck Horn_Antenna | BBHA9120 | D124 | Dec. 11, 2006 |
| Schwarzbeck Horn_Antenna | BBHA 9170 | BBHA9170153 | Jan. 05, 2007 |
| SCHWARZBECK Biconical Antenna | VHBA9123 | 459 | Jun. 26, 2006 |
| SCHWARZBECK Periodic Antenna | UPA6108 | 1148 | Jun. 26, 2006 |
| RF Switches (ARNITSU) | CS-201 | 1565157 | NA |
| RF CABLE (Chaintek) | SF102 | 22054-2 | Nov. 16. 2006 |
| RF Cable(RICHTEC) | 9913-30M | STCCAB-30M- 1GHz-021 | Jul. 16, 2006 |
| Software | ADT_Radiated_V 5.14 | NA | NA |
| CHANCE MOST Antenna Tower | AT-100 | 0203 | NA |
| CHANCE MOST Turn Table | TT-100 | 0203 | NA |

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

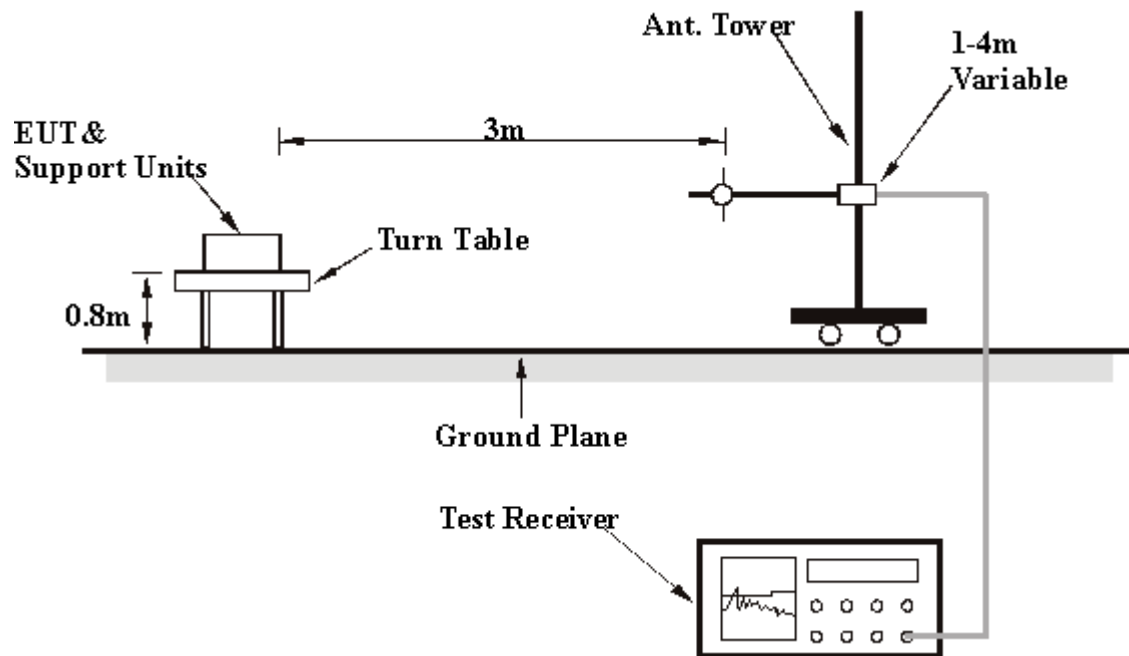

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-------------------------|----------------------|---------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | BPSK for 802.11g | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6Mbps | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 68%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 200.02 | 18.60 QP | 43.50 | -24.90 | 1.56 H | 145 | 7.40 | 11.20 |
| 2 | 250.00 | 21.40 QP | 46.00 | -24.60 | 1.48 H | 85 | 8.10 | 13.30 |
| 3 | 350.02 | 30.30 QP | 46.00 | -15.70 | 2.08 H | 17 | 13.50 | 16.80 |
| 4 | 400.03 | 29.70 QP | 46.00 | -16.30 | 1.85 H | 19 | 11.30 | 18.40 |
| 5 | 450.02 | 27.40 QP | 46.00 | -18.60 | 1.08 H | 225 | 7.70 | 19.70 |
| 6 | 500.04 | 33.80 QP | 46.00 | -12.20 | 1.45 H | 14 | 12.90 | 20.90 |
| 7 | 525.02 | 25.20 QP | 46.00 | -20.80 | 1.10 H | 1 | 3.60 | 21.60 |
| 8 | 600.03 | 30.50 QP | 46.00 | -15.50 | 1.39 H | 21 | 6.90 | 23.50 |
| 9 | 800.05 | 28.80 QP | 46.00 | -17.20 | 1.56 H | 21 | 2.20 | 26.60 |
| 10 | 850.04 | 24.10 QP | 46.00 | -21.90 | 1.72 H | 168 | -3.40 | 27.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 200.05 | 24.20 QP | 43.50 | -19.30 | 1.02 V | 18 | 13.00 | 11.20 |
| 2 | 250.02 | 26.10 QP | 46.00 | -19.90 | 1.00 V | 62 | 12.80 | 13.30 |
| 3 | 350.02 | 30.00 QP | 46.00 | -16.00 | 1.49 V | 295 | 13.10 | 16.80 |
| 4 | 400.03 | 32.60 QP | 46.00 | -13.40 | 1.26 V | 305 | 14.20 | 18.40 |
| 5 | 500.04 | 38.00 QP | 46.00 | -8.00 | 1.01 V | 92 | 17.10 | 20.90 |
| 6 | 525.01 | 30.10 QP | 46.00 | -15.90 | 1.16 V | 135 | 8.50 | 21.60 |
| 7 | 600.03 | 25.50 QP | 46.00 | -20.50 | 1.34 V | 19 | 1.90 | 23.50 |
| 8 | 675.20 | 28.20 QP | 46.00 | -17.80 | 1.06 V | 2 | 3.70 | 24.50 |
| 9 | 800.05 | 30.40 QP | 46.00 | -15.60 | 1.27 V | 36 | 3.80 | 26.60 |
| 10 | 850.06 | 27.50 QP | 46.00 | -18.50 | 1.29 V | 56 | 0.00 | 27.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------------|----------------------|---------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | BPSK for draft 802.11n (20MHz) | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6.5Mbps | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 68%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 200.02 | 17.80 QP | 43.50 | -25.70 | 1.60 H | 203 | 6.70 | 11.20 |
| 2 | 250.01 | 20.30 QP | 46.00 | -25.70 | 1.71 H | 314 | 7.00 | 13.30 |
| 3 | 350.02 | 30.10 QP | 46.00 | -15.90 | 2.45 H | 11 | 13.30 | 16.80 |
| 4 | 400.03 | 30.60 QP | 46.00 | -15.40 | 1.85 H | 21 | 12.20 | 18.40 |
| 5 | 475.04 | 26.60 QP | 46.00 | -19.40 | 1.60 H | 23 | 6.30 | 20.30 |
| 6 | 500.03 | 31.90 QP | 46.00 | -14.10 | 1.40 H | 29 | 11.00 | 20.90 |
| 7 | 525.04 | 25.40 QP | 46.00 | -20.60 | 1.64 H | 213 | 3.80 | 21.60 |
| 8 | 600.04 | 31.60 QP | 46.00 | -14.40 | 1.60 H | 1 | 8.10 | 23.50 |
| 9 | 800.06 | 28.20 QP | 46.00 | -17.80 | 1.39 H | 33 | 1.60 | 26.60 |
| 10 | 850.06 | 25.30 QP | 46.00 | -20.70 | 1.63 H | 163 | -2.10 | 27.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 200.02 | 19.80 QP | 43.50 | -23.70 | 1.00 V | 345 | 8.70 | 11.20 |
| 2 | 250.00 | 22.60 QP | 46.00 | -23.40 | 1.14 V | 1 | 9.30 | 13.30 |
| 3 | 350.02 | 28.80 QP | 46.00 | -17.20 | 1.48 V | 307 | 12.00 | 16.80 |
| 4 | 400.03 | 32.50 QP | 46.00 | -13.50 | 1.35 V | 288 | 14.10 | 18.40 |
| 5 | 475.03 | 28.90 QP | 46.00 | -17.10 | 1.00 V | 305 | 8.60 | 20.30 |
| 6 | 500.03 | 34.80 QP | 46.00 | -11.20 | 1.00 V | 326 | 13.90 | 20.90 |
| 7 | 525.04 | 27.70 QP | 46.00 | -18.30 | 1.00 V | 297 | 6.10 | 21.60 |
| 8 | 600.05 | 32.20 QP | 46.00 | -13.80 | 1.00 V | 96 | 8.70 | 23.50 |
| 9 | 800.05 | 27.50 QP | 46.00 | -18.50 | 1.10 V | 0 | 0.80 | 26.60 |
| 10 | 850.07 | 28.30 QP | 46.00 | -17.70 | 1.16 V | 21 | 0.80 | 27.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|--------------------------------|----------------------|---------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | BPSK for draft 802.11n (40MHz) | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 13.5Mbps | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 68%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 200.01 | 18.30 QP | 43.50 | -25.20 | 1.42 H | 152 | 7.10 | 11.20 |
| 2 | 250.00 | 21.20 QP | 46.00 | -24.80 | 1.58 H | 125 | 7.90 | 13.30 |
| 3 | 350.03 | 32.60 QP | 46.00 | -13.40 | 1.00 H | 258 | 15.80 | 16.80 |
| 4 | 400.03 | 31.70 QP | 46.00 | -14.30 | 1.03 H | 137 | 13.30 | 18.40 |
| 5 | 450.03 | 27.70 QP | 46.00 | -18.30 | 1.00 H | 268 | 8.00 | 19.70 |
| 6 | 500.03 | 37.20 QP | 46.00 | -8.80 | 1.37 H | 18 | 16.30 | 20.90 |
| 7 | 525.08 | 26.40 QP | 46.00 | -19.60 | 1.52 H | 185 | 4.80 | 21.60 |
| 8 | 600.04 | 28.40 QP | 46.00 | -17.60 | 1.34 H | 1 | 4.90 | 23.50 |
| 9 | 800.05 | 28.80 QP | 46.00 | -17.20 | 1.48 H | 15 | 2.10 | 26.60 |
| 10 | 850.03 | 24.30 QP | 46.00 | -21.70 | 1.75 H | 182 | -3.20 | 27.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 200.24 | 24.40 QP | 43.50 | -19.10 | 1.10 V | 7 | 13.20 | 11.20 |
| 2 | 250.00 | 25.20 QP | 46.00 | -20.80 | 1.00 V | 39 | 11.90 | 13.30 |
| 3 | 350.02 | 31.70 QP | 46.00 | -14.30 | 1.50 V | 282 | 14.90 | 16.80 |
| 4 | 400.02 | 32.80 QP | 46.00 | -13.20 | 1.22 V | 290 | 14.40 | 18.40 |
| 5 | 475.04 | 27.10 QP | 46.00 | -18.90 | 1.01 V | 295 | 6.80 | 20.30 |
| 6 | 500.04 | 39.30 QP | 46.00 | -6.70 | 1.05 V | 85 | 18.50 | 20.90 |
| 7 | 525.04 | 29.40 QP | 46.00 | -16.60 | 1.00 V | 68 | 7.80 | 21.60 |
| 8 | 600.04 | 28.30 QP | 46.00 | -17.70 | 1.00 V | 95 | 4.80 | 23.50 |
| 9 | 675.25 | 28.40 QP | 46.00 | -17.60 | 1.01 V | 347 | 3.90 | 24.50 |
| 10 | 800.05 | 27.00 QP | 46.00 | -19.00 | 1.38 V | 259 | 0.40 | 26.60 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | DBPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 1Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 60.40 PK | 74.00 | -13.60 | 1.43 H | 23 | 30.70 | 29.70 |
| 1 | 2390.00 | 51.10 AV | 54.00 | -2.90 | 1.43 H | 23 | 21.40 | 29.70 |
| 2 | *2412.00 | 110.30 PK | | | 1.43 H | 23 | 80.50 | 29.80 |
| 2 | *2412.00 | 107.20 AV | | | 1.43 H | 23 | 77.40 | 29.80 |
| 3 | 3216.00 | 45.50 PK | 74.00 | -28.50 | 1.38 H | 8 | 13.50 | 32.00 |
| 3 | 3216.00 | 40.50 AV | 54.00 | -13.50 | 1.38 H | 8 | 8.50 | 32.00 |
| 4 | 4824.00 | 51.30 PK | 74.00 | -22.70 | 1.32 H | 320 | 16.20 | 35.10 |
| 4 | 4824.00 | 48.70 AV | 54.00 | -5.30 | 1.32 H | 320 | 13.60 | 35.10 |
| 5 | 7236.00 | 51.30 PK | 74.00 | -22.70 | 1.72 H | 77 | 10.80 | 40.50 |
| 5 | 7236.00 | 41.20 AV | 54.00 | -12.80 | 1.72 H | 77 | 0.70 | 40.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 53.00 PK | 74.00 | -21.00 | 1.00 V | 110 | 23.30 | 29.70 |
| 1 | 2390.00 | 44.00 AV | 54.00 | -10.00 | 1.00 V | 110 | 14.30 | 29.70 |
| 2 | *2412.00 | 97.60 PK | | | 1.00 V | 110 | 67.80 | 29.80 |
| 2 | *2412.00 | 95.00 AV | | | 1.00 V | 110 | 65.20 | 29.80 |
| 3 | 3216.00 | 49.80 PK | 74.00 | -24.20 | 1.28 V | 23 | 17.80 | 32.00 |
| 3 | 3216.00 | 47.10 AV | 54.00 | -6.90 | 1.28 V | 23 | 15.10 | 32.00 |
| 4 | 4824.00 | 52.10 PK | 74.00 | -21.90 | 1.18 V | 14 | 17.00 | 35.10 |
| 4 | 4824.00 | 49.60 AV | 54.00 | -4.40 | 1.18 V | 14 | 14.50 | 35.10 |
| 5 | 7236.00 | 50.50 PK | 74.00 | -23.50 | 1.84 V | 7 | 10.00 | 40.50 |
| 5 | 7236.00 | 42.00 AV | 54.00 | -12.00 | 1.84 V | 7 | 1.50 | 40.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | DBPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 1Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 110.20 PK | | | 1.35 H | 10 | 80.30 | 29.90 |
| 1 | *2437.00 | 105.70 AV | | | 1.35 H | 10 | 75.80 | 29.90 |
| 2 | 3249.00 | 47.90 PK | 74.00 | -26.10 | 1.44 H | 250 | 15.80 | 32.10 |
| 2 | 3249.00 | 45.20 AV | 54.00 | -8.80 | 1.44 H | 250 | 13.10 | 32.10 |
| 3 | 4874.00 | 51.10 PK | 74.00 | -22.90 | 1.26 H | 325 | 15.80 | 35.30 |
| 3 | 4874.00 | 49.20 AV | 54.00 | -4.80 | 1.26 H | 325 | 13.90 | 35.30 |
| 4 | 7311.00 | 71.10 PK | 74.00 | -2.90 | 1.41 H | 234 | 30.40 | 40.70 |
| 4 | 7311.00 | 43.70 AV | 54.00 | -10.30 | 1.41 H | 234 | 3.00 | 40.70 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 103.40 PK | | | 1.26 V | 143 | 73.50 | 29.90 |
| 1 | *2437.00 | 97.10 AV | | | 1.26 V | 143 | 67.20 | 29.90 |
| 2 | 3249.00 | 50.50 PK | 74.00 | -23.50 | 1.43 V | 22 | 18.40 | 32.10 |
| 2 | 3249.00 | 48.50 AV | 54.00 | -5.50 | 1.43 V | 22 | 16.40 | 32.10 |
| 3 | 4874.00 | 52.20 PK | 74.00 | -21.80 | 1.47 V | 0 | 16.90 | 35.30 |
| 3 | 4874.00 | 45.50 AV | 54.00 | -8.50 | 1.47 V | 0 | 10.20 | 35.30 |
| 4 | 7311.00 | 52.10 PK | 74.00 | -21.90 | 1.80 V | 6 | 11.40 | 40.70 |
| 4 | 7311.00 | 46.20 AV | 54.00 | -7.80 | 1.80 V | 6 | 5.50 | 40.70 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | DBPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 1Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 105.30 PK | | | 1.00 H | 80 | 75.30 | 30.00 |
| 1 | *2462.00 | 102.90 AV | | | 1.00 H | 80 | 72.90 | 30.00 |
| 2 | 2483.50 | 57.00 PK | 74.00 | -17.00 | 1.00 H | 80 | 26.80 | 30.10 |
| 2 | 2483.50 | 47.30 AV | 54.00 | -6.70 | 1.00 H | 80 | 17.20 | 30.10 |
| 3 | 3282.00 | 46.10 PK | 74.00 | -27.90 | 1.18 H | 14 | 14.00 | 32.20 |
| 3 | 3282.00 | 42.10 AV | 54.00 | -11.90 | 1.18 H | 14 | 10.00 | 32.20 |
| 4 | 4924.00 | 50.10 PK | 74.00 | -23.90 | 1.20 H | 340 | 14.50 | 35.50 |
| 4 | 4924.00 | 47.00 AV | 54.00 | -7.00 | 1.20 H | 340 | 11.40 | 35.50 |
| 5 | 7386.00 | 50.40 PK | 74.00 | -23.60 | 1.43 H | 58 | 9.60 | 40.80 |
| 5 | 7386.00 | 40.90 AV | 54.00 | -13.10 | 1.43 H | 58 | 0.10 | 40.80 |



| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 98.90 PK | | | 1.00 V | 103 | 68.90 | 30.00 |
| 1 | *2462.00 | 96.60 AV | | | 1.00 V | 103 | 66.60 | 30.00 |
| 2 | 2483.50 | 53.20 PK | 74.00 | -20.80 | 1.00 V | 103 | 23.10 | 30.10 |
| 2 | 2483.50 | 44.20 AV | 54.00 | -9.80 | 1.00 V | 103 | 14.10 | 30.10 |
| 3 | 3282.00 | 51.20 PK | 74.00 | -22.80 | 1.42 V | 13 | 19.10 | 32.20 |
| 3 | 3282.00 | 48.80 AV | 54.00 | -5.20 | 1.42 V | 13 | 16.70 | 32.20 |
| 4 | 4924.00 | 46.50 PK | 74.00 | -27.50 | 1.73 V | 2 | 10.90 | 35.50 |
| 4 | 4924.00 | 41.80 AV | 54.00 | -12.20 | 1.73 V | 2 | 6.20 | 35.50 |
| 5 | 7386.00 | 49.90 PK | 74.00 | -24.10 | 1.41 V | 0 | 9.10 | 40.80 |
| 5 | 7386.00 | 39.80 AV | 54.00 | -14.20 | 1.41 V | 0 | -1.00 | 40.80 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

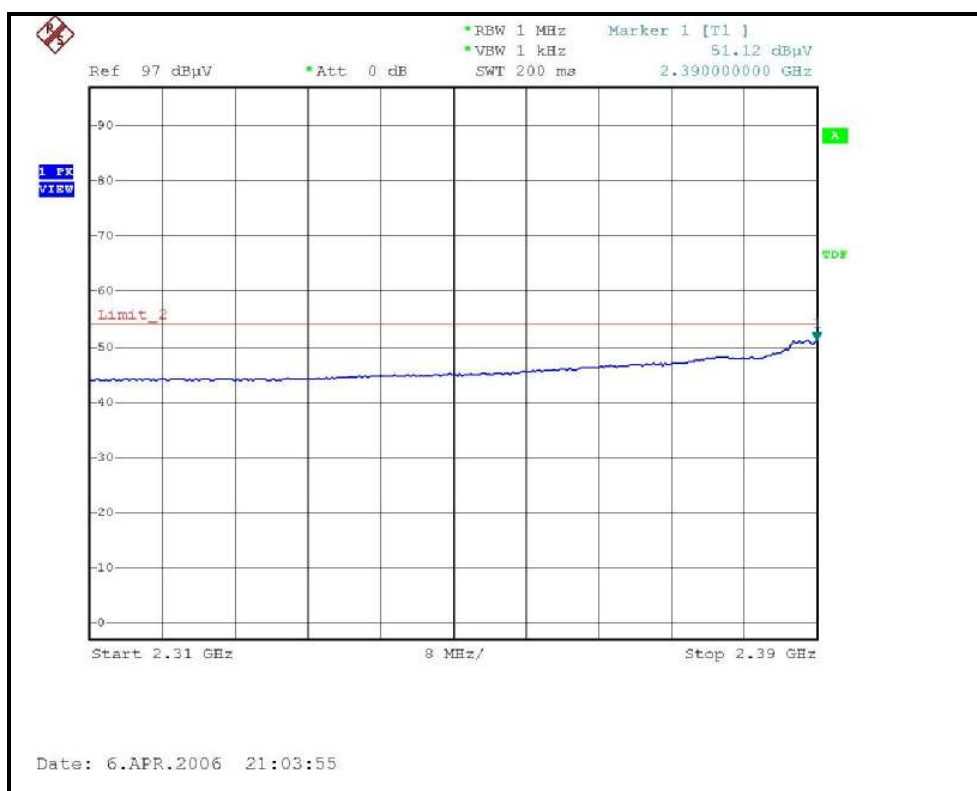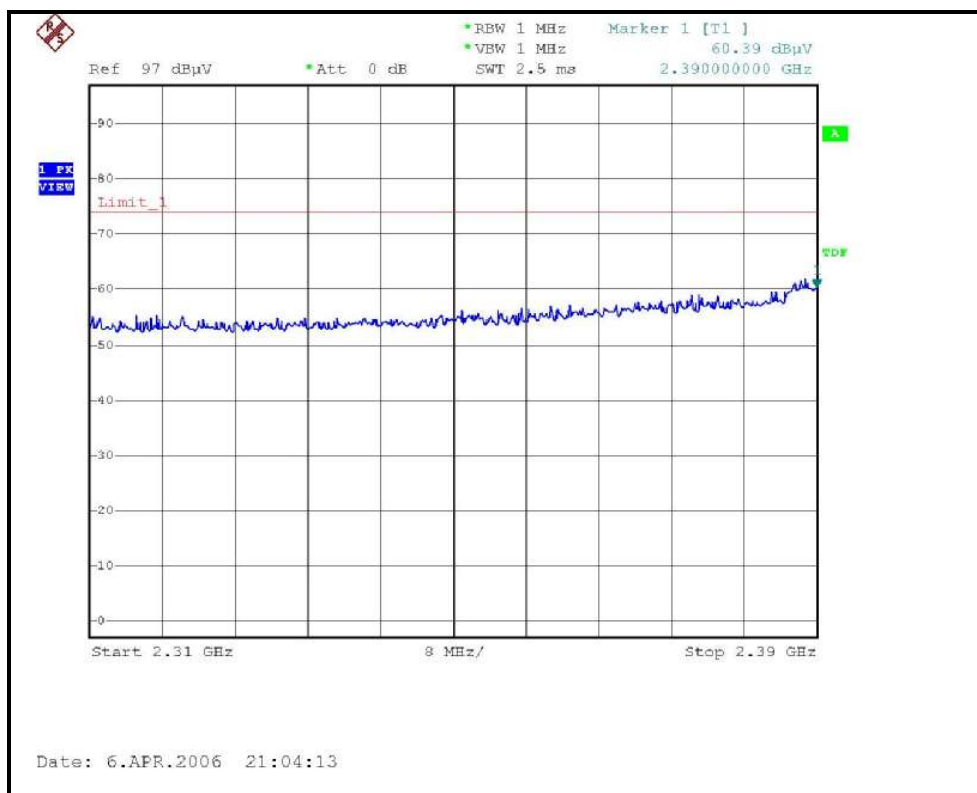



RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

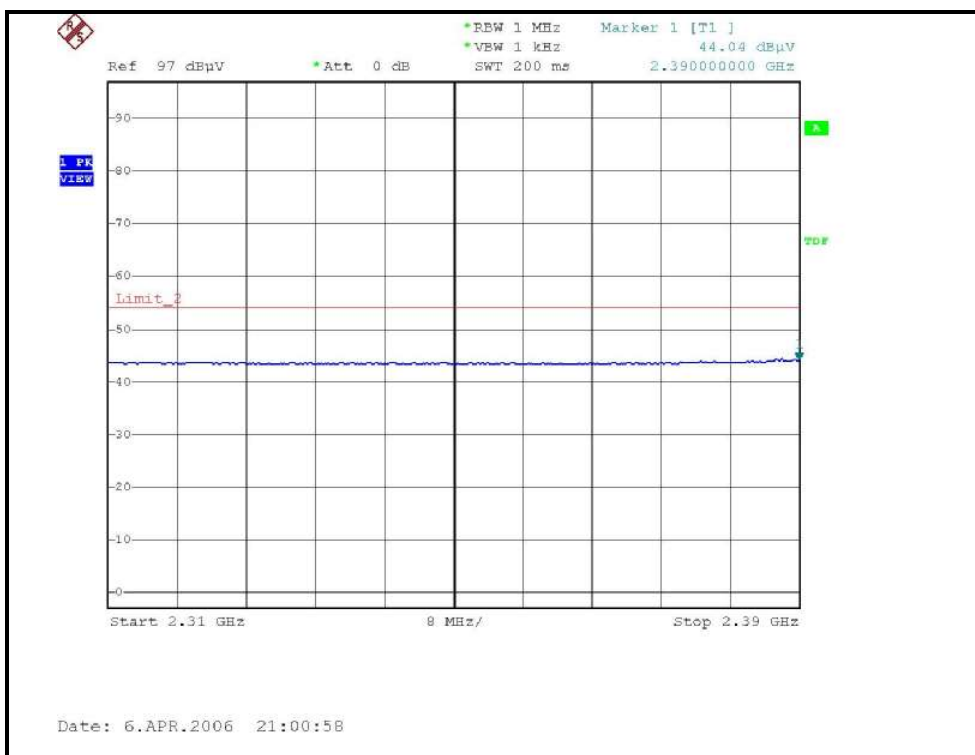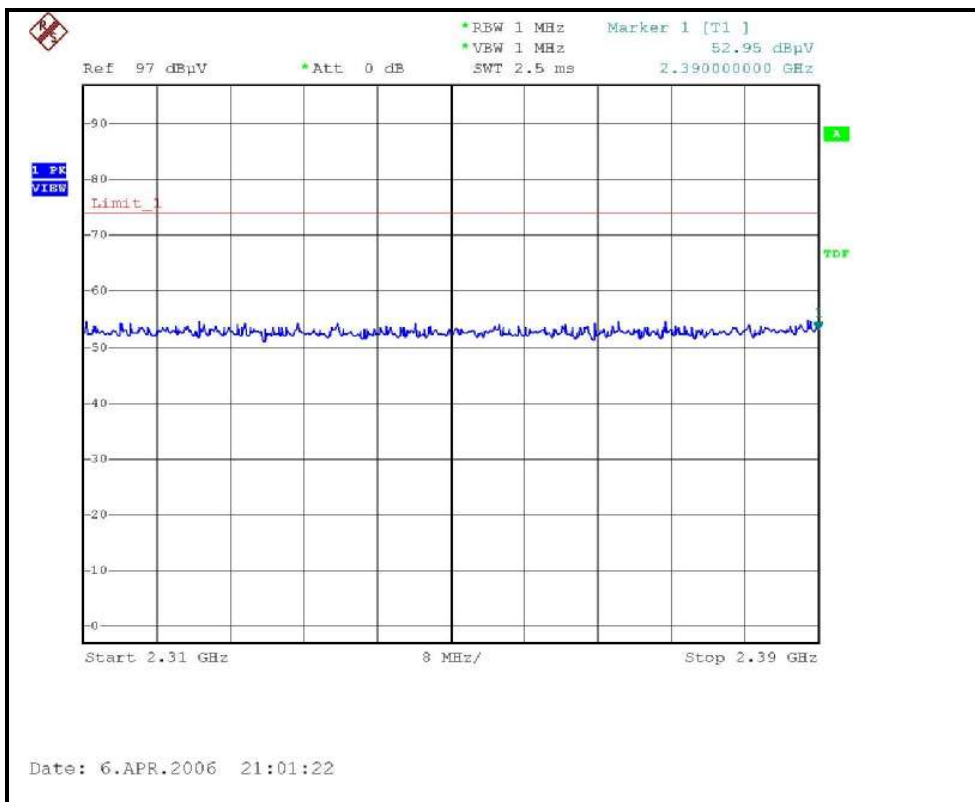

RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

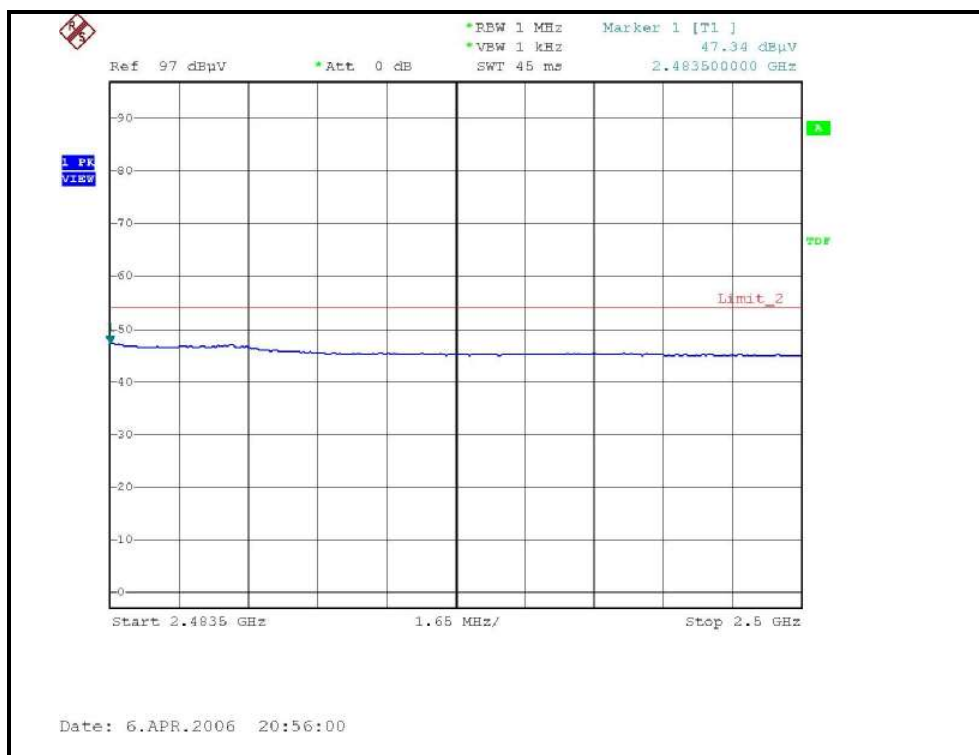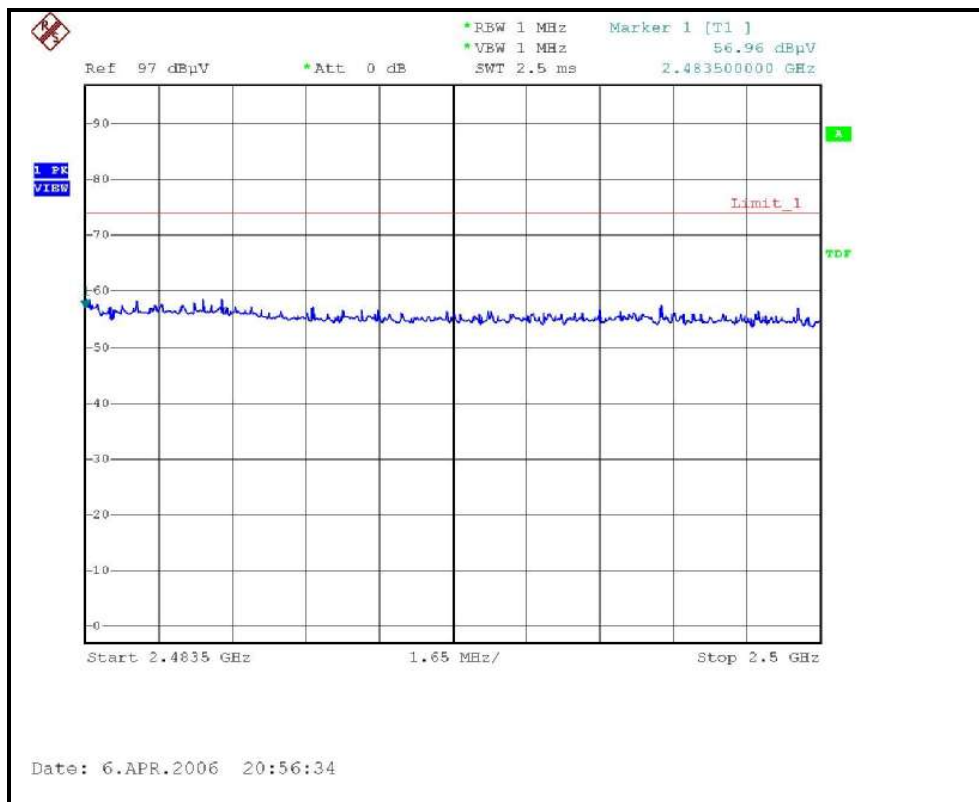

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

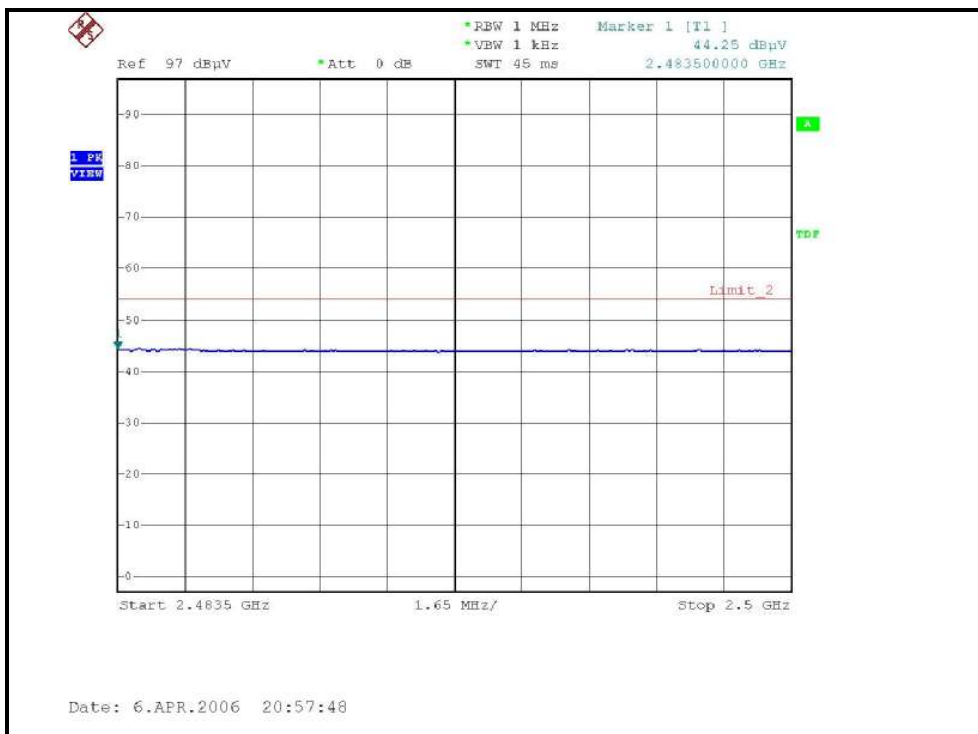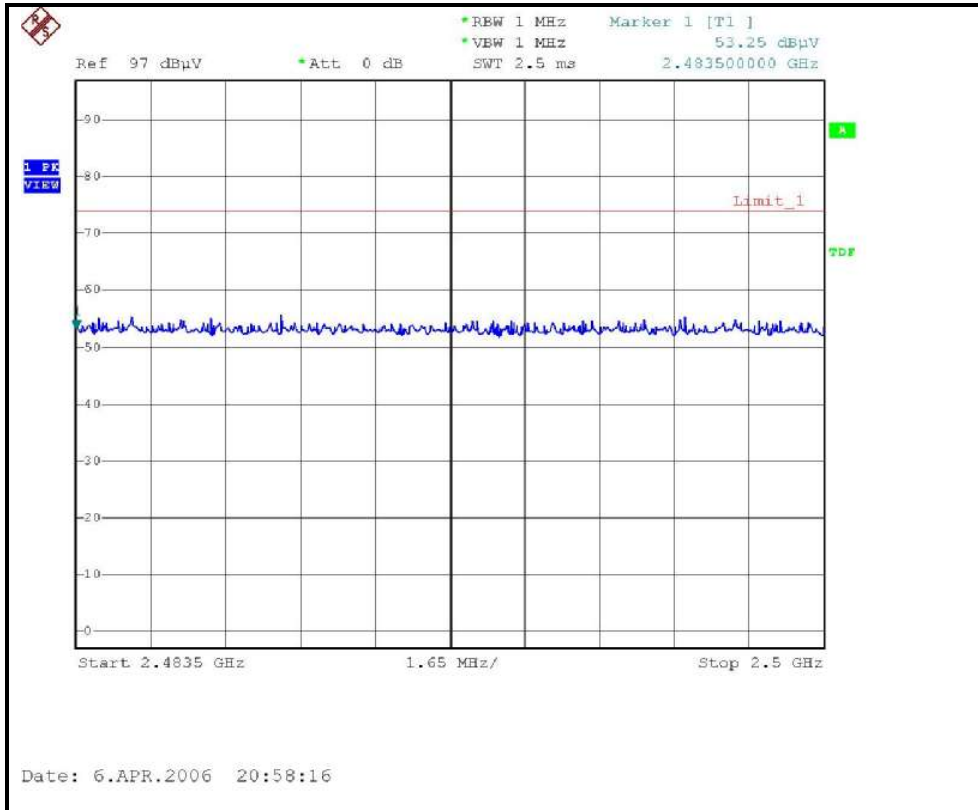

802.11g OFDM MODULATION:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 65.10 PK | 74.00 | -8.90 | 1.15 H | 15 | 35.40 | 29.70 |
| 1 | 2390.00 | 48.70 AV | 54.00 | -5.30 | 1.15 H | 15 | 19.00 | 29.70 |
| 2 | *2412.00 | 110.30 PK | | | 1.15 H | 15 | 80.50 | 29.80 |
| 2 | *2412.00 | 99.80 AV | | | 1.15 H | 15 | 70.00 | 29.80 |
| 3 | 3216.00 | 48.90 PK | 74.00 | -25.10 | 1.17 H | 27 | 16.90 | 32.00 |
| 3 | 3216.00 | 46.10 AV | 54.00 | -7.90 | 1.17 H | 27 | 14.10 | 32.00 |
| 4 | 4824.00 | 54.30 PK | 74.00 | -19.70 | 1.09 H | 266 | 19.20 | 35.10 |
| 4 | 4824.00 | 48.10 AV | 54.00 | -5.90 | 1.09 H | 266 | 13.00 | 35.10 |
| 5 | 7236.00 | 48.00 PK | 74.00 | -26.00 | 1.18 H | 340 | 7.50 | 40.50 |
| 5 | 7236.00 | 38.30 AV | 54.00 | -15.70 | 1.18 H | 340 | -2.20 | 40.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 59.70 PK | 74.00 | -14.30 | 1.14 V | 144 | 30.00 | 29.70 |
| 1 | 2390.00 | 45.40 AV | 54.00 | -8.60 | 1.14 V | 144 | 15.70 | 29.70 |
| 2 | *2412.00 | 102.00 PK | | | 1.14 V | 144 | 72.20 | 29.80 |
| 2 | *2412.00 | 91.60 AV | | | 1.14 V | 144 | 61.80 | 29.80 |
| 3 | 3216.00 | 49.00 PK | 74.00 | -25.00 | 1.30 V | 44 | 17.00 | 32.00 |
| 3 | 3216.00 | 46.00 AV | 54.00 | -8.00 | 1.30 V | 44 | 14.00 | 32.00 |
| 4 | 4824.00 | 49.90 PK | 74.00 | -24.10 | 1.18 V | 46 | 14.80 | 35.10 |
| 4 | 4824.00 | 43.70 AV | 54.00 | -10.30 | 1.18 V | 46 | 8.60 | 35.10 |
| 5 | 7236.00 | 53.60 PK | 74.00 | -20.40 | 1.78 V | 10 | 13.10 | 40.50 |
| 5 | 7236.00 | 43.00 AV | 54.00 | -11.00 | 1.78 V | 10 | 2.50 | 40.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 108.70 PK | | | 1.12 H | 1 | 78.80 | 29.90 |
| 1 | *2437.00 | 98.60 AV | | | 1.12 H | 1 | 68.70 | 29.90 |
| 2 | 3249.00 | 47.70 PK | 74.00 | -26.30 | 1.11 H | 295 | 15.60 | 32.10 |
| 2 | 3249.00 | 44.50 AV | 54.00 | -9.50 | 1.11 H | 295 | 12.40 | 32.10 |
| 3 | 4874.00 | 55.50 PK | 74.00 | -18.50 | 1.00 H | 264 | 20.20 | 35.30 |
| 3 | 4874.00 | 48.90 AV | 54.00 | -5.10 | 1.00 H | 264 | 13.60 | 35.30 |
| 4 | 7311.00 | 49.10 PK | 74.00 | -24.90 | 1.22 H | 44 | 8.40 | 40.70 |
| 4 | 7311.00 | 38.60 AV | 54.00 | -15.40 | 1.22 H | 44 | -2.10 | 40.70 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 98.90 PK | | | 1.04 V | 124 | 69.00 | 29.90 |
| 1 | *2437.00 | 88.40 AV | | | 1.04 V | 124 | 58.50 | 29.90 |
| 2 | 3249.00 | 50.90 PK | 74.00 | -23.10 | 1.43 V | 23 | 18.80 | 32.10 |
| 2 | 3249.00 | 48.70 AV | 54.00 | -5.30 | 1.43 V | 23 | 16.60 | 32.10 |
| 3 | 4874.00 | 50.00 PK | 74.00 | -24.00 | 1.32 V | 46 | 14.70 | 35.30 |
| 3 | 4874.00 | 44.70 AV | 54.00 | -9.30 | 1.32 V | 46 | 9.40 | 35.30 |
| 4 | 7311.00 | 50.70 PK | 74.00 | -23.30 | 1.75 V | 20 | 10.00 | 40.70 |
| 4 | 7311.00 | 40.50 AV | 54.00 | -13.50 | 1.75 V | 20 | -0.20 | 40.70 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 108.60 PK | | | 1.12 H | 15 | 78.60 | 30.00 |
| 1 | *2462.00 | 98.20 AV | | | 1.12 H | 15 | 68.20 | 30.00 |
| 2 | 2483.50 | 60.70 PK | 74.00 | -13.30 | 1.12 H | 15 | 30.60 | 30.10 |
| 2 | 2483.50 | 47.70 AV | 54.00 | -6.30 | 1.12 H | 15 | 17.50 | 30.10 |
| 3 | 3282.00 | 46.60 PK | 74.00 | -27.40 | 1.20 H | 30 | 14.50 | 32.20 |
| 3 | 3282.00 | 43.70 AV | 54.00 | -10.30 | 1.20 H | 30 | 11.60 | 32.20 |
| 4 | 4924.00 | 51.40 PK | 74.00 | -22.60 | 1.20 H | 306 | 15.80 | 35.50 |
| 4 | 4924.00 | 45.40 AV | 54.00 | -8.60 | 1.20 H | 306 | 9.80 | 35.50 |
| 5 | 7386.00 | 49.70 PK | 74.00 | -24.30 | 1.40 H | 24 | 8.90 | 40.80 |
| 5 | 7386.00 | 38.60 AV | 54.00 | -15.40 | 1.40 H | 24 | -2.20 | 40.80 |



| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 102.80 PK | | | 1.13 V | 145 | 72.80 | 30.00 |
| 1 | *2462.00 | 91.90 AV | | | 1.13 V | 145 | 61.90 | 30.00 |
| 2 | 2483.50 | 56.50 PK | 74.00 | -17.50 | 1.13 V | 145 | 26.40 | 30.10 |
| 2 | 2483.50 | 45.10 AV | 54.00 | -8.90 | 1.13 V | 145 | 15.00 | 30.10 |
| 3 | 3282.00 | 49.60 PK | 74.00 | -24.40 | 1.24 V | 11 | 17.50 | 32.20 |
| 3 | 3282.00 | 47.30 AV | 54.00 | -6.70 | 1.24 V | 11 | 15.20 | 32.20 |
| 4 | 4924.00 | 49.90 PK | 74.00 | -24.10 | 1.48 V | 8 | 14.30 | 35.50 |
| 4 | 4924.00 | 43.40 AV | 54.00 | -10.60 | 1.48 V | 8 | 7.80 | 35.50 |
| 5 | 7386.00 | 52.00 PK | 74.00 | -22.00 | 1.77 V | 12 | 11.20 | 40.80 |
| 5 | 7386.00 | 41.70 AV | 54.00 | -12.30 | 1.77 V | 12 | 0.90 | 40.80 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

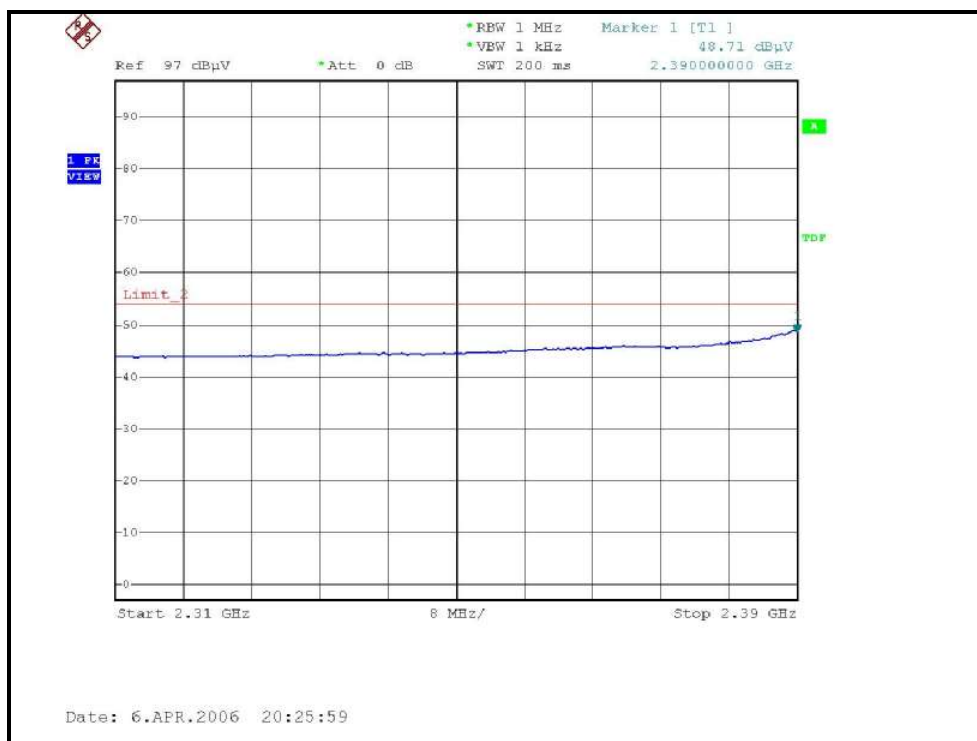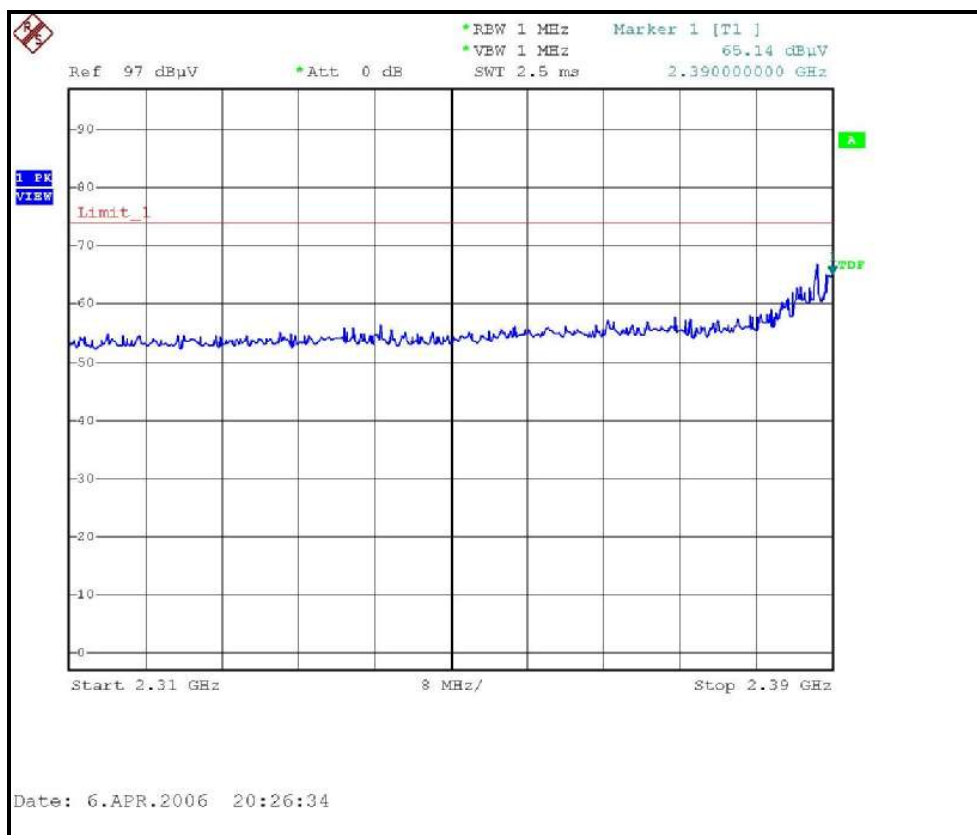



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

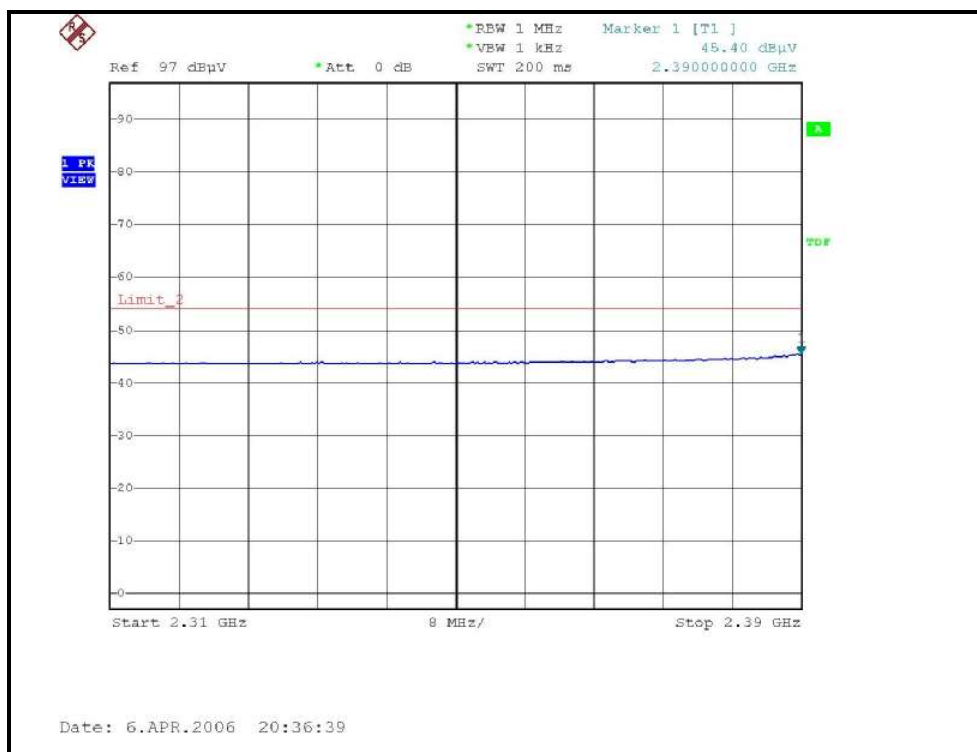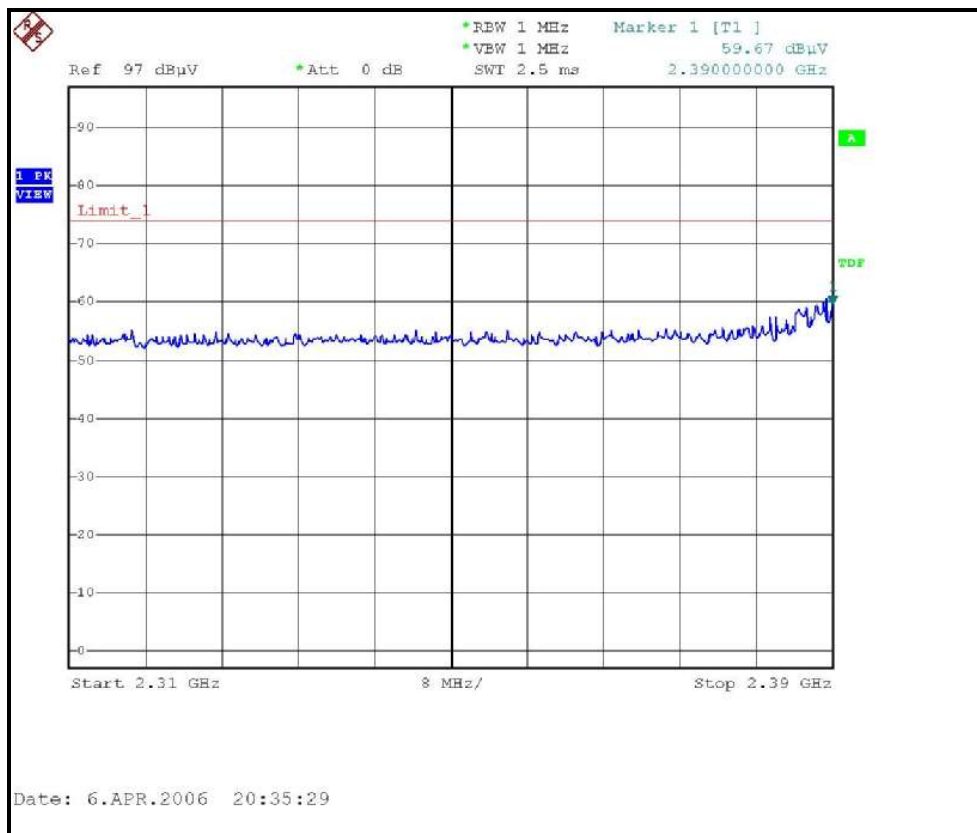

RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

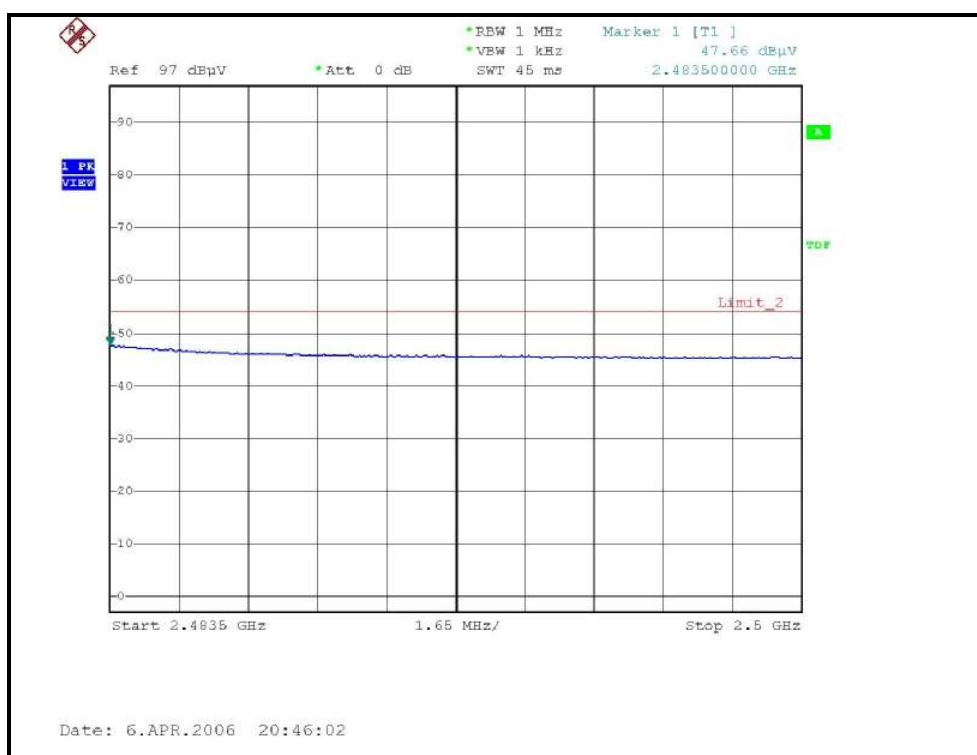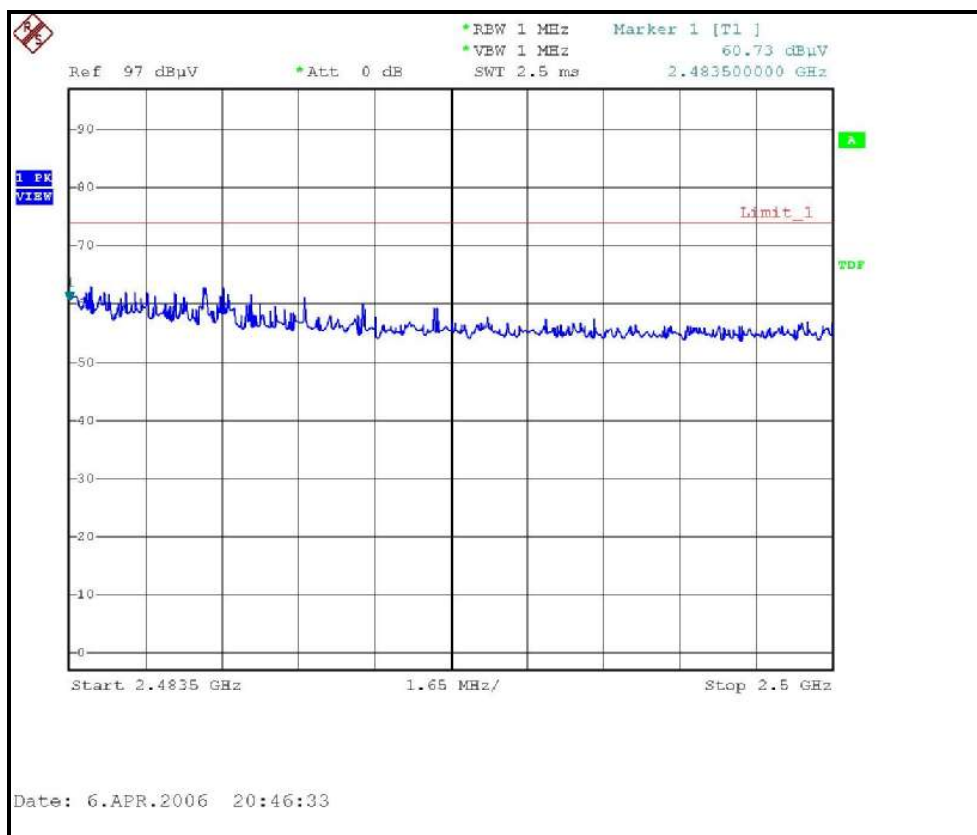

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

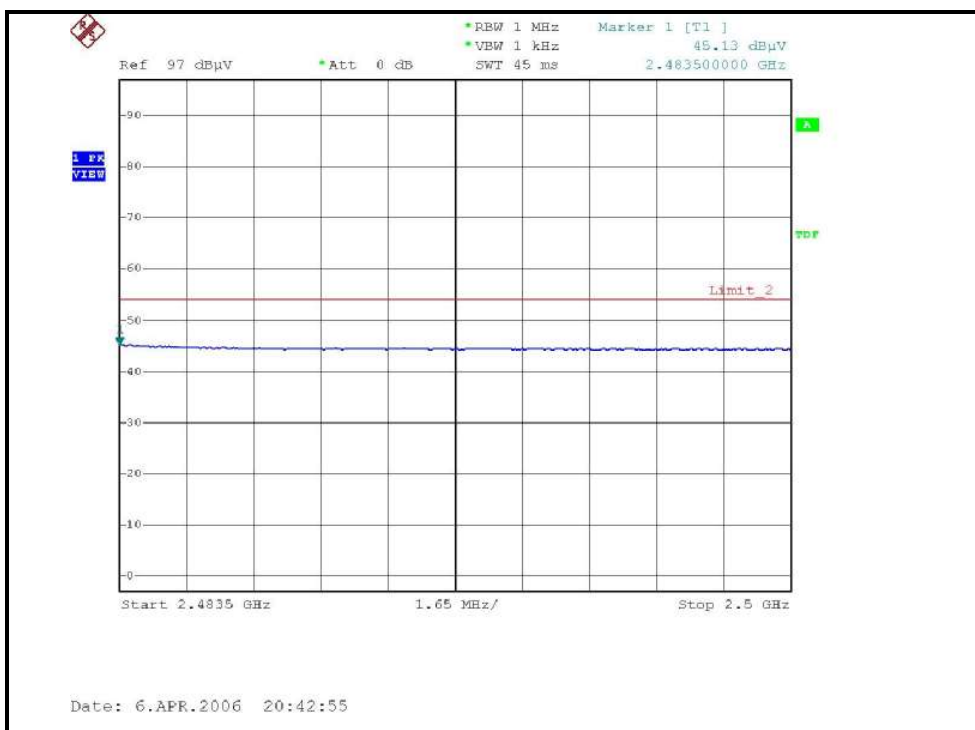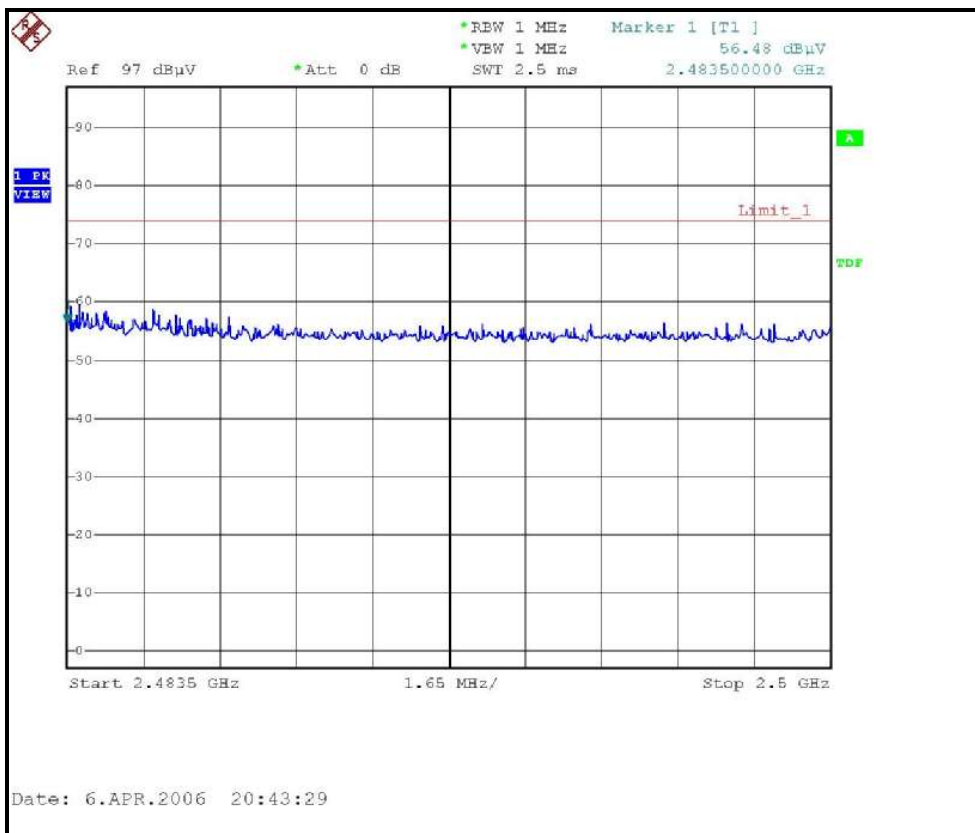

DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6.5Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 56.70 PK | 74.00 | -17.30 | 1.15 H | 22 | 27.00 | 29.70 |
| 1 | 2390.00 | 45.40 AV | 54.00 | -8.60 | 1.15 H | 22 | 15.70 | 29.70 |
| 2 | *2412.00 | 108.50 PK | | | 1.15 H | 22 | 78.60 | 29.80 |
| 2 | *2412.00 | 98.20 AV | | | 1.15 H | 22 | 68.40 | 29.80 |
| 3 | 3216.00 | 47.10 PK | 74.00 | -26.90 | 1.78 H | 12 | 15.10 | 32.00 |
| 3 | 3216.00 | 41.60 AV | 54.00 | -12.40 | 1.78 H | 12 | 9.60 | 32.00 |
| 4 | 4824.00 | 46.60 PK | 74.00 | -27.40 | 1.00 H | 90 | 11.50 | 35.10 |
| 4 | 4824.00 | 39.90 AV | 54.00 | -14.10 | 1.00 H | 90 | 4.80 | 35.10 |
| 5 | 7236.00 | 48.10 PK | 74.00 | -25.90 | 1.07 H | 44 | 7.60 | 40.50 |
| 5 | 7236.00 | 36.80 AV | 54.00 | -17.20 | 1.07 H | 44 | -3.70 | 40.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 53.70 PK | 74.00 | -20.30 | 1.04 V | 127 | 24.00 | 29.70 |
| 1 | 2390.00 | 43.00 AV | 54.00 | -11.00 | 1.04 V | 127 | 13.30 | 29.70 |
| 2 | *2412.00 | 98.80 PK | | | 1.04 V | 127 | 68.90 | 29.80 |
| 2 | *2412.00 | 87.30 AV | | | 1.04 V | 127 | 57.40 | 29.80 |
| 3 | 3216.00 | 48.20 PK | 74.00 | -25.80 | 1.13 V | 51 | 16.20 | 32.00 |
| 3 | 3216.00 | 45.20 AV | 54.00 | -8.80 | 1.13 V | 51 | 13.20 | 32.00 |
| 4 | 4824.00 | 49.00 PK | 74.00 | -25.00 | 1.80 V | 22 | 13.90 | 35.10 |
| 4 | 4824.00 | 43.30 AV | 54.00 | -10.70 | 1.80 V | 22 | 8.20 | 35.10 |
| 5 | 7236.00 | 48.30 PK | 74.00 | -25.70 | 1.07 V | 300 | 7.80 | 40.50 |
| 5 | 7236.00 | 37.00 AV | 54.00 | -17.00 | 1.07 V | 300 | -3.50 | 40.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6.5Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 104.50 PK | | | 1.12 H | 26 | 74.60 | 29.90 |
| 1 | *2437.00 | 94.70 AV | | | 1.12 H | 26 | 64.80 | 29.90 |
| 2 | 3249.00 | 47.00 PK | 74.00 | -27.00 | 1.18 H | 218 | 14.90 | 32.10 |
| 2 | 3249.00 | 43.90 AV | 54.00 | -10.10 | 1.18 H | 218 | 11.80 | 32.10 |
| 3 | 4874.00 | 52.70 PK | 74.00 | -21.30 | 1.07 H | 246 | 17.40 | 35.30 |
| 3 | 4874.00 | 47.10 AV | 54.00 | -6.90 | 1.07 H | 246 | 11.80 | 35.30 |
| 4 | 7311.00 | 47.30 PK | 74.00 | -26.70 | 1.00 H | 360 | 6.60 | 40.70 |
| 4 | 7311.00 | 36.90 AV | 54.00 | -17.10 | 1.00 H | 360 | -3.70 | 40.70 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 95.30 PK | | | 1.21 V | 169 | 65.40 | 29.90 |
| 1 | *2437.00 | 85.60 AV | | | 1.21 V | 169 | 55.70 | 29.90 |
| 2 | 3249.00 | 51.10 PK | 74.00 | -22.90 | 1.42 V | 9 | 19.00 | 32.10 |
| 2 | 3249.00 | 48.90 AV | 54.00 | -5.10 | 1.42 V | 9 | 16.80 | 32.10 |
| 3 | 4874.00 | 50.90 PK | 74.00 | -23.10 | 1.35 V | 11 | 15.60 | 35.30 |
| 3 | 4874.00 | 46.90 AV | 54.00 | -7.10 | 1.35 V | 11 | 11.60 | 35.30 |
| 4 | 7311.00 | 47.10 PK | 74.00 | -26.90 | 1.00 V | 360 | 6.40 | 40.70 |
| 4 | 7311.00 | 36.60 AV | 54.00 | -17.40 | 1.00 V | 360 | -4.00 | 40.70 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 6.5Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 106.40 PK | | | 1.11 H | 30 | 76.40 | 30.00 |
| 1 | *2462.00 | 96.50 AV | | | 1.11 H | 30 | 66.50 | 30.00 |
| 2 | 2483.50 | 54.70 PK | 74.00 | -19.30 | 1.11 H | 30 | 24.60 | 30.10 |
| 2 | 2483.50 | 44.90 AV | 54.00 | -9.10 | 1.11 H | 30 | 14.70 | 30.10 |
| 3 | 3282.00 | 45.90 PK | 74.00 | -28.10 | 1.03 H | 37 | 13.80 | 32.20 |
| 3 | 3282.00 | 41.00 AV | 54.00 | -13.00 | 1.03 H | 37 | 8.90 | 32.20 |
| 4 | 4924.00 | 46.00 PK | 74.00 | -28.00 | 1.74 H | 300 | 10.40 | 35.50 |
| 4 | 4924.00 | 40.00 AV | 54.00 | -14.00 | 1.74 H | 300 | 4.40 | 35.50 |
| 5 | 7386.00 | 47.30 PK | 74.00 | -26.70 | 1.25 H | 72 | 6.50 | 40.80 |
| 5 | 7386.00 | 37.50 AV | 54.00 | -16.50 | 1.25 H | 72 | -3.30 | 40.80 |



| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 97.60 PK | | | 1.06 V | 148 | 67.50 | 30.00 |
| 1 | *2462.00 | 88.20 AV | | | 1.06 V | 148 | 58.20 | 30.00 |
| 2 | 2483.50 | 54.00 PK | 74.00 | -20.00 | 1.06 V | 148 | 23.90 | 30.10 |
| 2 | 2483.50 | 43.50 AV | 54.00 | -10.50 | 1.06 V | 148 | 13.30 | 30.10 |
| 3 | 3282.00 | 50.40 PK | 74.00 | -23.60 | 1.08 V | 17 | 18.30 | 32.20 |
| 3 | 3282.00 | 48.00 AV | 54.00 | -6.00 | 1.08 V | 17 | 15.80 | 32.20 |
| 4 | 4924.00 | 48.00 PK | 74.00 | -26.00 | 1.05 V | 293 | 12.40 | 35.50 |
| 4 | 4924.00 | 44.10 AV | 54.00 | -9.90 | 1.05 V | 293 | 8.50 | 35.50 |
| 5 | 7386.00 | 47.60 PK | 74.00 | -26.40 | 1.08 V | 22 | 6.80 | 40.80 |
| 5 | 7386.00 | 37.70 AV | 54.00 | -16.30 | 1.08 V | 22 | -3.10 | 40.80 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH1, HORIZONTAL)

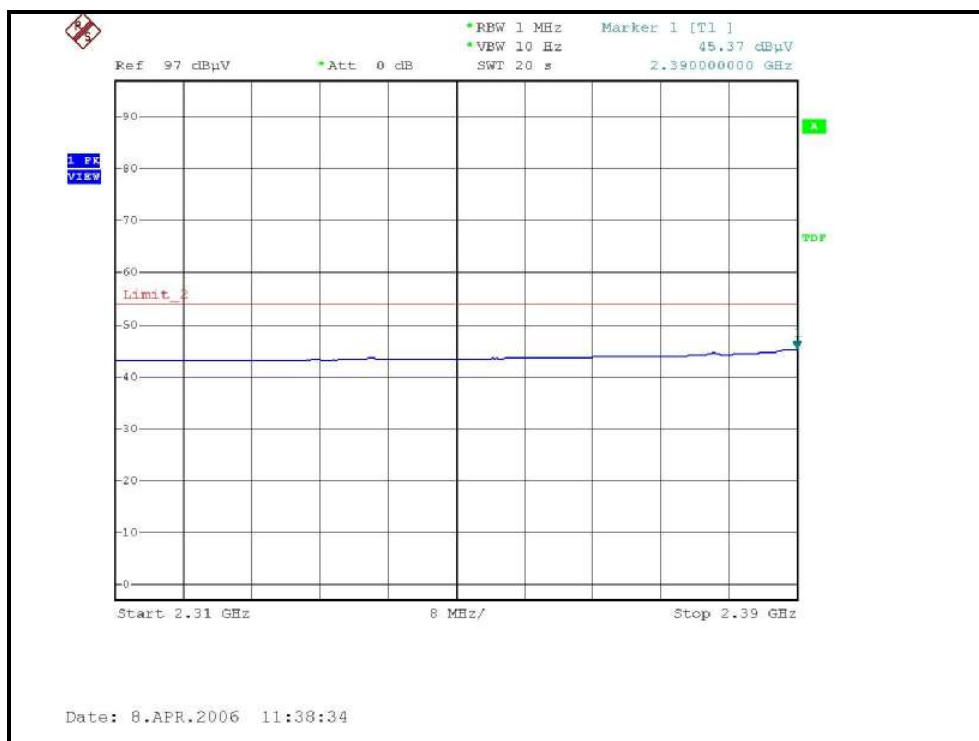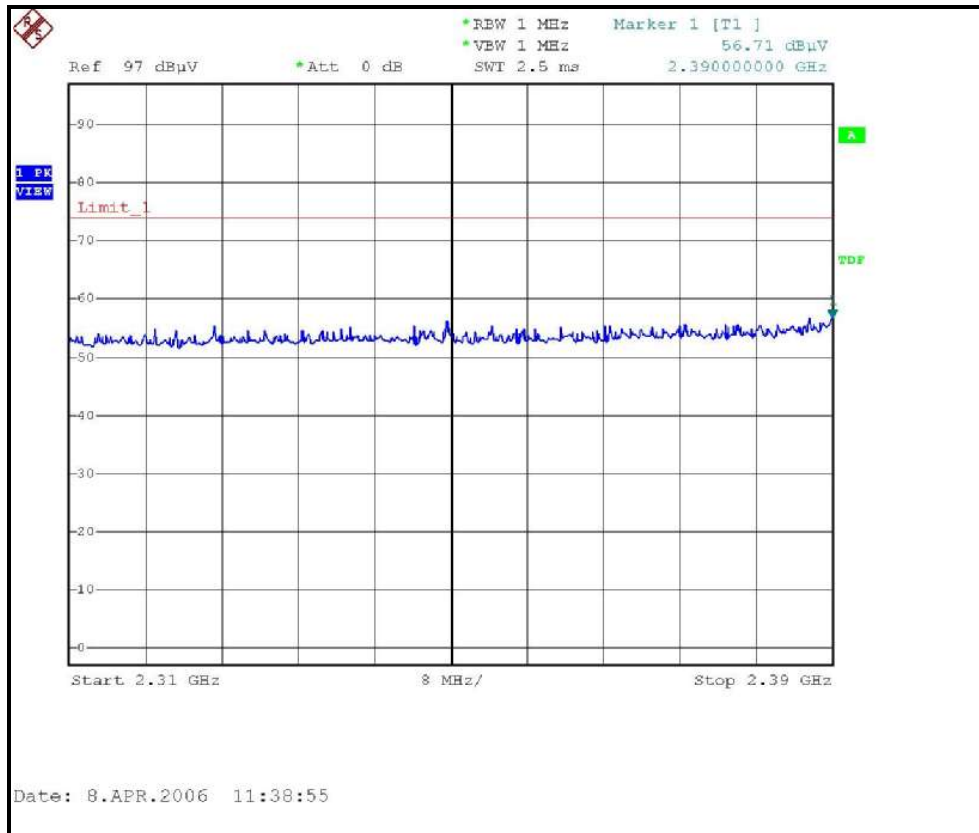



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

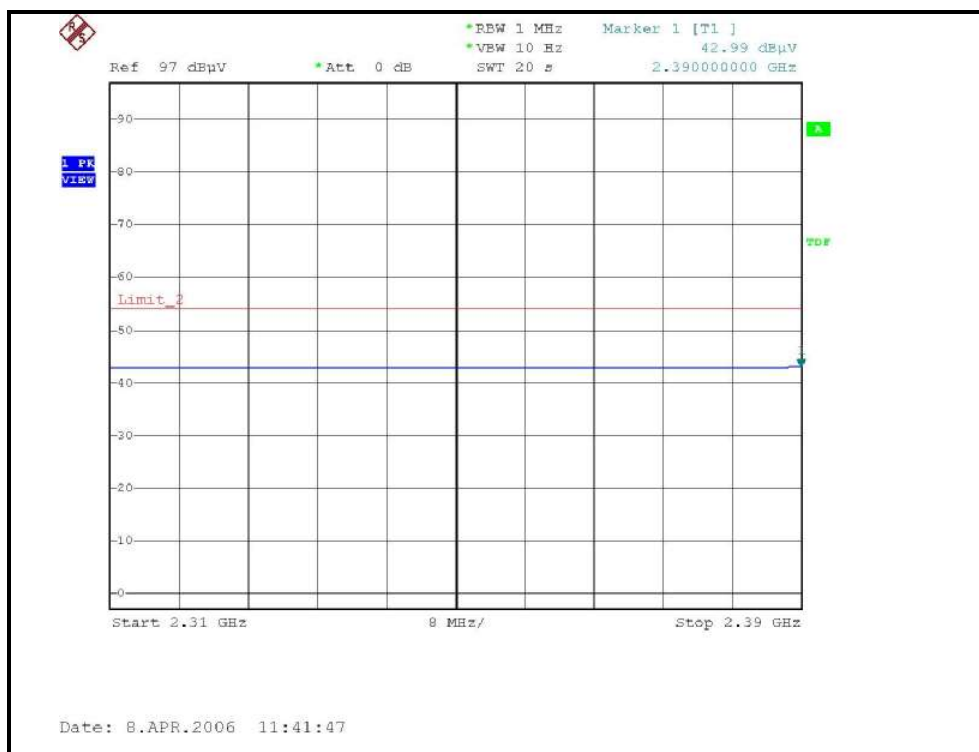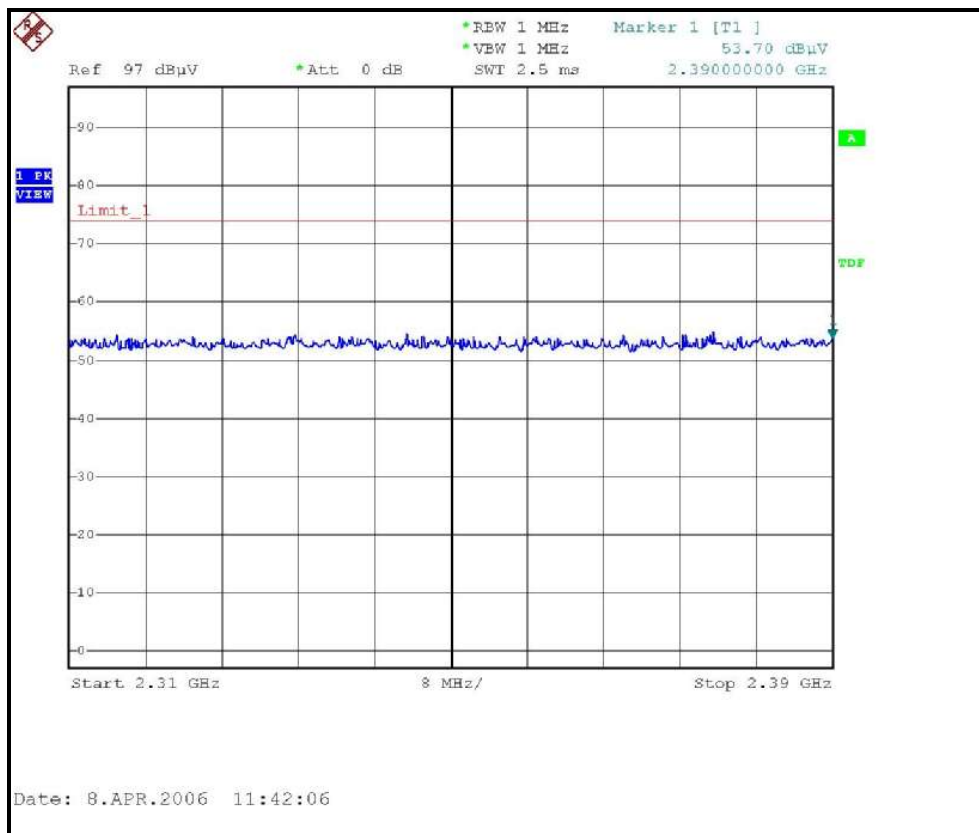

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH11, HORIZONTAL)

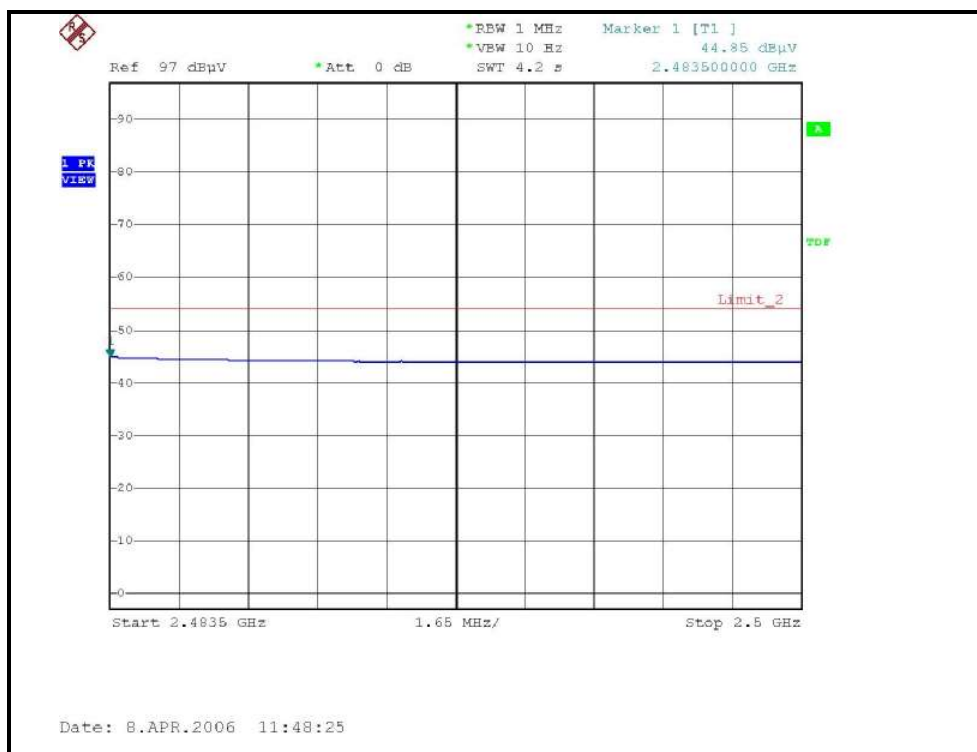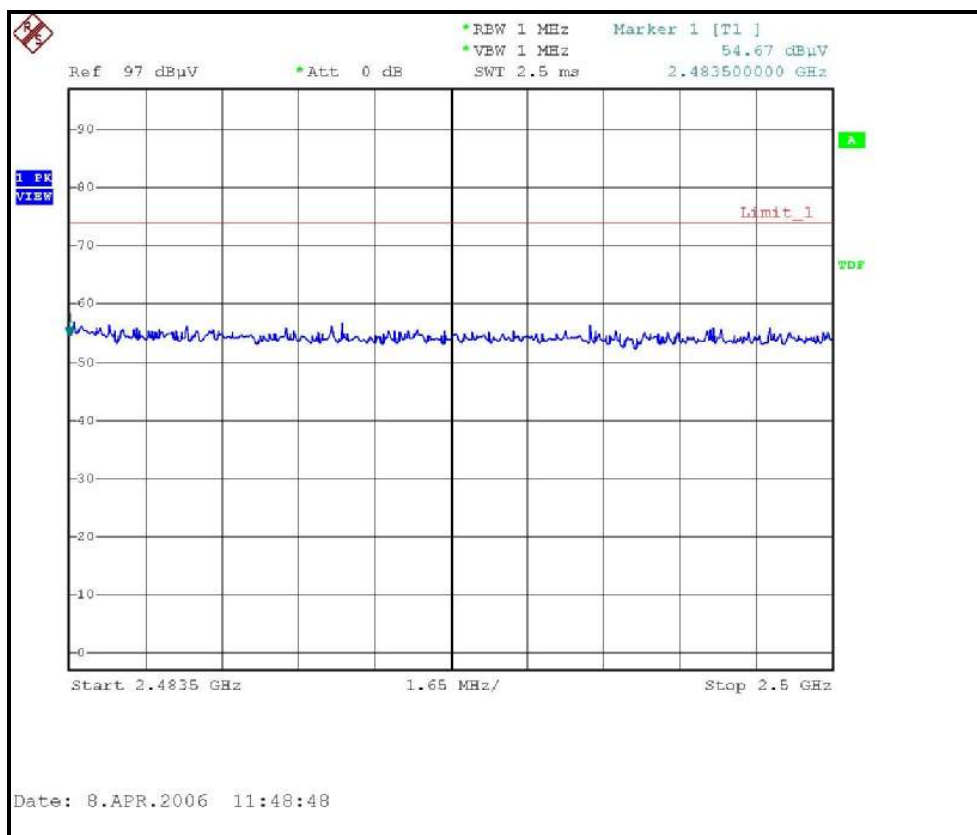

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

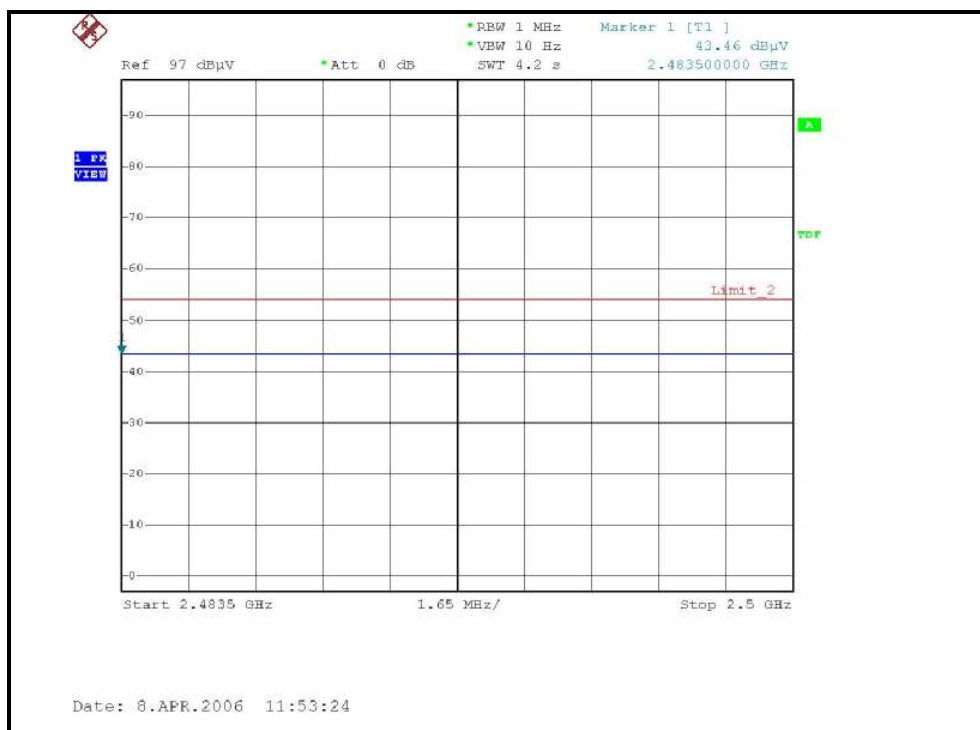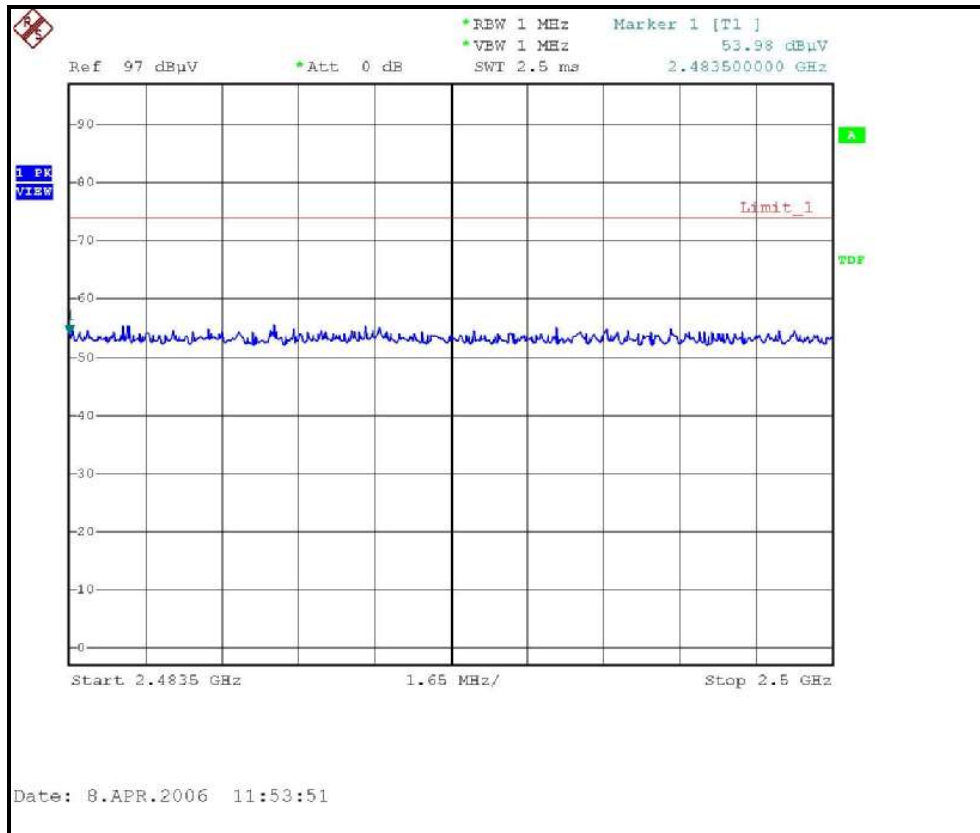

DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 13.5Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 60.90 PK | 74.00 | -13.10 | 1.15 H | 12 | 31.20 | 29.70 |
| 1 | 2390.00 | 48.00 AV | 54.00 | -6.00 | 1.15 H | 12 | 18.30 | 29.70 |
| 2 | *2422.00 | 107.60 PK | | | 1.15 H | 12 | 77.70 | 29.90 |
| 2 | *2422.00 | 97.20 AV | | | 1.15 H | 12 | 67.30 | 29.90 |
| 3 | 3229.00 | 46.00 PK | 74.00 | -28.00 | 1.03 H | 22 | 14.00 | 32.10 |
| 3 | 3229.00 | 41.40 AV | 54.00 | -12.60 | 1.03 H | 22 | 9.40 | 32.10 |
| 4 | 4844.00 | 47.00 PK | 74.00 | -27.00 | 1.00 H | 92 | 11.80 | 35.20 |
| 4 | 4844.00 | 38.30 AV | 54.00 | -15.70 | 1.00 H | 92 | 3.10 | 35.20 |
| 5 | 7266.00 | 49.20 PK | 74.00 | -24.80 | 1.25 H | 68 | 8.60 | 40.60 |
| 5 | 7266.00 | 36.90 AV | 54.00 | -17.10 | 1.25 H | 68 | -3.70 | 40.60 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 54.30 PK | 74.00 | -19.70 | 1.16 V | 162 | 24.60 | 29.70 |
| 1 | 2390.00 | 43.90 AV | 54.00 | -10.10 | 1.16 V | 162 | 14.20 | 29.70 |
| 2 | *2422.00 | 98.60 PK | | | 1.16 V | 162 | 68.70 | 29.90 |
| 2 | *2422.00 | 88.80 AV | | | 1.16 V | 162 | 58.90 | 29.90 |
| 3 | 3229.00 | 49.40 PK | 74.00 | -24.60 | 1.26 V | 14 | 17.40 | 32.10 |
| 3 | 3229.00 | 46.80 AV | 54.00 | -7.20 | 1.26 V | 14 | 14.80 | 32.10 |
| 4 | 4844.00 | 47.00 PK | 74.00 | -27.00 | 1.36 V | 26 | 11.80 | 35.20 |
| 4 | 4844.00 | 40.20 AV | 54.00 | -13.80 | 1.36 V | 26 | 5.00 | 35.20 |
| 5 | 7266.00 | 48.30 PK | 74.00 | -25.70 | 1.16 V | 45 | 7.70 | 40.60 |
| 5 | 7266.00 | 37.20 AV | 54.00 | -16.80 | 1.16 V | 45 | -3.40 | 40.60 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 4 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 13.5Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 104.20 PK | | | 1.11 H | 22 | 74.30 | 29.90 |
| 1 | *2437.00 | 95.30 AV | | | 1.11 H | 22 | 65.40 | 29.90 |
| 2 | 3249.00 | 44.90 PK | 74.00 | -29.10 | 1.20 H | 329 | 12.80 | 32.10 |
| 2 | 3249.00 | 39.80 AV | 54.00 | -14.20 | 1.20 H | 329 | 7.70 | 32.10 |
| 3 | 4874.00 | 50.80 PK | 74.00 | -23.20 | 1.11 H | 22 | 15.50 | 35.30 |
| 3 | 4874.00 | 47.80 AV | 54.00 | -6.20 | 1.11 H | 22 | 12.50 | 35.30 |
| 4 | 7311.00 | 47.80 PK | 74.00 | -26.20 | 1.00 H | 360 | 7.10 | 40.70 |
| 4 | 7311.00 | 36.70 AV | 54.00 | -17.30 | 1.00 H | 360 | -4.00 | 40.70 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 98.20 PK | | | 1.19 V | 148 | 68.30 | 29.90 |
| 1 | *2437.00 | 88.50 AV | | | 1.19 V | 148 | 58.60 | 29.90 |
| 2 | 3249.00 | 50.10 PK | 74.00 | -23.90 | 1.41 V | 13 | 18.00 | 32.10 |
| 2 | 3249.00 | 47.30 AV | 54.00 | -6.70 | 1.41 V | 13 | 15.20 | 32.10 |
| 3 | 4874.00 | 51.10 PK | 74.00 | -22.90 | 1.25 V | 12 | 15.80 | 35.30 |
| 3 | 4874.00 | 47.00 AV | 54.00 | -7.00 | 1.25 V | 12 | 11.70 | 35.30 |
| 4 | 7311.00 | 47.70 PK | 74.00 | -26.30 | 1.00 V | 360 | 7.10 | 40.70 |
| 4 | 7311.00 | 36.40 AV | 54.00 | -17.60 | 1.00 V | 360 | -4.30 | 40.70 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|----------------------------|----------------------|--------------------------|
| CHANNEL | Channel 7 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| TRANSFER RATE | 13.5Mbps | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 70%RH, 964hPa | TESTED BY | Sky Liao |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2452.00 | 103.80 PK | | | 1.34 H | 22 | 73.80 | 30.00 |
| 1 | *2452.00 | 95.00 AV | | | 1.34 H | 22 | 65.00 | 30.00 |
| 2 | 2483.50 | 56.80 PK | 74.00 | -17.20 | 1.34 H | 22 | 26.70 | 30.10 |
| 2 | 2483.50 | 46.70 AV | 54.00 | -7.30 | 1.34 H | 22 | 16.60 | 30.10 |
| 3 | 3269.00 | 46.30 PK | 74.00 | -27.70 | 1.16 H | 20 | 14.10 | 32.10 |
| 3 | 3269.00 | 41.90 AV | 54.00 | -12.10 | 1.16 H | 20 | 9.80 | 32.10 |
| 4 | 4904.00 | 47.10 PK | 74.00 | -26.90 | 1.64 H | 79 | 11.60 | 35.40 |
| 4 | 4904.00 | 38.60 AV | 54.00 | -15.40 | 1.64 H | 79 | 3.10 | 35.40 |
| 5 | 7356.00 | 48.10 PK | 74.00 | -25.90 | 1.08 H | 42 | 7.40 | 40.80 |
| 5 | 7356.00 | 36.70 AV | 54.00 | -17.30 | 1.08 H | 42 | -4.00 | 40.80 |



| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2452.00 | 96.20 PK | | | 1.10 V | 84 | 66.20 | 30.00 |
| 1 | *2452.00 | 86.40 AV | | | 1.10 V | 84 | 56.40 | 30.00 |
| 2 | 2483.50 | 52.80 PK | 74.00 | -21.20 | 1.10 V | 84 | 22.70 | 30.10 |
| 2 | 2483.50 | 43.50 AV | 54.00 | -10.50 | 1.10 V | 84 | 13.40 | 30.10 |
| 3 | 3269.00 | 43.30 PK | 74.00 | -30.70 | 1.04 V | 311 | 11.20 | 32.10 |
| 3 | 3269.00 | 38.30 AV | 54.00 | -15.70 | 1.04 V | 311 | 6.20 | 32.10 |
| 4 | 4904.00 | 47.50 PK | 74.00 | -26.50 | 1.05 V | 12 | 12.00 | 35.40 |
| 4 | 4904.00 | 41.50 AV | 54.00 | -12.50 | 1.05 V | 12 | 6.00 | 35.40 |
| 5 | 7356.00 | 48.40 PK | 74.00 | -25.60 | 1.17 V | 20 | 7.70 | 40.80 |
| 5 | 7356.00 | 36.90 AV | 54.00 | -17.10 | 1.17 V | 20 | -3.80 | 40.80 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH1, HORIZONTAL)

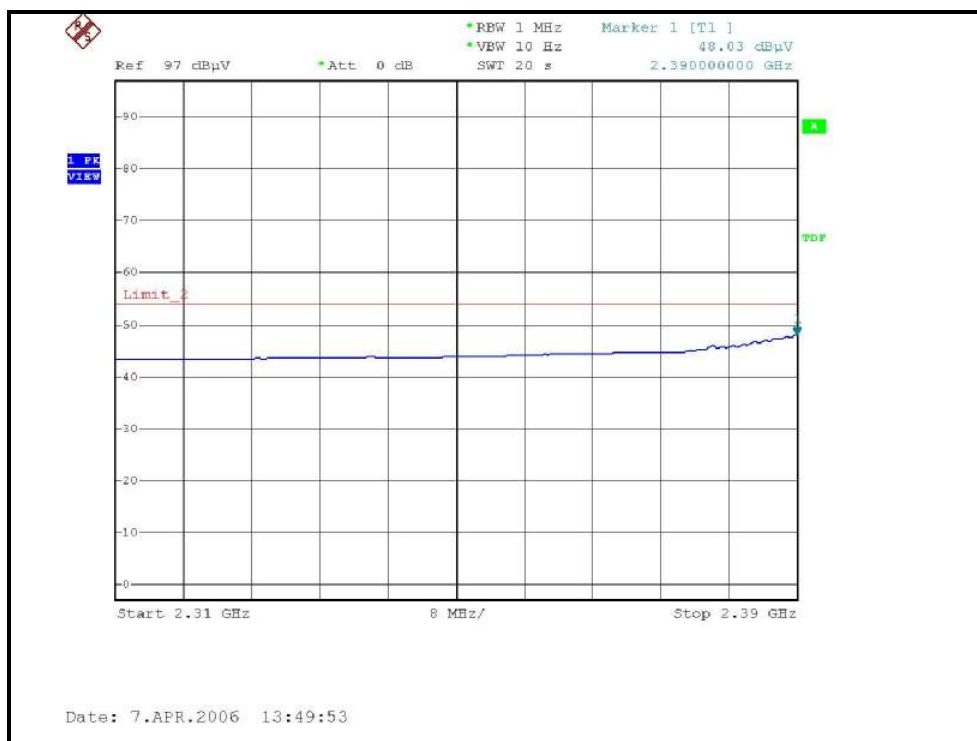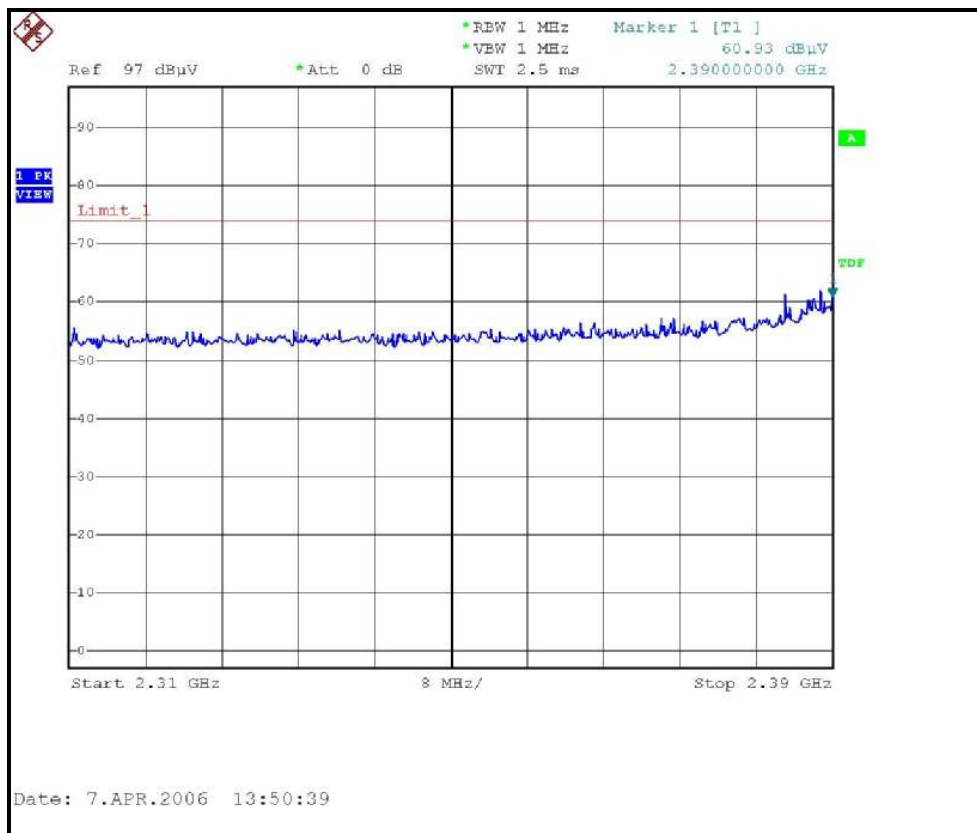

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

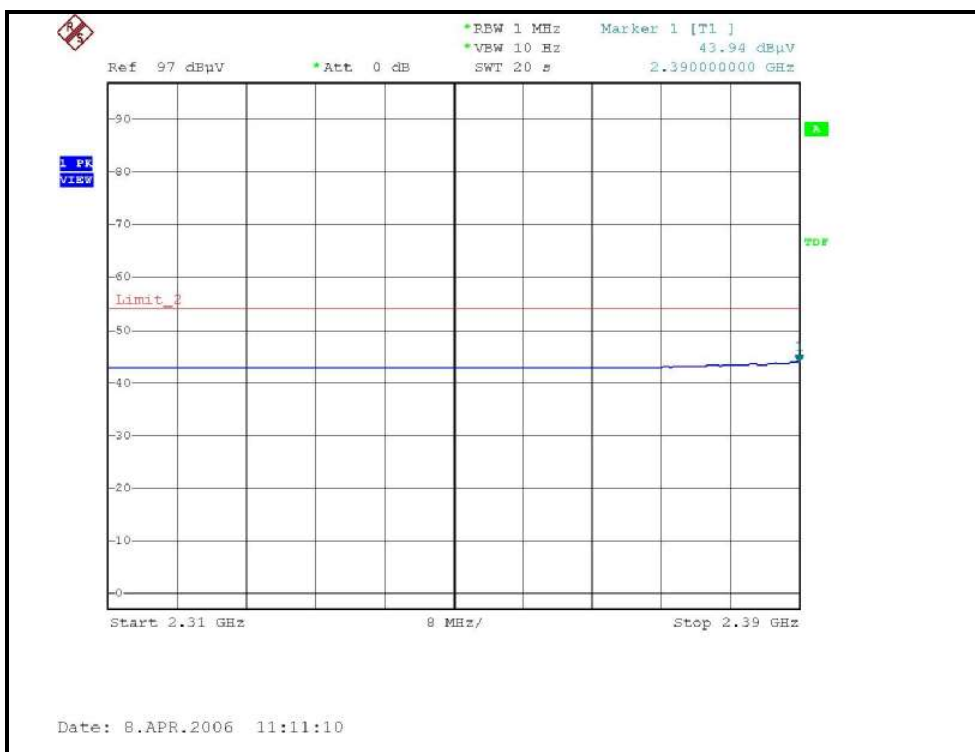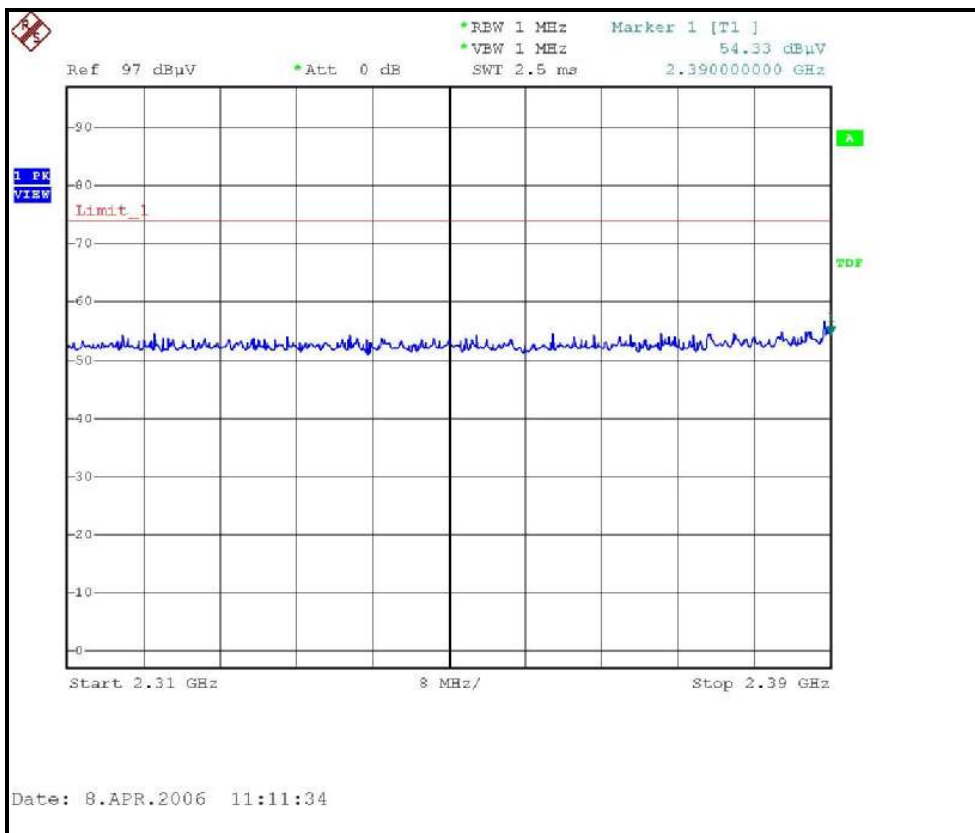

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH7, HORIZONTAL)

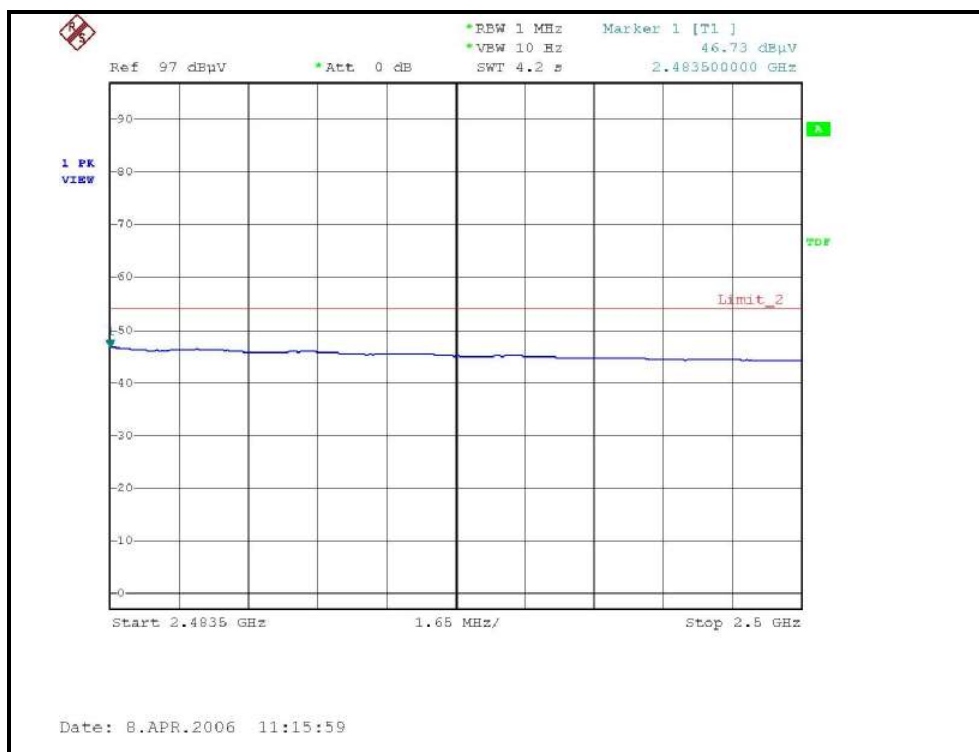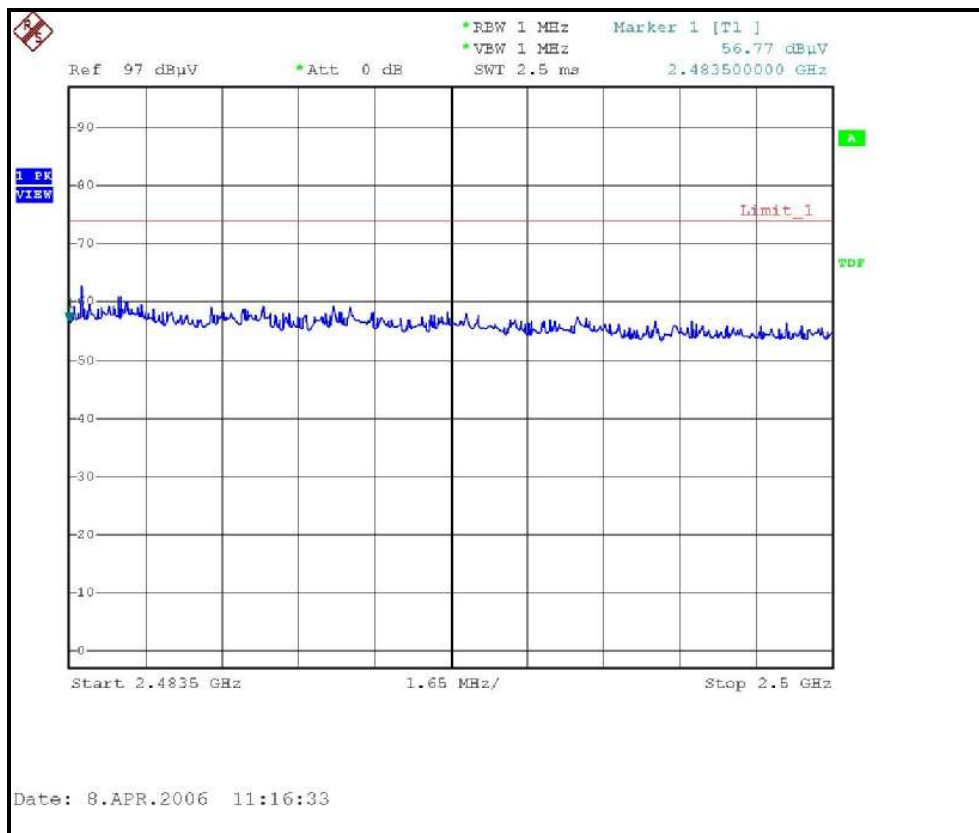

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

