



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Netgear Incorporated
Applicant Address	350 East Plumeria Drive San Jose, California 95134 United States
FCC ID	PY312300209
Manufacturer's company	Wistron Neweb Corporation
Manufacturer Address	NO.789 Yujinxiang Road, Comprehensive Free Trade Zone, Kunshan, 320000, 215300 China

Product Name	Home Security
Brand Name	Netgear
Model Name	ASG1100
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Mar. 01, 2013
Final Test Date	Mar. 18, 2013
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v02 and KDB 662911 D01 v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details	3
3.2. Accessories	5
3.3. Table for Filed Antenna	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	6
3.6. Table for Testing Locations	7
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	8
3.9. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement	11
4.2. Maximum Conducted Output Power Measurement	15
4.3. Power Spectral Density Measurement	18
4.4. 6dB Spectrum Bandwidth Measurement	24
4.5. Radiated Emissions Measurement	29
4.6. Emissions Measurement	47
4.7. Antenna Requirements	61
5. LIST OF MEASURING EQUIPMENTS	62
6. TEST LOCATION	64
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. CO-LOCATION REPORT	C1 ~ C3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330126AA	Rev. 01	Initial issue of report	Mar. 20, 2013

1. CERTIFICATE OF COMPLIANCE

Product Name : Home Security
Brand Name : Netgear
Model Name : ASG1100
Applicant : Netgear Incorporated
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 01, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.94 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	9.38 dB
4.3	15.247(e)	Power Spectral Density	Complies	6.17 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.09 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.17 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 15.92 MHz ; MCS0 (40MHz): 36.64 MHz
Maximum Conducted Output Power	MCS0 (20MHz): 20 dBm ; MCS0 (40MHz): 19.12 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	802.11b :WLAN (2TX, 2RX) 802.11g :WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.60MHz ; 11g: 16.64 MHz
Maximum Conducted Output Power	11b: 20.21dBm ; 11g: 20.62 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	MT18-9120150-A1	332-10359-01	INPUT: 120V, 60Hz, 0.5A OUTPUT: 12V, 1.5A
Adapter 2	NETGEAR	SAL018F1 NA 18.0W	332-10513-01	INPUT: 100V to 120V, 47 to 63 Hz, 0.6A OUTPUT: 12V, 1.5A
Others				
Cradle*1				

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	WNC	95EAAB15.G01	PIFA Antenna	I-PEX	3.85	TX/RX
2	WNC	95EAAB15.G02	PIFA Antenna	I-PEX	4.01	TX/RX
3	WNC	95EAAB15.G03	PIFA Antenna	I-PEX	3.86	TX/RX


Note: The EUT has three antennas.

For IEEE 802.11b/g/n mode : (2TX / 2RX)

Ant. 1 and Ant. 2 will transmit/receive the signal simultaneously.

For IEEE 802.15.4 ZigBee : (1TX / 1RX)

Ant. 3 can be use as transmit and receive antenna.

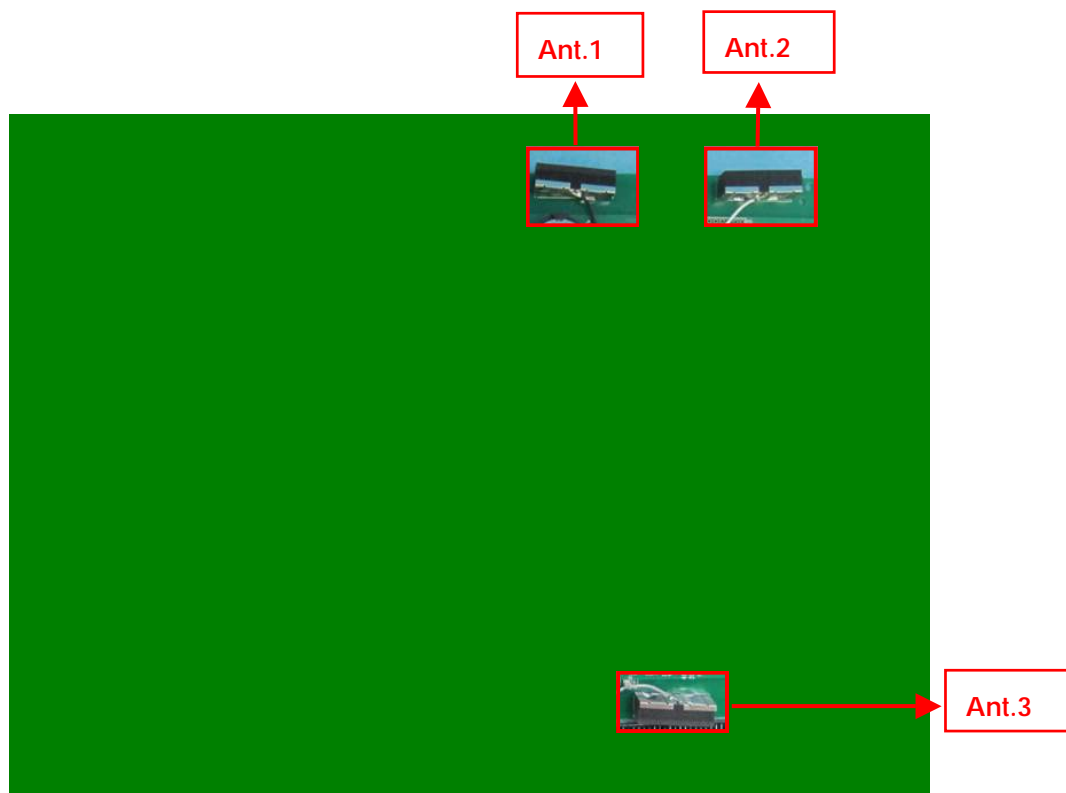

3.4. Table for Carrier Frequencies

For IEEE 802.11b/g, use Channel 1~Channel 11.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	MCS0/20MHz	7 Mbps	1/6/11	1+2
	MCS0/40MHz	14.4 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	MCS0/20MHz	7 Mbps	1/6/11	1/2
	MCS0/40MHz	14.4 Mbps	3/6/9	1/2
	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2
6dB Spectrum Bandwidth	MCS0/20MHz	7 Mbps	1/6/11	1+2
	MCS0/40MHz	14.4 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	MCS0/20MHz	7 Mbps	1/6/11	1+2
	MCS0/40MHz	14.4 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

Band Edge Emissions	MCS0/20MHz	7 Mbps	1/6/11	1+2
	MCS0/40MHz	14.4 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT With Adapter 1 (MT18-9120150-A1)

Mode 2. EUT With Adapter 2 (SAL018F1 NA 18.0W)

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test:

Mode 1. laying of EUT With Adapter 1 for Zigbee and WLAN function

Mode 2. wall-hanging of EUT With Adapter 1 for Zigbee and WLAN function

Mode 3. stand of EUT With Adapter 1 for Zigbee function and WLAN function

Mode 2 has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 4. wall-hanging of EUT With Adapter 2 for Zigbee and WLAN function

Mode 4 is the worst case, so it was selected to record in this test report.

For MPE and Co-location Test:

The EUT could be applied with WiFi + ZigBee function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between WiFi + ZigBee function.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

For 30MHz~1GHz and AC Power Line Conduction test

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
USB Disk	Silicon	I-Series	DoC

For above 1GHz test

Support Unit	Brand	Model	FCC ID
Notebook	DELL	1200	E2K4965AGNM

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n

Test Software Version	ART2-GUI		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	17.5	18	16.5
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	12.5	16.5	14.5

Power Parameters of IEEE 802.11b/g

Test Software Version	ART2-GUI		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	16.5	18	16.5
IEEE 802.11g	18.5	18	17.5


During the test, "ART2-GUI" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.9. Test Configurations

3.9.1. Conduction and Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz and AC Power Line Conduction


Test Mode: Mode 2 and Mode 4

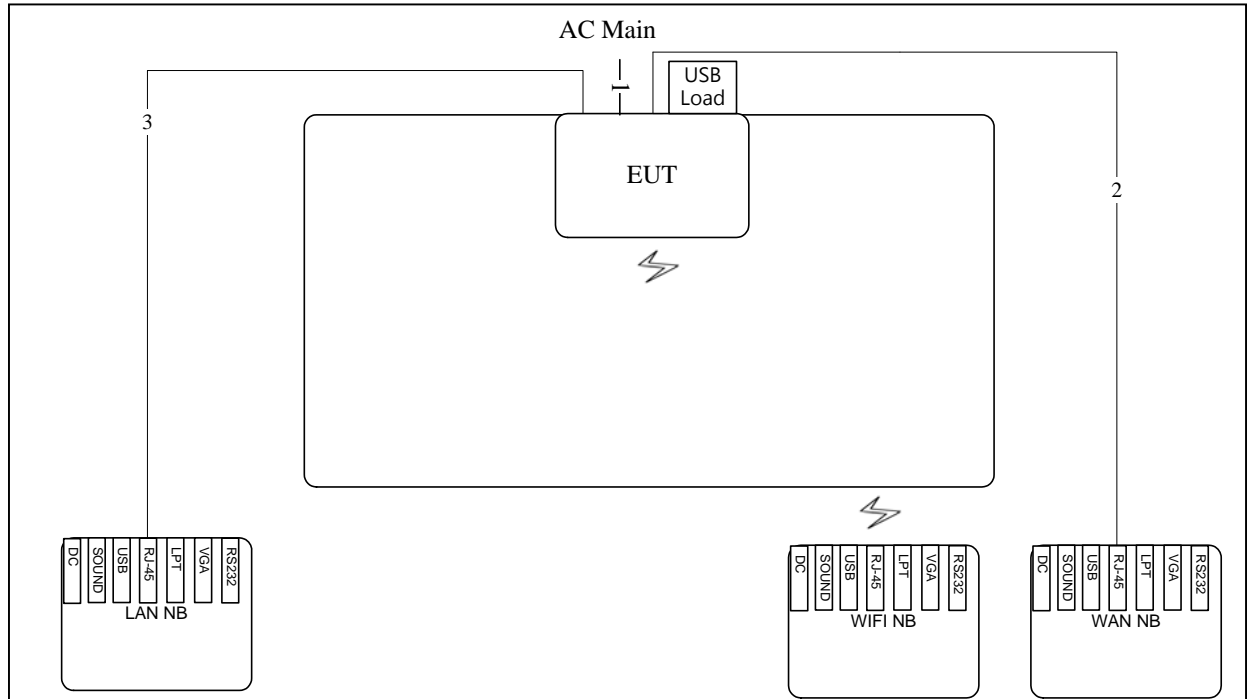

Item	Connection	Shield	Length
1	Power cable	No	3M
2	RJ-45	No	10M
3	RJ-45	No	10M

Test Configuration: above 1GHz

Test Mode: Mode 4

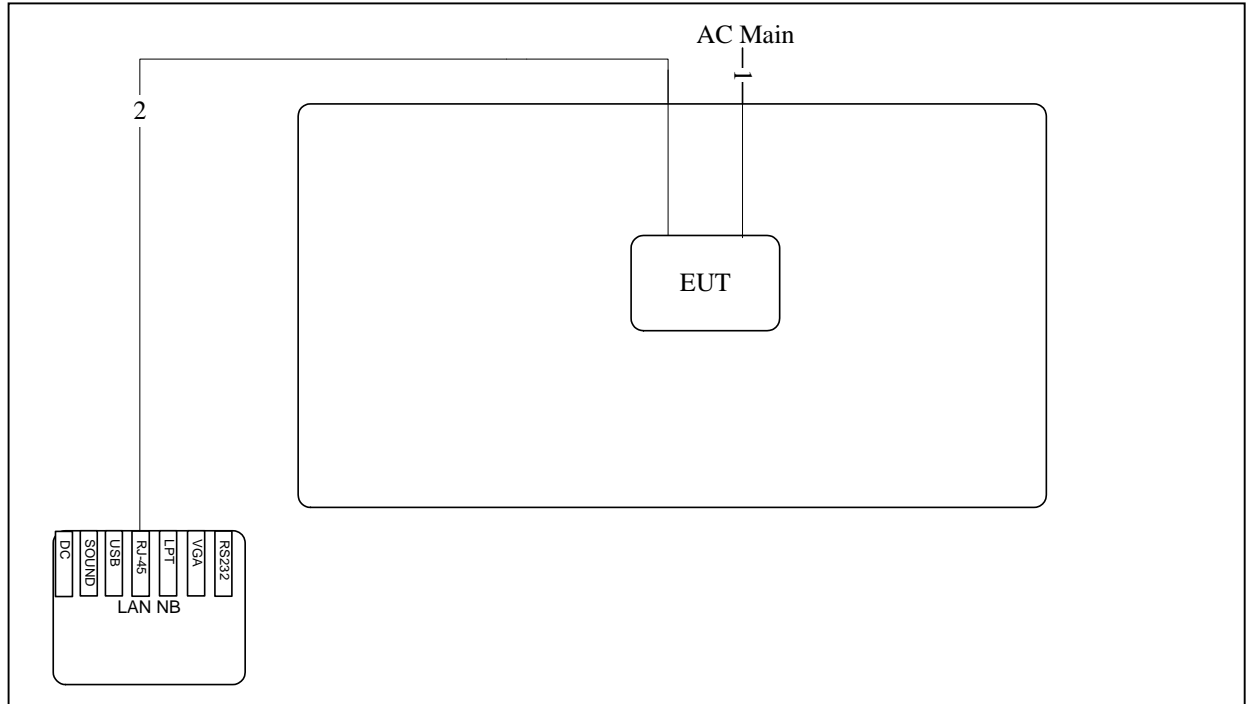

Item	Connection	Shield	Length
1	Power cable	No	3M
2	RJ-45	No	10M

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

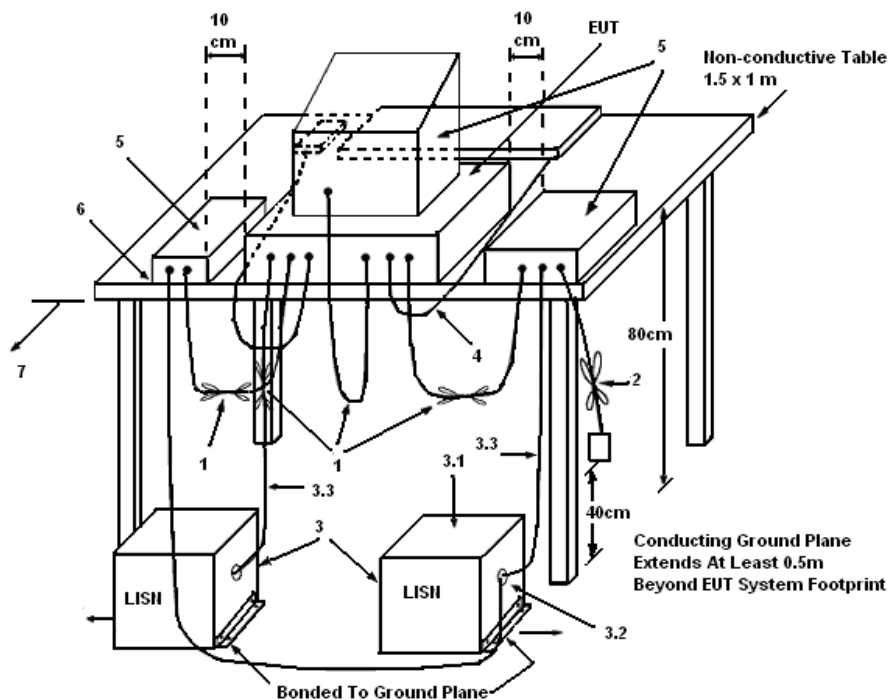

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	48%
Test Engineer	Sin Chang	Phase	Line
Test Mode	Mode 2		

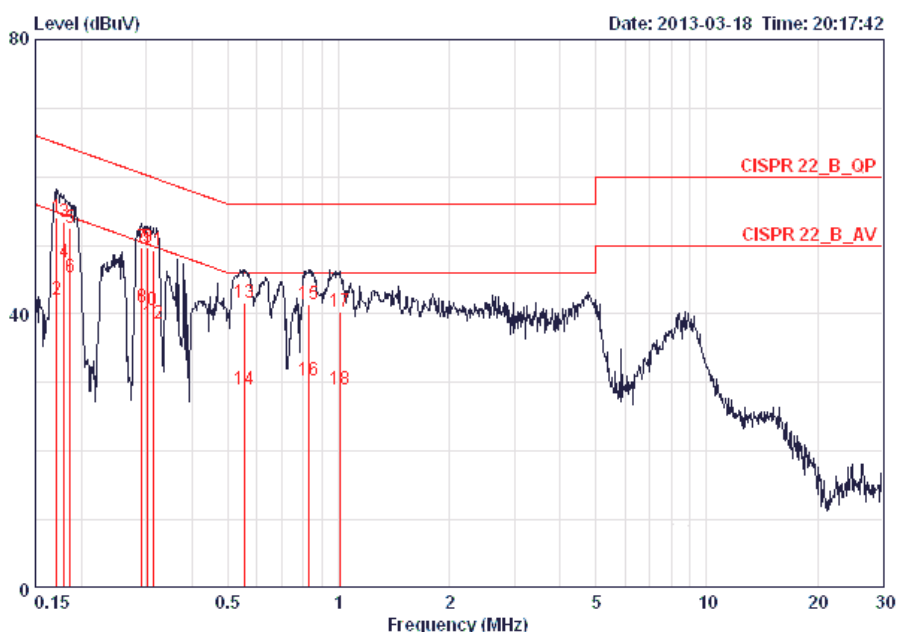

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17125	54.02	-10.88	64.90	53.67	0.16	0.19	QP
2	0.17125	42.01	-12.89	54.90	41.66	0.16	0.19	AVERAGE
3	0.17961	53.48	-11.02	64.50	53.14	0.15	0.19	QP
4 B	0.17961	47.56	-6.94	54.50	47.22	0.15	0.19	AVERAGE
5	0.18640	52.60	-11.59	64.20	52.26	0.15	0.19	QP
6	0.18640	45.36	-8.83	54.20	45.02	0.15	0.19	AVERAGE
7	0.29243	49.74	-10.72	60.46	49.39	0.15	0.20	QP
8	0.29243	40.95	-9.51	50.46	40.60	0.15	0.20	AVERAGE
9	0.30348	49.75	-10.40	60.15	49.40	0.15	0.20	QP
10	0.30348	40.60	-9.55	50.15	40.25	0.15	0.20	AVERAGE
11	0.31495	49.30	-10.54	59.84	48.95	0.15	0.20	QP
12	0.31495	38.64	-11.20	49.84	38.29	0.15	0.20	AVERAGE
13	0.55520	41.70	-14.31	56.00	41.34	0.16	0.20	QP
14	0.55520	29.02	-16.99	46.00	28.66	0.16	0.20	AVERAGE
15	0.83047	41.37	-14.63	56.00	41.01	0.16	0.20	QP
16	0.83047	30.23	-15.77	46.00	29.87	0.16	0.20	AVERAGE
17	1.005	40.41	-15.59	56.00	40.04	0.17	0.20	QP
18	1.005	29.04	-16.96	46.00	28.67	0.17	0.20	AVERAGE

Temperature	24°C	Humidity	48%
Test Engineer	Sin Chang	Phase	Neutral
Test Mode	Mode 2		

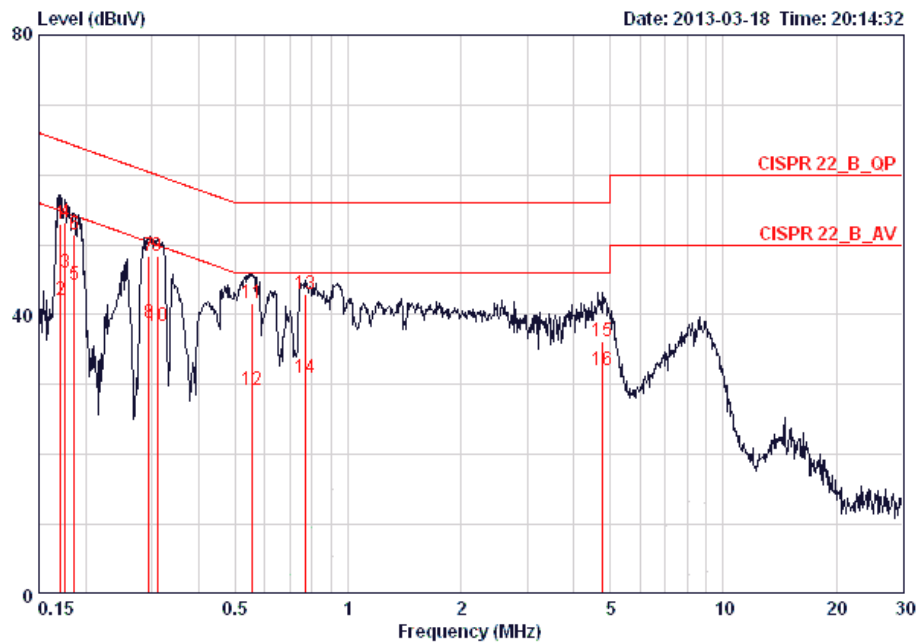

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17125	53.02	-11.88	64.90	52.75	0.08	0.19	QP
2	0.17125	42.00	-12.90	54.90	41.73	0.08	0.19	AVERAGE
3	0.17584	46.05	-8.63	54.68	45.78	0.08	0.19	AVERAGE
4	0.17584	53.12	-11.56	64.68	52.85	0.08	0.19	QP
5	0.18640	44.28	-9.91	54.20	44.01	0.08	0.19	AVERAGE
6	0.18640	51.54	-12.65	64.20	51.27	0.08	0.19	QP
7	0.29398	48.49	-11.92	60.41	48.21	0.08	0.20	QP
8	0.29398	38.75	-11.66	50.41	38.47	0.08	0.20	AVERAGE
9	0.30998	48.31	-11.66	59.97	48.03	0.08	0.20	QP
10	0.30998	38.33	-11.64	49.97	38.05	0.08	0.20	AVERAGE
11	0.55520	41.56	-14.44	56.00	41.28	0.08	0.20	QP
12	0.55520	29.24	-16.76	46.00	28.96	0.08	0.20	AVERAGE
13	0.76702	42.95	-13.05	56.00	42.66	0.09	0.20	QP
14	0.76702	30.91	-15.09	46.00	30.62	0.09	0.20	AVERAGE
15	4.772	36.08	-19.92	56.00	35.62	0.14	0.32	QP
16	4.772	32.08	-13.92	46.00	31.62	0.14	0.32	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 v01 r02 section 8.2.3 option 3.
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout



4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n
Test Date	Mar. 08, 2013		

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	16.42	16.34	19.39	30.00	Complies
6	2437 MHz	16.92	17.06	20.00	30.00	Complies
11	2462 MHz	15.50	15.74	18.63	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
3	2422 MHz	12.61	12.70	15.67	30.00	Complies
6	2437 MHz	15.80	16.40	19.12	30.00	Complies
9	2452 MHz	13.20	13.25	16.24	30.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Wen Chao	Configurations	IEEE 802.11b/g
Test Date	Mar. 08, 2013		

Configuration IEEE 802.11b / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	15.33	15.19	18.27	30.00	Complies
6	2437 MHz	17.10	17.30	20.21	30.00	Complies
11	2462 MHz	15.50	15.85	18.69	30.00	Complies

Configuration IEEE 802.11g / / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	17.70	17.52	20.62	30.00	Complies
6	2437 MHz	16.75	17.08	19.93	30.00	Complies
11	2462 MHz	15.50	17.10	19.38	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RB	≥ 3 kHz
VB	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 v01 r02 section 9.1 option 1 & KDB662911 D01 Multiple Transmitter Output v01r02 section In-Band Power Spectral Density (PSD) Measurements option (2) Measure and add $10 \log(\text{NANT})$ dB.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be ≤ 8 dBm.

4.3.4. Test Setup Layout

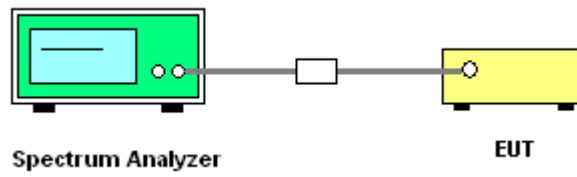

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 10kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		
1	2412 MHz	-4.29	-4.13	4.99	Complies
6	2437 MHz	-3.89	-3.36	4.99	Complies
11	2462 MHz	-4.80	-4.23	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 10kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		
3	2422 MHz	-10.99	-10.43	4.99	Complies
6	2437 MHz	-7.10	-6.03	4.99	Complies
9	2452 MHz	-10.08	-9.80	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2))) = 4.99dBm/3kHz

Temperature	25°C	Humidity	56%
Test Engineer	Wen Chao	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 10kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		
1	2412 MHz	-3.46	-3.68	4.99	Complies
6	2437 MHz	-1.18	-1.27	4.99	Complies
11	2462 MHz	-2.81	-3.08	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2)))=4.99dBm/3kHz

Configuration IEEE 802.11g / Ant. 1 + Ant. 2


Channel	Frequency	Power Density (dBm / 10kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		
1	2412 MHz	-3.05	-2.00	4.99	Complies
6	2437 MHz	-3.02	-1.53	4.99	Complies
11	2462 MHz	-4.09	-3.87	4.99	Complies

Note: PSD Limit = (8dBm/3kHz - (10log(2)))=4.99dBm/3kHz

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 2 / 2437 MHz

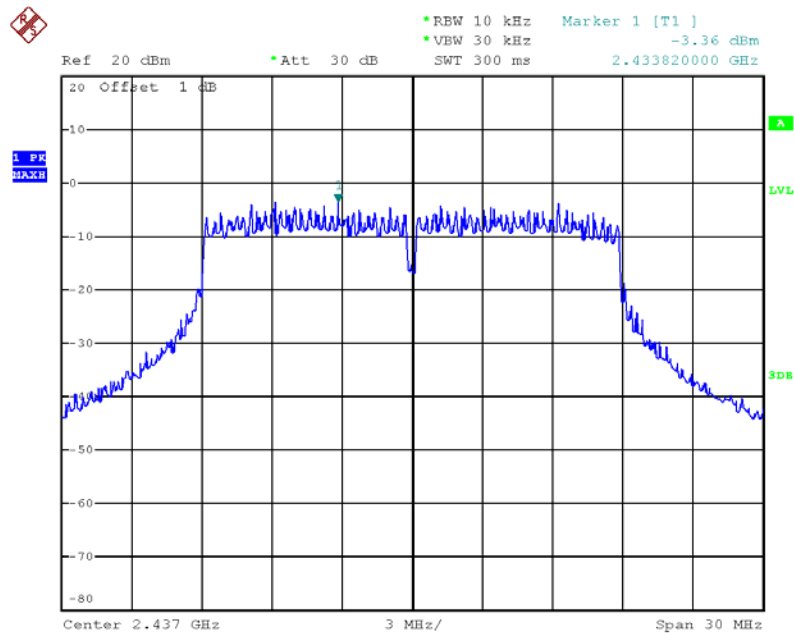


Date: 8.MAR.2013 17:36:44

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 2 / 2437 MHz

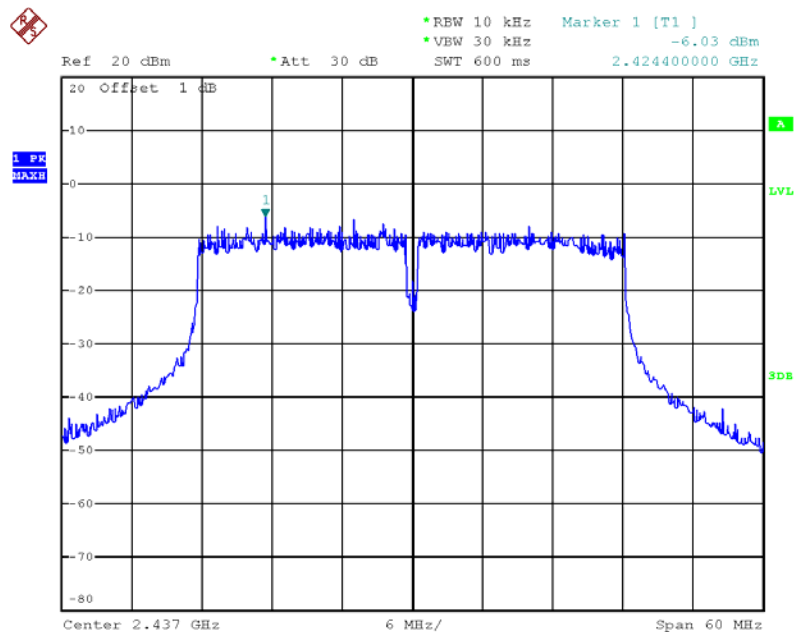


Date: 8.MAR.2013 17:46:36

Power Density Plot on Configuration IEEE 802.11b / Ant. 1 / 2437 MHz

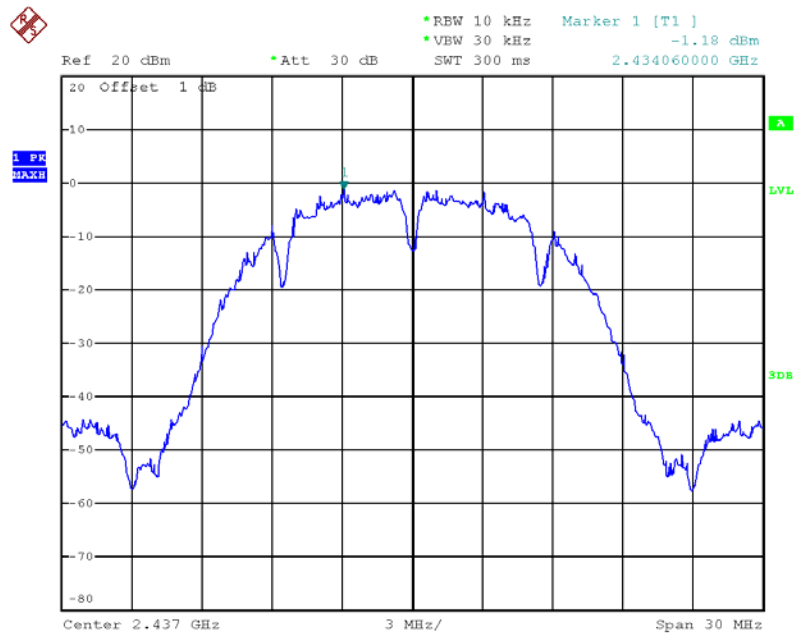

Date: 8.MAR.2013 17:10:06

Power Density Plot on Configuration IEEE 802.11g / Ant. 2 / 2437 MHz

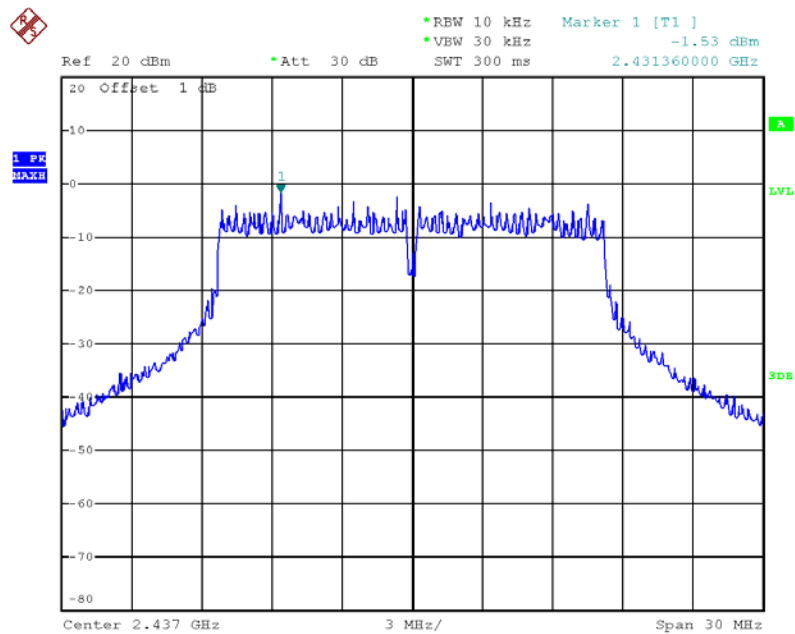

Date: 8.MAR.2013 17:22:23

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	1-5 % or DTS BW, not exceed 100KHz
VB	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 5.1.1 EBW Measurement Procedure
3. Multiple antenna system was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

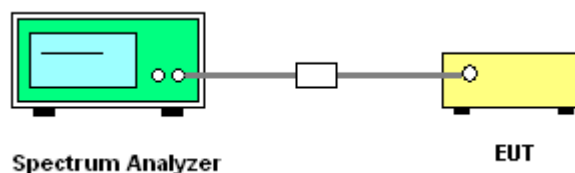

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.56	15.60	500	Complies
6	2437 MHz	11.36	15.92	500	Complies
11	2462 MHz	11.36	15.92	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.36	36.00	500	Complies
6	2437 MHz	35.36	36.00	500	Complies
9	2452 MHz	33.92	36.64	500	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Wen Chao	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	13.12	15.60	500	Complies
6	2437 MHz	13.12	15.52	500	Complies
11	2462 MHz	9.04	13.28	500	Complies


Configuration IEEE 802.11g / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.32	16.64	500	Complies
6	2437 MHz	12.56	16.16	500	Complies
11	2462 MHz	15.68	16.64	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 / 2437 MHz

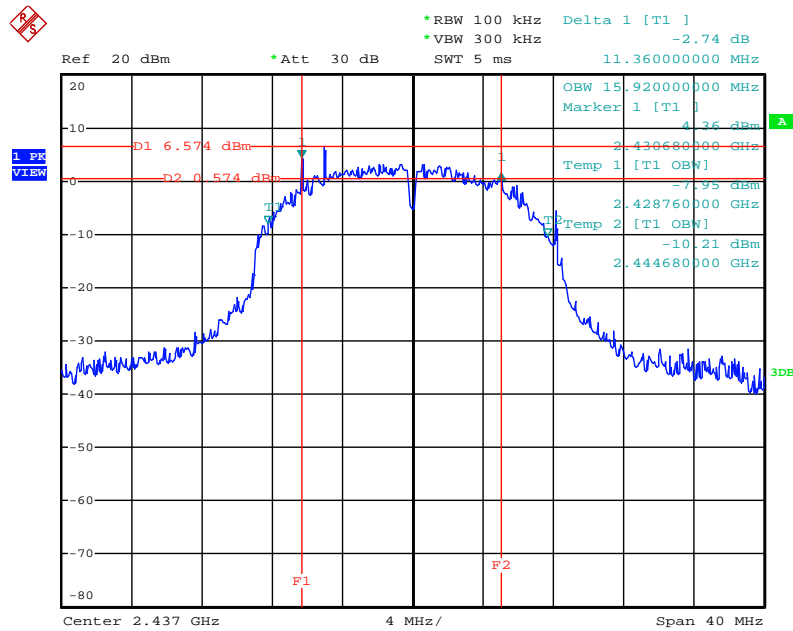


Date: 8.MAR.2013 18:23:35

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 / 2452 MHz

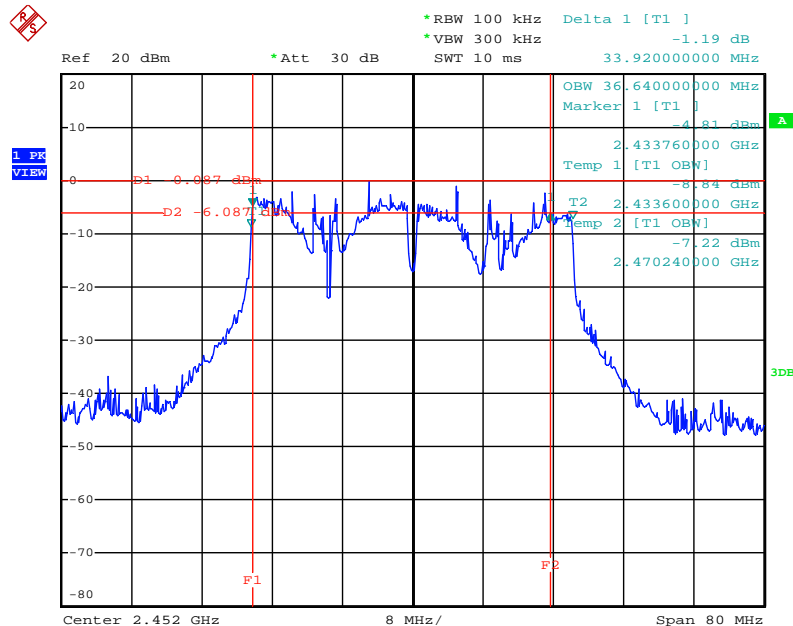


Date: 8.MAR.2013 18:26:56

6 dB Bandwidth Plot on Configuration IEEE 802.11b / Ant. 1 + Ant. 2 / 2462 MHz

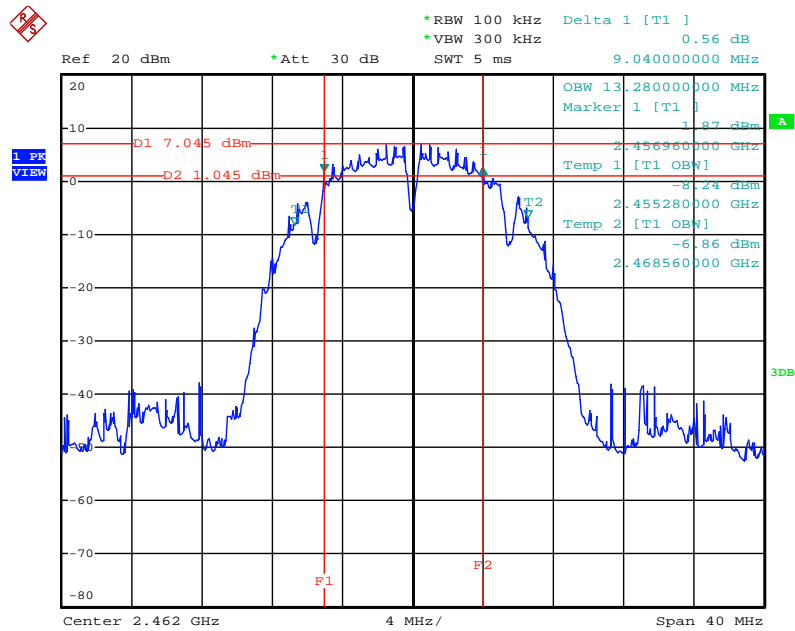

Date: 8.MAR.2013 18:19:17

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Ant. 1 + Ant. 2 / 2437 MHz

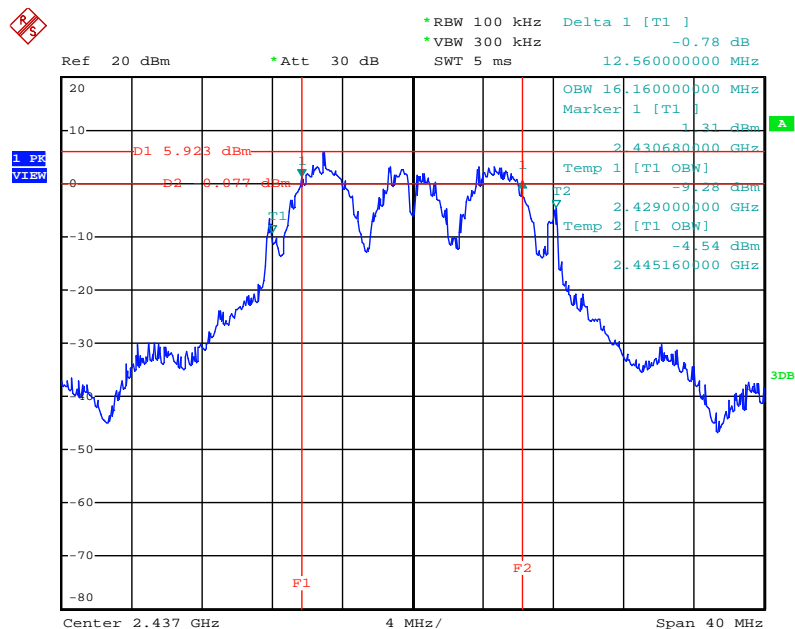

Date: 8.MAR.2013 18:21:19

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For Radiated Emissions below 1GHz

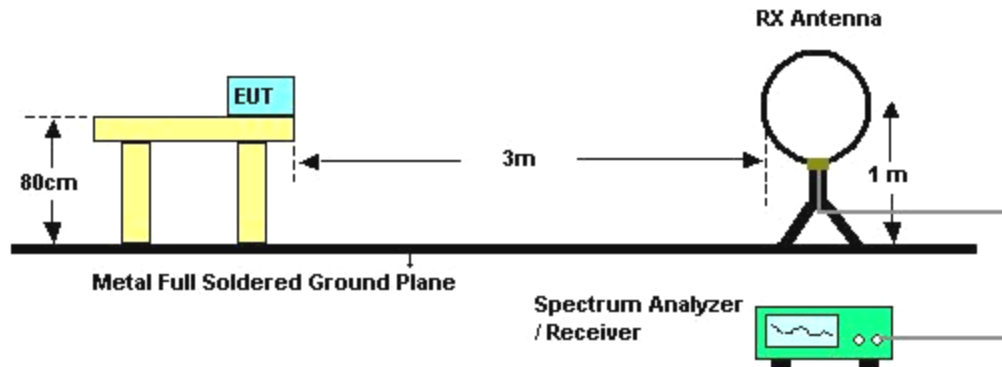

For Radiated Emissions above 1GHz

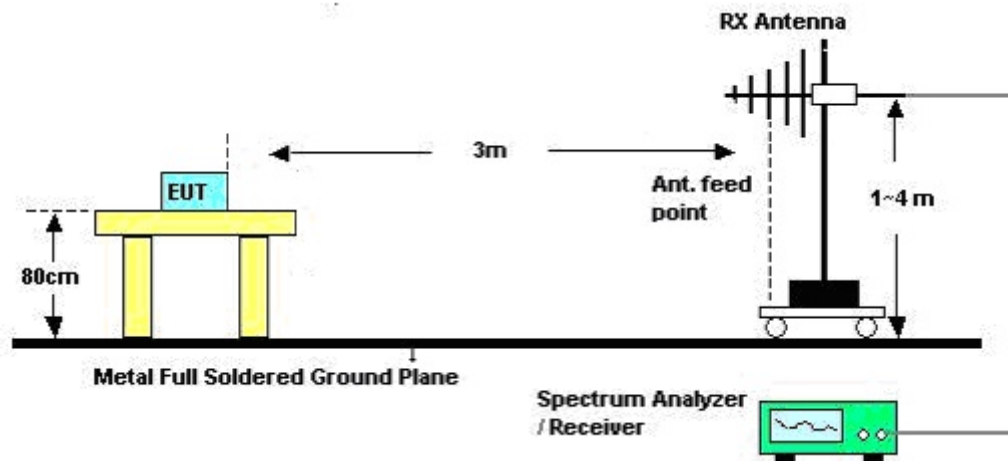

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	Normal Link
Test Date	Mar. 10, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Test Mode	Mode 4

Horizontal

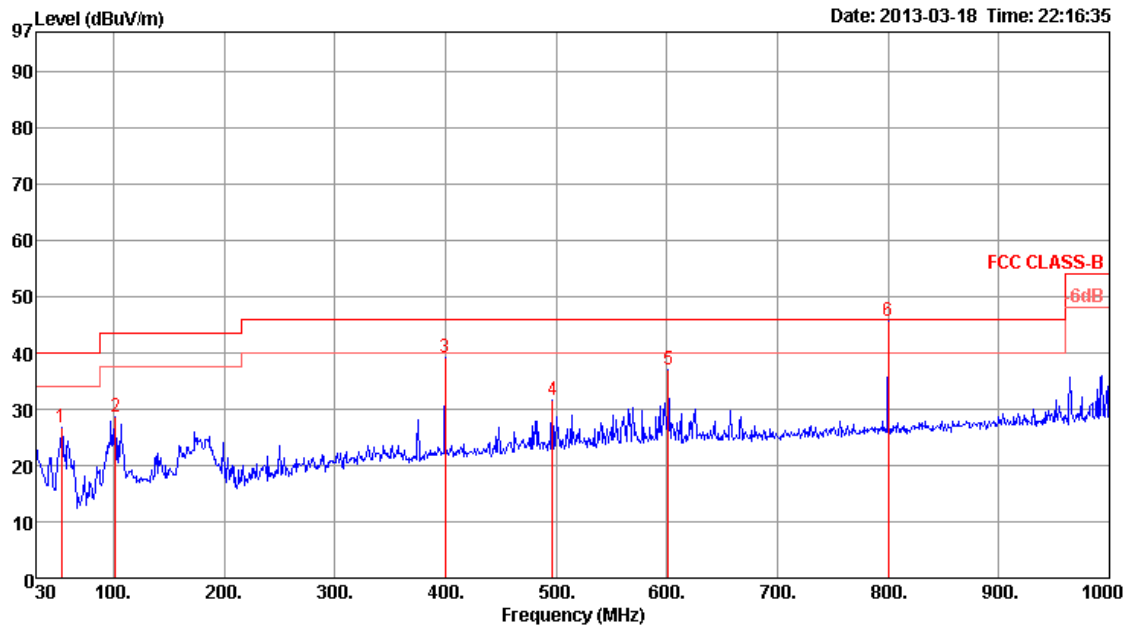

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	53.28	26.69	40.00	-13.31	45.63	0.85	8.00	27.79	Peak	100	0	HORIZONTAL
2	101.78	28.66	43.50	-14.84	43.93	1.18	11.14	27.59	Peak	100	0	HORIZONTAL
3	399.57	39.26	46.00	-6.74	48.50	2.30	16.06	27.60	Peak	100	0	HORIZONTAL
4	496.57	31.67	46.00	-14.33	39.53	2.65	17.57	28.08	Peak	100	0	HORIZONTAL
5	601.33	36.88	46.00	-9.12	43.40	2.81	18.77	28.10	Peak	100	0	HORIZONTAL
6	800.18	45.69	46.00	-0.31	50.30	3.22	19.77	27.60	QP	117	49	HORIZONTAL

Vertical

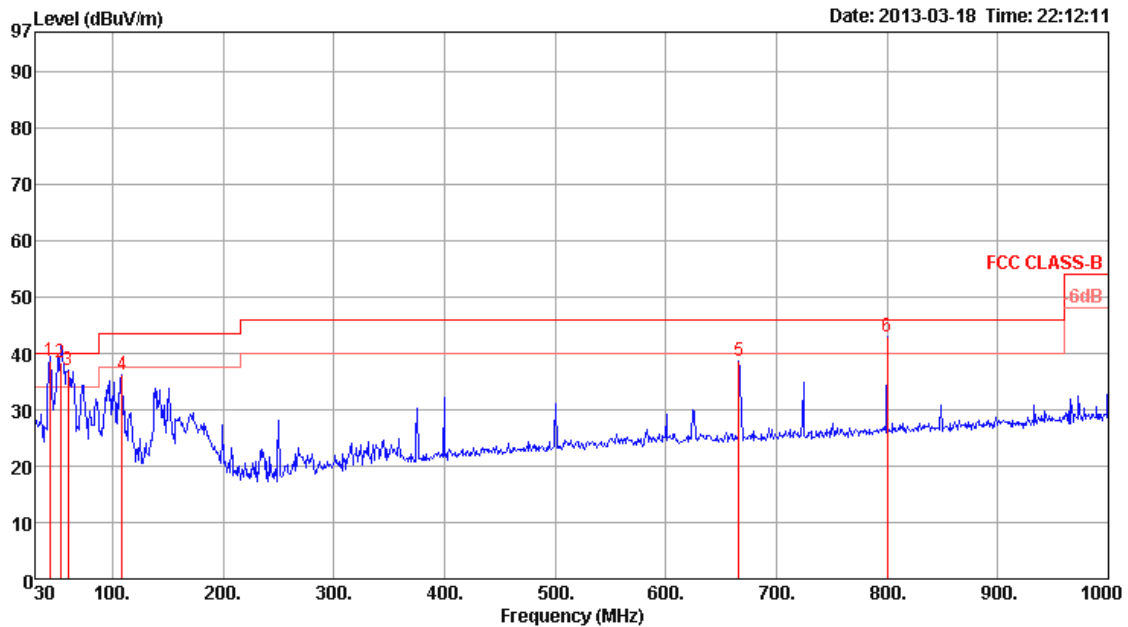

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	43.58	38.59	40.00	-1.41	54.79	0.72	10.88	27.80	100	120	VERTICAL
2	53.28	38.26	40.00	-1.74	57.20	0.85	8.00	27.79	100	21	VERTICAL
3	60.07	36.95	40.00	-3.05	57.03	0.91	6.77	27.76	400	0	VERTICAL
4	108.57	36.12	43.50	-7.38	50.80	1.23	11.65	27.56	400	0	VERTICAL
5	666.32	38.62	46.00	-7.38	44.64	3.03	18.98	28.03	400	0	VERTICAL
6	800.18	42.88	46.00	-3.12	47.49	3.22	19.77	27.60	400	0	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4823.44	42.34	54.00	-11.66	38.38	5.77	33.39	35.20	Average	133	53	HORIZONTAL
2	4823.44	55.17	74.00	-18.83	51.21	5.77	33.39	35.20	Peak	133	53	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4821.56	40.19	54.00	-13.81	36.23	5.77	33.39	35.20	Average	100	0	VERTICAL
2	4821.56	54.01	74.00	-19.99	50.05	5.77	33.39	35.20	Peak	100	0	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.76	36.53	54.00	-17.47	32.46	5.79	33.48	35.20	Average	100	224	HORIZONTAL
2	4873.76	48.27	74.00	-25.73	44.20	5.79	33.48	35.20	Peak	100	224	HORIZONTAL
3	7304.56	60.56	74.00	-13.44	50.87	8.63	36.48	35.42	Peak	100	339	HORIZONTAL
4	7306.92	41.27	54.00	-12.73	31.59	8.63	36.48	35.43	Average	100	339	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4871.16	39.99	54.00	-14.01	35.92	5.79	33.48	35.20	Average	108	276	VERTICAL
2	4871.16	55.72	74.00	-18.28	51.65	5.79	33.48	35.20	Peak	108	276	VERTICAL
3	7305.80	41.41	54.00	-12.59	31.72	8.63	36.48	35.42	Average	109	201	VERTICAL
4	7306.24	73.61	74.00	-0.39	63.92	8.63	36.48	35.42	Peak	109	201	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch11 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4924.00	33.73	54.00	-20.27	29.53	5.82	33.58	35.20	Average	100	80 HORIZONTAL
2	4924.00	43.66	74.00	-30.34	39.46	5.82	33.58	35.20	Peak	100	80 HORIZONTAL
3	7386.00	38.37	54.00	-15.63	28.47	8.75	36.61	35.46	Average	100	168 HORIZONTAL
4	7386.00	48.40	74.00	-25.60	38.50	8.75	36.61	35.46	Peak	100	169 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4924.00	32.97	54.00	-21.03	28.77	5.82	33.58	35.20	Average	100	192 VERTICAL
2	4924.00	43.56	74.00	-30.44	39.36	5.82	33.58	35.20	Peak	100	192 VERTICAL
3	7386.00	38.58	54.00	-15.42	28.68	8.75	36.61	35.46	Average	100	80 VERTICAL
4	7386.00	47.84	74.00	-26.16	37.94	8.75	36.61	35.46	Peak	100	80 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4844.00	33.97	54.00	-20.03	29.97	5.78	33.42	35.20 Average	100	355	HORIZONTAL
2	4844.00	43.79	74.00	-30.21	39.79	5.78	33.42	35.20 Peak	100	355	HORIZONTAL
3	7256.00	38.17	54.00	-15.83	28.62	8.56	36.40	35.41 Average	100	62	HORIZONTAL
4	7261.72	52.88	74.00	-21.12	43.30	8.56	36.43	35.41 Peak	100	62	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4843.96	33.70	54.00	-20.30	29.70	5.78	33.42	35.20 Average	100	360	VERTICAL
2	4844.84	47.58	74.00	-26.42	43.58	5.78	33.42	35.20 Peak	100	360	VERTICAL
3	7258.84	38.13	54.00	-15.87	28.55	8.56	36.43	35.41 Average	100	24	VERTICAL
4	7258.84	58.91	74.00	-15.09	49.33	8.56	36.43	35.41 Peak	100	24	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	33.45	54.00	-20.55	29.38	5.79	33.48	35.20	Average	100	137 HORIZONTAL
2	4874.00	43.43	74.00	-30.57	39.36	5.79	33.48	35.20	Peak	100	137 HORIZONTAL
3	7311.00	39.06	54.00	-14.94	29.35	8.63	36.51	35.43	Average	100	70 HORIZONTAL
4	7311.00	49.18	74.00	-24.82	39.47	8.63	36.51	35.43	Peak	100	70 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.00	33.55	54.00	-20.45	29.48	5.79	33.48	35.20	Average	100	125 VERTICAL
2	4874.00	44.23	74.00	-29.77	40.16	5.79	33.48	35.20	Peak	100	125 VERTICAL
3	7311.00	38.96	54.00	-15.04	29.25	8.63	36.51	35.43	Average	100	201 VERTICAL
4	7311.00	58.95	74.00	-15.05	49.24	8.63	36.51	35.43	Peak	100	201 VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4904.08	33.92	54.00	-20.08	29.80	5.81	33.51	35.20	Average	100	274 HORIZONTAL
2	4904.08	45.34	74.00	-28.66	41.22	5.81	33.51	35.20	Peak	100	270 HORIZONTAL
3	7356.00	38.45	54.00	-15.55	28.63	8.70	36.56	35.44	Average	100	192 HORIZONTAL
4	7356.00	49.41	74.00	-24.59	39.59	8.70	36.56	35.44	Peak	100	192 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4904.08	34.19	54.00	-19.81	30.07	5.81	33.51	35.20	Average	100	87 VERTICAL
2	4904.08	44.89	74.00	-29.11	40.77	5.81	33.51	35.20	Peak	100	87 VERTICAL
3	7356.00	38.50	54.00	-15.50	28.68	8.70	36.56	35.44	Average	100	154 VERTICAL
4	7356.00	51.02	74.00	-22.98	41.20	8.70	36.56	35.44	Peak	100	154 VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 1 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.94	53.35	54.00	-0.65	52.01	3.31	33.06	35.03	Average	116	52	HORIZONTAL
2	4823.94	54.97	74.00	-19.03	53.63	3.31	33.06	35.03	Peak	116	52	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.88	55.01	74.00	-18.99	53.67	3.31	33.06	35.03	Peak	100	18	VERTICAL
2	4823.93	53.71	54.00	-0.29	52.37	3.31	33.06	35.03	Average	100	18	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 6 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.90	50.88	54.00	-3.12	46.81	5.79	33.48	35.20	Average	136	232	HORIZONTAL
2	4873.94	54.58	74.00	-19.42	50.51	5.79	33.48	35.20	Peak	136	232	HORIZONTAL
3	7308.18	42.61	54.00	-11.39	32.90	8.63	36.51	35.43	Average	106	349	HORIZONTAL
4	7308.82	53.69	74.00	-20.31	43.98	8.63	36.51	35.43	Peak	106	349	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.91	53.69	54.00	-0.31	49.62	5.79	33.48	35.20	Average	114	25	VERTICAL
2	4873.96	56.42	74.00	-17.58	52.35	5.79	33.48	35.20	Peak	114	25	VERTICAL
3	7310.12	45.05	54.00	-8.95	35.34	8.63	36.51	35.43	Average	100	22	VERTICAL
4	7310.20	55.19	74.00	-18.81	45.48	8.63	36.51	35.43	Peak	100	22	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 11 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4923.84	54.69	74.00	-19.31	50.49	5.82	33.58	35.20	Peak	140	233	HORIZONTAL
2	4923.95	51.59	54.00	-2.41	47.39	5.82	33.58	35.20	Average	140	233	HORIZONTAL
3	7385.16	41.17	54.00	-12.83	31.27	8.75	36.61	35.46	Average	100	358	HORIZONTAL
4	7385.22	52.90	74.00	-21.10	43.00	8.75	36.61	35.46	Peak	100	358	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4923.93	53.89	54.00	-0.11	49.69	5.82	33.58	35.20	Average	118	16	VERTICAL
2	4924.02	56.29	74.00	-17.71	52.09	5.82	33.58	35.20	Peak	118	16	VERTICAL
3	7384.36	53.08	74.00	-20.92	43.18	8.75	36.61	35.46	Peak	138	42	VERTICAL
4	7385.06	42.85	54.00	-11.15	32.95	8.75	36.61	35.46	Average	138	42	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4823.72	44.06	54.00	-9.94	40.10	5.77	33.39	35.20	Average	137	46	HORIZONTAL
2	4823.72	58.21	74.00	-15.79	54.25	5.77	33.39	35.20	Peak	137	46	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4823.40	44.43	54.00	-9.57	40.47	5.77	33.39	35.20	Average	131	0	VERTICAL
2	4823.40	58.32	74.00	-15.68	54.36	5.77	33.39	35.20	Peak	131	0	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.84	36.82	54.00	-17.18	32.75	5.79	33.48	35.20	Average	100	222	HORIZONTAL
2	4873.84	48.29	74.00	-25.71	44.22	5.79	33.48	35.20	Peak	100	222	HORIZONTAL
3	7309.56	41.88	54.00	-12.12	32.17	8.63	36.51	35.43	Average	100	43	HORIZONTAL
4	7309.56	59.43	74.00	-14.57	49.72	8.63	36.51	35.43	Peak	100	43	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.24	38.19	54.00	-15.81	34.12	5.79	33.48	35.20	Average	100	186	VERTICAL
2	4873.24	50.95	74.00	-23.05	46.88	5.79	33.48	35.20	Peak	100	186	VERTICAL
3	7304.68	41.79	54.00	-12.21	32.10	8.63	36.48	35.42	Average	100	213	VERTICAL
4	7309.76	73.91	74.00	-0.09	64.20	8.63	36.51	35.43	Peak	100	213	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.72	41.65	54.00	-12.35	37.45	5.82	33.58	35.20	Average	103	4	HORIZONTAL
2	4922.72	55.22	74.00	-18.78	51.02	5.82	33.58	35.20	Peak	103	4	HORIZONTAL
3	7378.00	61.38	74.00	-12.62	51.50	8.72	36.61	35.45	Peak	112	306	HORIZONTAL
4	7383.56	41.52	54.00	-12.48	31.62	8.75	36.61	35.46	Average	112	306	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.44	45.32	54.00	-8.68	41.12	5.82	33.58	35.20	Average	128	359	VERTICAL
2	4923.12	63.40	74.00	-10.60	59.20	5.82	33.58	35.20	Peak	128	359	VERTICAL
3	7377.12	41.12	54.00	-12.88	31.24	8.72	36.61	35.45	Average	105	211	VERTICAL
4	7377.12	72.27	74.00	-1.73	62.39	8.72	36.61	35.45	Peak	105	211	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Conducted Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 v02 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Conducted Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.4.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.80	53.45	54.00	-0.55	21.43	3.97	28.05	0.00	Average	100	331 VERTICAL
2	2389.80	69.22	74.00	-4.78	37.20	3.97	28.05	0.00	Peak	100	331 VERTICAL
3	2419.00	113.00			80.88	3.99	28.13	0.00	Peak	100	331 VERTICAL
4	2419.40	101.40			69.28	3.99	28.13	0.00	Average	100	331 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2379.60	57.87	74.00	-16.13	25.90	3.96	28.01	0.00	Peak	100	286 VERTICAL
2	2380.80	46.61	54.00	-7.39	14.64	3.96	28.01	0.00	Average	100	286 VERTICAL
3	2438.60	102.27			70.07	4.02	28.18	0.00	Average	100	286 VERTICAL
4	2438.60	114.61			82.41	4.02	28.18	0.00	Peak	100	286 VERTICAL
5	2483.50	45.61	54.00	-8.39	13.30	4.05	28.26	0.00	Average	100	286 VERTICAL
6	2483.50	55.44	74.00	-18.56	23.13	4.05	28.26	0.00	Peak	100	286 VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2454.00	113.32			81.07	4.03	28.22	0.00	Peak	100	286 VERTICAL
2	2454.60	101.67			69.42	4.03	28.22	0.00	Average	100	286 VERTICAL
3	2483.50	53.53	54.00	-0.47	21.22	4.05	28.26	0.00	Average	100	286 VERTICAL
4	2483.50	69.04	74.00	-4.96	36.73	4.05	28.26	0.00	Peak	100	286 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2387.20	72.02	74.00	-1.98	40.00	3.97	28.05	0.00	Peak	100	285 VERTICAL
2	2388.00	53.38	54.00	-0.62	21.36	3.97	28.05	0.00	Average	100	285 VERTICAL
3	2424.40	94.75			62.62	4.00	28.13	0.00	Average	100	285 VERTICAL
4	2424.40	107.69			75.56	4.00	28.13	0.00	Peak	100	285 VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.83	54.00	-0.17	21.81	3.97	28.05	0.00	Average	100	332 VERTICAL
2	2390.00	69.20	74.00	-4.80	37.18	3.97	28.05	0.00	Peak	100	332 VERTICAL
3	2425.80	98.10			65.97	4.00	28.13	0.00	Average	100	332 VERTICAL
4	2427.00	111.04			78.91	4.00	28.13	0.00	Peak	100	332 VERTICAL
5	2483.50	50.73	54.00	-3.27	18.42	4.05	28.26	0.00	Average	100	332 VERTICAL
6	2483.50	64.92	74.00	-9.08	32.61	4.05	28.26	0.00	Peak	100	332 VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2438.40	108.05			75.85	4.02	28.18	0.00	Peak	100	332 VERTICAL
2	2440.80	95.21			63.01	4.02	28.18	0.00	Average	100	332 VERTICAL
3	2483.50	53.72	54.00	-0.28	21.41	4.05	28.26	0.00	Average	100	332 VERTICAL
4	2483.50	70.17	74.00	-3.83	37.86	4.05	28.26	0.00	Peak	100	332 VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		dB
1	2388.80	69.91	74.00	-4.09	37.89	3.97	28.05	0.00 Peak	100	286	VERTICAL	0.00
2	2390.00	46.96	54.00	-7.04	14.94	3.97	28.05	0.00 Average	100	286	VERTICAL	0.00
3	2411.20	107.65			75.57	3.99	28.09	0.00 Average	100	286	VERTICAL	0.00
4	2413.00	111.86			79.78	3.99	28.09	0.00 Peak	100	286	VERTICAL	0.00

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2380.40	46.86	54.00	-7.14	14.89	3.96	28.01	0.00 Average	100	286	VERTICAL	
2	2381.60	58.81	74.00	-15.19	26.84	3.96	28.01	0.00 Peak	100	286	VERTICAL	
3	2439.80	105.75			73.55	4.02	28.18	0.00 Average	100	286	VERTICAL	
4	2439.80	109.71			77.51	4.02	28.18	0.00 Peak	100	286	VERTICAL	
5	2483.50	45.63	54.00	-8.37	13.32	4.05	28.26	0.00 Average	100	286	VERTICAL	
6	2483.50	56.63	74.00	-17.37	24.32	4.05	28.26	0.00 Peak	100	286	VERTICAL	

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2463.80	100.48			68.23	4.03	28.22	0.00 Average	172	45	HORIZONTAL	
2	2464.60	104.71			72.46	4.03	28.22	0.00 Peak	172	45	HORIZONTAL	
3	2483.50	44.77	54.00	-9.23	12.46	4.05	28.26	0.00 Average	172	45	HORIZONTAL	
4	2484.10	67.50	74.00	-6.50	35.19	4.05	28.26	0.00 Peak	172	45	HORIZONTAL	

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	Mar. 10, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.20	69.98	74.00	-4.02	37.96	3.97	28.05	0.00	100	286	VERTICAL
2	2390.00	53.62	54.00	-0.38	21.60	3.97	28.05	0.00	100	286	VERTICAL
3	2417.40	103.52			71.40	3.99	28.13	0.00	100	286	VERTICAL
4	2417.60	115.25			83.13	3.99	28.13	0.00	100	286	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2381.20	46.42	54.00	-7.58	14.45	3.96	28.01	0.00	100	285	VERTICAL
2	2383.20	60.81	74.00	-13.19	28.80	3.96	28.05	0.00	100	285	VERTICAL
3	2439.40	102.21			70.01	4.02	28.18	0.00	100	285	VERTICAL
4	2440.20	114.38			82.18	4.02	28.18	0.00	100	285	VERTICAL
5	2483.50	45.55	54.00	-8.45	13.24	4.05	28.26	0.00	100	285	VERTICAL
6	2483.50	56.48	74.00	-17.52	24.17	4.05	28.26	0.00	100	285	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2457.00	101.62			69.37	4.03	28.22	0.00	100	280	VERTICAL
2	2457.00	112.99			80.74	4.03	28.22	0.00	100	280	VERTICAL
3	2483.50	53.75	54.00	-0.25	21.44	4.05	28.26	0.00	100	280	VERTICAL
4	2483.90	71.69	74.00	-2.31	39.38	4.05	28.26	0.00	100	280	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

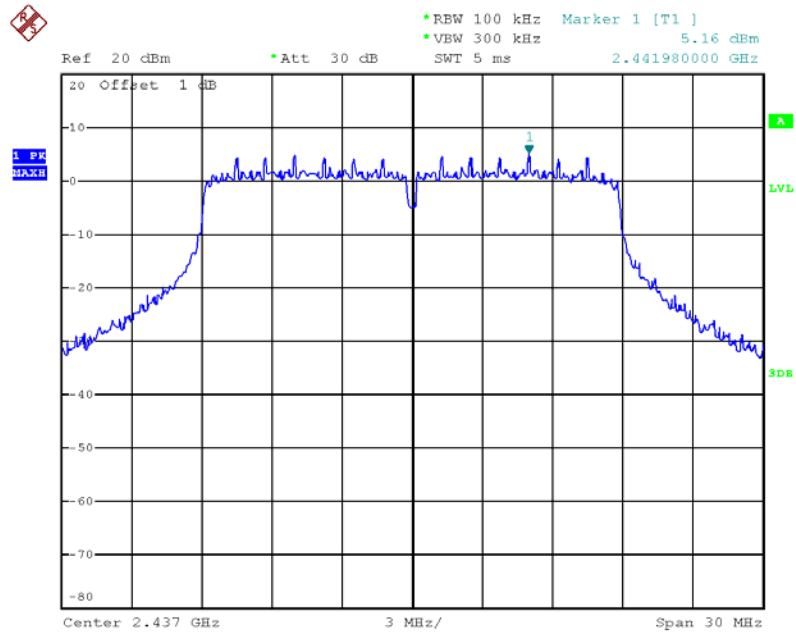


Date: 8.MAR.2013 17:39:29

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 (down 30dBc)

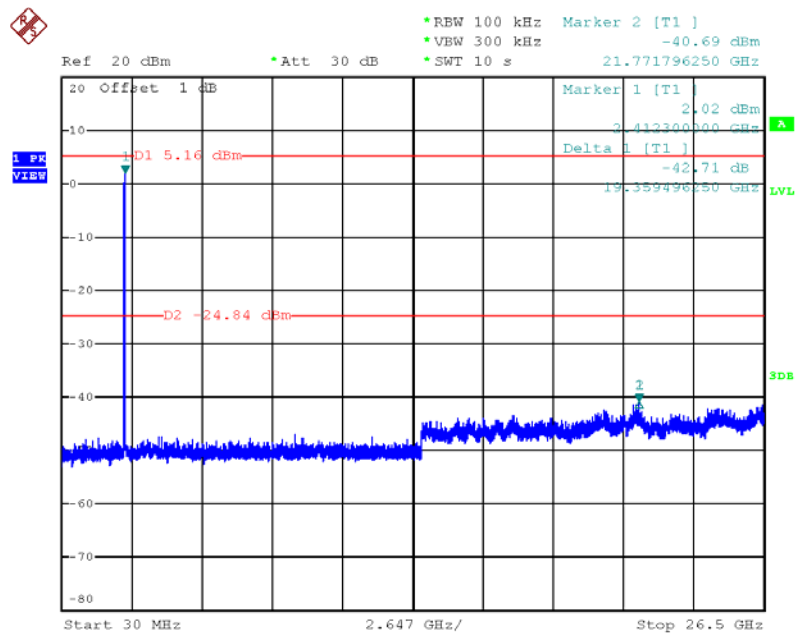

Date: 8.MAR.2013 19:47:16



Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 s Marker 2 [T1]

20 Offset 1 dB

1 PR VIEW

Delta 1 [T1]

LVL

Start 30 MHz 2.647 GHz/ Stop 26.5 GHz

Ref 20 dBm *Att 30 dB *REW 100 kHz *VEW 300 kHz *SWT 10 s

Marker 1 [T1] 2.33 GHz -41.64 dBm


Delta 1 [T1] -43.97 dB

25.786603750 GHz

Start 30 MHz 2.647 GHz/ Stop 26.5 GHz


Issued Date : Mar. 20, 2013

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

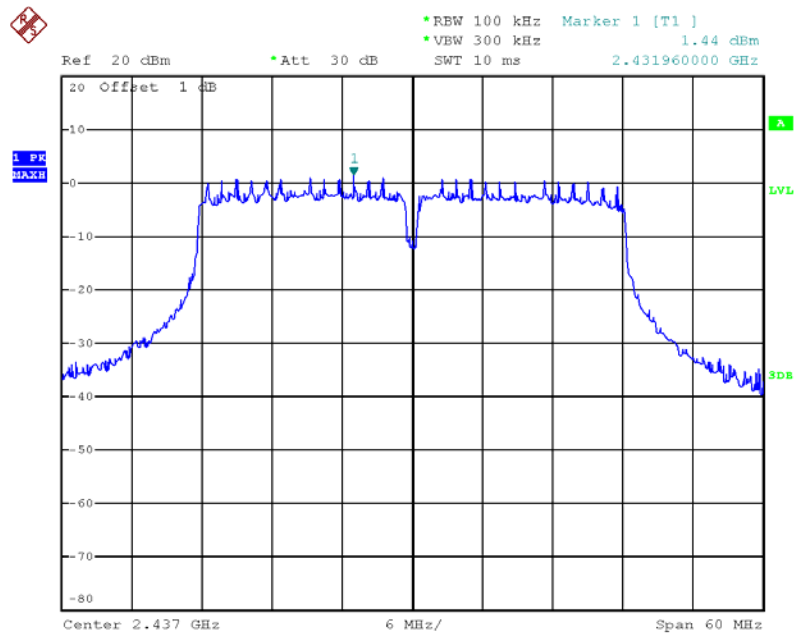


Date: 8.MAR.2013 17:48:32

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 (down 30dBc)

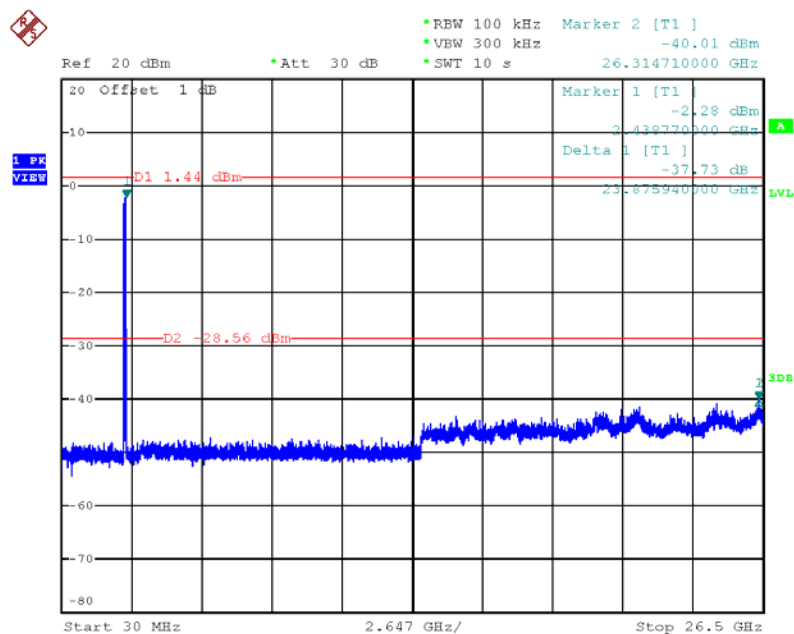

Date: 8.MAR.2013 19:50:14



1 PK
VIEW

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 s

20 Offset 1 dB

Marker 1 [T1] 1.11 dBm
2.432152500 GHz
Delta 1 [T1] -41.61 dB
26.304783750 GHz

D1 1.44 dBm

D2 -28.56 dBm

Start 30 MHz 2.647 GHz/ Stop 26.5 GHz

Ref 20 dBm *Att 30 dB *RBW 100 kHz *VW 300 kHz *SWT 10 s

Marker 2 [T1] -41.56 dBm 26.185668750 GHz

20 Offset 1 dB

Marker 1 [T1] -3.21 dBm 2.452005000 GHz

Delta 1 [T1] -38.34 dBm 23.733663750 GHz


D1 1.44 dBm

D2 -28.56 dBm

Start 30 MHz 2.647 GHz/ Stop 26.5 GHz


Page No. : 56 of 64
Issued Date : Mar. 20, 2013

Plot on Configuration IEEE 802.11b / Reference Level

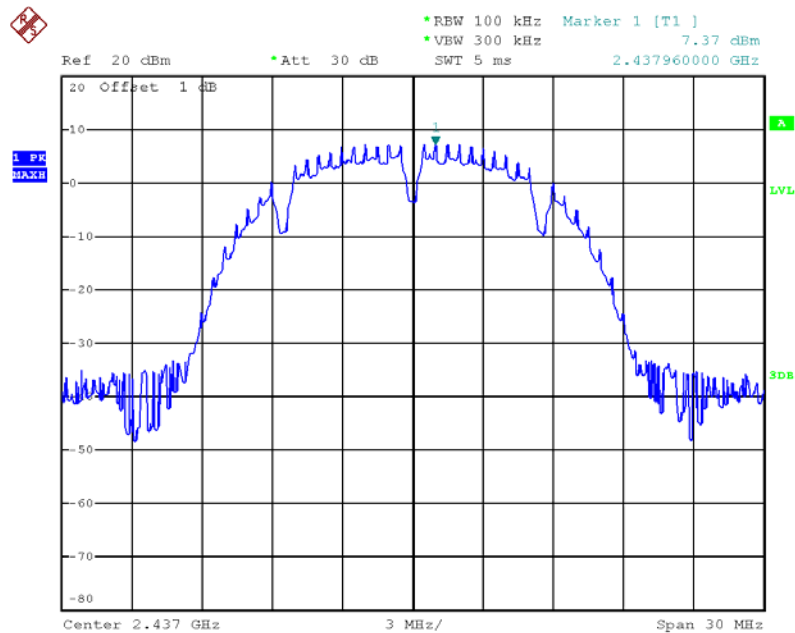


Date: 8.MAR.2013 17:18:39

Plot on Configuration IEEE 802.11b / CH 1 (down 30dBc)

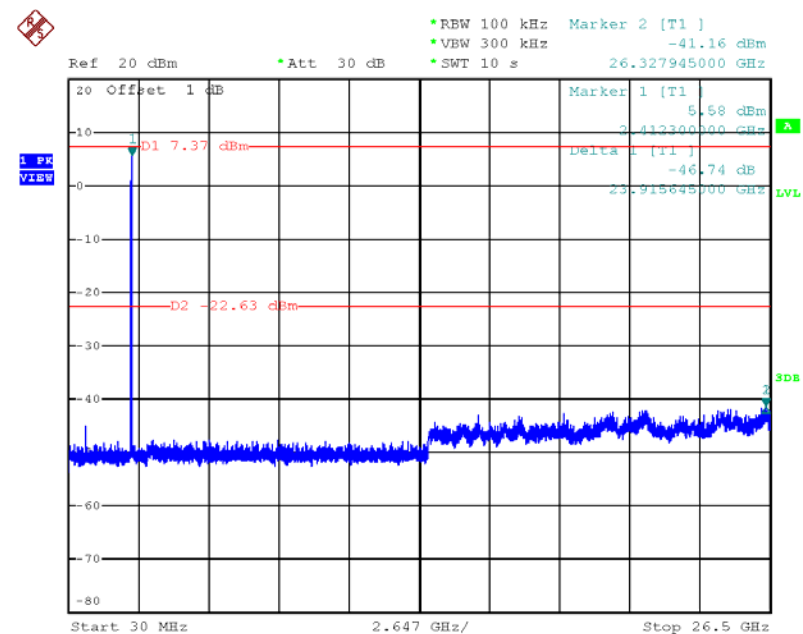


Date: 8.MAR.2013 19:37:28

Plot on Configuration IEEE 802.11b / CH 6 (down 30dBc)

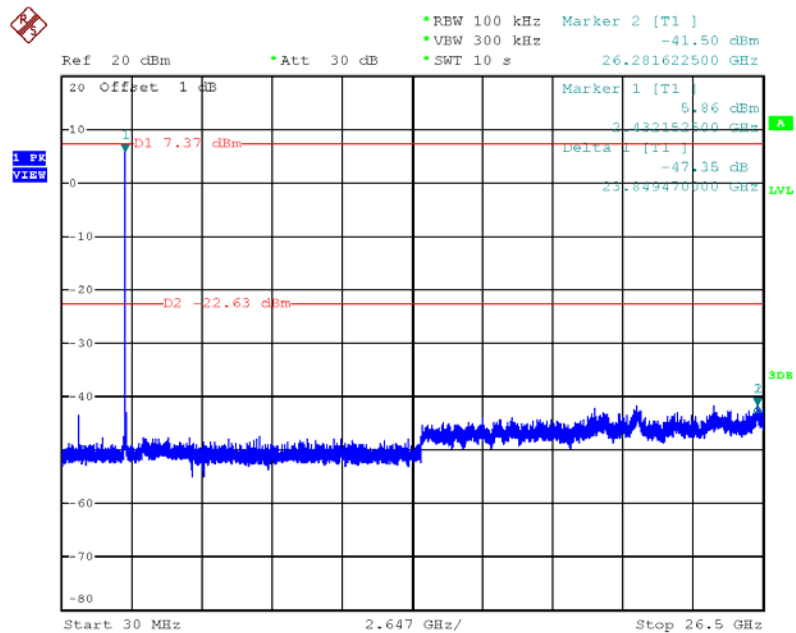


Date: 8.MAR.2013 19:39:02

Plot on Configuration IEEE 802.11b / CH 11 (down 30dBc)

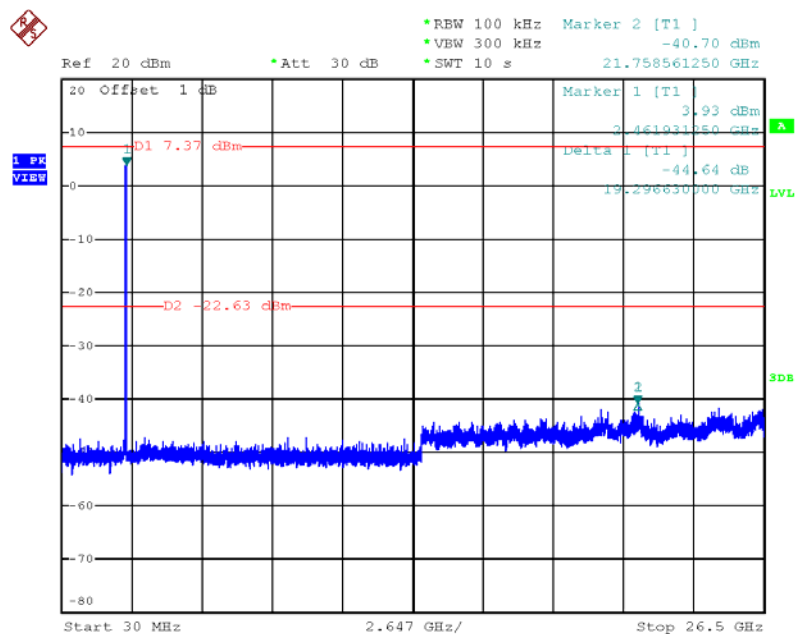


Date: 8.MAR.2013 19:40:17

Plot on Configuration IEEE 802.11g / Reference Level

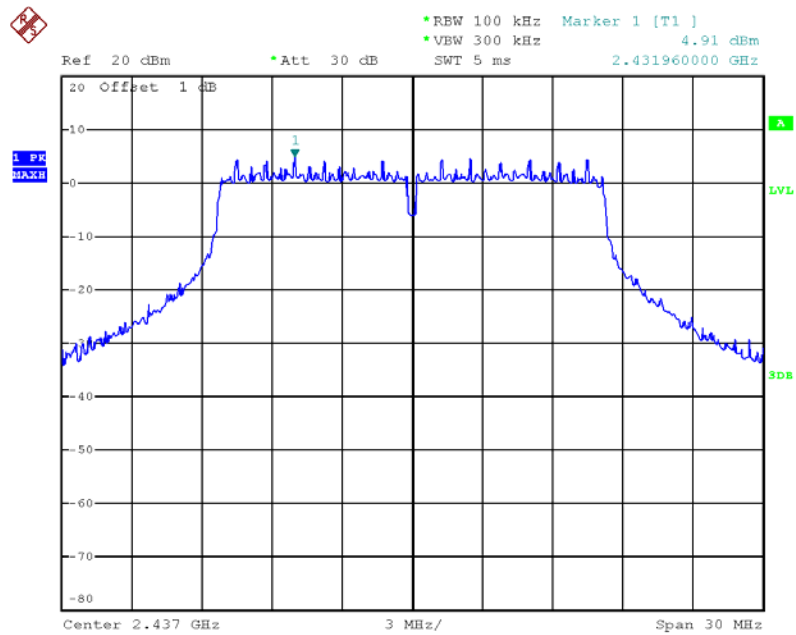


Date: 8.MAR.2013 17:28:07

Plot on Configuration IEEE 802.11g / CH 1 (down 30dBc)

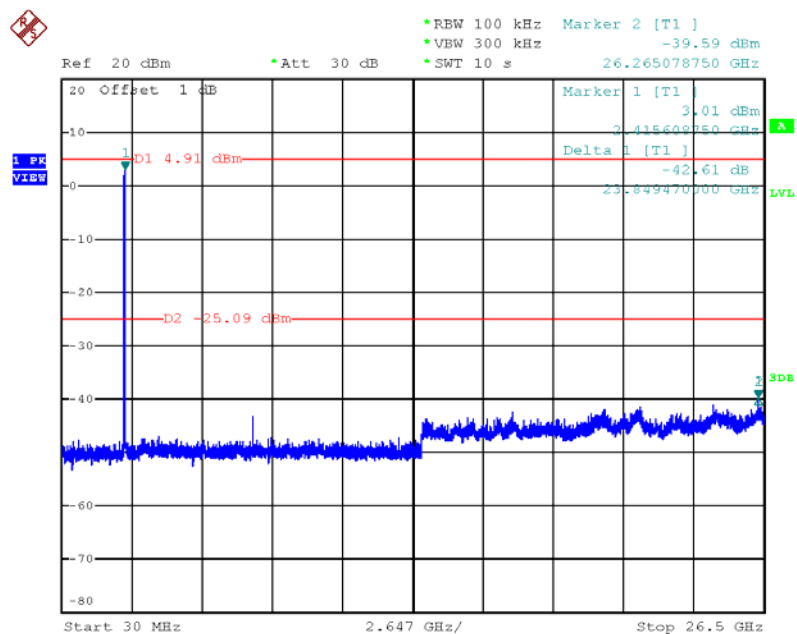


Date: 8.MAR.2013 19:42:13

Plot on Configuration IEEE 802.11g / CH 6 (down 30dBc)

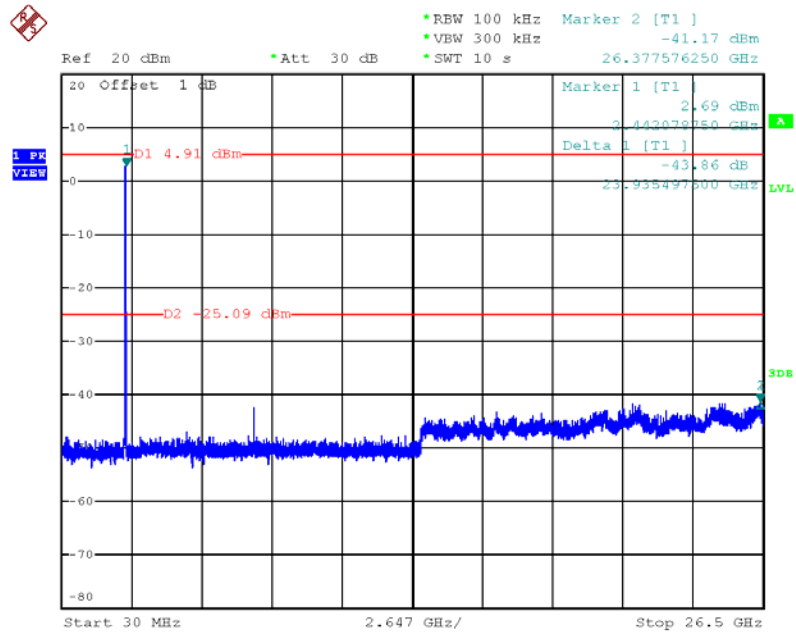

Date: 8.MAR.2013 19:43:12

Plot on Configuration IEEE 802.11g / CH 11 (down 30dBc)

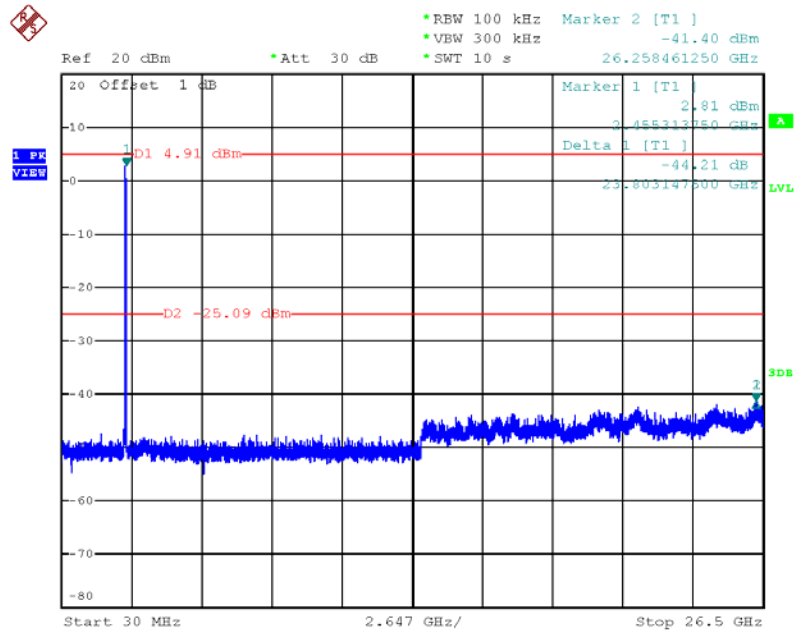

Date: 8.MAR.2013 19:44:40

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 03, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihs Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085