

FCC Test Report (Co-Located)

Report No.: RF191129E09-2

FCC ID: PY319400470

Test Model: RBR750

Series Model: RBS750

Received Date: Nov. 29, 2019

Test Date: Jan. 08, 2020

Issued Date: Jan. 14, 2020

Applicant: NETGEAR, INC.

Address: 350 East Plumeria Drive, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

**FCC Registration /
Designation Number(1):** 788550 / TW0003

Test Location (2): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan.

**FCC Registration /
Designation Number(2):** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|------------------------------------------------------------------|-----------|
| Release Control Record | 3 |
| 1 Certificate of Conformity | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Modification Record | 5 |
| 3 General Information | 6 |
| 3.1 General Description of EUT | 6 |
| 3.2 Description of Test Modes | 9 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail..... | 10 |
| 3.3 Description of Support Units | 11 |
| 3.3.1 Configuration of System under Test | 11 |
| 3.4 General Description of Applied Standards | 12 |
| 4 Test Types and Results | 13 |
| 4.1 Radiated Emission and Bandedge Measurement..... | 13 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 13 |
| 4.1.2 Test Instruments | 14 |
| 4.1.3 Test Procedures..... | 15 |
| 4.1.4 Deviation from Test Standard | 15 |
| 4.1.5 Test Setup..... | 16 |
| 4.1.6 EUT Operating Conditions..... | 17 |
| 4.1.7 Test Results | 18 |
| 5 Pictures of Test Arrangements | 21 |
| Appendix – Information of the Testing Laboratories | 22 |

Release Control Record

| Issue No. | Description | Date Issued |
|---------------|-------------------|---------------|
| RF191129E09-2 | Original release. | Jan. 14, 2020 |

1 Certificate of Conformity

Product: Orbi Router, Orbi Satellite

Brand: NETGEAR

Test Model: RBR750

Series Model: RBS750

Sample Status: Engineering sample

Applicant: NETGEAR, INC.

Test Date: Jan. 08, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen, **Date:** Jan. 14, 2020
Pettie Chen / Senior Specialist

Approved by : Bruce Chen, **Date:** Jan. 14, 2020
Bruce Chen / Senior Project Engineer

2 Summary of Test Results

| Applied Standard: | 47 CFR FCC Part 15, Subpart C (Section 15.247) 47 CFR FCC Part 15, Subpart E (Section 15.407) | | |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------|
| FCC Clause | Test Item | Result | Remarks |
| 15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6) | Radiated Emissions | Pass | Meet the requirement of limit. Minimum passing margin is -3.3dB at 41.88MHz. |

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.
Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (±) |
|--------------------------------|---------------|--------------------------------|
| Radiated Emissions up to 1 GHz | 9kHz ~ 30MHz | 3.0 dB |
| | 30MHz ~ 1GHz | 4.9 dB |
| Radiated Emissions above 1 GHz | 1 GHz ~ 6GHz | 5.1 dB |
| | 6GHz ~ 18GHz | 4.9 dB |
| | 18GHz ~ 40GHz | 5.2 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product | Orbi Router, Orbi Satellite |
| Brand | NETGEAR |
| Test Model | RBR750 |
| Series Model | RBS750 |
| Model Difference | Refer to Note for more details |
| Status of EUT | Engineering sample |
| Power Supply Rating | 12Vdc (adapter) |
| Modulation Type | CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA |
| Modulation Technology | DSSS, OFDM, OFDMA |
| Transfer Rate | 2.4GHz: 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n (HT20/40): up to MCS15 802.11n (VHT20/40): up to MCS9 802.11ax: up to MCS11 5.0GHz: 802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n (HT20/40): up to MCS31 802.11ac (VHT20/40/80): up to MCS9 802.11ax: up to MCS11 |
| Operating Frequency | 2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5180 ~ 5240MHz, 5745 ~ 5825MHz |
| Number of Channel | 2412 ~ 2462MHz: 802.11b, 802.11g, 802.11n (HT20), 802.11n (VHT20), 802.11ax (HE20): 11 802.11n (HT40), 802.11n (VHT40), 802.11ax (HE40): 7 5180~5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 4 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 2 802.11ac (VHT80), 802.11ax (HE80): 1 5745~5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 5 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 2 802.11ac (VHT80), 802.11ax (HE80): 1 |

| | |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output Power | 2.4GHz Band: CDD Mode: 958.897mW Beamforming Mode: 646.447mW 5GHz Band: CDD Mode: 5180 ~ 5240MHz: 693.591mW 5745 ~ 5825MHz: 984.884mW Beamforming Mode: 5180 ~ 5240MHz: 693.591mW 5745 ~ 5825MHz: 801.871mW |
| Antenna Type | Refer to Note |
| Antenna Connector | Refer to Note |
| Accessory Device | Adapter |
| Cable Supplied | 1.8m non-shielded RJ45 cable without core |

Note:

1. All models are electrically identical except software firmware. Model: RBR750 is the representative for final test.

| Brand | Product Name | Model | Difference |
|---------|----------------|--------|--------------------------------------------|
| NETGEAR | Orbi Router | RBR750 | Function: Master WAN port*1; LAN port*3 |
| | Orbi Satellite | RBS750 | Function: Master + Client LAN port*2 |

2. The EUT uses following adapters.

| Adapter 1 | |
|--------------|--------------------------------------------|
| Brand | NETGEAR |
| Model | 2ABL030F1 NJ |
| P/N | 332-10948-01 |
| Input Power | 100-120Vac, 50/60Hz, 1.0A |
| Output Power | 12.0V, 2.5A |
| Power Cable | 1.8m non-shielded power cable without core |

| Adapter 2 | |
|--------------|--------------------------------------------|
| Brand | NETGEAR |
| Model | AD2067F10 |
| P/N | 332-11509-01 |
| Input Power | 100-120Vac, 50/60Hz, 1.0A |
| Output Power | 12.0V, 2.5A |
| Power Cable | 1.8m non-shielded power cable without core |

| Adapter 3 | |
|--------------|--------------------------------------------|
| Brand | NETGEAR |
| Model | AD2067M20 |
| P/N | 332-11074-01 |
| Input Power | 100-240Vac, 50/60Hz, 1.0A |
| Output Power | 12.0V, 2.5A |
| Power Cable | 1.8m non-shielded power cable without core |

*After pre-testing, Adapter 3 is the worst case for the final tests.

3. The EUT incorporates a MIMO function. Physically, the EUT provides 4 completed transmitters and 4 receivers.

| 2.4GHz Band | | | |
|------------------|----------------|----------------|-------------|
| Modulation Mode | TX Function | | Beamforming |
| 802.11b | 2TX | | Not Support |
| 802.11g | 2TX | | Not Support |
| 802.11n (HT20) | 2TX | | Support |
| 802.11n (HT40) | 2TX | | Support |
| 802.11n (VHT20) | 2TX | | Support |
| 802.11n (VHT40) | 2TX | | Support |
| 802.11ax (HE20) | 2TX | | Support |
| 802.11ax (HE40) | 2TX | | Support |
| 5GHz Band | | | |
| Modulation Mode | TX Function | | Beamforming |
| | 5180 ~ 5240MHz | 5745 ~ 5825MHz | |
| 802.11a | 2TX | 4TX | Not Support |
| 802.11n (HT20) | 2TX | 4TX | Support |
| 802.11n (HT40) | 2TX | 4TX | Support |
| 802.11ac (VHT20) | 2TX | 4TX | Support |
| 802.11ac (VHT40) | 2TX | 4TX | Support |
| 802.11ac (VHT80) | 2TX | 4TX | Support |
| 802.11ax (HE20) | 2TX | 4TX | Support |
| 802.11ax (HE40) | 2TX | 4TX | Support |
| 802.11ax (HE80) | 2TX | 4TX | Support |

* The bandwidth and modulation are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 802.11ac mode and HE20/HE40 on 802.11ax mode. The bandwidth and modulation are similar for VHT80 on 802.11ac mode and HE80 on 802.11ax mode. Therefore the investigated worst case is the representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n/ac/ax, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

4. The EUT uses following antennas.

| | | | |
|------------------------|--------------|--|--------------|
| Antenna Type | Dipole | | |
| Antenna Connector | i-pex(MHF) | | |
| Directional Gain (dBi) | | | |
| 2.4GHz Band | 5GHz U-NII-1 | | 5GHz U-NII-3 |
| 5.46 | 5.67 | | 6.94 |

3.2 Description of Test Modes

For 2.4GHz

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), 802.11n (VHT20), 802.11ax (HE20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2412MHz | 7 | 2442MHz |
| 2 | 2417MHz | 8 | 2447MHz |
| 3 | 2422MHz | 9 | 2452MHz |
| 4 | 2427MHz | 10 | 2457MHz |
| 5 | 2432MHz | 11 | 2462MHz |
| 6 | 2437MHz | | |

7 channels are provided for 802.11n (HT40), 802.11n (VHT40), 802.11ax (HE40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 3 | 2422MHz | 7 | 2442MHz |
| 4 | 2427MHz | 8 | 2447MHz |
| 5 | 2432MHz | 9 | 2452MHz |
| 6 | 2437MHz | | |

For 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 36 | 5180 MHz | 44 | 5220 MHz |
| 40 | 5200 MHz | 48 | 5240 MHz |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 38 | 5190 MHz | 46 | 5230 MHz |

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

| Channel | Frequency |
|---------|-----------|
| 42 | 5210MHz |

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 149 | 5745MHz | 161 | 5805MHz |
| 153 | 5765MHz | 165 | 5825MHz |
| 157 | 5785MHz | | |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 151 | 5755MHz | 159 | 5795MHz |

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

| Channel | Frequency |
|---------|-----------|
| 155 | 5775MHz |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT Configure Mode | Applicable to | | Description |
|--------------------|---------------|-------|----------------------|
| | RE \geq 1G | RE<1G | |
| - | √ | √ | Power from adapter 3 |

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement **RE<1G**: Radiated Emission below 1GHz

Note:

- The EUT is designed to be positioned on the X-plane only.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Mode | Freq. Range (MHz) | Available Channel | Tested Channel | Modulation Technology |
|--------------------|-----------------|-------------------|-------------------|-----------------------------|-----------------------|
| - | 802.11b | 2412~2462 | 1 to 11 | CH 6 + CH 40 + CH 151 | DBPSK |
| | 802.11ax (HE20) | 5180~5240 | 36 to 48 | | OFDMA |
| | 802.11ax (HE40) | 5745~5825 | 151 to 159 | | OFDMA |

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Mode | Freq. Range (MHz) | Available Channel | Tested Channel | Modulation Technology |
|--------------------|-----------------|-------------------|-------------------|-----------------------------|-----------------------|
| - | 802.11b | 2412~2462 | 1 to 11 | CH 6 + CH 40 + CH 151 | DBPSK |
| | 802.11ax (HE20) | 5180~5240 | 36 to 48 | | OFDMA |
| | 802.11ax (HE40) | 5745~5825 | 151 to 159 | | OFDMA |

Test Condition:

| Applicable to | Environmental Conditions | Input Power | Tested by |
|---------------|--------------------------|--------------|-----------|
| RE \geq 1G | 21 deg. C, 64% RH | 120Vac, 60Hz | Kevin Ko |
| RE<1G | 21 deg. C, 64% RH | 120Vac, 60Hz | Kevin Ko |

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|---------|-------|-----------|------------|------------------|---------|
| A. | Laptop | DELL | E5430 | HYV4VY1 | FCC DoC Approved | - |
| B. | Laptop | DELL | E5430 | GM1SKV1 | FCC DoC Approved | - |

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A, B acted as communication partners to transfer data.

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|------------------|
| 1. | DC cable | 1 | 1.8 | N | 0 | Accessory of EUT |
| 2. | RJ45 cable | 1 | 10 | N | 0 | - |
| 3. | RJ45 cable | 1 | 10 | N | 0 | - |

3.3.1 Configuration of System under Test

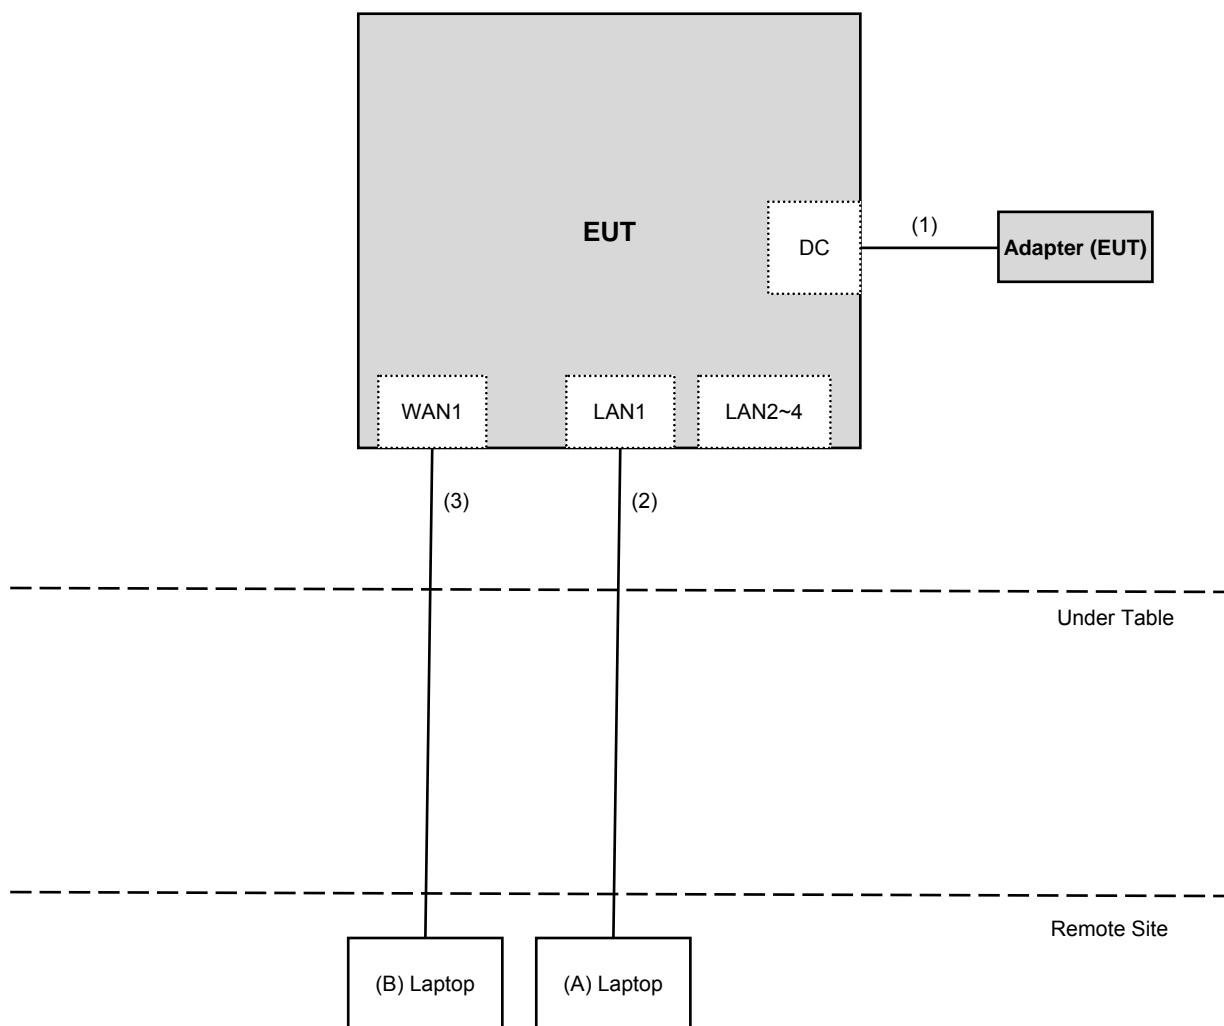

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

FCC Part 15, Subpart E (15.407)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

| Applicable To | | | Limit | |
|--------------------------------------------------------------------------------------------------|-------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 789033 D02 General UNII Test Procedure New Rules v02r01 | | | Field Strength at 3m | |
| | | | PK: 74 (dBµV/m) | AV: 54 (dBµV/m) |
| Frequency Band | Applicable To | | EIRP Limit | Equivalent Field Strength at 3m |
| 5150~5250 MHz | 15.407(b)(1) | | PK: -27 (dBm/MHz) | PK: 68.2(dBµV/m) |
| 5250~5350 MHz | 15.407(b)(2) | | | |
| 5470~5725 MHz | 15.407(b)(3) | | | |
| 5725~5850 MHz | <input checked="" type="checkbox"/> | 15.407(b)(4)(i) | PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4} | PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4} |
| | <input type="checkbox"/> | 15.407(b)(4)(ii) | Emission limits in section 15.247(d) | |
| ^{*1} beyond 75 MHz or more above of the band edge. | | | ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. | |
| ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. | | | ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. | |

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|-----------------------------------------------------|----------------------|-------------|---------------|---------------|
| Test Receiver Agilent | N9038A | MY51210202 | Dec. 13, 2019 | Dec. 12, 2020 |
| Pre-Amplifier EMCI | EMC001340 | 980142 | May 30, 2019 | May 29, 2020 |
| Loop Antenna Electro-Metrics | EM-6879 | 264 | Jan. 22, 2019 | Jan. 21, 2020 |
| RF Cable | NA | LOOPCAB-001 | Jan. 14, 2019 | Jan. 13, 2020 |
| RF Cable | NA | LOOPCAB-002 | Jan. 14, 2019 | Jan. 13, 2020 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2B | AMP-ZFL-01 | Oct. 23, 2019 | Oct. 22, 2020 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-406 | Nov. 11, 2019 | Nov. 10, 2020 |
| RF Cable | 8D | 966-4-1 | Mar. 19, 2019 | Mar. 18, 2020 |
| RF Cable | 8D | 966-4-2 | Mar. 19, 2019 | Mar. 18, 2020 |
| RF Cable | 8D | 966-4-3 | Mar. 19, 2019 | Mar. 18, 2020 |
| Fixed attenuator Mini-Circuits | UNAT-5+ | PAD-3m-4-01 | Sep. 26, 2019 | Sep. 25, 2020 |
| Horn_Antenna SCHWARZBECK | BBHA 9120D | 9120D-783 | Nov. 24, 2019 | Nov. 23, 2020 |
| Pre-Amplifier EMCI | EMC12630SE | 980385 | Aug. 15, 2019 | Aug. 14, 2020 |
| RF Cable | EMC104-SM-SM-1200 | 160923 | Jan. 28, 2019 | Jan. 27, 2020 |
| RF Cable | 104 RF cable | 131215 | Jan. 10, 2019 | Jan. 09, 2020 |
| RF Cable | EMC104-SM-SM-6000 | 180418 | May 03, 2019 | May 02, 2020 |
| Pre-Amplifier EMCI | EMC184045SE | 980387 | Jan. 28, 2019 | Jan. 27, 2020 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | BBHA9170519 | Nov. 24, 2019 | Nov. 23, 2020 |
| RF Cable | EMC102-KM-KM-1200 | 160924 | Jan. 28, 2019 | Jan. 27, 2020 |
| RF Cable | EMC102-KM-KM-1200 | 160925 | Jan. 28, 2019 | Jan. 27, 2020 |
| Software | ADT_Radiated_V8.7.08 | NA | NA | NA |
| Boresight Antenna Tower & Turn Table Max-Full | MF-7802BS | MF780208530 | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Hsinchu 966 Chamber No. 4.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

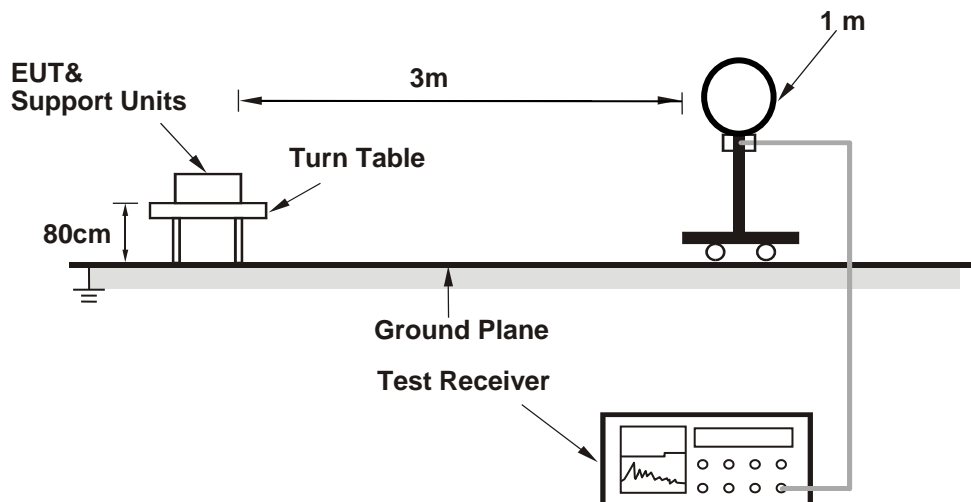

For Radiated emission 30MHz to 1GHz

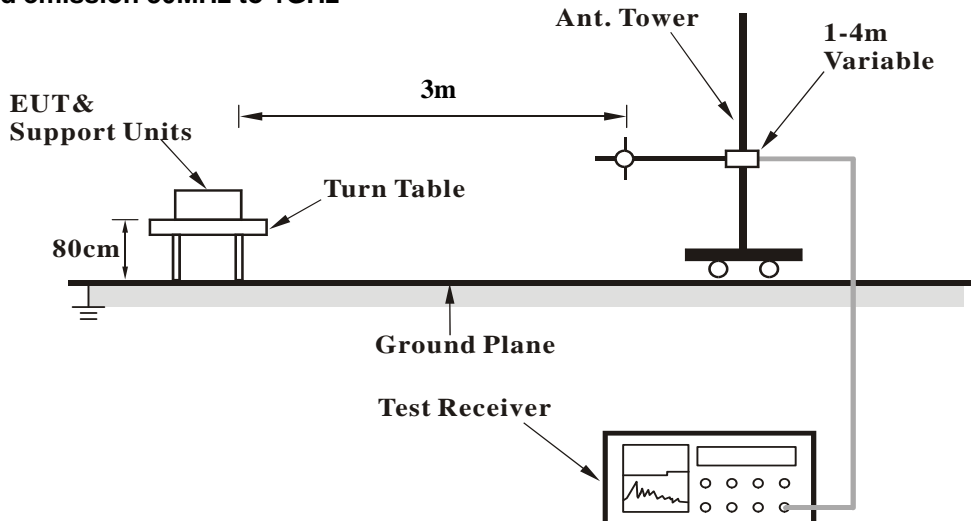

For Radiated emission above 1GHz

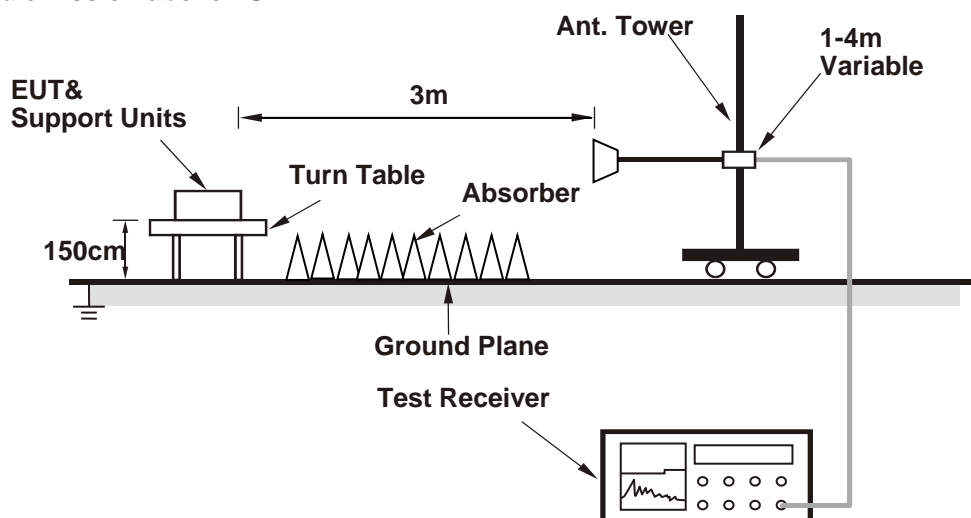

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table and power from notebook.
- Prepared 2 notebooks to act as a communication partner.
- The communication partner connected with EUT via RJ45 cables and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz Data:

802.11b + 802.11ax (HE20) + 802.11ax (HE40)

| | | | |
|-----------------|-----------------------|-------------------|---------------------------|
| CHANNEL | CH 6 + CH 40 + CH 151 | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 4874.00 | 43.6 PK | 74.0 | -30.4 | 1.08 H | 166 | 41.4 | 2.2 |
| 2 | 4874.00 | 37.6 AV | 54.0 | -16.4 | 1.08 H | 166 | 35.4 | 2.2 |
| 3 | 7311.00 | 45.2 PK | 74.0 | -28.8 | 2.27 H | 87 | 36.2 | 9.0 |
| 4 | 7311.00 | 38.6 AV | 54.0 | -15.4 | 2.27 H | 87 | 29.6 | 9.0 |
| 5 | #10400.00 | 50.1 PK | 68.2 | -18.1 | 1.08 H | 166 | 37.0 | 13.1 |
| 6 | 11510.00 | 50.3 PK | 74.0 | -23.7 | 1.08 H | 166 | 36.7 | 13.6 |
| 7 | 11510.00 | 44.6 AV | 54.0 | -9.4 | 1.08 H | 166 | 31.0 | 13.6 |
| 8 | 15600.00 | 49.6 PK | 74.0 | -24.4 | 2.27 H | 87 | 36.5 | 13.1 |
| 9 | 15600.00 | 36.9 AV | 54.0 | -17.1 | 2.27 H | 87 | 23.8 | 13.1 |
| 10 | #17265.00 | 50.1 PK | 68.2 | -18.1 | 2.27 H | 87 | 33.2 | 16.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 4874.00 | 41.2 PK | 74.0 | -32.8 | 1.08 V | 166 | 39.0 | 2.2 |
| 2 | 4874.00 | 39.1 AV | 54.0 | -14.9 | 1.08 V | 166 | 36.9 | 2.2 |
| 3 | 7311.00 | 44.9 PK | 74.0 | -29.1 | 2.27 V | 87 | 35.9 | 9.0 |
| 4 | 7311.00 | 35.2 AV | 54.0 | -18.8 | 2.27 V | 87 | 26.2 | 9.0 |
| 5 | #10400.00 | 56.7 PK | 68.2 | -11.5 | 1.08 V | 166 | 43.6 | 13.1 |
| 6 | 11510.00 | 55.9 PK | 74.0 | -18.1 | 1.08 V | 166 | 42.3 | 13.6 |
| 7 | 11510.00 | 44.7 AV | 54.0 | -9.3 | 1.08 V | 166 | 31.1 | 13.6 |
| 8 | 15600.00 | 48.6 PK | 74.0 | -25.4 | 2.27 V | 87 | 35.5 | 13.1 |
| 9 | 15600.00 | 35.9 AV | 54.0 | -18.1 | 2.27 V | 87 | 22.8 | 13.1 |
| 10 | #17265.00 | 46.8 PK | 68.2 | -21.4 | 2.27 V | 87 | 29.9 | 16.9 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz data


802.11b + 802.11ax (HE20) + 802.11ax (HE40)

| | | | |
|-----------------|-----------------------|-------------------|-----------------|
| CHANNEL | CH 6 + CH 40 + CH 151 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 46.08 | 31.7 QP | 40.0 | -8.3 | 1.00 H | 310 | 39.6 | -7.9 |
| 2 | 157.43 | 33.8 QP | 43.5 | -9.7 | 2.00 H | 269 | 41.4 | -7.6 |
| 3 | 171.45 | 33.9 QP | 43.5 | -9.6 | 2.00 H | 266 | 42.3 | -8.4 |
| 4 | 191.99 | 31.0 QP | 43.5 | -12.5 | 2.00 H | 111 | 41.6 | -10.6 |
| 5 | 211.20 | 30.5 QP | 43.5 | -13.0 | 1.00 H | 269 | 41.4 | -10.9 |
| 6 | 327.16 | 31.2 QP | 46.0 | -14.8 | 1.00 H | 32 | 37.2 | -6.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

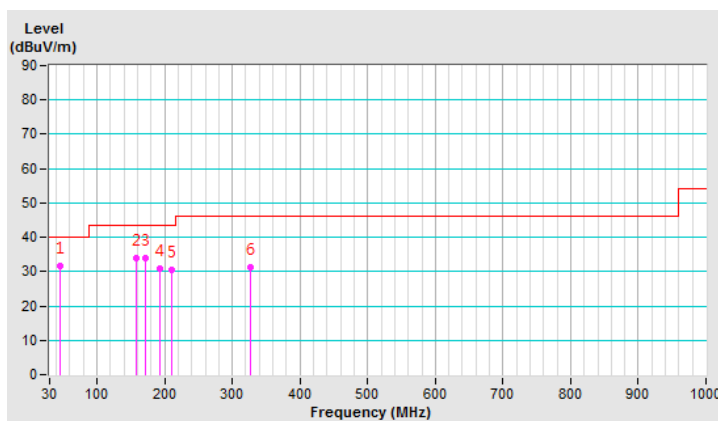


| | | | |
|-----------------|-----------------------|-------------------|-----------------|
| CHANNEL | CH 6 + CH 40 + CH 151 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 41.88 | 36.7 QP | 40.0 | -3.3 | 1.00 V | 233 | 45.0 | -8.3 |
| 2 | 85.75 | 35.1 QP | 40.0 | -4.9 | 2.00 V | 61 | 48.8 | -13.7 |
| 3 | 104.30 | 34.3 QP | 43.5 | -9.2 | 1.00 V | 23 | 45.6 | -11.3 |
| 4 | 150.84 | 32.5 QP | 43.5 | -11.0 | 2.00 V | 0 | 40.2 | -7.7 |
| 5 | 170.89 | 31.0 QP | 43.5 | -12.5 | 1.00 V | 303 | 39.3 | -8.3 |
| 6 | 191.67 | 31.0 QP | 43.5 | -12.5 | 1.00 V | 339 | 41.6 | -10.6 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

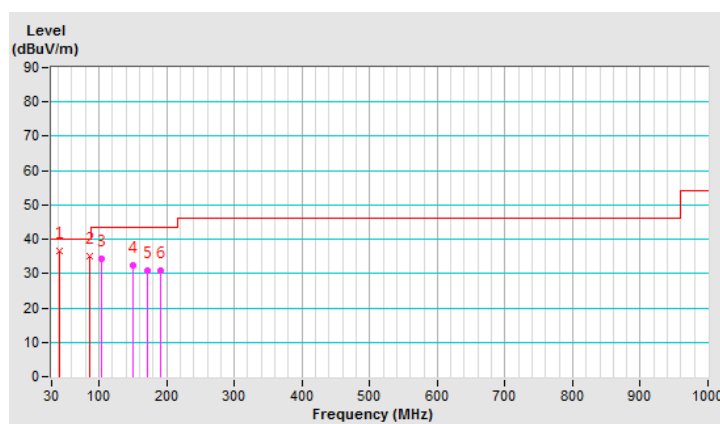

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---