

## FCC Test Report

**Report No.:** RFBBQZ-WTW-P22040440

**FCC ID:** PY322100554

**Test Model:** WAX625

**Received Date:** Apr. 13, 2022

**Test Date:** May 07 ~ Jun. 27, 2022

**Issued Date:** Jul. 14, 2022

**Applicant and Manufacturer:** NETGEAR, INC.

**Address:** 350 East Plumeria Drive, San Jose, CA 95134, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards and References.....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	40
4.2.1 Limits of Conducted Emission Measurement.....	40
4.2.2 Test Instruments.....	40
4.2.3 Test Procedures.....	41
4.2.4 Deviation from Test Standard.....	41
4.2.5 Test Setup.....	41
4.2.6 EUT Operating Conditions.....	41
4.2.7 Test Results.....	42
4.3 6dB Bandwidth Measurement.....	50
4.3.1 Limits of 6dB Bandwidth Measurement.....	50
4.3.2 Test Setup.....	50
4.3.3 Test Instruments.....	50
4.3.4 Test Procedure.....	50
4.3.5 Deviation from Test Standard.....	50
4.3.6 EUT Operating Conditions.....	50
4.3.7 Test Result.....	51
4.4 Conducted Output Power Measurement.....	53
4.4.1 Limits of Conducted Output Power Measurement.....	53
4.4.2 Test Setup.....	53
4.4.3 Test Instruments.....	53
4.4.4 Test Procedures.....	53
4.4.5 Deviation from Test Standard.....	53
4.4.6 EUT Operating Conditions.....	53
4.4.7 Test Results.....	54
4.5 Power Spectral Density Measurement.....	56
4.5.1 Limits of Power Spectral Density Measurement.....	56
4.5.2 Test Setup.....	56
4.5.3 Test Instruments.....	56
4.5.4 Test Procedure.....	56
4.5.5 Deviation from Test Standard.....	56
4.5.6 EUT Operating Condition.....	56

4.5.7 Test Results .....	57
4.6 Conducted Out of Band Emission Measurement.....	60
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	60
4.6.2 Test Setup.....	60
4.6.3 Test Instruments .....	60
4.6.4 Test Procedure .....	60
4.6.5 Deviation from Test Standard .....	61
4.6.6 EUT Operating Condition .....	61
4.6.7 Test Results .....	61
<b>5 Pictures of Test Arrangements.....</b>	<b>70</b>
<b>Annex A- Band Edge Measurement.....</b>	<b>71</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>77</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P22040440	Original release.	Jul. 14, 2022

## 1 Certificate of Conformity

**Product:** Insight Managed WiFi 6 AX5400 Access Point

**Brand:** NETGEAR

**Test Model:** WAX625

**Sample Status:** Engineering sample

**Applicant and Manufacturer:** NETGEAR, INC.

**Test Date:** May 07 ~ Jun. 27, 2022

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Pettie Chen, **Date:** Jul. 14, 2022  
Pettie Chen / Senior Specialist

**Approved by :** Jeremy Lin, **Date:** Jul. 14, 2022  
Jeremy Lin / Senior Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -12.08dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Insight Managed WiFi 6 AX5400 Access Point
Brand	NETGEAR
Test Model	WAX625
Sample Status	Engineering sample
Power Supply Rating	12Vdc (adapter) 55.5Vdc (PoE)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDMA
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 400Mbps 802.11ax: up to 573.5Mbps
Operating Frequency	2412~2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7
Output Power	CDD Mode: 868.090mW Beamforming Mode: 766.800mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11b	Not Support	2TX
802.11g	Not Support	2TX
802.11n (HT20)	Not Support	2TX
802.11n (HT40)	Not Support	2TX
VHT20	Support	2TX
VHT40	Support	2TX
802.11ax (HE20)	Support	2TX
802.11ax (HE40)	Support	2TX

\* The bandwidth and modulation are similar for HT20/HT40/VHT20/VHT40 on 802.11n mode and HE20/HE40 on 802.11ax mode. Therefore the investigated worst case is the representative mode in test report. (Final test mode refer section 3.2.1)

\* For 802.11n and 802.11ac/ax, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

2. The EUT uses following adapters and PoE.

Adapter 1	
Brand	NETGEAR
Model	ADS-40FPA-12 12030EPCU-L ADS-40FPA-12 12030EPC-L
P/N	332-11584-02
Input Power	100~120 Vac; 60 MHz; Max. 1A
Output Power	12Vdc; 2.5A
Power line	1.8m cable without core

Adapter 2	
Brand	NETGEAR
Model	AD2067F10
P/N	332-10944-02
Input Power	100~120 Vac; 60 MHz; Max. 1A
Output Power	12Vdc; 2.5A
Power line	1.8m cable without core

Adapter 3	
Brand	NETGEAR
Model	2ABL030F 1
P/N	332-10948-02
Input Power	100~120 Vac; 60 MHz; Max. 1A
Output Power	12Vdc; 2.5A
Power line	1.83m cable without core

PoE (Support Unit)	
Brand	BUFFALO
Model	BIJ-POE-1P2GH
Input Power	100~240Vac, 1.1A, 50/60Hz
Output Power	55.5Vdc, 0.54A

3. The antenna information is listed as below.

Antenna Type	Dipole
Connector Type	IPEX
Antenna Gain	Directional Gain (dBi)
2400~2483.5MHz	3.27
5150~5250MHz	6.02
5250~5350MHz	6.11
5470~5725MHz	6.15
5725~5850MHz	6.20

\* The detailed antenna information, please refer to the Test report-Antenna Spec.pdf.

4. WLAN 2.4GHz & 5GHz technology can transmit at same time.



### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter 1
B	-	√	√	-	Power from adapter 2
C	-	√	√	-	Power from adapter 3
D	-	√	√	-	Power from PoE

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
- "-": Means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	-
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	-
	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0	-
	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0	-

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
A, B, C, D	802.11g	1 to 11	6	OFDM	BPSK	6.0	-

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
A, B, C, D	802.11g	1 to 11	6	OFDM	BPSK	6.0	-

Conducted Output Power Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
A	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Bandwidth, Power Spectral Density and Conducted Out of Band Emission Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
A	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	22 deg. C, 69% RH	120Vac, 60Hz	Luis Lee
RE<1G	23 deg. C, 66% RH	120Vac, 60Hz	Titan Hsu
PLC	23 deg. C, 66% RH	120Vac, 60Hz	Titan Hsu
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Jisyong Wang

### 3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98%, duty factor is required.

802.11b: Duty cycle = 0.68/1.07 = 0.636, Duty factor =  $10 * \log(1/0.636) = 1.97$

802.11g: Duty cycle = 1.965/2.097 = 0.937, Duty factor =  $10 * \log(1/0.937) = 0.28$

802.11ax (HE20): Duty cycle = 5.43/5.86 = 0.927, Duty factor =  $10 * \log(1/0.927) = 0.33$

802.11ax (HE40): Duty cycle = 5.445/5.91 = 0.921, Duty factor =  $10 * \log(1/0.921) = 0.36$

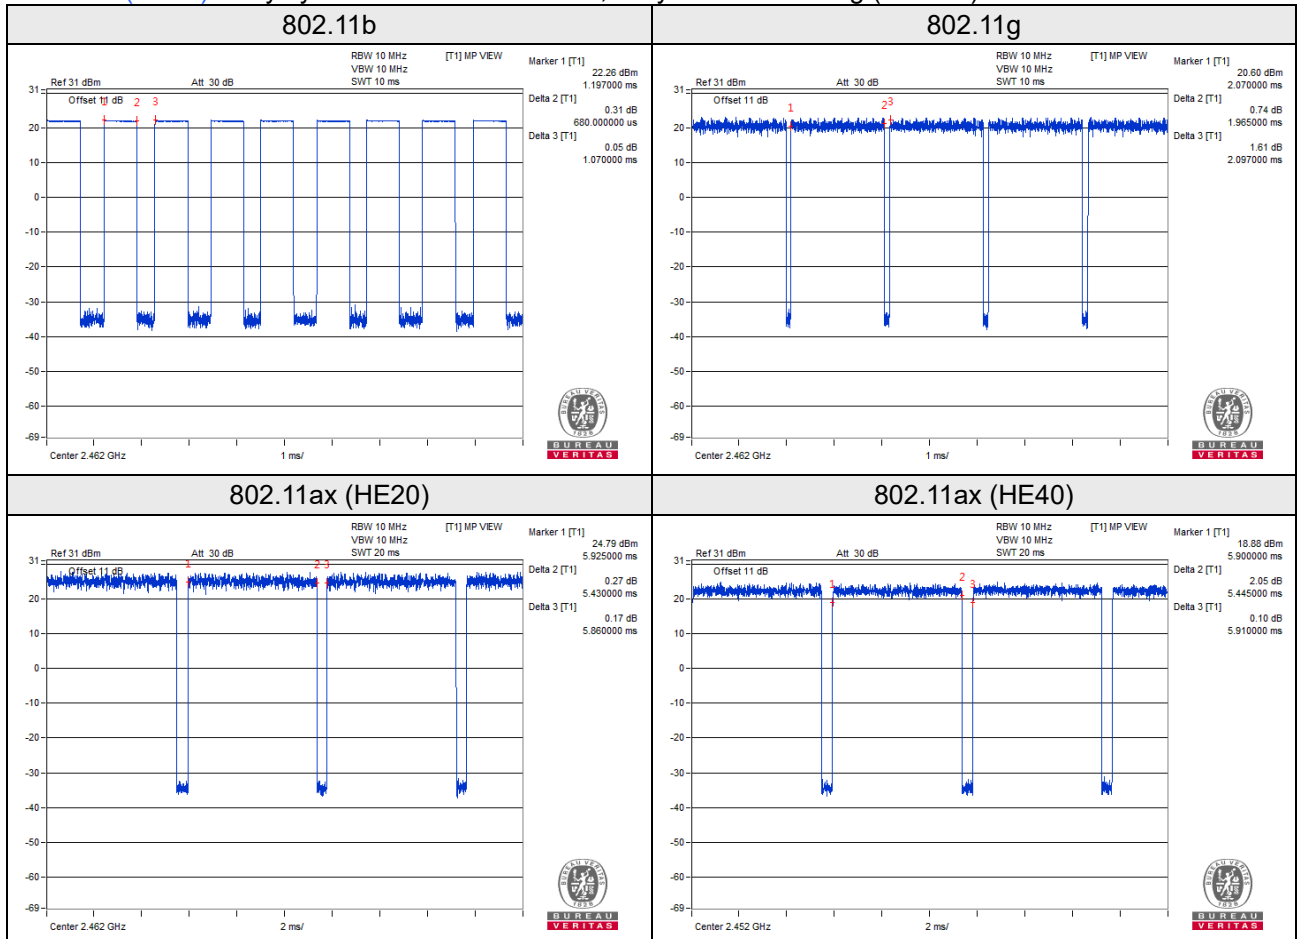

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	PoE	BUFFALO	BIJ-POE-1P2GH	NA	NA	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	10	N	0	RJ45, Cat5e
2.	LAN cable	1	1.5	N	0	RJ45, Cat5e
3.	LAN cable	1	1.5	N	0	RJ45, Cat5e

#### 3.4.1 Configuration of System under Test

Test Mode A, B, C

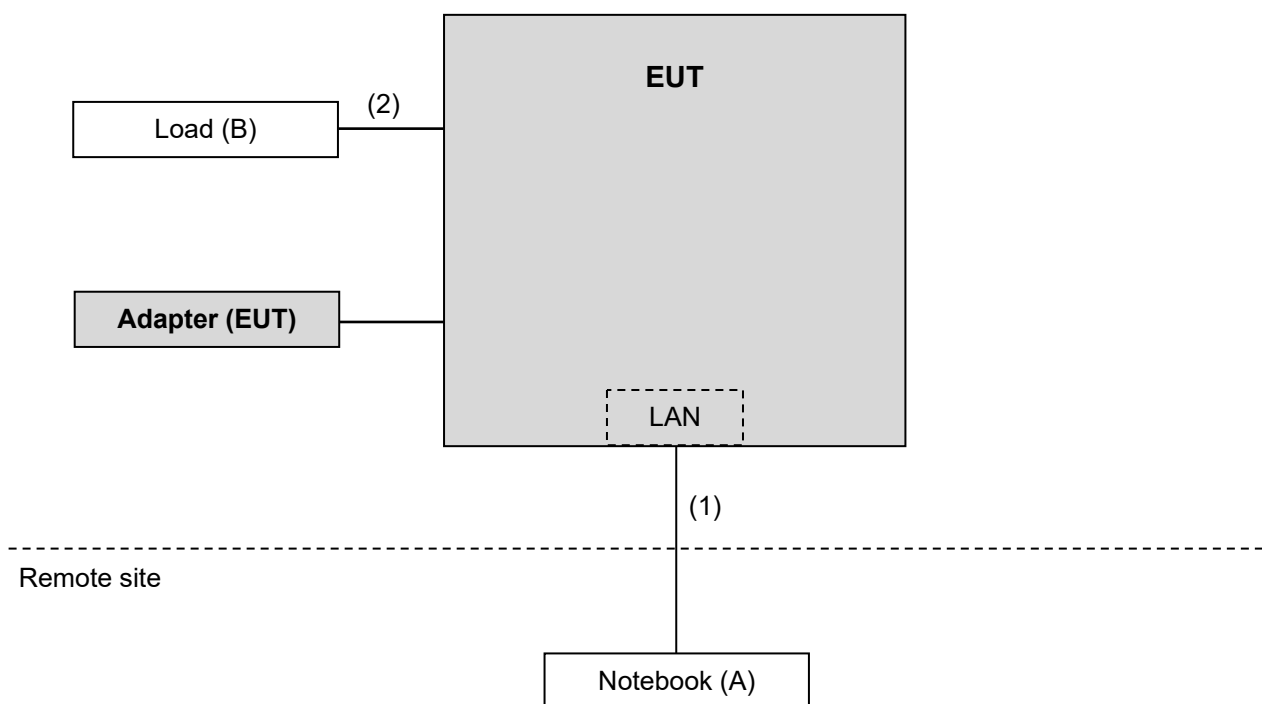

Test Mode D

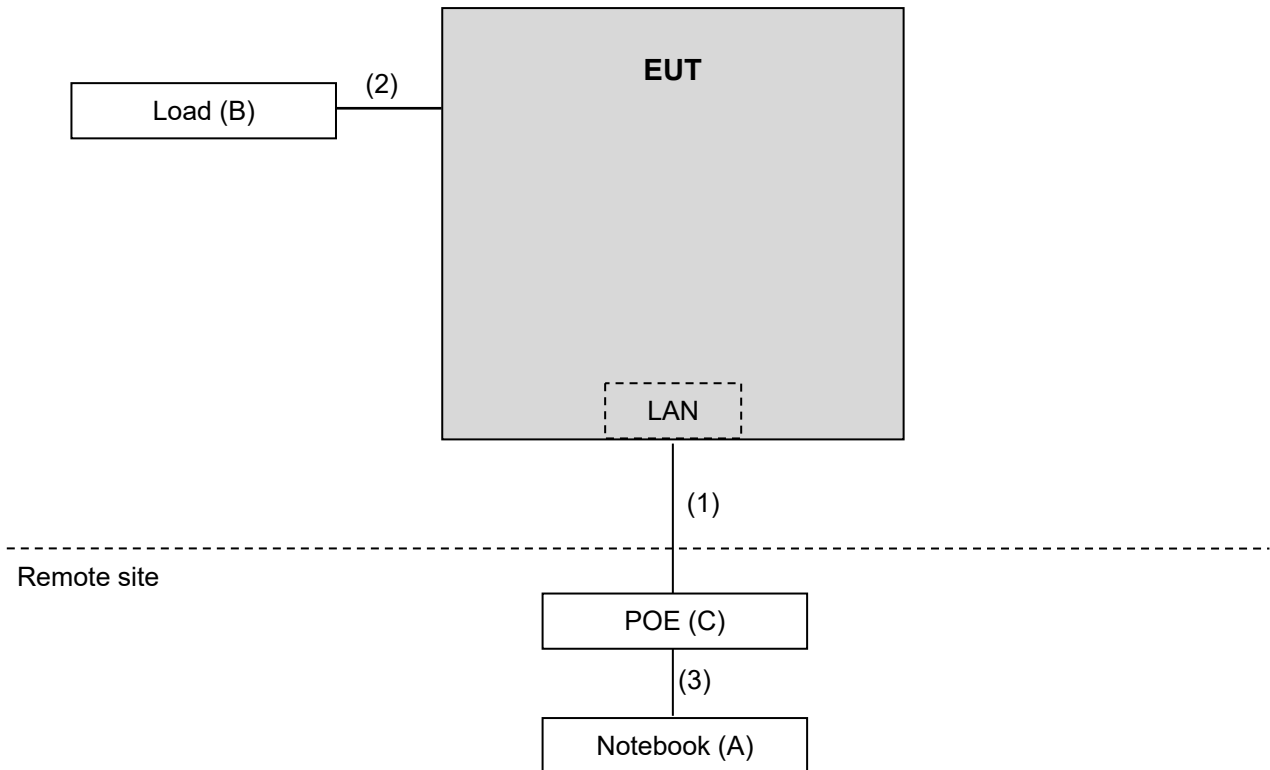

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 30, 2021	Dec. 29, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 15, 2021	Sep. 14, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Nov. 01, 2021	Oct. 31, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Oct. 26, 2021	Oct. 25, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jun. 05, 2021	Jun. 04, 2022
			May 14, 2022	May 13, 2023
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jun. 05, 2021	Jun. 04, 2022
			May 14, 2022	May 13, 2023
RF Coaxial Cable 57140938WOKEN With 5dB PAD	8D-FB	Cable-CH4-01	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jun. 05, 2021	Jun. 04, 2022
			May 14, 2022	May 13, 2023
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jun. 05, 2021	Jun. 04, 2022
			May 14, 2022	May 13, 2023
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 18, 2022	Jan. 17, 2023
Wideband Power Sensor KEYSIGHT	N1923A	MY58190002	May 06, 2022	May 05, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 4.



### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz. (802.11b: RBW = 1MHz, VBW = 3kHz; 802.11g, 802.11ax (HE20), 802.11ax (HE40): RBW = 1MHz, VBW = 1kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

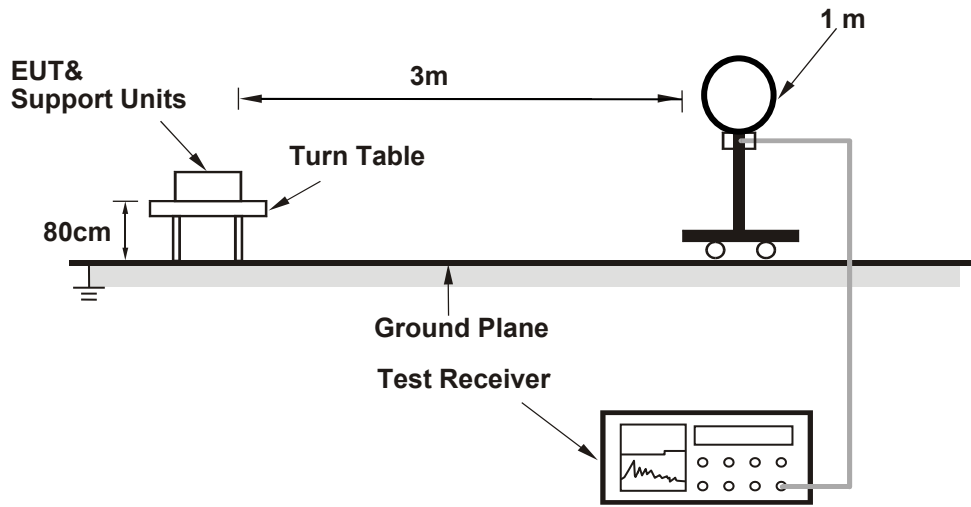

##### For Radiated emission 30MHz to 1GHz

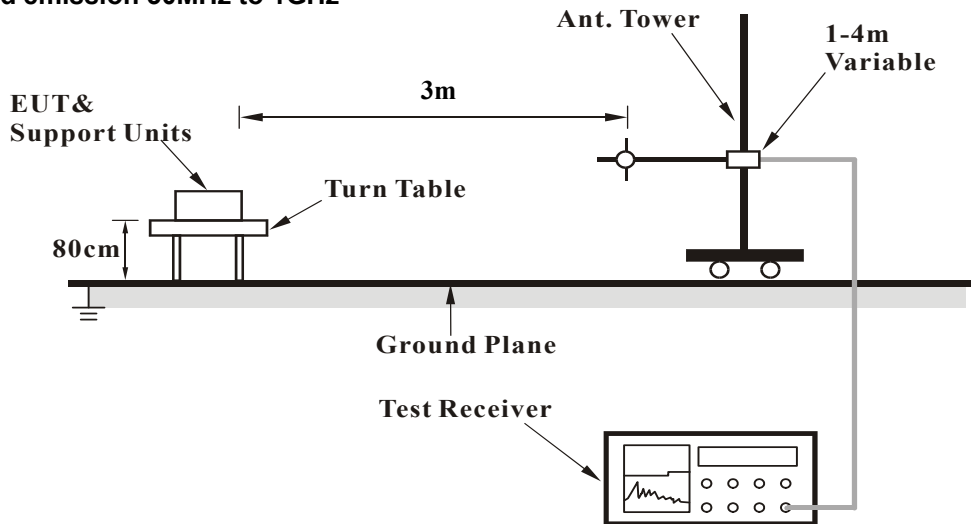

### For Radiated emission above 1GHz

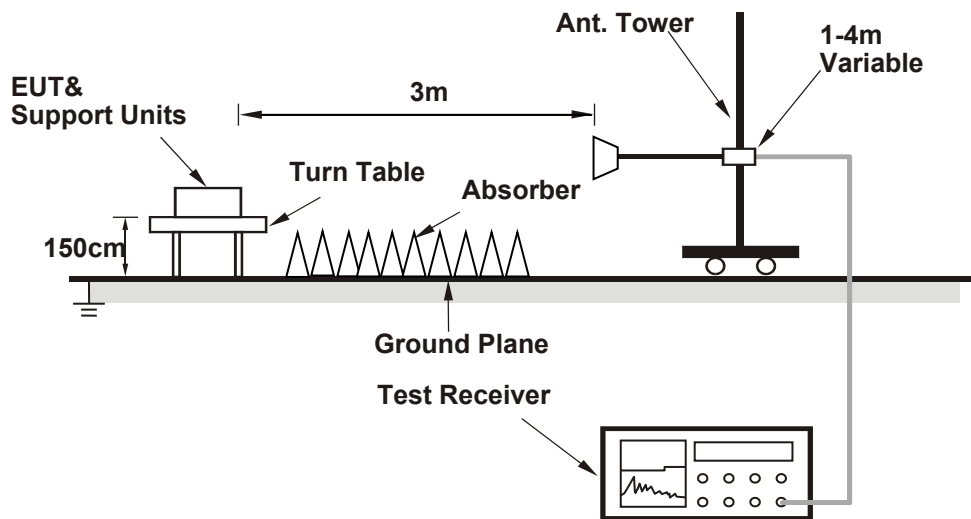

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared a notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

#### 4.1.7 Test Results

Above 1GHz worst-Case data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.97 H	93	25.2	34.1
2	2390.00	46.4 AV	54.0	-7.6	1.97 H	93	12.3	34.1
3	*2412.00	118.6 PK			1.97 H	93	84.5	34.1
4	*2412.00	115.9 AV			1.97 H	93	81.8	34.1
5	4824.00	51.6 PK	74.0	-22.4	1.99 H	314	38.0	13.6
6	4824.00	38.5 AV	54.0	-15.5	1.99 H	314	24.9	13.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.97 V	78	25.0	34.1
2	2390.00	46.4 AV	54.0	-7.6	1.97 V	78	12.3	34.1
3	*2412.00	111.6 PK			1.97 V	78	77.5	34.1
4	*2412.00	108.8 AV			1.97 V	78	74.7	34.1
5	4824.00	51.1 PK	74.0	-22.9	1.91 V	309	37.5	13.6
6	4824.00	38.4 AV	54.0	-15.6	1.91 V	309	24.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.4 PK			1.79 H	73	84.1	34.3
2	*2437.00	115.6 AV			1.79 H	73	81.3	34.3
3	4874.00	53.0 PK	74.0	-21.0	2.30 H	310	39.4	13.6
4	4874.00	45.8 AV	54.0	-8.2	2.30 H	310	32.2	13.6

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.8 PK			3.49 V	135	77.5	34.3
2	*2437.00	109.0 AV			3.49 V	135	74.7	34.3
3	4874.00	51.7 PK	74.0	-22.3	2.13 V	316	38.1	13.6
4	4874.00	39.6 AV	54.0	-14.4	2.13 V	316	26.0	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.9 PK			2.33 H	72	84.6	34.3
2	*2462.00	116.3 AV			2.33 H	72	82.0	34.3
3	2483.50	61.7 PK	74.0	-12.3	2.33 H	72	27.4	34.3
4	2483.50	53.1 AV	54.0	-0.9	2.33 H	72	18.8	34.3
5	4924.00	51.4 PK	74.0	-22.6	1.97 H	310	38.0	13.4
6	4924.00	39.7 AV	54.0	-14.3	1.97 H	310	26.3	13.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.6 PK			3.92 V	148	78.3	34.3
2	*2462.00	109.8 AV			3.92 V	148	75.5	34.3
3	2483.50	60.3 PK	74.0	-13.7	3.92 V	148	26.0	34.3
4	2483.50	49.7 AV	54.0	-4.3	3.92 V	148	15.4	34.3
5	4924.00	50.9 PK	74.0	-23.1	2.28 V	309	37.5	13.4
6	4924.00	38.3 AV	54.0	-15.7	2.28 V	309	24.9	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	2.15 H	34	33.0	34.1
2	2390.00	52.9 AV	54.0	-1.1	2.15 H	34	18.8	34.1
3	*2412.00	122.0 PK			2.15 H	34	87.9	34.1
4	*2412.00	112.4 AV			2.15 H	34	78.3	34.1
5	4824.00	66.1 PK	74.0	-7.9	1.89 H	312	52.5	13.6
6	4824.00	51.1 AV	54.0	-2.9	1.89 H	312	37.5	13.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	3.54 V	132	25.0	34.1
2	2390.00	47.6 AV	54.0	-6.4	3.54 V	132	13.5	34.1
3	*2412.00	116.7 PK			3.54 V	132	82.6	34.1
4	*2412.00	107.3 AV			3.54 V	132	73.2	34.1
5	4824.00	58.8 PK	74.0	-15.2	1.72 V	320	45.2	13.6
6	4824.00	47.0 AV	54.0	-7.0	1.72 V	320	33.4	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	121.8 PK			2.08 H	33	87.5	34.3
2	*2437.00	112.1 AV			2.08 H	33	77.8	34.3
3	4874.00	51.8 PK	74.0	-22.2	2.09 H	306	38.2	13.6
4	4874.00	38.9 AV	54.0	-15.1	2.09 H	306	25.3	13.6

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.1 PK			3.53 V	152	82.8	34.3
2	*2437.00	107.4 AV			3.53 V	152	73.1	34.3
3	4874.00	51.6 PK	74.0	-22.4	2.02 V	305	38.0	13.6
4	4874.00	39.5 AV	54.0	-14.5	2.02 V	305	25.9	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.4 PK			2.35 H	75	85.1	34.3
2	*2462.00	110.0 AV			2.35 H	75	75.7	34.3
3	2483.50	65.8 PK	74.0	-8.2	2.35 H	75	31.5	34.3
4	2483.50	53.5 AV	54.0	-0.5	2.35 H	75	19.2	34.3
5	4924.00	51.5 PK	74.0	-22.5	2.11 H	308	38.1	13.4
6	4924.00	38.5 AV	54.0	-15.5	2.11 H	308	25.1	13.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.3 PK			3.47 V	151	79.0	34.3
2	*2462.00	103.9 AV			3.47 V	151	69.6	34.3
3	2483.50	60.4 PK	74.0	-13.6	3.47 V	151	26.1	34.3
4	2483.50	48.8 AV	54.0	-5.2	3.47 V	151	14.5	34.3
5	4924.00	50.6 PK	74.0	-23.4	2.25 V	311	37.2	13.4
6	4924.00	38.2 AV	54.0	-15.8	2.25 V	311	24.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11ax (HE20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	2.14 H	30	31.4	34.1
2	2390.00	53.2 AV	54.0	-0.8	2.14 H	30	19.1	34.1
3	*2412.00	123.0 PK			2.14 H	30	88.9	34.1
4	*2412.00	111.1 AV			2.14 H	30	77.0	34.1
5	4824.00	64.1 PK	74.0	-9.9	1.90 H	312	50.5	13.6
6	4824.00	49.1 AV	54.0	-4.9	1.90 H	312	35.5	13.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	3.58 V	129	25.3	34.1
2	2390.00	46.6 AV	54.0	-7.4	3.58 V	129	12.5	34.1
3	*2412.00	117.1 PK			3.58 V	129	83.0	34.1
4	*2412.00	104.7 AV			3.58 V	129	70.6	34.1
5	4824.00	58.4 PK	74.0	-15.6	1.75 V	321	44.8	13.6
6	4824.00	46.8 AV	54.0	-7.2	1.75 V	321	33.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	125.6 PK			2.14 H	16	91.3	34.3
2	*2437.00	112.9 AV			2.14 H	16	78.6	34.3
3	2483.50	69.7 PK	74.0	-4.3	2.14 H	16	35.4	34.3
<b>4</b>	<b>2483.50</b>	<b>53.8 AV</b>	<b>54.0</b>	<b>-0.2</b>	<b>2.14 H</b>	<b>16</b>	<b>19.5</b>	<b>34.3</b>
5	4874.00	51.7 PK	74.0	-22.3	2.05 H	308	38.1	13.6
6	4874.00	38.8 AV	54.0	-15.2	2.05 H	308	25.2	13.6

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.9 PK			3.49 V	151	85.6	34.3
2	*2437.00	107.3 AV			3.49 V	151	73.0	34.3
3	2483.50	58.3 PK	74.0	-15.7	3.49 V	151	24.0	34.3
4	2483.50	47.9 AV	54.0	-6.1	3.49 V	151	13.6	34.3
5	4874.00	51.6 PK	74.0	-22.4	2.05 V	307	38.0	13.6
6	4874.00	39.4 AV	54.0	-14.6	2.05 V	307	25.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	121.2 PK			2.31 H	71	86.9	34.3
2	*2462.00	108.3 AV			2.31 H	71	74.0	34.3
3	2483.50	65.5 PK	74.0	-8.5	2.31 H	71	31.2	34.3
4	2483.50	53.5 AV	54.0	-0.5	2.31 H	71	19.2	34.3
5	4924.00	51.6 PK	74.0	-22.4	2.05 H	306	38.2	13.4
6	4924.00	38.6 AV	54.0	-15.4	2.05 H	306	25.2	13.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.8 PK			3.49 V	151	81.5	34.3
2	*2462.00	102.9 AV			3.49 V	151	68.6	34.3
3	2483.50	61.5 PK	74.0	-12.5	3.49 V	151	27.2	34.3
4	2483.50	48.6 AV	54.0	-5.4	3.49 V	151	14.3	34.3
5	4924.00	51.4 PK	74.0	-22.6	2.06 V	305	38.0	13.4
6	4924.00	38.3 AV	54.0	-15.7	2.06 V	305	24.9	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11ax (HE40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	2.30 H	62	29.9	34.1
2	2390.00	52.5 AV	54.0	-1.5	2.30 H	62	18.4	34.1
3	*2422.00	120.6 PK			2.30 H	62	86.5	34.1
4	*2422.00	108.1 AV			2.30 H	62	74.0	34.1
5	4844.00	53.8 PK	74.0	-20.2	2.06 H	313	40.2	13.6
6	4844.00	41.0 AV	54.0	-13.0	2.06 H	313	27.4	13.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	3.56 V	131	26.0	34.1
2	2390.00	46.9 AV	54.0	-7.1	3.56 V	131	12.8	34.1
3	*2422.00	113.7 PK			3.56 V	131	79.6	34.1
4	*2422.00	100.9 AV			3.56 V	131	66.8	34.1
5	4824.00	57.2 PK	74.0	-16.8	1.68 V	322	43.6	13.6
6	4824.00	46.2 AV	54.0	-7.8	1.68 V	322	32.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.9 PK			2.26 H	68	83.6	34.3
2	*2437.00	105.9 AV			2.26 H	68	71.6	34.3
3	2483.50	67.1 PK	74.0	-6.9	2.26 H	68	32.8	34.3
4	2483.50	53.2 AV	54.0	-0.8	2.26 H	68	18.9	34.3
5	4874.00	51.4 PK	74.0	-22.6	2.07 H	311	37.8	13.6
6	4874.00	38.5 AV	54.0	-15.5	2.07 H	311	24.9	13.6

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.1 PK			3.50 V	152	78.8	34.3
2	*2437.00	101.5 AV			3.50 V	152	67.2	34.3
3	2483.50	60.9 PK	74.0	-13.1	3.50 V	152	26.6	34.3
4	2483.50	48.9 AV	54.0	-5.1	3.50 V	152	14.6	34.3
5	4874.00	51.6 PK	74.0	-22.4	2.02 V	305	38.0	13.6
6	4874.00	39.3 AV	54.0	-14.7	2.02 V	305	25.7	13.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	117.4 PK			2.16 H	11	83.1	34.3
2	*2452.00	105.1 AV			2.16 H	11	70.8	34.3
3	2483.50	69.2 PK	74.0	-4.8	2.16 H	11	34.9	34.3
<b>4</b>	<b>2483.50</b>	<b>53.8 AV</b>	<b>54.0</b>	<b>-0.2</b>	<b>2.16 H</b>	<b>11</b>	<b>19.5</b>	<b>34.3</b>
5	4904.00	51.5 PK	74.0	-22.5	2.06 H	309	38.0	13.5
6	4904.00	38.6 AV	54.0	-15.4	2.06 H	309	25.1	13.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	111.8 PK			3.46 V	152	77.5	34.3
2	*2452.00	99.8 AV			3.46 V	152	65.5	34.3
3	2483.50	60.9 PK	74.0	-13.1	3.46 V	152	26.6	34.3
4	2483.50	49.1 AV	54.0	-4.9	3.46 V	152	14.8	34.3
5	4904.00	51.3 PK	74.0	-22.7	2.05 V	303	37.8	13.5
6	4904.00	38.3 AV	54.0	-15.7	2.05 V	303	24.8	13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.


Below 1GHz worst-case data: 802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	88.20	38.7 QP	43.5	-4.8	1.49 H	275	53.0	-14.3
2	103.72	37.0 QP	43.5	-6.5	1.00 H	136	49.8	-12.8
3	142.52	38.7 QP	43.5	-4.8	1.99 H	146	47.7	-9.0
4	191.02	40.3 QP	43.5	-3.2	1.00 H	161	51.6	-11.3
5	286.08	40.7 QP	46.0	-5.3	1.00 H	161	48.6	-7.9
6	377.26	40.1 QP	46.0	-5.9	1.99 H	127	46.3	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

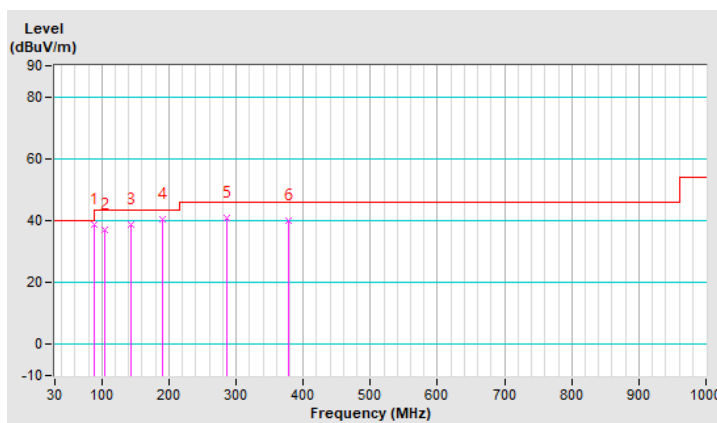




CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.28	35.0 QP	40.0	-5.0	1.01 V	16	43.7	-8.7
2	125.06	31.1 QP	43.5	-12.4	1.50 V	240	41.8	-10.7
3	154.16	29.6 QP	43.5	-13.9	1.01 V	101	38.3	-8.7
4	272.50	28.8 QP	46.0	-17.2	1.50 V	169	37.1	-8.3
5	388.90	30.9 QP	46.0	-15.1	1.01 V	94	36.9	-6.0
6	532.46	32.2 QP	46.0	-13.8	1.01 V	55	35.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

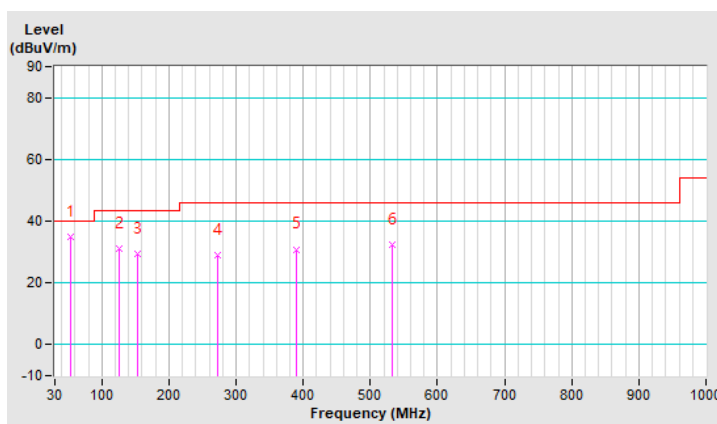


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.76	31.1 QP	40.0	-8.9	1.00 H	358	40.7	-9.6
2	103.72	32.3 QP	43.5	-11.2	1.49 H	187	45.1	-12.8
3	121.18	34.3 QP	43.5	-9.2	1.49 H	308	45.3	-11.0
4	138.64	38.1 QP	43.5	-5.4	1.49 H	8	47.4	-9.3
5	227.88	28.9 QP	46.0	-17.1	1.49 H	52	40.3	-11.4
6	330.70	28.1 QP	46.0	-17.9	1.49 H	153	34.9	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

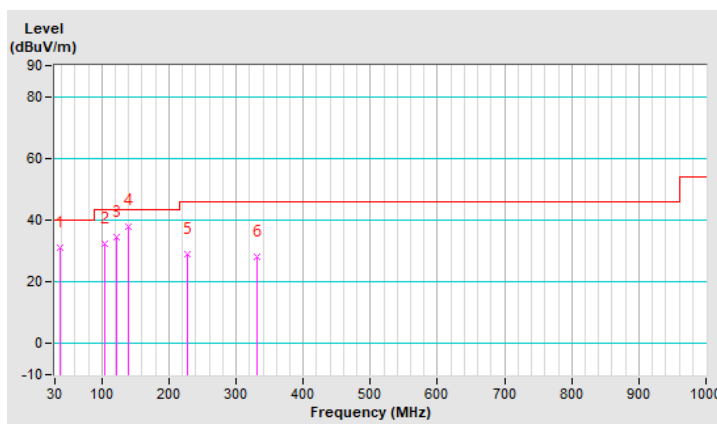


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.40	33.0 QP	40.0	-7.0	1.00 V	67	41.5	-8.5
2	138.64	36.9 QP	43.5	-6.6	1.49 V	104	46.2	-9.3
3	204.60	33.2 QP	43.5	-10.3	1.49 V	105	44.9	-11.7
4	272.50	35.1 QP	46.0	-10.9	1.49 V	105	43.4	-8.3
5	326.82	39.4 QP	46.0	-6.6	1.49 V	105	46.3	-6.9
6	386.96	38.5 QP	46.0	-7.5	1.49 V	105	44.6	-6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

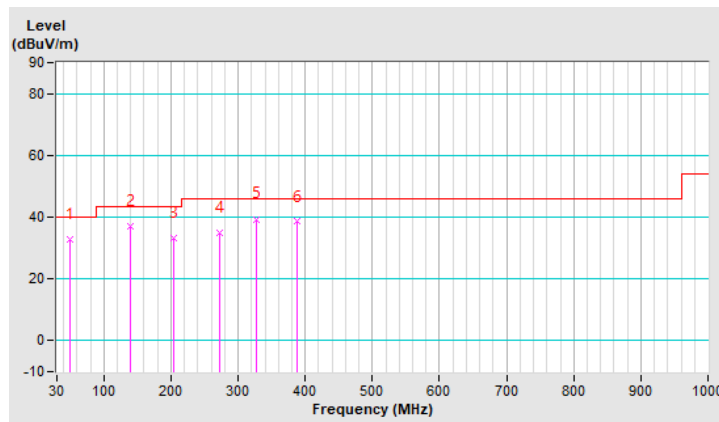


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.04	32.5 QP	40.0	-7.5	1.49 H	99	41.8	-9.3
2	92.08	37.5 QP	43.5	-6.0	1.00 H	236	51.7	-14.2
3	183.26	37.3 QP	43.5	-6.2	1.49 H	89	47.9	-10.6
4	266.68	34.9 QP	46.0	-11.1	1.49 H	89	43.5	-8.6
5	301.60	36.4 QP	46.0	-9.6	1.49 H	89	43.8	-7.4
6	379.20	36.7 QP	46.0	-9.3	1.49 H	89	43.0	-6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

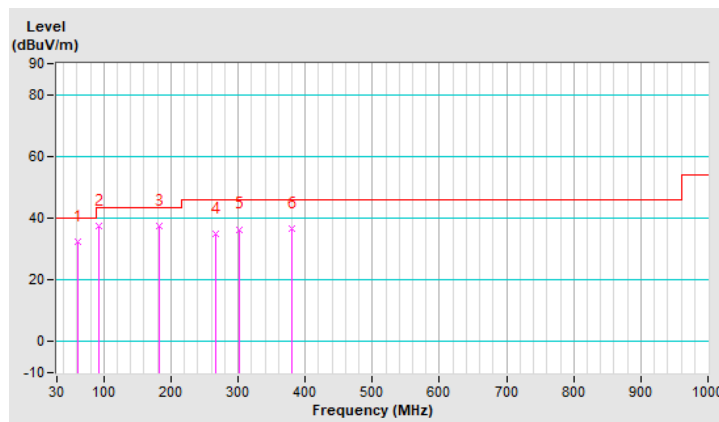


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.34	30.2 QP	40.0	-9.8	1.99 V	58	38.7	-8.5
2	74.62	31.7 QP	40.0	-8.3	1.00 V	192	43.2	-11.5
3	90.14	37.4 QP	43.5	-6.1	1.00 V	256	51.7	-14.3
4	117.30	33.3 QP	43.5	-10.2	1.00 V	14	44.7	-11.4
5	185.20	32.7 QP	43.5	-10.8	1.00 V	204	43.5	-10.8
6	210.42	34.1 QP	43.5	-9.4	1.49 V	103	45.7	-11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

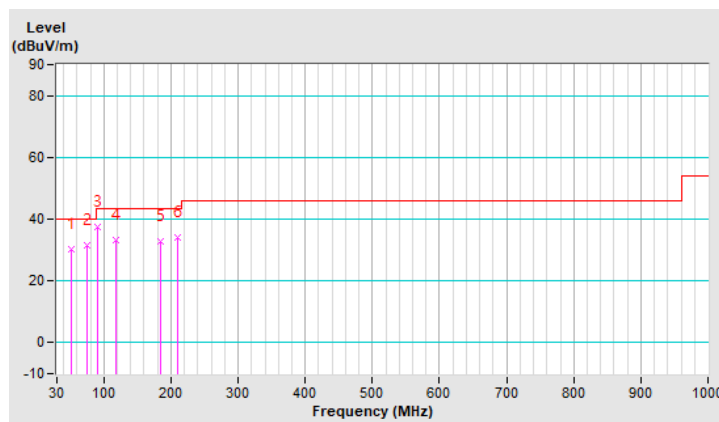


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.22	34.1 QP	40.0	-5.9	1.49 H	29	42.9	-8.8
2	90.14	37.9 QP	43.5	-5.6	1.00 H	271	52.2	-14.3
3	165.80	32.9 QP	43.5	-10.6	1.49 H	108	41.8	-8.9
4	202.66	31.6 QP	43.5	-11.9	1.99 H	217	43.3	-11.7
5	272.50	34.8 QP	46.0	-11.2	1.49 H	30	43.1	-8.3
6	346.22	32.4 QP	46.0	-13.6	1.49 H	97	39.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

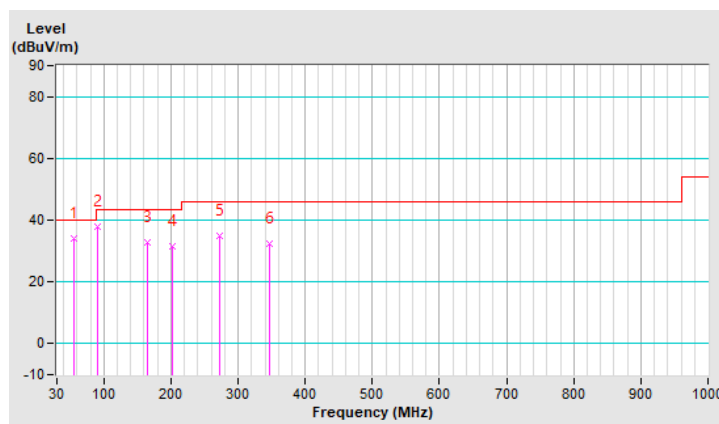


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.84	38.0 QP	43.5	-5.5	1.49 V	195	51.3	-13.3
2	156.10	28.7 QP	43.5	-14.8	1.00 V	148	37.4	-8.7
3	237.58	31.2 QP	46.0	-14.8	1.00 V	239	41.4	-10.2
4	288.02	33.3 QP	46.0	-12.7	1.00 V	239	41.2	-7.9
5	433.52	31.6 QP	46.0	-14.4	1.00 V	281	36.7	-5.1
6	563.50	29.9 QP	46.0	-16.1	1.00 V	141	33.1	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

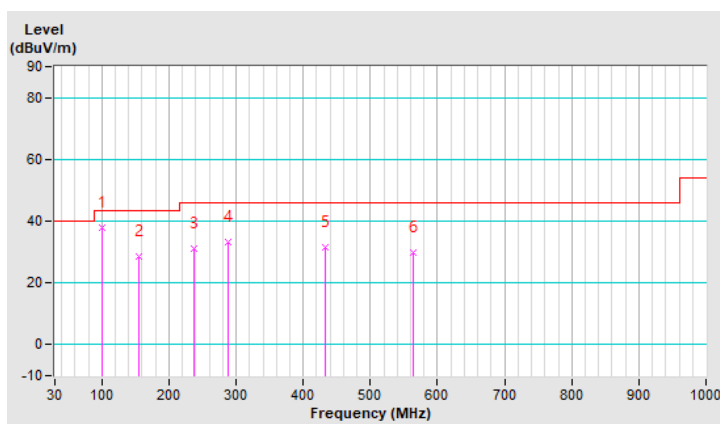

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 03, 2021	Dec. 02, 2022
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 15, 2022	Jan. 14, 2023
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Mar. 14, 2022	Mar. 13, 2023
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Sep. 07, 2021	Sep. 06, 2022
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1(Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.



#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

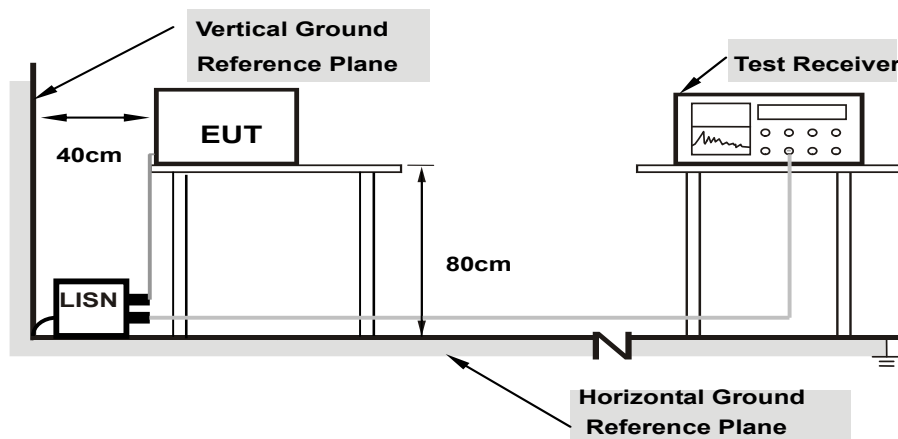

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results


Worst-case data: 802.11g

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	<b>0.15000</b>	<b>9.68</b>	<b>44.24</b>	<b>26.10</b>	<b>53.92</b>	<b>35.78</b>	<b>66.00</b>
2	0.17800	9.70	36.54	19.39	46.24	29.09	64.58	54.58	-18.34	-25.49
3	0.22600	9.73	32.19	18.52	41.92	28.25	62.60	52.60	-20.68	-24.35
4	0.25000	9.74	30.63	18.39	40.37	28.13	61.76	51.76	-21.39	-23.63
5	0.75000	9.82	13.46	8.44	23.28	18.26	56.00	46.00	-32.72	-27.74
6	5.67000	9.98	12.52	6.97	22.50	16.95	60.00	50.00	-37.50	-33.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

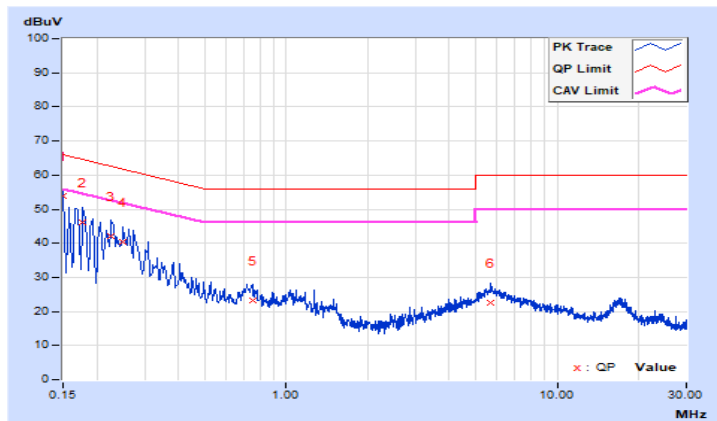


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.68	43.33	24.85	53.01	34.53	65.78
2	0.17400	9.70	37.35	20.98	47.05	30.68	64.77	54.77	-17.72	-24.09
3	0.19989	9.72	33.37	16.79	43.09	26.51	63.62	53.62	-20.53	-27.11
4	0.22565	9.73	30.65	16.08	40.38	25.81	62.61	52.61	-22.23	-26.80
5	0.25000	9.74	29.47	18.38	39.21	28.12	61.76	51.76	-22.55	-23.64
6	5.18600	9.99	13.82	8.52	23.81	18.51	60.00	50.00	-36.19	-31.49

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

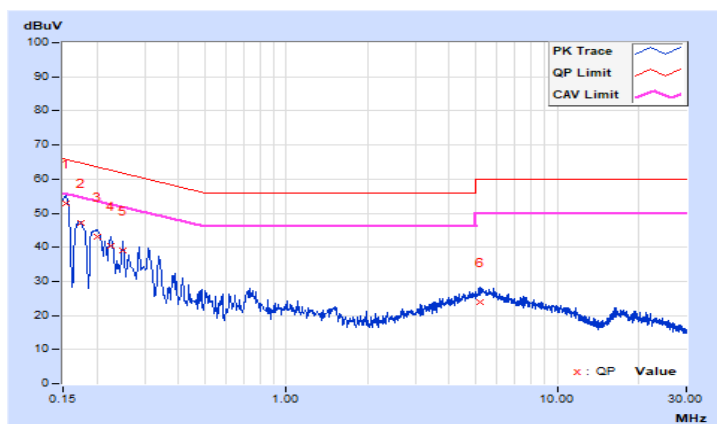


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15800	9.69	40.84	25.25	50.53	34.94	65.57
2	0.17708	9.70	35.22	19.91	44.92	29.61	64.62	54.62	-19.70	-25.01
3	0.19000	9.71	32.65	14.18	42.36	23.89	64.04	54.04	-21.68	-30.15
4	0.48200	9.81	14.81	6.76	24.62	16.57	56.30	46.30	-31.68	-29.73
5	7.84593	10.02	23.33	18.26	33.35	28.28	60.00	50.00	-26.65	-21.72
6	17.43400	10.14	15.26	10.23	25.40	20.37	60.00	50.00	-34.60	-29.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

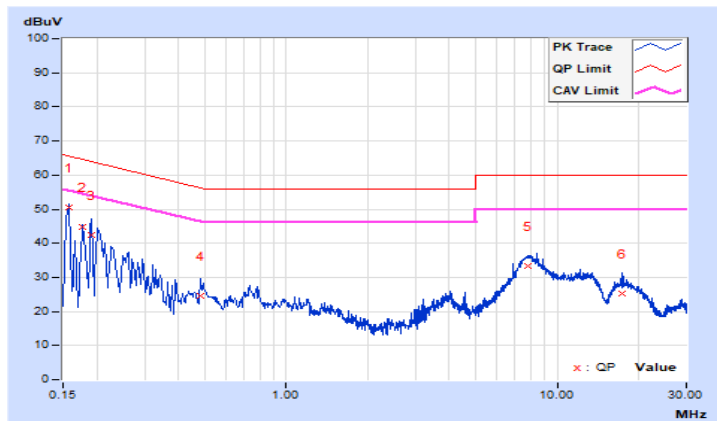


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15770	9.69	41.24	25.19	50.93	34.88	65.58
2	0.18180	9.71	37.06	20.54	46.77	30.25	64.40	54.40	-17.63	-24.15
3	0.20600	9.72	32.58	16.99	42.30	26.71	63.37	53.37	-21.07	-26.66
4	0.47800	9.82	19.50	12.57	29.32	22.39	56.37	46.37	-27.05	-23.98
5	3.84600	9.97	13.09	4.85	23.06	14.82	56.00	46.00	-32.94	-31.18
6	8.71400	10.04	21.83	16.80	31.87	26.84	60.00	50.00	-28.13	-23.16

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

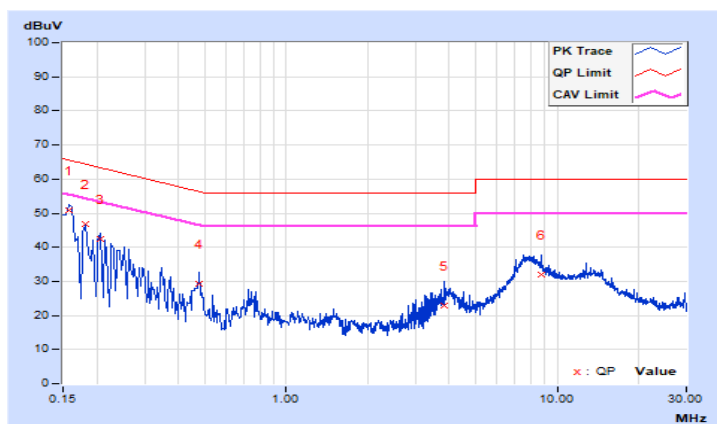


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.68	36.97	20.04	46.65	29.72	65.78
2	0.21400	9.73	27.59	15.40	37.32	25.13	63.05	53.05	-25.73	-27.92
3	0.26200	9.74	29.43	21.40	39.17	31.14	61.37	51.37	-22.20	-20.23
4	0.31949	9.77	33.33	23.52	43.10	33.29	59.72	49.72	-16.62	-16.43
5	0.75800	9.82	14.22	8.65	24.04	18.47	56.00	46.00	-31.96	-27.53
6	10.28600	10.06	10.72	5.94	20.78	16.00	60.00	50.00	-39.22	-34.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

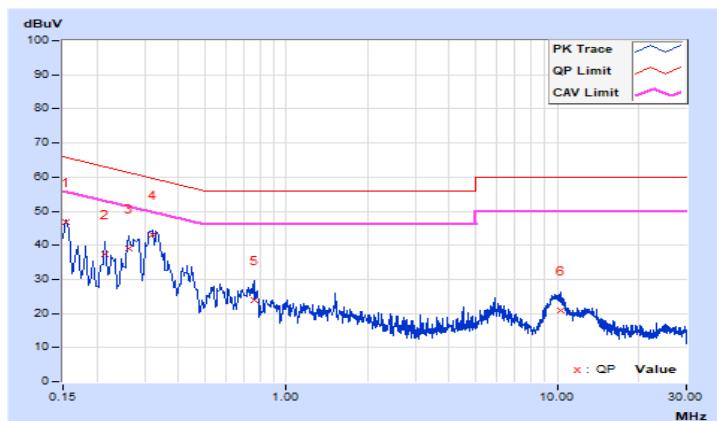


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16600	9.69	33.55	18.11	43.24	27.80	65.16
2	0.26600	9.75	26.13	17.42	35.88	27.17	61.24	51.24	-25.36	-24.07
3	0.31365	9.77	31.35	24.03	41.12	33.80	59.87	49.87	-18.75	-16.07
4	0.73800	9.84	13.30	7.98	23.14	17.82	56.00	46.00	-32.86	-28.18
5	4.59400	9.98	11.67	2.21	21.65	12.19	56.00	46.00	-34.35	-33.81
6	10.18600	10.06	12.85	8.08	22.91	18.14	60.00	50.00	-37.09	-31.86

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

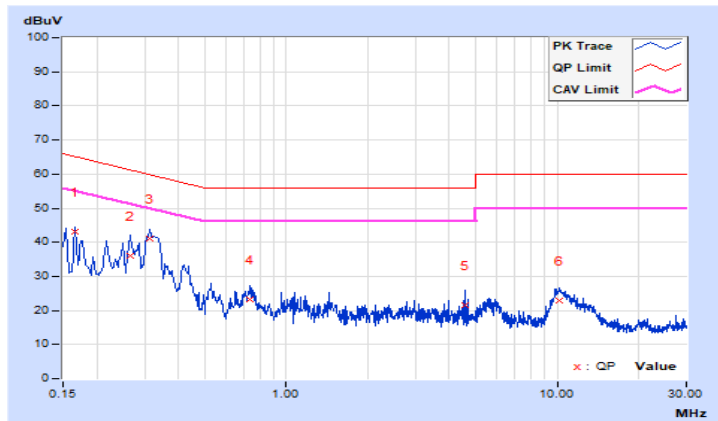


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.62	33.15	17.67	42.77	27.29	65.78
2	0.18600	9.63	26.34	12.25	35.97	21.88	64.21	54.21	-28.24	-32.33
3	0.27350	9.66	29.74	20.13	39.40	29.79	61.01	51.01	-21.61	-21.22
4	0.75000	9.70	27.58	18.08	37.28	27.78	56.00	46.00	-18.72	-18.22
5	1.75800	9.72	19.05	12.40	28.77	22.12	56.00	46.00	-27.23	-23.88
6	3.98600	9.75	10.66	3.70	20.41	13.45	56.00	46.00	-35.59	-32.55

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

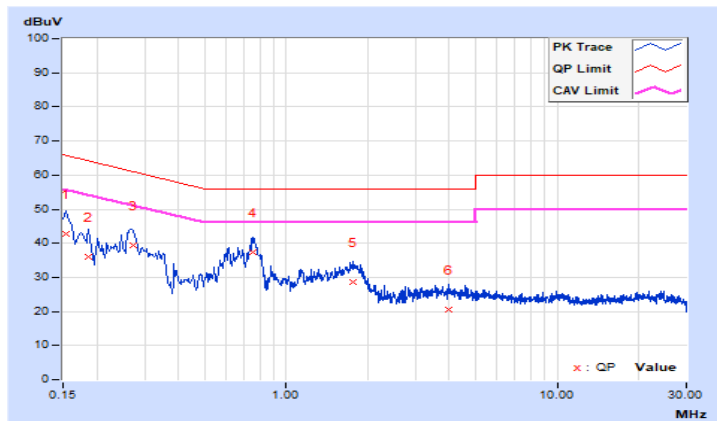




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15800	9.62	31.55	14.85	41.17	24.47	65.57
2	0.17384	9.63	32.36	16.06	41.99	25.69	64.77	54.77	-22.78	-29.08
3	0.26992	9.66	34.77	21.97	44.43	31.63	61.12	51.12	-16.69	-19.49
4	0.75800	9.70	27.33	16.73	37.03	26.43	56.00	46.00	-18.97	-19.57
5	2.24200	9.73	14.54	7.07	24.27	16.80	56.00	46.00	-31.73	-29.20
6	4.41400	9.75	13.25	5.33	23.00	15.08	56.00	46.00	-33.00	-30.92

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

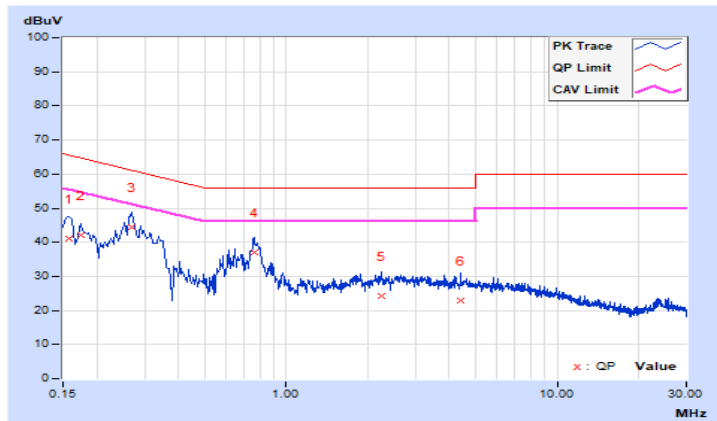


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

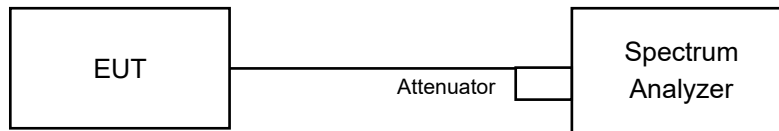

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.06	7.09	0.5	Pass
6	2437	7.64	7.57	0.5	Pass
11	2462	7.54	7.58	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.13	15.12	0.5	Pass
6	2437	15.12	15.13	0.5	Pass
11	2462	15.09	15.07	0.5	Pass

##### 802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.03	13.94	0.5	Pass
6	2437	15.11	15.11	0.5	Pass
11	2462	13.79	15.05	0.5	Pass

##### 802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	31.68	32.51	0.5	Pass
6	2437	30.09	33.92	0.5	Pass
9	2452	28.99	31.39	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

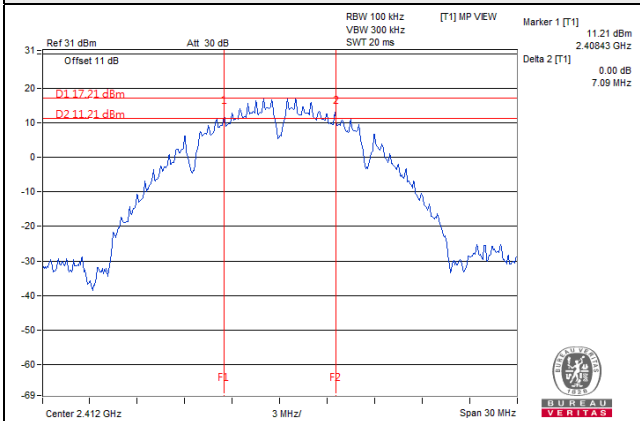


#### 802.11g

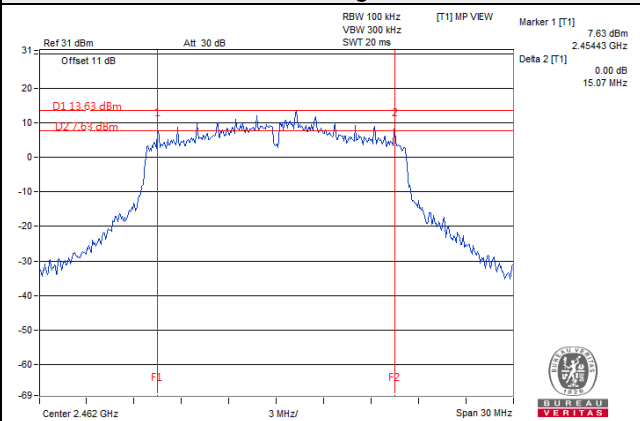

#### 802.11ax (HE20)

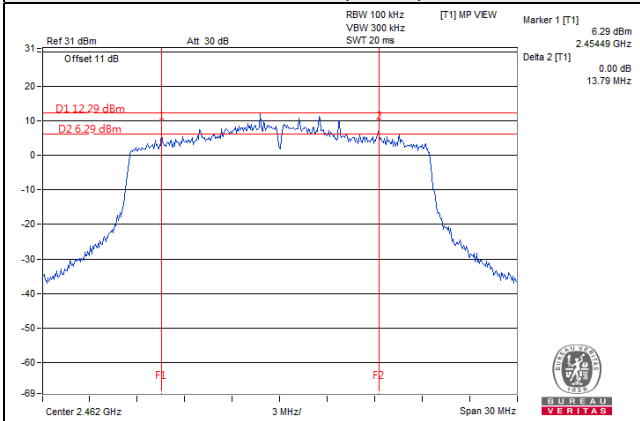

#### 802.11ax (HE40)

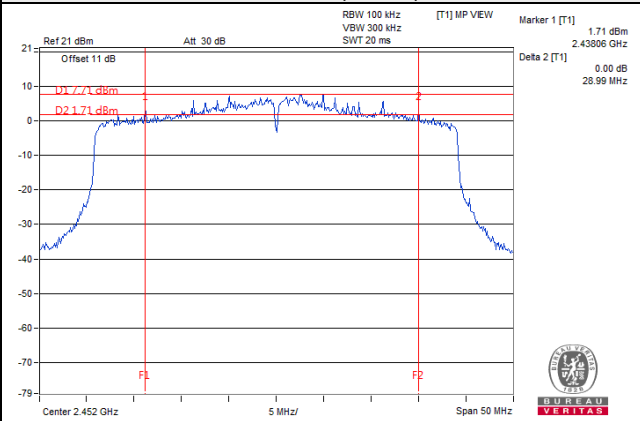

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup

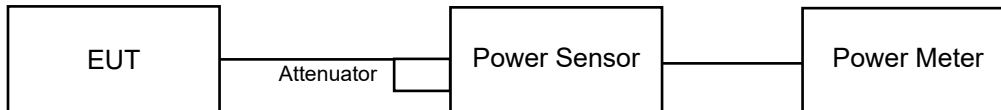

### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as item 4.3.6.

#### 4.4.7 Test Results

##### CDD Mode

##### 802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.08	26.13	815.713	29.12	30	Pass
6	2437	26.25	26.26	844.365	29.27	30	Pass
11	2462	25.61	25.82	745.859	28.73	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	26.01	26.62	858.223	29.34	30	Pass
6	2437	26.43	26.32	<b>868.090</b>	29.39	30	Pass
11	2462	23.35	23.40	435.048	26.39	30	Pass

##### 802.11ax (HE20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.85	24.73	602.659	27.80	30	Pass
6	2437	25.95	25.72	766.800	28.85	30	Pass
11	2462	23.15	23.38	424.309	26.28	30	Pass

##### 802.11ax (HE40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	22.95	23.32	412.025	26.15	30	Pass
6	2437	22.98	23.06	400.911	26.03	30	Pass
9	2452	21.53	21.22	274.667	24.39	30	Pass

## Beamforming Mode

### 802.11ax (HE20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.85	24.73	602.659	27.80	30	Pass
6	2437	25.95	25.72	<b>766.800</b>	28.85	30	Pass
11	2462	23.15	23.38	424.309	26.28	30	Pass

Note: Beamforming Directional gain = 3.27dBi < 6dBi, so the limit no need to reduced.

### 802.11ax (HE40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	22.95	23.32	412.025	26.15	30	Pass
6	2437	22.98	23.06	400.911	26.03	30	Pass
9	2452	21.53	21.22	274.667	24.39	30	Pass


Note: Beamforming Directional gain = 3.27dBi < 6dBi, so the limit no need to reduced.

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.5.2 Test Setup

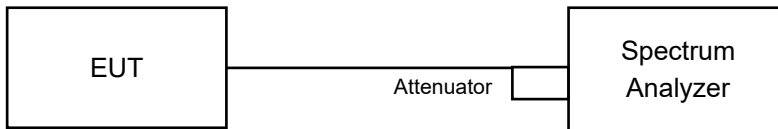

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

For Average Power (Duty cycle < 98%)

- a) Measure the duty cycle (x).
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- e) Set VBW  $\geq 3 \times \text{RBW}$ .
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as item 4.3.6.



#### 4.5.7 Test Results

##### 802.11b

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-12.65	3.01	1.97	-7.67	8	Pass
	6	2437	-12.66	3.01	1.97	-7.68	8	Pass
	11	2462	-12.77	3.01	1.97	-7.79	8	Pass
1	1	2412	-12.17	3.01	1.97	-7.19	8	Pass
	6	2437	-12.01	3.01	1.97	-7.03	8	Pass
	11	2462	-12.59	3.01	1.97	-7.61	8	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 3.27dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

##### 802.11g

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-8.42	3.01	0.28	-5.13	8	Pass
	6	2437	-8.01	3.01	0.28	-4.72	8	Pass
	11	2462	-11.88	3.01	0.28	-8.59	8	Pass
1	1	2412	-8.06	3.01	0.28	-4.77	8	Pass
	6	2437	-8.39	3.01	0.28	-5.10	8	Pass
	11	2462	-11.78	3.01	0.28	-8.49	8	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 3.27dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

### 802.11ax (HE20)

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-13.47	3.01	0.33	-10.13	8	Pass
	6	2437	-12.13	3.01	0.33	-8.79	8	Pass
	11	2462	-16.36	3.01	0.33	-13.02	8	Pass
1	1	2412	-13.64	3.01	0.33	-10.30	8	Pass
	6	2437	-12.31	3.01	0.33	-8.97	8	Pass
	11	2462	-16.33	3.01	0.33	-12.99	8	Pass

**Note:**

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 3.27dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

### 802.11ax (HE40)


TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	3	2422	-17.83	3.01	0.36	-14.46	8	Pass
	6	2437	-17.33	3.01	0.36	-13.96	8	Pass
	9	2452	-18.39	3.01	0.36	-15.02	8	Pass
1	3	2422	-18.10	3.01	0.36	-14.73	8	Pass
	6	2437	-17.24	3.01	0.36	-13.87	8	Pass
	9	2452	-18.61	3.01	0.36	-15.24	8	Pass

**Note:**


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 3.27dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

### Spectrum Plot of Worst Value


#### 802.11b

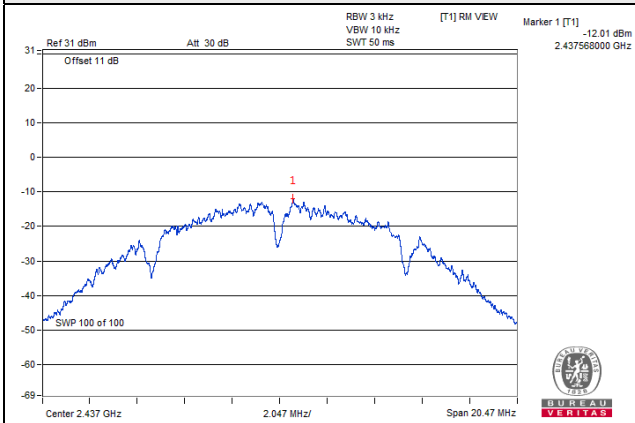


#### 802.11g

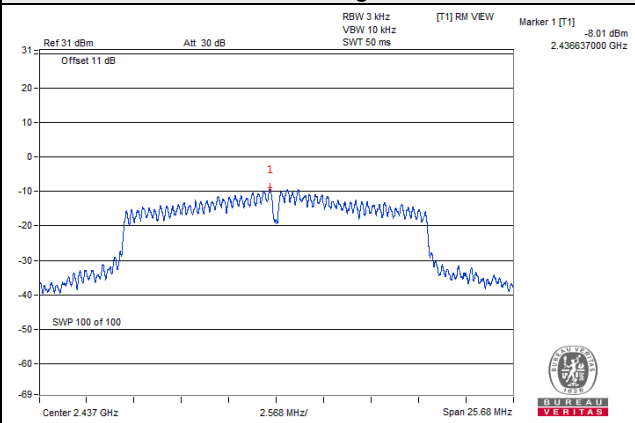

#### 802.11ax (HE20)

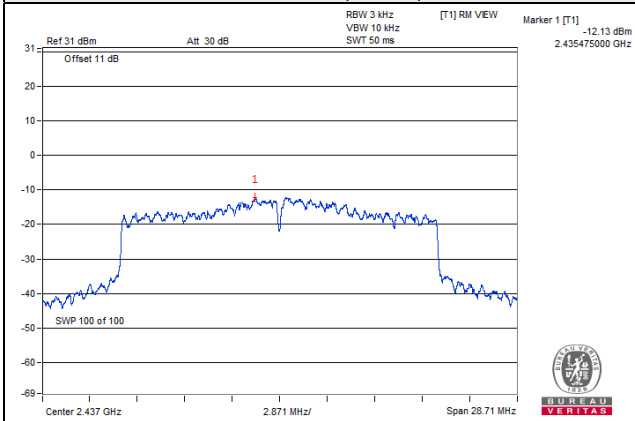

#### 802.11ax (HE40)

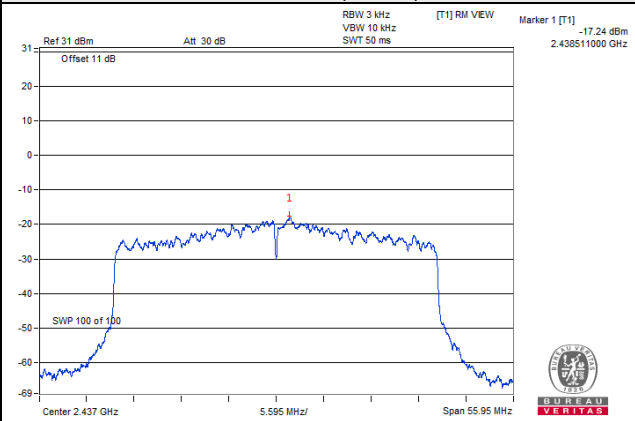


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup

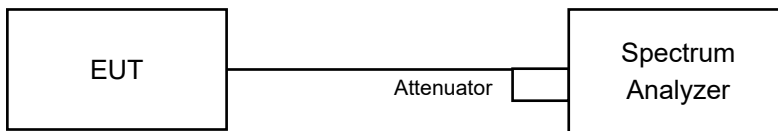

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 EUT Operating Condition

Same as item 4.3.6.



#### 4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b\_Chain 0



CH 1

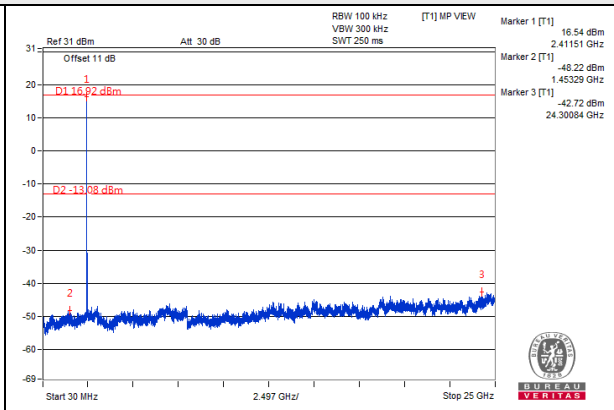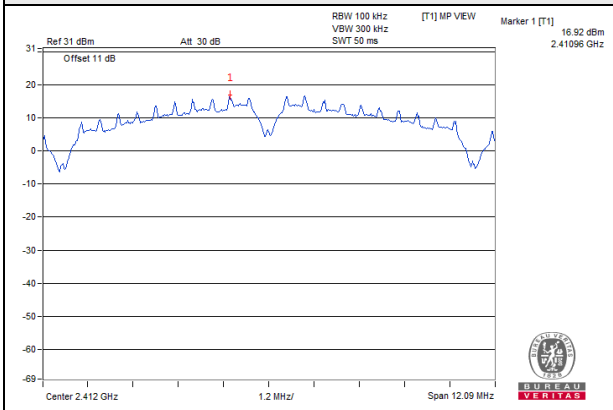


CH 6

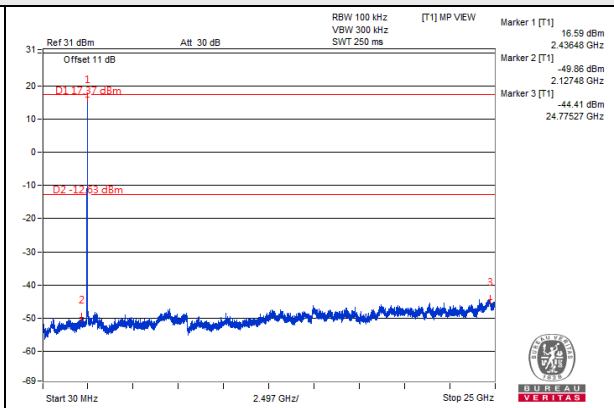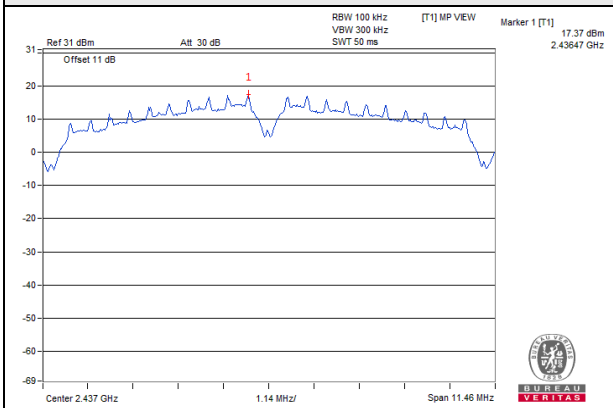


CH 11

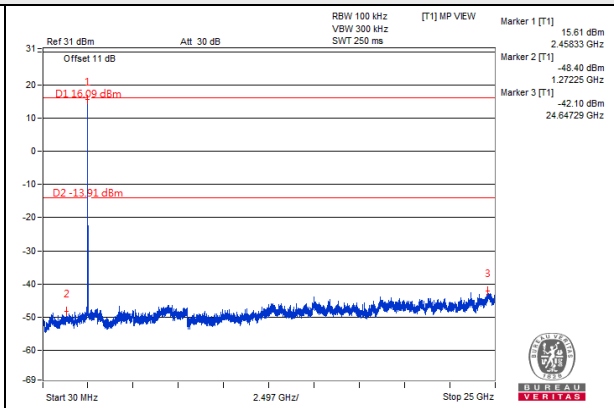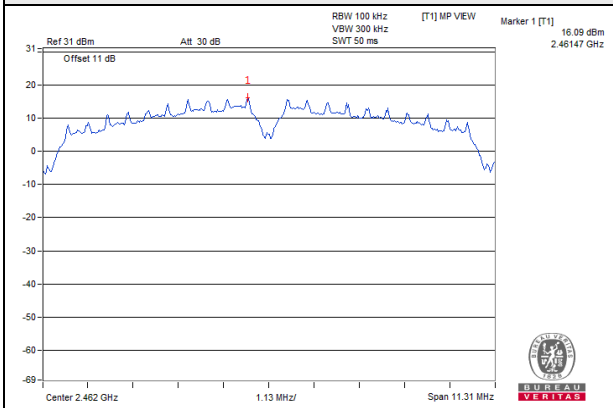

CH 1 Band edge


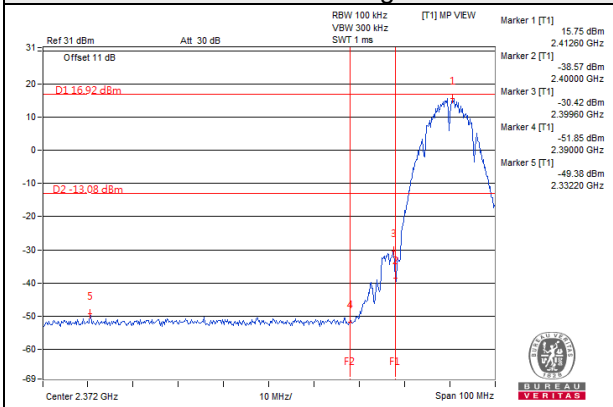


CH 11 Band edge


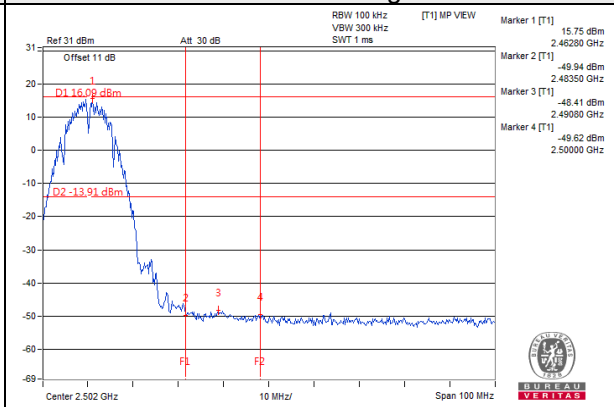


# 802.11b\_Chain 1



## CH 1

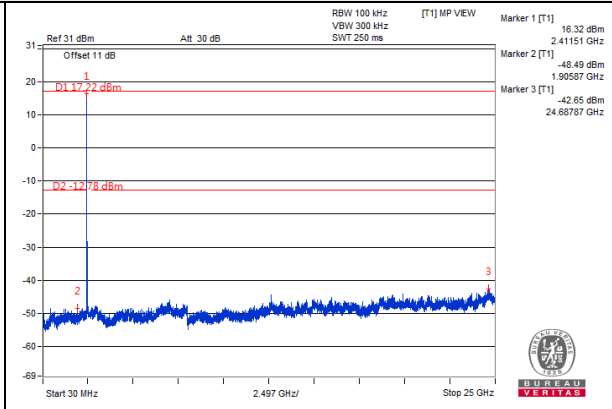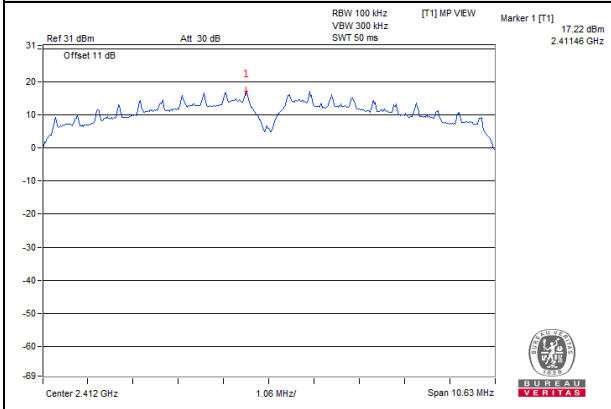


## CH 6

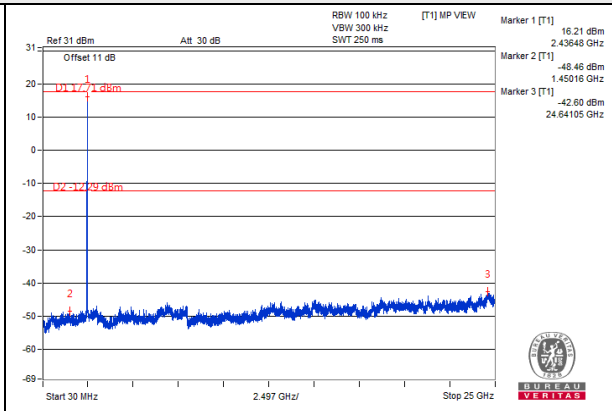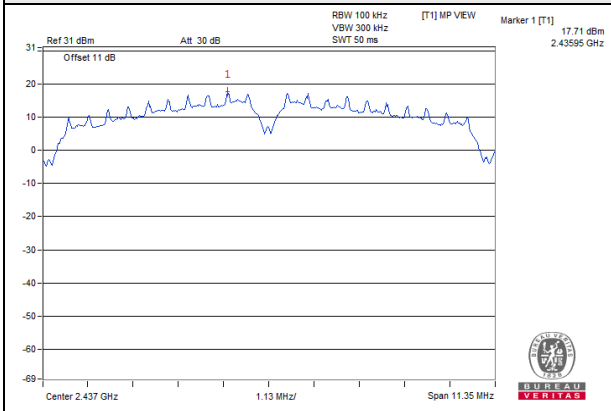


## CH 11

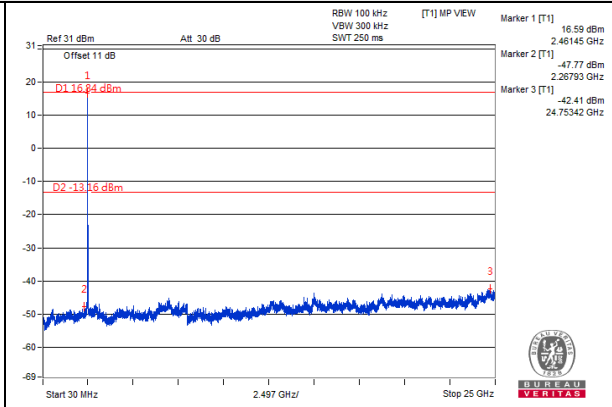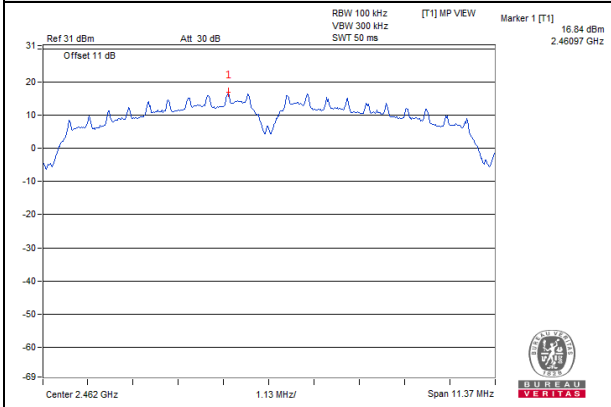

## CH 1 Band edge


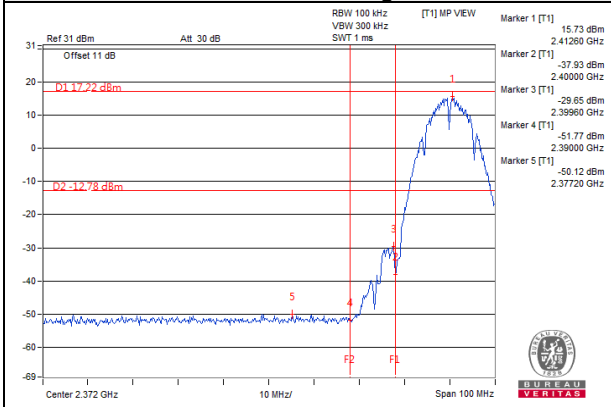


## CH 11 Band edge


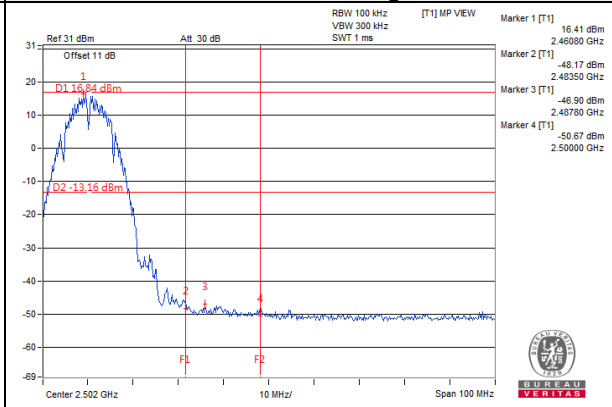


802.11g\_Chain 0



CH 1

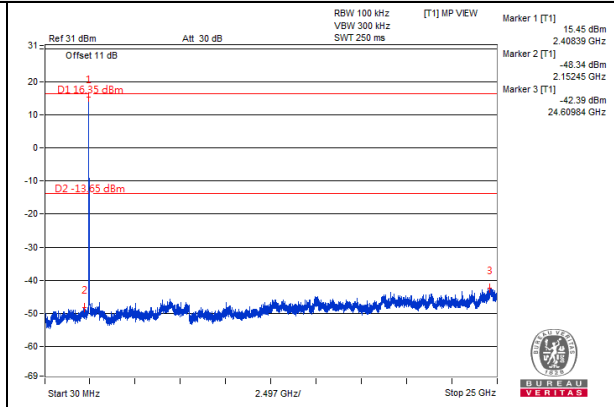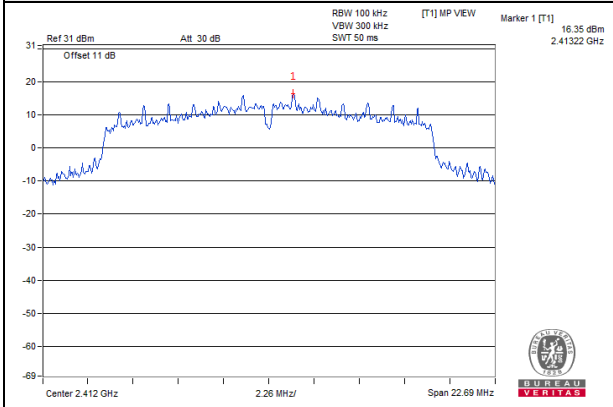


CH 6

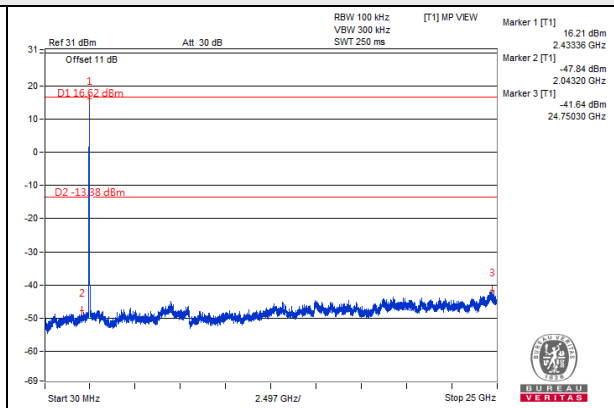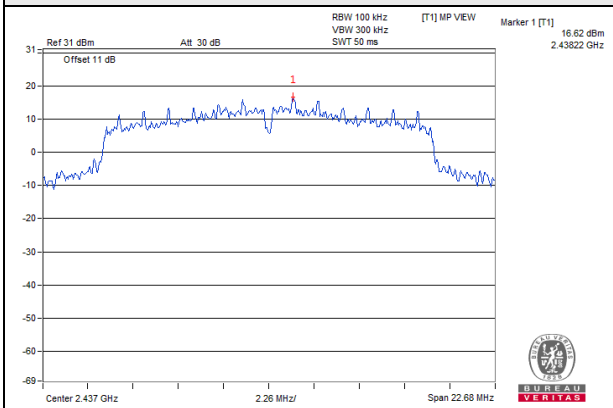


CH 11

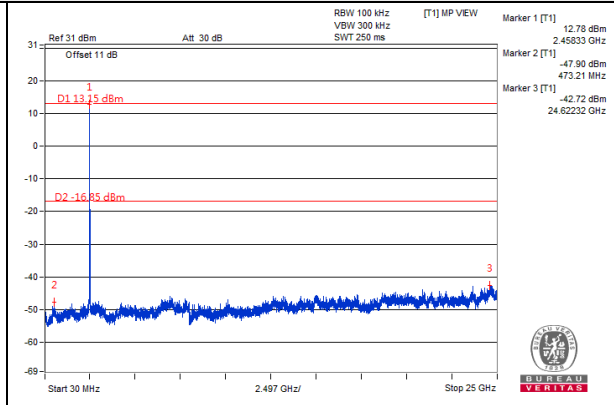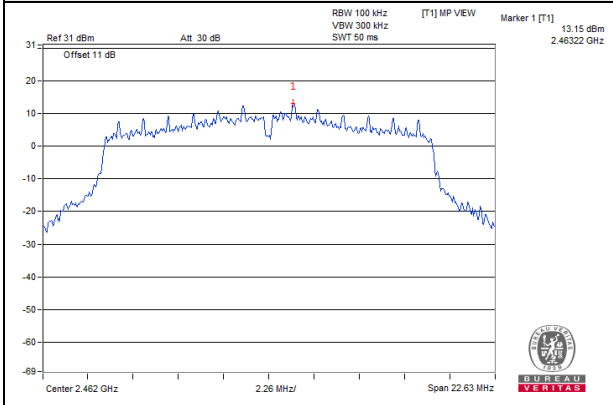

CH 1 Band edge

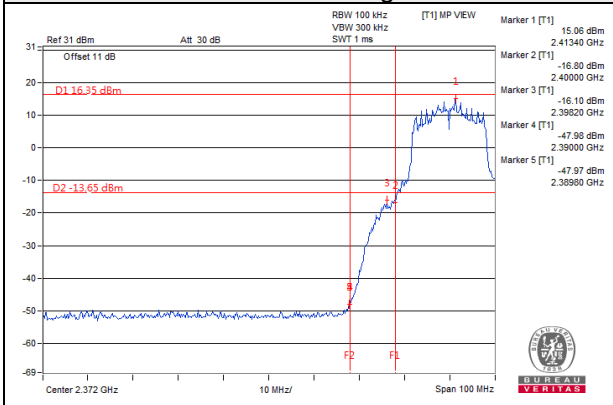



CH 11 Band edge

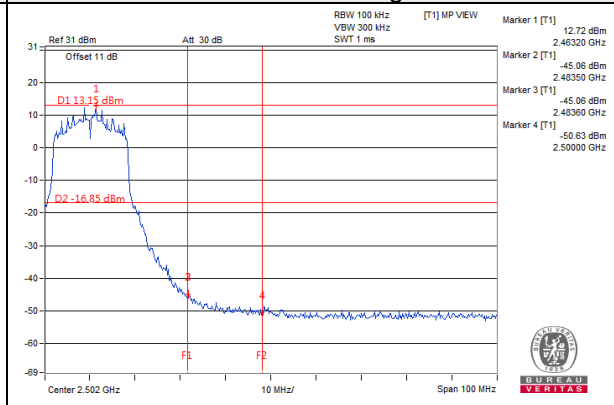





# 802.11g\_Chain 1



## CH 1

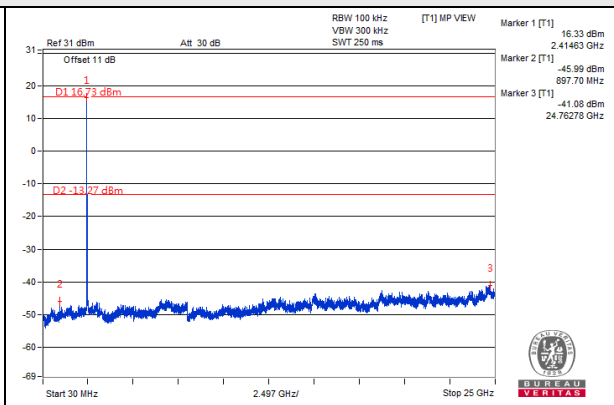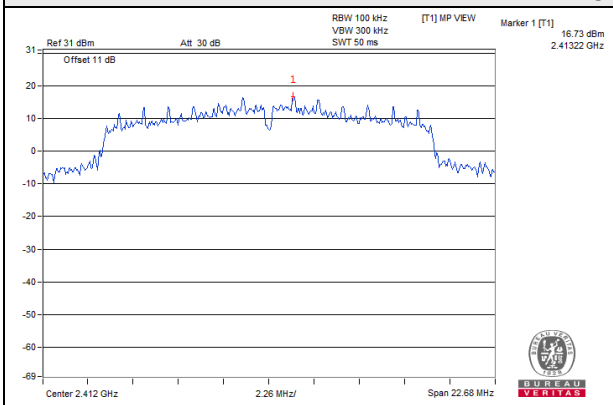


## CH 6

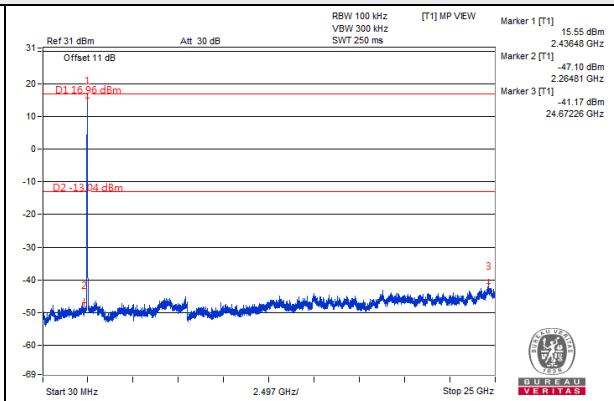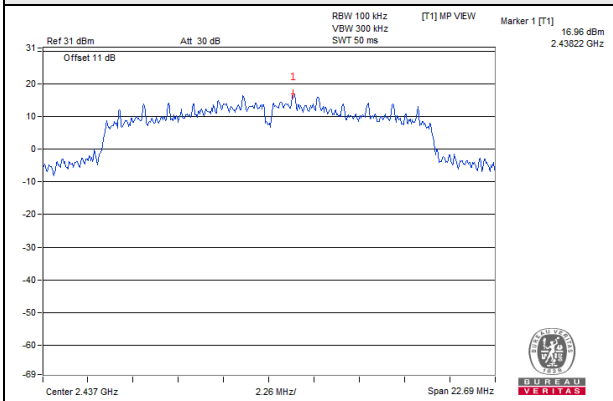


## CH 11

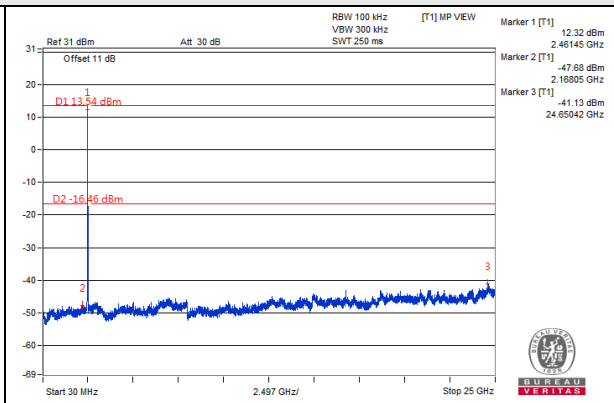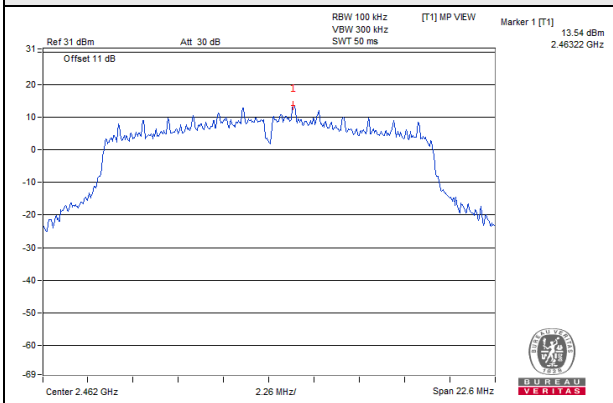

## CH 11 Band edge


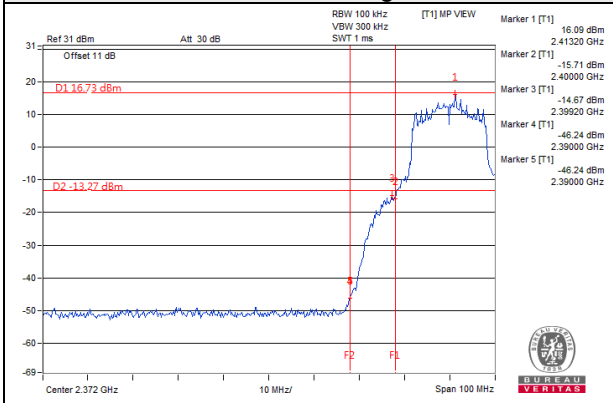


## CH 11 Band edge


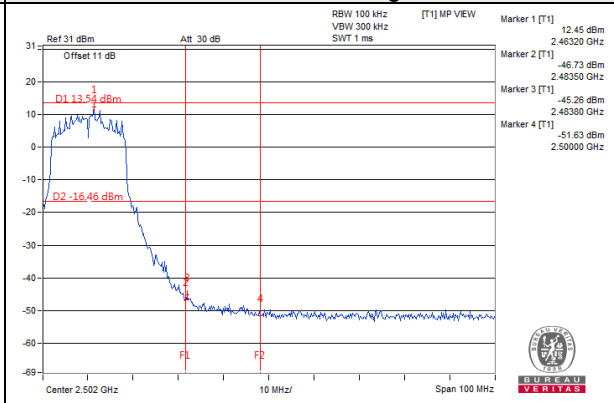


802.11ax (HE20)\_Chain 0



CH 1

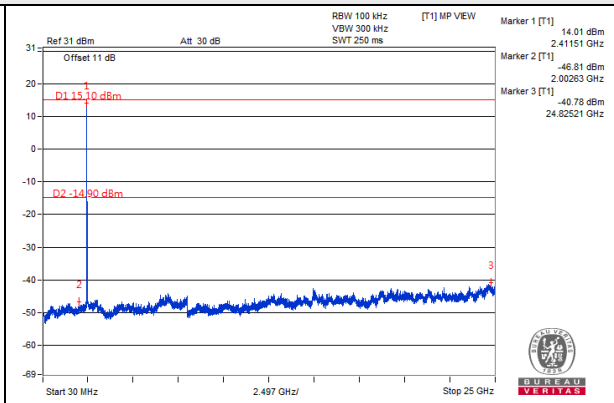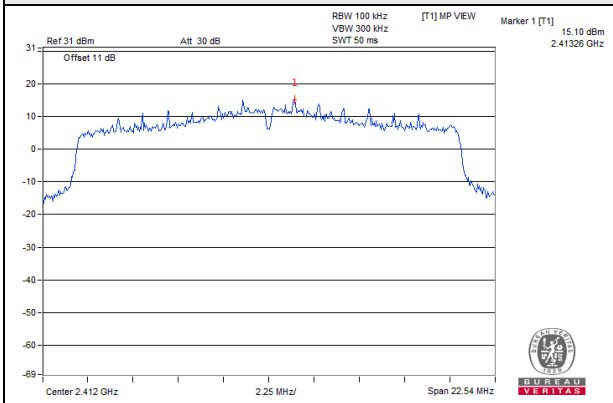


CH 6

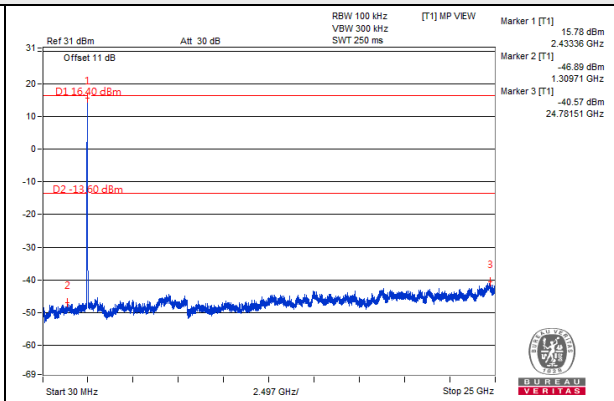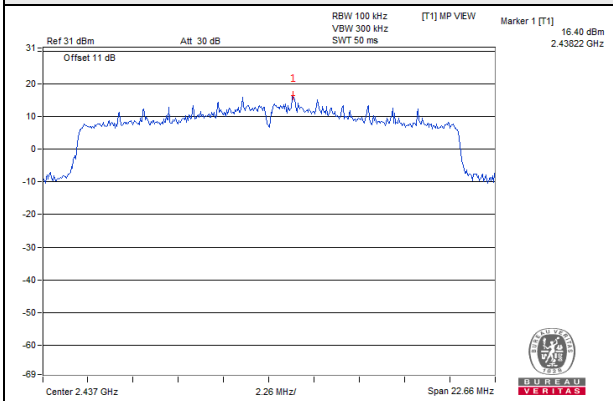


CH 11

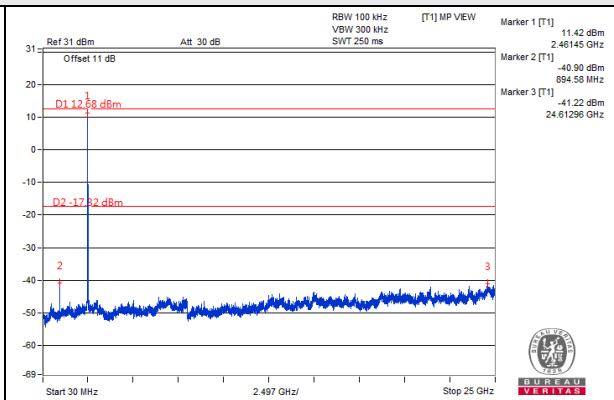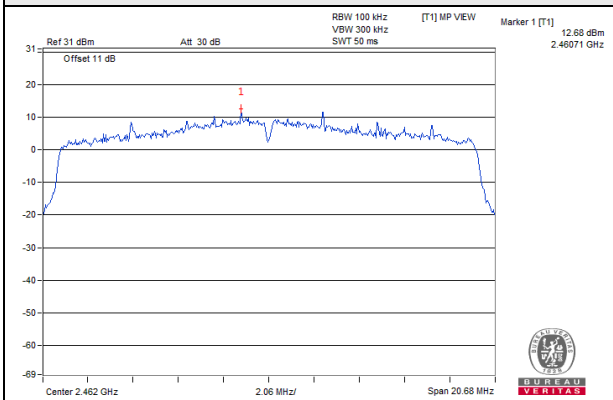

CH 11 Band edge


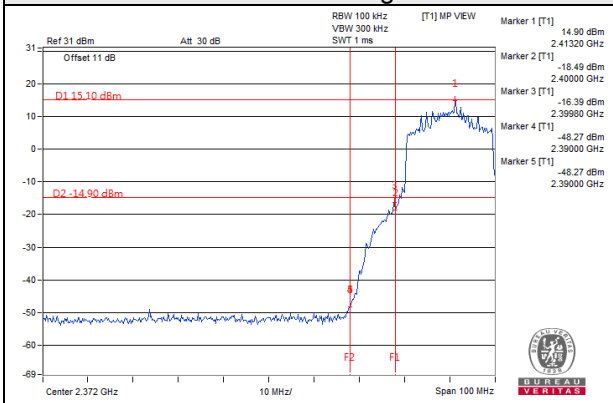


CH 11 Band edge


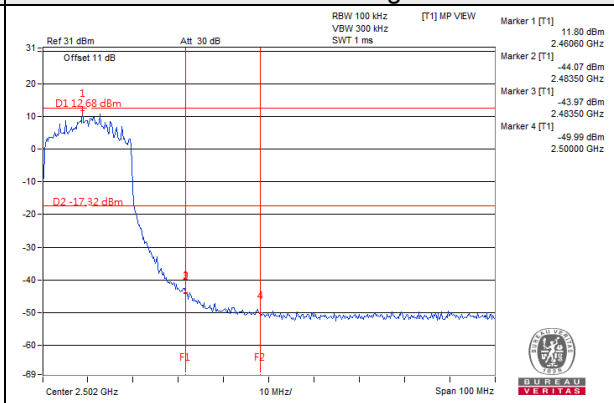


802.11ax (HE20)\_Chain 1



CH 1

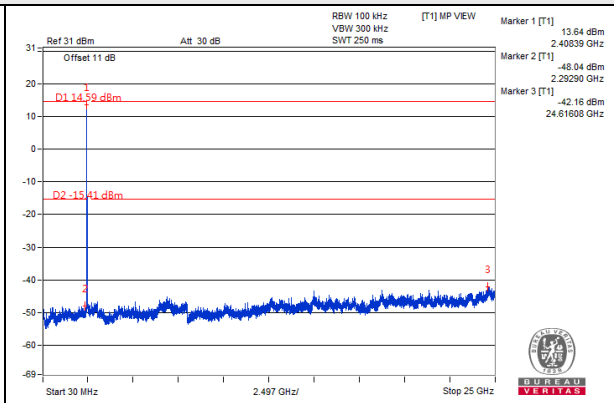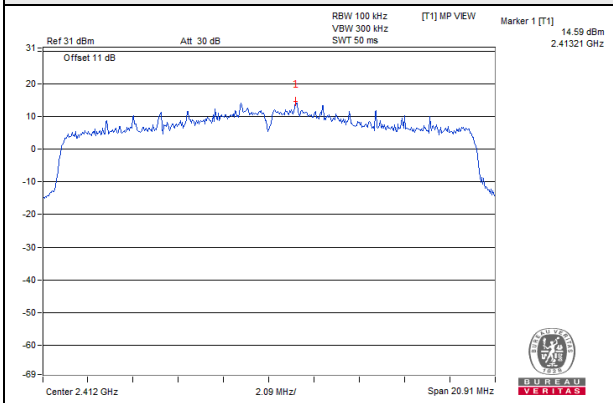


CH 6

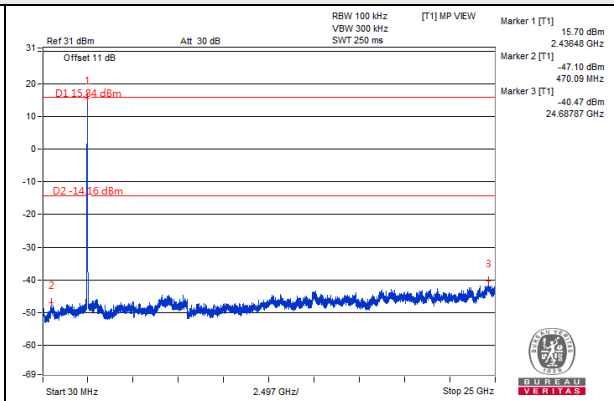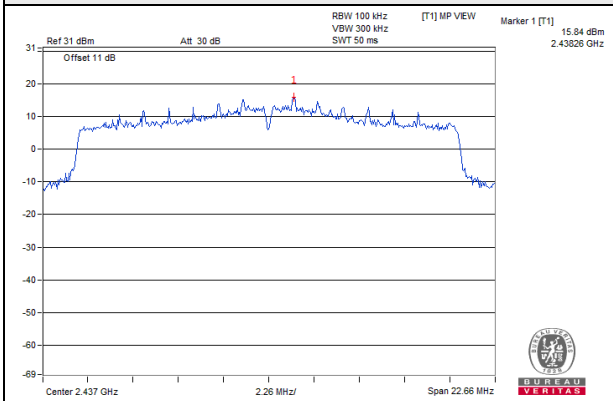


CH 11

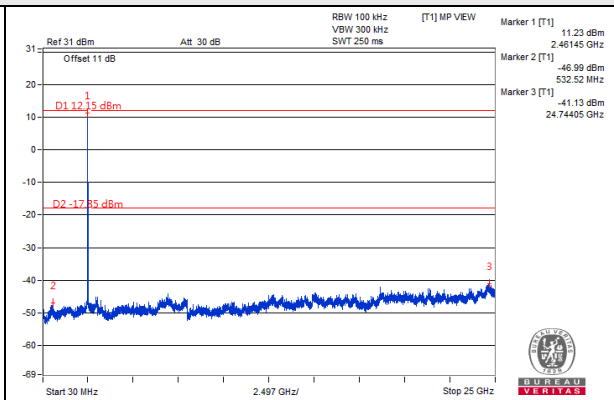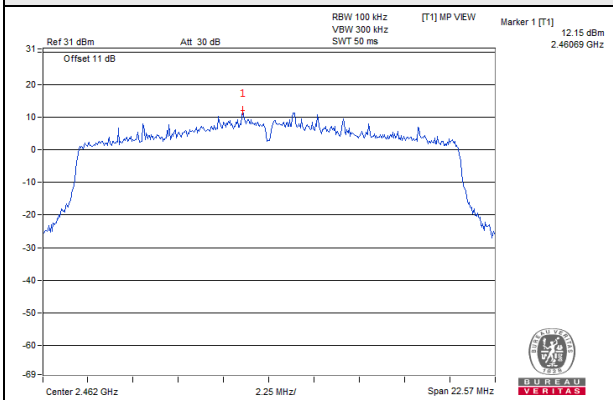

CH 11 Band edge


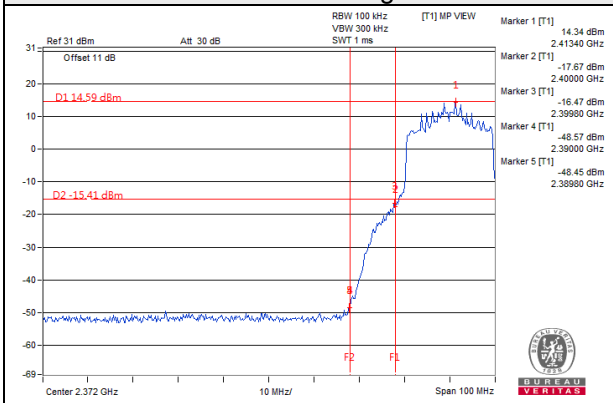


CH 11 Band edge


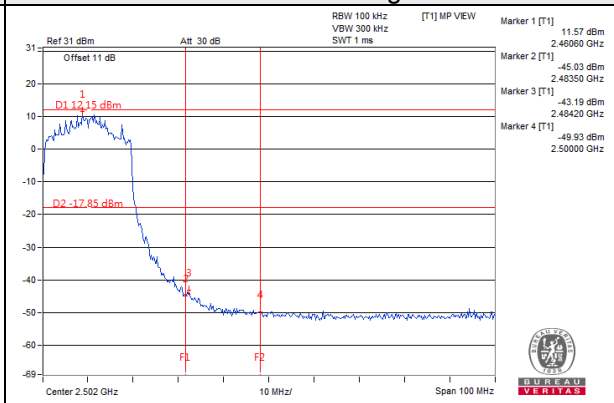


802.11ax (HE40)\_Chain 0



CH 3

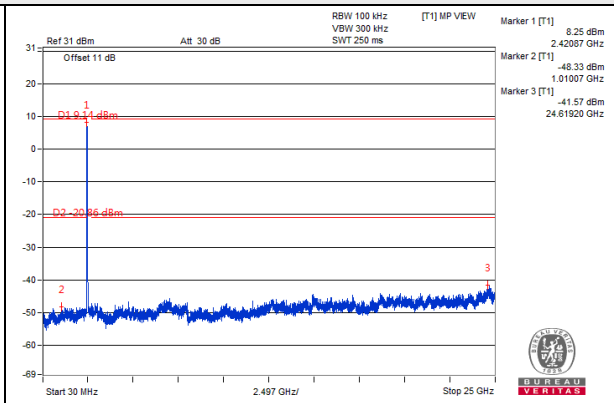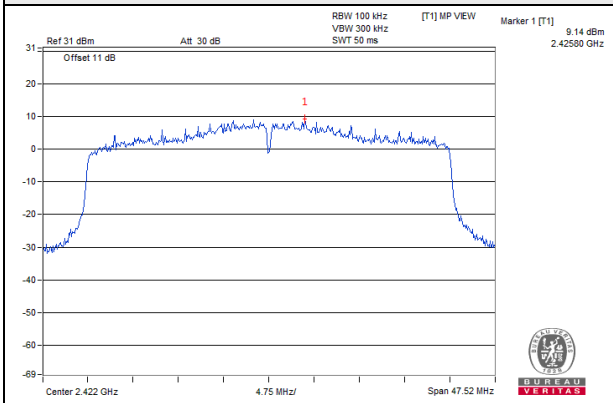


CH 6

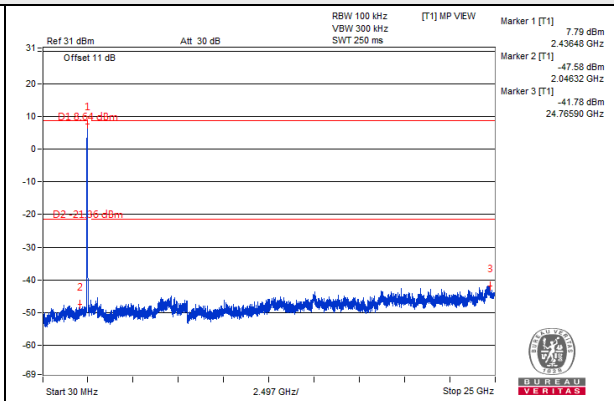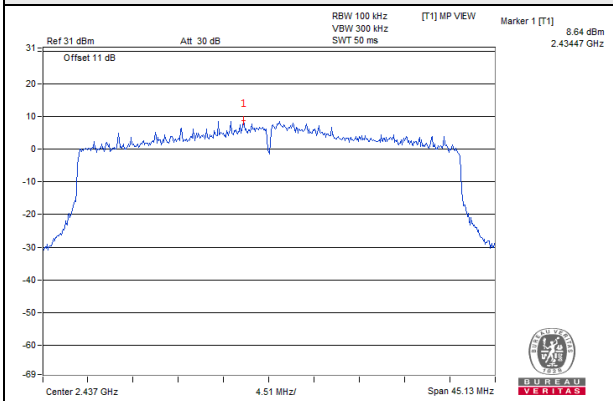


CH 9

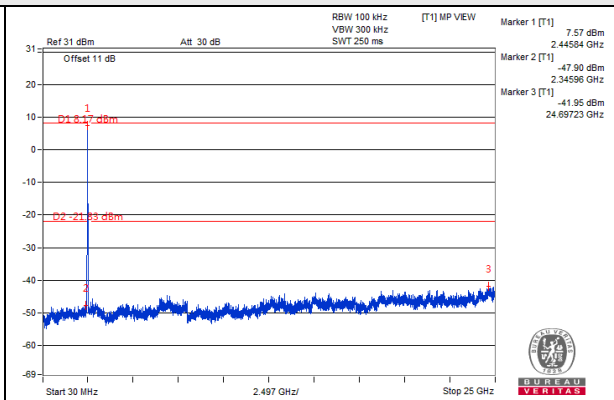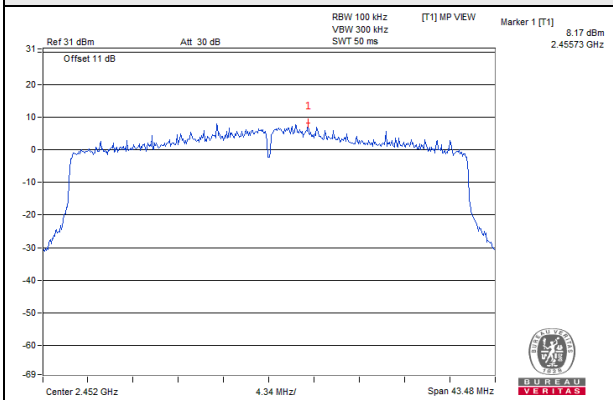

CH 3 Band edge


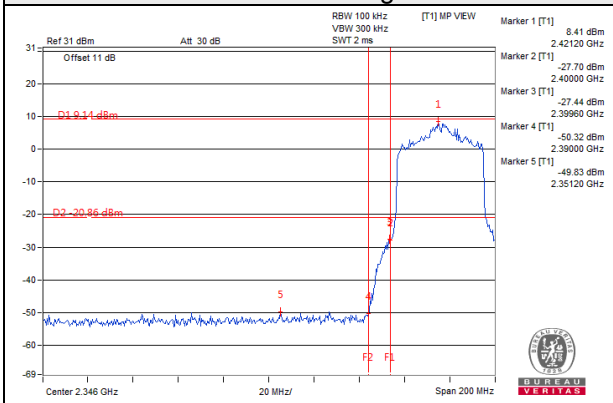


CH 9 Band edge


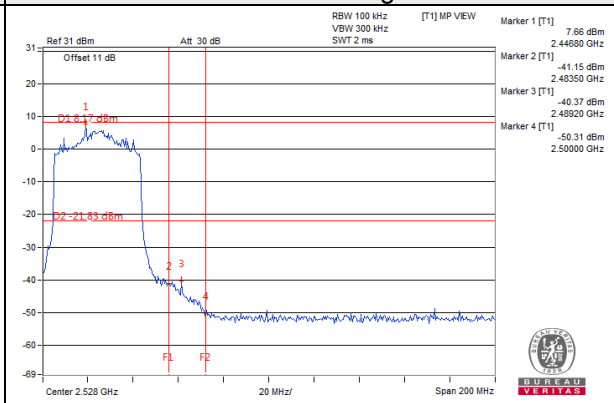


802.11ax (HE40)\_Chain 1



CH 3

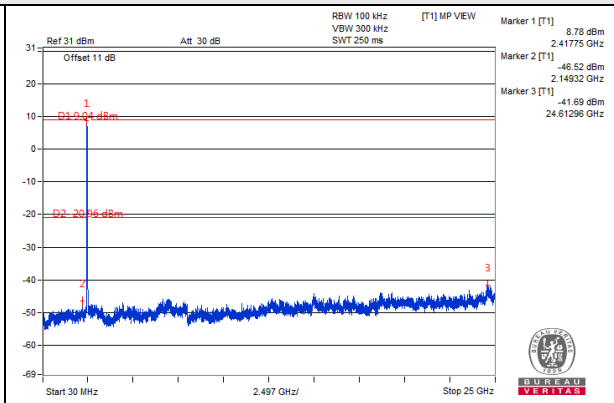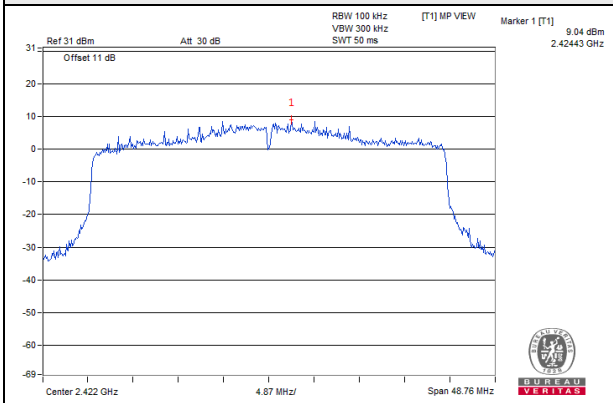


CH 6

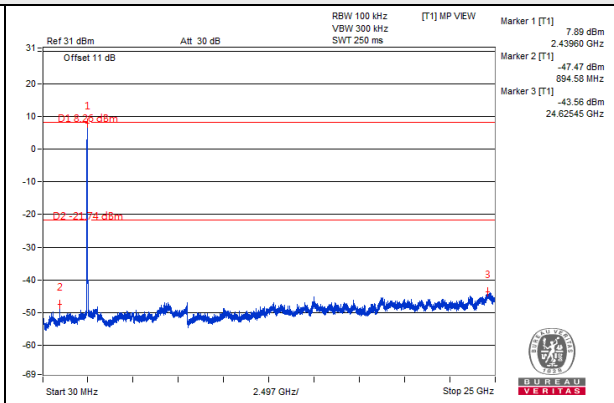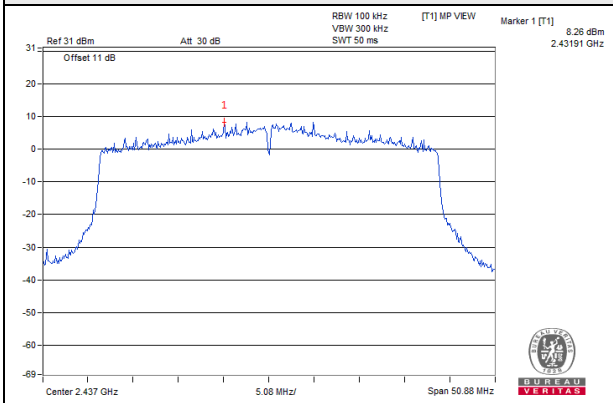


CH 9

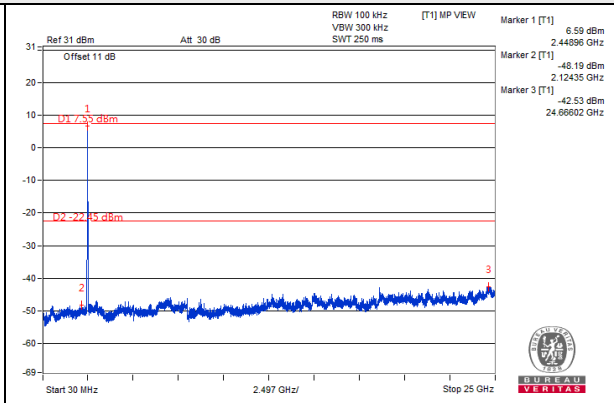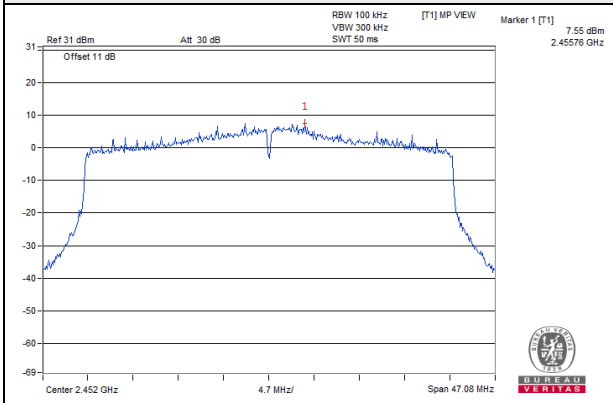

CH 3 Band edge

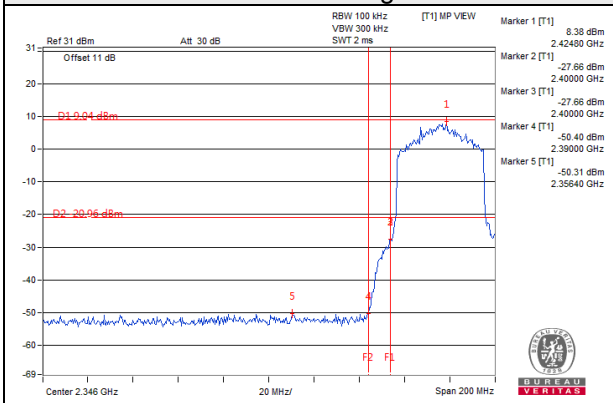

CH 9 Band edge

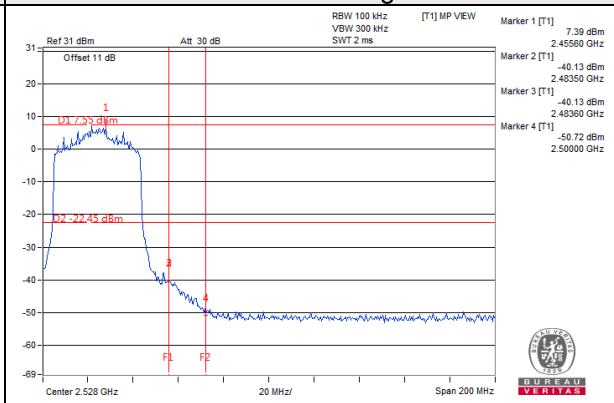


## 5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

# Annex A- Band Edge Measurement

802.11b

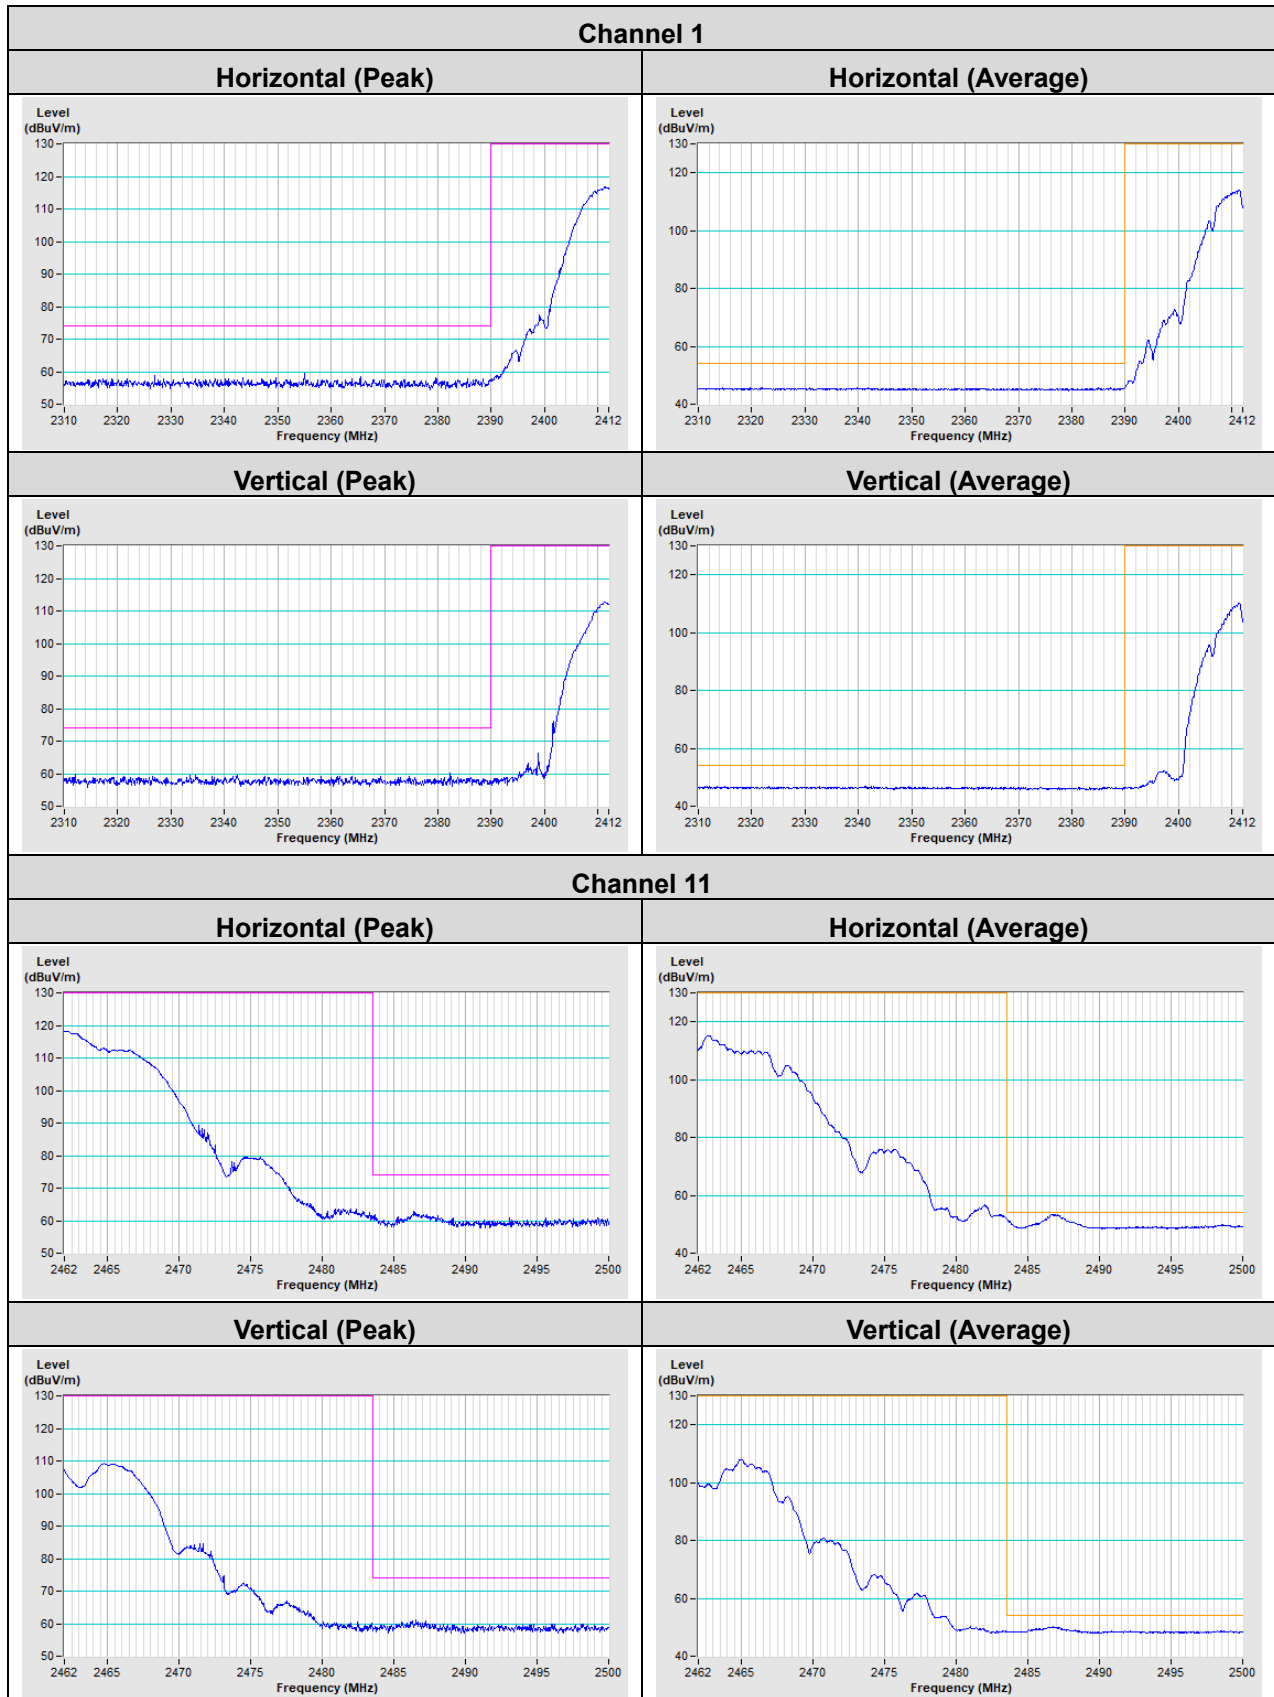


802.11g

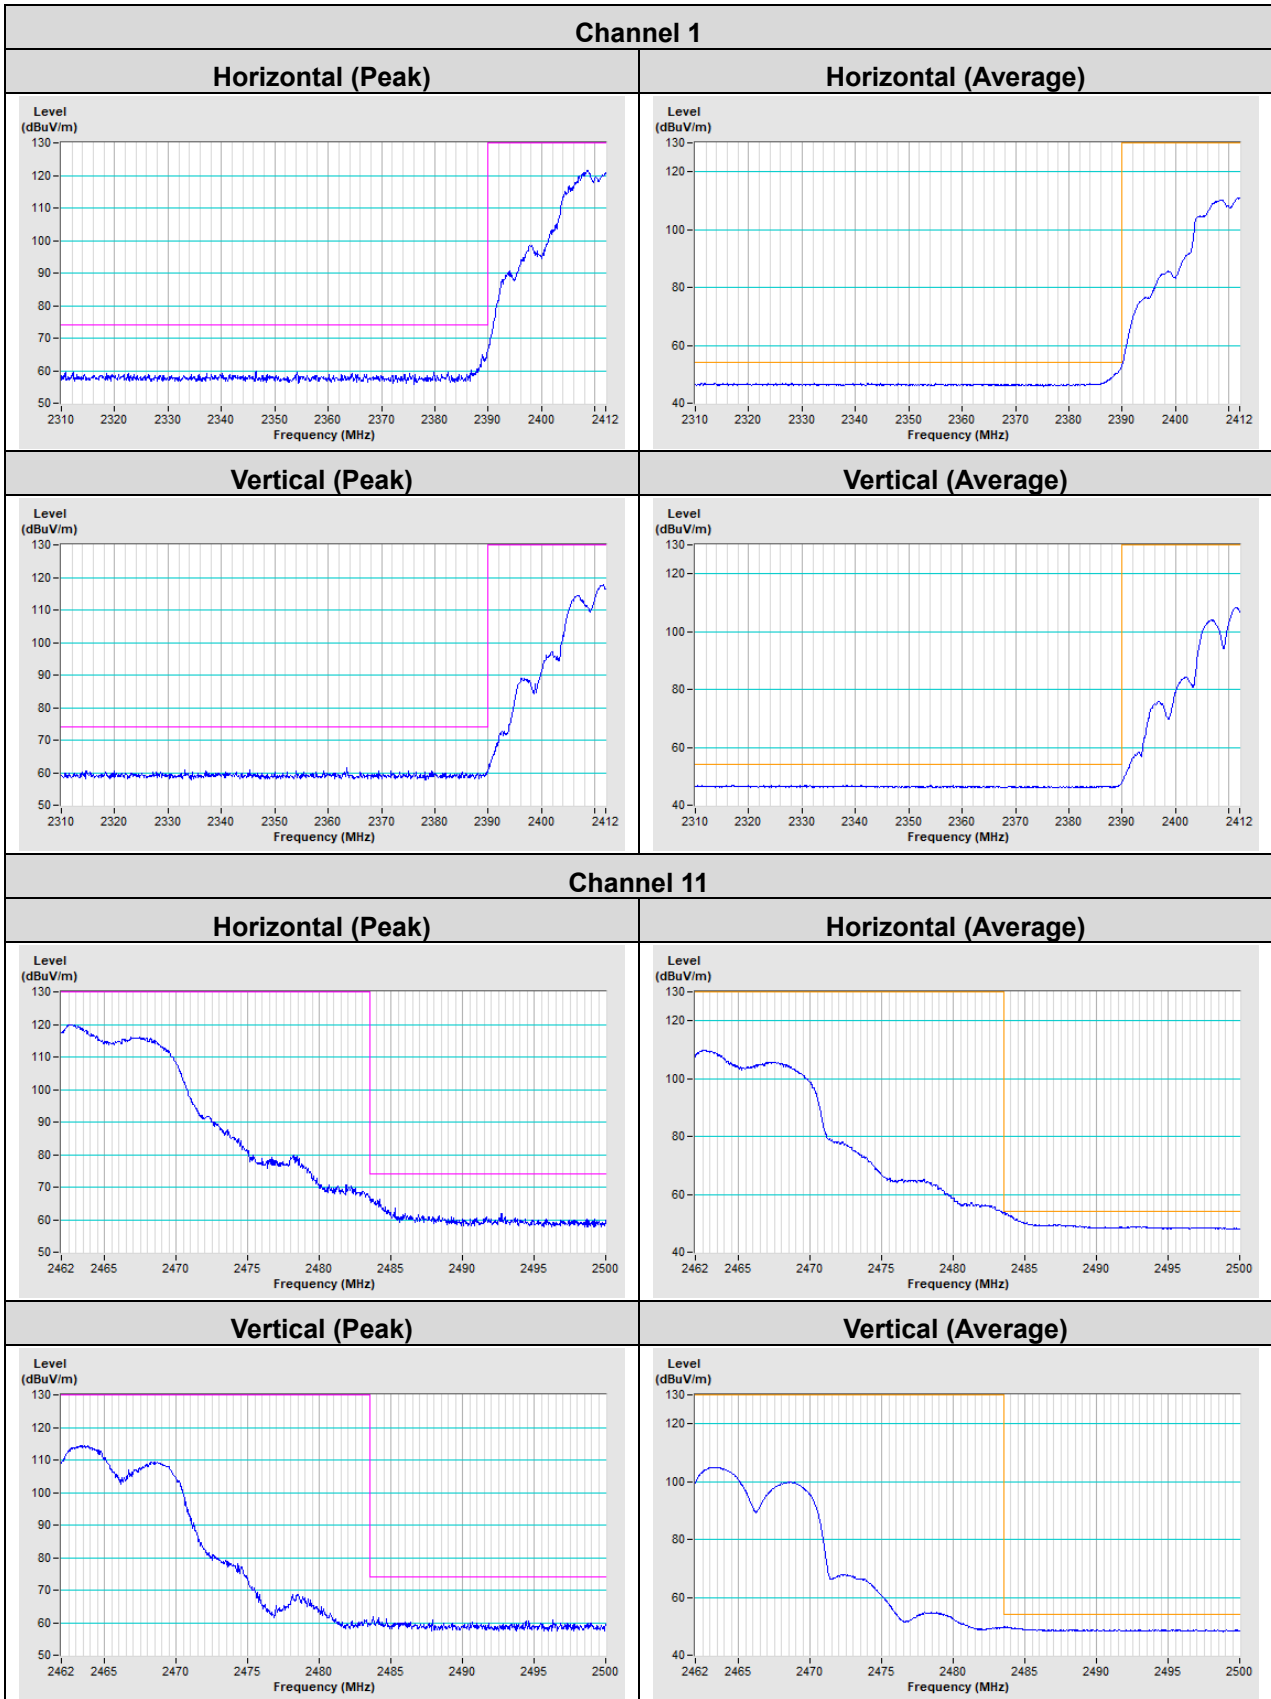




802.11ax (HE20)

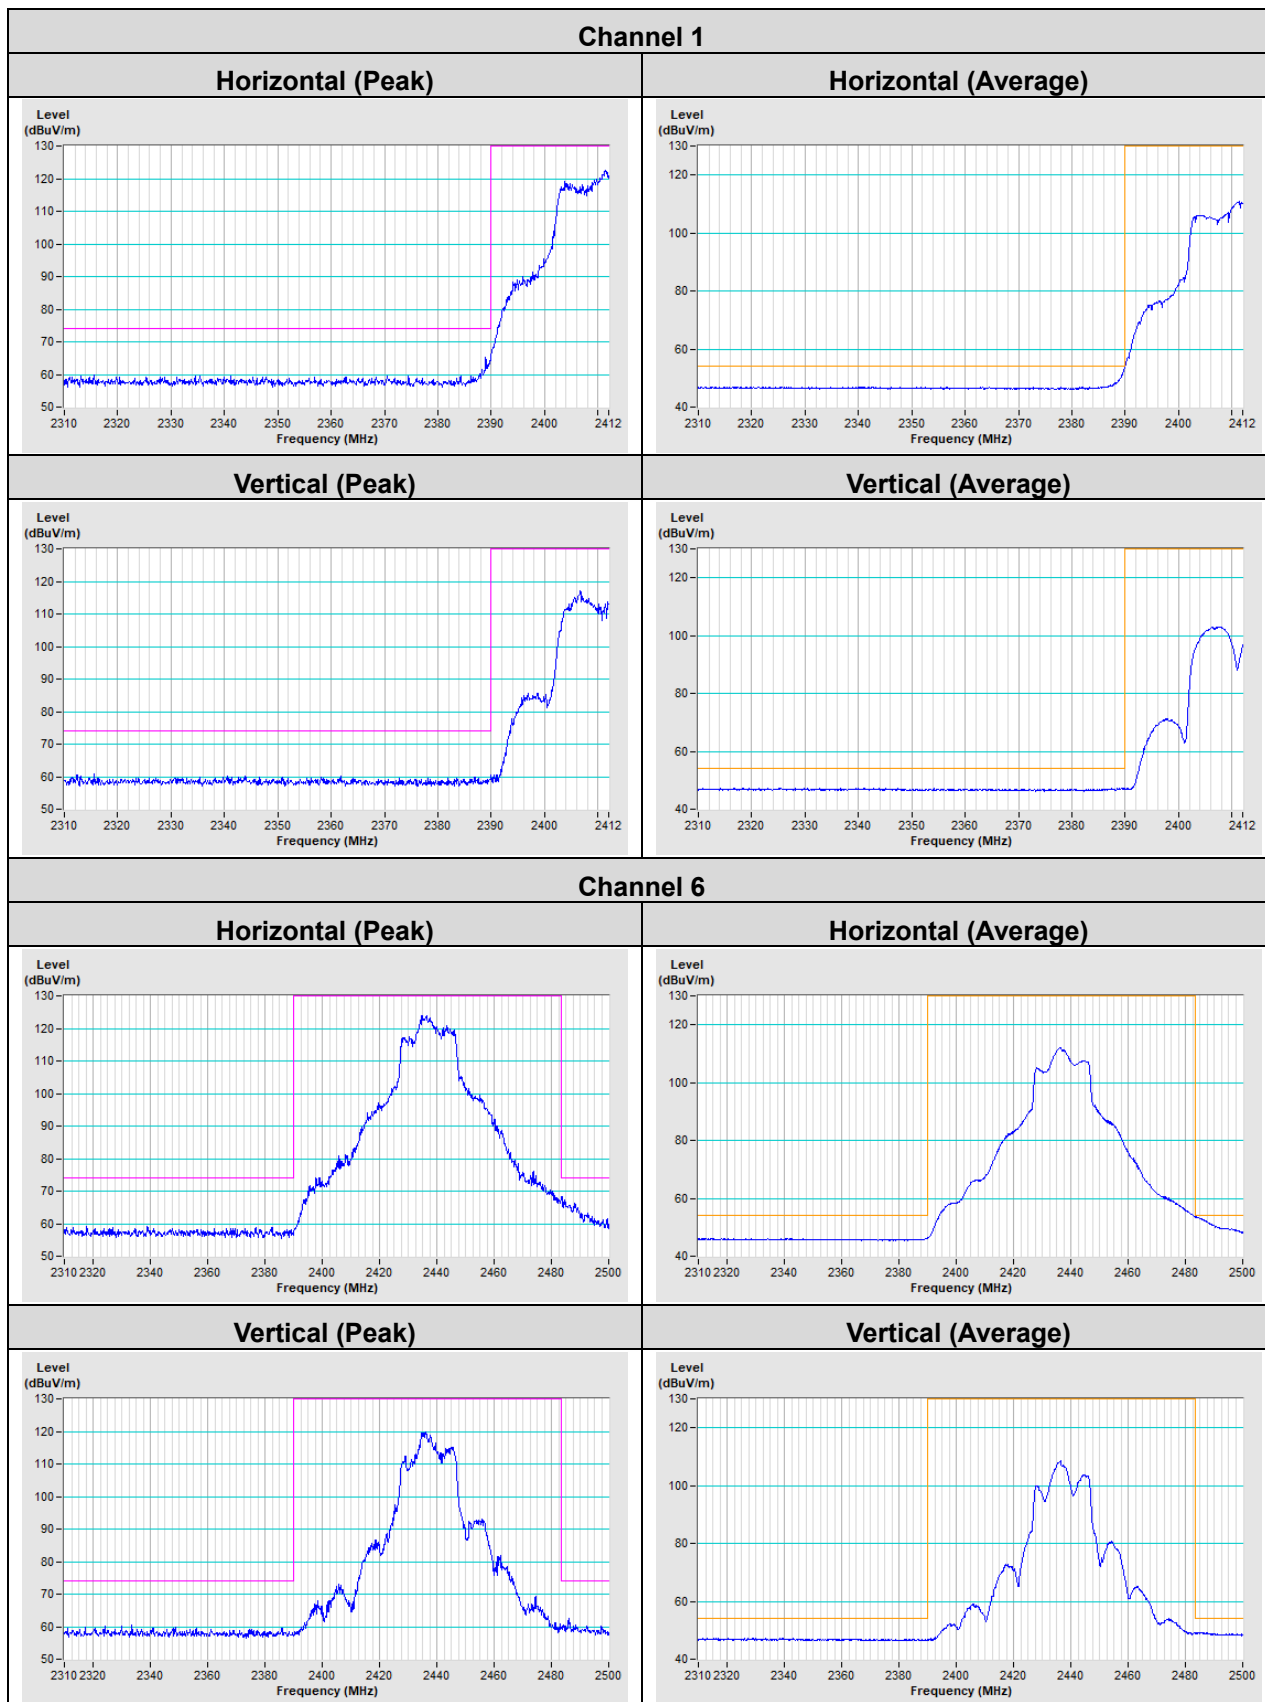


### Channel 11


#### Horizontal (Peak)

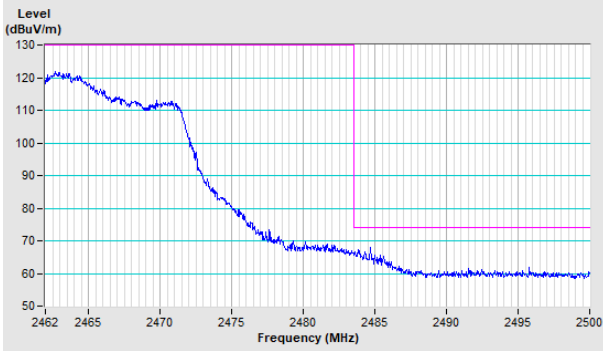


#### Horizontal (Average)

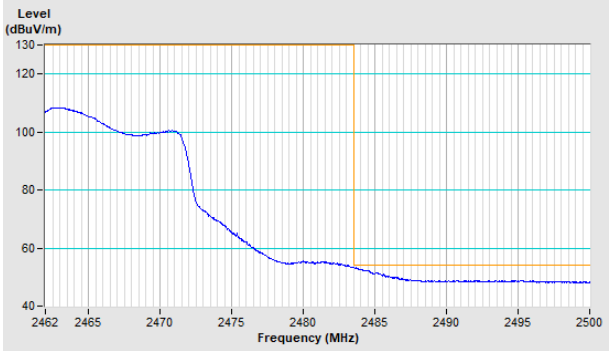


#### Vertical (Peak)

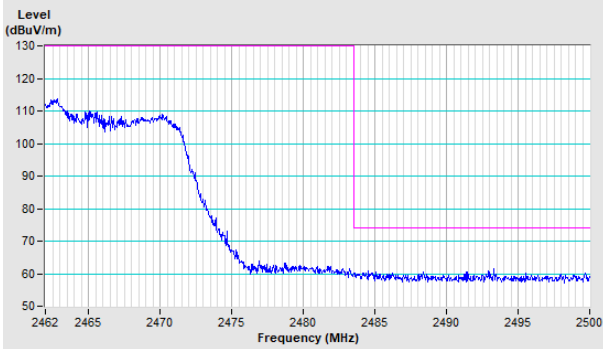


#### Vertical (Average)

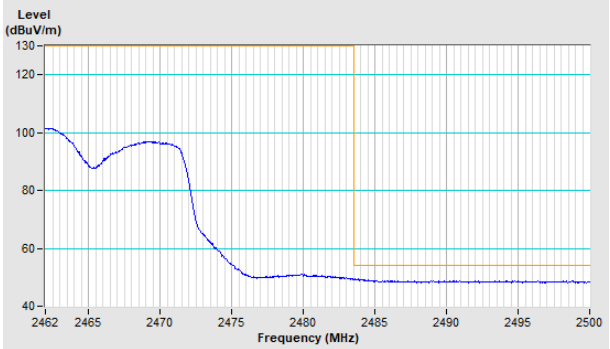

802.11ax (HE40)

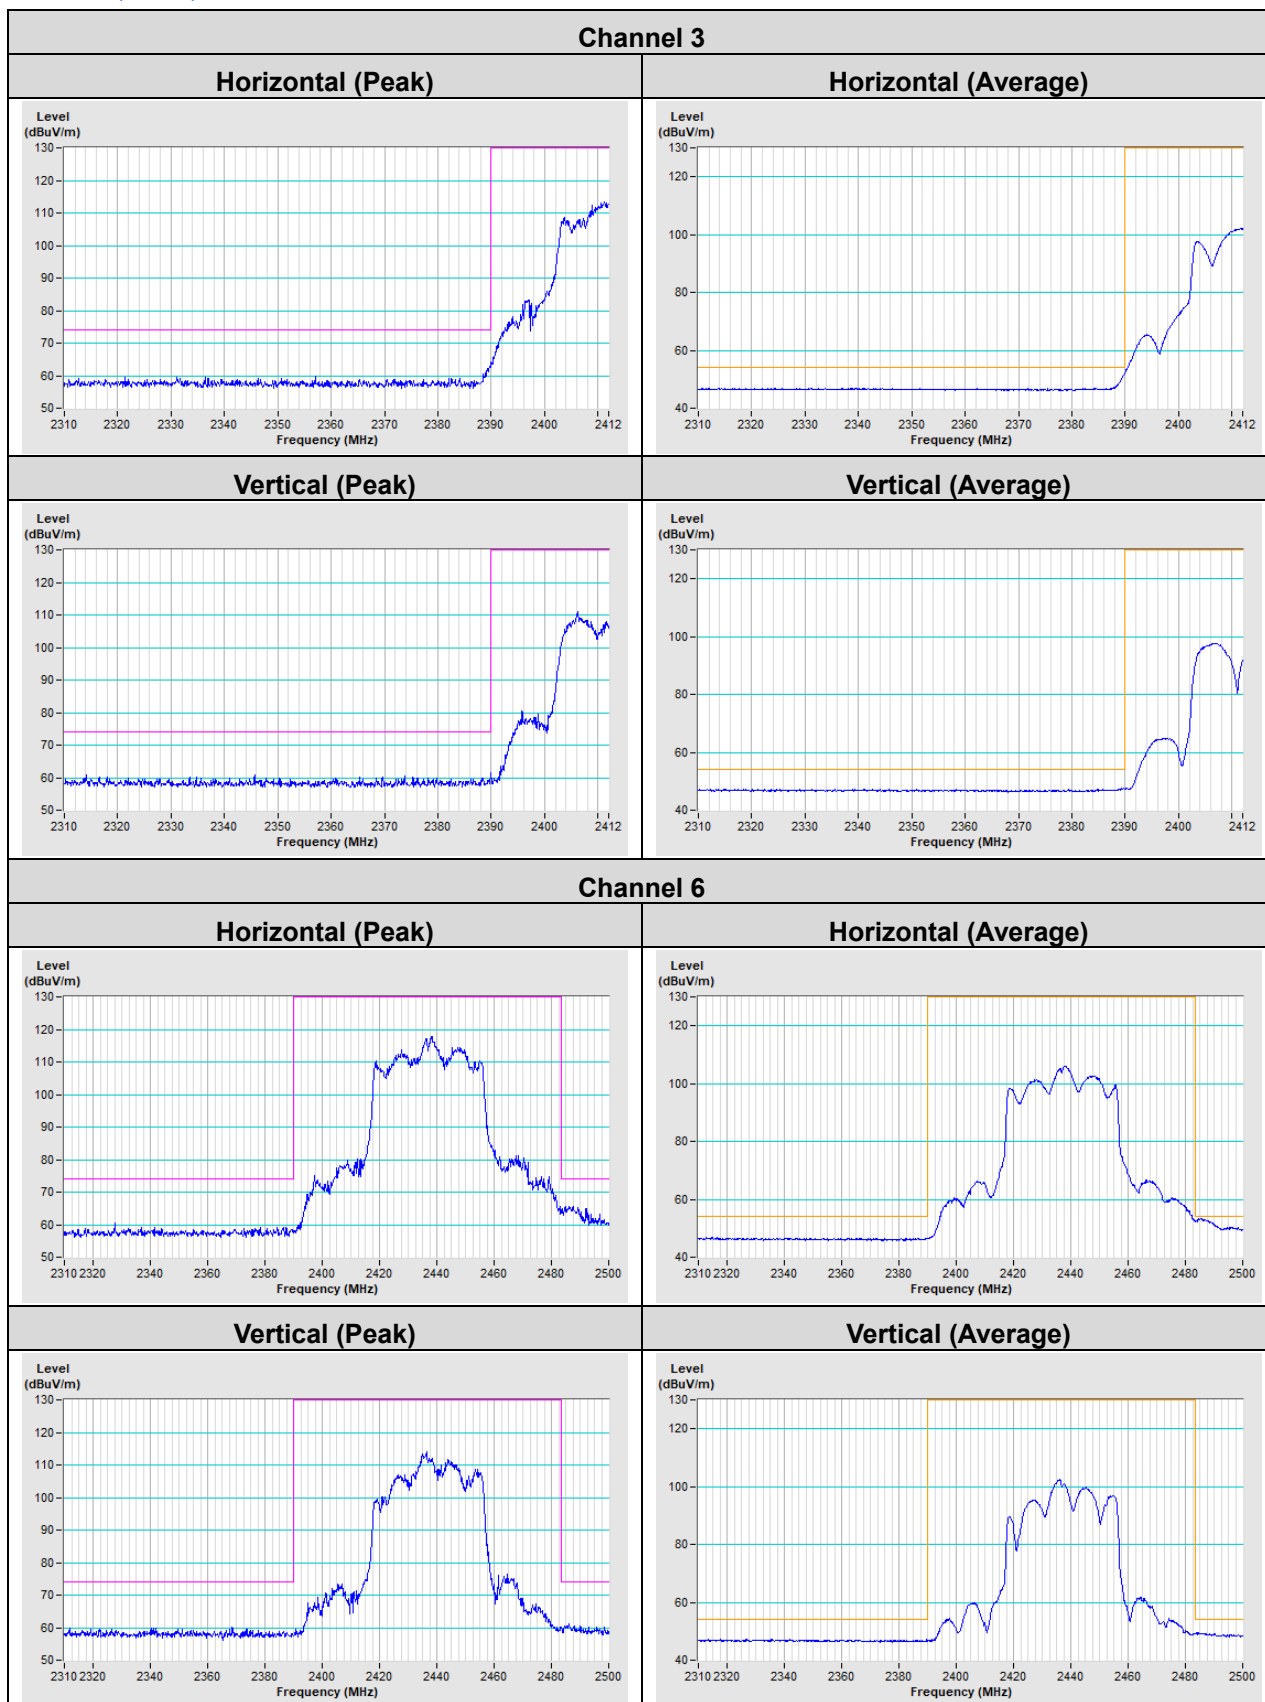

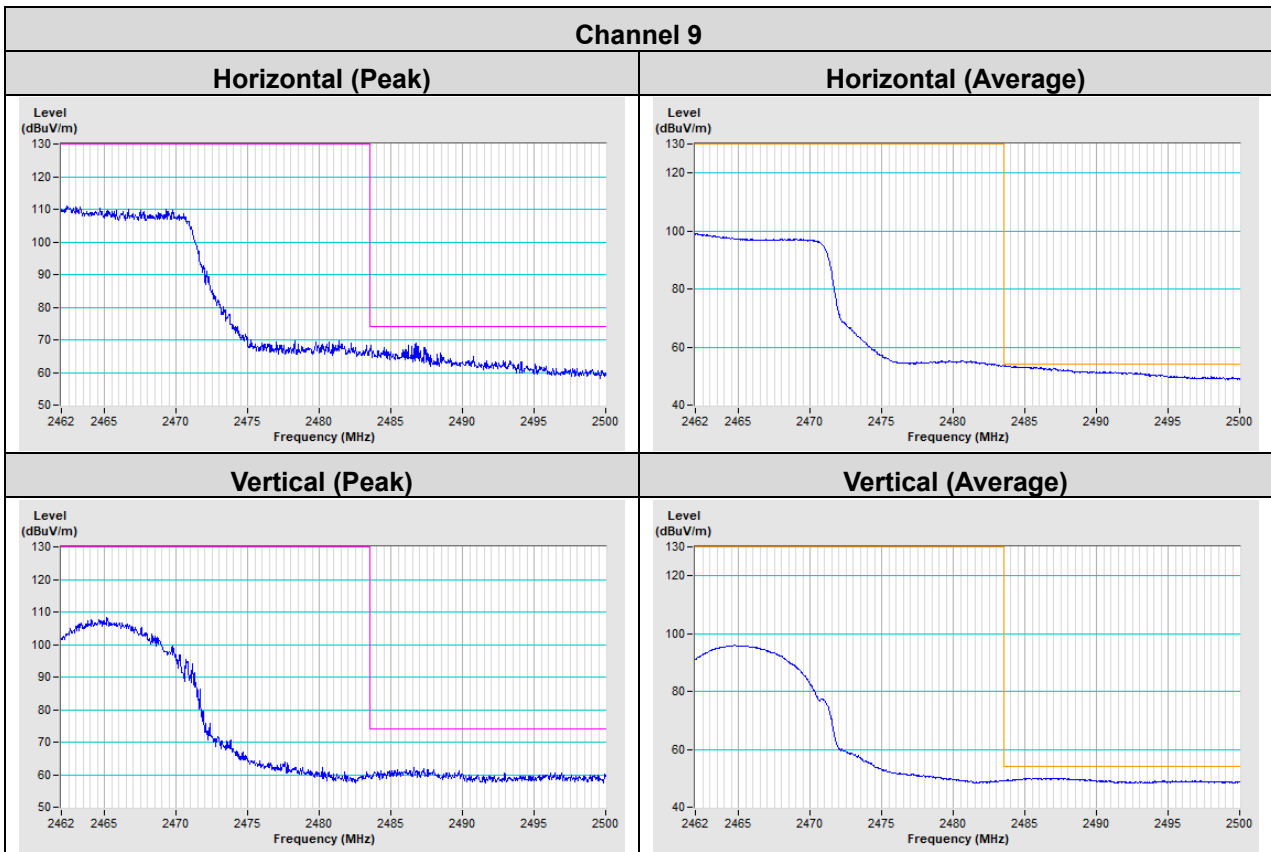

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---