



FCC TEST REPORT

REPORT NO.: RF930902L07
MODEL NO.: WG111T
RECEIVED: Aug. 16, 2004
TESTED: Aug. 16~ Sep. 08, 2004

APPLICANT: NETGEAR, INC.
ADDRESS: 4500 GREAT AMERICA PARKWAY, SANTA CLARA, CA 95054, U.S.A.

ISSUED BY: Advance Data Technology Corporation
LAB ADDRESS: 47 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.
TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kuei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 92 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	10
4.1.2	TEST INSTRUMENTS.....	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD	11
4.1.5	TEST SETUP.....	12
4.1.6	EUT OPERATING CONDITIONS	12
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	25
4.2.2	TEST INSTRUMENTS.....	26
4.2.3	TEST PROCEDURES	27
4.2.4	DEVIATION FROM TEST STANDARD	27
4.2.5	TEST SETUP.....	28
4.2.6	EUT OPERATING CONDITIONS	28
4.2.7	TEST RESULTS	29
4.2.8	TEST RESULTS (A)	31
4.2.9	TEST RESULTS (B)	37
4.3	6dB BANDWIDTH MEASUREMENT.....	45
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	45
4.3.2	TEST INSTRUMENTS.....	45
4.3.3	TEST PROCEDURE.....	46
4.3.4	DEVIATION FROM TEST STANDARD	46
4.3.5	TEST SETUP.....	46
4.3.6	EUT OPERATING CONDITIONS	46
4.3.7	TEST RESULTS (A)	47
4.3.8	TEST RESULTS (B)	51
4.4	MAXIMUM PEAK OUTPUT POWER	57
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	57



4.4.2	TEST INSTRUMENTS.....	57
4.4.3	TEST PROCEDURES	58
4.4.4	DEVIATION FROM TEST STANDARD	58
4.4.5	TEST SETUP.....	58
4.4.6	EUT OPERATING CONDITIONS	58
4.4.7	TEST RESULTS (A)	59
4.4.8	TEST RESULTS (B)	60
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	61
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	61
4.5.2	TEST INSTRUMENTS.....	61
4.5.3	TEST PROCEDURE.....	62
4.5.4	DEVIATION FROM TEST STANDARD	62
4.5.5	TEST SETUP.....	62
4.5.6	EUT OPERATING CONDITIONS	62
4.5.7	TEST RESULTS (A)	63
4.5.8	TEST RESULTS (B)	67
4.6	BAND EDGES MEASUREMENT	73
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	73
4.6.2	TEST INSTRUMENTS.....	73
4.6.3	TEST PROCEDURE.....	73
4.6.4	DEVIATION FROM TEST STANDARD	73
4.6.5	EUT OPERATING CONDITION	73
4.6.6	TEST RESULTS (A)	74
4.6.7	TEST RESULTS (B)	79
4.7	ANTENNA REQUIREMENT	87
4.7.1	STANDARD APPLICABLE	87
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	87
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	88
6	INFORMATION ON THE TESTING LABORATORIES	92



1 CERTIFICATION

PRODUCT : 108Mbps Wireless USB 2.0 Adapter
BRAND NAME : NETGEAR
MODEL NO. : WG111T
APPLICANT : NETGEAR, INC.
TESTED : Aug. 16 ~ Sep. 08, 2004
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** Sep. 14, 2004
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Sep. 14, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Sep. 14, 2004
(Cody Chang,
Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.66dB at 0.213MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.47dB at 9648.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	108Mbps Wireless USB 2.0 Adapter
MODEL NO.	WG111T
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 2)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	17.02dBm
ANTENNA TYPE	Chip antenna with 2dBi antenna gain
DATA CABLE	1.5m USB shielded cable
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
3. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

- Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test. Above 1GHz, the channel 1, 6, and 11 were tested individually.
- From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
- Two test results were presented in the following sections, test result A is for CCK technique, and test result B is for OFDM technique.
- For Conducted Emission and Radiated Emissions below 1GHz testing, there are two test modes provided in the following section. Please refer to the table as below:

TEST MODE	DISCRIPTION
1	The EUT plugged into the Notebook directly.
2	The EUT plugged into the Notebook via a USB cable

One channel is provided to this EUT for Turbo Mode.

Channel	Frequency
6	2437 MHz

NOTE: One turbo mode at frequency 2437MHz.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 108Mbps Wireless USB 2.0 Adapter. According to the specifications of the manufacturer, it must complies with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4: 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode 1

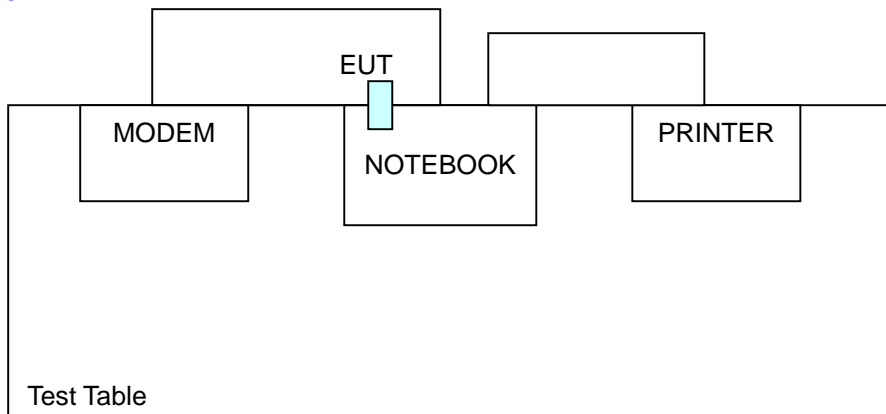

Test Mode 2

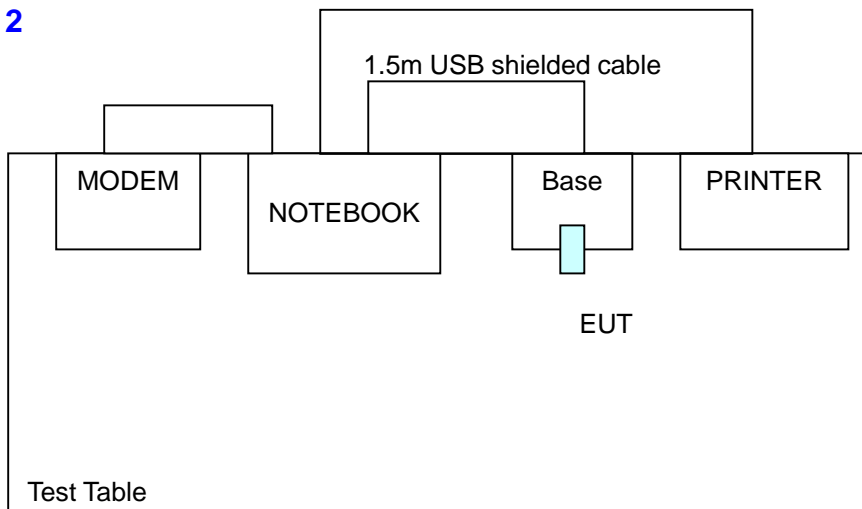



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Dec. 11, 2004
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

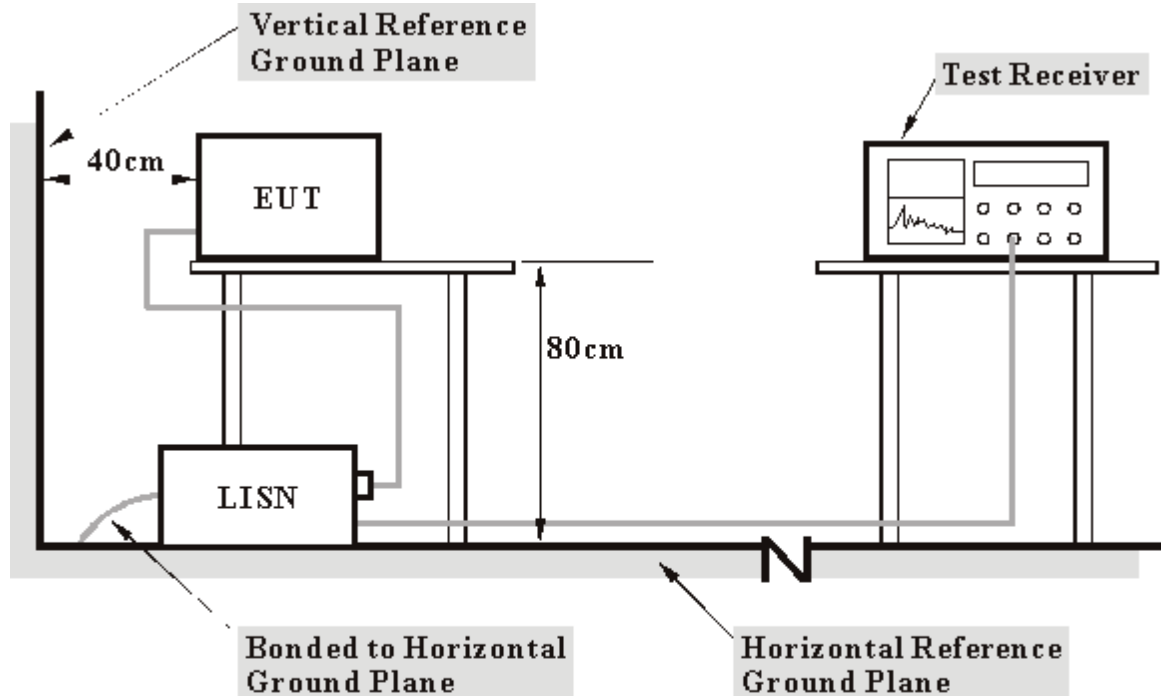

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a notebook system placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to modem.
- e. The notebook system sent "H" messages to printer, and the printer printed them on paper.
- f. Steps c ~ e were repeated.




4.1.7 TEST RESULTS

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	1
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	37.69	-	37.79	-	64.43	54.43	-26.64	-
2	0.216	0.10	45.05	-	45.15	-	62.96	52.96	-17.81	-
3	1.145	0.25	24.93	-	25.18	-	56.00	46.00	-30.82	-
4	1.805	0.26	32.01	-	32.27	-	56.00	46.00	-23.73	-
5	5.477	0.38	25.55	-	25.93	-	60.00	50.00	-34.07	-
6	10.285	0.54	35.37	-	35.91	-	60.00	50.00	-24.09	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

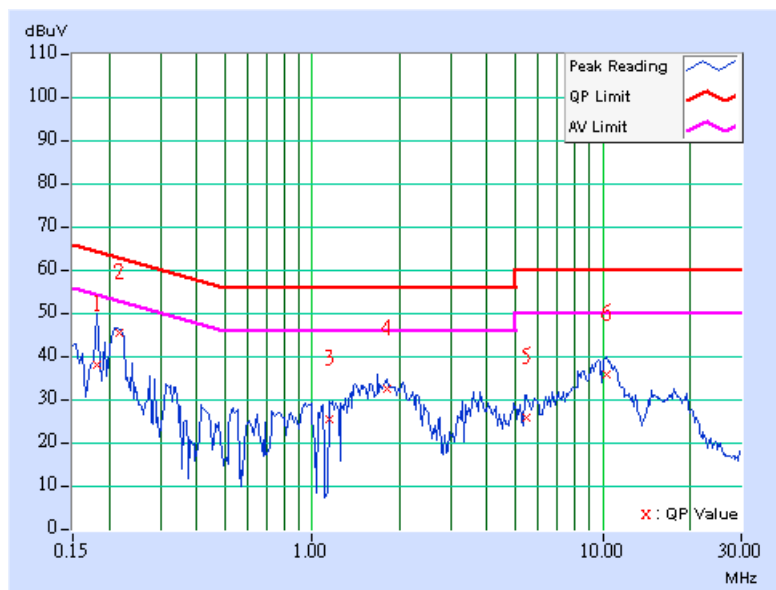




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	1
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.216	0.10	43.96	-	44.06	-	62.96
2	0.327	0.11	30.84	-	30.95	-	59.53	49.53	-28.59	-
3	1.418	0.24	30.40	-	30.64	-	56.00	46.00	-25.36	-
4	2.270	0.26	27.75	-	28.01	-	56.00	46.00	-27.99	-
5	8.430	0.45	30.88	-	31.33	-	60.00	50.00	-28.67	-
6	10.273	0.49	35.45	-	35.94	-	60.00	50.00	-24.06	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

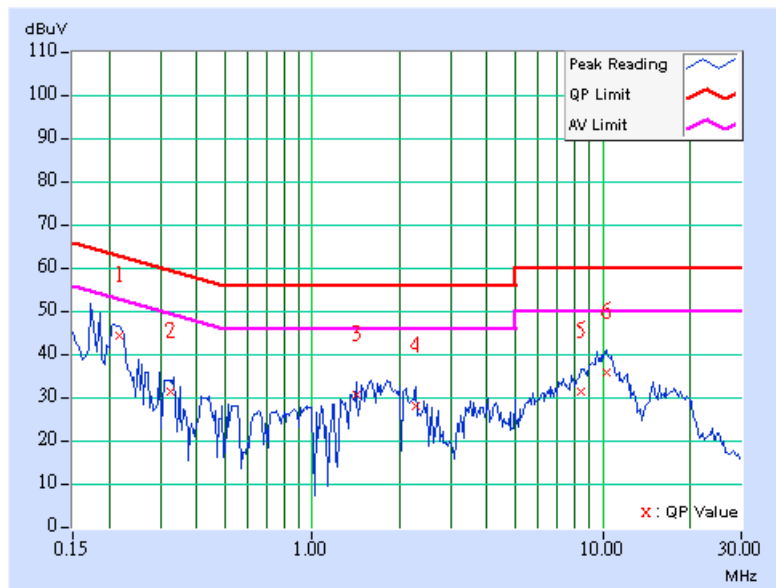




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	1
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.213	0.10	45.35	-	45.45	-	63.11
2	0.318	0.11	29.24	-	29.35	-	59.76	49.76	-30.41	-
3	1.629	0.26	32.31	-	32.57	-	56.00	46.00	-23.43	-
4	3.652	0.30	27.06	-	27.36	-	56.00	46.00	-28.64	-
5	10.305	0.54	35.31	-	35.85	-	60.00	50.00	-24.15	-
6	16.348	0.76	26.10	-	26.86	-	60.00	50.00	-33.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

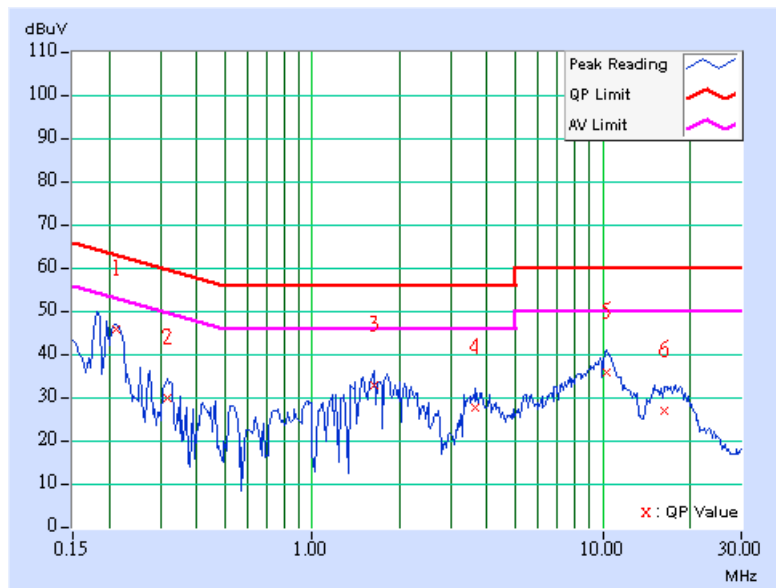




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	1
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.177	0.10	40.57	-	40.67	-	64.61
2	0.321	0.11	29.69	-	29.80	-	59.68	49.68	-29.88	-
3	1.457	0.24	29.70	-	29.94	-	56.00	46.00	-26.06	-
4	2.102	0.25	28.43	-	28.68	-	56.00	46.00	-27.32	-
5	6.852	0.41	26.89	-	27.30	-	60.00	50.00	-32.70	-
6	10.441	0.50	35.36	-	35.86	-	60.00	50.00	-24.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

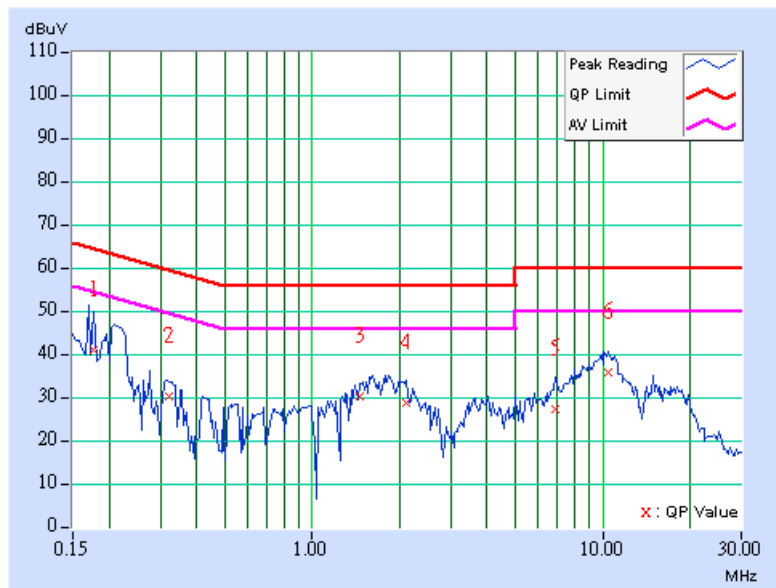




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	1
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.209	0.10	44.69	-	44.79	-	63.26
2	0.319	0.11	29.90	-	30.01	-	59.74	49.74	-29.74	-
3	1.465	0.25	30.66	-	30.91	-	56.00	46.00	-25.09	-
4	2.059	0.26	30.75	-	31.01	-	56.00	46.00	-24.99	-
5	10.109	0.53	35.28	-	35.81	-	60.00	50.00	-24.19	-
6	17.539	0.81	27.21	-	28.02	-	60.00	50.00	-31.98	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

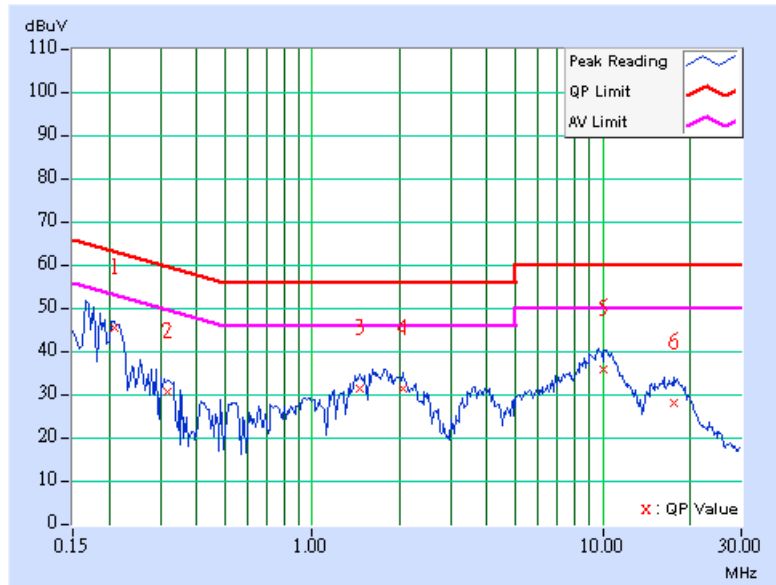




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	1
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.212	0.10	44.22	-	44.32	-	63.12
2	0.322	0.11	30.53	-	30.64	-	59.67	49.67	-29.03	-
3	1.629	0.25	32.10	-	32.35	-	56.00	46.00	-23.65	-
4	2.262	0.26	28.34	-	28.60	-	56.00	46.00	-27.40	-
5	7.223	0.43	28.30	-	28.73	-	60.00	50.00	-31.27	-
6	9.750	0.48	34.79	-	35.27	-	60.00	50.00	-24.73	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

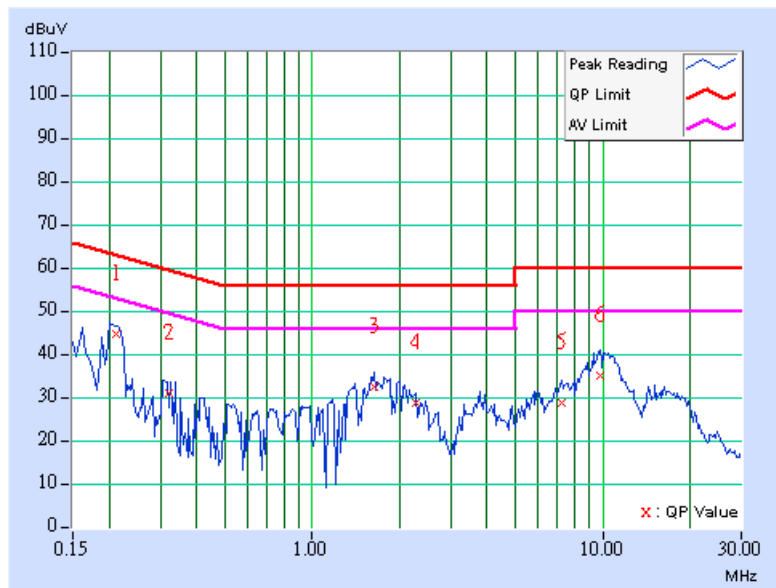




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	2
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	44.24	-	44.34	-	65.38	55.38	-21.03	-
2	0.224	0.10	43.69	-	43.79	-	62.69	52.69	-18.90	-
3	1.699	0.26	30.81	-	31.07	-	56.00	46.00	-24.93	-
4	2.152	0.26	28.85	-	29.11	-	56.00	46.00	-26.89	-
5	10.137	0.53	30.53	-	31.06	-	60.00	50.00	-28.94	-
6	18.168	0.84	22.48	-	23.32	-	60.00	50.00	-36.68	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

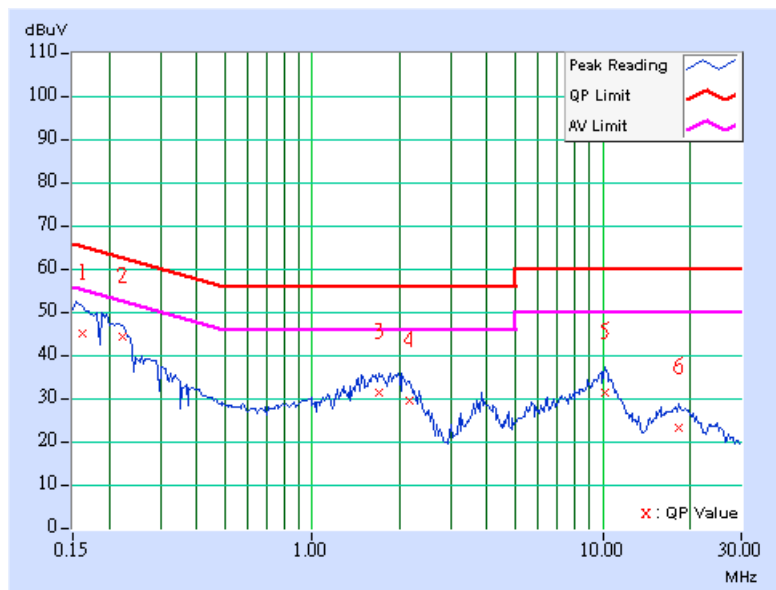




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	2
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.10	44.82	-	44.92	-	65.18
2	0.224	0.10	44.28	-	44.38	-	62.66	52.66	-18.28	-
3	1.695	0.25	31.81	-	32.06	-	56.00	46.00	-23.94	-
4	3.715	0.30	25.60	-	25.90	-	56.00	46.00	-30.10	-
5	10.027	0.49	30.30	-	30.79	-	60.00	50.00	-29.21	-
6	17.848	0.61	22.72	-	23.33	-	60.00	50.00	-36.67	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

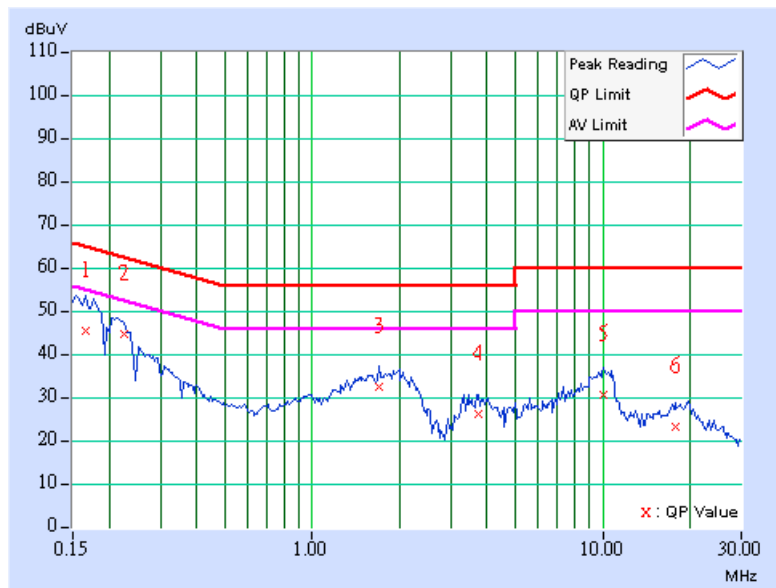




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	2
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.10	43.96	-	44.06	-	65.18
2	0.220	0.10	43.70	-	43.80	-	62.81	52.81	-19.01	-
3	1.348	0.25	28.48	-	28.73	-	56.00	46.00	-27.27	-
4	1.859	0.26	31.14	-	31.40	-	56.00	46.00	-24.60	-
5	7.645	0.46	25.06	-	25.52	-	60.00	50.00	-34.48	-
6	10.613	0.55	29.81	-	30.36	-	60.00	50.00	-29.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

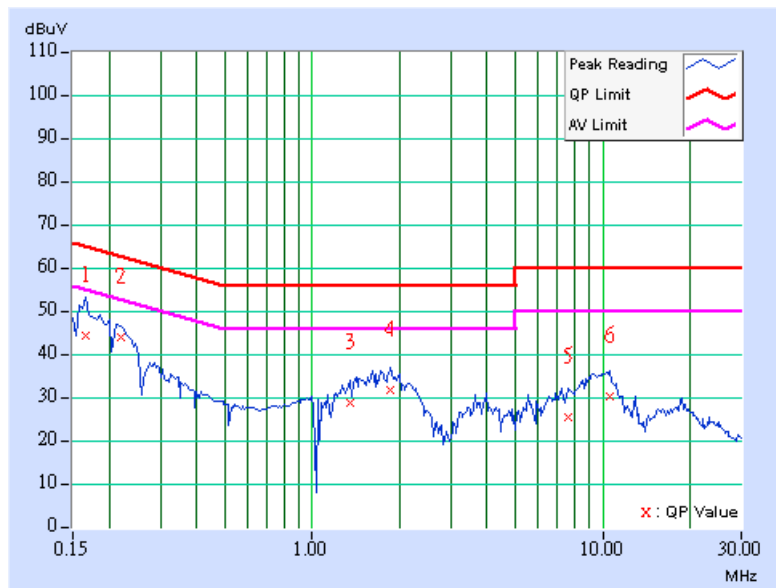




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	2
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.10	41.78	-	41.88	-	64.25
2	0.328	0.11	29.19	-	29.30	-	59.50	49.50	-30.20	-
3	1.180	0.24	28.41	-	28.65	-	56.00	46.00	-27.35	-
4	1.680	0.25	32.06	-	32.31	-	56.00	46.00	-23.69	-
5	7.250	0.43	25.13	-	25.56	-	60.00	50.00	-34.44	-
6	10.121	0.49	30.84	-	31.33	-	60.00	50.00	-28.67	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

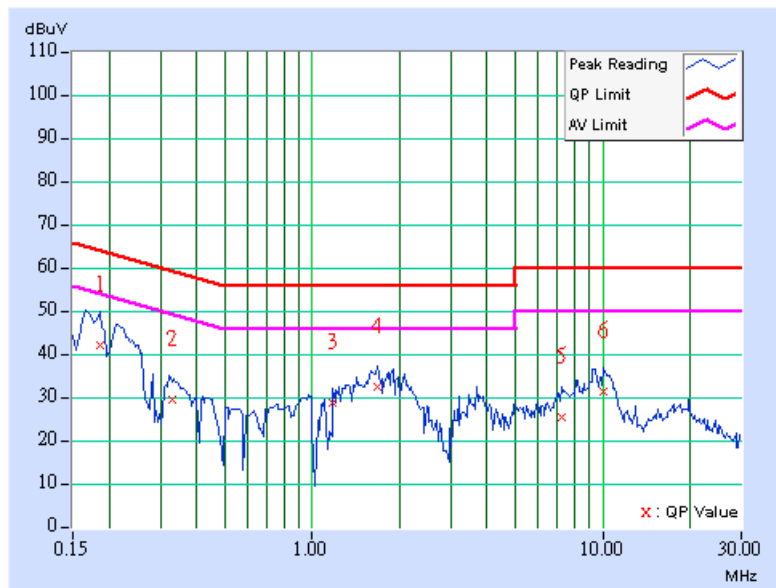




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	2
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.181	0.10	42.51	-	42.61	-	64.43
2	0.259	0.10	33.56	-	33.66	-	61.45	51.45	-27.79	-
3	1.258	0.25	26.12	-	26.37	-	56.00	46.00	-29.63	-
4	1.855	0.26	30.78	-	31.04	-	56.00	46.00	-24.96	-
5	7.395	0.45	24.61	-	25.06	-	60.00	50.00	-34.94	-
6	10.336	0.54	30.63	-	31.17	-	60.00	50.00	-28.83	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

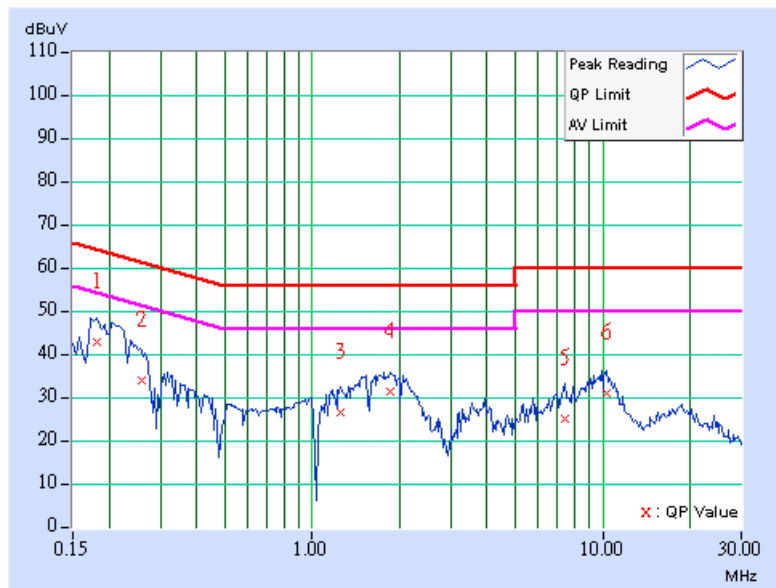




EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26 deg. C, 71% RH, 991 hPa	TEST MODE	2
TESTED BY	Kevin Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	38.84	-	38.94	-	63.56
2	0.324	0.11	30.10	-	30.21	-	59.59	49.59	-29.39	-
3	1.367	0.24	28.38	-	28.62	-	56.00	46.00	-27.38	-
4	1.891	0.25	31.77	-	32.02	-	56.00	46.00	-23.98	-
5	7.254	0.43	25.45	-	25.88	-	60.00	50.00	-34.12	-
6	10.031	0.49	30.64	-	31.13	-	60.00	50.00	-28.87	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

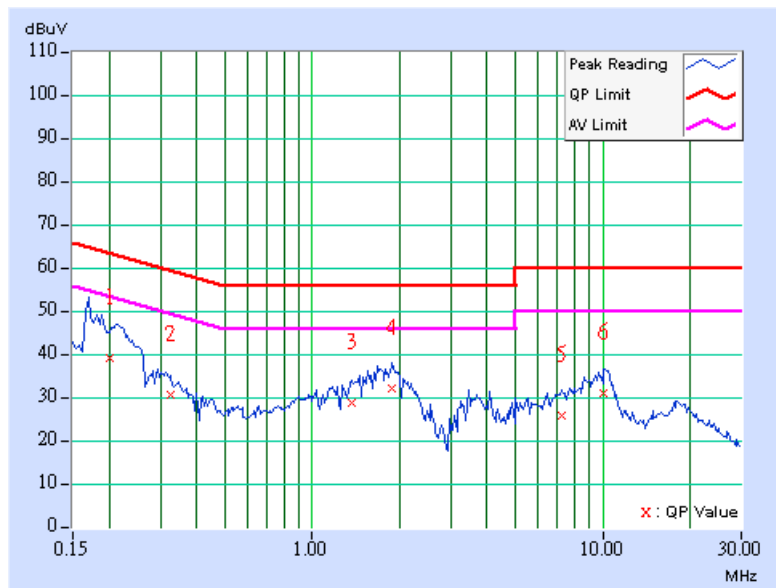



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun, 08, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Feb. 03, 2005
HORN Antenna SCHWARZBECK	9120D	9120D-408	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170243	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10633	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01964	Jan. 27, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Mar. 05, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Mar. 05, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

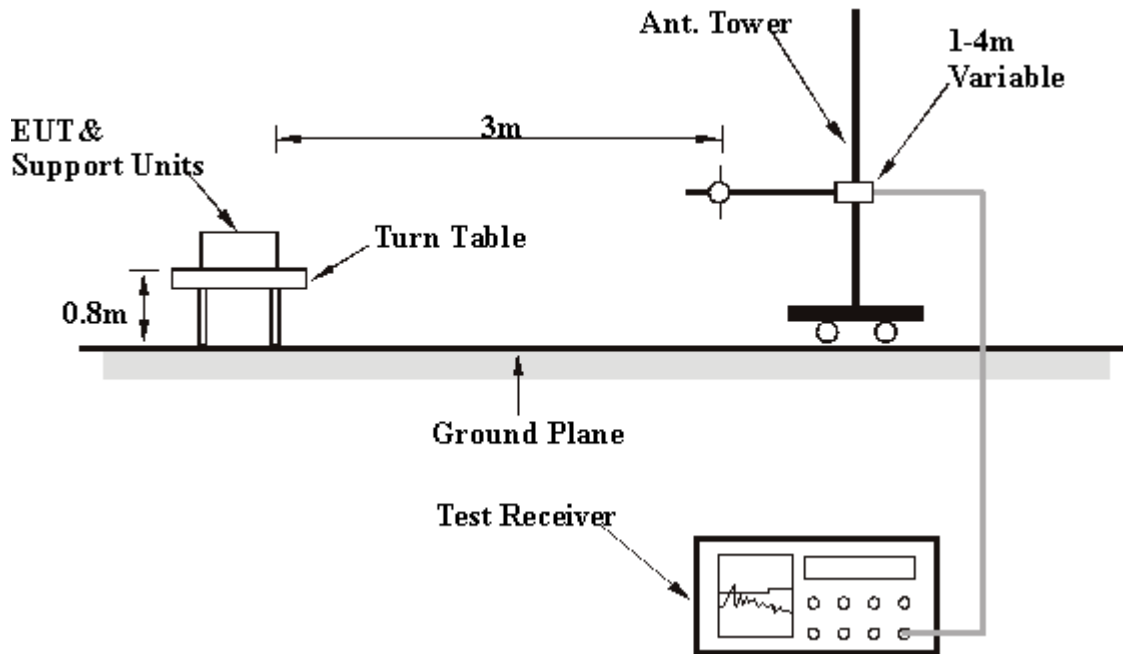

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TEST MODE	1
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	107.76	32.92 QP	43.50	-10.58	3.00 H	268	21.26	11.67
2	166.07	33.23 QP	43.50	-10.27	2.00 H	289	18.91	14.32
3	239.94	37.33 QP	46.00	-8.67	1.00 H	76	24.37	12.96
4	298.26	34.82 QP	46.00	-11.18	1.00 H	190	20.44	14.38
5	333.25	34.30 QP	46.00	-11.70	1.00 H	238	19.15	15.15
6	755.07	34.45 QP	46.00	-11.55	2.00 H	295	11.19	23.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	241.88	33.19 QP	46.00	-12.81	3.00 V	355	20.19	12.99
2	498.48	33.71 QP	46.00	-12.29	1.00 V	154	15.16	18.55
3	661.76	32.62 QP	46.00	-13.38	1.00 V	211	11.03	21.60
4	828.94	35.25 QP	46.00	-10.75	1.50 V	7	11.53	23.72
5	865.87	31.70 QP	46.00	-14.30	1.00 V	256	7.50	24.20
6	910.58	34.06 QP	46.00	-11.94	2.50 V	334	9.14	24.92

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TEST MODE	2
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.42	31.24 QP	43.50	-12.26	1.50 H	49	18.44	12.80
2	162.18	27.03 QP	43.50	-16.47	2.00 H	274	12.49	14.54
3	401.28	36.73 QP	46.00	-9.27	2.00 H	139	19.74	16.99
4	601.50	29.53 QP	46.00	-16.47	1.50 H	349	8.26	21.27
5	733.69	30.70 QP	46.00	-15.30	2.00 H	91	7.40	23.30
6	801.72	29.90 QP	46.00	-16.10	2.00 H	40	6.12	23.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.99	30.52 QP	40.00	-9.48	1.00 V	106	17.07	13.46
2	160.24	34.00 QP	43.50	-9.50	1.00 V	346	19.29	14.71
3	399.34	31.45 QP	46.00	-14.55	1.00 V	304	14.50	16.95
4	733.69	33.21 QP	46.00	-12.79	1.50 V	136	9.92	23.30
5	801.72	32.05 QP	46.00	-13.95	1.50 V	301	8.26	23.79
6	867.82	32.66 QP	46.00	-13.34	1.00 V	85	8.05	24.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.8 TEST RESULTS (A)

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	55.99 PK	74.00	-18.01	1.07 H	209	26.07	29.92
1	2016.00	49.01 AV	54.00	-4.99	1.07 H	209	19.09	29.92
2	2386.00	59.92 PK	74.00	-14.08	1.51 H	214	28.32	31.60
2	2386.00	52.15 AV	54.00	-1.85	1.51 H	214	20.55	31.60
3	*2412.00	113.32 PK			1.51 H	214	81.62	31.70
3	*2412.00	105.55 AV			1.51 H	214	73.85	31.70
4	2688.00	49.71 PK	74.00	-24.29	1.00 H	242	17.01	32.70
5	4824.00	56.48 PK	74.00	-17.52	1.12 H	17	18.90	37.58
5	4824.00	49.12 AV	54.00	-4.88	1.12 H	17	11.54	37.58
6	7236.00	57.12 PK	74.00	-16.88	1.17 H	4	12.99	44.14
6	7236.00	46.41 AV	54.00	-7.59	1.17 H	4	2.28	44.14
7	9648.00	62.48 PK	74.00	-11.52	1.12 H	284	14.11	48.37
7	9648.00	53.53 AV	54.00	-0.47	1.12 H	284	5.16	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	51.28 PK	74.00	-22.72	1.14 V	241	21.36	29.92
1	2016.00	44.69 AV	54.00	-9.31	1.14 V	241	14.77	29.92
2	2386.00	52.01 PK	74.00	-21.99	1.00 V	328	20.41	31.60
2	2386.00	44.70 AV	54.00	-9.30	1.00 V	328	13.10	31.60
3	*2412.00	105.41 PK			1.00 V	328	73.71	31.70
3	*2412.00	98.10 AV			1.00 V	328	66.40	31.70
4	2688.00	47.85 PK	74.00	-26.15	1.48 V	163	15.15	32.70
5	4824.00	56.59 PK	74.00	-17.41	1.12 V	354	19.01	37.58
5	4824.00	50.11 AV	54.00	-3.89	1.12 V	354	12.53	37.58
6	7326.00	57.99 PK	74.00	-16.01	1.30 V	47	13.61	44.38
6	7326.00	49.05 AV	54.00	-4.95	1.30 V	47	4.67	44.38
7	9648.00	63.15 PK	85.41	-22.26	1.26 V	48	14.78	48.37
7	9648.00	57.11 AV	78.10	-20.99	1.26 V	48	8.74	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	58.81 PK	74.00	-15.19	1.18 H	105	28.89	29.92
1	2016.00	50.71 AV	54.00	-3.29	1.18 H	105	20.79	29.92
2	*2437.00	113.06 PK			1.00 H	8	81.21	31.85
2	*2437.00	104.82 AV			1.00 H	8	72.97	31.85
3	2688.00	48.95 PK	74.00	-25.05	1.22 H	129	16.25	32.70
4	4874.00	56.40 PK	74.00	-17.60	1.23 H	45	18.74	37.66
4	4874.00	50.80 AV	54.00	-3.20	1.23 H	45	13.14	37.66
5	7311.00	59.93 PK	74.00	-14.07	1.25 H	0	15.61	44.33
5	7311.00	51.25 AV	54.00	-2.75	1.25 H	0	6.93	44.33
6	9748.00	63.41 PK	96.06	-32.65	1.08 H	41	14.97	48.44
6	9748.00	57.43 AV	87.82	-30.39	1.08 H	41	8.99	48.44
7	12185.00	59.59 PK	74.00	-14.41	1.12 H	105	9.92	49.67
7	12185.00	48.23 AV	54.00	-5.77	1.12 H	105	-1.44	49.67

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	53.89 PK	74.00	-20.11	1.00 V	10	23.97	29.92
1	2016.00	51.66 AV	54.00	-2.34	1.00 V	10	21.74	29.92
2	*2437.00	105.93 PK			1.25 V	0	74.08	31.85
2	*2437.00	98.34 AV			1.25 V	0	66.49	31.85
3	2688.00	45.68 PK	74.00	-28.32	1.00 V	216	12.98	32.70
4	4874.00	58.01 PK	74.00	-15.99	1.20 V	348	20.35	37.66
4	4874.00	51.92 AV	54.00	-2.08	1.20 V	348	14.26	37.66
5	7311.00	59.07 PK	74.00	-14.93	1.06 V	34	14.75	44.33
5	7311.00	50.12 AV	54.00	-3.88	1.06 V	34	5.80	44.33
6	9748.00	64.49 PK	88.93	-24.44	1.00 V	33	16.05	48.44
6	9748.00	60.84 AV	81.34	-20.50	1.00 V	33	12.40	48.44
7	12185.00	60.44 PK	74.00	-13.56	1.54 V	212	10.77	49.67
7	12185.00	48.47 AV	54.00	-5.53	1.54 V	212	-1.20	49.67

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	55.40 PK	74.00	-18.60	1.03 H	124	25.48	29.92
1	2016.00	47.64 AV	54.00	-6.36	1.03 H	124	17.72	29.92
2	*2462.00	114.65 PK			1.45 H	127	82.65	32.00
2	*2462.00	106.33 AV			1.45 H	127	74.33	32.00
3	2488.60	60.18 PK	74.00	-13.82	1.45 H	127	28.02	32.16
3	2488.60	51.86 AV	54.00	-2.14	1.45 H	127	19.70	32.16
4	2688.00	48.42 PK	74.00	-25.58	1.62 H	6	15.72	32.70
5	4924.00	54.40 PK	74.00	-19.60	1.20 H	129	16.66	37.74
5	4924.00	46.33 AV	54.00	-7.67	1.20 H	129	8.59	37.74
6	7386.00	58.21 PK	74.00	-15.79	1.14 H	323	13.64	44.57
6	7386.00	48.76 AV	54.00	-5.24	1.14 H	323	4.19	44.57
7	9848.00	61.78 PK	94.65	-32.87	1.09 H	323	13.12	48.66
7	9848.00	55.00 AV	86.33	-31.33	1.09 H	323	6.34	48.66

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	50.23 PK	74.00	-23.77	1.00 V	20	20.31	29.92
1	2016.00	43.28 AV	54.00	-10.72	1.00 V	20	13.36	29.92
2	*2462.00	106.68 PK			1.00 V	0	74.68	32.00
2	*2462.00	98.96 AV			1.00 V	0	66.96	32.00
3	2488.60	52.21 PK	74.00	-21.79	1.00 V	0	20.05	32.16
3	2488.60	44.49 AV	54.00	-9.51	1.00 V	0	12.33	32.16
4	2688.00	43.98 PK	74.00	-30.02	1.21 V	41	11.28	32.70
5	4924.00	58.37 PK	74.00	-15.63	1.20 V	327	20.63	37.74
5	4924.00	51.43 AV	54.00	-2.57	1.20 V	327	13.69	37.74
6	7386.00	57.88 PK	74.00	-16.12	1.18 V	0	13.31	44.57
6	7386.00	44.70 AV	54.00	-9.30	1.18 V	0	0.13	44.57
7	9848.00	64.84 PK	86.68	-21.84	1.25 V	332	16.18	48.66
7	9848.00	59.76 AV	78.96	-19.20	1.25 V	332	11.10	48.66

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



4.2.9 TEST RESULTS (B)

Normal Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	59.31 PK	74.00	-14.69	1.14 H	248	29.39	29.92
1	2016.00	51.78 AV	54.00	-2.22	1.14 H	248	21.86	29.92
2	2390.00	63.00 PK	74.00	-11.00	1.02 H	13	31.39	31.61
2	2390.00	52.47 AV	54.00	-1.53	1.02 H	13	20.86	31.61
3	*2412.00	109.14 PK			1.02 H	13	77.44	31.70
3	*2412.00	98.61 AV			1.02 H	13	66.91	31.70
4	2688.00	48.37 PK	74.00	-25.63	1.42 H	227	15.67	32.70
5	4824.00	52.17 PK	74.00	-21.83	1.24 H	228	14.59	37.58
5	4824.00	41.62 AV	54.00	-12.38	1.24 H	228	4.04	37.58
6	7236.00	59.47 PK	74.00	-14.53	1.18 H	192	15.33	44.14
6	7236.00	47.62 AV	54.00	-6.38	1.18 H	192	3.48	44.14
7	9648.00	58.91 PK	74.00	-15.09	1.42 H	321	10.54	48.37
7	9648.00	48.69 AV	54.00	-5.31	1.42 H	321	0.32	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	57.31 PK	74.00	-16.69	1.26 V	335	27.39	29.92
1	2016.00	50.10 AV	54.00	-3.90	1.26 V	335	20.18	29.92
2	2390.00	59.77 PK	74.00	-14.23	1.42 V	339	28.16	31.61
2	2390.00	49.44 AV	54.00	-4.56	1.42 V	339	17.83	31.61
3	*2412.00	105.91 PK			1.42 V	339	74.21	31.70
3	*2412.00	95.58 AV			1.42 V	339	63.88	31.70
4	2688.00	47.31 PK	74.00	-26.69	1.42 V	339	14.61	32.70
5	4824.00	54.62 PK	74.00	-19.38	1.18 V	112	17.04	37.58
5	4824.00	43.17 AV	54.00	-10.83	1.18 V	112	5.59	37.58
6	7236.00	60.46 PK	74.00	-13.54	1.07 V	34	16.32	44.14
6	7236.00	49.06 AV	54.00	-4.94	1.07 V	34	4.92	44.14
7	9648.00	61.92 PK	85.91	-23.99	1.28 V	228	13.55	48.37
7	9648.00	54.77 AV	75.58	-20.81	1.28 V	228	6.40	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	57.64 PK	74.00	-16.36	1.00 H	358	27.72	29.92
1	2016.00	48.32 AV	54.00	-5.68	1.00 H	358	18.40	29.92
2	*2437.00	110.67 PK			1.44 H	197	78.82	31.85
2	*2437.00	100.10 AV			1.44 H	197	68.25	31.85
3	2688.00	48.35 PK	74.00	-25.65	1.61 H	1	15.65	32.70
4	4874.00	55.51 PK	74.00	-18.49	1.13 H	49	17.85	37.66
4	4874.00	43.04 AV	54.00	-10.96	1.13 H	49	5.38	37.66
5	7311.00	62.05 PK	74.00	-11.95	1.00 H	358	17.73	44.33
5	7311.00	49.93 AV	54.00	-4.07	1.00 H	358	5.61	44.33
6	9748.00	64.17 PK	95.67	-31.50	1.12 H	20	15.73	48.44
6	9748.00	58.62 AV	85.10	-26.48	1.12 H	20	10.18	48.44

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	55.32 PK	74.00	-18.68	1.42 V	339	25.40	29.92
1	2016.00	47.16 AV	54.00	-6.84	1.42 V	339	17.24	29.92
2	*2437.00	105.80 PK			1.04 V	85	73.95	31.85
2	*2437.00	95.39 AV			1.04 V	85	63.54	31.85
3	2688.00	47.18 PK	74.00	-26.82	1.21 V	40	14.48	32.70
4	4874.00	56.38 PK	74.00	-17.62	1.40 V	18	18.72	37.66
4	4874.00	44.29 AV	54.00	-9.71	1.40 V	18	6.63	37.66
5	7311.00	63.35 PK	74.00	-10.65	1.07 V	37	19.03	44.33
5	7311.00	51.90 AV	54.00	-2.10	1.07 V	37	7.58	44.33
6	9748.00	65.71 PK	89.30	-24.20	1.18 V	318	17.27	48.44
6	9748.00	59.79 AV	79.39	-19.60	1.18 V	318	11.35	48.44

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	58.49 PK	74.00	-15.51	1.18 H	223	28.57	29.92
1	2016.00	50.99 AV	54.00	-3.01	1.18 H	223	21.07	29.92
2	2462.00	109.46 PK			1.00 H	12	77.46	32.00
2	2462.00	98.82 AV			1.00 H	12	66.82	32.00
3	2483.50	62.92 PK	74.00	-11.08	1.00 H	12	30.79	32.13
3	2483.50	52.28 AV	54.00	-1.72	1.00 H	12	20.15	32.13
4	2688.00	47.92 PK	74.00	-26.08	1.25 H	293	15.22	32.70
5	4924.00	51.92 PK	74.00	-22.08	1.15 H	212	14.18	37.74
5	4924.00	41.28 AV	54.00	-12.72	1.15 H	212	3.54	37.74
6	7386.00	58.28 PK	74.00	-15.72	1.36 H	281	13.71	44.57
6	7386.00	48.31 AV	54.00	-5.69	1.36 H	281	3.74	44.57
7	9648.00	57.91 PK	74.00	-16.09	1.24 H	228	9.54	48.37
7	9648.00	47.88 AV	54.00	-6.12	1.24 H	228	-0.49	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	57.62 PK	74.00	-16.38	1.31 V	13	27.70	29.92
1	2016.00	48.71 AV	54.00	-5.29	1.31 V	13	18.79	29.92
2	2462.00	106.74 PK			1.84 V	159	74.74	32.00
2	2462.00	97.68 AV			1.84 V	159	65.68	32.00
3	2483.50	60.20 PK	74.00	-13.80	1.84 V	159	28.07	32.13
3	2483.50	51.14 AV	54.00	-2.86	1.84 V	159	19.01	32.13
4	2688.00	45.98 PK	74.00	-28.02	1.13 V	223	13.28	32.70
5	4874.00	54.18 PK	74.00	-19.82	1.51 V	218	16.52	37.66
5	4874.00	42.31 AV	54.00	-11.69	1.51 V	218	4.65	37.66
6	7386.00	60.28 PK	74.00	-13.72	1.61 V	300	15.71	44.57
6	7386.00	50.18 AV	54.00	-3.82	1.61 V	300	5.61	44.57
7	9648.00	61.38 PK	86.74	-25.36	1.22 V	342	13.01	48.37
7	9648.00	54.18 AV	77.68	-23.50	1.22 V	342	5.81	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



Turbo Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	53.52 PK	74.00	-20.48	1.24 H	333	23.60	29.92
1	2016.00	51.44 AV	54.00	-2.56	1.24 H	333	21.52	29.92
2	2390.00	64.01 PK	74.00	-9.99	1.24 H	321	32.40	31.61
2	2390.00	52.80 AV	54.00	-1.20	1.24 H	321	21.19	31.61
3	*2437.00	109.54 PK			1.24 H	321	77.69	31.85
3	*2437.00	98.33 AV			1.24 H	321	66.48	31.85
4	2483.50	63.23 PK	74.00	-10.77	1.24 H	321	31.10	32.13
4	2483.50	52.02 AV	54.00	-1.98	1.24 H	321	19.89	32.13
5	2688.00	46.97 PK	74.00	-27.03	1.12 H	310	14.27	32.70
6	4874.00	51.59 PK	74.00	-22.41	1.61 H	190	13.93	37.66
6	4874.00	39.06 AV	54.00	-14.94	1.61 H	190	1.40	37.66
7	7311.00	57.53 PK	74.00	-16.47	1.30 H	294	13.21	44.33
7	7311.00	43.94 AV	54.00	-10.06	1.30 H	294	-0.38	44.33

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	54.33 PK	74.00	-19.67	1.25 V	269	24.41	29.92
1	2016.00	52.91 AV	54.00	-1.09	1.25 V	269	22.99	29.92
2	2390.00	59.86 PK	74.00	-14.14	1.15 V	184	28.25	31.61
2	2390.00	50.22 AV	54.00	-3.78	1.15 V	184	18.61	31.61
3	*2437.00	105.39 PK			1.15 V	184	73.54	31.85
3	*2437.00	95.75 AV			1.15 V	184	63.90	31.85
4	2483.50	59.08 PK	74.00	-14.92	1.15 V	184	26.95	32.13
4	2483.50	49.44 AV	54.00	-4.56	1.15 V	184	17.31	32.13
5	2688.00	44.22 PK	74.00	-29.78	1.23 V	224	11.52	32.70
6	4874.00	53.88 PK	74.00	-20.12	1.09 V	352	16.22	37.66
6	4874.00	40.85 AV	54.00	-13.15	1.09 V	352	3.19	37.66
7	7311.00	57.62 PK	74.00	-16.38	1.75 V	193	13.30	44.33
7	7311.00	44.09 AV	54.00	-9.91	1.75 V	193	-0.23	44.33

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS (A)

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.98	0.5	PASS
6	2437	12.26	0.5	PASS
11	2462	12.42	0.5	PASS




CH1

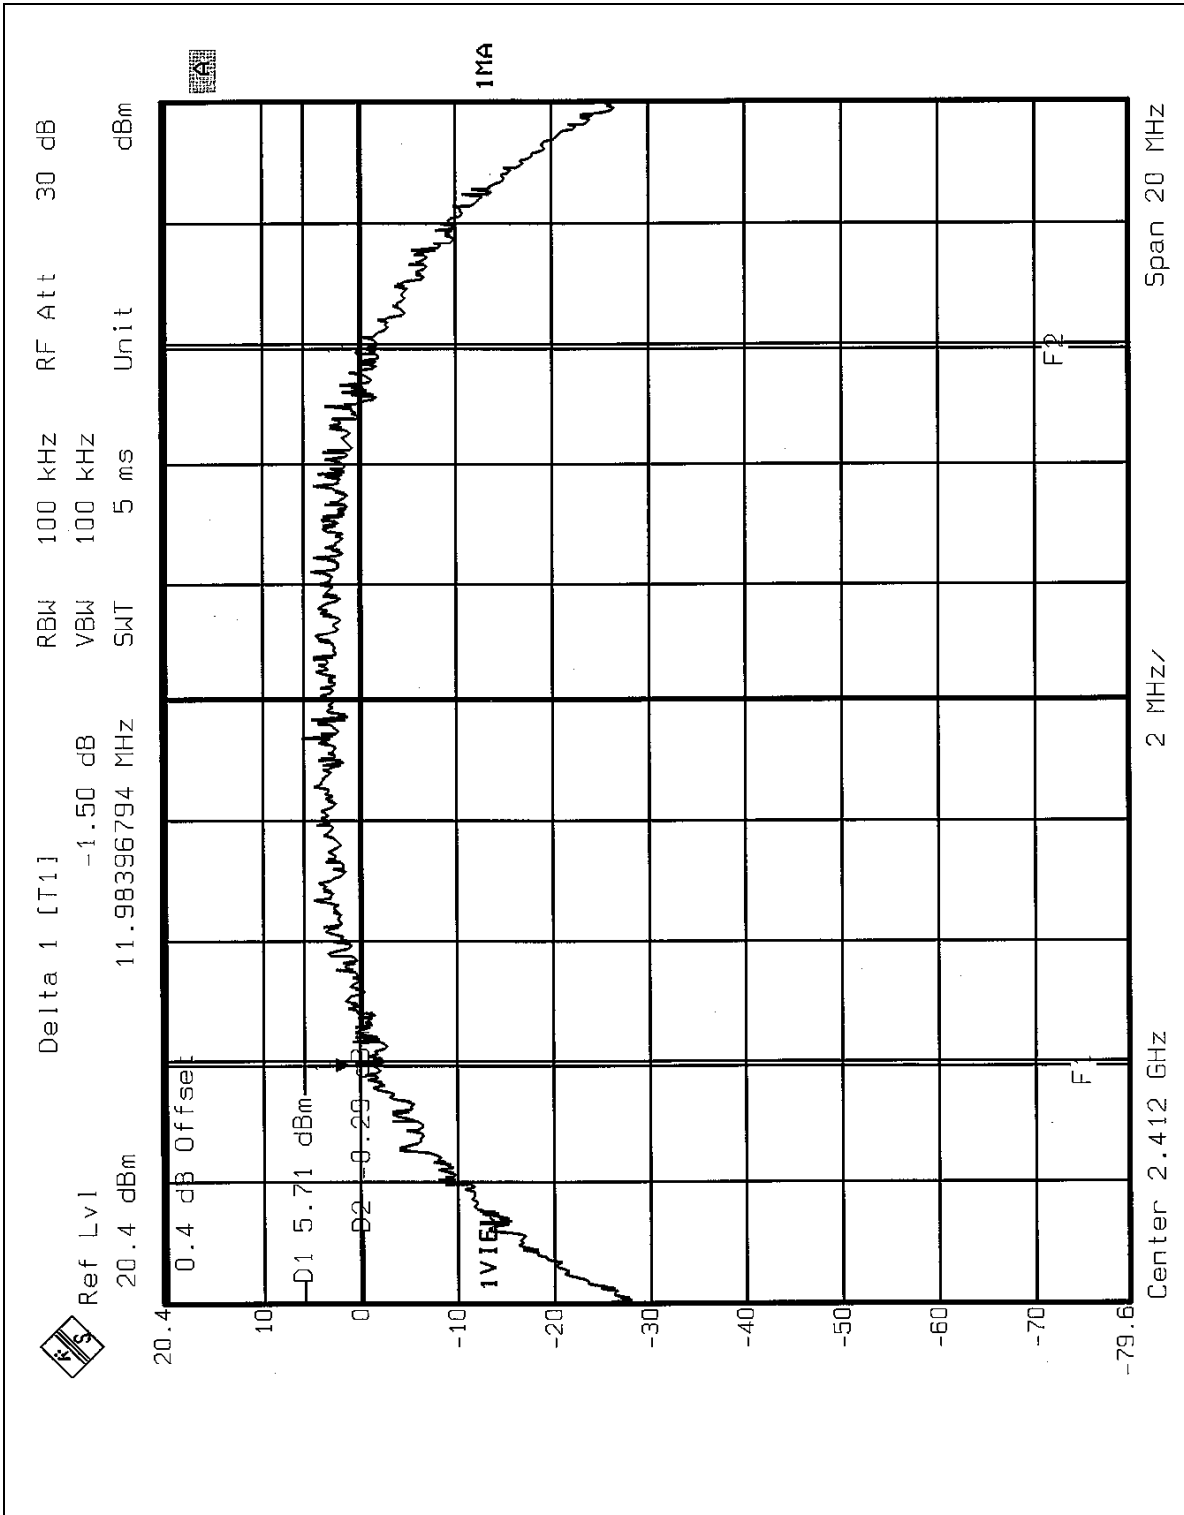




CH6

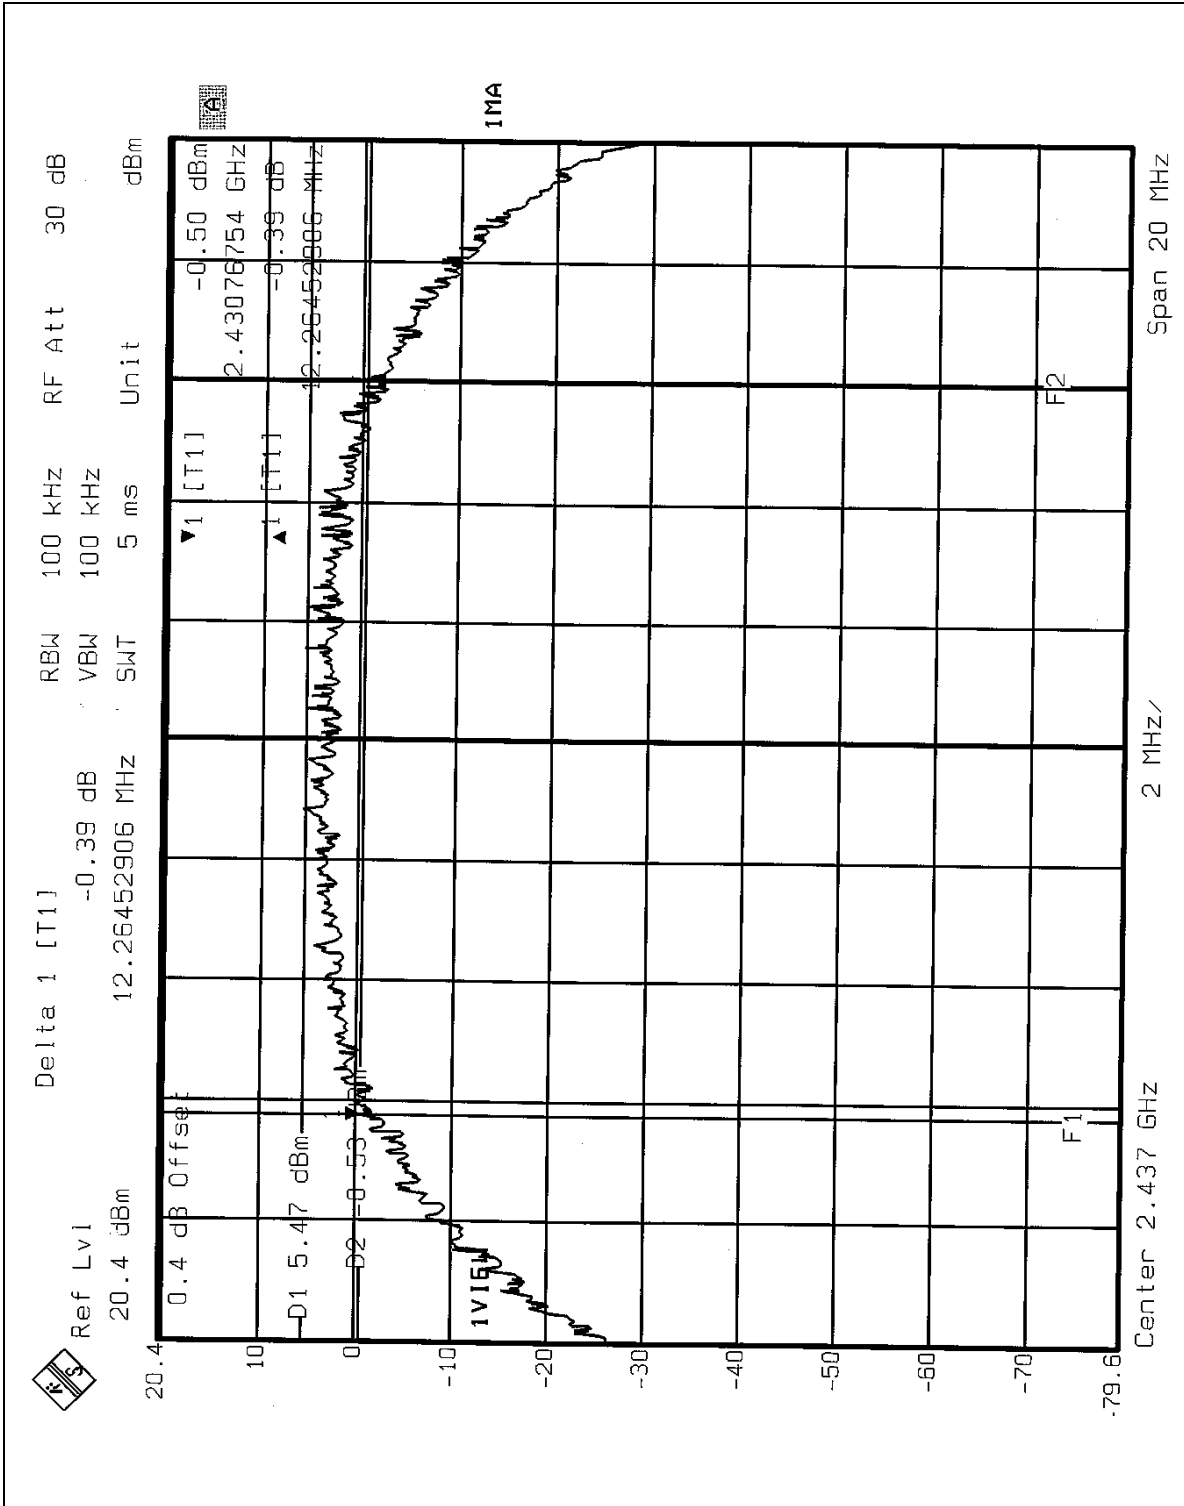



CH11

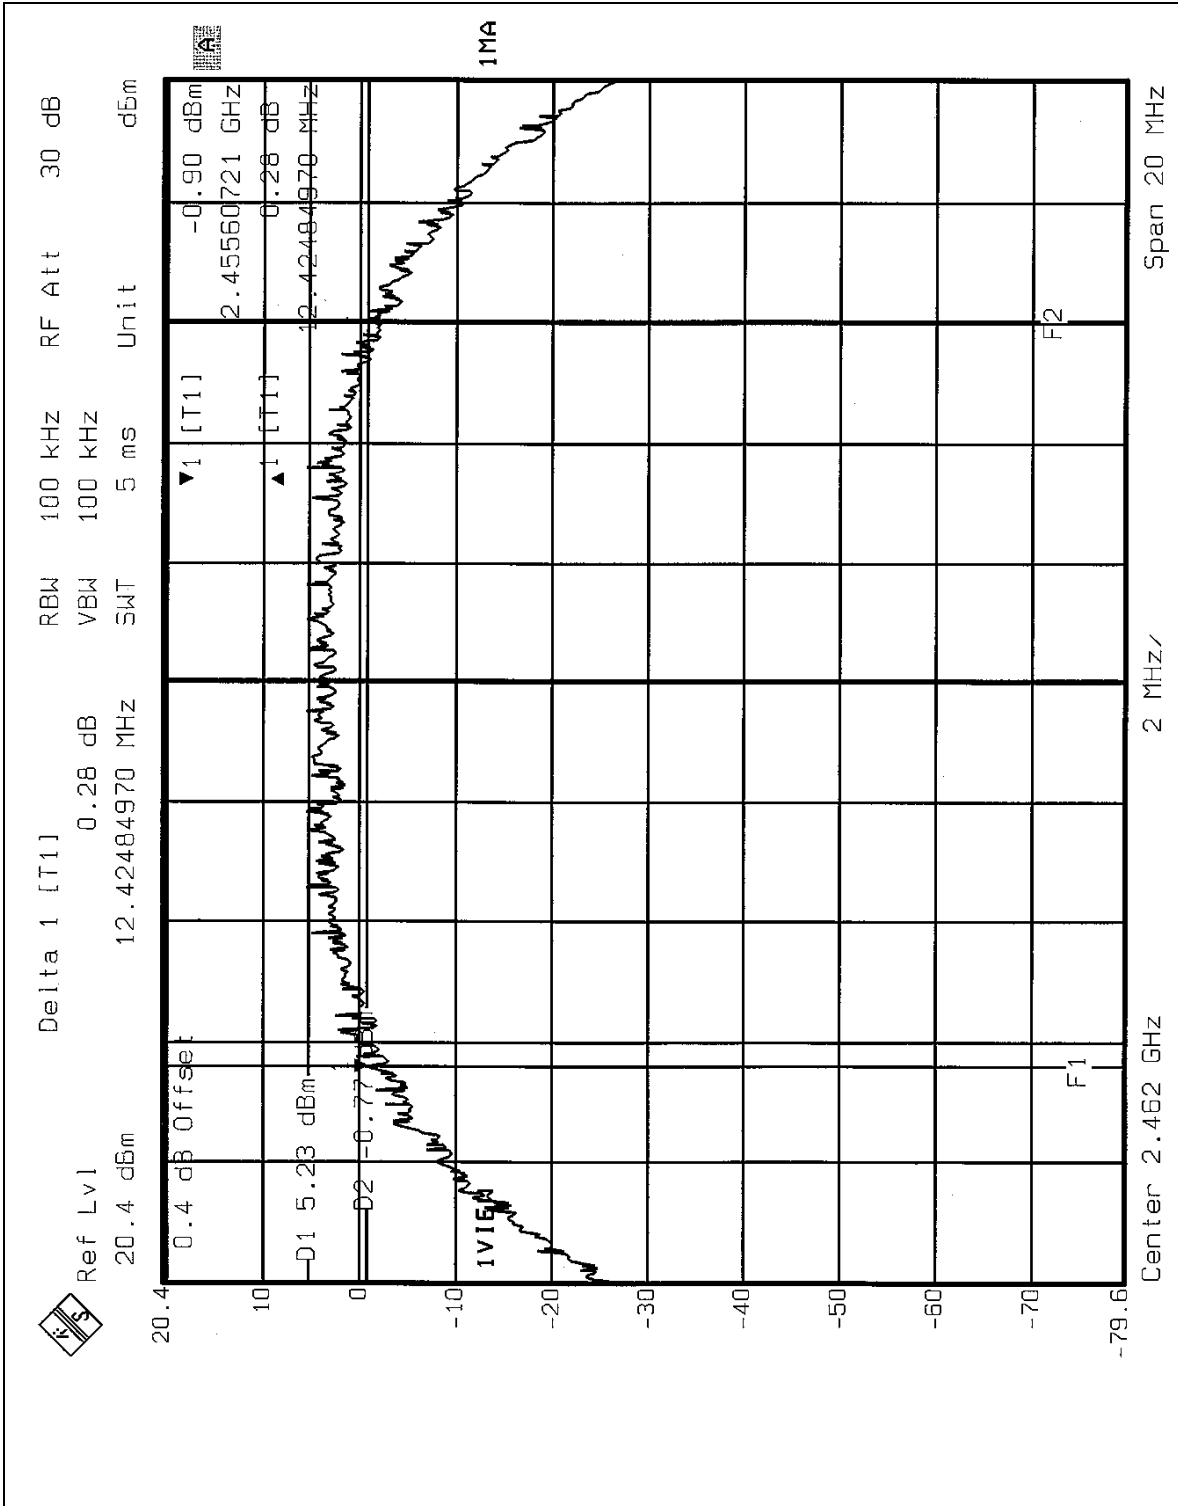



4.3.8 TEST RESULTS (B)


Normal Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.43	0.5	PASS
6	2437	16.47	0.5	PASS
11	2462	16.47	0.5	PASS




CH1

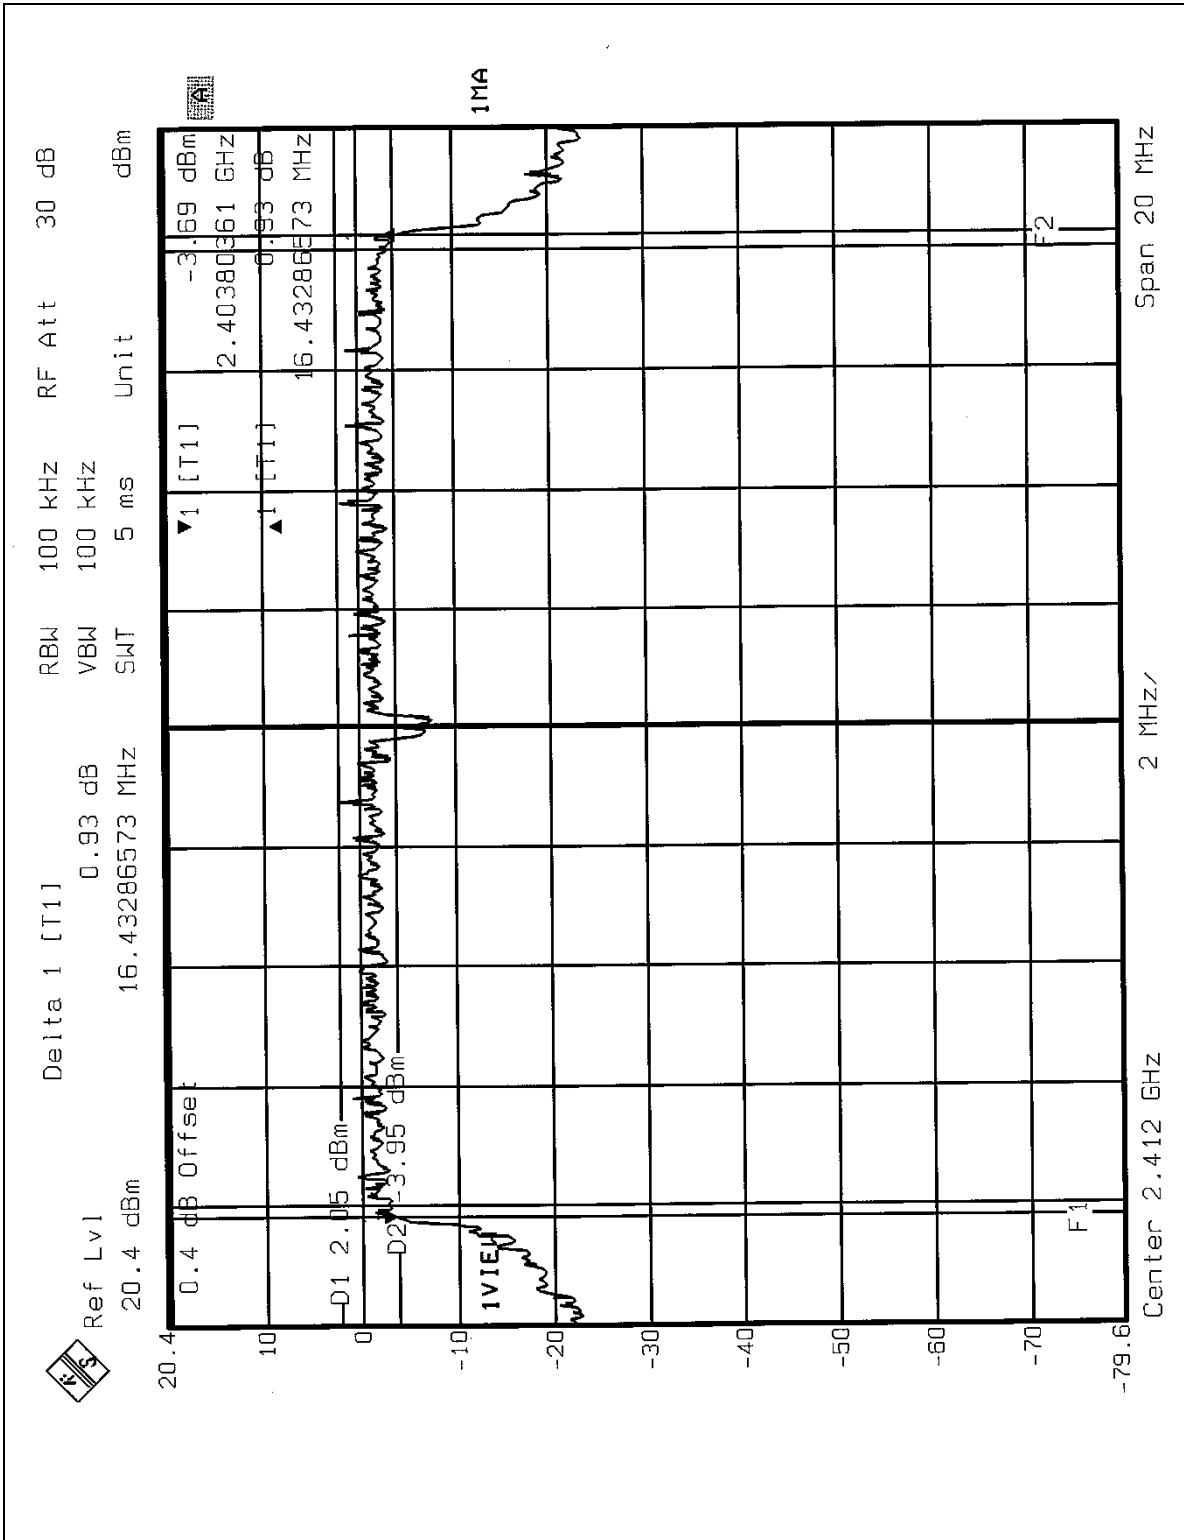




CH6

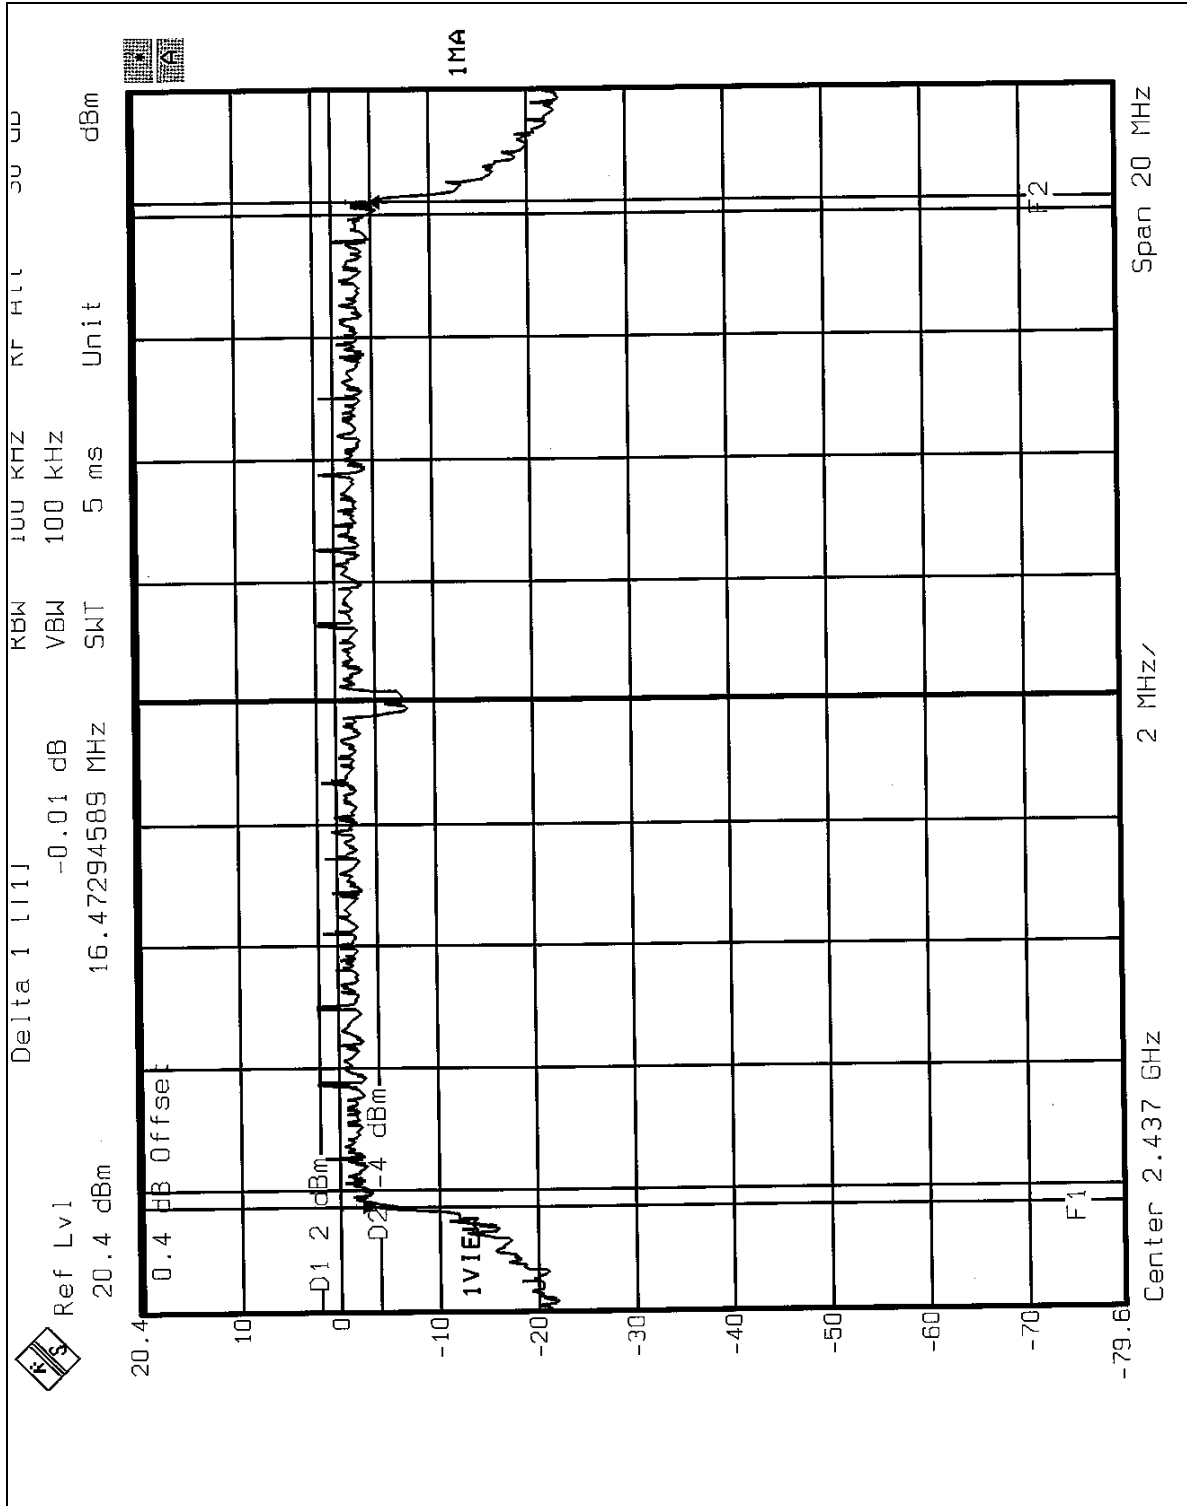



CH11

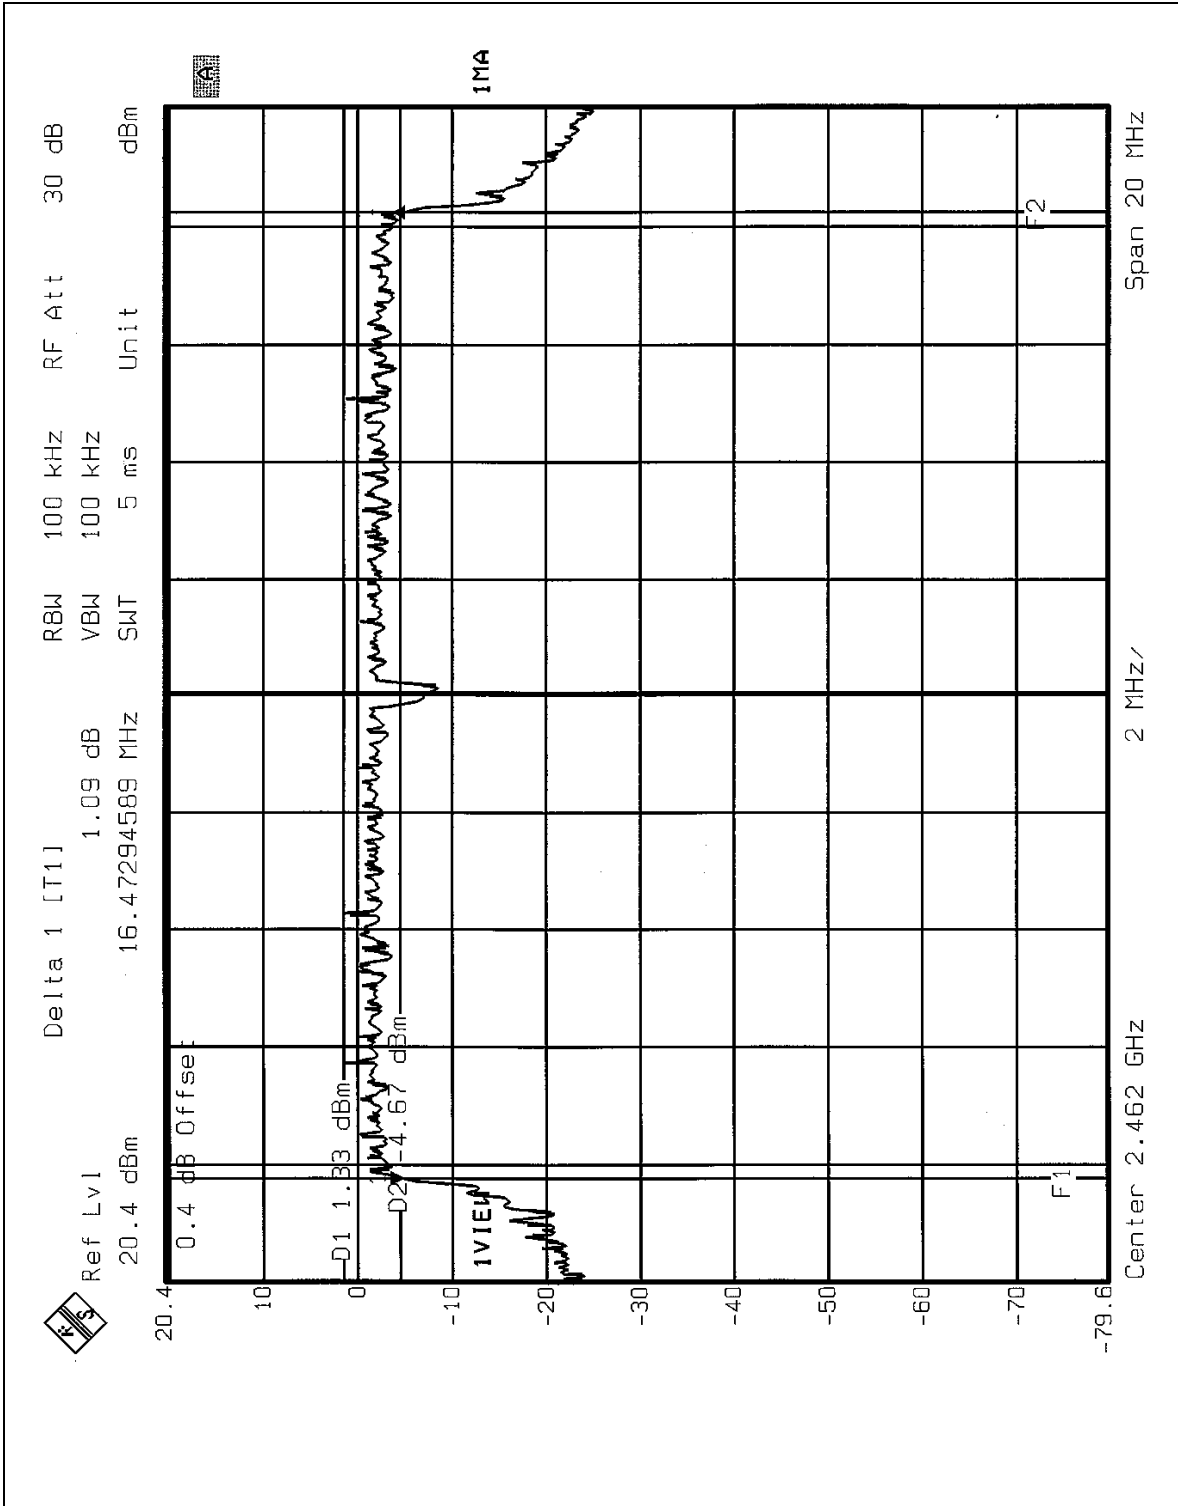




Turbo Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	32.65	0.5	PASS



CH6

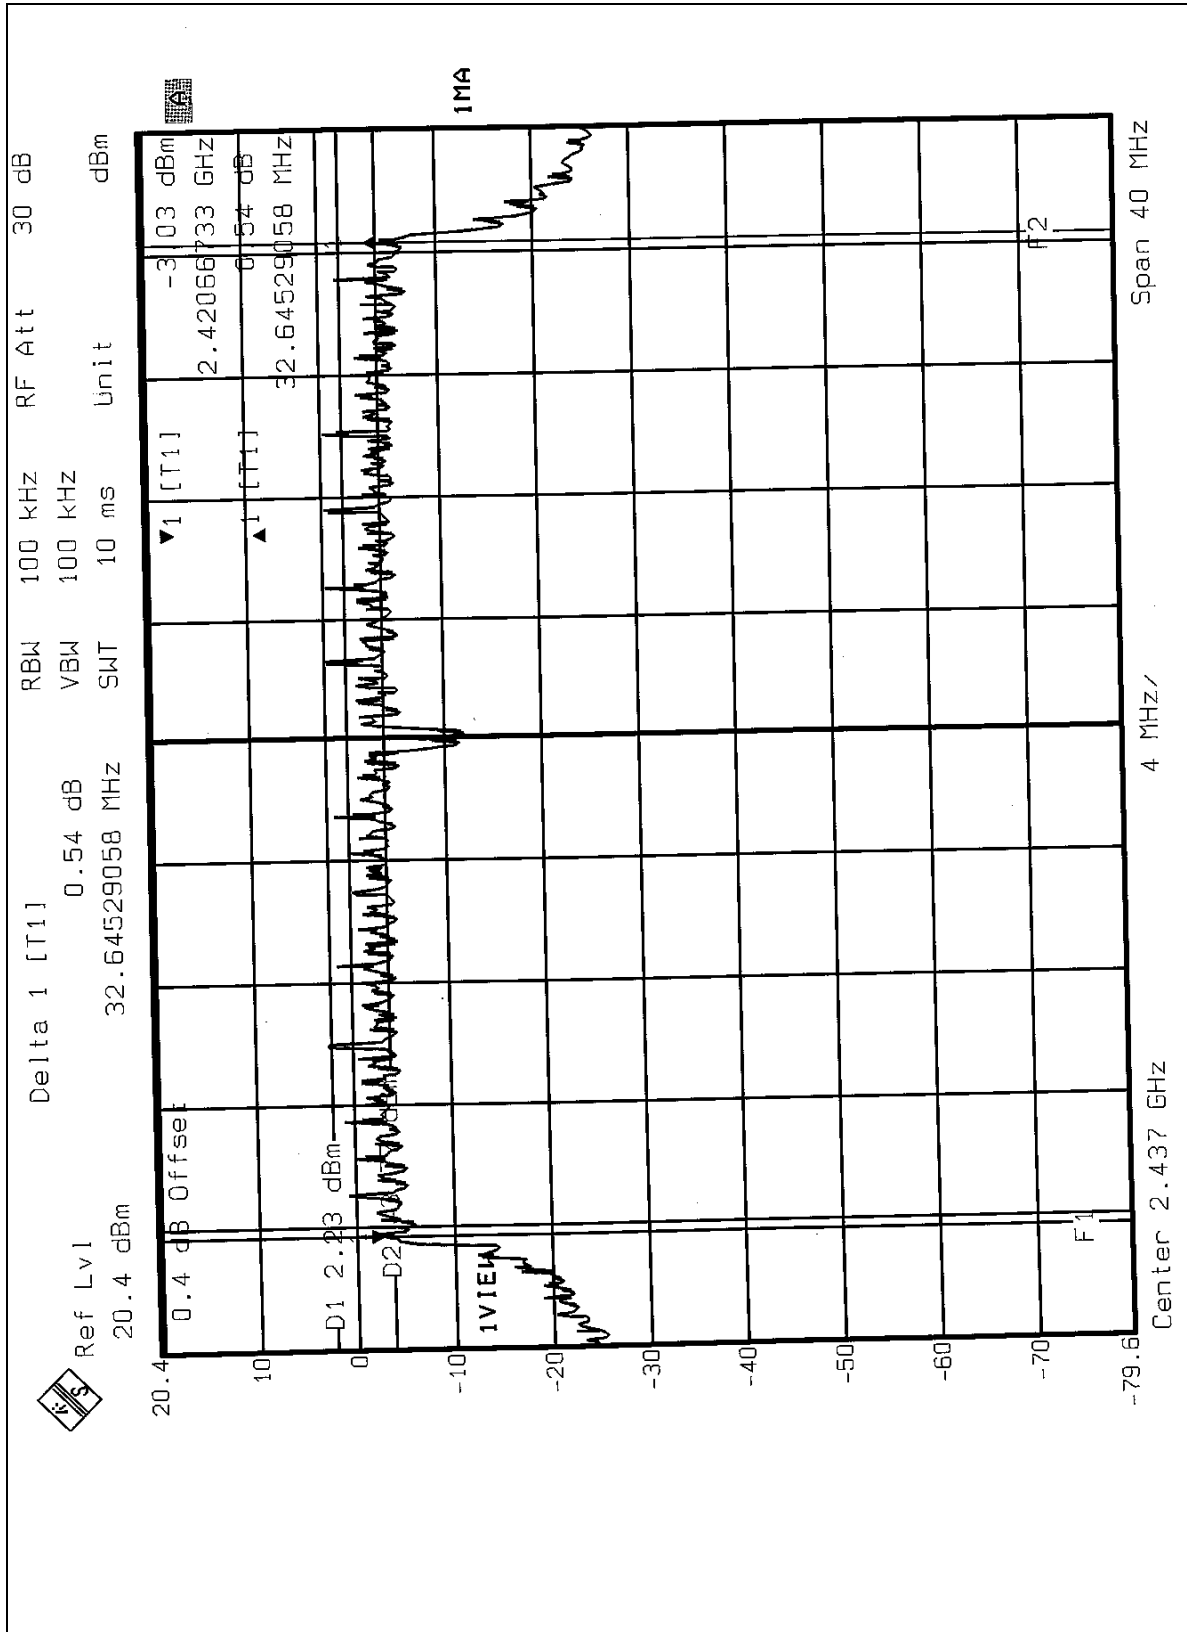



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS (A)

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.01	30	PASS
6	2437	17.01	30	PASS
11	2462	17.02	30	PASS



4.4.8 TEST RESULTS (B)

Normal Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.02	30	PASS
6	2437	17.02	30	PASS
11	2462	17.01	30	PASS

Turbo Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	17.00	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS (A)

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.31	8	PASS
6	2437	-7.30	8	PASS
11	2462	-8.59	8	PASS




CH1

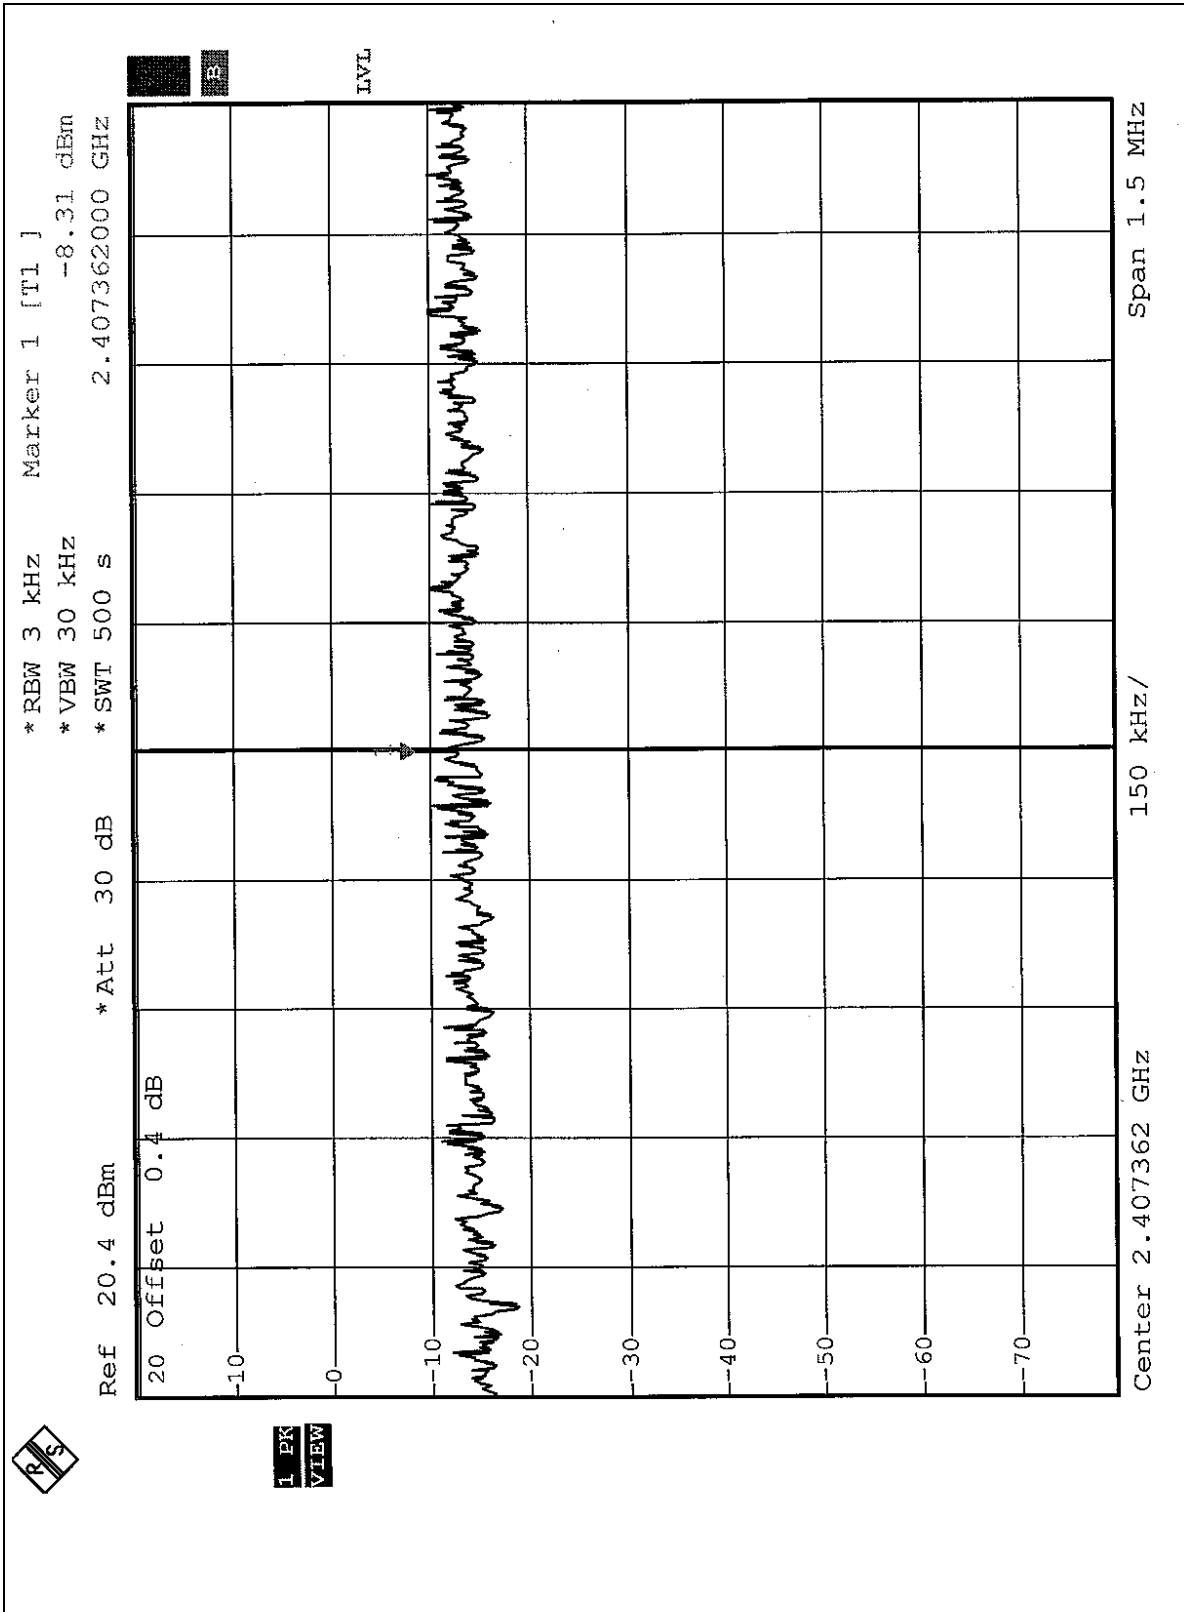




CH6

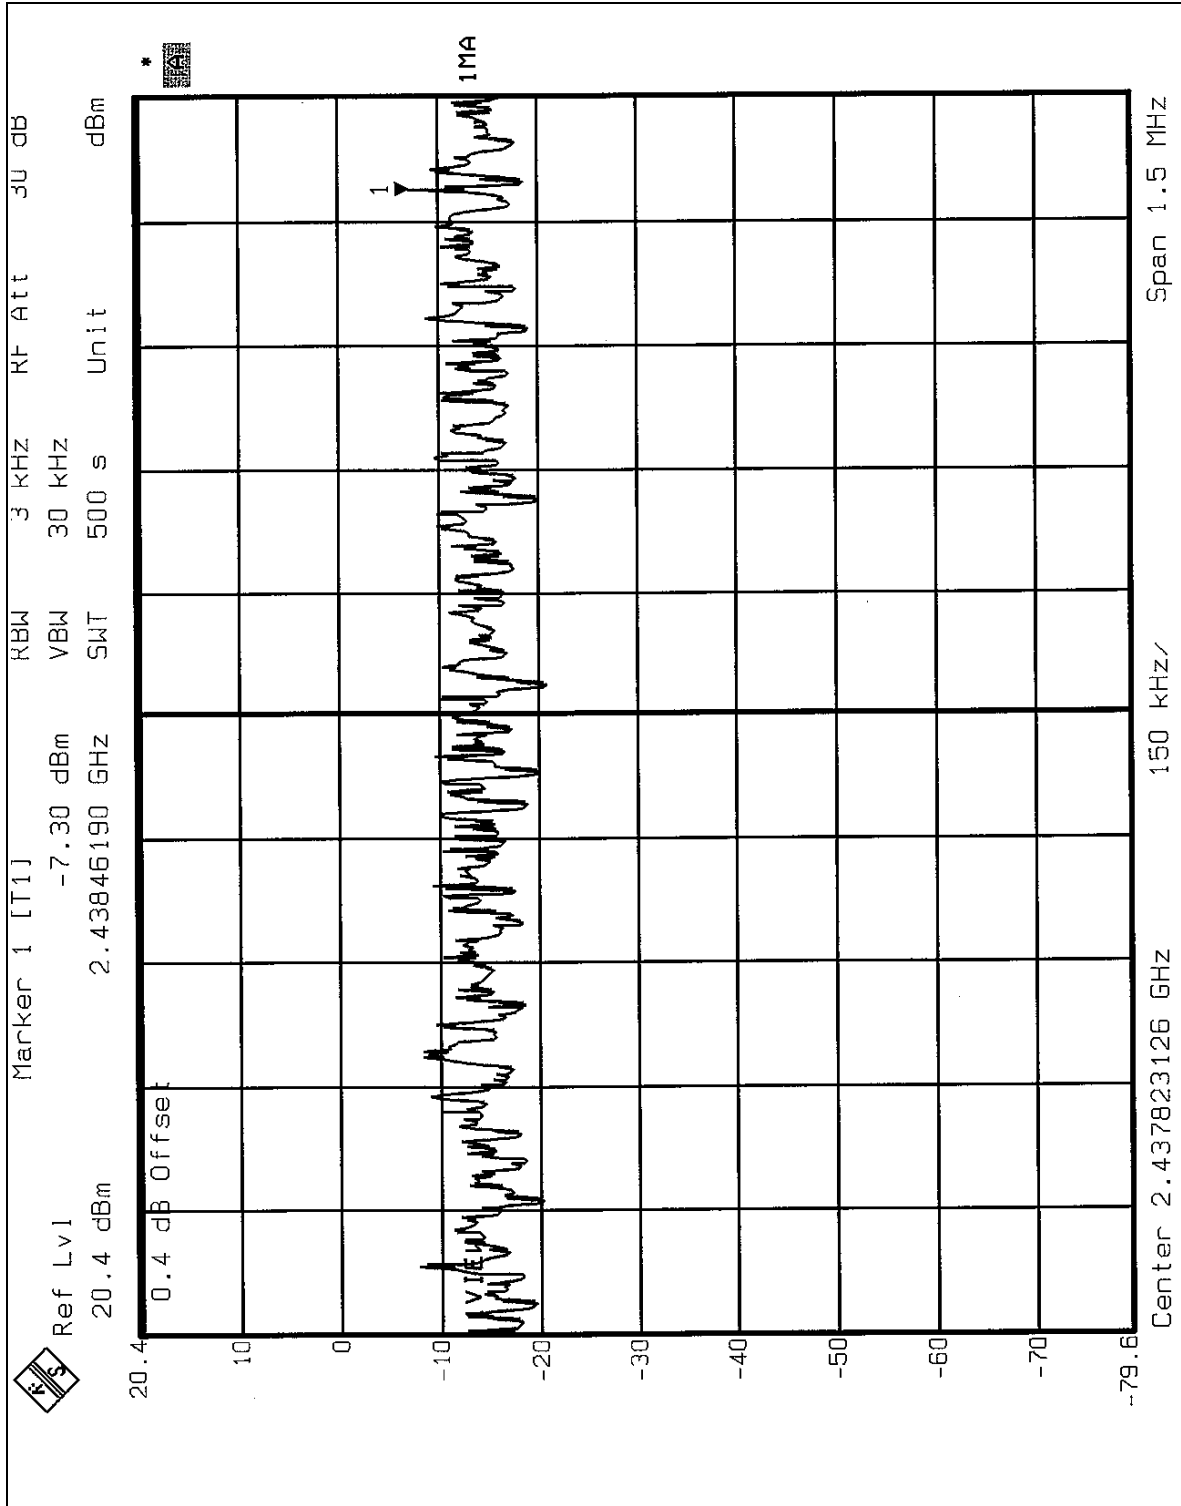



CH11

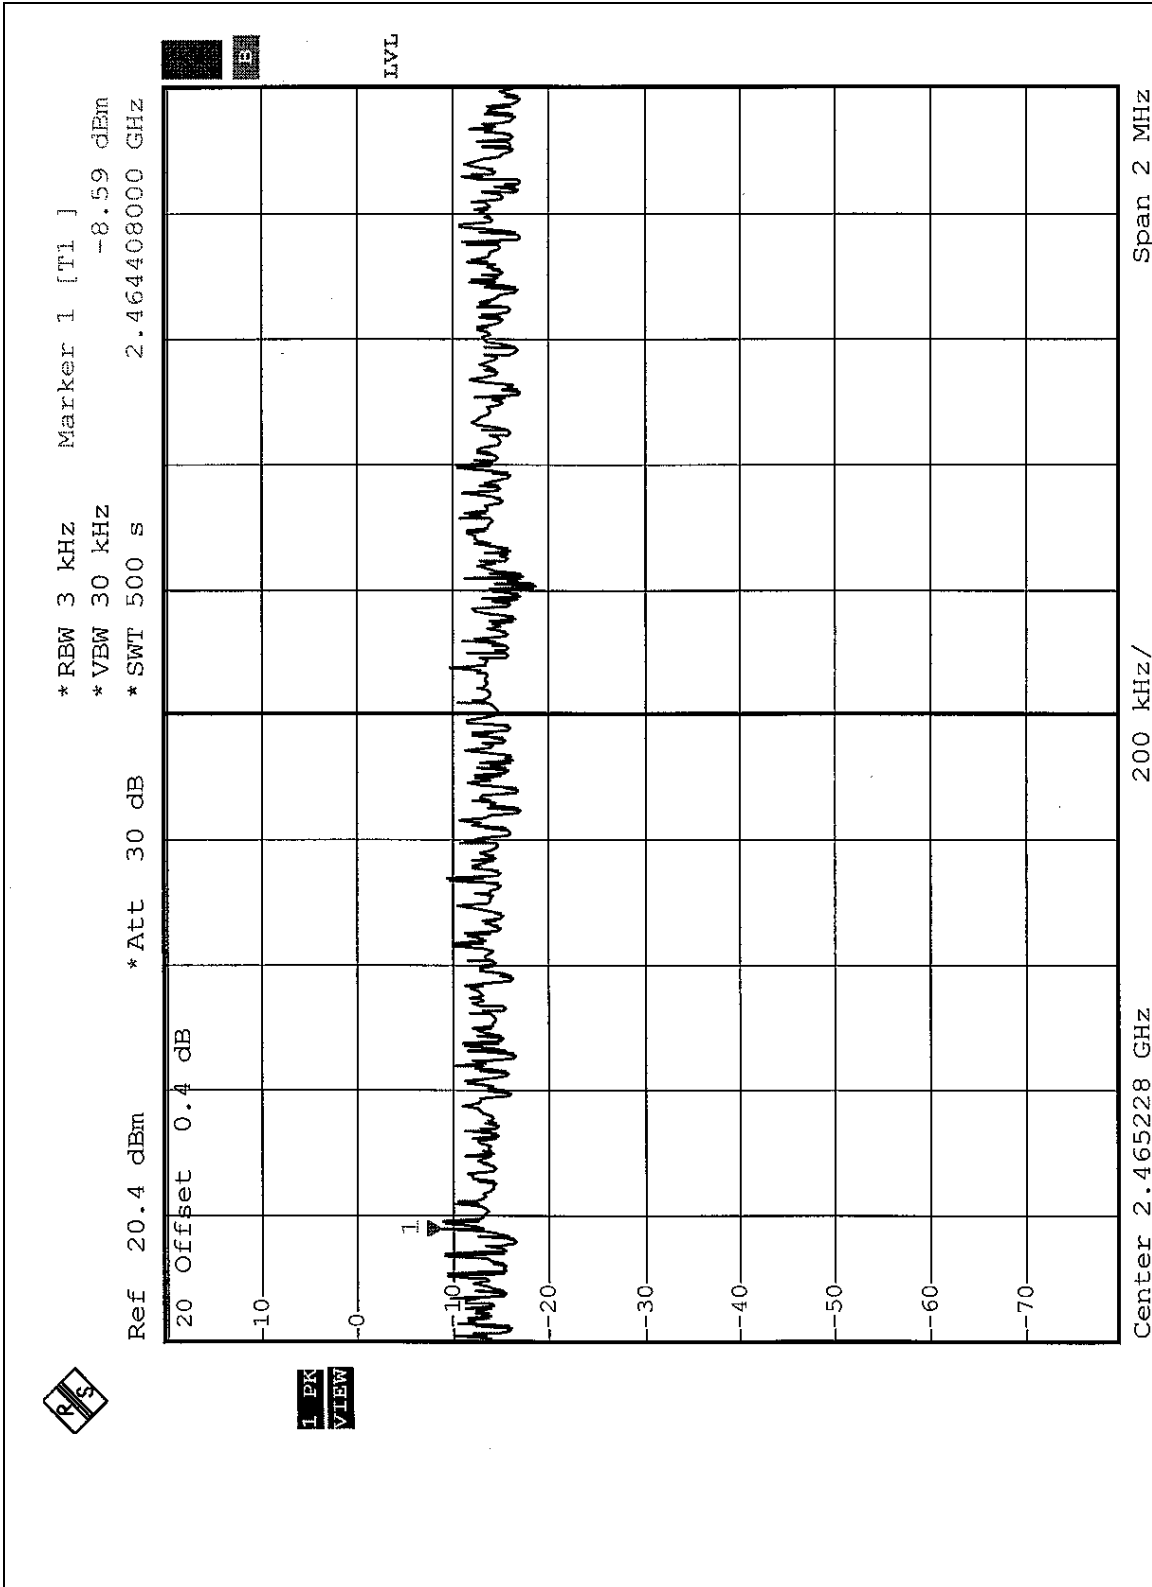



4.5.8 TEST RESULTS (B)


Normal Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.20	8	PASS
6	2437	-11.74	8	PASS
11	2462	-11.52	8	PASS




CH1

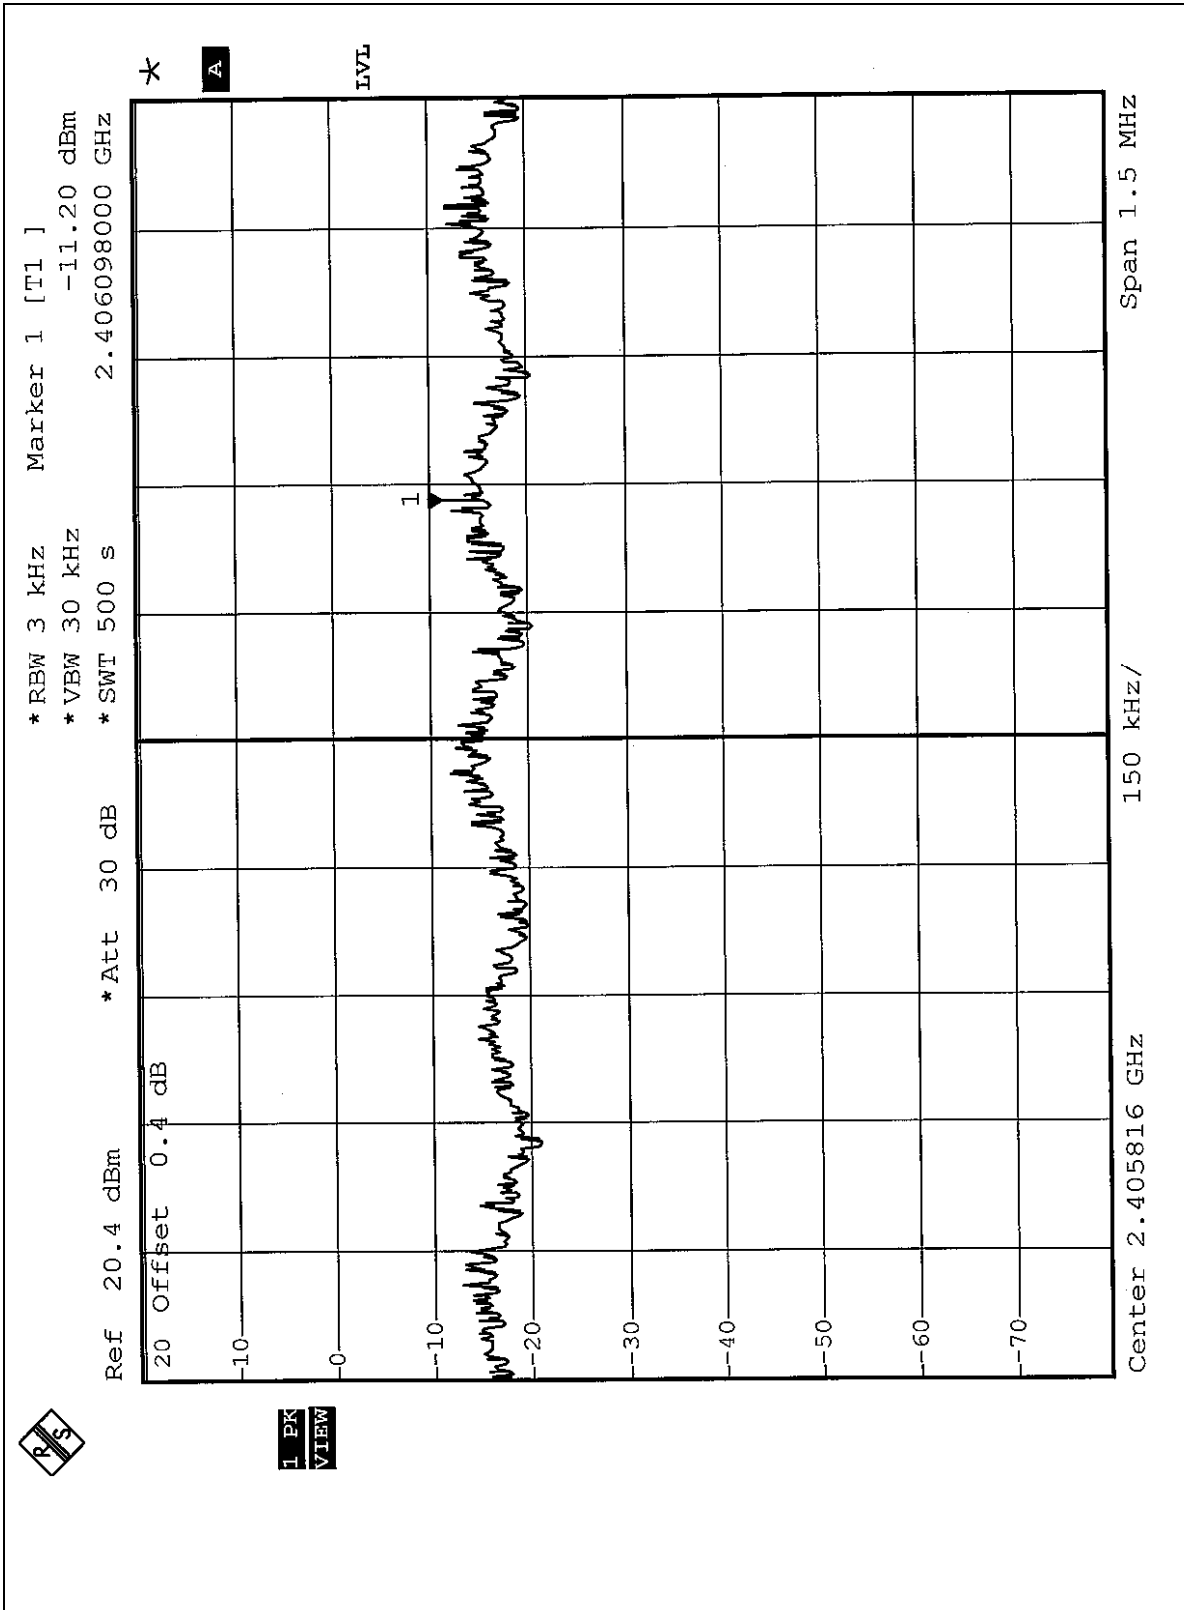




CH6

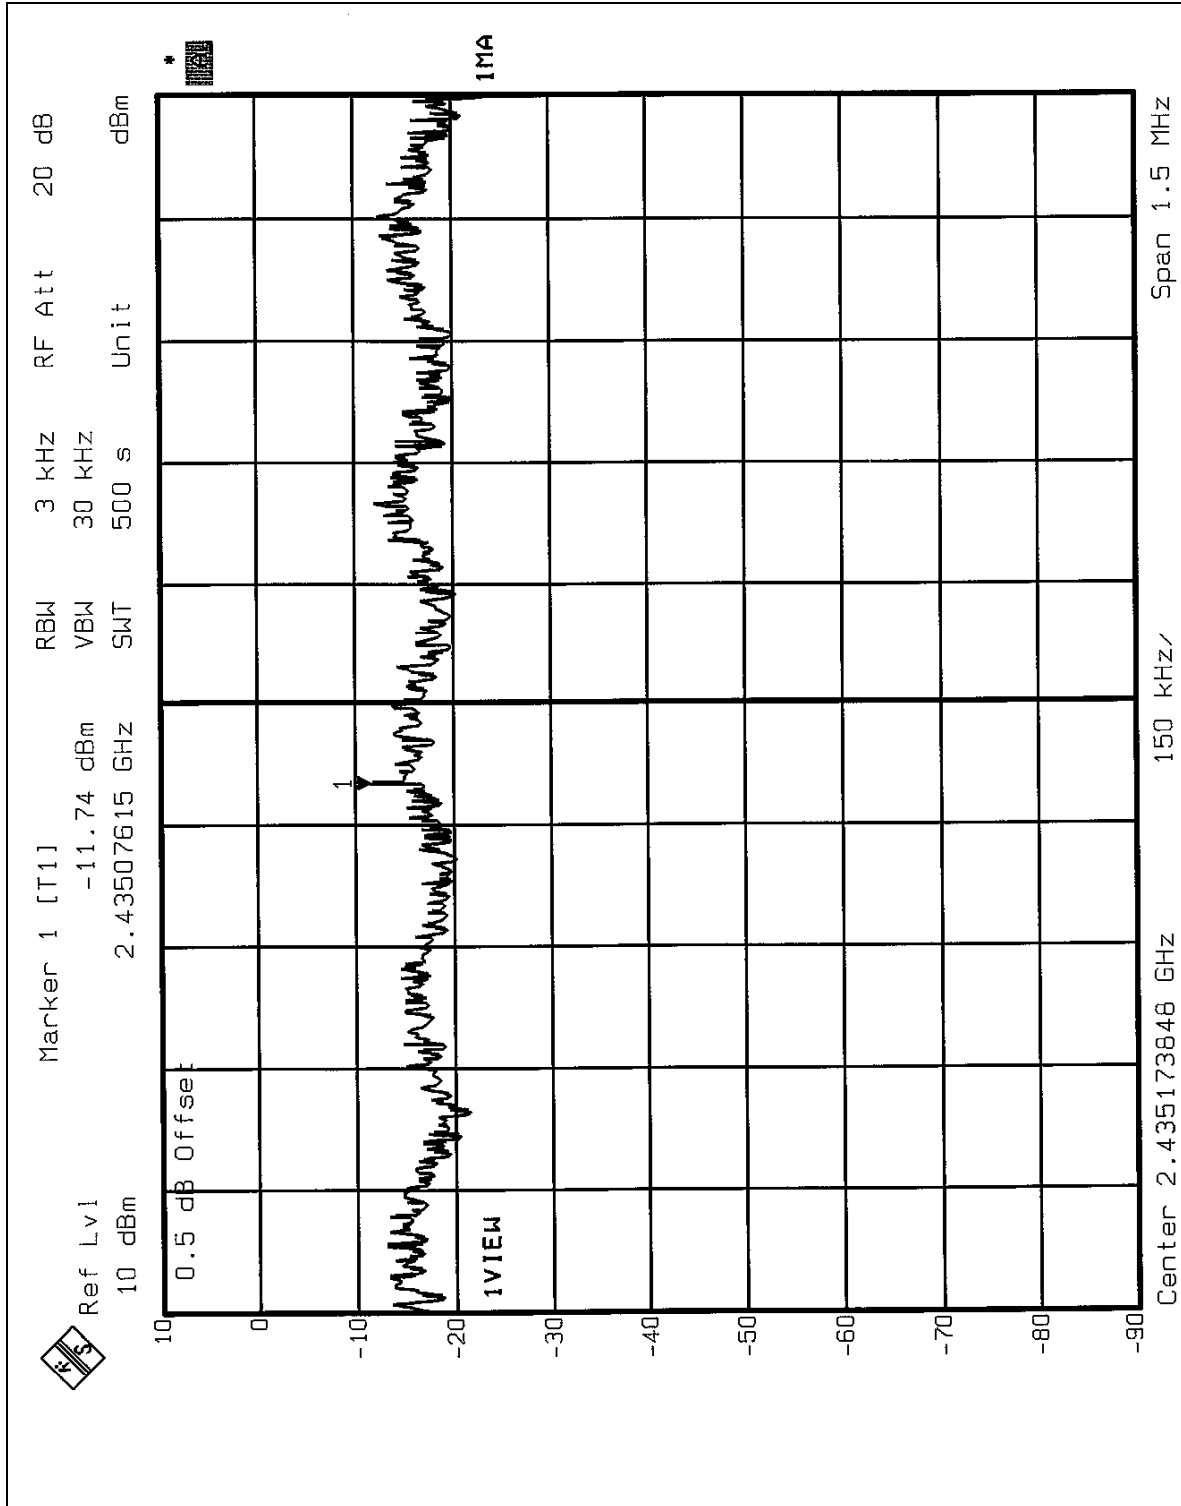



CH11

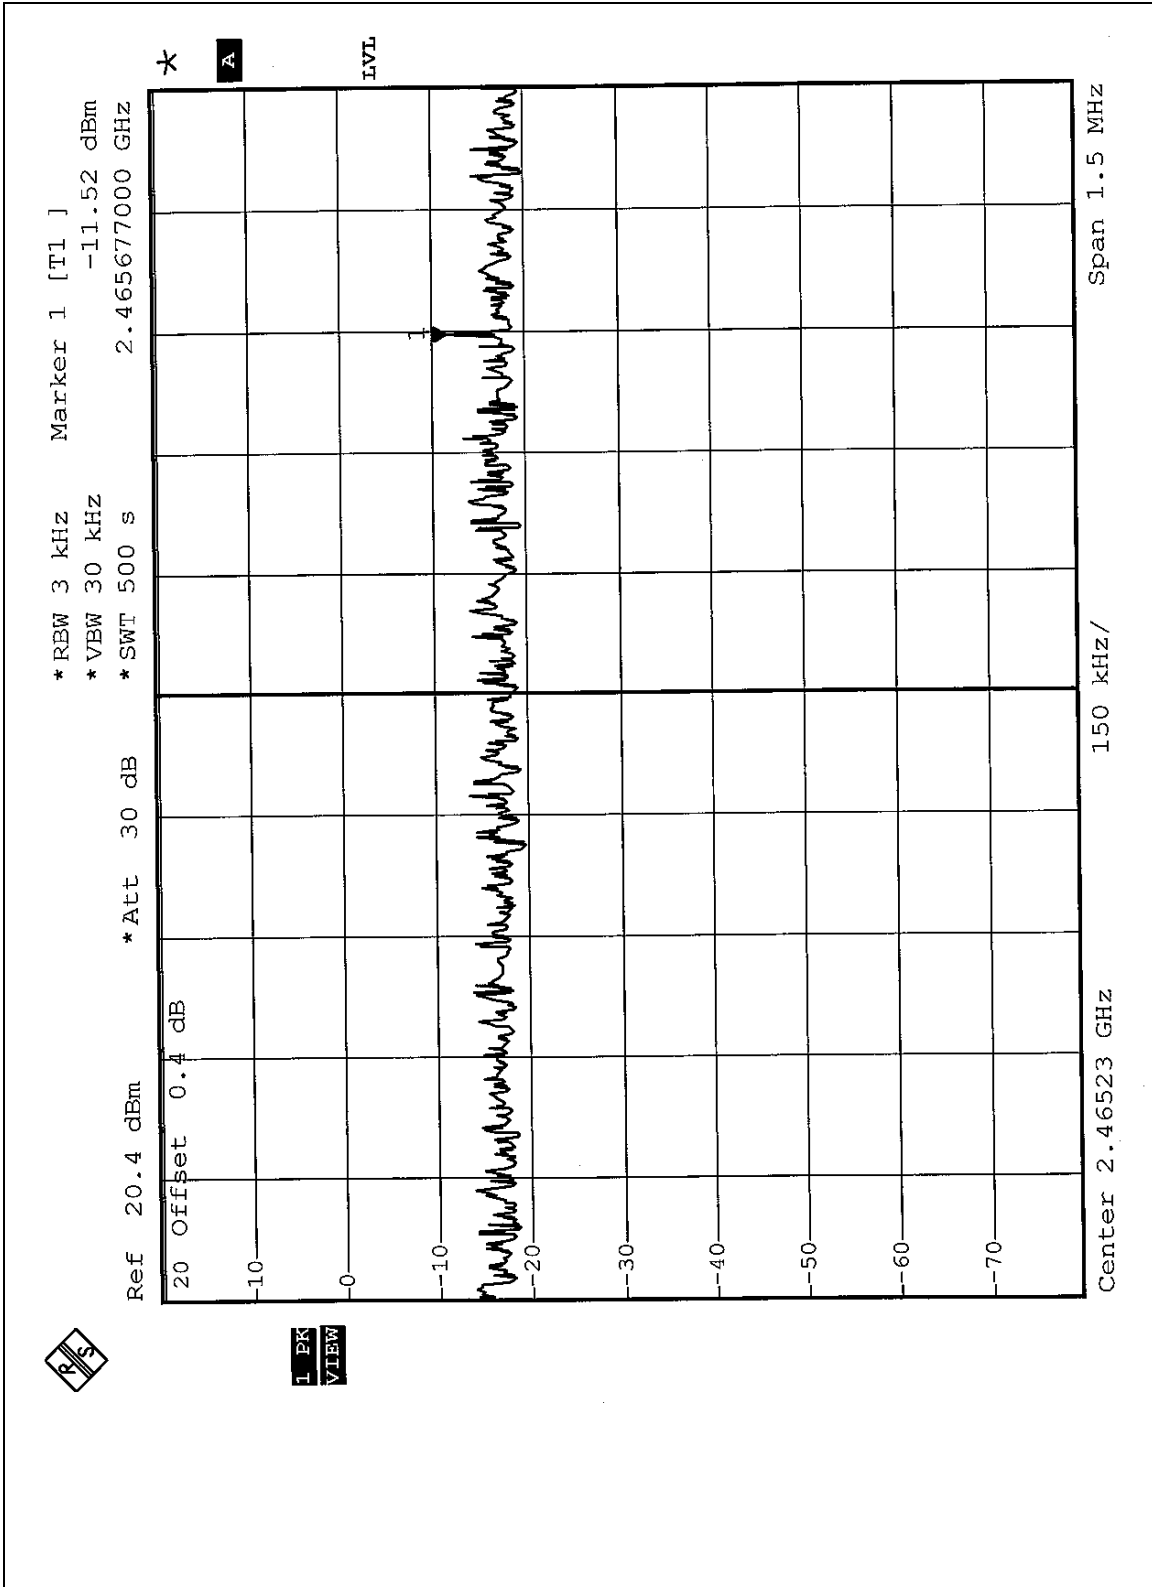




Turbo Mode

EUT	108Mbps Wireless USB 2.0 Adapter	MODEL	WG111T
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TESTED BY	Rush Kao		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-11.90	8	PASS



CH6

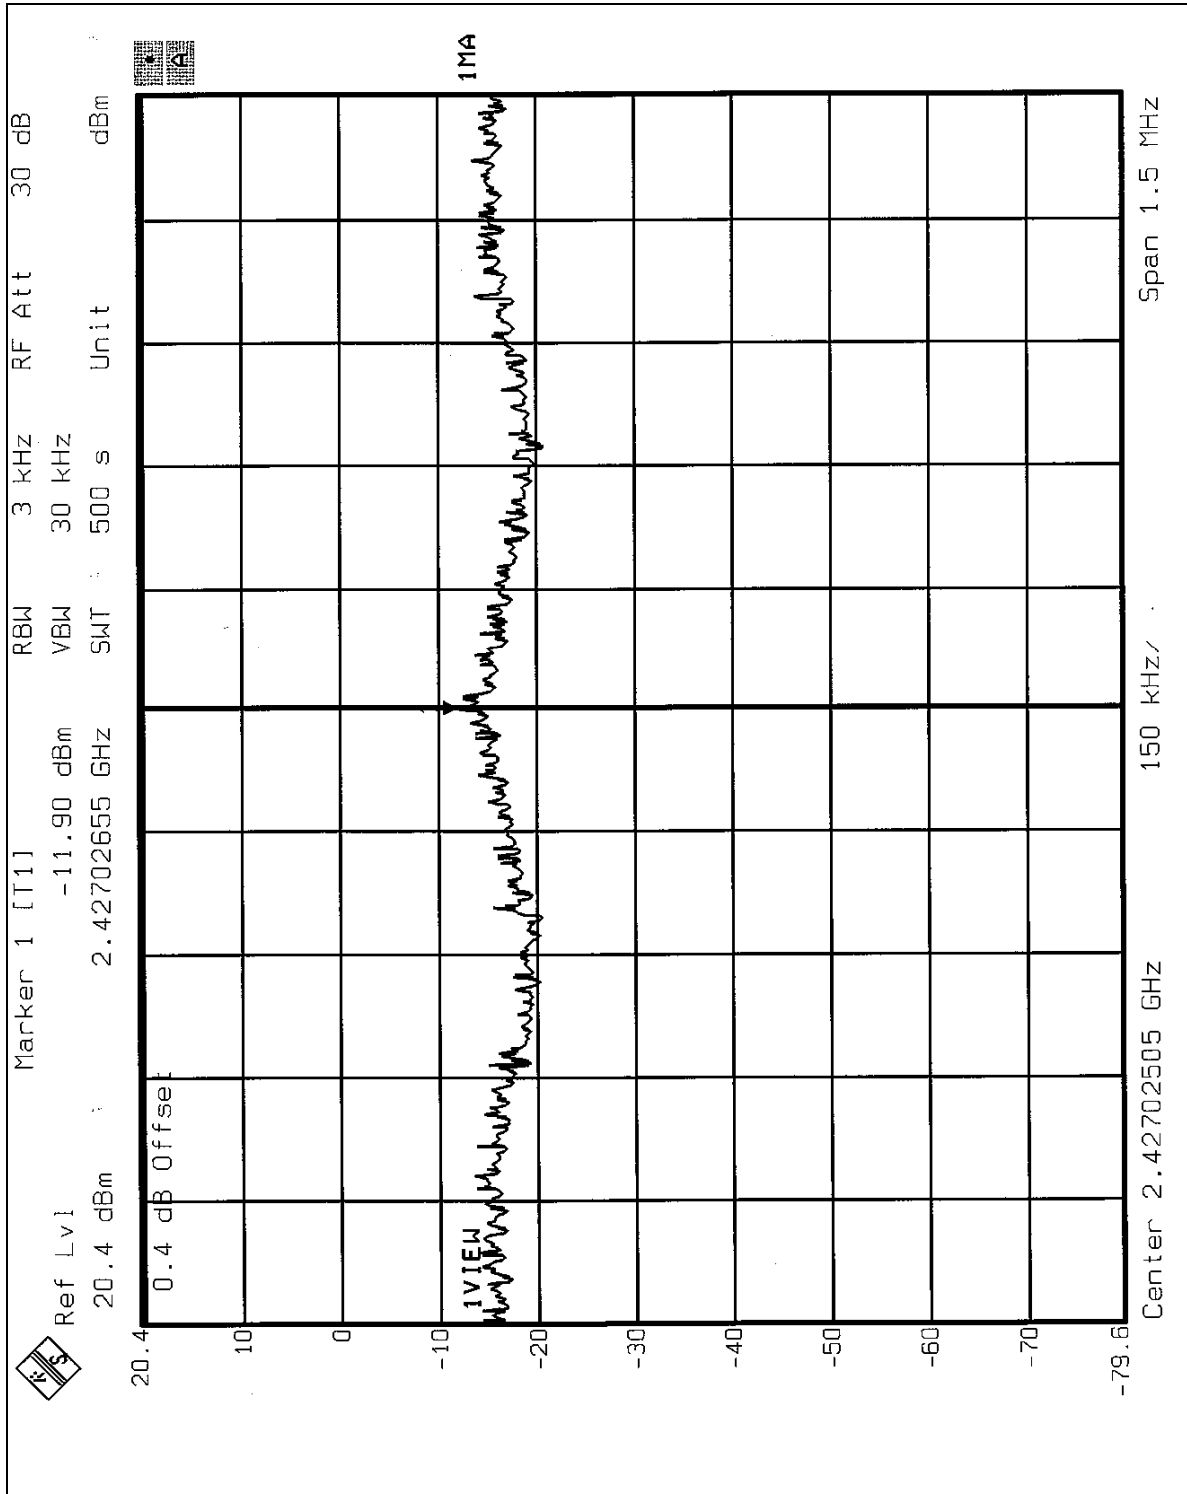



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS (A)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE1:


The band edge emission plot on the following 1 ~ 2 pages show 59.11dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 105.55dBuV/m, so the maximum field strength in restrict band is $105.55-59.11=46.44$ dBuV/m which is under 54dBuV/m limit.


NOTE2:

The band edge emission plot on the following 3 ~ 4 pages show 58.60dB delta between carrier maximum power and local maximum emission in restrict band (2.4877GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 106.33dBuV/m, so the maximum field strength in restrict band is $106.33-58.60=47.33$ dBuV/m which is under 54dBuV/m limit.

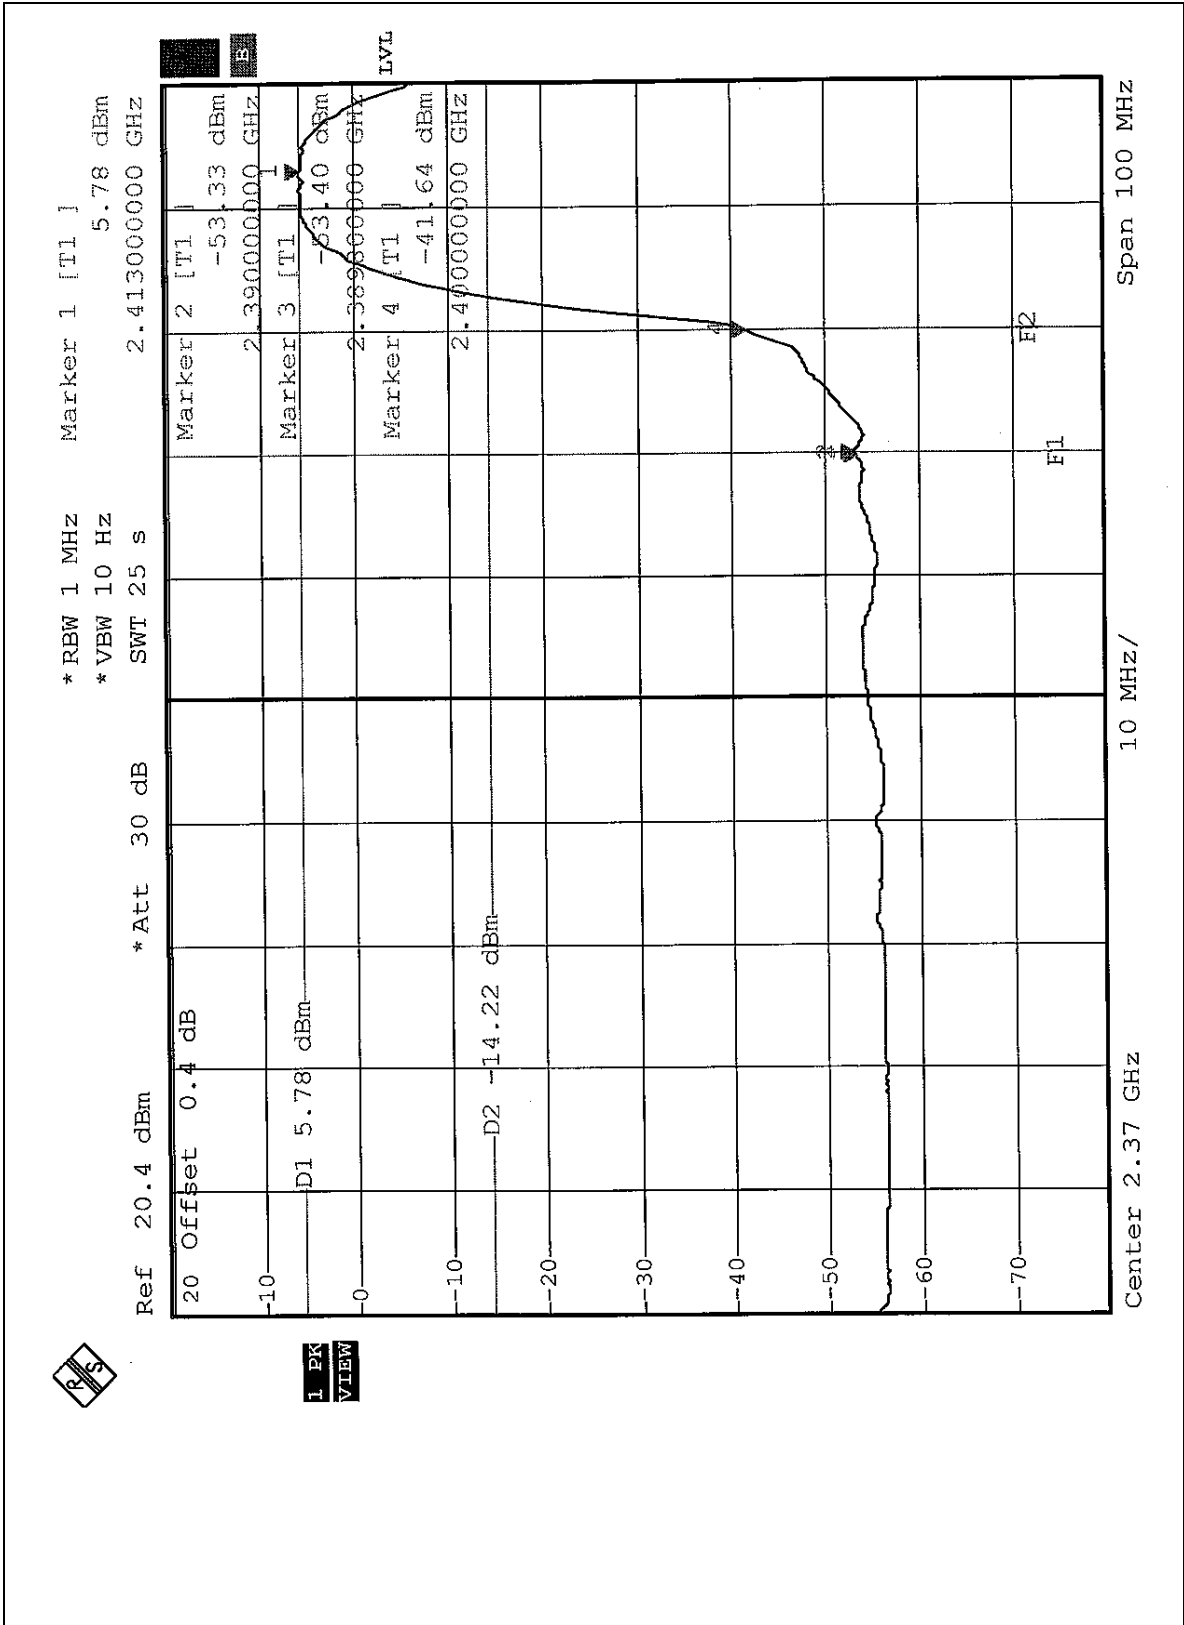

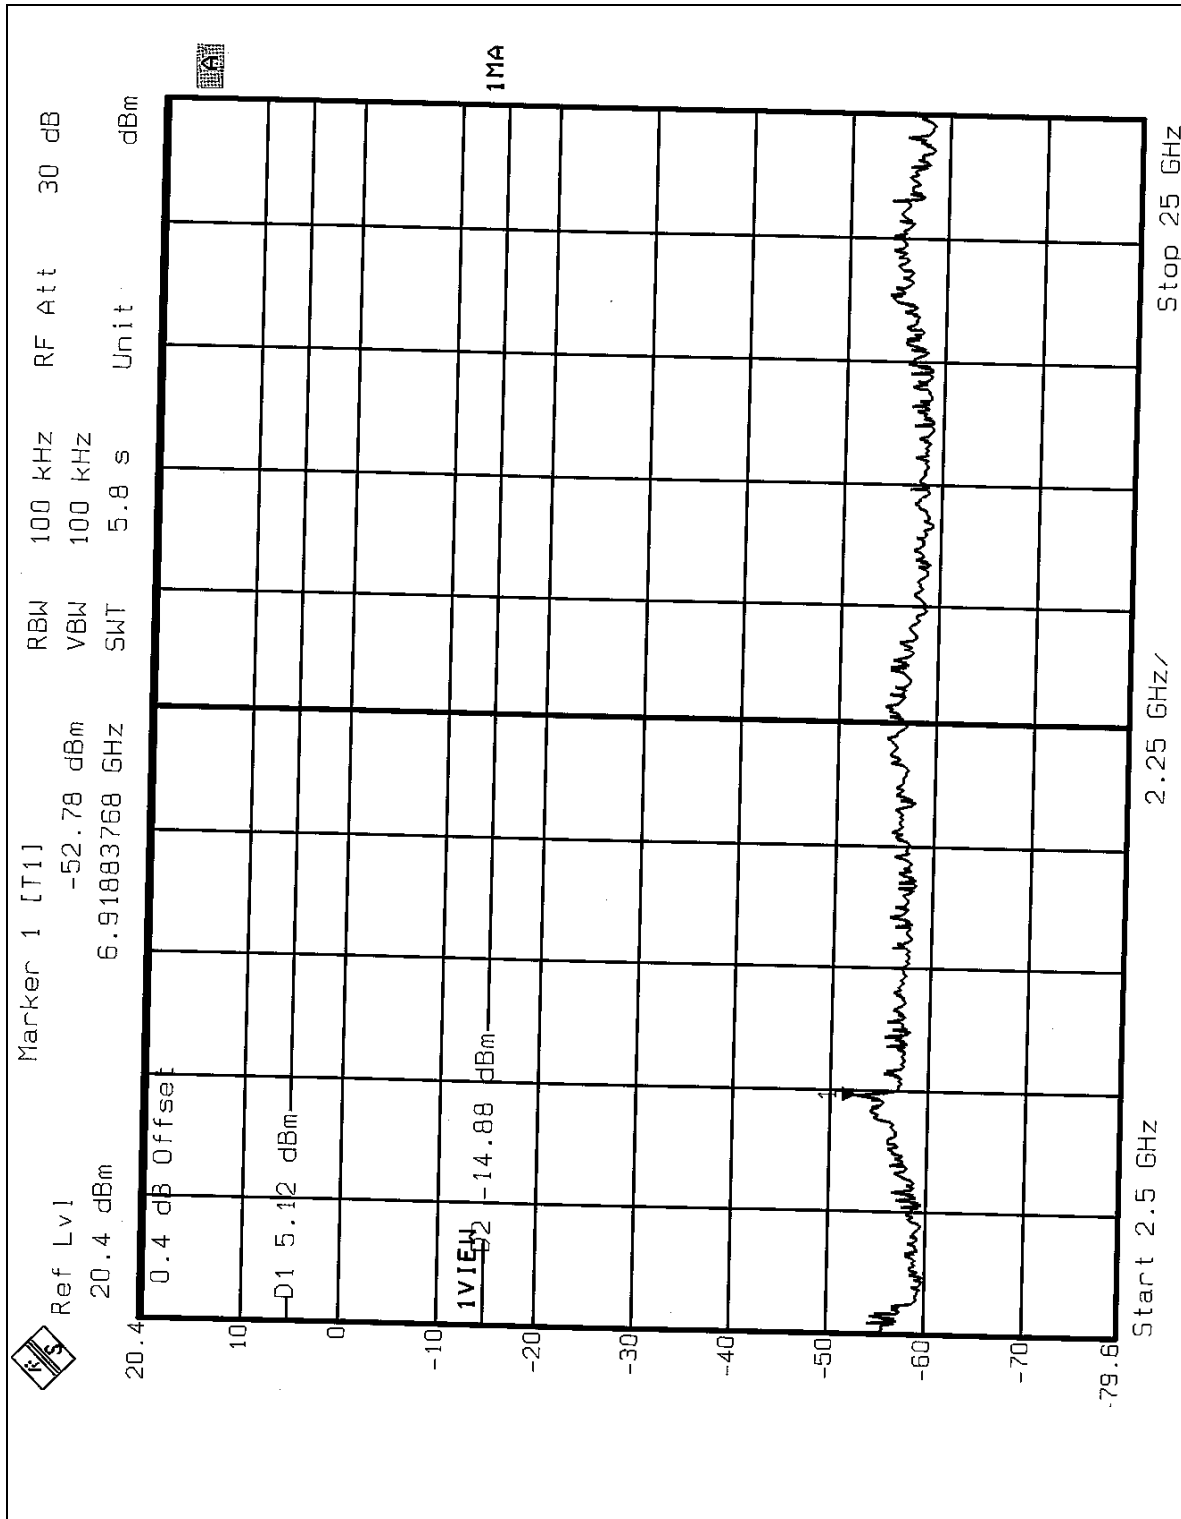

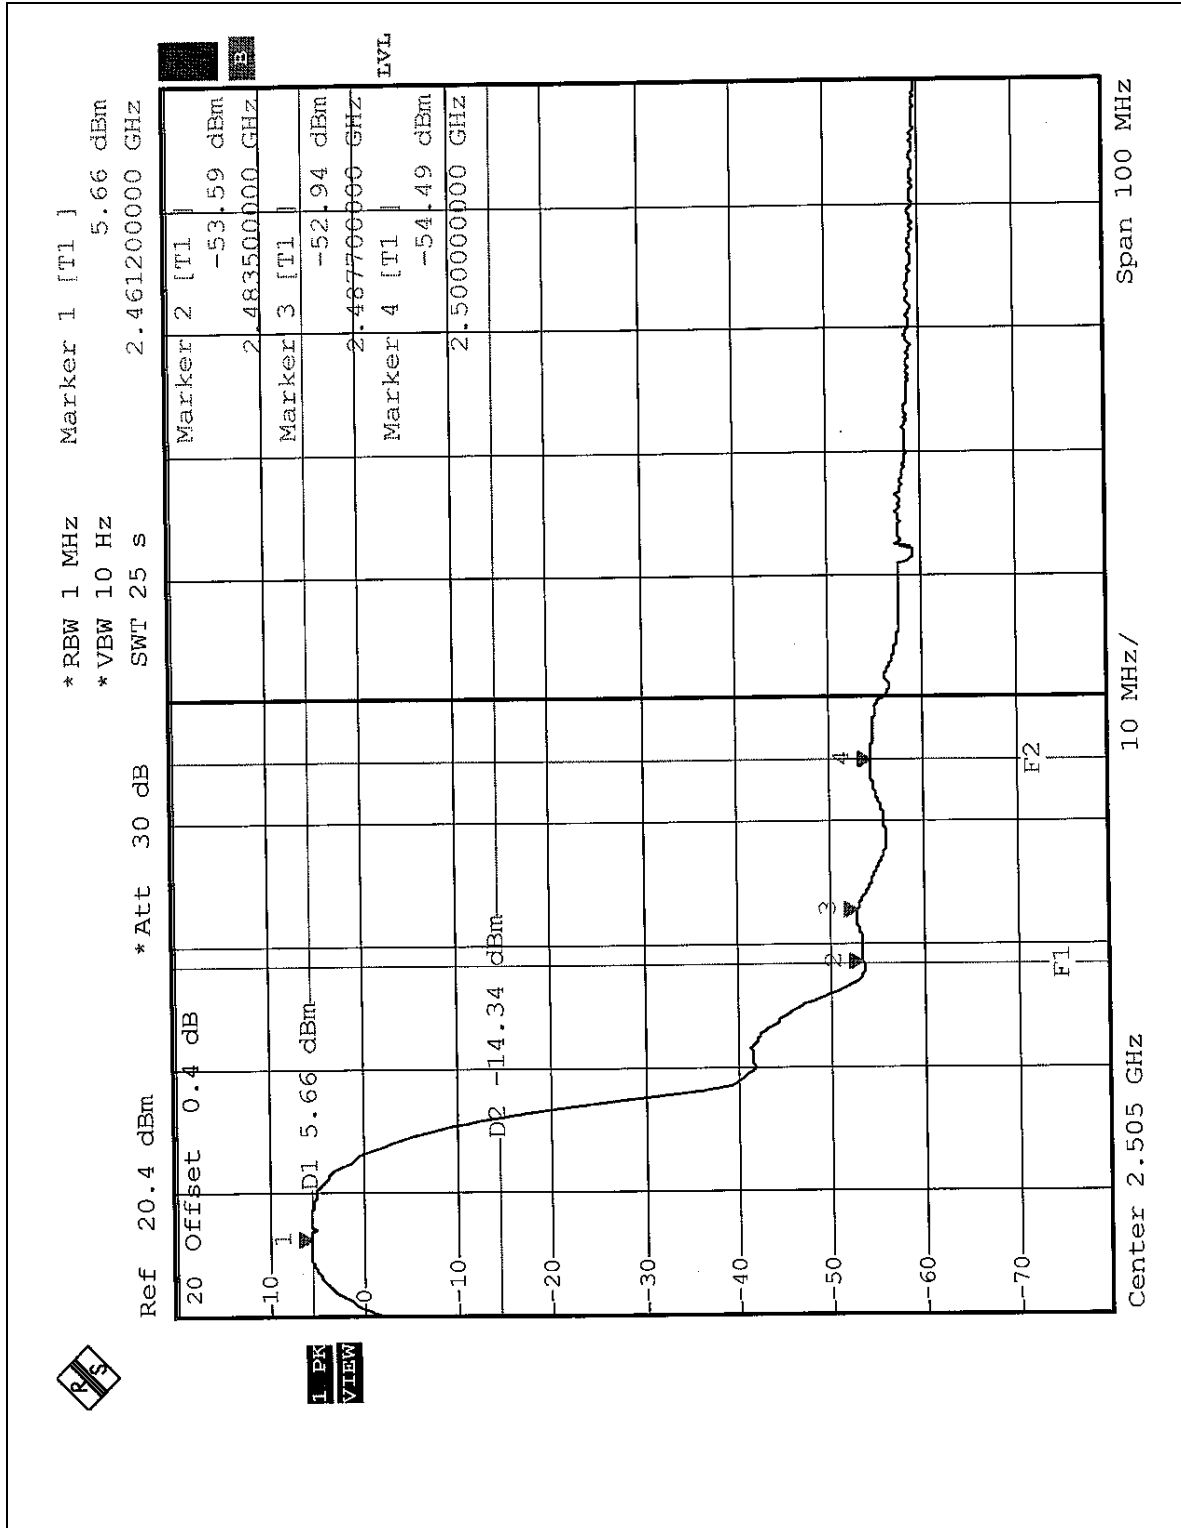

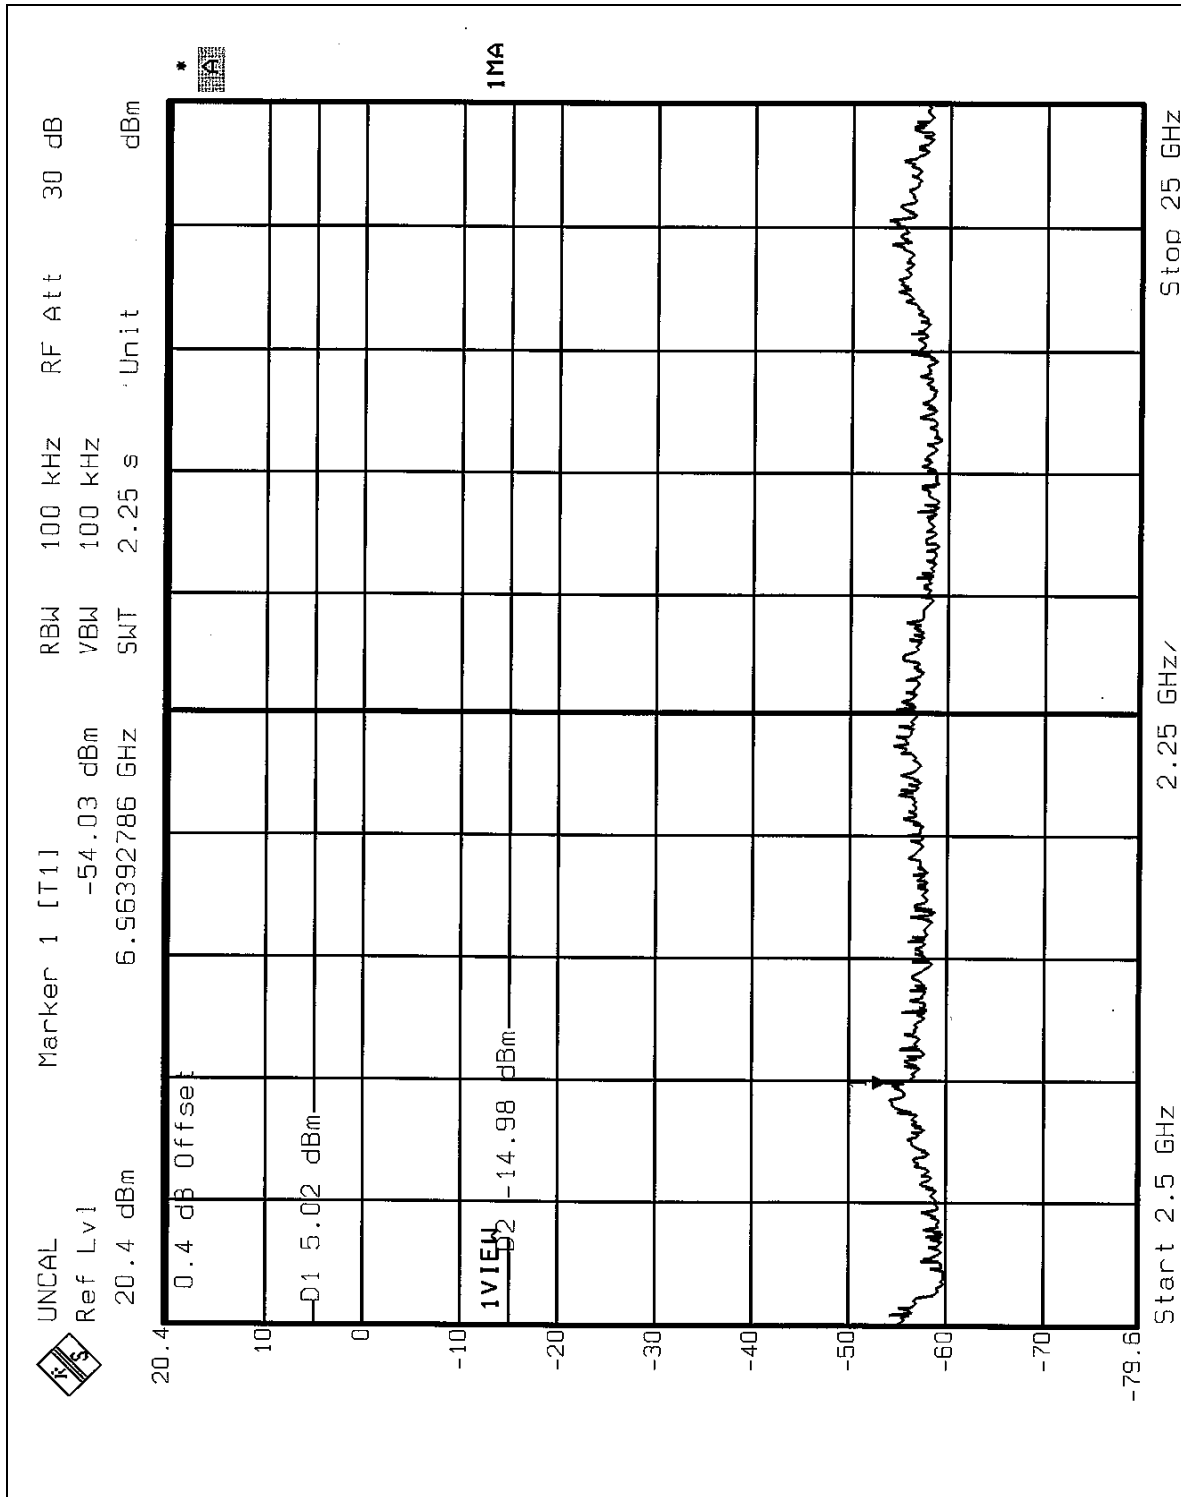



4.6.7 TEST RESULTS (B)

The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

Normal Mode:

NOTE1:

The band edge emission plot on the following 1 ~ 2 pages show 48.65dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 98.61dBuV/m, so the maximum field strength in restrict band is $98.61 - 48.65 = 49.96$ dBuV/m which is under 54dBuV/m limit.

NOTE2:

The band edge emission plot on the following 3 ~ 4 pages show 48.29dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 98.82dBuV/m, so the maximum field strength in restrict band is $98.82 - 48.29 = 50.53$ dBuV/m which is under 54dBuV/m limit.


Turbo Mode:


NOTE1:


The band edge emission plot on the following 5 ~ 6 pages show 45.53dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.9 is 98.33dBuV/m, so the maximum field strength in restrict band is $98.33 - 45.53 = 52.80$ dBuV/m which is under 54dBuV/m limit.


NOTE2:


The band edge emission plot on the following 7 ~ 8 pages show 46.31dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.9 is 95.75dBuV/m, so the maximum field strength in restrict band is $95.75 - 46.31 = 49.44$ dBuV/m which is under 54dBuV/m limit.

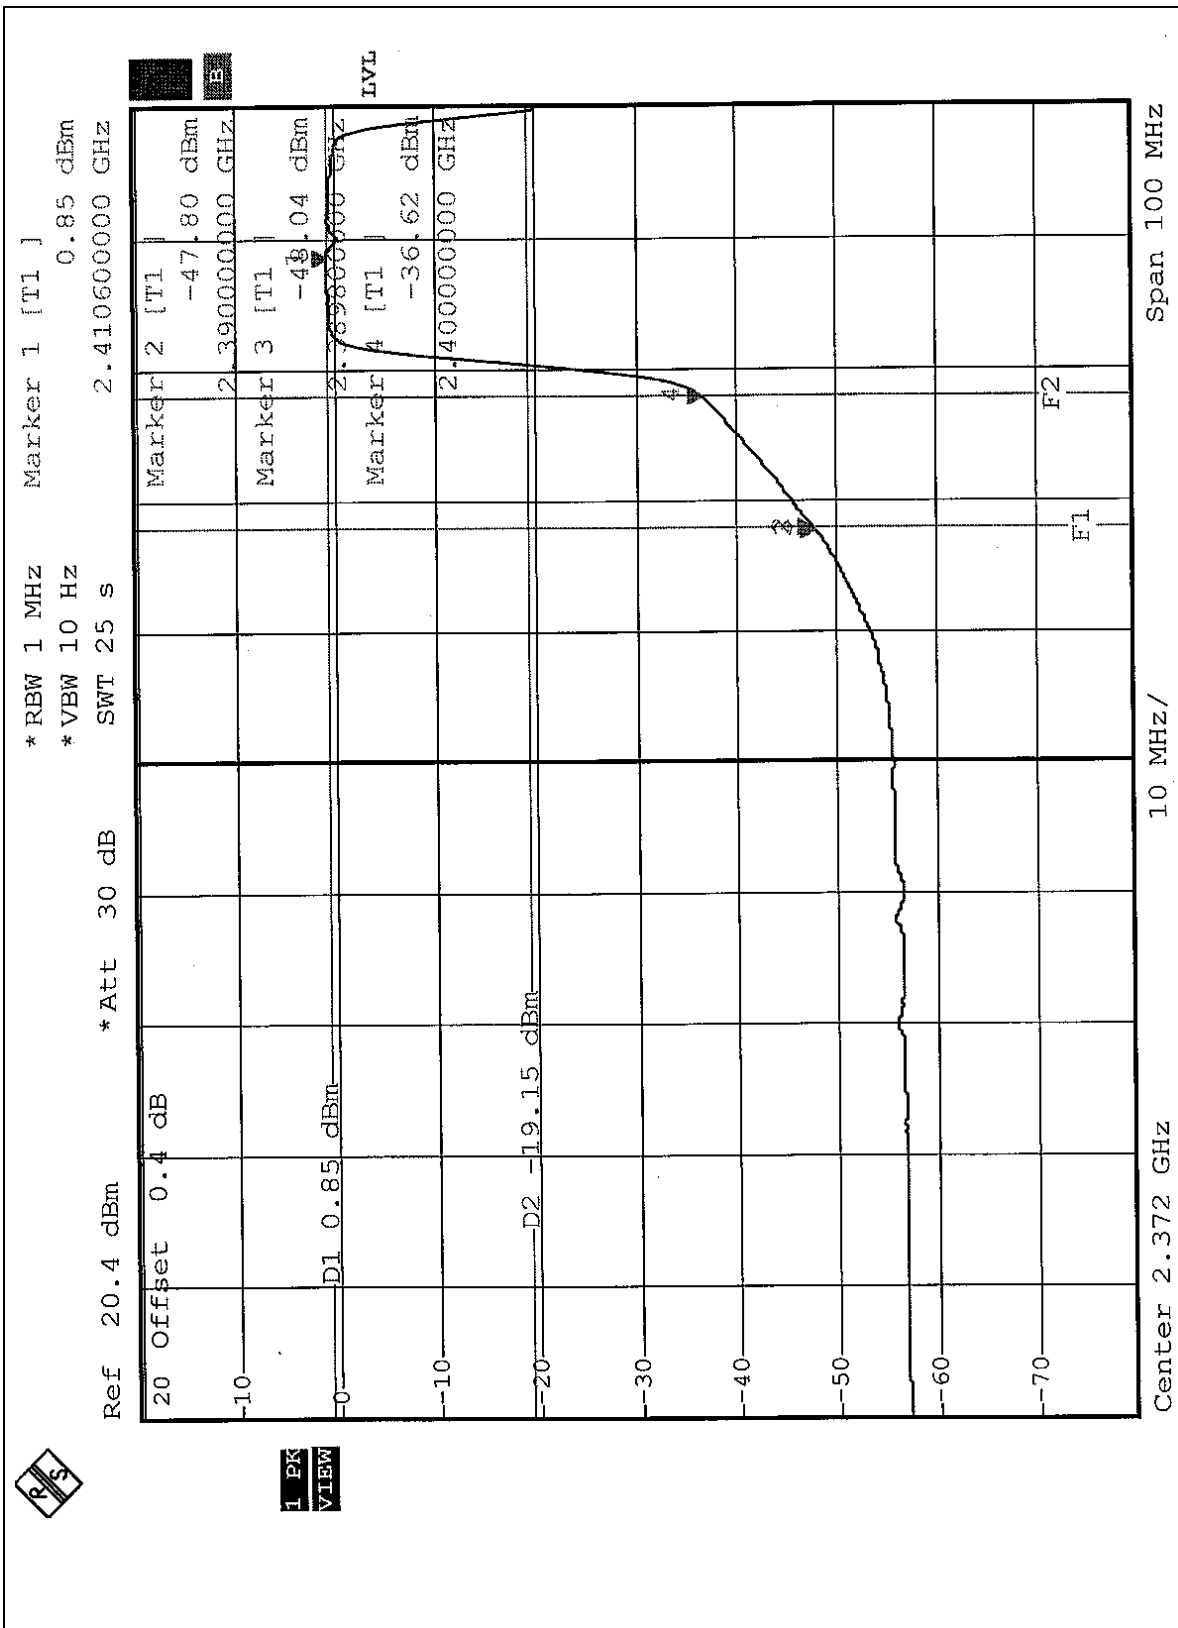

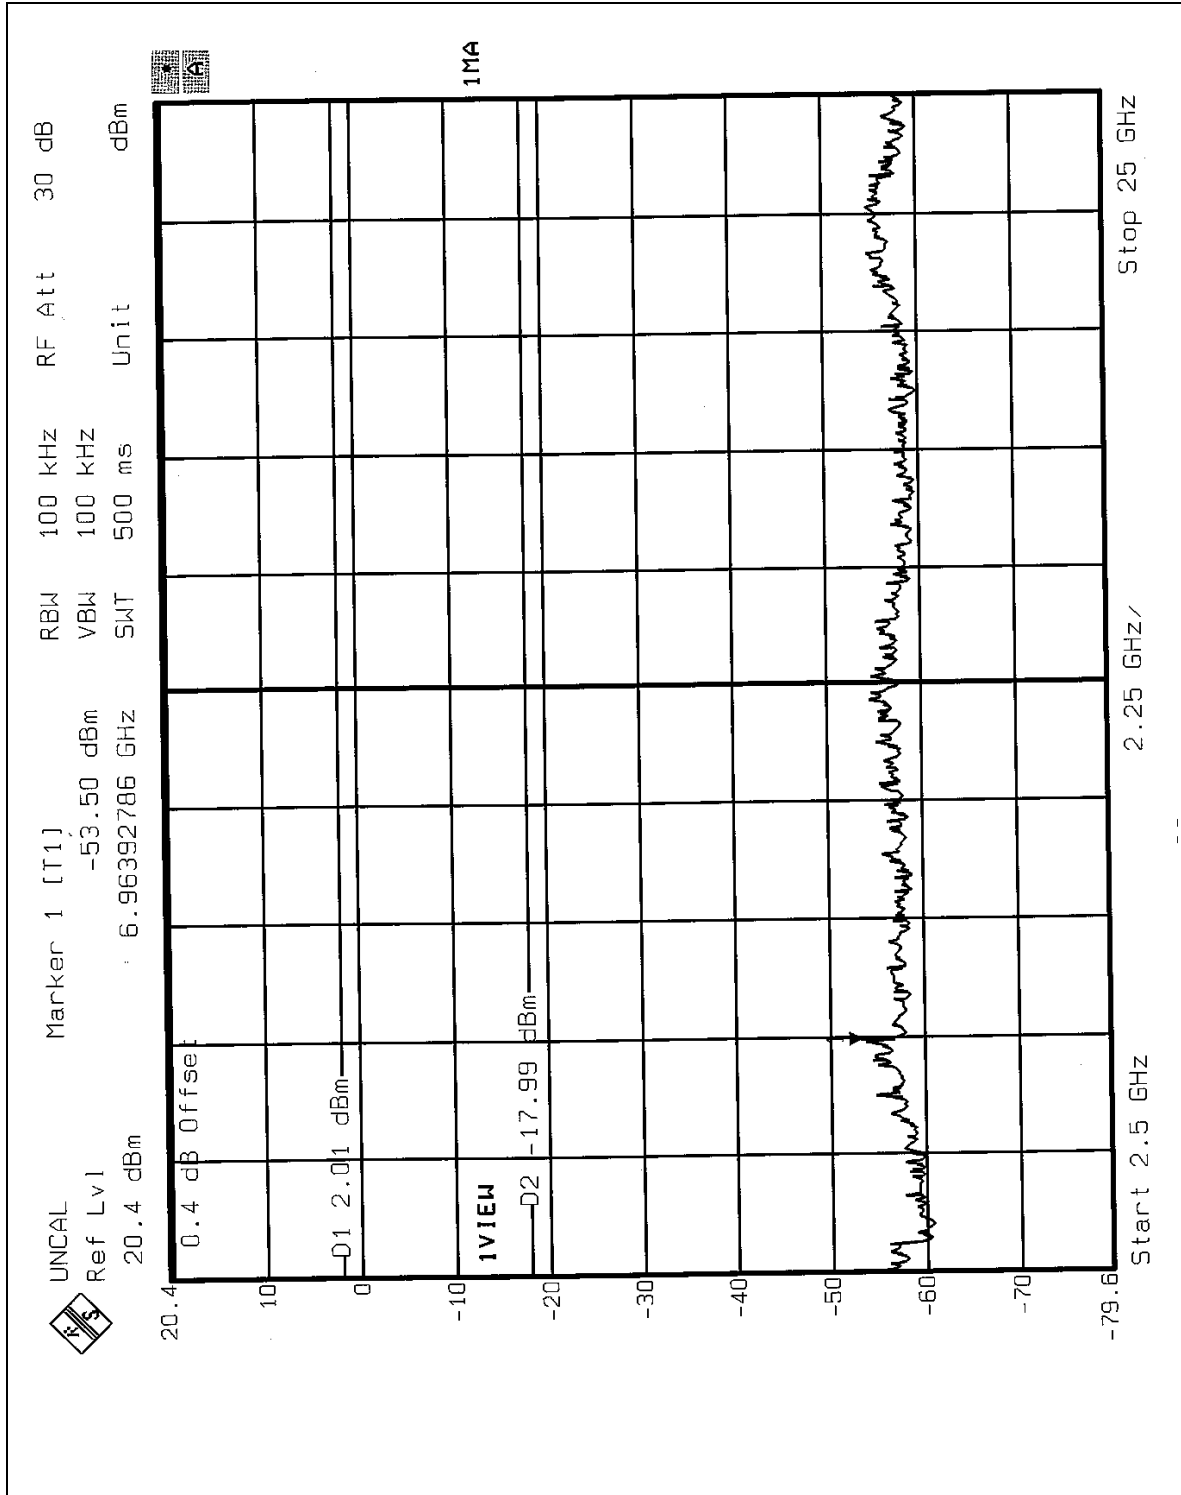


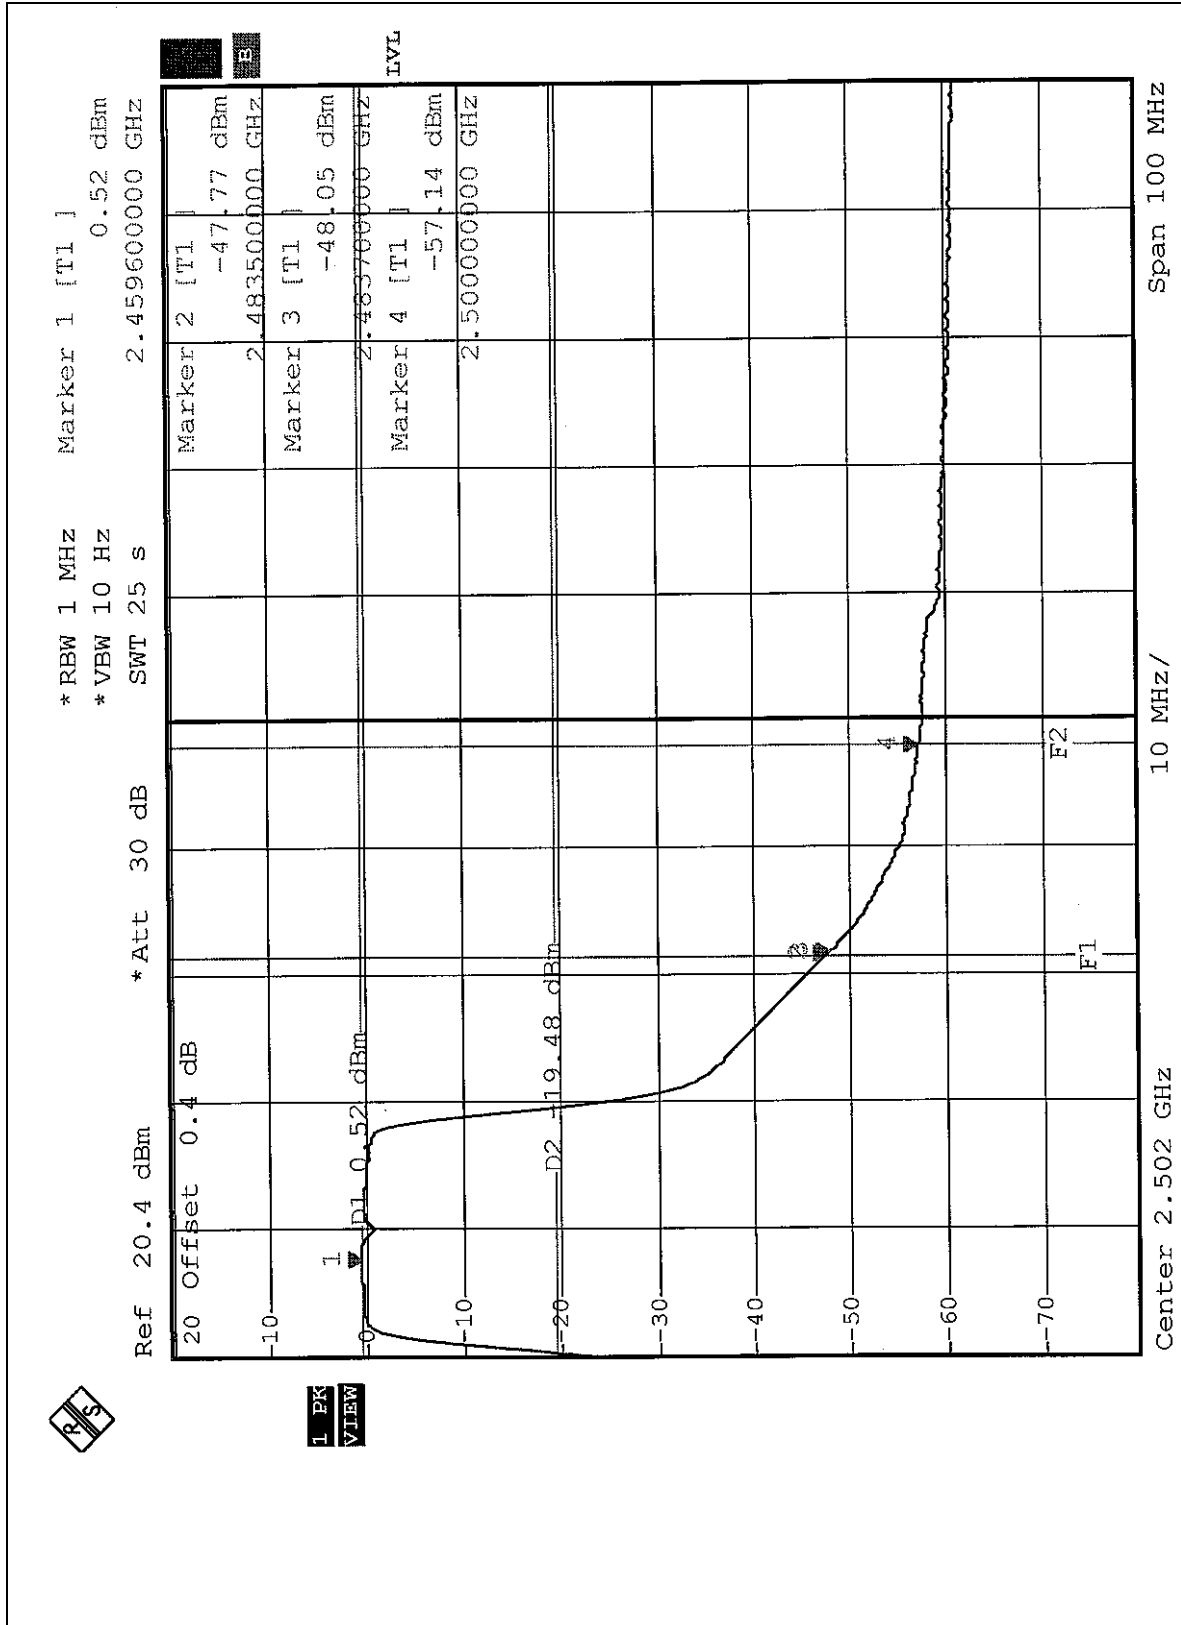


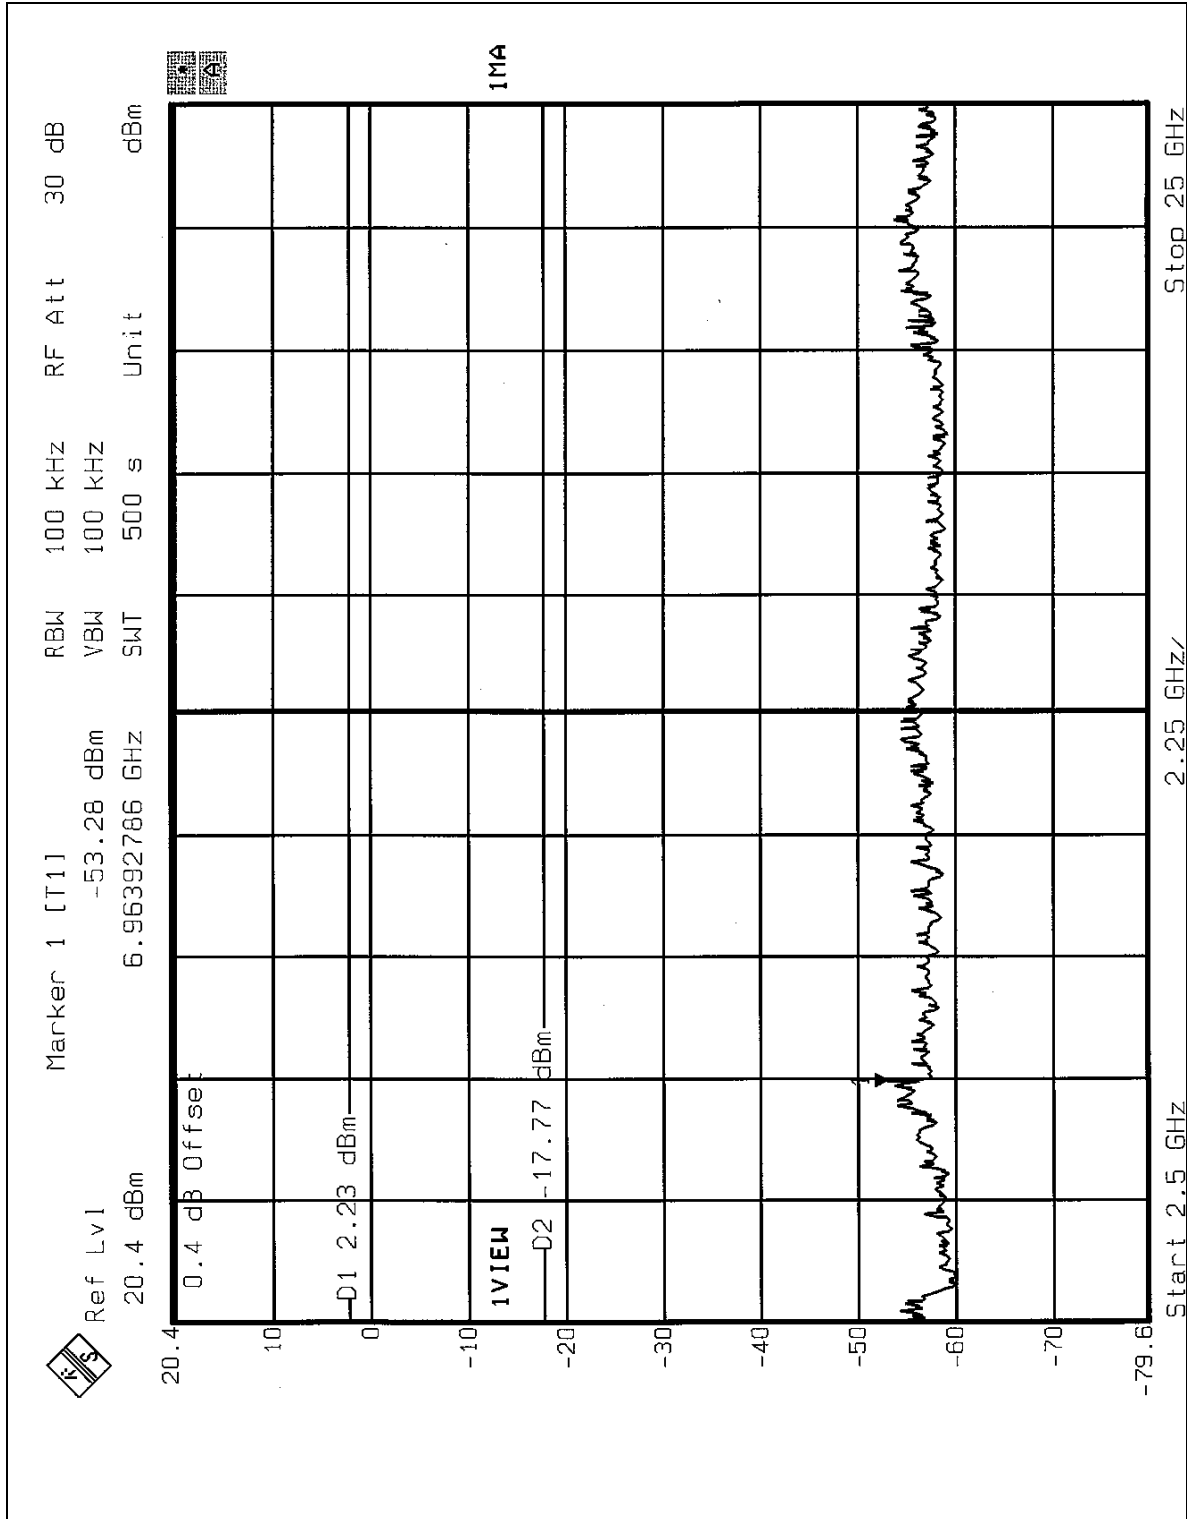

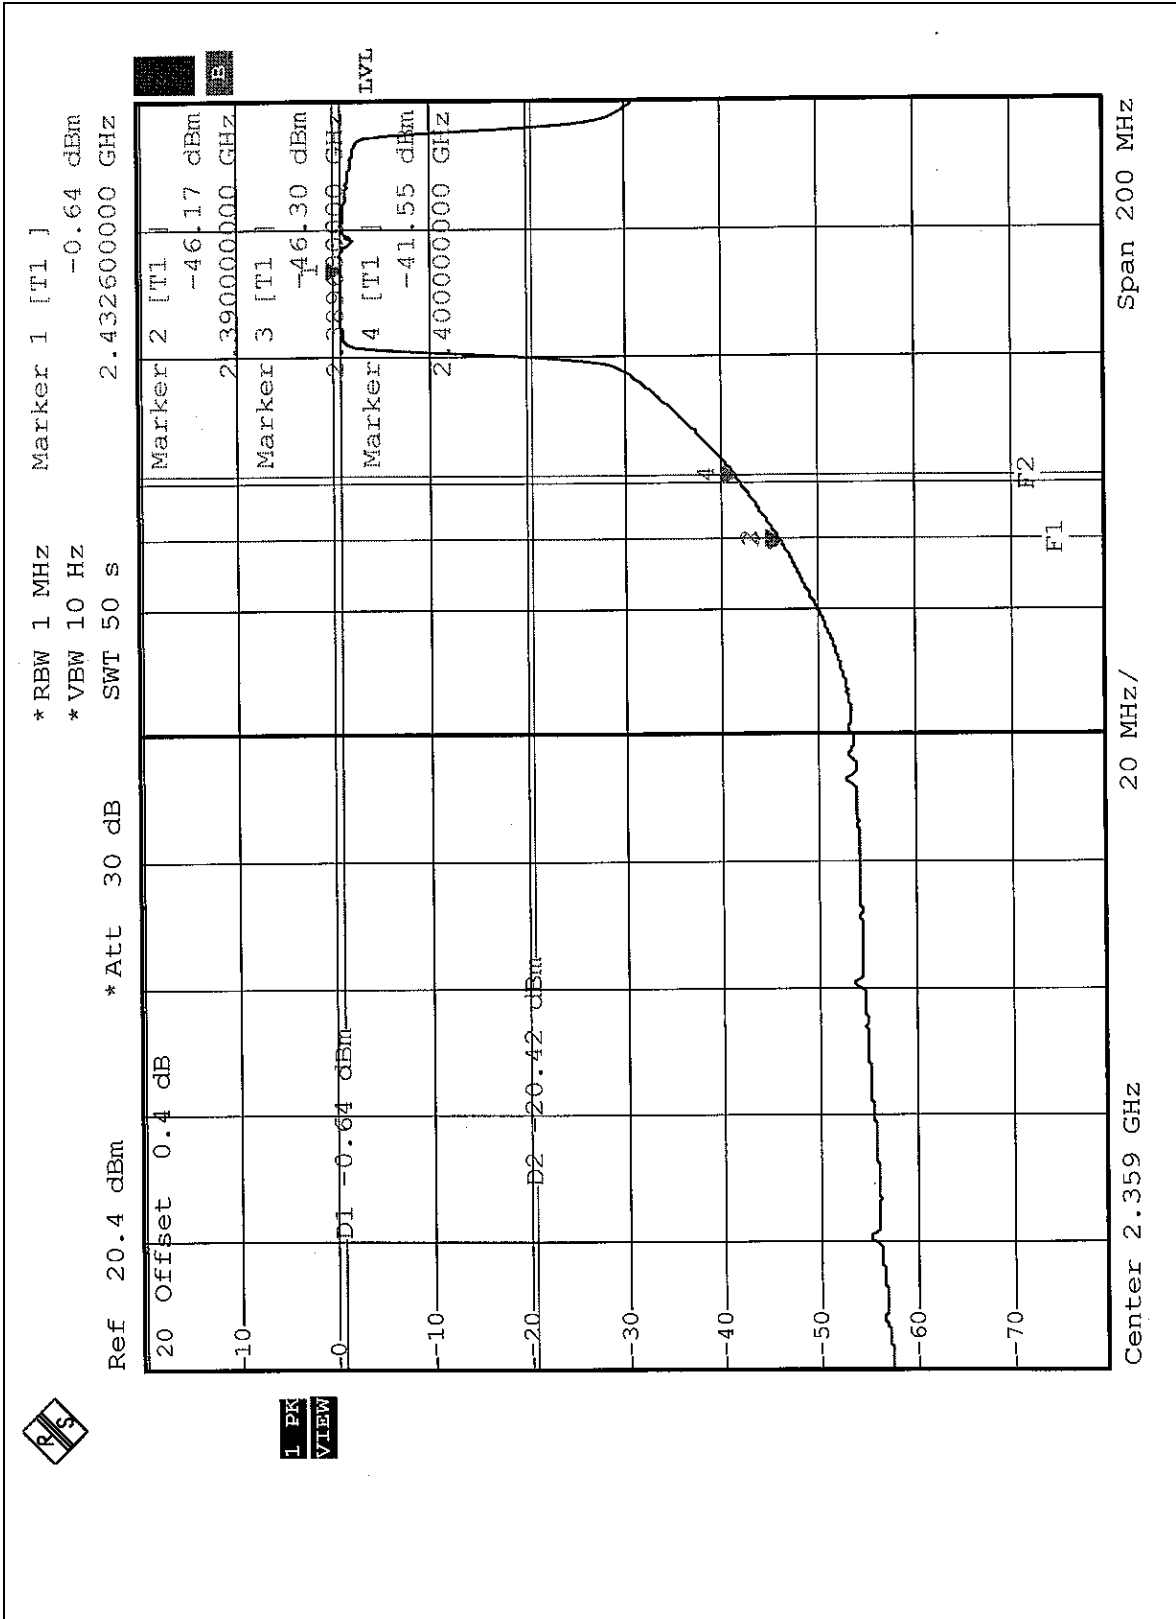

1 PK VIEW

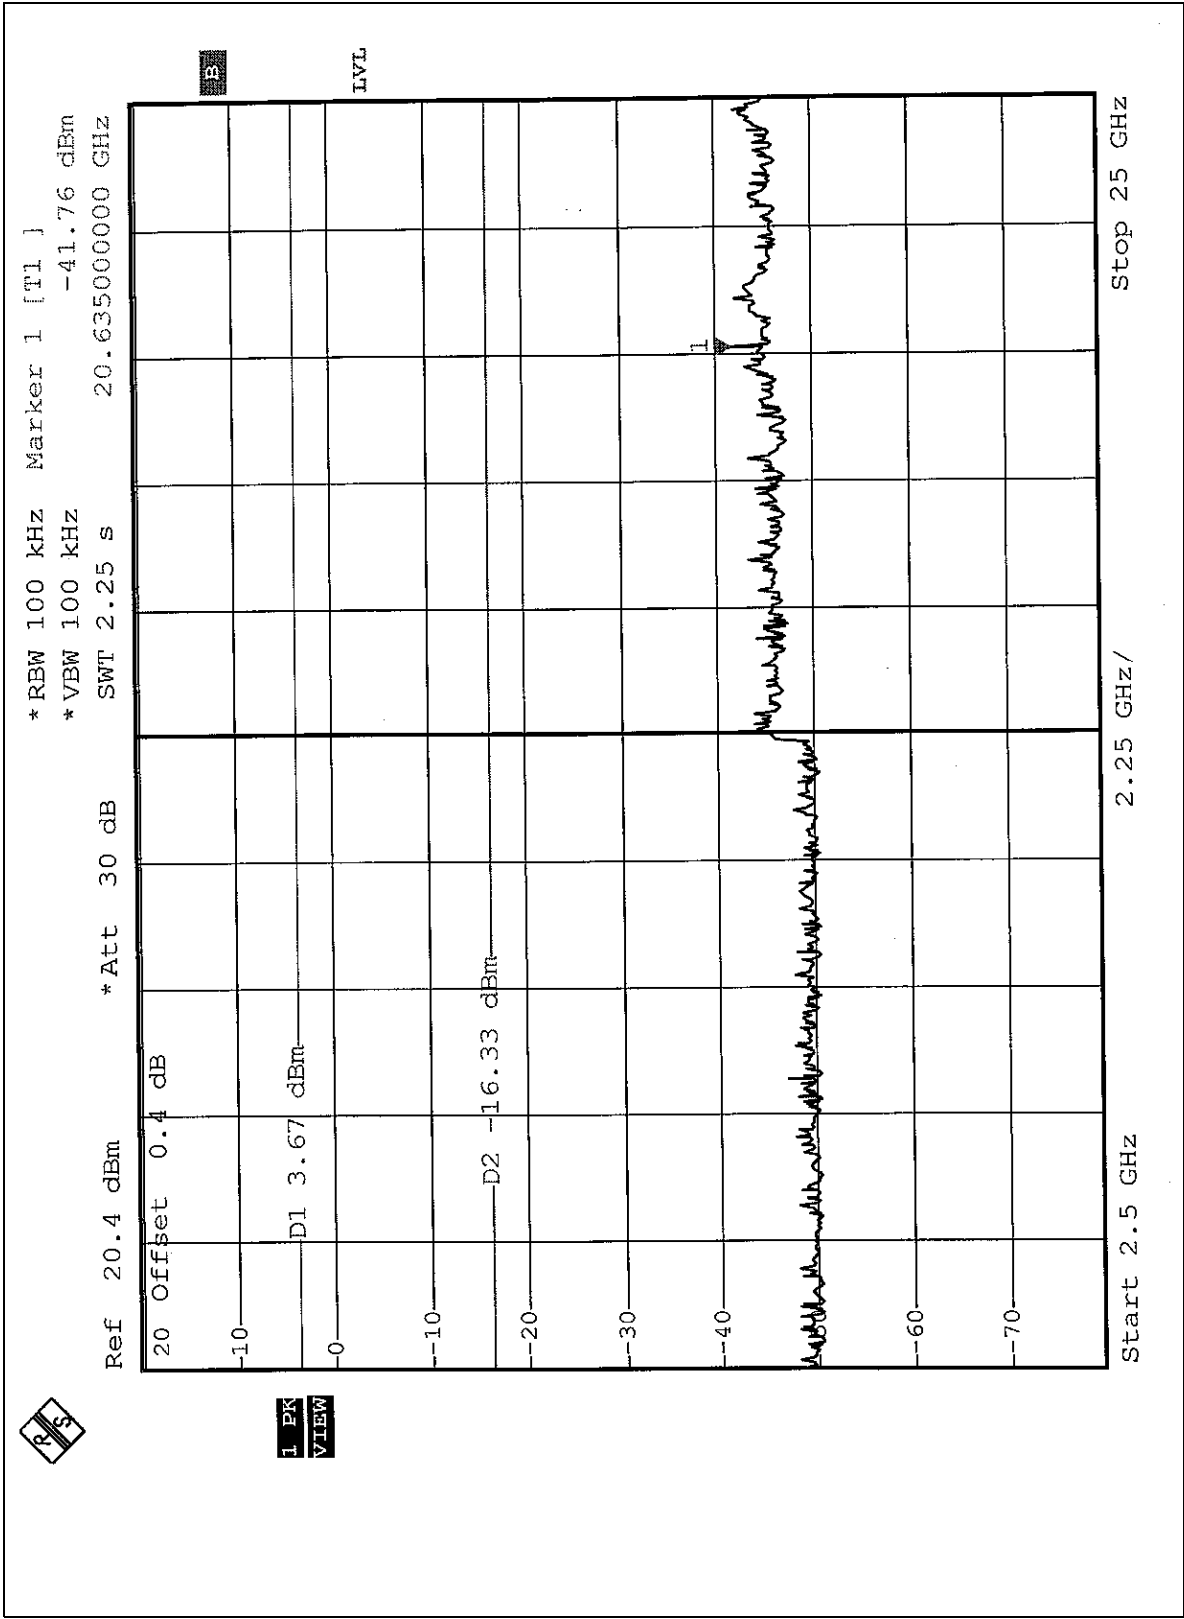

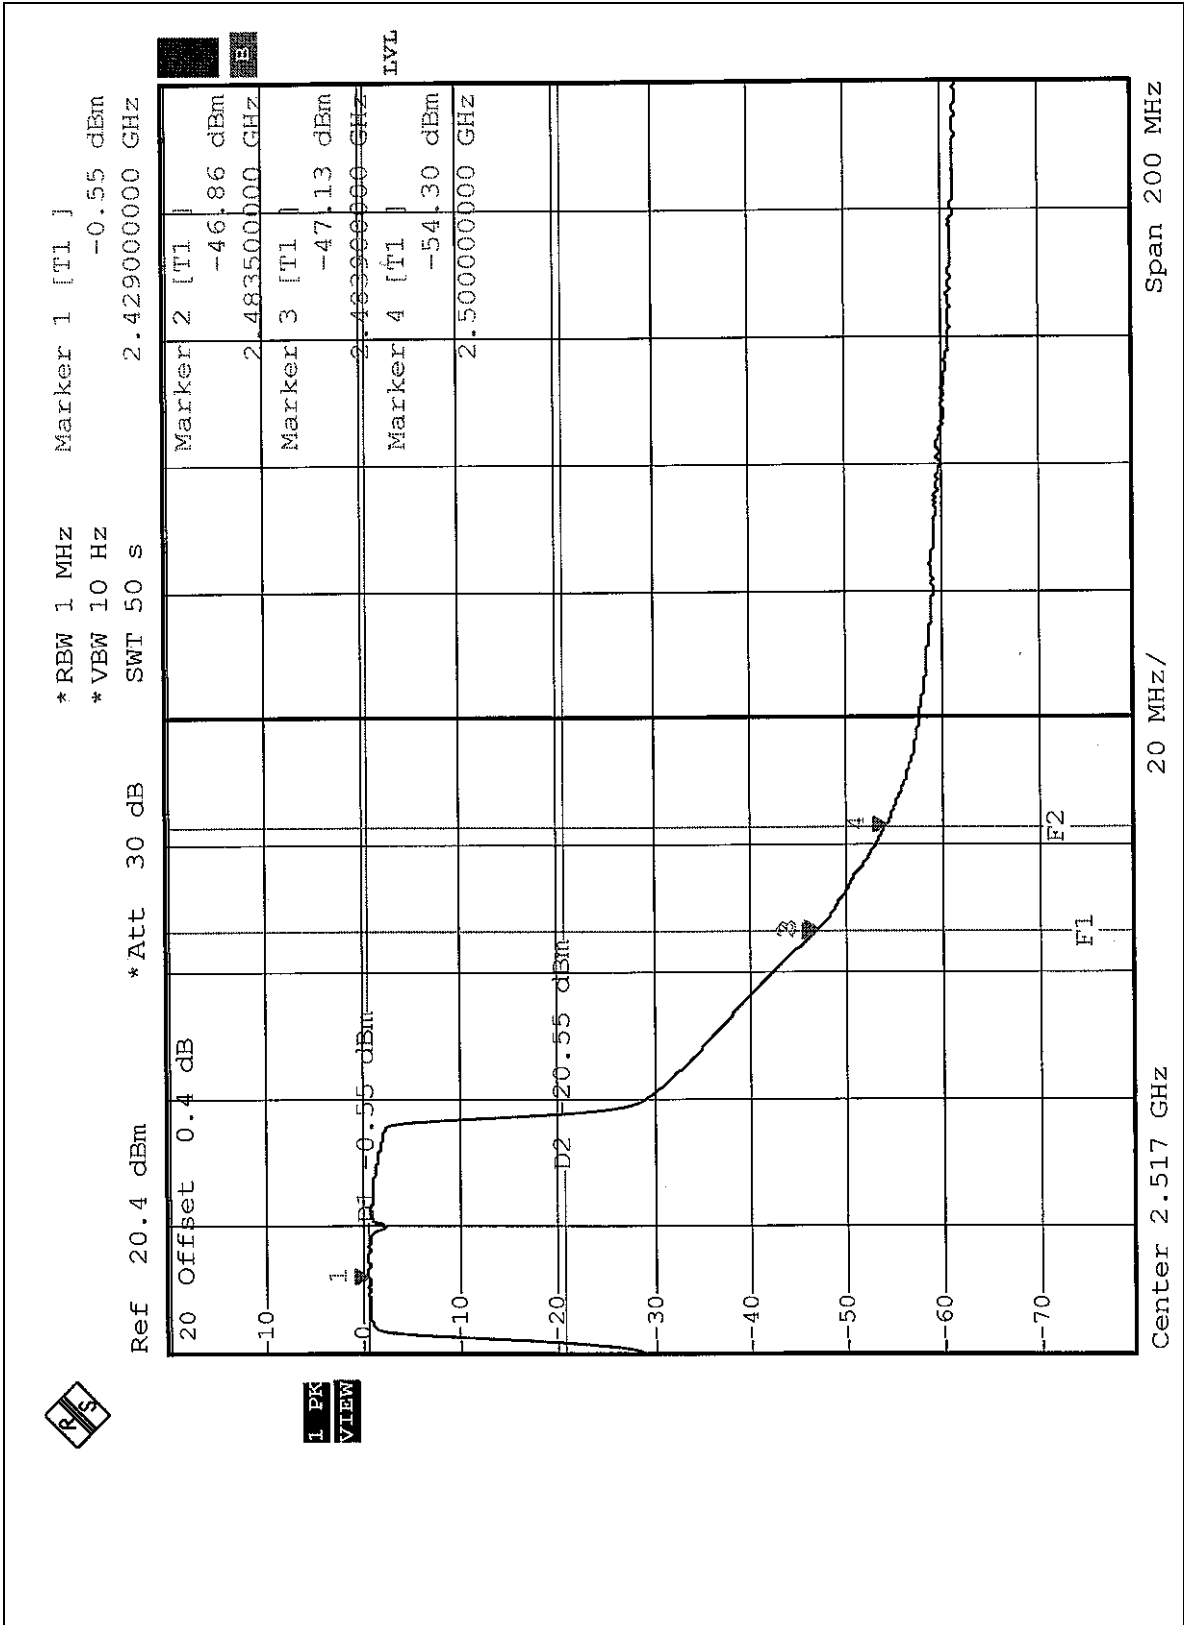



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Chip antenna without any connector. And the maximum Gain of this antenna is 2.0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION



CONDUCTED EMISSION TEST
(Test Mode 1)





(Test Mode 2)



RADIATED EMISSION TEST (Test Mode 1)

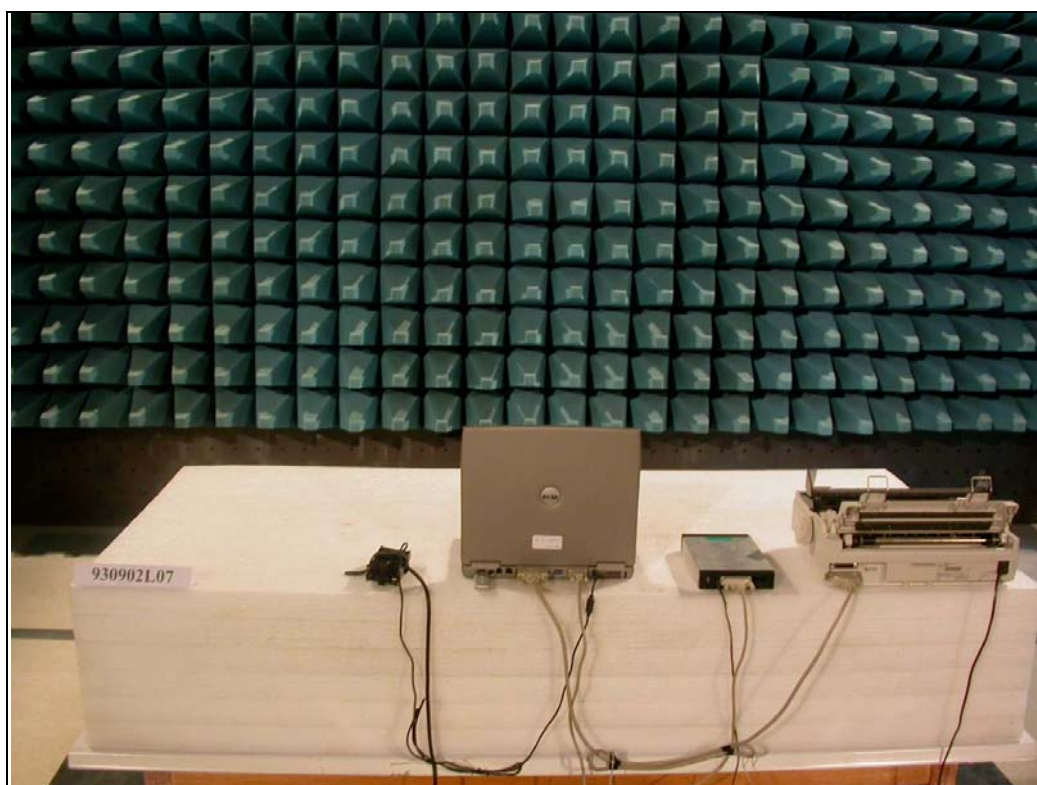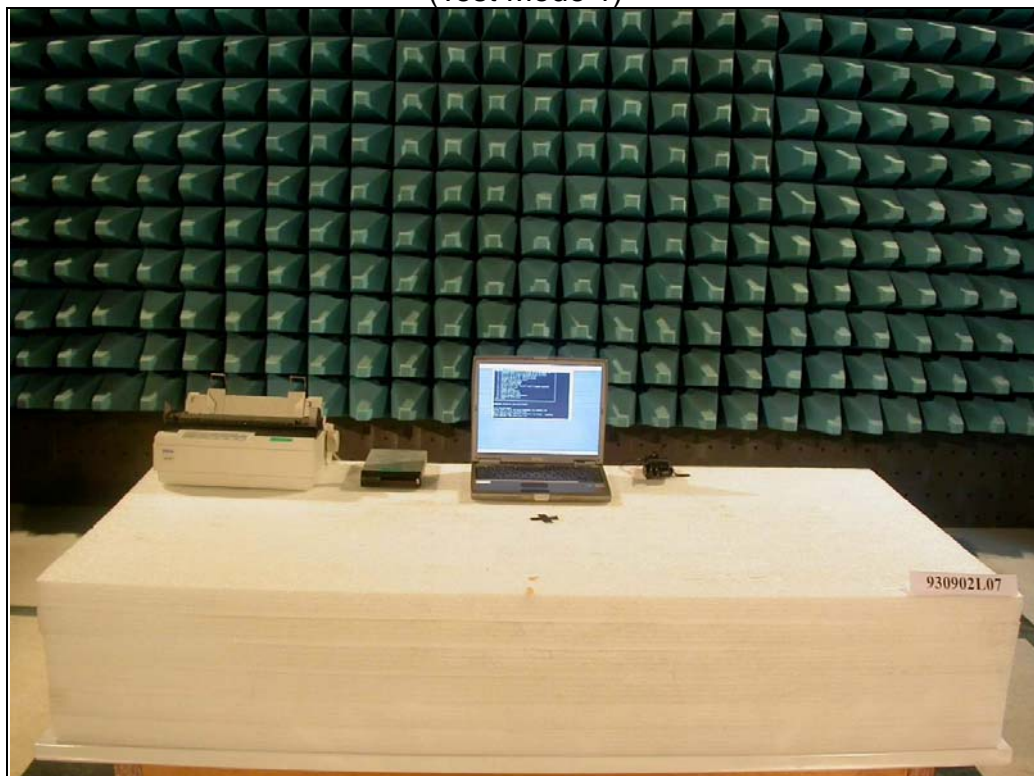

(Test Mode 2)

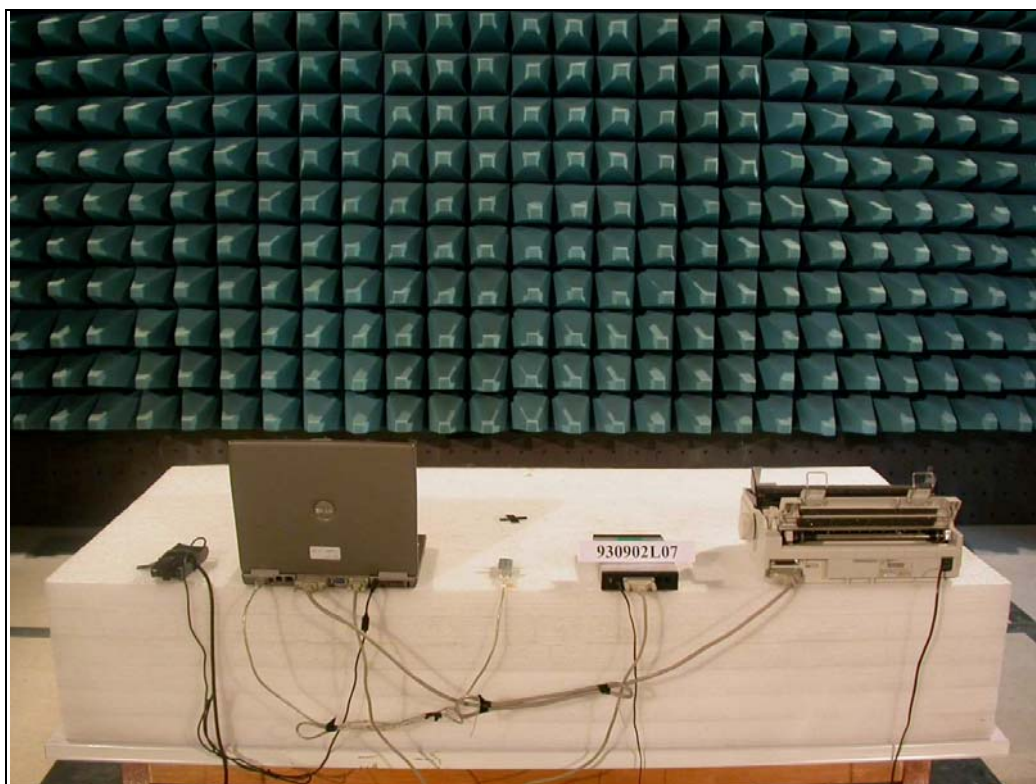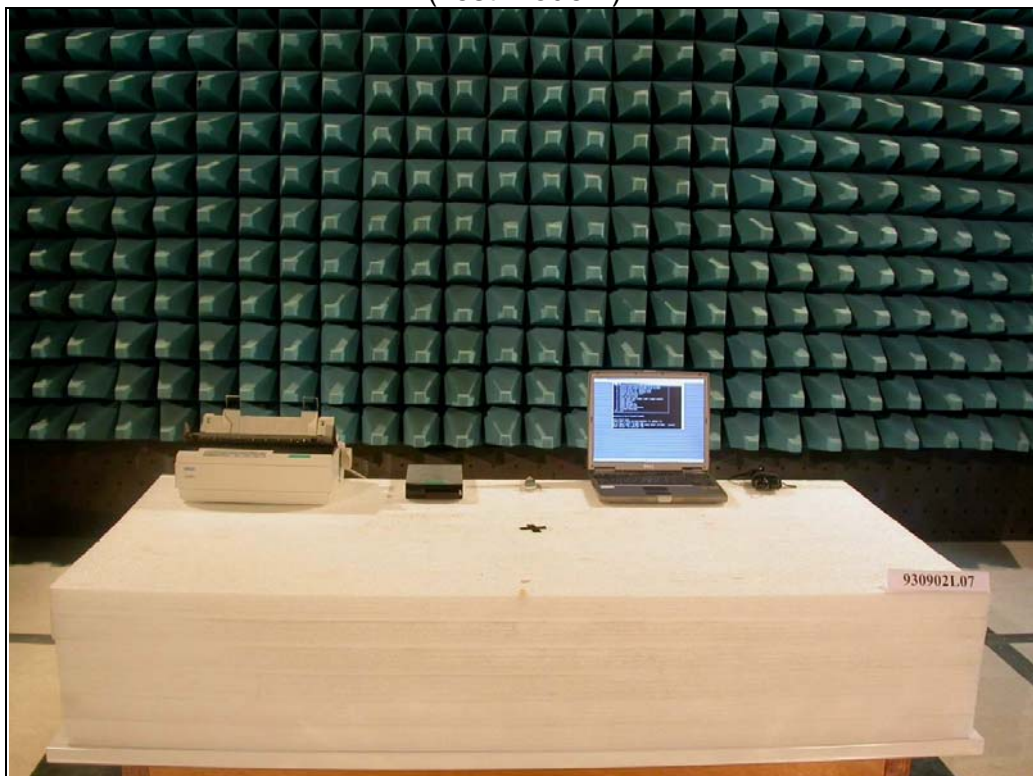



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.5