

Client **Auden**

**CALIBRATION CERTIFICATE**

Object(s) **EX3DV3 - SN:3519**

Calibration procedure(s) **QA CAL-01.v2  
 Calibration procedure for dosimetric E-field probes**

Calibration date: **March 19, 2004**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS, No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Technician	
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: March 25, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

# Probe EX3DV3

SN:3519

Manufactured:	March 8, 2004
Last calibrated:	March 19, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

**DASY - Parameters of Probe: EX3DV3 SN:3519**

## Sensitivity in Free Space

Diode Compression<sup>A</sup>

NormX	0.78 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	96	mV
NormY	0.79 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	96	mV
NormZ	0.73 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	96	mV

## Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

## Boundary Effect

Head                      900 MHz      Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	2.4	0.3
SAR <sub>be</sub> [%]	With Correction Algorithm	0.1	0.4

Head                      1800 MHz      Typical SAR gradient: 10 % per mm

Sensor to Surface Distance		2.0 mm	3.0 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	4.6	2.6
SAR <sub>be</sub> [%]	With Correction Algorithm	0.2	0.5

## Sensor Offset


Probe Tip to Sensor Center                      1.0      mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.




<sup>A</sup> numerical linearization parameter: uncertainty not required

# Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)


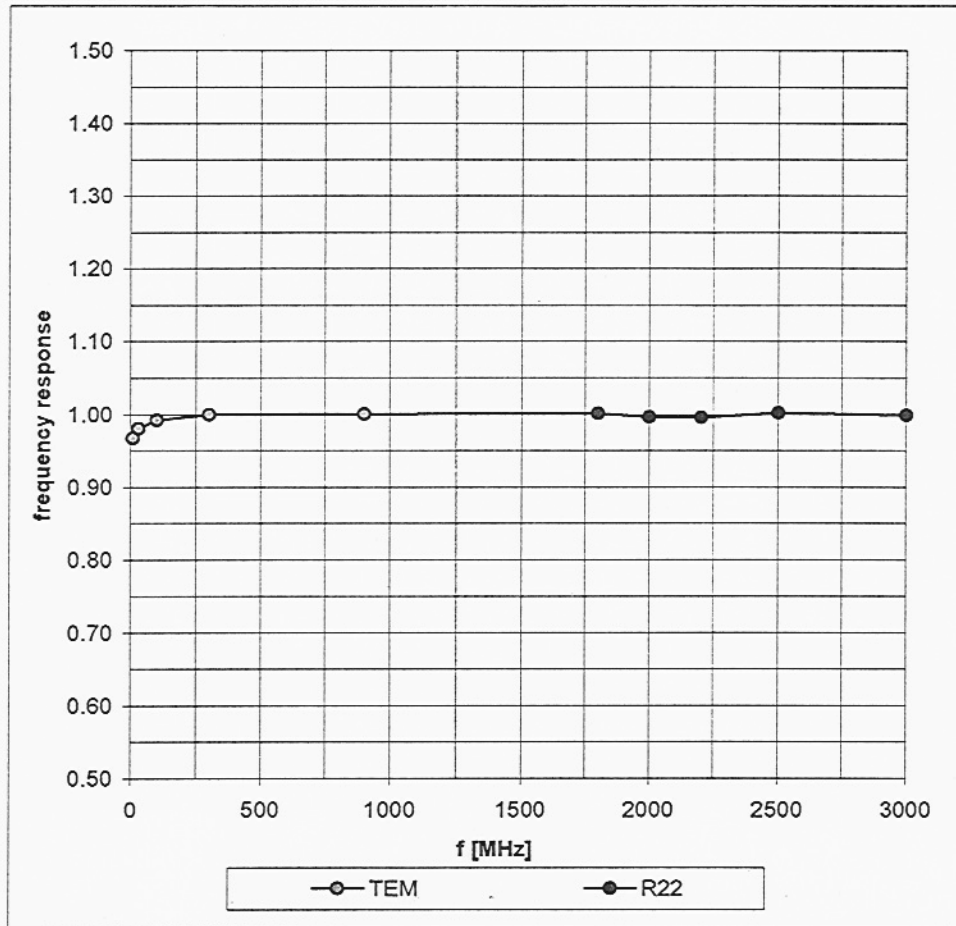


### Receiving Pattern ( $\phi$ ) , $\theta = 0^\circ$

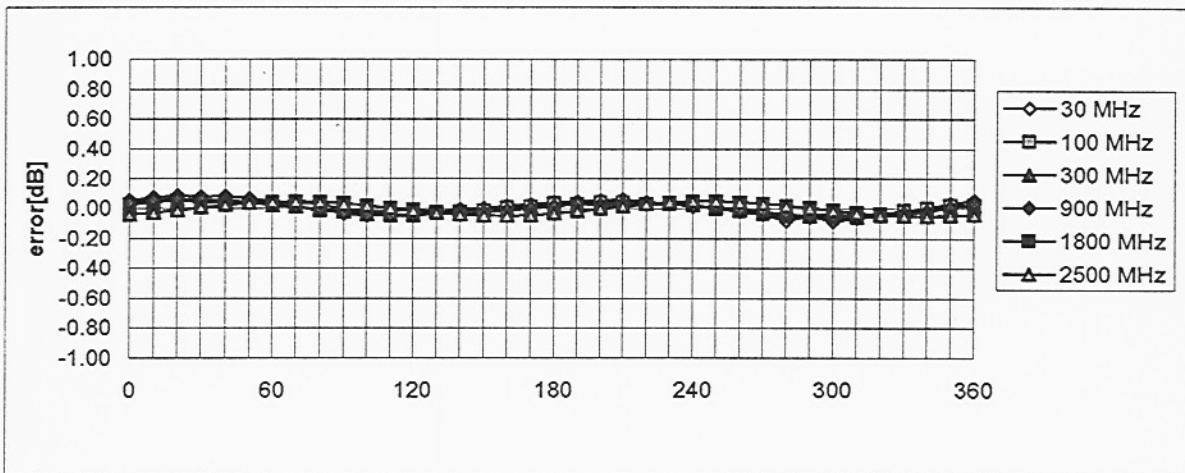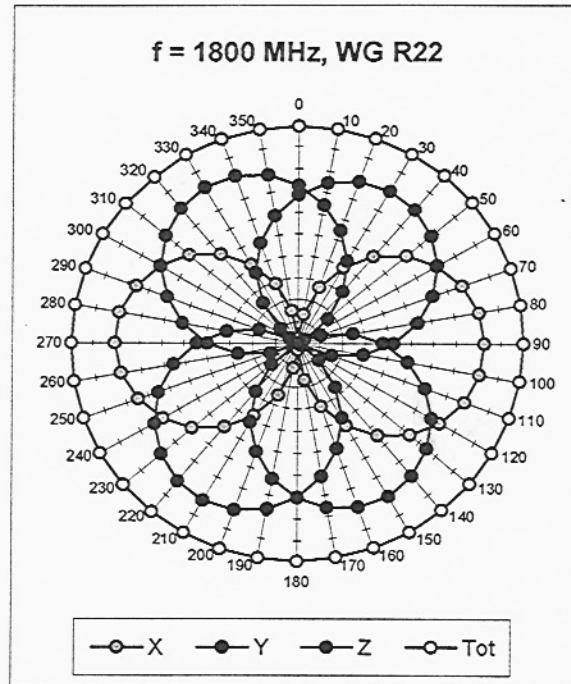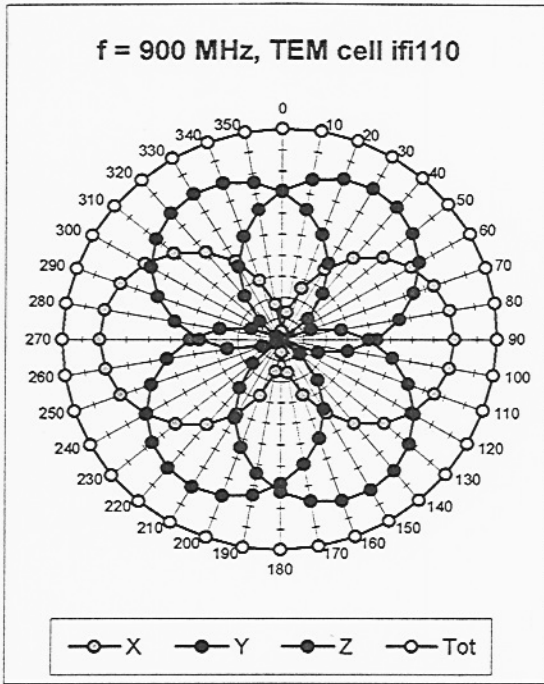

**Axial Isotropy Error <math>\lt; \pm 0.2 \text{ dB}</math>**



### Dynamic Range f(SAR<sub>head</sub>) ( Waveguide R22 )

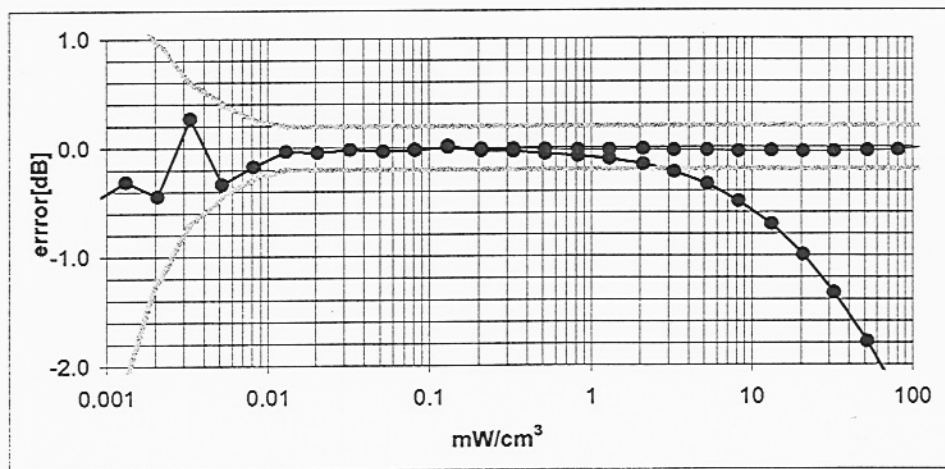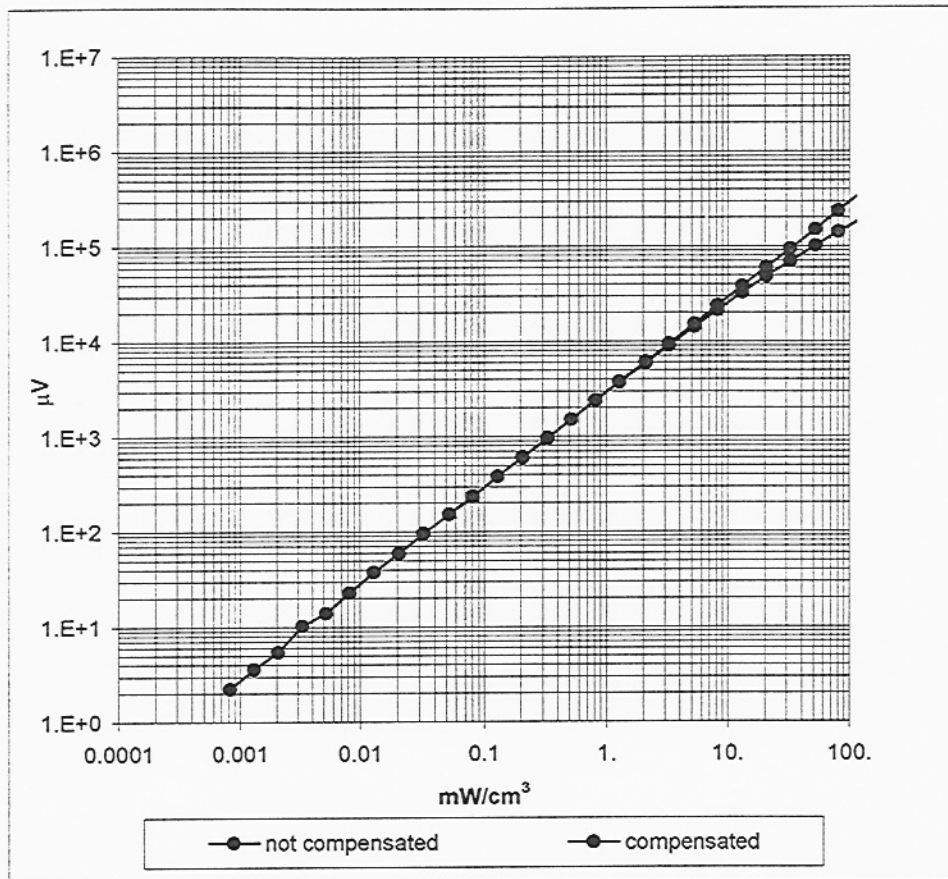

Probe Linearity <  $\pm 0.2$  dB



## Conversion Factor Assessment

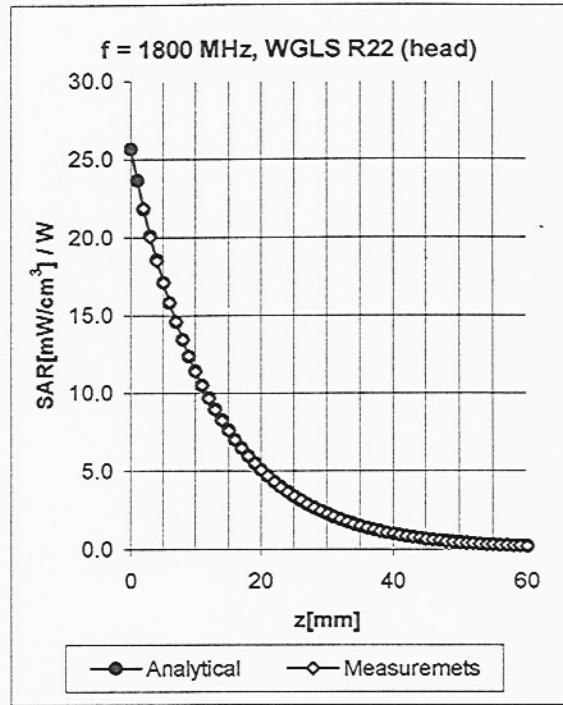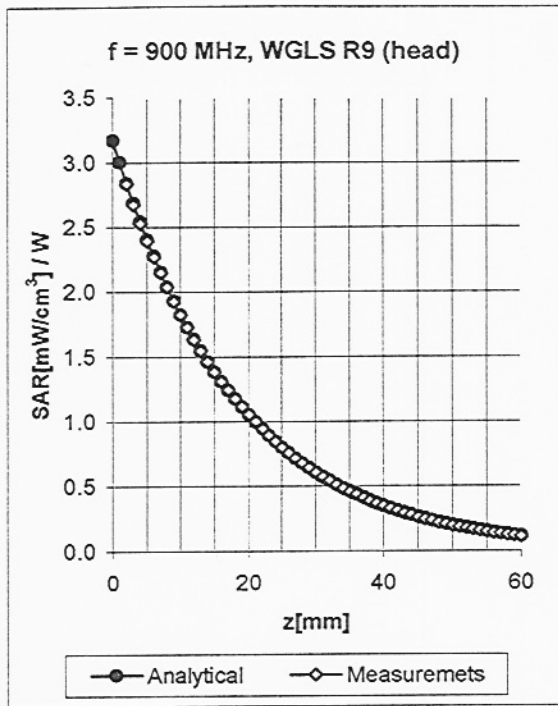


f [MHz]	Validity [MHz] <sup>b</sup>	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	800-1000	Head	41.5 ± 5%	0.97 ± 5%	0.30	0.80	10.3 ± 11.3% (k=2)
1800	1710-1910	Head	40.0 ± 5%	1.40 ± 5%	0.08	3.04	8.84 ± 11.7% (k=2)
5200	4940-5460	Head	36.0 ± 5%	4.66 ± 5%	0.45	1.80	4.80 ± 21.8% (k=2)
5500	5225-5775	Head	35.6 ± 5%	4.96 ± 5%	0.45	1.80	4.40 ± 22.6% (k=2)
5800	5510-6090	Head	35.3 ± 5%	5.27 ± 5%	0.45	1.80	4.34 ± 23.4% (k=2)
5200	4940-5460	Body	49.0 ± 5%	5.30 ± 5%	0.45	1.90	4.21 ± 21.8% (k=2)
5500	5225-5775	Body	48.6 ± 5%	5.65 ± 5%	0.43	1.90	4.00 ± 22.6% (k=2)
5800	5510-6090	Body	48.2 ± 5%	6.00 ± 5%	0.43	1.90	3.82 ± 23.4% (k=2)

<sup>b</sup> The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.

### Deviation from Isotropy in HSL

Error ( $\theta, \phi$ ),  $f = 900$  MHz

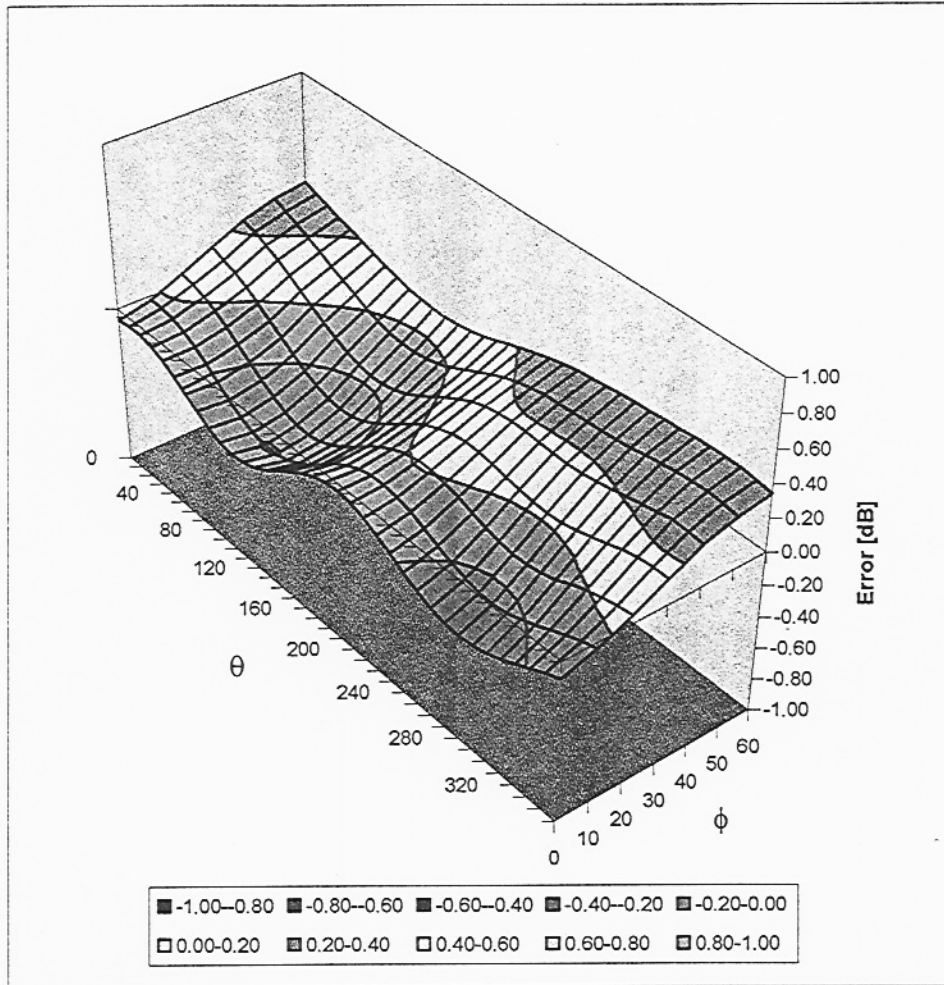

Spherical Isotropy Error  $< \pm 0.4$  dB