



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

54Mbps Wireless Access Point

Brand Name: NETGEAR

Model Number: WG602 v2

FCC ID: PY3WG602V2

Report No: B30806203-RP

Issue Date: September 1, 2003

Prepared for

NETGEAR, INC.

**4500 Great America Parkway, Santa Clara,
CA 95054, U.S.A.**

Prepared by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS AND LISTING	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1 SUPPORT EQUIPMENT	10
7. FCC PART 15.247 REQUIREMENTS	11
7.1 6DB BANDWIDTH	11
7.2 PEAK POWER	17
7.3 BAND EDGES MEASUREMENT	23
7.4 PEAK POWER SPECTRAL DENSITY	32
7.5 RADIO FREQUENCY EXPOSURE	38
7.6 RADIATED EMISSIONS	40
7.7 POWERLINE CONDUCTED EMISSIONS	61



1. TEST RESULT CERTIFICATION

Applicant: NETGEAR, INC.
 4500 Great America Parkway, Santa Clara,
 CA 95054, U.S.A.

Equipment Under Test: 54Mbps Wireless Access Point

Trade Name: NETGEAR

Model: WG602 v2

Model Difference: N/A

Report Number: B30806203-RP

Date of Test: August 19 ~ 26, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Jonson Lee
 Director of Linkou Laboratory
 Compliance Certification Services Inc.

Eric Wong
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	54Mbps Wireless Access Point
Trade Name	NETGEAR
Model Number	WG602 v2
FCC ID	PY3WG602V2
Model Discrepancy	N/A
Power Rating	Input: 120Vac, 60Hz Output: +12 Vdc, 1.2A
Frequency Range	2412 ~ 2462 MHz (IEEE 80211 b/g)
Modulation Technique	DSSS (CCK; DQPSK; DBPSK) for IEEE 802.11b, OFDM for IEEE 802.11g
Transmitting Speed	1,2,5.5,6,9,12,18,24,36,48 and 54Mbps with Auto Rate Sensing
Number of Channels	11
Antenna Designation	1. Dipole Antenna with R-SMA connector non-user changeable. (TX and RX Diversity) 2. PIFA Antenna (RX only)

Note: This submittal(s) (test report) is intended for FCC ID: PY3WG602V2 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and 15.407.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT (54Mbps Wireless Access Point) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.247 under the FCC Rules Part 15 Subpart C. The composite system (Digital device) is compliance with the Subpart B is authorized under the DoC procedure.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE 802.11b: Channel 1 (2412MHz), Channel 6 (2437MHz) and Channel 11 (2462MHz) with 11Mbps highest data rate (worst case) are chosen for the final testing.

IEEE 802.11g: Channel 1 (2412MHz), Channel 6 (2437MHz) and Channel 11 (2462MHz) with 54Mbps which is the highest and worst-case data rate are chosen for full testing.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.








Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: 93105 and 90471).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS


Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS 3548 IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1, EN 300 328-2, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS 3548, CNS 13022-1, IEC 1000-4-3/4/5/6/8/11, CNS 13022-2/3	 0363 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SUPPORT EQUIPMENT

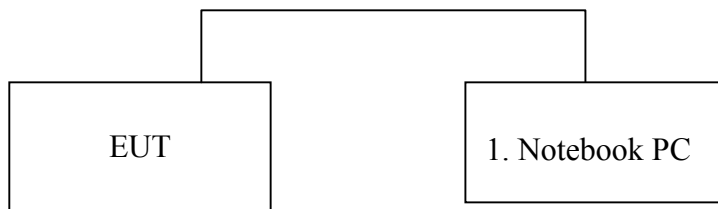

Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
Notebook PC	DELTA	DN-715	FCC DoC	CA2A304500007	N/A	Unshielded, 1.8m

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT


For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	4/28/2004
Low Loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100kHz, VBW = RBW, Span = 20MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

**TEST RESULTS***No non-compliance noted***TEST DATA****Test Mode: IEEE 802.11b**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	12270	500	-11770
Mid	2437	12270		-11770
High	2462	12800		-12300


Test Mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	15530	500	-15030
Mid	2437	15400		-14900
High	2462	15400		-14900




Test Plot

6dB bandwidth – IEEE 802.11b / Ch Low

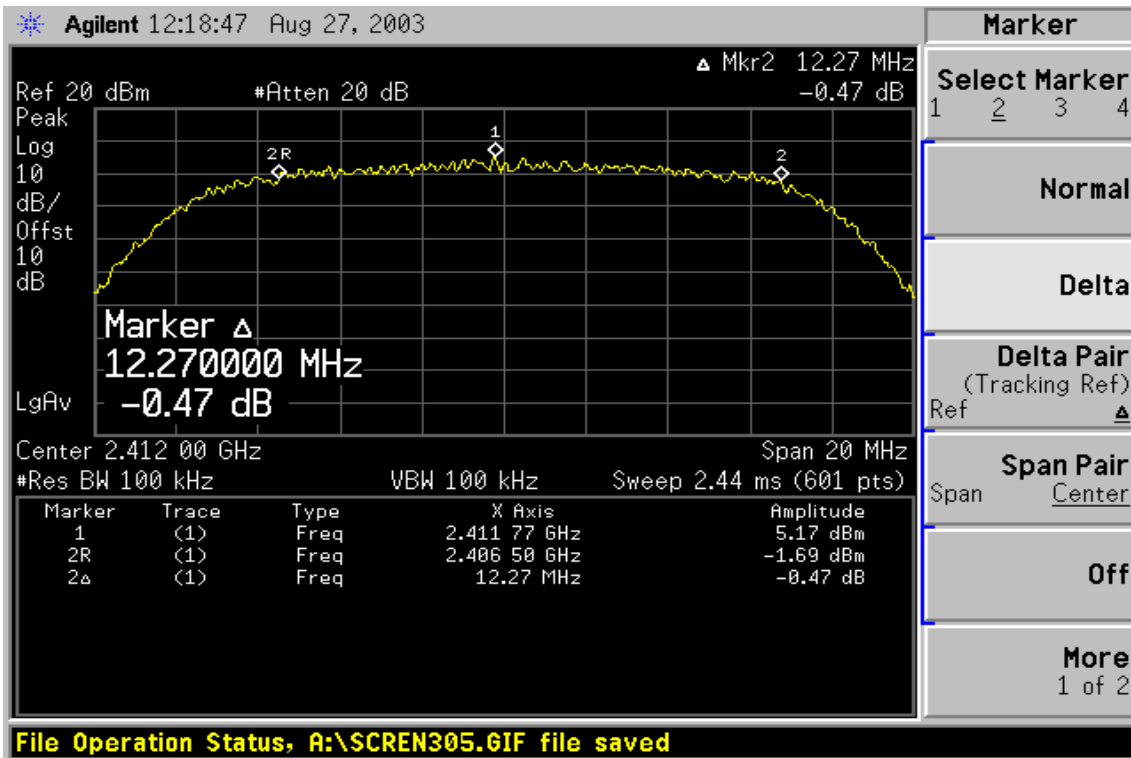


6dB bandwidth –IEEE 802.11b / Ch Mid

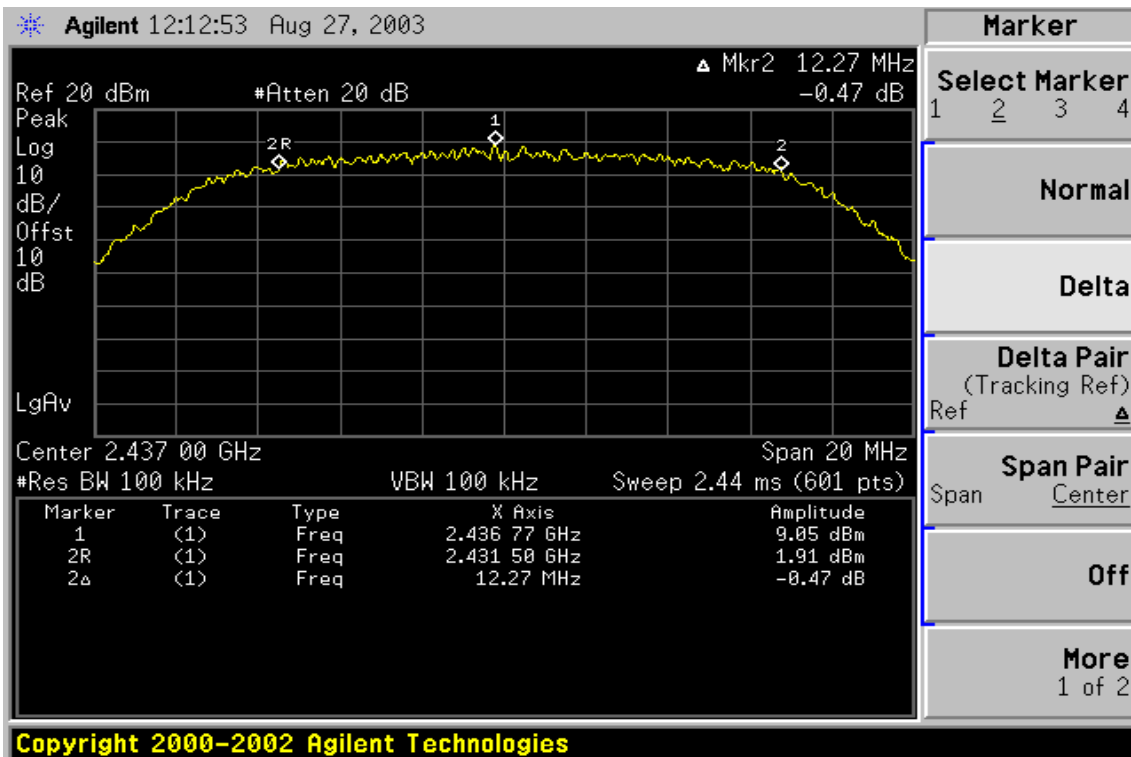




6dB bandwidth –IEEE 802.11b / Ch High

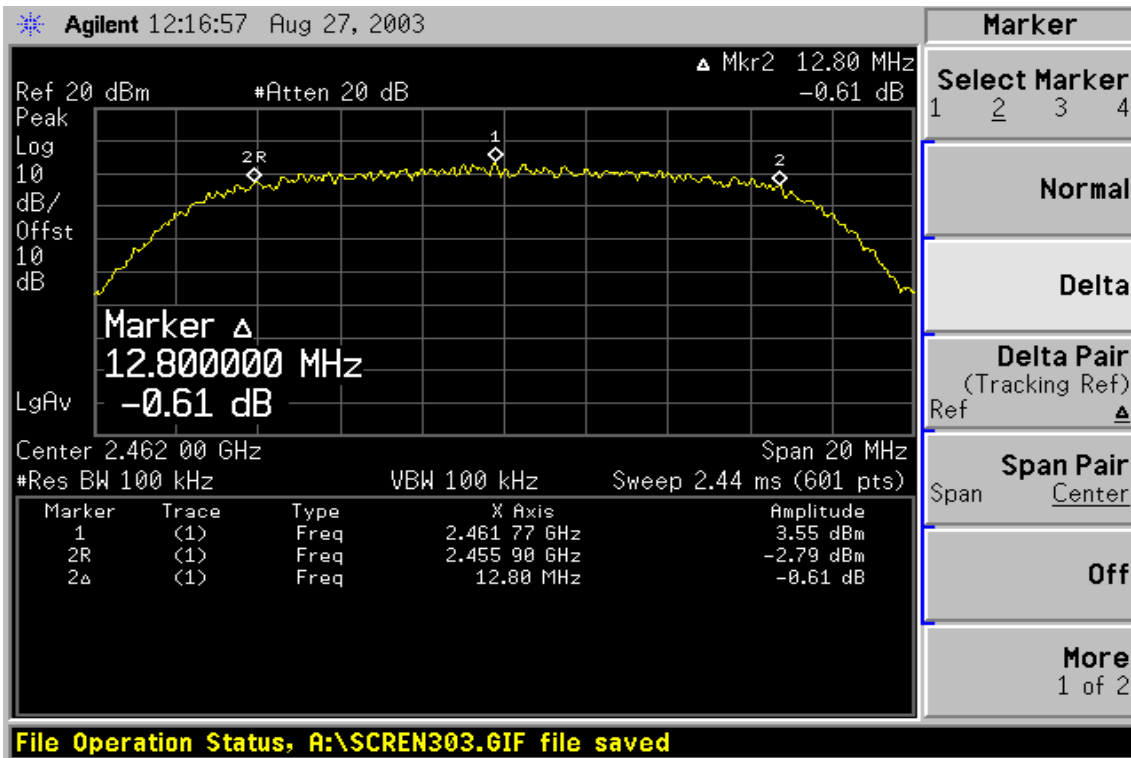




Test Plot

6dB bandwidth –IEEE 802.11g / Ch Low

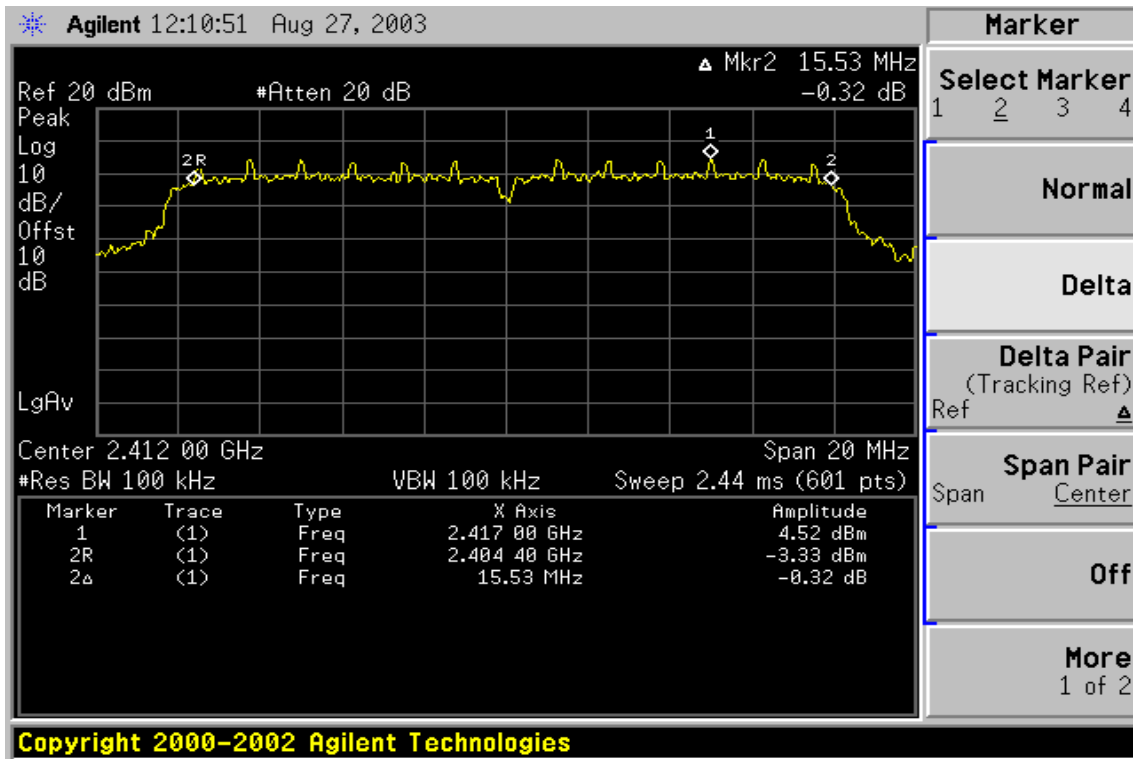


6dB bandwidth – IEEE 802.11g / Ch Mid

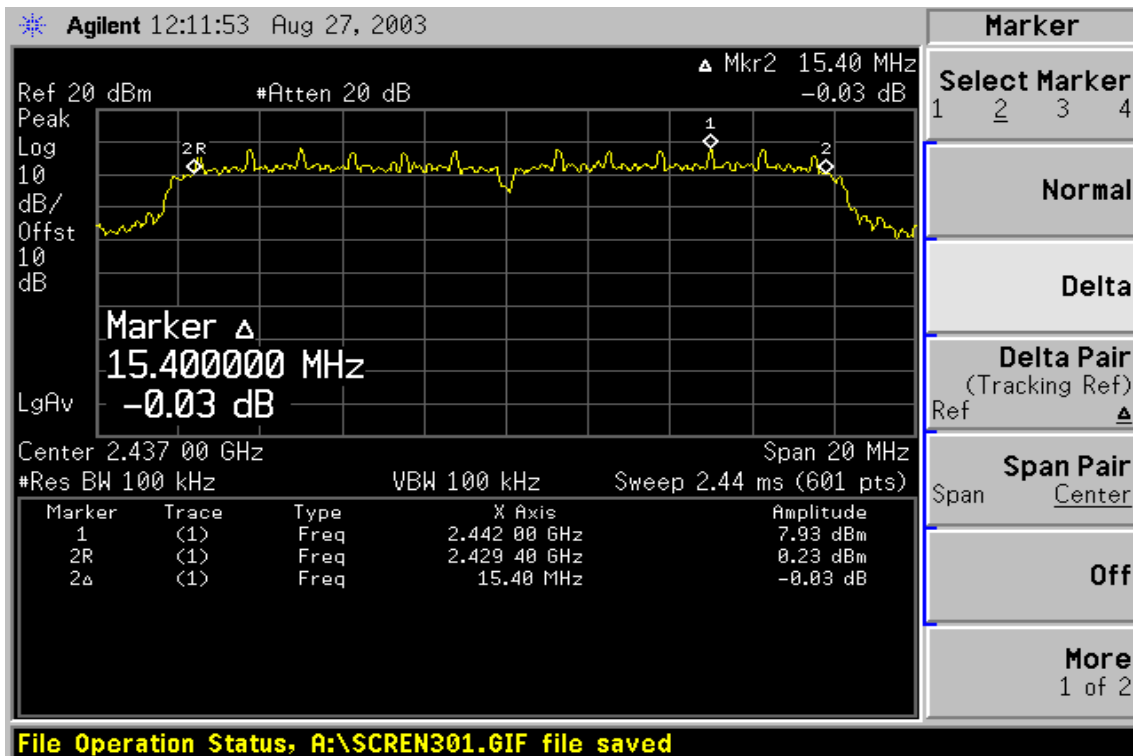



6dB bandwidth – IEEE 802.11g / Ch High

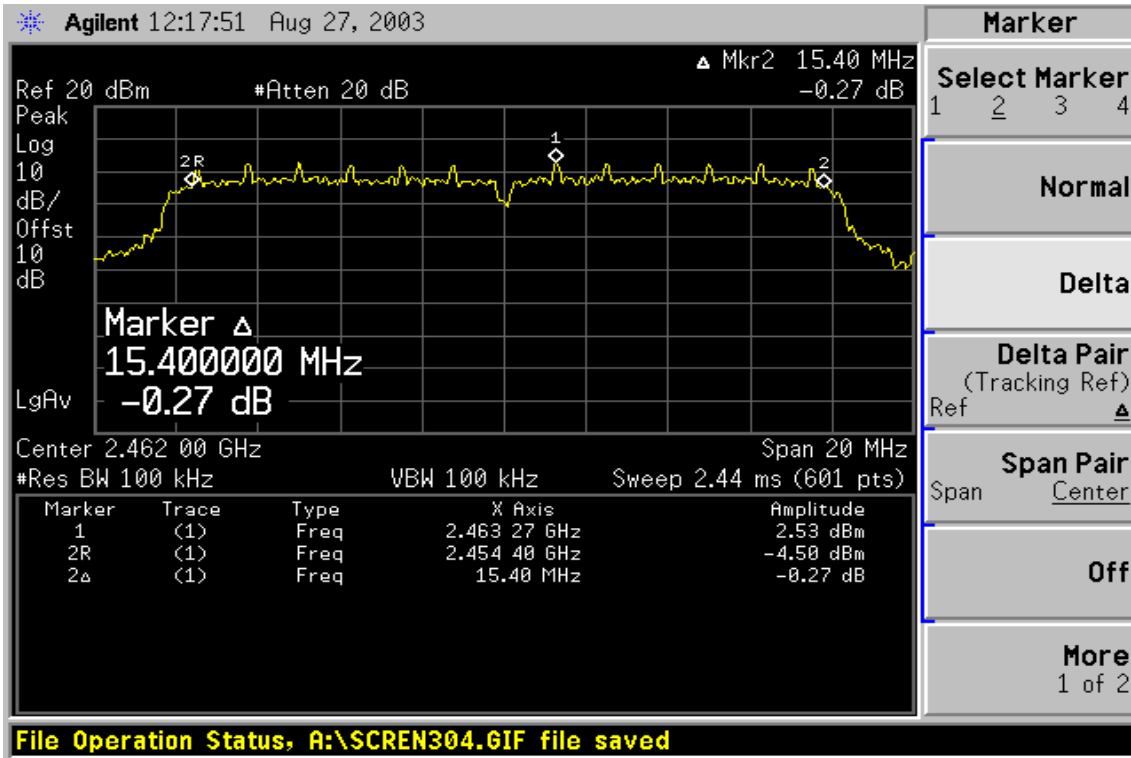



7.2 PEAK POWER LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	4/28/2004
Low Loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

**TEST RESULTS***No non-compliance noted***Test Data****Test Mode: IEEE 802.11b**

Channel	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	17.61	0.30	17.91	0.06180	1	PASS
Mid	18.02	0.30	18.32	0.06792	1	PASS
High	18.01	0.30	18.31	0.06776	1	PASS


Test Mode: IEEE 802.11g

Channel	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	18.49	0.30	18.79	0.07568	1	PASS
Mid	18.85	0.30	19.15	0.08222	1	PASS
High	18.32	0.30	18.62	0.07278	1	PASS




Test Plot

Peak power – IEEE 802.11b / Ch Low

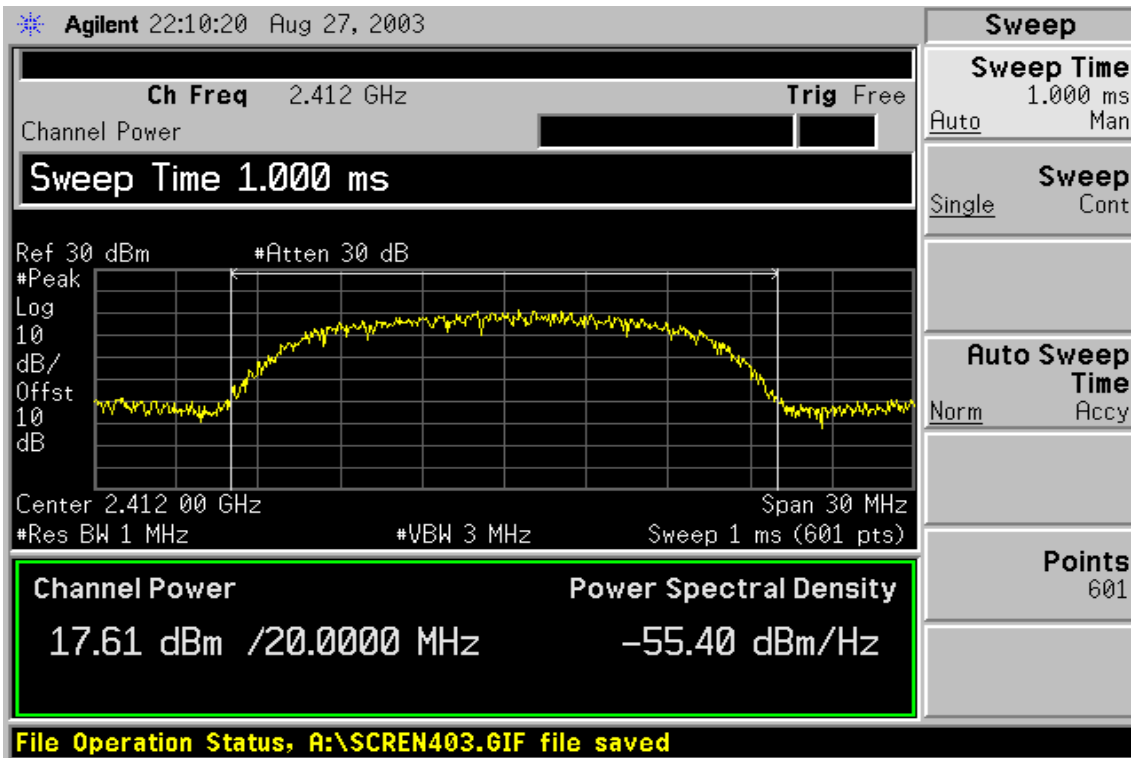


Peak power – IEEE 802.11b / Ch Mid

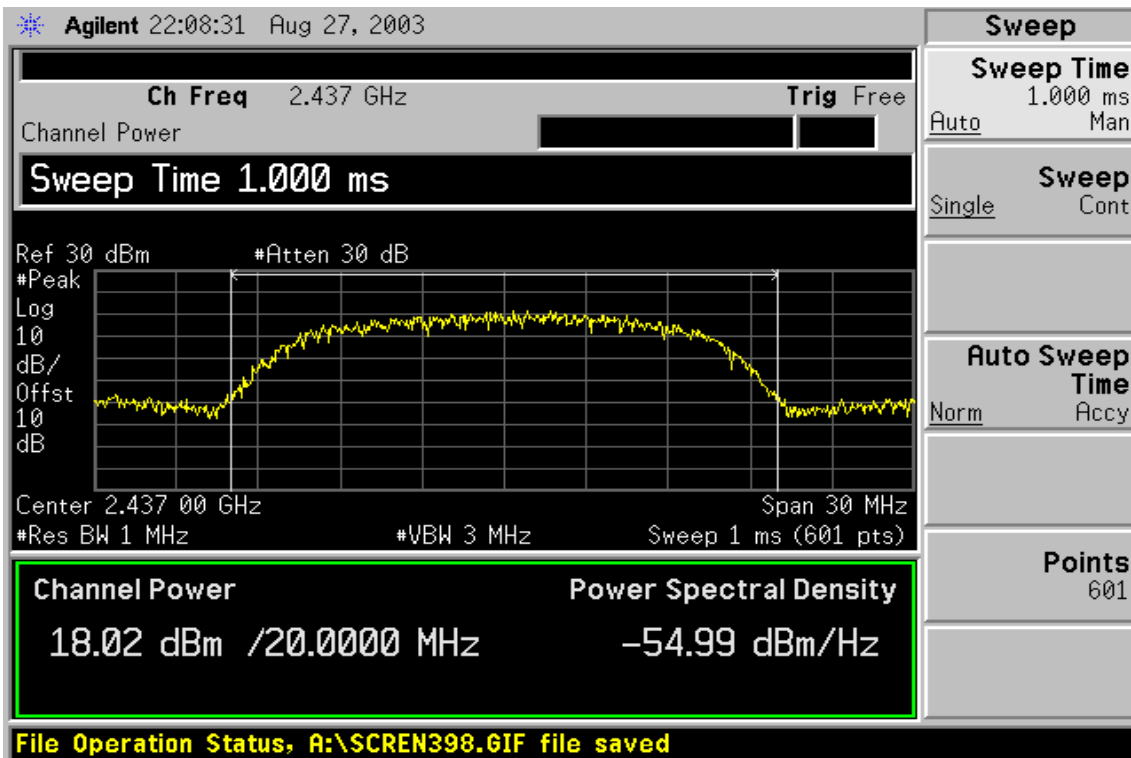




Peak power – IEEE 802.11b / Ch High

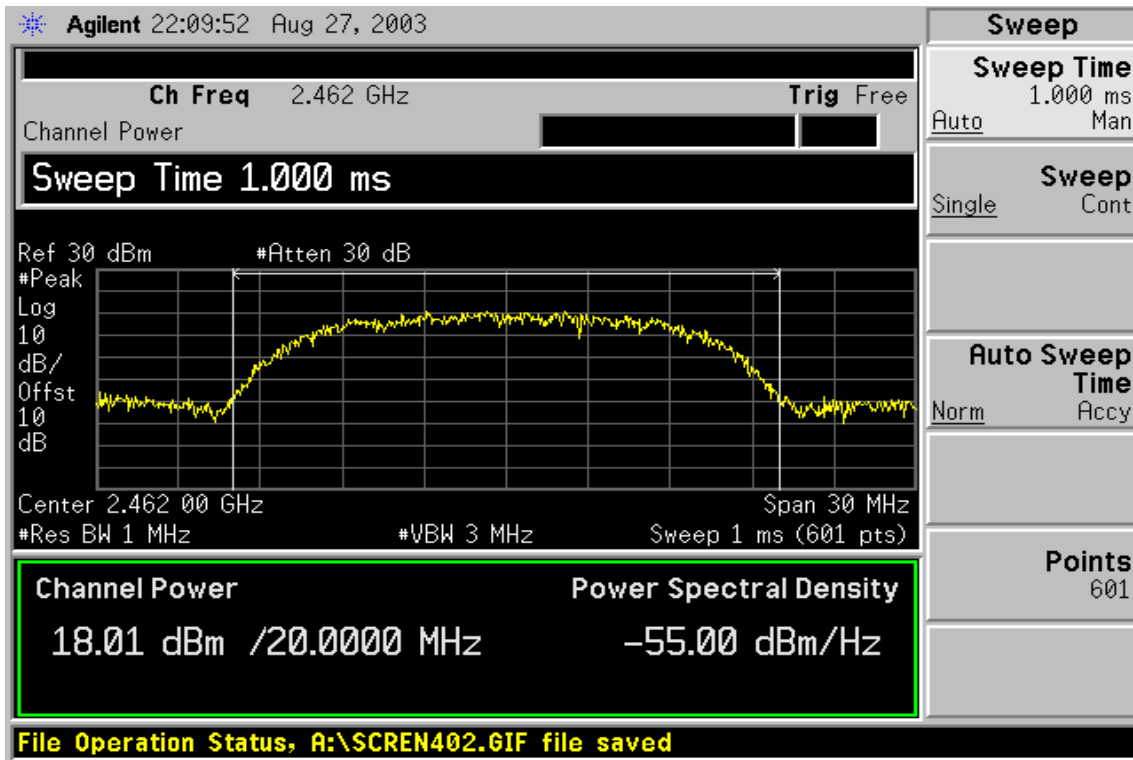




Test Plot

Peak power – IEEE 802.11g / Ch Low

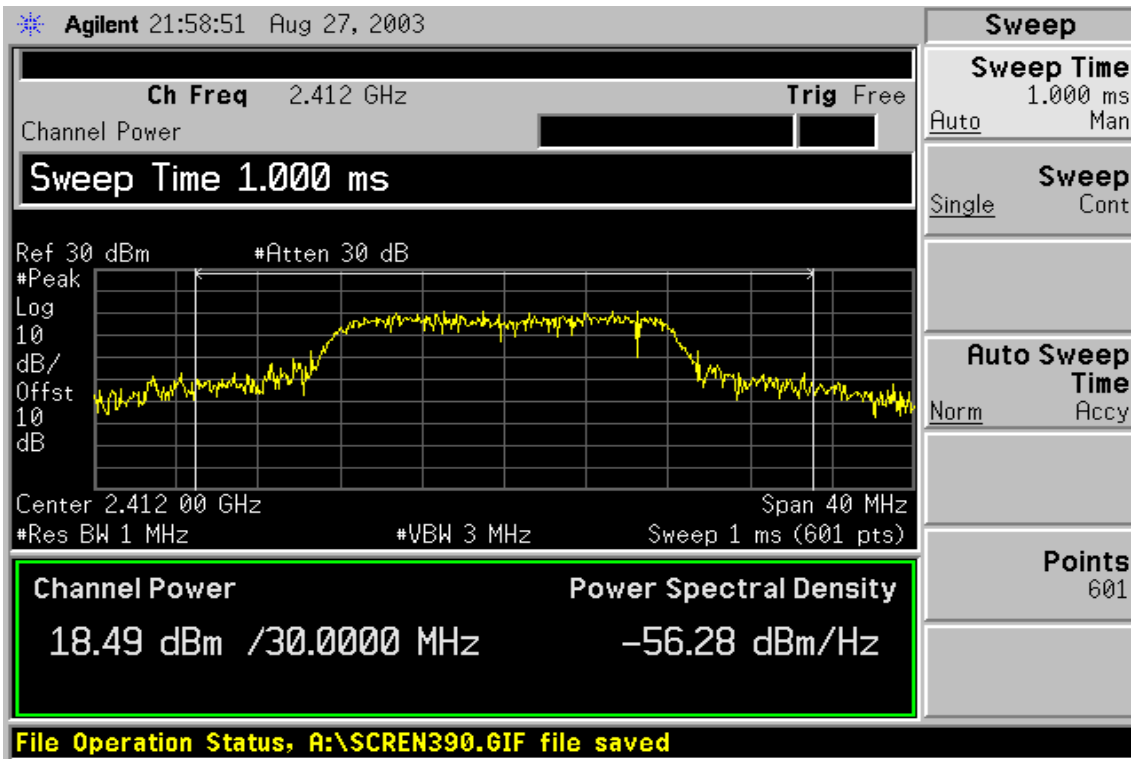


Peak power – IEEE 802.11g / Ch Mid

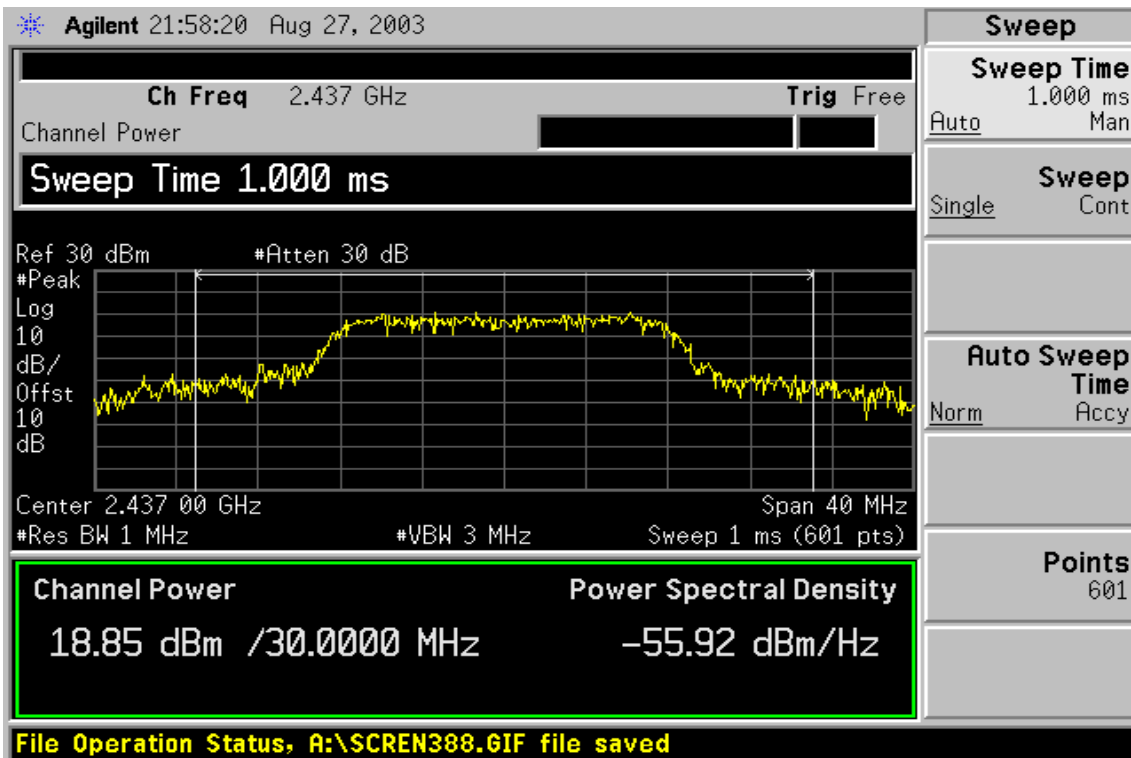



Peak power – IEEE 802.11g / Ch High

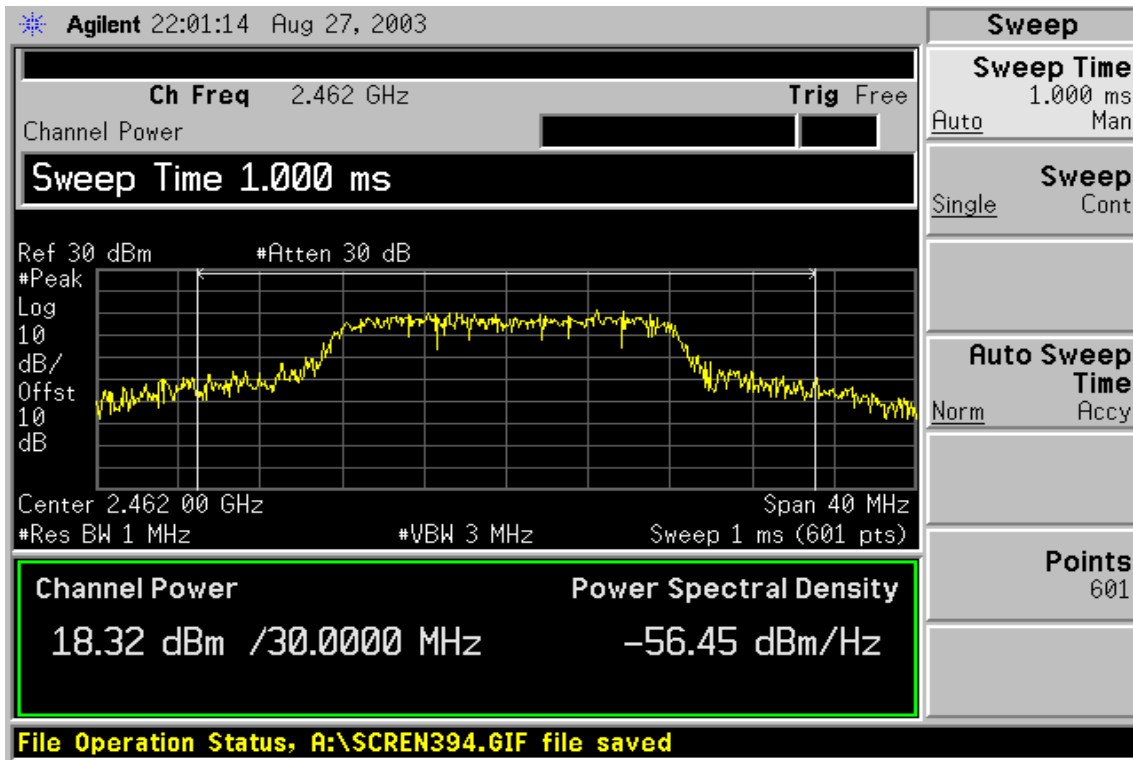

7.3 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

EQUIPMENT TYPE	MFR	Model No.	Serial No.	Cal. Due.
Spectrum Analyzer	Agilent	E4446A	US42510252	4/27/2004
Spectrum Analyzer	R&S	FSP30	1093.4495.30	7/22/2004
Low Loss Cable	Huber + Suhner	Sucoflex 104	N/A	N/A
Horn Antenna	EMCO	3115	N/A	2/24/2004

TEST CONFIGURATION

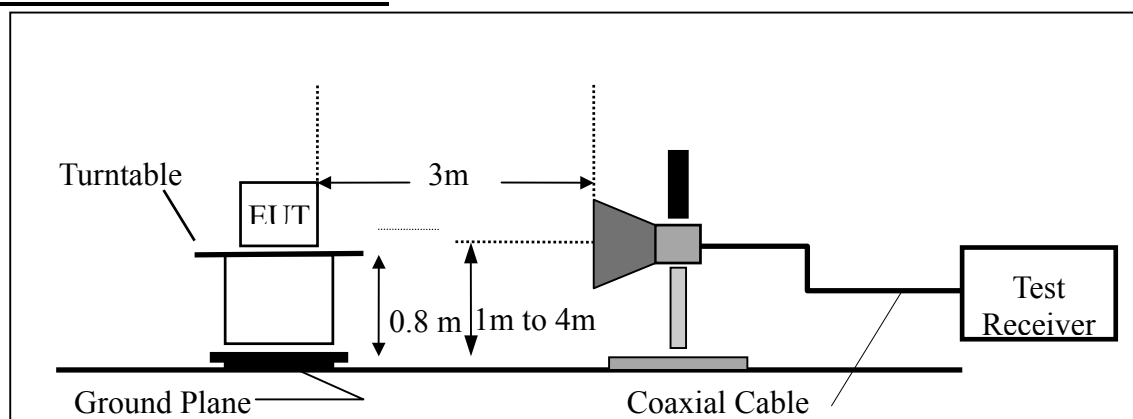

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.



Out of Band Test Data (Test Mode: IEEE 802.11b / CH-Low)

Detector mode: Peak


Polarity: Vertical

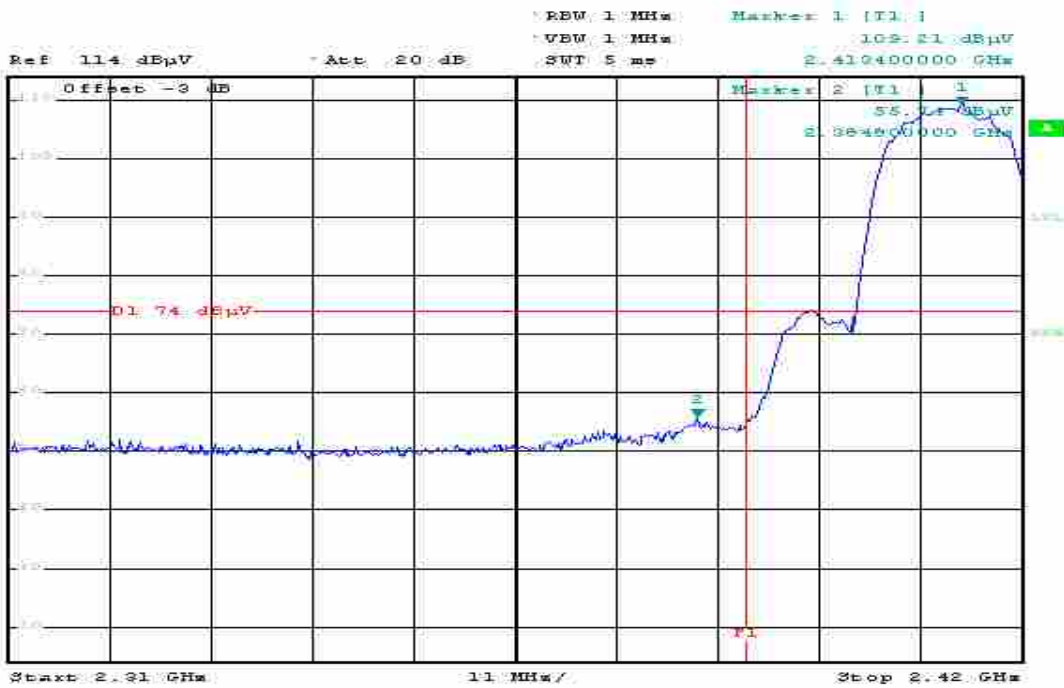

Date: 25.AUG.2003 17:37:19

Detector mode: Average

Polarity: Vertical

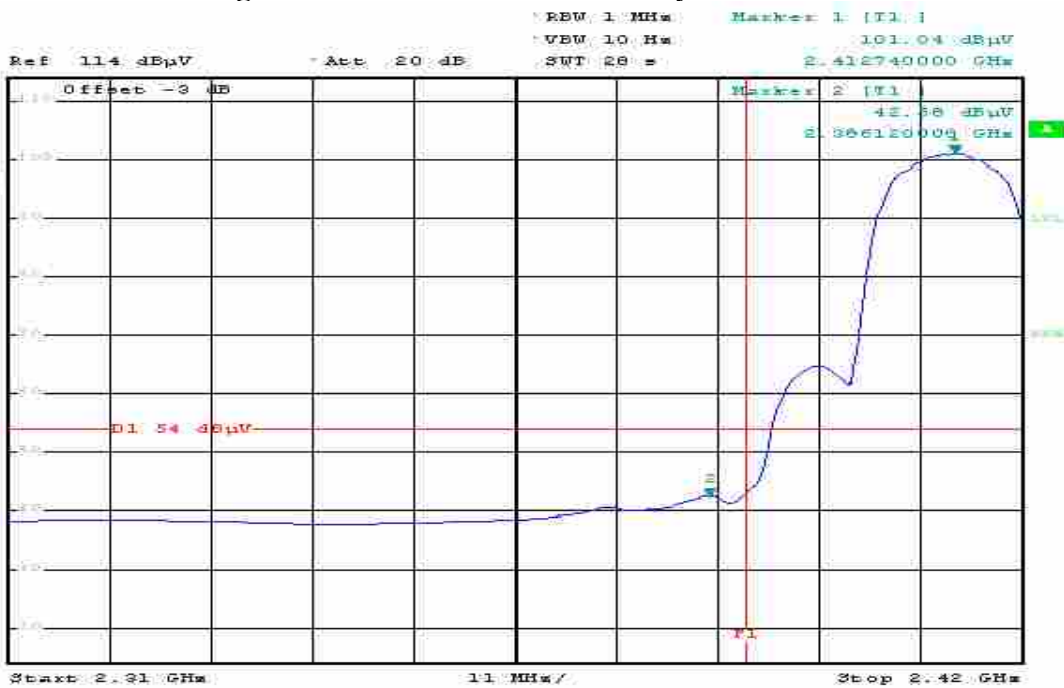


Date: 25.AUG.2003 17:39:20



Detector mode: Peak


Polarity: Horizontal

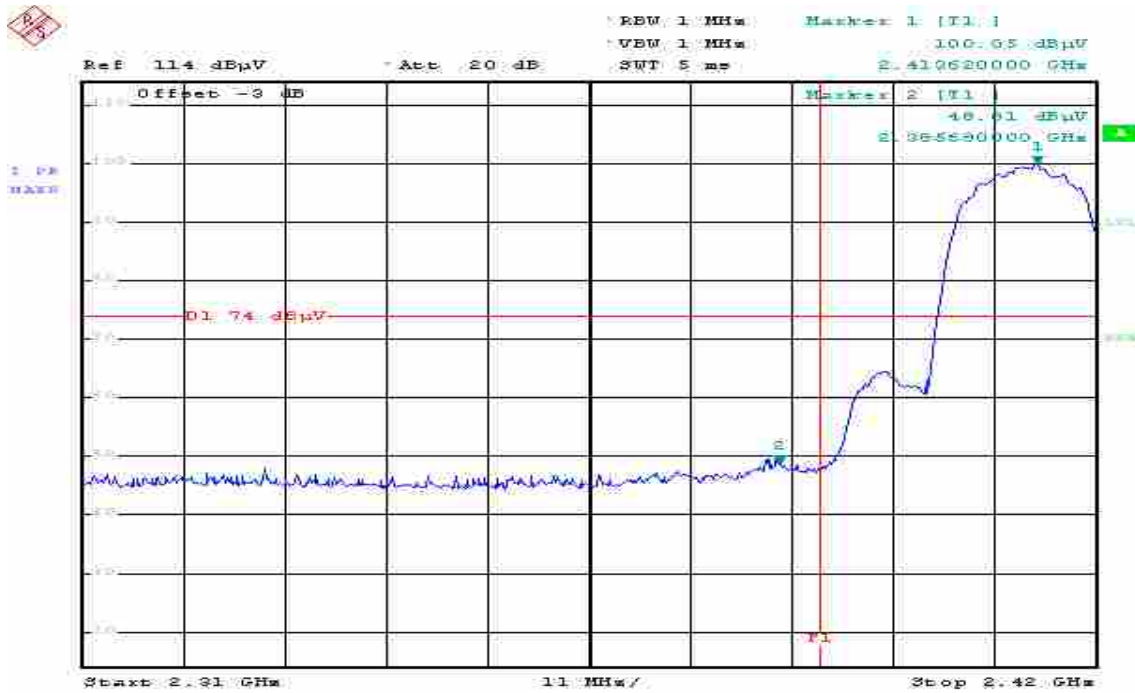

Date: 25.AUG.2003 17:41:22

Detector mode: Average

Polarity: Horizontal

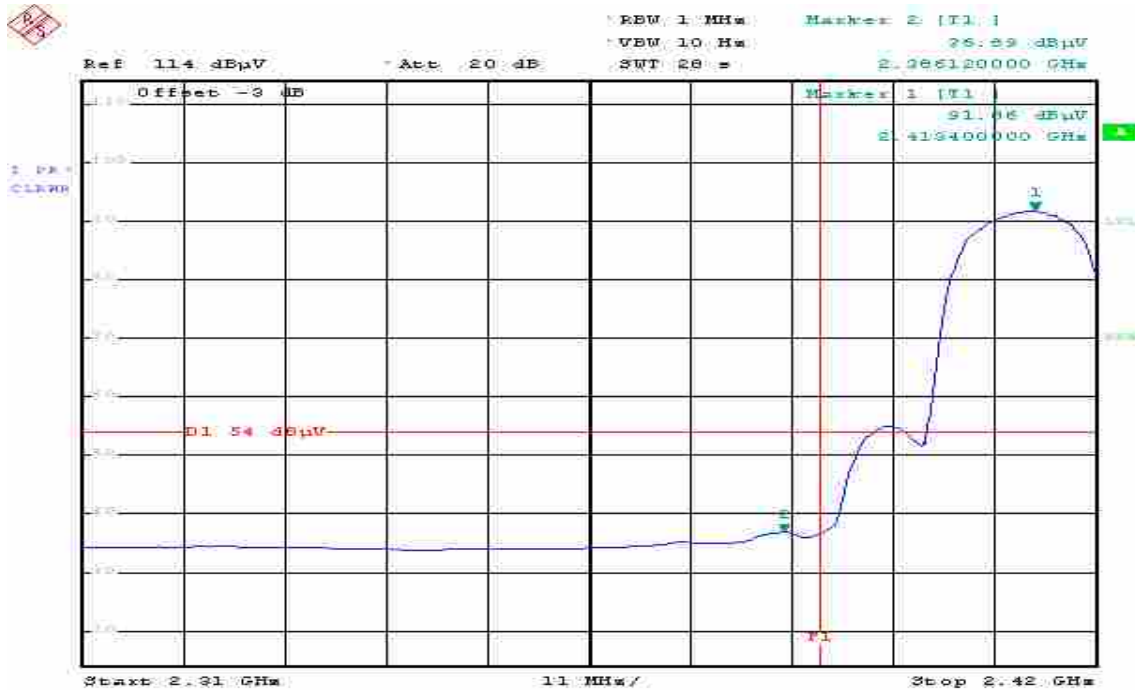


Date: 25.AUG.2003 17:40:38



Out of Band Test Data (Test Mode: IEEE 802.11b / CH-High)

Detector mode: Peak


Polarity: Vertical

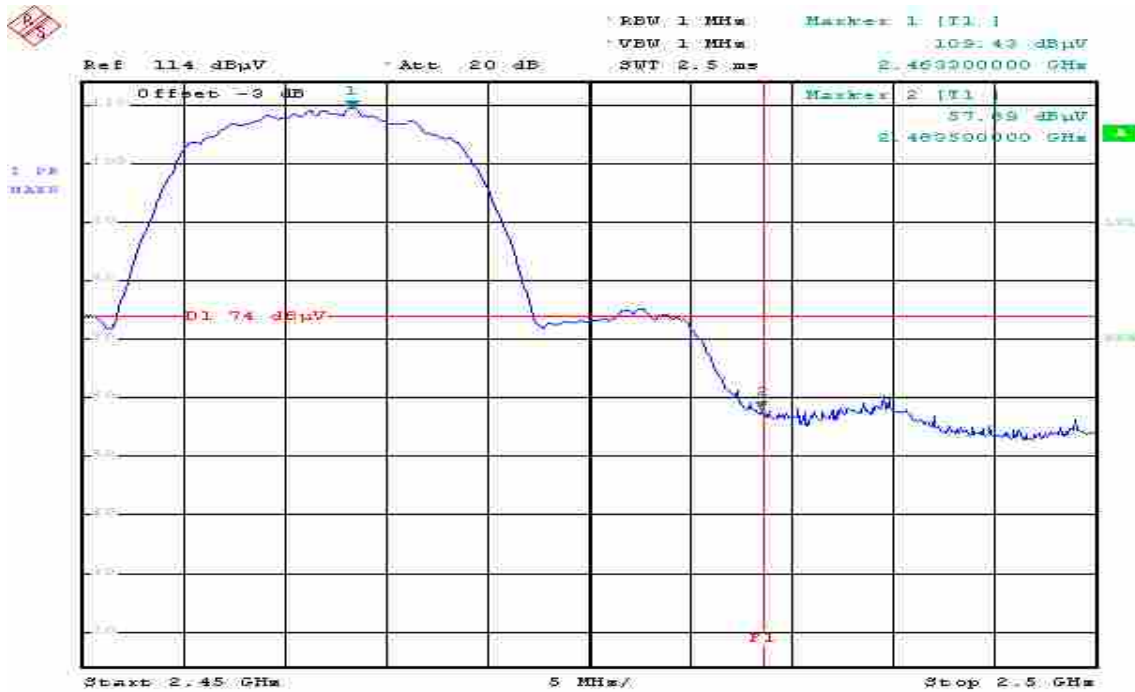

Date: 25.AUG.2003 16:04:20

Detector mode: Average

Polarity: Vertical

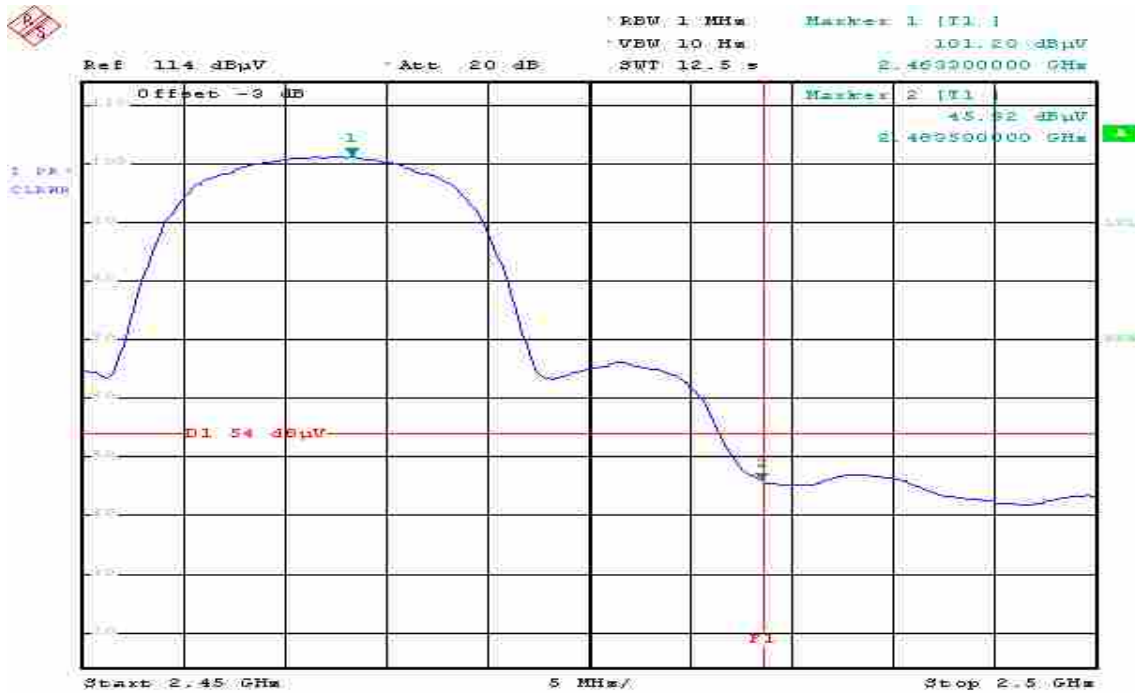


Date: 25.AUG.2003 16:09:33



Detector mode: Peak


Polarity: Horizontal

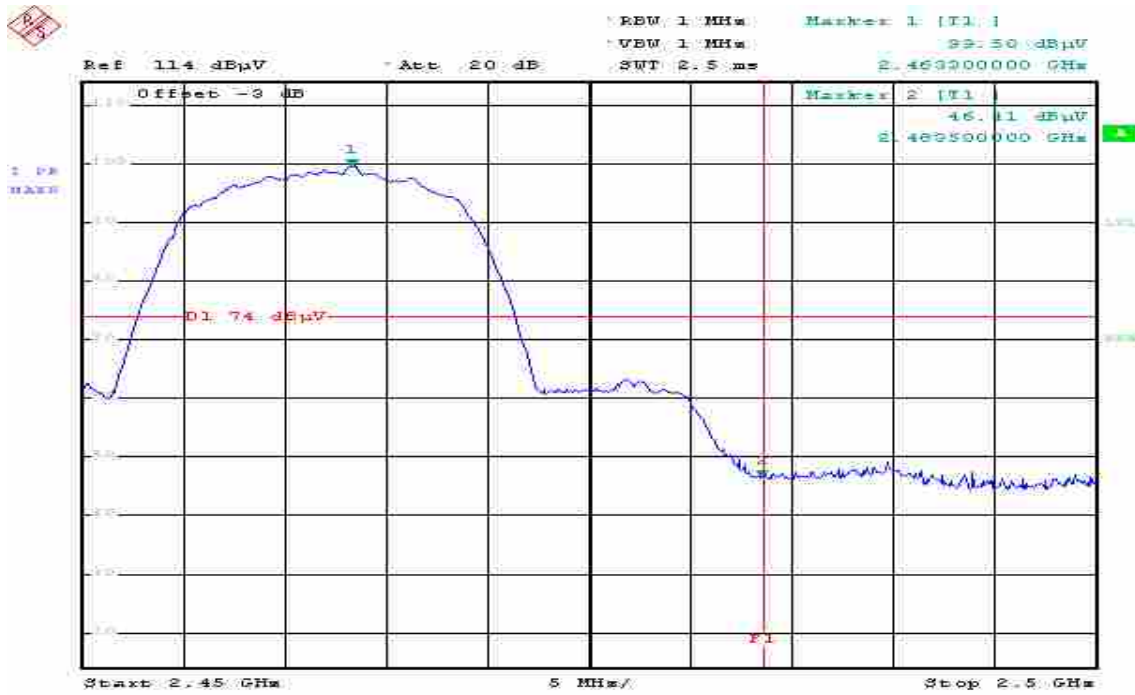

Date: 25.AUG.2003 18:06:20

Detector mode: Average

Polarity: Horizontal

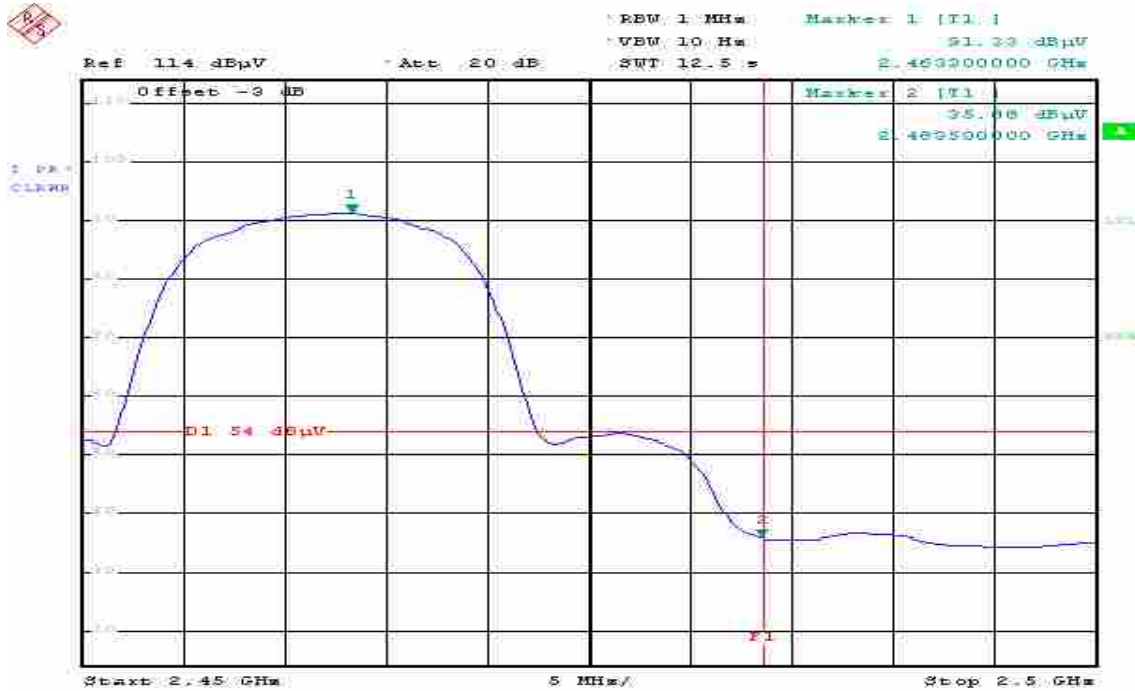


Date: 25.AUG.2003 18:02:44



Out of Band Test Data (Test Mode: IEEE 802.11g / CH-Low)

Detector mode: Peak


Polarity: Vertical

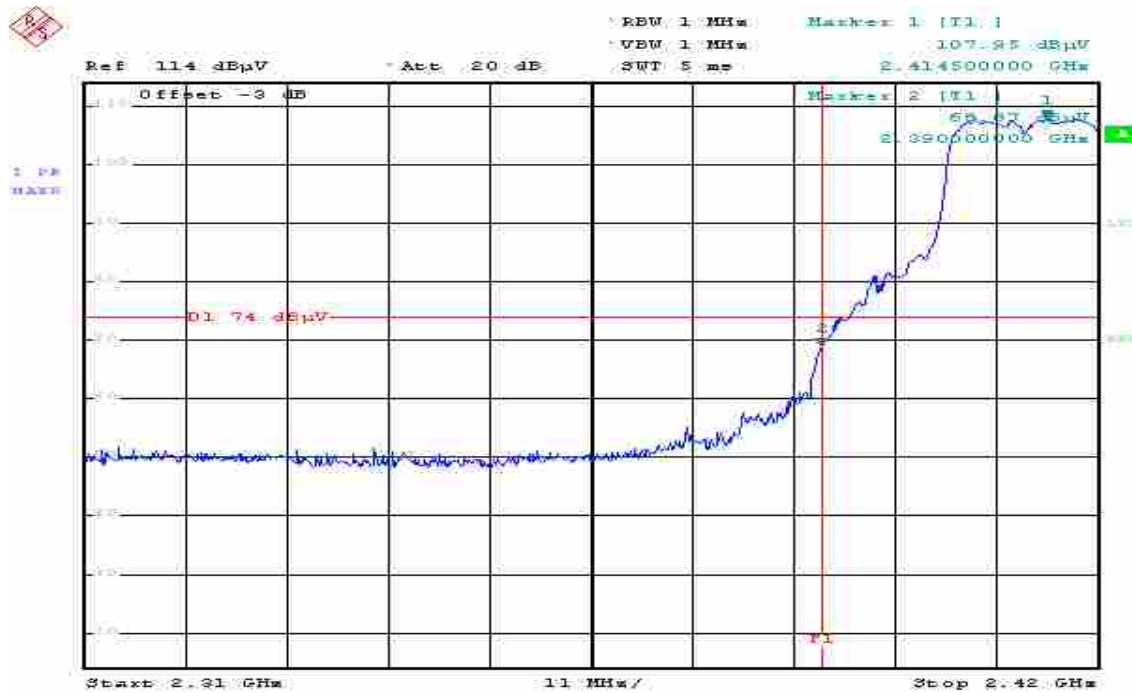

Date: 25.AUG.2003 17:49:42

Detector mode: Average

Polarity: Vertical

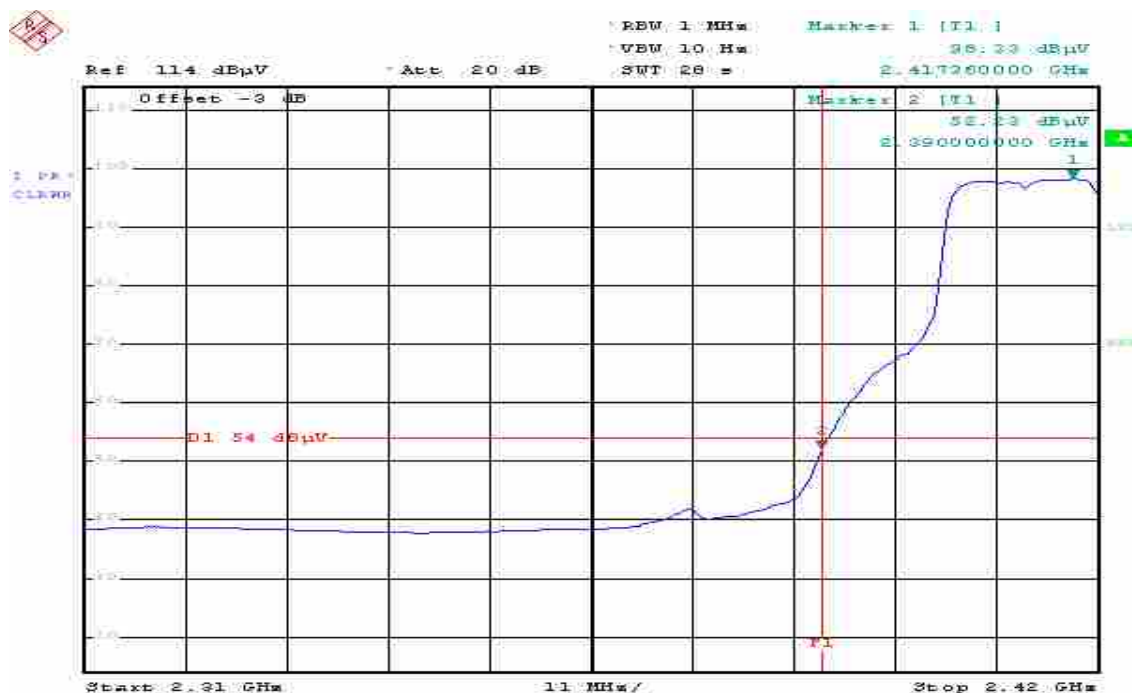


Date: 25.AUG.2003 17:49:10



Detector mode: Peak


Polarity: Horizontal

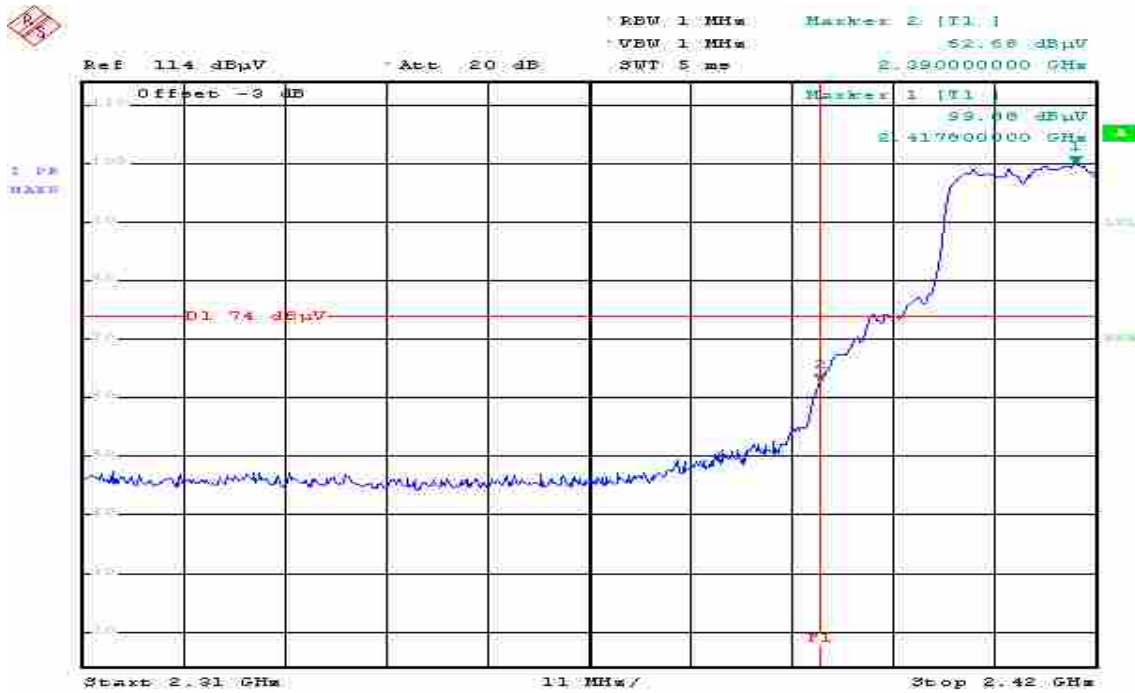

Date: 25.AUG.2003 17:44:46

Detector mode: Average

Polarity: Horizontal

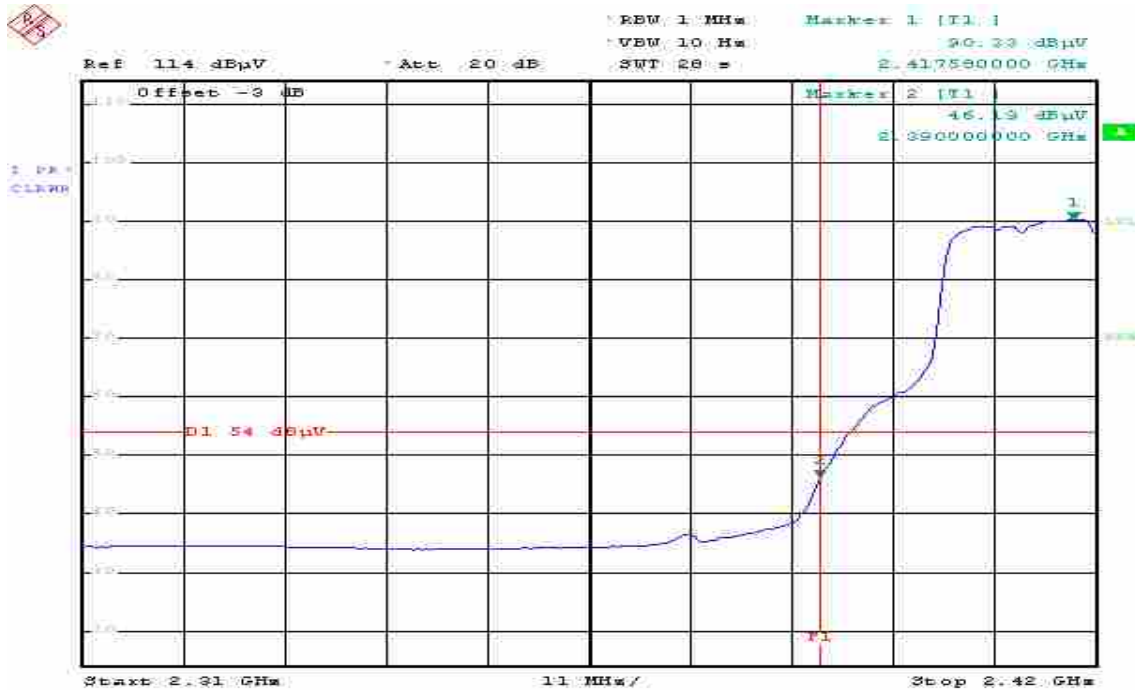


Date: 25.AUG.2003 17:47:25



Out of Band Test Data (Test Mode: IEEE 802.11g / CH-High)


Detector mode: Peak Polarity: Vertical

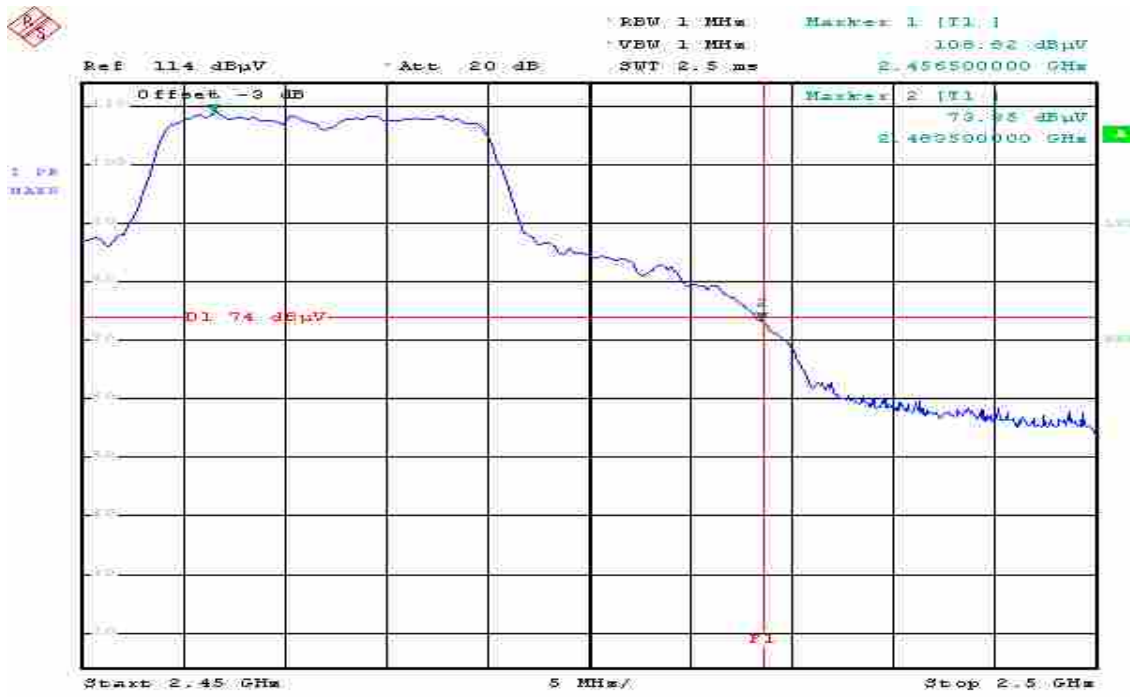

Date: 25.AUG.2003 17:55:26

Detector mode: Average

Polarity: Vertical

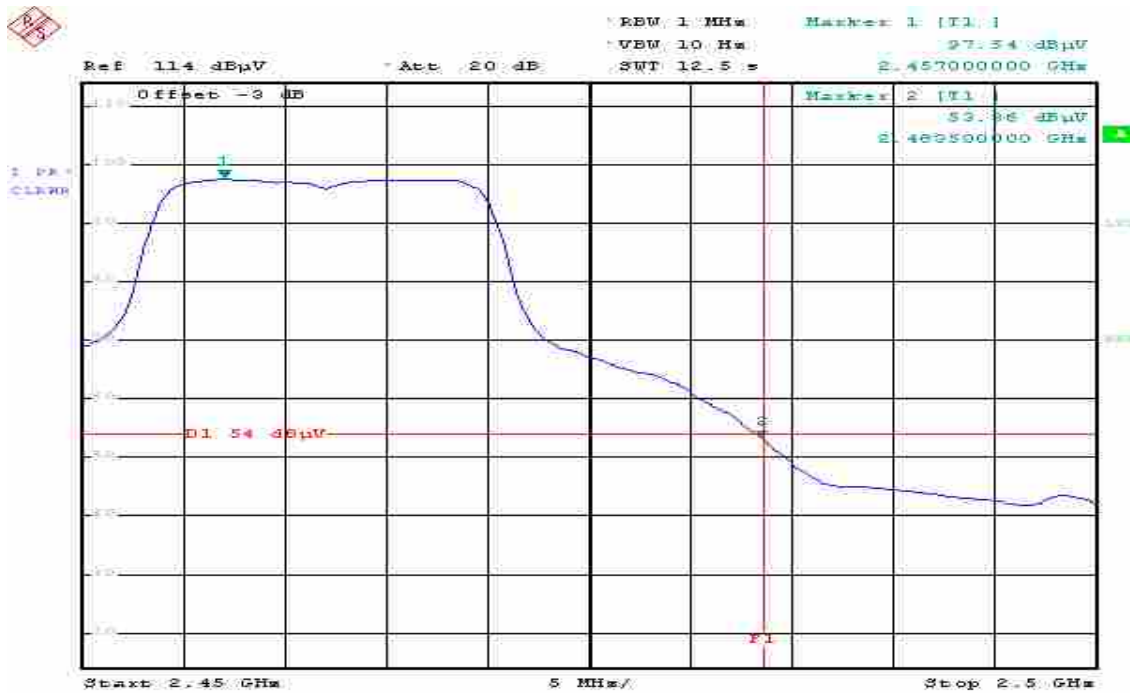


Date: 25.AUG.2003 17:56:06



Detector mode: Peak


Polarity: Horizontal

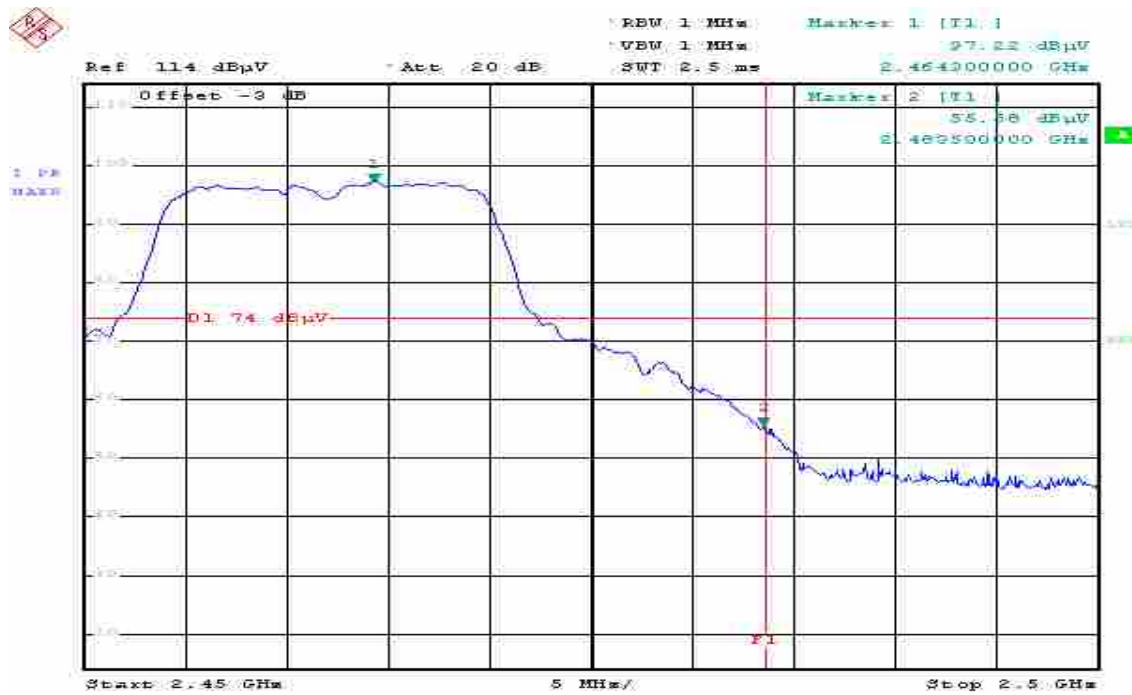

Date: 25.AUG.2003 16:00:02

Detector mode: Average

Polarity: Horizontal

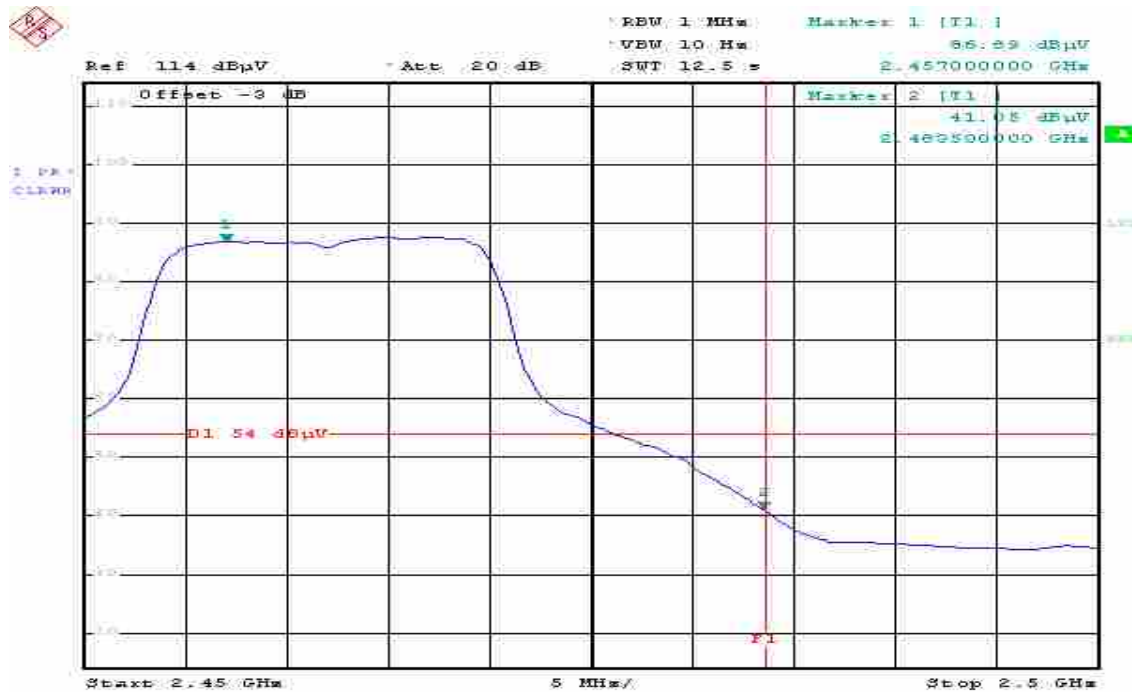

Date: 25.AUG.2003 17:59:00




7.4 PEAK POWER SPECTRAL DENSITY LIMIT

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	4/28/2004
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST CONFIGURATION

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

**TEST RESULTS***No non-compliance noted***Test Data****Test Mode: IEEE 802.11b**

Channel	Reading (dBm)	Cable Loss dB	PPSD dBm	Limit dBm	Result
Low	-9.42	0.30	-9.12	8.00	PASS
Mid	-9.09	0.30	-8.79		PASS
High	-8.82	0.30	-8.52		PASS


Test Mode: IEEE 802.11g

Channel	Reading (dBm)	Cable Loss dB	PPSD dBm	Limit dBm	Result
Low	-13.83	0.30	-13.53	8.00	PASS
Mid	-13.83	0.30	-13.53		PASS
High	-13.10	0.30	-12.80		PASS




Test Plot

PPSD – IEEE 802.11b / Ch Low

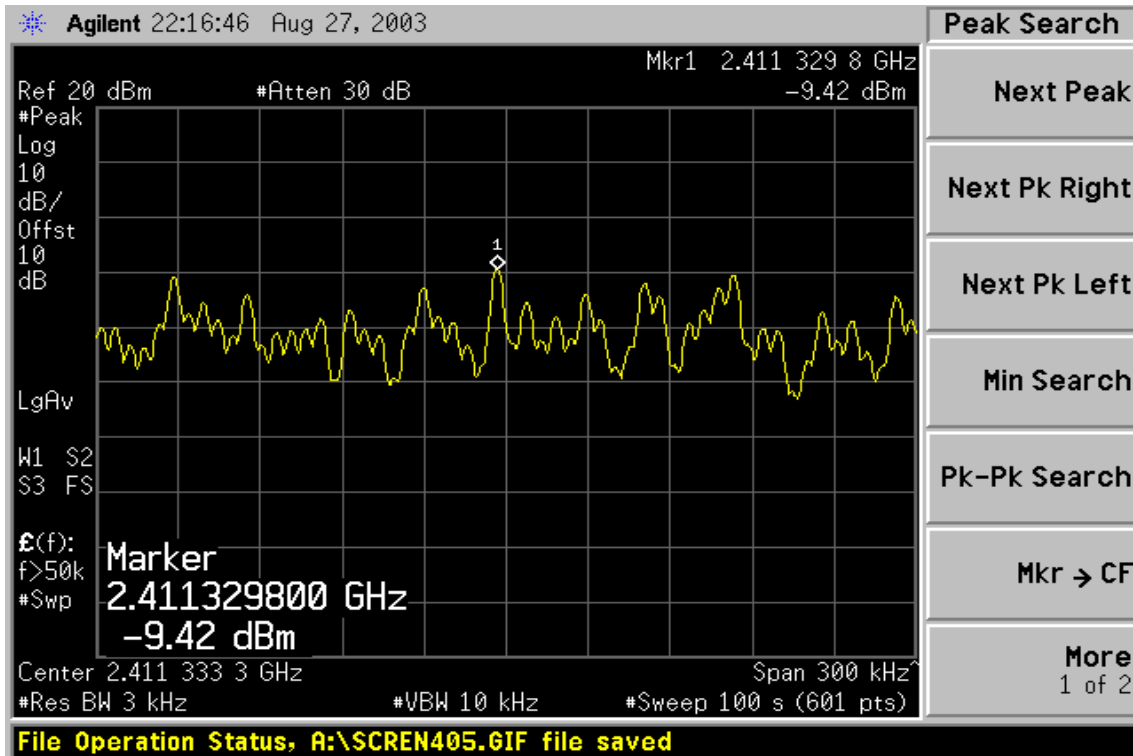


PPSD – IEEE 802.11b / Ch Mid

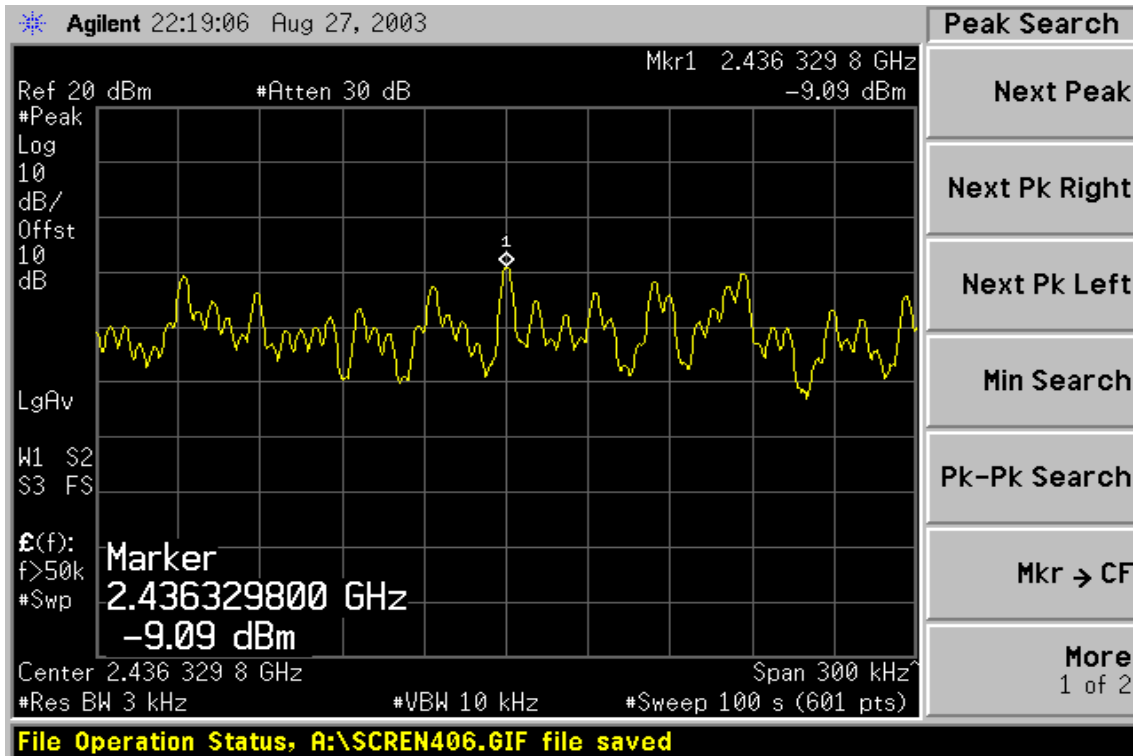




PPSD –IEEE 802.11b / Ch High

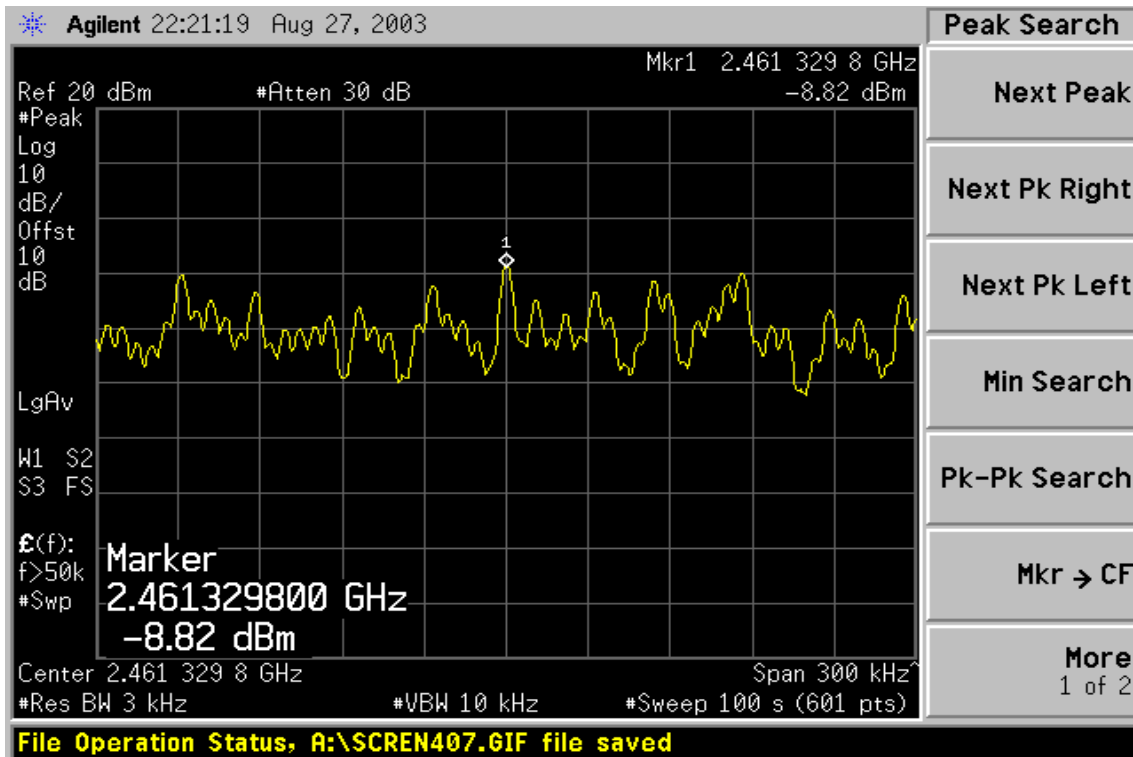




Test Plot

PPSD – IEEE 802.11g / Ch Low

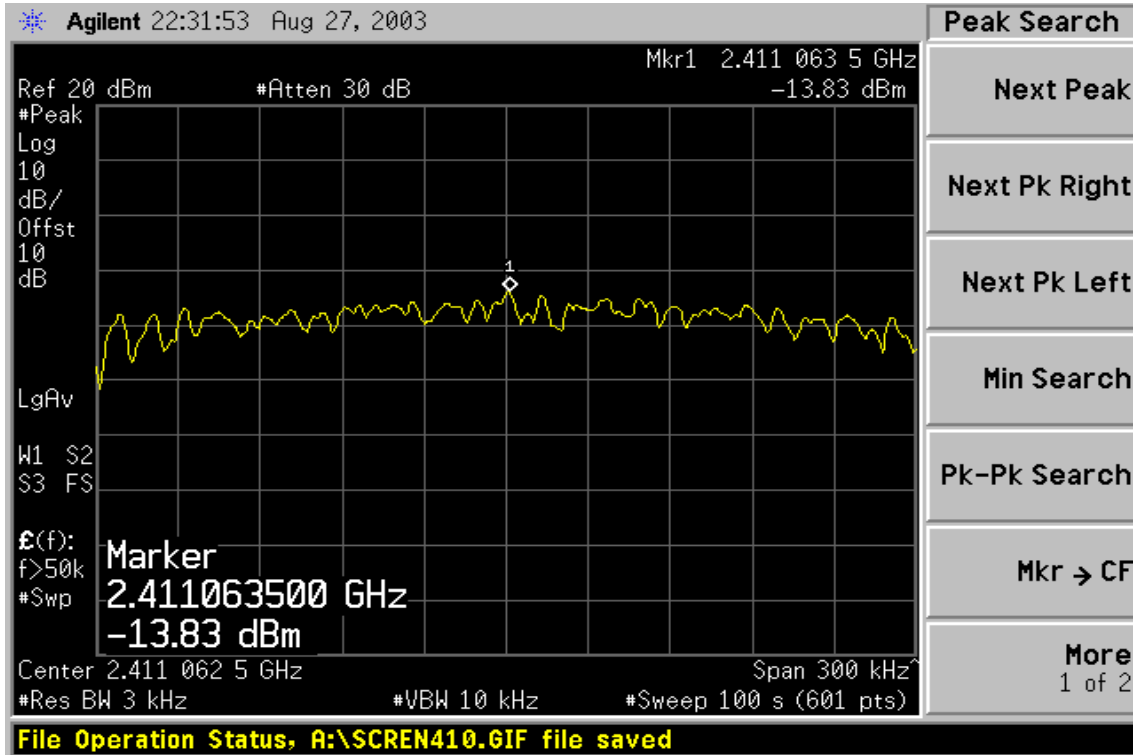


PPSD –IEEE 802.11g / Ch Mid

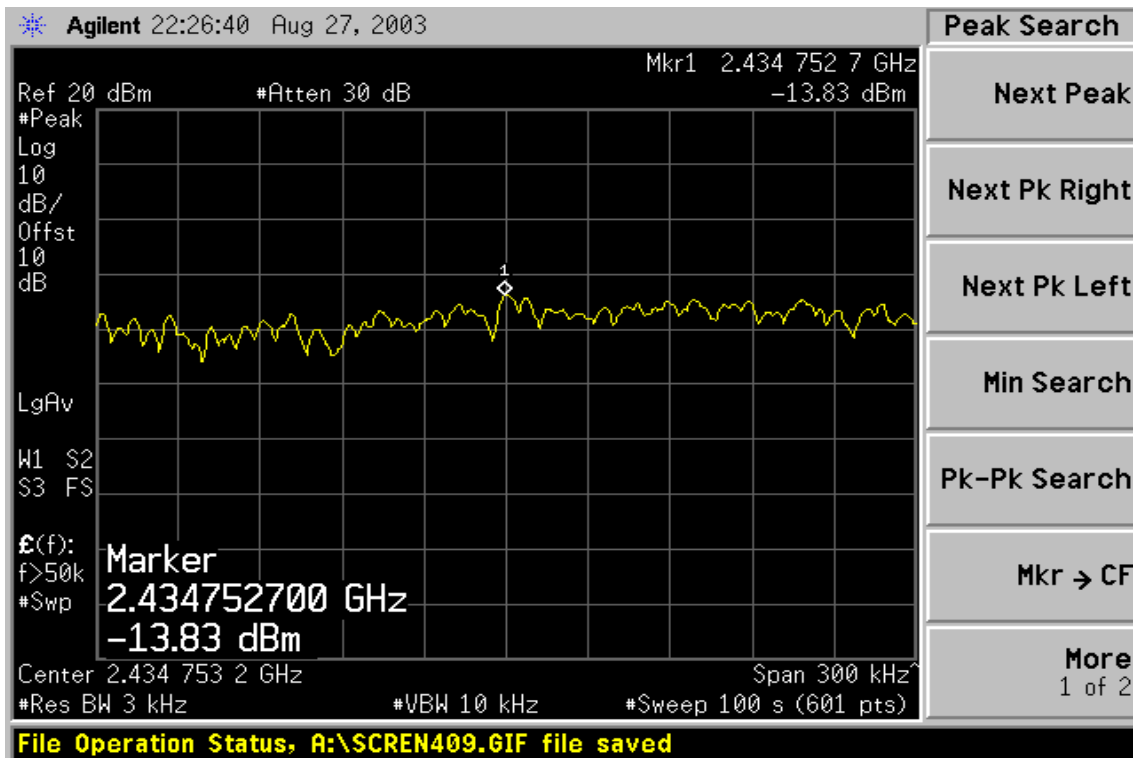



PPSD – IEEE 802.11g / Ch High

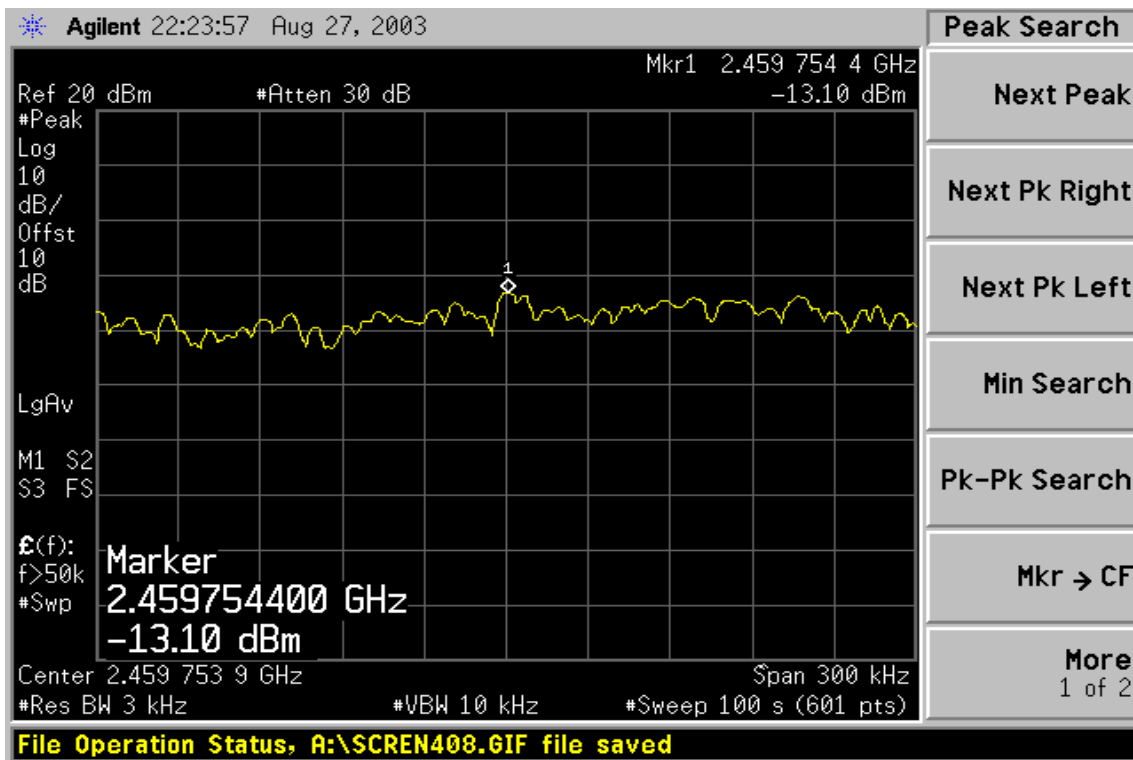



7.5 RADIO FREQUENCY EXPOSURE

LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

EUT SPECIFICATION

EUT	54Mbps Wireless Access Point
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5825GHz <input type="checkbox"/> Others _____
Device category	<input type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input checked="" type="checkbox"/> Others <u>Fixed (>20cm separation)</u>
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure ($S = 5mW/cm^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1mW/cm^2$)
Antenna diversity	<input type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
Max. output power	19.15 dBm (82.22mW)
Antenna gain (Max)	2 dBi (Numeric gain: 1.58)
Evaluation applied	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation

Note:

- *The maximum output power is 19.15 dBm(82.22 mW) at 2437MHz from IEEE 802.11g, which is lower than general population high threshold $900/F$ ($900/2437=369.31mW$). For the fixed device, SAR is not required.
- For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

TEST RESULTS

No non-compliance noted

Calculation

$$\text{Given } E = \sqrt{\frac{30 \times P \times G}{d}} \quad \& \quad S = \frac{E^2}{3770}$$

Where E = Field Strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts / square centimeter



Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{\frac{30 \times P \times G}{3770 \times S}}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = 100 * d (m)$$

Yields

$$d = 100 \times \sqrt{\frac{30 \times (P / 1000) \times G}{3770 \times S}} = 0.282 \times \sqrt{\frac{P \times G}{S}}$$

Where d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW / cm²

Substituting the logarithmic form of power and gain using:

$$P (mW) = 10 ^ (P (dBm) / 10) \text{ and}$$

$$G (\text{numeric}) = 10 ^ (G (dBi) / 10)$$

Yields

$$d = 0.282 \times \frac{10^{(P+G)/20}}{\sqrt{20}}$$

Equation 1

Where d = MPE safe distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW / cm²

Maximum Permissible Exposure (2.4 GHz Band)

EUT output power = 82.22 mW

Antenna Gain = 1.58

S = 1.0 mW / cm² from 1.1310 Table 1

Substituting these parameters into the above Equation 1:

→ MPE Safe Distance = 3.22 cm

(For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.)



7.6 RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/18/2004
EMI Test Receiver	R&S	ESVS20	838804/004	01/04/2004
Pre-Amplifier	HP	8447D	2944A09173	03/03/2004
Bilog Antenna	SCHWAZBECK	VULB9163	145	07/05/2004
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	09/06/2003
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2004
Loop Antenna	EMCO	6502	2356	07/10/2004
Pre-Amplifier	HP	8449B	3008B00965	10/02/2003


Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

For Frequencies Below 1 GHz

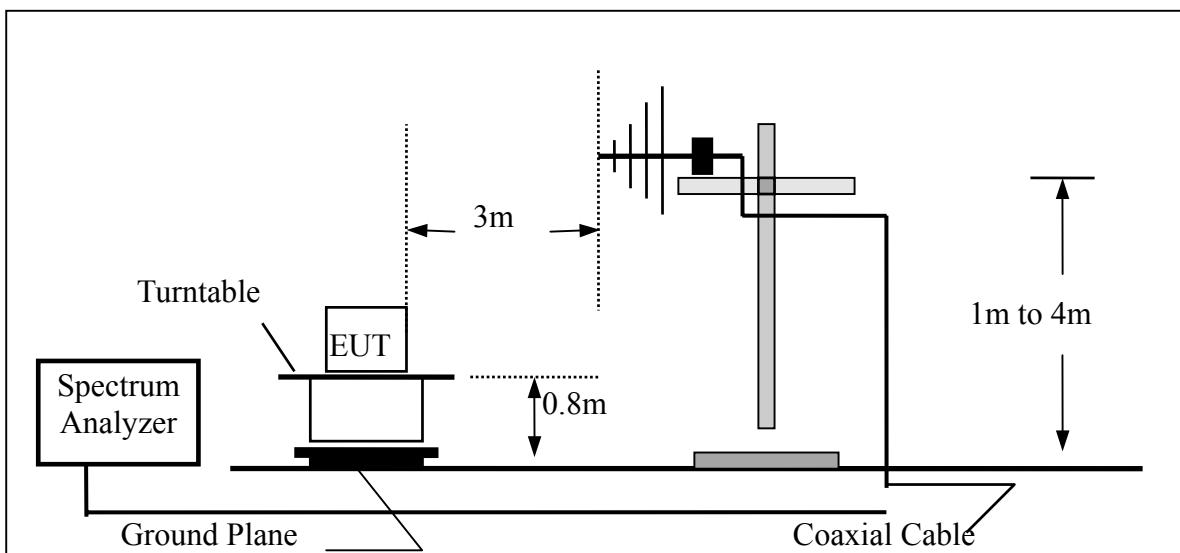

For Frequencies Above 1 GHz

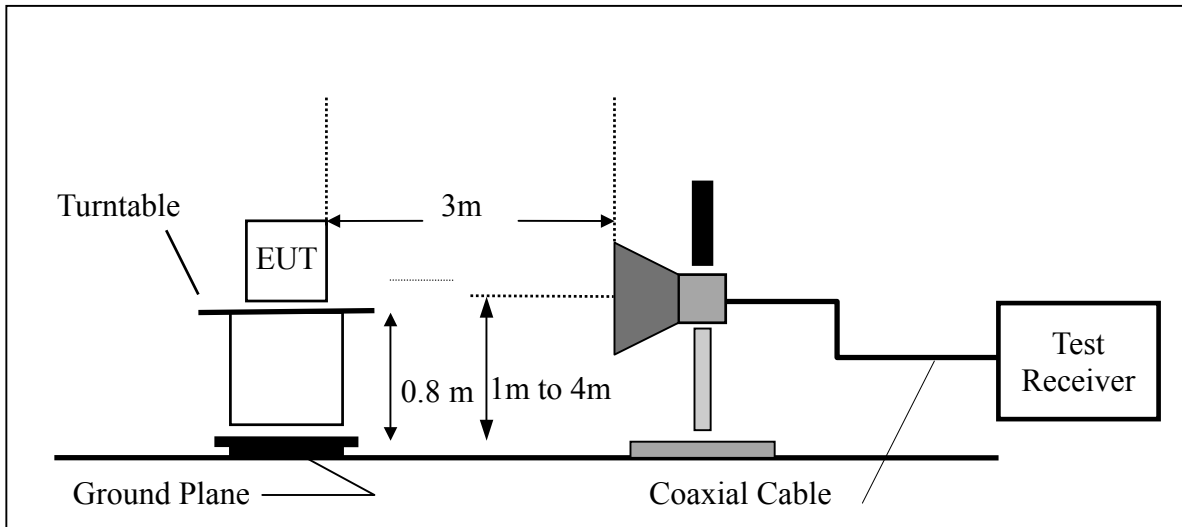

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****For Frequency Below 1 GHz**

Operation Mode: IEEE 802.11b / Tx / CH Low **Test Date:** August 26, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 62 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
69.420	V	Peak	41.14	-14.37	26.77	40.00	-13.23
143.400	V	Peak	44.84	-17.65	27.19	43.50	-16.31
396.600	V	Peak	39.27	-10.06	29.21	46.00	-16.79
500.200	V	Peak	35.66	-8.19	27.47	46.00	-18.53
661.200	V	Peak	32.91	-6.19	26.72	46.00	-19.28
792.800	V	Peak	37.20	-4.67	32.53	46.00	-13.47
76.980	H	Peak	47.57	-17.61	29.96	40.00	-10.04
106.680	H	Peak	43.76	-18.20	25.56	43.50	-17.94
143.400	H	Peak	42.46	-17.65	24.81	43.50	-18.69
396.600	H	Peak	39.36	-10.06	29.30	46.00	-16.70
661.200	H	Peak	32.09	-6.19	25.90	46.00	-20.10
792.800	H	Peak	33.52	-4.67	28.85	46.00	-17.15

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: IEEE 802.11b / Tx / CH Mid **Test Date:** August 26, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 62 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
69.420	V	Peak	40.70	-14.37	26.33	40.00	-13.67
143.400	V	Peak	44.35	-17.65	26.70	43.50	-16.80
396.600	V	Peak	39.31	-10.06	29.25	46.00	-16.75
500.200	V	Peak	36.09	-8.19	27.90	46.00	-18.10
661.200	V	Peak	33.00	-6.19	26.81	46.00	-19.19
792.800	V	Peak	36.74	-4.67	32.07	46.00	-13.93
76.980	H	Peak	47.48	-17.61	29.87	40.00	-10.13
106.680	H	Peak	44.34	-18.20	26.14	43.50	-17.36
143.400	H	Peak	42.88	-17.65	25.23	43.50	-18.27
396.600	H	Peak	38.83	-10.06	28.77	46.00	-17.23
661.200	H	Peak	31.88	-6.19	25.69	46.00	-20.31
792.800	H	Peak	33.85	-4.67	29.18	46.00	-16.82

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: IEEE 802.11b / Tx / CH High **Test Date:** August 26, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 62 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBUV/m)	Limit3m (dBUV/m)	Safe Margin (dB)
69.420	V	Peak	40.80	-14.37	26.43	40.00	-13.57
143.400	V	Peak	45.19	-17.65	27.54	43.50	-15.96
396.600	V	Peak	39.35	-10.06	29.29	46.00	-16.71
500.200	V	Peak	35.81	-8.19	27.62	46.00	-18.38
661.200	V	Peak	33.86	-6.19	27.67	46.00	-18.33
792.800	V	Peak	36.04	-4.67	31.37	46.00	-14.63
76.980	H	Peak	47.77	-17.61	30.16	40.00	-9.84
106.680	H	Peak	43.97	-18.20	25.77	43.50	-17.73
143.400	H	Peak	41.63	-17.65	23.98	43.50	-19.52
396.600	H	Peak	39.20	-10.06	29.14	46.00	-16.86
661.200	H	Peak	32.17	-6.19	25.98	46.00	-20.02
792.800	H	Peak	33.24	-4.67	28.57	46.00	-17.43

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: IEEE 802.11g / Tx / CH Low **Test Date:** August 26, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 62 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
69.420	V	Peak	40.76	-14.37	26.39	40.00	-13.61
143.400	V	Peak	44.85	-17.65	27.20	43.50	-16.30
396.600	V	Peak	39.46	-10.06	29.40	46.00	-16.60
500.200	V	Peak	35.68	-8.19	27.49	46.00	-18.51
661.200	V	Peak	33.88	-6.19	27.69	46.00	-18.31
792.800	V	Peak	36.77	-4.67	32.10	46.00	-13.90
76.980	H	Peak	47.96	-17.61	30.35	40.00	-9.65
106.680	H	Peak	43.54	-18.20	25.34	43.50	-18.16
143.400	H	Peak	42.27	-17.65	24.62	43.50	-18.88
396.600	H	Peak	39.38	-10.06	29.32	46.00	-16.68
661.200	H	Peak	32.03	-6.19	25.84	46.00	-20.16
792.800	H	Peak	33.91	-4.67	29.24	46.00	-16.76

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: IEEE 802.11g / Tx / CH Mid **Test Date:** August 26, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 62 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
143.400	V	Peak	45.22	-17.65	27.57	43.50	-15.93
396.600	V	Peak	39.42	-10.06	29.36	46.00	-16.64
500.200	V	Peak	36.22	-8.19	28.03	46.00	-17.97
528.200	V	Peak	34.34	-7.98	26.36	46.00	-19.64
661.200	V	Peak	33.30	-6.19	27.11	46.00	-18.89
792.800	V	Peak	37.20	-4.67	32.53	46.00	-13.47
76.980	H	Peak	48.90	-17.61	31.29	40.00	-8.71
106.680	H	Peak	43.79	-18.20	25.59	43.50	-17.91
143.400	H	Peak	42.18	-17.65	24.53	43.50	-18.97
396.600	H	Peak	38.94	-10.06	28.88	46.00	-17.12
661.200	H	Peak	33.17	-6.19	26.98	46.00	-19.02
792.800	H	Peak	33.61	-4.67	28.94	46.00	-17.06

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: IEEE 802.11g / Tx / CH High **Test Date:** August 26, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 62 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
143.400	V	Peak	45.01	-17.65	27.36	43.50	-16.14
396.600	V	Peak	39.25	-10.06	29.19	46.00	-16.81
500.200	V	Peak	36.18	-8.19	27.99	46.00	-18.01
528.200	V	Peak	34.87	-7.98	26.89	46.00	-19.11
661.200	V	Peak	33.19	-6.19	27.00	46.00	-19.00
792.800	V	Peak	36.55	-4.67	31.88	46.00	-14.12
76.980	H	Peak	48.40	-17.61	30.79	40.00	-9.21
106.680	H	Peak	44.79	-18.20	26.59	43.50	-16.91
143.400	H	Peak	41.97	-17.65	24.32	43.50	-19.18
396.600	H	Peak	39.17	-10.06	29.11	46.00	-16.89
661.200	H	Peak	32.52	-6.19	26.33	46.00	-19.67
792.800	H	Peak	33.88	-4.67	29.21	46.00	-16.79

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**For Frequency Above 1 GHz**

Operation Mode: IEEE 802.11b / Tx / CH Low **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2412.00	105.89	---	-3.04	102.85	---	---	---	---	Fundamental
4820.00	49.71	---	3.28	52.99	---	74.00	54.00	-21.01	Peak
9650.00	39.00	---	10.47	49.47	---	74.00	54.00	-24.53	Peak
12060.00	---	---	---	---	---	74.00	54.00	---	---
14472.00	---	---	---	---	---	74.00	54.00	---	---
16884.00	---	---	---	---	---	74.00	54.00	---	---
19296.00	---	---	---	---	---	74.00	54.00	---	---
21708.00	---	---	---	---	---	74.00	54.00	---	---
24120.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms

**Operation Mode:** IEEE 802.11b / Tx / CH Low **Test Date:** August 25, 2003**Temperature:** 32°C **Tested by:** Devin Chang**Humidity:** 60 % RH **Polarity:** Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2412.00	99.37	---	-3.04	96.33	---	---	---	---	Fundamental
4820.00	49.60	---	3.28	52.88	---	74.00	54.00	-21.12	Peak
7236.00	---	---	---	---	---	74.00	54.00	---	---
9648.00	---	---	---	---	---	74.00	54.00	---	---
12060.00	---	---	---	---	---	74.00	54.00	---	---
14472.00	---	---	---	---	---	74.00	54.00	---	---
16884.00	---	---	---	---	---	74.00	54.00	---	---
19296.00	---	---	---	---	---	74.00	54.00	---	---
21708.00	---	---	---	---	---	74.00	54.00	---	---
24120.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms

**Operation Mode:** IEEE 802.11b / Tx / CH Mid**Test Date:** August 25, 2003**Temperature:** 32°C**Tested by:** Devin Chang**Humidity:** 60 % RH**Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2436.00	110.82	---	-2.96	107.86	---	---	---	---	Fundamental
4870.00	55.21	43.73	3.39	58.60	47.12	74.00	54.00	-6.88	AV
7320.00	42.24	---	7.36	49.60	---	74.00	54.00	-24.40	Peak
9750.00	38.87	---	10.61	49.48	---	74.00	54.00	-24.52	Peak
12185.00	---	---	---	---	---	74.00	54.00	---	---
14622.00	---	---	---	---	---	74.00	54.00	---	---
17059.00	---	---	---	---	---	74.00	54.00	---	---
19496.00	---	---	---	---	---	74.00	54.00	---	---
21933.00	---	---	---	---	---	74.00	54.00	---	---
24370.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11b / Tx / CH Mid **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2436.00	102.31	---	-2.96	99.35	---	---	---	---	Fundamental
4870.00	54.41	42.38	3.39	57.80	45.77	74.00	54.00	-8.23	AV
7311.00	---	---	---	---	---	74.00	54.00	---	---
9748.00	---	---	---	---	---	74.00	54.00	---	---
12185.00	---	---	---	---	---	74.00	54.00	---	---
14622.00	---	---	---	---	---	74.00	54.00	---	---
17059.00	---	---	---	---	---	74.00	54.00	---	---
19496.00	---	---	---	---	---	74.00	54.00	---	---
21933.00	---	---	---	---	---	74.00	54.00	---	---
24370.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11b / Tx / CH High **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2460.00	104.72	---	-2.88	101.84	---	---	---	---	Fundamental
4920.00	43.17	---	3.50	46.67	---	74.00	54.00	-27.33	Peak
9850.00	40.13	---	10.76	50.89	---	74.00	54.00	-23.11	Peak
12310.00	---	---	---	---	---	74.00	54.00	---	---
14772.00	---	---	---	---	---	74.00	54.00	---	---
17234.00	---	---	---	---	---	74.00	54.00	---	---
19696.00	---	---	---	---	---	74.00	54.00	---	---
22158.00	---	---	---	---	---	74.00	54.00	---	---
24620.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11b / Tx / CH High **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2464.00	98.83	---	-2.87	95.96	---	---	---	---	Fundamental
4920.00	41.61	---	3.50	45.11	---	74.00	54.00	-28.89	Peak
7386.00	---	---	---	---	---	74.00	54.00	---	---
9848.00	---	---	---	---	---	74.00	54.00	---	---
12310.00	---	---	---	---	---	74.00	54.00	---	---
14772.00	---	---	---	---	---	74.00	54.00	---	---
17234.00	---	---	---	---	---	74.00	54.00	---	---
19696.00	---	---	---	---	---	74.00	54.00	---	---
22158.00	---	---	---	---	---	74.00	54.00	---	---
24620.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11g / Tx / CH Low **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2416.00	103.95	---	-3.02	100.93	---	---	---	---	Fundamental
4820.00	43.60	---	3.28	46.88	---	74.00	54.00	-27.12	Peak
9650.00	38.59	---	10.47	49.06	---	74.00	54.00	-24.94	Peak
12060.00	---	---	---	---	---	74.00	54.00	---	---
14472.00	---	---	---	---	---	74.00	54.00	---	---
16884.00	---	---	---	---	---	74.00	54.00	---	---
19296.00	---	---	---	---	---	74.00	54.00	---	---
21708.00	---	---	---	---	---	74.00	54.00	---	---
24120.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11g / Tx / CH Low **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2412.00	96.89	---	-3.04	93.85	---	---	---	---	Fundamental
4830.00	44.03	---	3.30	47.33	---	74.00	54.00	-26.67	Peak
7236.00	---	---	---	---	---	74.00	54.00	---	---
9648.00	---	---	---	---	---	74.00	54.00	---	---
12060.00	---	---	---	---	---	74.00	54.00	---	---
14472.00	---	---	---	---	---	74.00	54.00	---	---
16884.00	---	---	---	---	---	74.00	54.00	---	---
19296.00	---	---	---	---	---	74.00	54.00	---	---
21708.00	---	---	---	---	---	74.00	54.00	---	---
24120.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11g / Tx / CH Mid **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2436.00	107.44	---	-2.96	104.48	---	---	---	---	Fundamental
4870.00	49.22	---	3.39	52.61	---	74.00	54.00	-21.39	Peak
7310.00	42.08	---	7.34	49.42	---	74.00	54.00	-24.58	Peak
9748.00	---	---	---	---	---	74.00	54.00	---	---
12185.00	---	---	---	---	---	74.00	54.00	---	---
14622.00	---	---	---	---	---	74.00	54.00	---	---
17059.00	---	---	---	---	---	74.00	54.00	---	---
19496.00	---	---	---	---	---	74.00	54.00	---	---
21933.00	---	---	---	---	---	74.00	54.00	---	---
24370.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms

**Operation Mode:** IEEE 802.11g / Tx / CH Mid**Test Date:** August 25, 2003**Temperature:** 32°C**Tested by:** Devin Chang**Humidity:** 60 % RH**Polarity:** Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2436.00	99.32	---	-2.96	96.36	---	---	---	---	Fundamental
4870.00	48.23	---	3.39	51.62	---	74.00	54.00	-22.38	Peak
7311.00	---	---	---	---	---	74.00	54.00	---	---
9748.00	---	---	---	---	---	74.00	54.00	---	---
12185.00	---	---	---	---	---	74.00	54.00	---	---
14622.00	---	---	---	---	---	74.00	54.00	---	---
17059.00	---	---	---	---	---	74.00	54.00	---	---
19496.00	---	---	---	---	---	74.00	54.00	---	---
21933.00	---	---	---	---	---	74.00	54.00	---	---
24370.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11g / Tx / CH High **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Ver.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2460.00	104.72	---	-2.88	101.84	---	---	---	---	Fundamental
9850.00	40.92	---	10.76	51.68	---	74.00	54.00	-22.32	Peak
12310.00	---	---	---	---	---	74.00	54.00	---	---
14772.00	---	---	---	---	---	74.00	54.00	---	---
17234.00	---	---	---	---	---	74.00	54.00	---	---
19696.00	---	---	---	---	---	74.00	54.00	---	---
22158.00	---	---	---	---	---	74.00	54.00	---	---
24620.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



Operation Mode: IEEE 802.11g / Tx / CH High **Test Date:** August 25, 2003
Temperature: 32°C **Tested by:** Devin Chang
Humidity: 60 % RH **Polarity:** Hor.

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
2460.00	96.15	---	-2.88	93.27	---	---	---	---	Fundamental
4924.00	---	---	---	---	---	74.00	54.00	---	---
7386.00	---	---	---	---	---	74.00	54.00	---	---
9848.00	---	---	---	---	---	74.00	54.00	---	---
12310.00	---	---	---	---	---	74.00	54.00	---	---
14772.00	---	---	---	---	---	74.00	54.00	---	---
17234.00	---	---	---	---	---	74.00	54.00	---	---
19696.00	---	---	---	---	---	74.00	54.00	---	---
22158.00	---	---	---	---	---	74.00	54.00	---	---
24620.00	---	---	---	---	---	74.00	54.00	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
5. Spectrum AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms



7.7 POWERLINE CONDUCTED EMISSIONS LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	847793/012	12/20/2003
LISN	R&S	ESH2-Z5	843285/010	12/15/2003
LISN	EMCO	3825/2	9003-1628	07/25/2004

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was plug-in the host PC via USB port. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

The EUT is set to transmit in a continuous mode.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Operation Mode: Tx + Rx mode

Test Date: August 19, 2003

Temperature: 27°C

Tested by: George Liao

Humidity: 73 % RH

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.150	56.00	26.60	66.00	56.00	-10.00	-29.40	L1
0.932	35.20	---	56.00	46.00	-20.80	---	L1
3.081	28.10	---	56.00	46.00	-27.90	---	L1
4.022	27.20	---	56.00	46.00	-28.80	---	L1
5.781	21.20	---	60.00	50.00	-38.80	---	L1
7.472	20.50	---	60.00	50.00	-39.50	---	L1
0.150	55.00	25.70	66.00	56.00	-11.00	-30.30	L2
0.200	53.00	24.30	63.61	53.61	-10.61	-29.31	L2
0.300	50.00	21.60	60.24	50.24	-10.24	-28.64	L2
0.400	47.50	19.80	57.85	47.85	-10.35	-28.05	L2
0.500	45.10	18.90	56.00	46.00	-10.90	-27.10	L2
0.600	42.10	---	56.00	46.00	-13.90	---	L2


Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live line) / L2 = Line Two (Neutral Line)



Test Data Plots

Conducted emissions (Line 1)

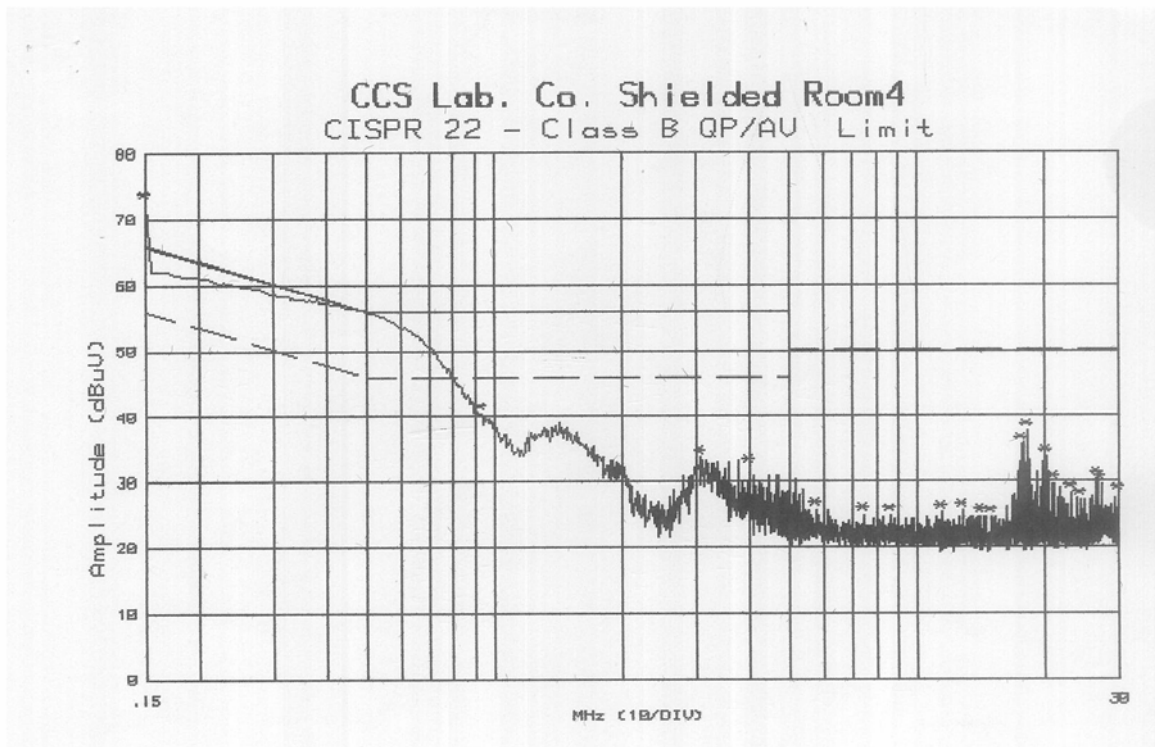

Conducted emissions (Line 2)

