



# FCC SAR TEST REPORT

**FCC ID** : PY7-00532F  
**Brand Name** : Sony  
**Applicant** : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa,  
Shinagawa-ku, Tokyo, 140-0002, Japan  
**Manufacturer** : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa,  
Shinagawa-ku, Tokyo, 140-0002, Japan  
**Standard** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Jun. 05, 2019 and testing was started from Jun. 19, 2019 and completed on Jul. 07, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information ..... 5
3.1 General Information ..... 5
3.2 Device Serial Number ..... 5
3.3 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 9
4.1 Uncontrolled Environment..... 9
4.2 Controlled Environment..... 9
5. Specific Absorption Rate (SAR).....10
5.1 Introduction .....10
5.2 SAR Definition.....10
6. System Description and Setup .....11
6.1 E-Field Probe .....12
6.2 Data Acquisition Electronics (DAE) .....12
6.3 Phantom.....13
6.4 Device Holder.....14
7. Measurement Procedures .....15
7.1 Spatial Peak SAR Evaluation .....15
7.2 Power Reference Measurement.....16
7.3 Area Scan .....16
7.4 Zoom Scan.....17
7.5 Volume Scan Procedures.....17
7.6 Power Drift Monitoring.....17
8. Test Equipment List .....18
9. System Verification .....19
9.1 Tissue Simulating Liquids.....19
9.2 Tissue Verification .....20
9.3 System Performance Check Results.....21
10. RF Exposure Positions .....22
10.1 Ear and handset reference point .....22
10.2 Definition of the cheek position .....23
10.3 Definition of the tilt position .....24
10.4 Body Worn Accessory .....24
10.5 Product Specific Exposure .....25
10.6 Wireless Router.....25
11. Conducted RF Output Power (Unit: dBm).....26
12. RF Exposure Conditions .....69
13. SAR Test Results .....70
13.1 Head SAR .....72
13.2 Hotspot SAR .....75
13.3 Body Worn Accessory SAR.....78
13.4 Product Specific SAR.....80
14. Simultaneous Transmission Analysis.....81
14.1 Head Exposure Conditions .....82
14.2 Hotspot Exposure Conditions.....83
14.3 Body-Worn Accessory Exposure Conditions .....85
14.4 Product Specific Exposure Conditions .....86
15. Uncertainty Assessment .....87
16. References .....87
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Antenna Location & Test Setup Photos



### History of this test report

Report No.	Version	Description	Issued Date
FA940901-03	01	Initial issue of report	Jul. 12, 2019



1. Statement of Compliance

Table with columns: Applicant Name, EUT Description, Brand Name, FCC ID, HW Version, SW Version, RF Exposure Conditions (Licensed, DTS, NII, DSS), Head (1g SAR W/kg), Body-Worn (1g SAR W/kg), Wireless Router (1g SAR W/kg), Product Specific (10g SAR W/kg), Highest Simultaneous Transmission (1g SAR W/kg), Highest Simultaneous Transmission (10g SAR W/kg), Date Tested, Test Result, Remark.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
FCC KDB 941225 D06 Hotspot Mode SAR v02r01
FCC KDB 941225 D07 941225 D07 UMPC Mini Tablet v01r02

### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	<ul style="list-style-type: none"> <li>· GSM Voice</li> <li>· GPRS (GMSK)</li> <li>· EDGE (8PSK)</li> </ul>	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (Yes)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	<ul style="list-style-type: none"> <li>· UMTS Rel.99(Voice &amp; Data)</li> <li>· HSDPA Rel.5</li> <li>· HSUPA Rel.6</li> <li>· HSPA+ Rel.7 (downlink only)</li> <li>· DC-HSDPA Rel.8</li> </ul>	
LTE (FDD)	Band 2 Band 4 Band 5 Band 7 Band 12 Band 13 Band 17 Band 25 Band 26 Band 66	<ul style="list-style-type: none"> <li>· QPSK</li> <li>· 16QAM</li> <li>· 64QAM</li> <li>· Rel 14 Carrier Aggregation Downlink Only (the detail refer to section 11)</li> </ul>	
LTE (TDD)	Band 41		
WiFi	2.4GHz: 2412 MHz ~ 2472 MHz	<ul style="list-style-type: none"> <li>· 11b</li> <li>· 11g</li> <li>· 11n (HT20)</li> </ul>	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	<ul style="list-style-type: none"> <li>· 11a</li> <li>· 11n (HT20)</li> <li>· 11n (HT40)</li> <li>· 11ac (VHT20)</li> <li>· 11ac (VHT40)</li> <li>· 11ac (VHT80)</li> </ul>	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

#### 3.2 Device Serial Number

Band	SN
WWAN	BH9300A1GX
	BH9300V8GX
	BH930059GX
	BH93009CGX
	BH93007MGX
	BH9300FLGX
WLAN	BH9300R7GX
	BH9300X2GX
	BH9300YRGX

**Note:** Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.



3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	PY7-00532F																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz																																																																									
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM / 64QAM																																																																									
LTE Voice / Data requirements	Voice and Data																																																																									
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 11.																																																																									
LTE Carrier Aggregation Additional Information	This device supports maximum of 5 carriers in the downlink only. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																									
<b>Transmission (H, M, L) channel numbers and frequencies in each LTE band</b>																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														



LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23230		782	
M	23230		782		23230		782		23230		782	
H	23255		784.5		23230		782		23230		782	
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23780		709	
M	23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23800		711	
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905



LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770





**4. RF Exposure Limits**

**4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

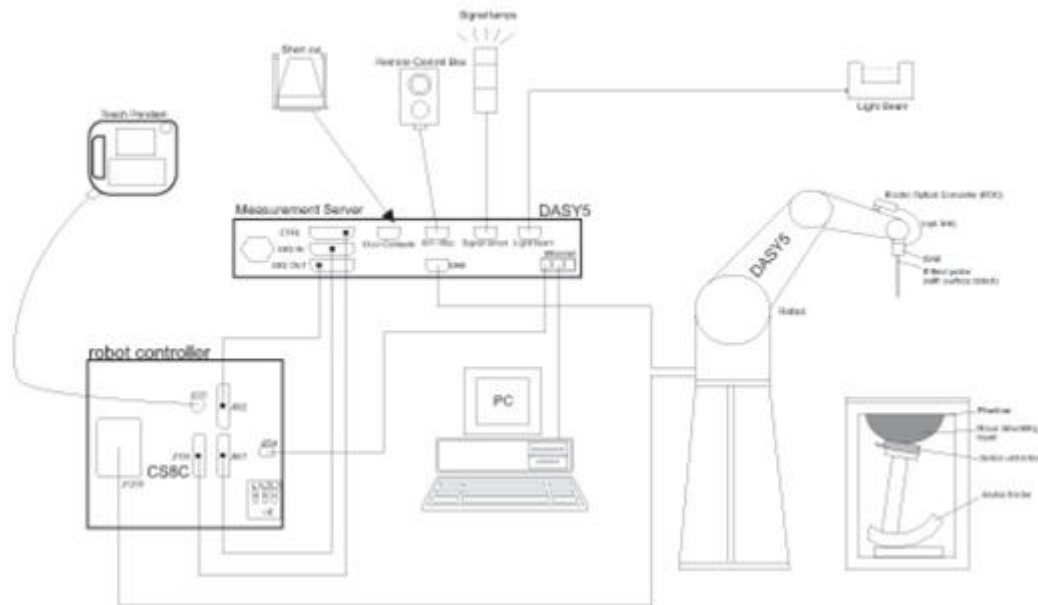


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**6.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
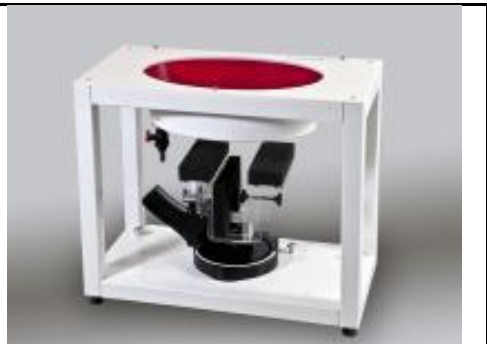
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	Sep. 05, 2018	Sep. 04, 2019
SPEAG	835MHz System Validation Kit	D835V2	499	Sep. 06, 2018	Sep. 05, 2019
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 19, 2018	Nov. 18, 2019
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 10, 2019
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 30, 2019
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 31, 2018	Aug. 30, 2019
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 26, 2019
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 16, 2018	Nov. 15, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 26, 2018	Jul. 25, 2019
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2018	Nov. 11, 2019
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2018	Nov. 11, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 21, 2019	Apr. 20, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 27, 2019	May. 26, 2020
R&S	BT Base Station	CBT32	100522	Mar. 18, 2019	Mar. 17, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 11, 2018	Dec. 10, 2019
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2018	Sep. 18, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 11, 2018	Sep. 10, 2019
Anritsu	Power Meter	ML2495A	1218006	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Sensor	MA2411B	1207363	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	N9030A	MY52350276	Apr. 02, 2019	Apr. 01, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	070501814	Oct. 08, 2018	Oct. 07, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 09, 2018	Aug. 08, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 9. System Verification

### 9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

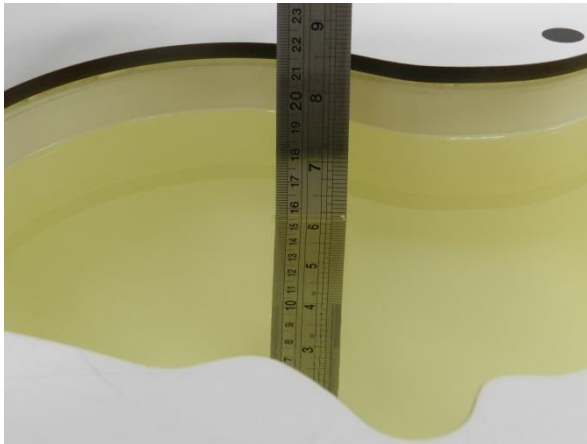


Fig 10.1 Photo of Liquid Height for Head SAR

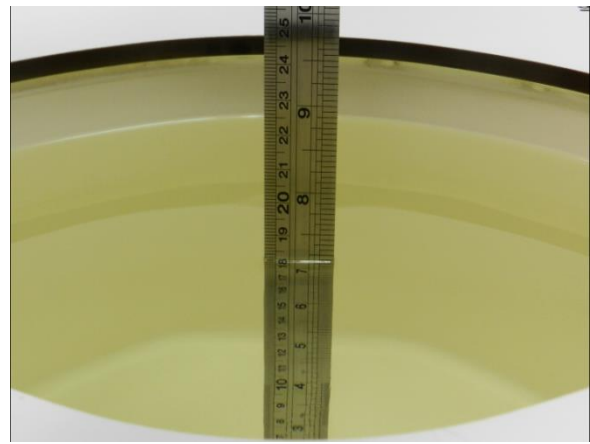


Fig 10.2 Photo of Liquid Height for Body SAR

### 9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

#### Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

#### <Tissue Dielectric Parameter Check Results>


Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	22.3	0.889	43.096	0.89	41.90	-0.11	2.85	±5	2019/6/23
750	22.5	0.898	43.417	0.89	41.90	0.90	3.62	±5	2019/6/24
835	22.5	0.885	42.141	0.90	41.50	-1.67	1.54	±5	2019/6/24
835	22.7	0.906	43.345	0.90	41.50	0.67	4.45	±5	2019/6/25
1750	22.2	1.372	40.787	1.37	40.10	0.15	1.71	±5	2019/6/23
1900	22.4	1.424	39.547	1.40	40.00	1.71	-1.13	±5	2019/6/20
2450	22.9	1.768	40.614	1.80	39.20	-1.78	3.61	±5	2019/6/26
2600	22.3	1.948	38.002	1.96	39.00	-0.61	-2.56	±5	2019/6/19
5250	22.6	4.695	36.183	4.71	35.95	-0.32	0.65	±5	2019/6/27
5250	22.8	4.537	37.569	4.71	35.95	-3.67	4.50	±5	2019/7/7
5600	22.6	5.060	35.683	5.07	35.50	-0.20	0.52	±5	2019/6/27
5600	22.8	4.880	37.076	5.07	35.50	-3.75	4.44	±5	2019/7/7
5750	22.7	5.222	35.473	5.22	35.35	0.04	0.35	±5	2019/6/28

**9.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/6/23	750	250	D750V3-1012	ES3DV3 - SN3124	DAE4 Sn316	1.94	8.47	7.76	-8.38
2019/6/24	750	250	D750V3-1012	ES3DV3 - SN3124	DAE4 Sn316	1.95	8.47	7.8	-7.91
2019/6/24	835	250	D835V2-499	ES3DV3 - SN3124	DAE4 Sn316	2.48	9.59	9.92	3.44
2019/6/25	835	250	D835V2-499	ES3DV3 - SN3124	DAE4 Sn316	2.22	9.59	8.88	-7.40
2019/6/23	1750	250	D1750V2-1068	ES3DV3 - SN3124	DAE4 Sn316	8.47	37.10	33.88	-8.68
2019/6/20	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	10.50	40.20	42	4.48
2019/6/26	2450	250	D2450V2-736	EX3DV4 - SN7306	DAE4 Sn1399	12.50	52.70	50	-5.12
2019/6/19	2600	250	D2600V2-1008	ES3DV3 - SN3124	DAE4 Sn316	13.40	56.40	53.6	-4.96
2019/6/27	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn1399	7.81	80.70	78.1	-3.22
2019/7/7	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn1399	7.55	80.70	75.5	-6.44
2019/6/27	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn1399	8.82	83.30	88.2	5.88
2019/7/7	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn1399	8.51	83.30	85.1	2.16
2019/6/28	5750	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn1399	7.83	83.30	78.3	-6.00

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/6/27	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn1399	2.14	23.20	21.4	-7.76
2019/6/27	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn1399	2.49	23.80	24.9	4.62
2019/6/28	5750	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn1399	2.15	23.80	21.5	-9.66

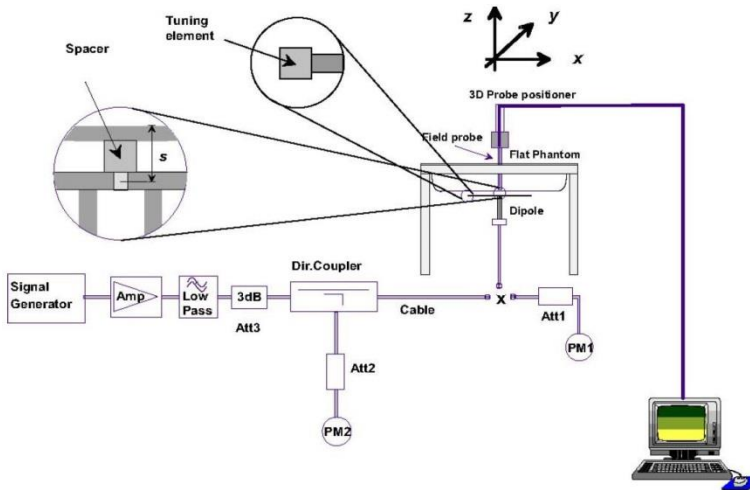

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

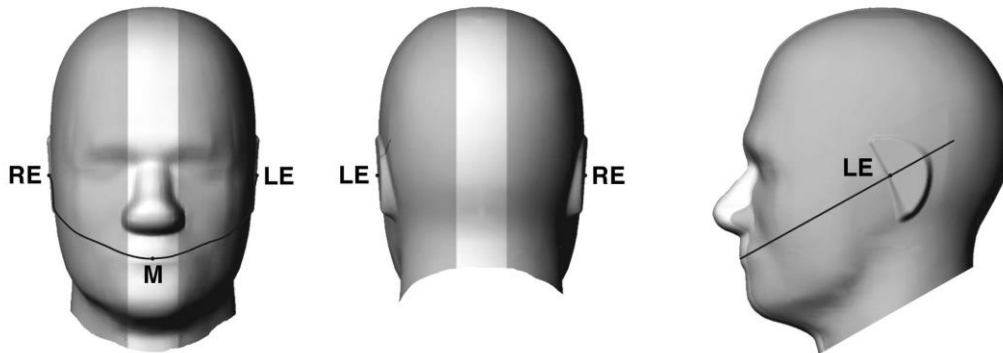


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.


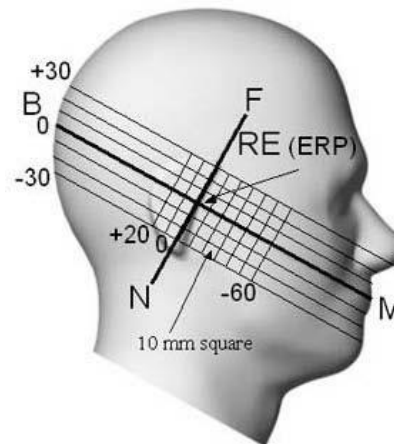



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

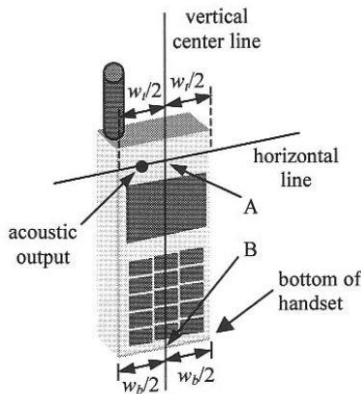

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

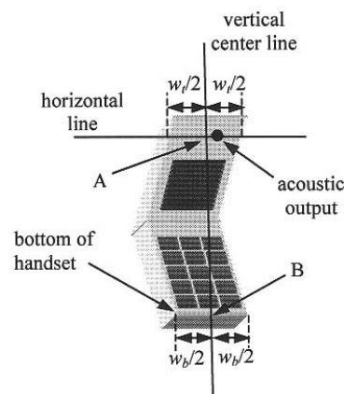


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

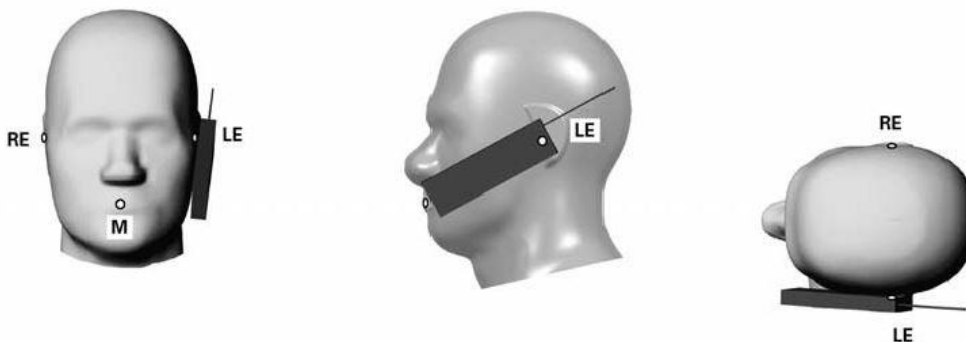

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

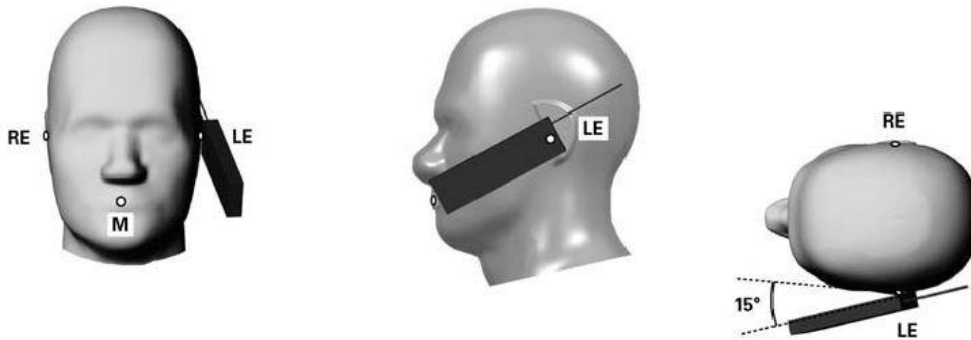


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

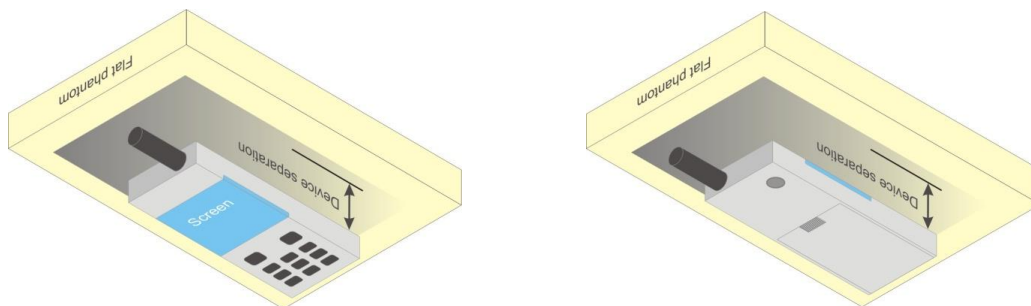

**Fig 9.4 Body Worn Position**





### **10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 11. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum(\text{power of each slot, in mW})/8]$$

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		32.56	32.47	32.48	33.20	23.56	23.47	23.48	24.20
GPRS 1 Tx slot		32.66	32.50	32.52	33.20	23.66	23.50	23.52	24.20
GPRS 2 Tx slots		30.51	30.31	30.28	31.20	24.51	24.31	24.28	25.20
GPRS 3 Tx slots		28.53	28.20	28.15	29.20	24.27	23.94	23.89	24.94
GPRS 4 Tx slots		27.76	27.02	27.07	28.20	24.76	24.02	24.07	25.20
EDGE 1 Tx slot		27.29	27.10	27.04	28.00	18.29	18.10	18.04	19.00
EDGE 2 Tx slots		25.47	25.32	25.26	26.50	19.47	19.32	19.26	20.50
EDGE 3 Tx slots		23.27	23.15	23.15	24.50	19.01	18.89	18.89	20.24
EDGE 4 Tx slots		22.07	21.97	21.85	23.50	19.07	18.97	18.85	20.50
DTM Multi-slot class 5	GSM 1 Tx slot	30.44	30.29	30.24	31.20	24.35	24.19	24.15	25.18
	GPRS 1 Tx slot	30.30	30.13	30.10	31.20				
DTM Multi-slot class 9	GSM 1 Tx slot	30.46	30.27	30.21	31.20	24.37	24.18	24.12	25.18
	GPRS 1 Tx slot	30.31	30.13	30.07	31.20				
DTM Multi-slot class 11	GSM 1 Tx slot	28.33	28.18	28.14	29.20	23.96	23.80	23.78	24.94
	GPRS 2 Tx slots	28.17	28.00	27.99	29.20				
DTM Multi-slot class 5	GSM 1 Tx slot	30.30	30.20	30.19	31.20	22.47	22.36	22.34	23.44
	EDGE 1 Tx slot	25.35	25.21	25.15	26.50				
DTM Multi-slot class 9	GSM 1 Tx slot	30.51	30.38	30.29	31.20	22.62	22.49	22.39	23.44
	EDGE 1 Tx slot	25.27	25.16	25.01	26.50				
DTM Multi-slot class 11	GSM 1 Tx slot	28.36	28.12	28.10	29.20	21.38	21.18	21.14	22.42
	EDGE 2 Tx slots	23.15	23.02	22.96	24.50				



GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		25.53	26.01	26.15	27.20	16.53	17.01	17.15	18.20
GPRS 1 Tx slot		25.58	26.09	26.27	27.20	16.58	17.09	17.27	18.20
GPRS 2 Tx slots		23.80	24.14	24.18	25.20	17.80	18.14	18.18	19.20
GPRS 3 Tx slots		21.64	21.76	22.09	23.20	17.38	17.50	17.83	18.94
GPRS 4 Tx slots		20.36	20.72	20.53	22.20	17.36	17.72	17.53	19.20
EDGE 1 Tx slot		25.46	25.84	25.94	27.00	16.46	16.84	16.94	18.00
EDGE 2 Tx slots		23.95	24.05	24.11	25.50	17.95	18.05	18.11	19.50
EDGE 3 Tx slots		21.86	21.93	22.03	23.50	17.60	17.67	17.77	19.24
EDGE 4 Tx slots		20.61	20.61	20.60	22.50	17.61	17.61	17.60	19.50
DTM Multi-slot class 5	GSM 1 Tx slot	23.72	24.10	24.07	25.20	17.62	17.98	17.94	19.18
	GPRS 1 Tx slot	23.55	23.89	23.85	25.20				
DTM Multi-slot class 9	GSM 1 Tx slot	23.70	24.01	24.02	25.20	17.59	17.89	17.90	19.18
	GPRS 1 Tx slot	23.51	23.81	23.82	25.20				
DTM Multi-slot class 11	GSM 1 Tx slot	21.48	21.68	21.96	23.20	17.13	17.31	17.60	18.94
	GPRS 2 Tx slots	21.35	21.52	21.81	23.20				
DTM Multi-slot class 5	GSM 1 Tx slot	23.62	23.86	24.04	25.20	17.69	17.99	18.18	19.33
	EDGE 1 Tx slot	23.79	24.16	24.36	25.50				
DTM Multi-slot class 9	GSM 1 Tx slot	23.80	24.08	24.27	25.20	17.73	17.99	18.19	19.33
	EDGE 1 Tx slot	23.71	23.95	24.15	25.50				
DTM Multi-slot class 11	GSM 1 Tx slot	21.41	21.55	21.84	23.20	17.40	17.66	17.88	19.14
	EDGE 2 Tx slots	21.78	22.09	22.28	23.50				

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**


1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	18.06	18.13	18.11	18.70	17.87	18.09	17.92	18.70	23.71	23.79	23.78	24.70
3GPP Rel 99	RMC 12.2Kbps	18.09	18.16	18.17	18.70	17.92	18.23	17.94	18.70	23.78	23.85	23.81	24.70
3GPP Rel 6	HSDPA Subtest-1	17.10	17.17	17.14	18.00	16.87	17.01	16.96	18.00	22.80	22.83	22.82	24.00
3GPP Rel 6	HSDPA Subtest-2	17.08	17.09	17.16	18.00	16.90	17.00	16.94	18.00	22.78	22.82	22.77	24.00
3GPP Rel 6	HSDPA Subtest-3	16.60	16.66	16.64	17.50	16.39	16.46	16.44	17.50	22.29	22.29	22.20	23.50
3GPP Rel 6	HSDPA Subtest-4	16.61	16.66	16.60	17.50	16.32	16.49	16.46	17.50	22.30	22.29	22.30	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.02	17.07	17.05	18.00	16.79	16.92	16.87	18.00	16.70	16.81	16.75	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.00	17.02	17.02	18.00	16.76	16.90	16.84	18.00	16.65	16.80	16.74	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.53	16.54	16.52	17.50	16.29	16.37	16.35	17.50	16.16	16.28	16.25	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.51	16.52	16.51	17.50	16.25	16.34	16.33	17.50	16.12	16.23	16.24	23.50
3GPP Rel 6	HSUPA Subtest-1	17.05	17.13	17.12	18.00	16.89	16.99	16.93	18.00	22.76	22.78	22.74	24.00
3GPP Rel 6	HSUPA Subtest-2	15.04	15.14	15.12	16.00	14.87	14.98	14.91	16.00	20.78	20.75	20.75	22.00
3GPP Rel 6	HSUPA Subtest-3	16.04	16.13	16.14	17.00	15.85	15.97	15.90	17.00	21.76	21.77	21.73	23.00
3GPP Rel 6	HSUPA Subtest-4	15.05	15.14	15.12	16.00	14.88	14.99	14.94	16.00	20.76	20.23	20.73	22.00
3GPP Rel 6	HSUPA Subtest-5	17.00	17.20	17.19	18.00	16.90	17.00	16.90	18.00	22.80	22.80	22.75	24.00


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

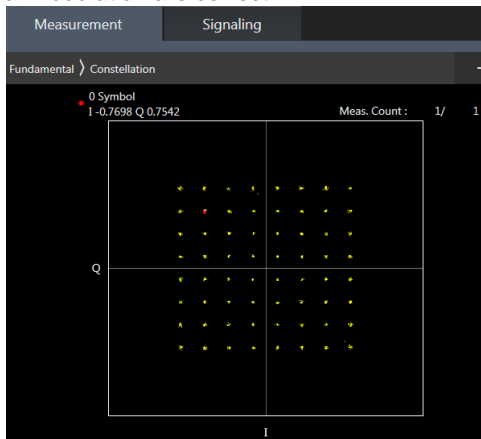

**64QAM**

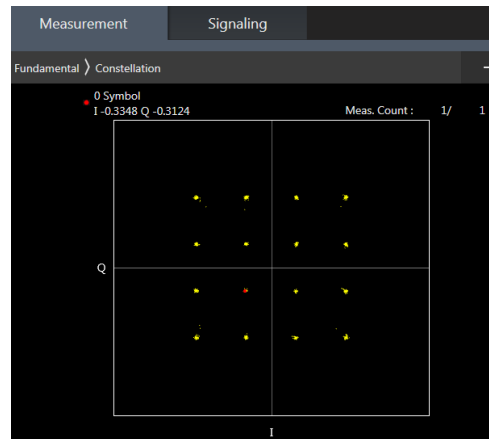

**16QAM**



**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	17.85	18.20	18.21	19	0
20	QPSK	1	49	17.75	17.99	18.16		
20	QPSK	1	99	17.83	18.05	18.09		
20	QPSK	50	0	17.94	18.17	18.21	19	0
20	QPSK	50	24	17.99	18.20	18.24		
20	QPSK	50	50	18.05	18.23	18.29		
20	QPSK	100	0	17.88	18.15	18.21		
20	16QAM	1	0	17.72	18.03	17.67	19	0
20	16QAM	1	49	17.73	17.63	17.74		
20	16QAM	1	99	17.47	17.66	18.04		
20	16QAM	50	0	17.47	17.66	17.71	19	0
20	16QAM	50	24	17.46	17.67	17.75		
20	16QAM	50	50	17.51	17.74	17.82		
20	16QAM	100	0	17.44	17.67	17.72		
20	64QAM	1	0	17.73	17.66	17.76	19	0
20	64QAM	1	49	17.46	17.75	17.73		
20	64QAM	1	99	17.45	17.59	17.84		
20	64QAM	50	0	17.41	17.71	17.62	19	0
20	64QAM	50	24	17.38	17.66	17.74		
20	64QAM	50	50	17.53	17.72	17.82		
20	64QAM	100	0	17.42	17.70	17.76		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.11	18.06	17.99	19	0
15	QPSK	1	37	18.08	18.04	18.01		
15	QPSK	1	74	18.10	18.08	18.02		
15	QPSK	36	0	18.01	18.22	18.00	19	0
15	QPSK	36	20	18.10	18.16	18.17		
15	QPSK	36	39	18.12	18.12	18.18		
15	QPSK	75	0	18.02	18.23	18.12		
15	16QAM	1	0	17.76	17.68	17.58	19	0
15	16QAM	1	37	17.87	17.62	17.89		
15	16QAM	1	74	18.06	18.06	17.79		
15	16QAM	36	0	17.59	17.64	17.56	19	0
15	16QAM	36	20	17.58	17.62	17.67		
15	16QAM	36	39	17.52	17.66	17.59		
15	16QAM	75	0	17.69	17.74	17.72		
15	64QAM	1	0	17.69	18.01	17.81	19	0
15	64QAM	1	37	17.72	17.98	17.72		
15	64QAM	1	74	17.62	17.87	17.83		
15	64QAM	36	0	17.66	17.65	17.63	19	0
15	64QAM	36	20	17.66	17.73	17.76		
15	64QAM	36	39	17.55	17.66	17.85		
15	64QAM	75	0	17.58	17.74	17.68		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.13	17.83	18.11	19	0
10	QPSK	1	25	17.94	17.87	17.97		
10	QPSK	1	49	17.80	17.71	17.97		
10	QPSK	25	0	17.96	18.08	18.10	19	0
10	QPSK	25	12	18.04	18.12	18.10		





**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

10	QPSK	25	25	17.98	17.98	18.06		
10	QPSK	50	0	18.07	18.11	18.12		
10	16QAM	1	0	17.50	17.99	17.53	19	0
10	16QAM	1	25	17.55	17.68	17.97		
10	16QAM	1	49	17.87	17.58	17.97		
10	16QAM	25	0	17.50	17.64	17.59	19	0
10	16QAM	25	12	17.57	17.63	17.64		
10	16QAM	25	25	17.52	17.59	17.54		
10	16QAM	50	0	17.46	17.62	17.66		
10	64QAM	1	0	17.27	17.50	17.64	19	0
10	64QAM	1	25	17.76	17.41	17.35		
10	64QAM	1	49	17.19	17.82	17.64		
10	64QAM	25	0	17.51	17.62	17.72	19	0
10	64QAM	25	12	17.57	17.65	17.63		
10	64QAM	25	25	17.43	17.60	17.53		
10	64QAM	50	0	17.44	17.54	17.65		
Channel				18625	18900	19175		
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.03	17.93	17.95	19	0
5	QPSK	1	12	18.01	18.05	18.06		
5	QPSK	1	24	17.95	17.96	18.13		
5	QPSK	12	0	18.10	18.12	18.11	19	0
5	QPSK	12	7	18.15	18.08	18.23		
5	QPSK	12	13	18.07	18.00	18.13		
5	QPSK	25	0	18.18	18.00	18.12		
5	16QAM	1	0	17.72	17.47	17.34	19	0
5	16QAM	1	12	17.60	17.43	17.69		
5	16QAM	1	24	17.49	17.53	17.66		
5	16QAM	12	0	17.67	17.61	17.58	19	0
5	16QAM	12	7	17.70	17.52	17.74		
5	16QAM	12	13	17.65	17.59	17.72		
5	16QAM	25	0	17.61	17.57	17.62		
5	64QAM	1	0	17.84	17.76	17.75		
5	64QAM	1	12	17.86	17.85	17.89	19	0
5	64QAM	1	24	17.70	17.77	17.84		
5	64QAM	12	0	17.71	17.65	17.71		
5	64QAM	12	7	17.73	17.67	17.77	19	0
5	64QAM	12	13	17.56	17.69	17.82		
5	64QAM	25	0	17.68	17.56	17.60		
Channel				18615	18900	19185		
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	17.95	17.90	18.09	19	0
3	QPSK	1	8	18.07	17.99	18.17		
3	QPSK	1	14	17.92	17.94	18.09		
3	QPSK	8	0	18.11	17.98	18.07	19	0
3	QPSK	8	4	18.15	18.07	18.11		
3	QPSK	8	7	18.09	18.06	18.15		
3	QPSK	15	0	18.16	18.10	18.07		
3	16QAM	1	0	17.44	17.88	17.81	19	0
3	16QAM	1	8	17.52	17.91	17.97		
3	16QAM	1	14	17.93	17.59	17.66		
3	16QAM	8	0	17.74	17.63	17.52	19	0
3	16QAM	8	4	17.79	17.62	17.72		
3	16QAM	8	7	17.75	17.66	17.76		
3	16QAM	15	0	17.68	17.65	17.59		
3	64QAM	1	0	17.92	17.67	17.69		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

3	64QAM	1	8	17.94	17.93	18.00	19	0
3	64QAM	1	14	17.77	17.75	17.73		
3	64QAM	8	0	17.79	17.58	17.66		
3	64QAM	8	4	17.66	17.64	17.68		
3	64QAM	8	7	17.69	17.54	17.78		
3	64QAM	15	0	17.65	17.58	17.66		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.03	17.90	17.86	19	0
1.4	QPSK	1	3	18.06	17.99	18.05		
1.4	QPSK	1	5	17.93	18.01	17.92		
1.4	QPSK	3	0	17.99	17.91	17.98		
1.4	QPSK	3	1	18.06	18.00	18.04		
1.4	QPSK	3	3	18.10	17.99	18.00		
1.4	QPSK	6	0	18.13	17.99	18.00	19	0
1.4	16QAM	1	0	17.56	17.87	17.50	19	0
1.4	16QAM	1	3	17.68	17.59	17.71		
1.4	16QAM	1	5	17.90	17.54	17.58		
1.4	16QAM	3	0	17.53	17.52	17.37		
1.4	16QAM	3	1	17.58	17.55	17.43		
1.4	16QAM	3	3	17.40	17.34	17.54		
1.4	16QAM	6	0	17.63	17.55	17.65	19	0
1.4	64QAM	1	0	17.58	17.58	17.66	19	0
1.4	64QAM	1	3	17.97	17.80	17.58		
1.4	64QAM	1	5	17.93	17.62	17.57		
1.4	64QAM	3	0	17.66	17.50	17.69		
1.4	64QAM	3	1	17.68	17.61	17.58		
1.4	64QAM	3	3	17.58	17.73	17.59		
1.4	64QAM	6	0	17.54	17.70	17.53	19	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	18.06	18.18	18.23	19	0
20	QPSK	1	49	17.99	18.11	18.20		
20	QPSK	1	99	17.97	18.13	18.10		
20	QPSK	50	0	18.15	18.24	18.26	19	0
20	QPSK	50	24	18.17	18.24	18.36		
20	QPSK	50	50	18.14	18.12	18.28		
20	QPSK	100	0	18.12	18.16	18.26		
20	16QAM	1	0	17.59	18.14	17.63	19	0
20	16QAM	1	49	17.97	18.10	17.79		
20	16QAM	1	99	17.60	17.57	17.51		
20	16QAM	50	0	17.67	17.72	17.81	19	0
20	16QAM	50	24	17.71	17.74	17.79		
20	16QAM	50	50	17.58	17.71	17.80		
20	16QAM	100	0	17.62	17.66	17.81		
20	64QAM	100	0	17.96	17.85	18.14	19	0
20	64QAM	100	49	17.82	17.79	17.83		
20	64QAM	100	99	18.00	18.01	17.80		
20	64QAM	100	0	17.62	17.79	17.82	19	0
20	64QAM	100	24	17.72	17.70	17.83		
20	64QAM	100	50	17.60	17.66	17.82		
20	64QAM	100	0	17.66	17.74	17.82		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	17.92	18.08	18.22	19	0
15	QPSK	1	37	17.99	18.07	18.28		
15	QPSK	1	74	17.91	18.05	18.30		
15	QPSK	36	0	17.97	18.23	18.30	19	0
15	QPSK	36	20	18.09	18.26	18.35		
15	QPSK	36	39	18.04	18.19	18.35		
15	QPSK	75	0	17.97	18.18	18.31		
15	16QAM	1	0	17.58	17.67	17.90	19	0
15	16QAM	1	37	17.78	17.62	17.92		
15	16QAM	1	74	17.56	18.11	18.02		
15	16QAM	36	0	17.53	17.70	17.82	19	0
15	16QAM	36	20	17.56	17.71	17.84		
15	16QAM	36	39	17.50	17.68	17.78		
15	16QAM	75	0	17.54	17.65	17.84		
15	64QAM	1	0	17.72	17.76	17.94	19	0
15	64QAM	1	37	17.47	18.09	17.76		
15	64QAM	1	74	17.67	17.80	17.68		
15	64QAM	36	0	17.49	17.76	17.93	19	0
15	64QAM	36	20	17.67	17.72	17.83		
15	64QAM	36	39	17.60	17.75	17.87		
15	64QAM	75	0	17.58	17.75	17.83		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	17.73	17.84	18.16	19	0
10	QPSK	1	25	17.77	18.09	18.21		
10	QPSK	1	49	17.65	17.78	18.03		
10	QPSK	25	0	18.01	18.15	18.19	19	0
10	QPSK	25	12	18.02	18.16	18.17		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

10	QPSK	25	25	17.96	18.01	18.14		
10	QPSK	50	0	18.00	18.07	18.15		
10	16QAM	1	0	17.53	17.62	17.96	19	0
10	16QAM	1	25	17.93	17.58	18.14		
10	16QAM	1	49	18.04	17.28	17.78		
10	16QAM	25	0	17.54	17.58	17.73	19	0
10	16QAM	25	12	17.54	17.69	17.67		
10	16QAM	25	25	17.42	17.53	17.59		
10	16QAM	50	0	17.53	17.59	17.62		
10	64QAM	1	0	17.26	17.98	17.92	19	0
10	64QAM	1	25	17.49	17.91	17.95		
10	64QAM	1	49	17.50	17.80	17.57		
10	64QAM	25	0	17.59	17.60	17.70	19	0
10	64QAM	25	12	17.56	17.61	17.76		
10	64QAM	25	25	17.55	17.59	17.71		
10	64QAM	50	0	17.43	17.64	17.71		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	17.95	18.08	17.98	19	0
5	QPSK	1	12	17.96	18.04	18.03		
5	QPSK	1	24	17.84	17.90	17.99		
5	QPSK	12	0	18.01	18.12	18.03	19	0
5	QPSK	12	7	18.02	18.11	18.01		
5	QPSK	12	13	18.00	18.04	18.14		
5	QPSK	25	0	18.04	18.04	18.08		
5	16QAM	1	0	17.33	17.50	17.59	19	0
5	16QAM	1	12	17.38	17.62	17.38		
5	16QAM	1	24	17.29	17.32	17.42		
5	16QAM	12	0	17.57	17.57	17.60	19	0
5	16QAM	12	7	17.60	17.64	17.58		
5	16QAM	12	13	17.54	17.55	17.63		
5	16QAM	25	0	17.49	17.54	17.64		
5	64QAM	1	0	17.73	17.61	17.87	19	0
5	64QAM	1	12	17.74	17.90	17.89		
5	64QAM	1	24	17.68	17.59	17.51		
5	64QAM	12	0	17.54	17.76	17.67	19	0
5	64QAM	12	7	17.66	17.55	17.79		
5	64QAM	12	13	17.61	17.64	17.73		
5	64QAM	25	0	17.48	17.51	17.67		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	17.79	17.98	17.93	19	0
3	QPSK	1	8	18.01	18.18	18.12		
3	QPSK	1	14	17.90	17.98	17.97		
3	QPSK	8	0	17.99	18.06	17.96	19	0
3	QPSK	8	4	18.03	18.08	18.15		
3	QPSK	8	7	18.02	18.01	18.07		
3	QPSK	15	0	17.98	18.03	18.12		
3	16QAM	1	0	17.78	18.01	17.92	19	0
3	16QAM	1	8	18.02	18.11	18.08		
3	16QAM	1	14	17.86	17.90	17.99		
3	16QAM	8	0	17.59	17.72	17.63	19	0
3	16QAM	8	4	17.63	17.64	17.68		
3	16QAM	8	7	17.59	17.67	17.69		
3	16QAM	15	0	17.58	17.44	17.56		
3	64QAM	1	0	17.61	17.71	17.63	19	0



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

3	64QAM	1	8	17.74	17.94	18.07	19	0
3	64QAM	1	14	17.61	17.65	17.71		
3	64QAM	8	0	17.68	17.64	17.53		
3	64QAM	8	4	17.56	17.82	17.68		
3	64QAM	8	7	17.59	17.61	17.72		
3	64QAM	15	0	17.54	17.56	17.64		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	17.76	17.98	17.90	19	0
1.4	QPSK	1	3	17.98	18.04	18.02		
1.4	QPSK	1	5	17.92	17.91	18.03		
1.4	QPSK	3	0	17.90	17.89	17.95		
1.4	QPSK	3	1	17.95	18.01	18.06		
1.4	QPSK	3	3	17.90	17.89	17.97		
1.4	QPSK	6	0	17.94	17.97	18.03	19	0
1.4	16QAM	1	0	17.39	17.38	17.37	19	0
1.4	16QAM	1	3	17.77	18.00	17.62		
1.4	16QAM	1	5	17.52	17.45	17.62		
1.4	16QAM	3	0	17.22	17.39	17.41		
1.4	16QAM	3	1	17.43	17.57	17.64		
1.4	16QAM	3	3	17.34	17.45	17.41		
1.4	16QAM	6	0	17.41	17.54	17.54	19	0
1.4	64QAM	1	0	17.48	17.55	17.54	19	0
1.4	64QAM	1	3	17.73	17.62	17.55		
1.4	64QAM	1	5	17.75	17.50	17.58		
1.4	64QAM	3	0	17.50	17.53	17.76		
1.4	64QAM	3	1	17.55	17.61	17.78		
1.4	64QAM	3	3	17.51	17.55	17.80		
1.4	64QAM	6	0	17.49	17.55	17.54	19	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.55	23.53	23.65	25	0
10	QPSK	1	25	23.48	23.51	23.62		
10	QPSK	1	49	23.33	23.35	23.51		
10	QPSK	25	0	22.59	22.67	22.66	24	1
10	QPSK	25	12	22.58	22.63	22.64		
10	QPSK	25	25	22.50	22.55	22.61		
10	QPSK	50	0	22.49	22.62	22.63		
10	16QAM	1	0	22.13	22.19	22.35	24	1
10	16QAM	1	25	22.13	22.40	22.08		
10	16QAM	1	49	22.41	22.29	22.26		
10	16QAM	25	0	21.12	21.10	21.21	23	2
10	16QAM	25	12	21.03	21.17	21.19		
10	16QAM	25	25	21.17	21.13	21.07		
10	16QAM	50	0	21.15	21.16	21.14		
10	64QAM	1	0	21.03	21.34	21.24	23	2
10	64QAM	1	25	21.10	21.22	21.26		
10	64QAM	1	49	21.18	21.14	21.26		
10	64QAM	25	0	20.06	20.20	20.22	22	3
10	64QAM	25	12	20.20	20.21	20.13		
10	64QAM	25	25	20.04	20.23	20.10		
10	64QAM	50	0	20.14	20.16	20.07		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.47	23.45	23.54	25	0
5	QPSK	1	12	23.42	23.61	23.60		
5	QPSK	1	24	23.45	23.52	23.58		
5	QPSK	12	0	22.56	22.50	22.58	24	1
5	QPSK	12	7	22.65	22.65	22.59		
5	QPSK	12	13	22.57	22.73	22.64		
5	QPSK	25	0	22.54	22.64	22.59		
5	16QAM	1	0	22.14	22.05	22.14	24	1
5	16QAM	1	12	22.20	22.21	22.11		
5	16QAM	1	24	22.13	22.16	22.09		
5	16QAM	12	0	21.18	21.04	21.04	23	2
5	16QAM	12	7	21.20	21.23	21.08		
5	16QAM	12	13	21.18	21.21	21.21		
5	16QAM	25	0	21.12	21.24	21.14		
5	64QAM	1	0	21.28	21.34	21.32	23	2
5	64QAM	1	12	21.28	21.39	21.44		
5	64QAM	1	24	21.30	21.12	21.36		
5	64QAM	12	0	20.26	20.01	20.20	22	3
5	64QAM	12	7	20.33	20.38	20.21		
5	64QAM	12	13	20.24	20.37	20.29		
5	64QAM	25	0	20.07	20.20	20.13		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.54	23.38	23.46	25	0
3	QPSK	1	8	23.58	23.64	23.63		
3	QPSK	1	14	23.48	23.58	23.64		
3	QPSK	8	0	22.56	22.58	22.52	24	1
3	QPSK	8	4	22.62	22.66	22.65		



3	QPSK	8	7	22.66	22.73	22.71		
3	QPSK	15	0	22.65	22.62	22.63		
3	16QAM	1	0	22.03	22.37	22.41	24	1
3	16QAM	1	8	22.61	22.51	22.28		
3	16QAM	1	14	22.35	22.18	22.49		
3	16QAM	8	0	21.20	21.11	21.15	23	2
3	16QAM	8	4	21.28	21.33	21.39		
3	16QAM	8	7	21.27	21.27	21.29		
3	16QAM	15	0	21.14	21.12	21.29		
3	64QAM	1	0	21.33	21.27	21.19	23	2
3	64QAM	1	8	21.36	21.33	21.54		
3	64QAM	1	14	21.42	21.47	21.26		
3	64QAM	8	0	20.15	20.10	20.04	22	3
3	64QAM	8	4	20.21	20.24	20.38		
3	64QAM	8	7	20.26	20.25	20.32		
3	64QAM	15	0	20.14	20.30	20.14		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.41	23.40	23.46	25	0
1.4	QPSK	1	3	23.57	23.55	23.61		
1.4	QPSK	1	5	23.44	23.56	23.50		
1.4	QPSK	3	0	23.38	23.49	23.43		
1.4	QPSK	3	1	23.51	23.50	23.57		
1.4	QPSK	3	3	23.50	23.47	23.53		
1.4	QPSK	6	0	22.55	22.63	22.51	24	1
1.4	16QAM	1	0	22.02	22.08	22.12	24	1
1.4	16QAM	1	3	22.15	22.29	22.30		
1.4	16QAM	1	5	22.02	22.22	22.20		
1.4	16QAM	3	0	22.03	22.09	22.05		
1.4	16QAM	3	1	22.08	22.09	22.02		
1.4	16QAM	3	3	22.08	22.06	22.01		
1.4	16QAM	6	0	21.00	21.16	21.21	23	2
1.4	64QAM	1	0	21.06	21.09	21.30	23	2
1.4	64QAM	1	3	21.11	21.51	21.16		
1.4	64QAM	1	5	21.04	21.15	21.12		
1.4	64QAM	3	0	21.22	21.16	21.19		
1.4	64QAM	3	1	21.06	21.02	21.06		
1.4	64QAM	3	3	21.07	21.07	21.26		
1.4	64QAM	6	0	20.06	20.04	20.04	22	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	19.74	19.67	19.57	21	0
20	QPSK	1	49	19.77	19.65	19.56		
20	QPSK	1	99	19.81	19.68	19.58		
20	QPSK	50	0	19.85	19.81	19.74	21	0
20	QPSK	50	24	19.94	19.83	19.75		
20	QPSK	50	50	19.93	19.81	19.68		
20	QPSK	100	0	19.90	19.82	19.70		
20	16QAM	1	0	19.47	19.39	19.32	21	0
20	16QAM	1	49	19.51	19.44	19.32		
20	16QAM	1	99	19.55	19.48	19.37		
20	16QAM	50	0	19.35	19.32	19.26	21	0
20	16QAM	50	24	19.41	19.34	19.25		
20	16QAM	50	50	19.45	19.33	19.19		
20	16QAM	100	0	19.39	19.30	19.21		
20	64QAM	1	0	19.45	19.36	19.28	21	0
20	64QAM	1	49	19.46	19.39	19.27		
20	64QAM	1	99	19.52	19.43	19.30		
20	64QAM	50	0	19.33	19.33	19.25	21	0
20	64QAM	50	24	19.41	19.33	19.24		
20	64QAM	50	50	19.45	19.32	19.19		
20	64QAM	100	0	19.38	19.30	19.22		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	19.68	19.70	19.72	21	0
15	QPSK	1	37	19.71	19.68	19.77		
15	QPSK	1	74	19.75	19.72	19.79		
15	QPSK	36	0	19.76	19.84	19.88	21	0
15	QPSK	36	20	19.86	19.86	19.89		
15	QPSK	36	39	19.86	19.82	19.89		
15	QPSK	75	0	19.84	19.85	19.89		
15	16QAM	1	0	19.45	19.44	19.49	21	0
15	16QAM	1	37	19.46	19.44	19.48		
15	16QAM	1	74	19.50	19.50	19.54		
15	16QAM	36	0	19.27	19.33	19.40	21	0
15	16QAM	36	20	19.34	19.35	19.41		
15	16QAM	36	39	19.37	19.32	19.37		
15	16QAM	75	0	19.33	19.32	19.39		
15	64QAM	1	0	19.40	19.37	19.49	21	0
15	64QAM	1	37	19.39	19.42	19.48		
15	64QAM	1	74	19.45	19.44	19.49		
15	64QAM	36	0	19.29	19.36	19.40	21	0
15	64QAM	36	20	19.37	19.37	19.42		
15	64QAM	36	39	19.39	19.33	19.41		
15	64QAM	75	0	19.31	19.34	19.39		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	19.56	19.56	19.59	21	0
10	QPSK	1	25	19.58	19.59	19.57		
10	QPSK	1	49	19.63	19.59	19.60		
10	QPSK	25	0	19.66	19.70	19.68	21	0
10	QPSK	25	12	19.68	19.74	19.71		





10	QPSK	25	25	19.65	19.70	19.68		
10	QPSK	50	0	19.68	19.71	19.68		
10	16QAM	1	0	19.33	19.32	19.29	21	0
10	16QAM	1	25	19.36	19.39	19.36		
10	16QAM	1	49	19.34	19.39	19.33		
10	16QAM	25	0	19.15	19.19	19.18	21	0
10	16QAM	25	12	19.17	19.21	19.20		
10	16QAM	25	25	19.16	19.19	19.18		
10	16QAM	50	0	19.16	19.19	19.16		
10	64QAM	1	0	19.22	19.28	19.32	21	0
10	64QAM	1	25	19.22	19.32	19.32		
10	64QAM	1	49	19.30	19.35	19.35		
10	64QAM	25	0	19.15	19.24	19.20	21	0
10	64QAM	25	12	19.17	19.24	19.23		
10	64QAM	25	25	19.15	19.22	19.19		
10	64QAM	50	0	19.16	19.22	19.21		
Channel				20775	21100	21425		
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.55	19.54	19.57	21	0
5	QPSK	1	12	19.69	19.65	19.62		
5	QPSK	1	24	19.73	19.58	19.63		
5	QPSK	12	0	19.68	19.66	19.73	21	0
5	QPSK	12	7	19.81	19.75	19.79		
5	QPSK	12	13	19.84	19.74	19.76		
5	QPSK	25	0	19.79	19.70	19.72		
5	16QAM	1	0	19.36	19.27	19.32	21	0
5	16QAM	1	12	19.47	19.44	19.39		
5	16QAM	1	24	19.47	19.35	19.40		
5	16QAM	12	0	19.17	19.16	19.20	21	0
5	16QAM	12	7	19.33	19.27	19.33		
5	16QAM	12	13	19.37	19.24	19.31		
5	16QAM	25	0	19.29	19.19	19.25		
5	64QAM	1	0	19.31	19.28	19.35		
5	64QAM	1	12	19.43	19.42	19.38	21	0
5	64QAM	1	24	19.45	19.33	19.42		
5	64QAM	12	0	19.26	19.22	19.28		
5	64QAM	12	7	19.43	19.33	19.36	21	0
5	64QAM	12	13	19.41	19.32	19.37		
5	64QAM	25	0	19.32	19.25	19.25		
5	64QAM	25	0	19.32	19.25	19.25		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.39	23.07	23.30	25	0
10	QPSK	1	25	23.43	23.08	23.27		
10	QPSK	1	49	23.95	23.19	23.51		
10	QPSK	25	0	22.56	22.27	22.44	24	1
10	QPSK	25	12	22.54	22.35	22.44		
10	QPSK	25	25	22.69	22.36	22.51		
10	QPSK	50	0	22.67	22.34	22.38	24	1
10	16QAM	1	0	22.02	22.14	21.57		
10	16QAM	1	25	21.95	22.19	22.01		
10	16QAM	1	49	21.95	21.96	22.61	23	2
10	16QAM	25	0	21.20	20.92	20.88		
10	16QAM	25	12	21.16	21.01	21.03		
10	16QAM	25	25	21.20	20.87	20.91	23	2
10	16QAM	50	0	21.09	20.84	20.92		
10	64QAM	1	0	21.23	20.65	20.97		
10	64QAM	1	25	21.18	20.88	21.05	23	2
10	64QAM	1	49	21.50	21.09	21.20		
10	64QAM	25	0	20.17	19.89	19.92		
10	64QAM	25	12	20.05	19.81	20.03	22	3
10	64QAM	25	25	20.07	20.04	19.97		
10	64QAM	50	0	20.10	19.94	19.95		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.36	23.21	23.23	25	0
5	QPSK	1	12	23.42	23.35	23.24		
5	QPSK	1	24	23.51	23.33	23.44		
5	QPSK	12	0	22.49	22.29	22.42	24	1
5	QPSK	12	7	22.57	22.33	22.47		
5	QPSK	12	13	22.63	22.38	22.46		
5	QPSK	25	0	22.51	22.39	22.51	24	1
5	16QAM	1	0	21.71	21.71	22.03		
5	16QAM	1	12	22.07	21.96	22.06		
5	16QAM	1	24	22.49	21.67	22.10	23	2
5	16QAM	12	0	20.96	20.87	20.98		
5	16QAM	12	7	21.18	20.96	21.04		
5	16QAM	12	13	21.23	20.93	21.02	23	2
5	16QAM	25	0	21.08	20.91	20.95		
5	64QAM	1	0	20.91	20.73	20.72		
5	64QAM	1	12	21.33	20.93	21.04	23	2
5	64QAM	1	24	21.41	21.14	20.78		
5	64QAM	12	0	20.05	19.90	19.93		
5	64QAM	12	7	20.24	19.93	20.08	22	3
5	64QAM	12	13	20.19	20.06	20.02		
5	64QAM	25	0	20.06	19.89	20.03		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.39	23.18	23.36	25	0
3	QPSK	1	8	23.57	23.31	23.55		
3	QPSK	1	14	23.47	23.33	23.31		
3	QPSK	8	0	22.50	22.32	22.42	24	1
3	QPSK	8	4	22.61	22.34	22.53		



3	QPSK	8	7	22.53	22.32	22.44		
3	QPSK	15	0	22.61	22.33	22.49		
3	16QAM	1	0	21.81	22.13	22.20	24	1
3	16QAM	1	8	22.55	22.03	21.92		
3	16QAM	1	14	22.27	21.93	22.16	23	2
3	16QAM	8	0	21.06	20.89	21.02		
3	16QAM	8	4	21.12	21.00	21.20		
3	16QAM	8	7	21.12	20.95	21.02		
3	16QAM	15	0	21.15	20.91	20.99	23	2
3	64QAM	1	0	21.04	21.01	20.84		
3	64QAM	1	8	21.21	21.29	21.34		
3	64QAM	1	14	21.33	21.14	21.30		
3	64QAM	8	0	20.01	19.87	20.00	22	3
3	64QAM	8	4	20.15	19.91	20.11		
3	64QAM	8	7	20.21	19.97	20.05		
3	64QAM	15	0	20.16	19.90	19.93		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.36	23.14	23.31	25	0
1.4	QPSK	1	3	23.52	23.28	23.45		
1.4	QPSK	1	5	23.36	23.24	23.35		
1.4	QPSK	3	0	23.36	23.19	23.34		
1.4	QPSK	3	1	23.36	23.23	23.43		
1.4	QPSK	3	3	23.35	23.23	23.33		
1.4	QPSK	6	0	22.40	22.26	22.41	24	1
1.4	16QAM	1	0	22.33	21.78	22.05	24	1
1.4	16QAM	1	3	22.09	21.97	22.10		
1.4	16QAM	1	5	22.11	21.94	21.98		
1.4	16QAM	3	0	21.99	21.74	21.72		
1.4	16QAM	3	1	22.06	21.76	21.95		
1.4	16QAM	3	3	21.97	21.81	21.88		
1.4	16QAM	6	0	21.08	20.80	20.96	23	2
1.4	64QAM	1	0	20.98	20.77	21.18	23	2
1.4	64QAM	1	3	21.04	20.89	21.10		
1.4	64QAM	1	5	20.96	20.83	20.93		
1.4	64QAM	3	0	20.86	20.91	21.08		
1.4	64QAM	3	1	20.92	20.97	21.12		
1.4	64QAM	3	3	21.15	20.65	21.14		
1.4	64QAM	6	0	19.98	19.71	19.91	22	3



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.18		25	0
10	QPSK	1	25		23.52			
10	QPSK	1	49		23.45			
10	QPSK	25	0		22.52		24	1
10	QPSK	25	12		22.65			
10	QPSK	25	25		22.66			
10	QPSK	50	0		22.64		24	1
10	16QAM	1	0		22.30			
10	16QAM	1	25		22.33			
10	16QAM	1	49		22.31		23	2
10	16QAM	25	0		21.06			
10	16QAM	25	12		21.09			
10	16QAM	25	25		20.94		23	2
10	16QAM	50	0		20.92			
10	64QAM	1	0		20.69			
10	64QAM	1	25		21.34		23	2
10	64QAM	1	49		21.15			
10	64QAM	25	0		20.07			
10	64QAM	25	12		20.06		22	3
10	64QAM	25	25		20.02			
10	64QAM	50	0		20.03			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.13	23.41	23.25	25	0
5	QPSK	1	12	23.47	23.34	23.36		
5	QPSK	1	24	23.42	23.46	23.49		
5	QPSK	12	0	22.51	22.59	22.53	24	1
5	QPSK	12	7	22.59	22.56	22.55		
5	QPSK	12	13	22.52	22.68	22.60		
5	QPSK	25	0	22.46	22.59	22.63	24	1
5	16QAM	1	0	22.11	22.25	21.97		
5	16QAM	1	12	22.03	22.37	22.40		
5	16QAM	1	24	22.46	22.17	22.45	23	2
5	16QAM	12	0	20.98	20.96	21.01		
5	16QAM	12	7	20.96	21.11	21.18		
5	16QAM	12	13	20.95	21.07	20.99	23	2
5	16QAM	25	0	21.11	21.14	21.04		
5	64QAM	1	0	20.81	20.66	20.90		
5	64QAM	1	12	21.07	20.74	21.00	23	2
5	64QAM	1	24	21.24	21.05	21.05		
5	64QAM	12	0	19.97	20.06	20.09		
5	64QAM	12	7	20.06	20.10	20.17	22	3
5	64QAM	12	13	20.12	20.32	20.10		
5	64QAM	25	0	20.12	20.18	20.16		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.49	23.50	23.47	25	0
10	QPSK	1	25	23.69	23.69	23.76		
10	QPSK	1	49	23.68	23.52	23.67		
10	QPSK	25	0	22.68	22.71	22.72	24	1
10	QPSK	25	12	22.74	22.65	22.67		
10	QPSK	25	25	22.78	22.66	22.69		
10	QPSK	50	0	22.72	22.77	22.74		
10	16QAM	1	0	22.48	22.53	22.00	24	1
10	16QAM	1	25	22.42	22.41	22.02		
10	16QAM	1	49	22.37	22.47	22.89		
10	16QAM	25	0	21.14	21.18	21.15	23	2
10	16QAM	25	12	21.32	21.20	21.22		
10	16QAM	25	25	21.16	21.16	21.21		
10	16QAM	50	0	21.28	21.24	21.23		
10	64QAM	1	0	21.59	21.23	21.41	23	2
10	64QAM	1	25	21.37	21.20	21.22		
10	64QAM	1	49	21.49	21.10	21.04		
10	64QAM	25	0	20.20	20.30	20.17	22	3
10	64QAM	25	12	20.26	20.23	20.28		
10	64QAM	25	25	20.14	20.21	20.35		
10	64QAM	50	0	20.18	20.20	20.23		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.54	23.35	23.31	25	0
5	QPSK	1	12	23.62	23.65	23.45		
5	QPSK	1	24	23.62	23.69	23.50		
5	QPSK	12	0	22.70	22.65	22.50	24	1
5	QPSK	12	7	22.80	22.73	22.52		
5	QPSK	12	13	22.76	22.76	22.56		
5	QPSK	25	0	22.73	22.72	22.53		
5	16QAM	1	0	22.39	22.46	22.34	24	1
5	16QAM	1	12	22.31	22.36	22.51		
5	16QAM	1	24	22.66	22.66	22.50		
5	16QAM	12	0	21.17	21.14	21.04	23	2
5	16QAM	12	7	21.38	21.29	21.00		
5	16QAM	12	13	21.32	21.24	21.10		
5	16QAM	25	0	21.28	21.11	21.01		
5	64QAM	1	0	21.12	21.06	21.17	23	2
5	64QAM	1	12	21.33	21.05	21.07		
5	64QAM	1	24	21.32	21.17	21.21		
5	64QAM	12	0	20.26	20.29	20.09	22	3
5	64QAM	12	7	20.35	20.26	20.11		
5	64QAM	12	13	20.37	20.24	20.16		
5	64QAM	25	0	20.32	20.20	20.07		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	18.30	18.02	18.31	19	0
20	QPSK	1	49	18.14	17.91	18.16		
20	QPSK	1	99	18.14	17.77	18.28		
20	QPSK	50	0	18.24	18.07	18.19	19	0
20	QPSK	50	24	18.25	18.08	18.39		
20	QPSK	50	50	18.23	18.04	18.33		
20	QPSK	100	0	18.27	17.99	18.25	19	0
20	16QAM	1	0	18.26	17.68	18.19		
20	16QAM	1	49	17.51	17.89	17.66		
20	16QAM	1	99	18.04	17.80	18.15	19	0
20	16QAM	50	0	17.70	17.53	17.68		
20	16QAM	50	24	17.76	17.58	17.82		
20	16QAM	50	50	17.71	17.51	17.80	19	0
20	16QAM	100	0	17.80	17.51	17.83		
20	64QAM	1	0	18.04	17.88	18.11		
20	64QAM	1	49	17.96	17.66	18.02	19	0
20	64QAM	1	99	18.11	17.79	18.03		
20	64QAM	50	0	17.71	17.48	17.69		
20	64QAM	50	24	17.82	17.55	17.80	19	0
20	64QAM	50	50	17.73	17.52	17.79		
20	64QAM	100	0	17.72	17.55	17.84		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	18.12	18.07	18.05	19	0
15	QPSK	1	37	18.29	17.98	18.14		
15	QPSK	1	74	18.38	17.90	18.29		
15	QPSK	36	0	18.33	18.04	18.27	19	0
15	QPSK	36	20	18.31	18.08	18.26		
15	QPSK	36	39	18.28	17.99	18.27		
15	QPSK	75	0	18.36	18.05	18.27	19	0
15	16QAM	1	0	17.93	17.63	17.91		
15	16QAM	1	37	18.19	17.74	17.99		
15	16QAM	1	74	18.12	18.03	17.92	19	0
15	16QAM	36	0	17.74	17.61	17.67		
15	16QAM	36	20	17.80	17.56	17.74		
15	16QAM	36	39	17.89	17.48	17.70	19	0
15	16QAM	75	0	17.85	17.47	17.80		
15	64QAM	1	0	17.90	17.76	17.86		
15	64QAM	1	37	17.75	17.81	17.76	19	0
15	64QAM	1	74	18.13	17.68	17.76		
15	64QAM	36	0	17.88	17.61	17.84		
15	64QAM	36	20	17.96	17.64	17.79	19	0
15	64QAM	36	39	17.85	17.59	17.93		
15	64QAM	75	0	17.86	17.53	17.77		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	18.13	17.78	17.91	19	0
10	QPSK	1	25	18.18	17.66	17.80		
10	QPSK	1	49	18.07	17.56	17.88		
10	QPSK	25	0	18.19	17.83	18.03	19	0
10	QPSK	25	12	18.19	17.87	18.10		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

10	QPSK	25	25	18.17	17.82	18.09		
10	QPSK	50	0	18.16	17.90	18.14		
10	16QAM	1	0	18.06	17.55	17.65	19	0
10	16QAM	1	25	17.93	17.45	17.67		
10	16QAM	1	49	17.67	17.31	17.76		
10	16QAM	25	0	17.67	17.39	17.67	19	0
10	16QAM	25	12	17.74	17.36	17.69		
10	16QAM	25	25	17.66	17.49	17.64		
10	16QAM	50	0	17.67	17.46	17.56		
10	64QAM	1	0	17.71	17.54	17.60	19	0
10	64QAM	1	25	17.56	17.66	17.74		
10	64QAM	1	49	17.35	17.18	17.31		
10	64QAM	25	0	17.67	17.31	17.58	19	0
10	64QAM	25	12	17.61	17.42	17.72		
10	64QAM	25	25	17.74	17.37	17.62		
10	64QAM	50	0	17.75	17.39	17.67		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	18.03	17.82	17.80	19	0
5	QPSK	1	12	17.89	17.86	17.99		
5	QPSK	1	24	17.82	17.93	18.02		
5	QPSK	12	0	17.53	17.40	17.45	19	0
5	QPSK	12	7	17.64	17.37	17.59		
5	QPSK	12	13	17.55	17.39	17.55		
5	QPSK	25	0	17.58	17.41	17.48		
5	16QAM	1	0	18.00	17.80	17.52	19	0
5	16QAM	1	12	17.74	17.53	17.64		
5	16QAM	1	24	17.65	17.41	17.59		
5	16QAM	12	0	17.56	17.37	17.42	19	0
5	16QAM	12	7	17.61	17.43	17.58		
5	16QAM	12	13	17.52	17.41	17.64		
5	16QAM	25	0	17.61	17.44	17.45		
5	64QAM	1	0	17.76	17.71	17.44	19	0
5	64QAM	1	12	17.64	17.43	17.31		
5	64QAM	1	24	17.58	17.70	17.62		
5	64QAM	12	0	17.60	17.34	17.43	19	0
5	64QAM	12	7	17.63	17.49	17.75		
5	64QAM	12	13	17.58	17.47	17.73		
5	64QAM	25	0	17.62	17.49	17.44		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	17.93	17.82	17.79	19	0
3	QPSK	1	8	18.16	17.99	18.05		
3	QPSK	1	14	17.86	17.74	17.98		
3	QPSK	8	0	18.10	17.85	17.94	19	0
3	QPSK	8	4	18.13	17.94	18.13		
3	QPSK	8	7	18.13	17.94	18.08		
3	QPSK	15	0	18.09	17.89	18.08		
3	16QAM	1	0	17.62	17.47	17.59	19	0
3	16QAM	1	8	17.68	17.71	17.83		
3	16QAM	1	14	17.66	17.57	17.79		
3	16QAM	8	0	17.59	17.50	17.49	19	0
3	16QAM	8	4	17.77	17.49	17.52		
3	16QAM	8	7	17.71	17.49	17.53		
3	16QAM	15	0	17.62	17.50	17.57		
3	64QAM	1	0	17.89	17.60	17.44	19	0



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

3	64QAM	1	8	17.95	17.47	17.68	19	0
3	64QAM	1	14	17.83	17.44	17.65		
3	64QAM	8	0	17.57	17.42	17.49		
3	64QAM	8	4	17.67	17.41	17.68		
3	64QAM	8	7	17.61	17.41	17.63		
3	64QAM	15	0	17.72	17.45	17.49		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	17.88	17.71	17.92	19	0
1.4	QPSK	1	3	18.15	17.85	18.12		
1.4	QPSK	1	5	18.02	17.74	18.00		
1.4	QPSK	3	0	17.99	17.79	17.87		
1.4	QPSK	3	1	18.04	17.80	18.04		
1.4	QPSK	3	3	17.92	17.82	17.99		
1.4	QPSK	6	0	18.01	17.85	18.02	19	0
1.4	16QAM	1	0	17.72	17.48	17.25	19	0
1.4	16QAM	1	3	17.79	17.52	17.69		
1.4	16QAM	1	5	17.52	17.47	17.52		
1.4	16QAM	3	0	17.61	17.36	17.27		
1.4	16QAM	3	1	17.66	17.42	17.65		
1.4	16QAM	3	3	17.49	17.36	17.54		
1.4	16QAM	6	0	17.62	17.29	17.61	19	0
1.4	64QAM	1	0	17.58	17.36	17.48	19	0
1.4	64QAM	1	3	17.95	17.47	17.79		
1.4	64QAM	1	5	17.56	17.32	17.61		
1.4	64QAM	3	0	17.76	17.53	17.33		
1.4	64QAM	3	1	17.82	17.59	17.43		
1.4	64QAM	3	3	17.70	17.24	17.65		
1.4	64QAM	6	0	17.58	17.32	17.50	19	0





<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.68	23.50	23.55	25	0
15	QPSK	1	37	23.40	23.45	23.42		
15	QPSK	1	74	23.47	23.46	23.43		
15	QPSK	36	0	22.74	22.70	22.61	24	1
15	QPSK	36	20	22.70	22.66	22.59		
15	QPSK	36	39	22.65	22.56	22.55		
15	QPSK	75	0	22.76	22.70	22.64		
15	16QAM	1	0	22.64	22.24	22.29	24	1
15	16QAM	1	37	22.68	22.27	22.12		
15	16QAM	1	74	22.01	22.52	22.26		
15	16QAM	36	0	21.30	21.20	21.14	23	2
15	16QAM	36	20	21.38	21.20	21.25		
15	16QAM	36	39	21.21	21.17	21.03		
15	16QAM	75	0	21.21	21.08	21.10		
15	64QAM	1	0	21.44	21.61	21.48	23	2
15	64QAM	1	37	21.31	21.26	21.50		
15	64QAM	1	74	21.45	21.19	21.36		
15	64QAM	36	0	20.29	20.25	20.17	22	3
15	64QAM	36	20	20.26	20.23	20.20		
15	64QAM	36	39	20.33	20.24	20.22		
15	64QAM	75	0	20.24	20.14	20.13		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.67	23.40	23.49	25	0
10	QPSK	1	25	23.32	23.44	23.57		
10	QPSK	1	49	23.32	23.33	23.31		
10	QPSK	25	0	22.51	22.58	22.64	24	1
10	QPSK	25	12	22.64	22.56	22.57		
10	QPSK	25	25	22.58	22.57	22.63		
10	QPSK	50	0	22.56	22.53	22.65		
10	16QAM	1	0	22.18	22.19	22.45	24	1
10	16QAM	1	25	22.47	22.34	22.62		
10	16QAM	1	49	22.20	22.32	22.47		
10	16QAM	25	0	21.10	21.11	21.04	23	2
10	16QAM	25	12	20.97	21.13	21.22		
10	16QAM	25	25	21.05	21.03	21.14		
10	16QAM	50	0	21.04	21.09	21.12		
10	64QAM	1	0	21.15	21.30	20.89	23	2
10	64QAM	1	25	20.83	20.80	21.37		
10	64QAM	1	49	20.93	20.94	21.30		
10	64QAM	25	0	20.19	20.11	20.23	22	3
10	64QAM	25	12	20.20	20.09	20.19		
10	64QAM	25	25	20.04	20.09	20.12		
10	64QAM	50	0	20.08	20.03	20.16		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.26	23.39	23.21	25	0
5	QPSK	1	12	23.32	23.39	23.31		
5	QPSK	1	24	23.32	23.42	23.30		
5	QPSK	12	0	22.42	22.52	22.37	24	1
5	QPSK	12	7	22.53	22.45	22.42		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

5	QPSK	12	13	22.43	22.49	22.34		
5	QPSK	25	0	22.51	22.50	22.40		
5	16QAM	1	0	22.00	22.06	21.96	24	1
5	16QAM	1	12	22.06	21.98	22.01		
5	16QAM	1	24	21.82	22.02	22.29		
5	16QAM	12	0	20.96	21.05	20.89	23	2
5	16QAM	12	7	21.10	21.07	20.95		
5	16QAM	12	13	21.01	20.99	20.96		
5	16QAM	25	0	21.00	20.95	20.77		
5	64QAM	1	0	21.11	21.02	21.20	23	2
5	64QAM	1	12	21.17	21.40	21.14		
5	64QAM	1	24	20.97	21.15	20.79		
5	64QAM	12	0	20.06	20.03	19.93	22	3
5	64QAM	12	7	20.12	20.08	19.97		
5	64QAM	12	13	20.11	20.10	20.00		
5	64QAM	25	0	20.04	20.10	19.82		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.26	23.32	23.36	25	0
3	QPSK	1	8	23.40	23.43	23.32		
3	QPSK	1	14	23.35	23.35	23.42		
3	QPSK	8	0	22.44	22.53	22.30	24	1
3	QPSK	8	4	22.50	22.52	22.42		
3	QPSK	8	7	22.42	22.57	22.37		
3	QPSK	15	0	22.47	22.46	22.44		
3	16QAM	1	0	22.04	22.10	22.28	24	1
3	16QAM	1	8	22.01	22.16	22.05		
3	16QAM	1	14	22.00	22.13	21.90		
3	16QAM	8	0	21.02	21.10	20.94	23	2
3	16QAM	8	4	21.12	21.15	20.86		
3	16QAM	8	7	20.96	21.10	20.81		
3	16QAM	15	0	21.03	21.01	20.94		
3	64QAM	1	0	21.03	21.34	20.60	23	2
3	64QAM	1	8	21.13	21.11	21.02		
3	64QAM	1	14	20.91	20.87	20.96		
3	64QAM	8	0	20.04	19.99	19.79	22	3
3	64QAM	8	4	20.06	20.03	19.94		
3	64QAM	8	7	19.92	19.98	19.97		
3	64QAM	15	0	20.13	20.08	19.95		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.25	23.37	23.19	25	0
1.4	QPSK	1	3	23.37	23.49	23.27		
1.4	QPSK	1	5	23.29	23.33	23.22		
1.4	QPSK	3	0	23.36	23.38	23.29		
1.4	QPSK	3	1	23.40	23.38	23.27		
1.4	QPSK	3	3	23.27	23.41	23.21	24	1
1.4	QPSK	6	0	22.48	22.36	22.38		
1.4	16QAM	1	0	21.99	21.76	21.83	24	1
1.4	16QAM	1	3	22.36	22.02	22.03		
1.4	16QAM	1	5	21.94	21.95	21.98		
1.4	16QAM	3	0	21.88	21.96	21.83		
1.4	16QAM	3	1	21.82	21.97	21.85		
1.4	16QAM	3	3	21.87	22.00	21.78		
1.4	16QAM	6	0	20.96	21.04	20.92	23	2
1.4	64QAM	1	0	21.26	20.98	21.05	23	2



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

1.4	64QAM	1	3	21.23	21.38	20.90		
1.4	64QAM	1	5	20.90	21.01	21.02		
1.4	64QAM	3	0	21.11	21.03	21.08		
1.4	64QAM	3	1	21.16	20.86	21.10		
1.4	64QAM	3	3	21.09	21.20	20.63		
1.4	64QAM	6	0	19.92	19.90	19.76		
							22	3



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	18.17	18.36	18.36	19	0
20	QPSK	1	49	17.97	18.14	18.23		
20	QPSK	1	99	18.09	18.01	18.33		
20	QPSK	50	0	18.18	18.30	18.44	19	0
20	QPSK	50	24	18.17	18.17	18.35		
20	QPSK	50	50	18.18	18.16	18.27		
20	QPSK	100	0	18.22	18.20	18.36		
20	16QAM	1	0	17.81	17.94	17.97	19	0
20	16QAM	1	49	17.71	18.00	18.17		
20	16QAM	1	99	17.87	17.90	18.13		
20	16QAM	50	0	17.78	17.78	17.91	19	0
20	16QAM	50	24	17.64	17.74	17.98		
20	16QAM	50	50	17.59	17.74	17.85		
20	16QAM	100	0	17.66	17.73	17.84		
20	64QAM	1	0	17.66	18.15	17.96	19	0
20	64QAM	1	49	17.84	17.95	18.18		
20	64QAM	1	99	17.77	17.63	17.75		
20	64QAM	50	0	17.73	17.81	17.95	19	0
20	64QAM	50	24	17.69	17.78	17.93		
20	64QAM	50	50	17.62	17.69	17.84		
20	64QAM	100	0	17.69	17.75	17.90		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	18.21	18.18	18.28	19	0
15	QPSK	1	37	18.14	18.24	18.12		
15	QPSK	1	74	18.05	17.90	18.16		
15	QPSK	36	0	18.33	18.31	18.42	19	0
15	QPSK	36	20	18.23	18.22	18.41		
15	QPSK	36	39	18.22	18.17	18.26		
15	QPSK	75	0	18.20	18.23	18.34		
15	16QAM	1	0	18.18	17.90	18.29	19	0
15	16QAM	1	37	18.07	18.20	17.85		
15	16QAM	1	74	17.43	17.66	17.84		
15	16QAM	36	0	17.86	17.71	17.94	19	0
15	16QAM	36	20	17.67	17.77	17.81		
15	16QAM	36	39	17.69	17.68	17.85		
15	16QAM	75	0	17.77	17.77	17.87		
15	64QAM	1	0	17.83	18.08	17.98	19	0
15	64QAM	1	37	18.01	17.82	18.03		
15	64QAM	1	74	17.71	17.94	17.70		
15	64QAM	36	0	17.87	17.85	18.00	19	0
15	64QAM	36	20	17.78	17.69	17.87		
15	64QAM	36	39	17.65	17.70	17.78		
15	64QAM	75	0	17.67	17.75	17.95		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	17.77	18.02	18.07	19	0
10	QPSK	1	25	17.85	17.89	18.15		
10	QPSK	1	49	17.85	17.78	17.98		
10	QPSK	25	0	17.93	18.12	18.13	19	0
10	QPSK	25	12	17.99	18.06	18.24		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

10	QPSK	25	25	17.90	17.97	18.15		
10	QPSK	50	0	17.99	18.07	18.19		
10	16QAM	1	0	17.78	18.21	17.78	19	0
10	16QAM	1	25	17.55	17.64	17.78		
10	16QAM	1	49	17.74	17.94	17.70		
10	16QAM	25	0	17.65	17.61	17.74	19	0
10	16QAM	25	12	17.61	17.66	17.72		
10	16QAM	25	25	17.48	17.49	17.68		
10	16QAM	50	0	17.52	17.60	17.71		
10	64QAM	1	0	17.35	17.54	17.69	19	0
10	64QAM	1	25	17.23	17.37	17.27		
10	64QAM	1	49	17.54	17.64	17.61		
10	64QAM	25	0	17.62	17.67	17.75	19	0
10	64QAM	25	12	17.58	17.59	17.67		
10	64QAM	25	25	17.46	17.61	17.66		
10	64QAM	50	0	17.48	17.54	17.69		
Channel				131997	132322	132647		
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	17.91	17.88	17.85	19	0
5	QPSK	1	12	18.00	18.00	17.94		
5	QPSK	1	24	18.03	17.96	18.03		
5	QPSK	12	0	17.97	18.01	18.02	19	0
5	QPSK	12	7	18.04	18.12	18.08		
5	QPSK	12	13	17.99	18.09	18.10		
5	QPSK	25	0	17.97	18.12	18.05		
5	16QAM	1	0	17.52	17.81	17.88	19	0
5	16QAM	1	12	17.46	17.92	17.97		
5	16QAM	1	24	17.94	17.72	18.08		
5	16QAM	12	0	17.54	17.50	17.50	19	0
5	16QAM	12	7	17.55	17.54	17.55		
5	16QAM	12	13	17.61	17.64	17.61		
5	16QAM	25	0	17.51	17.62	17.60		
5	64QAM	1	0	17.68	17.70	17.38		
5	64QAM	1	12	17.47	17.82	17.40	19	0
5	64QAM	1	24	17.56	17.90	17.64		
5	64QAM	12	0	17.53	17.50	17.64		
5	64QAM	12	7	17.63	17.64	17.61	19	0
5	64QAM	12	13	17.70	17.65	17.66		
5	64QAM	25	0	17.61	17.61	17.59		
Channel				131987	132322	132657		
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	17.74	17.82	17.88	19	0
3	QPSK	1	8	17.97	17.97	18.05		
3	QPSK	1	14	17.93	18.04	17.92		
3	QPSK	8	0	17.99	17.99	18.02	19	0
3	QPSK	8	4	18.02	18.13	18.03		
3	QPSK	8	7	18.00	18.08	18.09		
3	QPSK	15	0	17.96	18.05	18.04		
3	16QAM	1	0	17.59	17.73	17.72	19	0
3	16QAM	1	8	17.96	17.74	17.98		
3	16QAM	1	14	17.93	17.66	18.01		
3	16QAM	8	0	17.55	17.55	17.59	19	0
3	16QAM	8	4	17.68	17.69	17.62		
3	16QAM	8	7	17.58	17.58	17.60		
3	16QAM	15	0	17.47	17.58	17.60		
3	64QAM	1	0	17.61	17.61	17.61		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**


3	64QAM	1	8	17.66	17.68	17.69	19	0
3	64QAM	1	14	17.54	17.91	17.44		
3	64QAM	8	0	17.52	17.51	17.52		
3	64QAM	8	4	17.54	17.64	17.52		
3	64QAM	8	7	17.49	17.59	17.62		
3	64QAM	15	0	17.65	17.50	17.64		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	17.75	17.82	17.99	19	0
1.4	QPSK	1	3	17.84	17.91	17.95		
1.4	QPSK	1	5	17.89	17.92	17.95		
1.4	QPSK	3	0	17.93	17.86	17.92		
1.4	QPSK	3	1	17.94	17.99	18.01		
1.4	QPSK	3	3	17.93	18.01	17.98		
1.4	QPSK	6	0	17.93	17.99	18.11	19	0
1.4	16QAM	1	0	17.50	17.27	17.60	19	0
1.4	16QAM	1	3	17.36	17.59	18.01		
1.4	16QAM	1	5	17.52	17.31	17.57		
1.4	16QAM	3	0	17.32	17.43	17.57		
1.4	16QAM	3	1	17.29	17.55	17.54		
1.4	16QAM	3	3	17.38	17.50	17.38		
1.4	16QAM	6	0	17.54	17.56	17.67	19	0
1.4	64QAM	1	0	17.67	17.57	17.72	19	0
1.4	64QAM	1	3	17.76	17.85	17.78		
1.4	64QAM	1	5	17.77	17.69	17.78		
1.4	64QAM	3	0	17.61	17.57	17.76		
1.4	64QAM	3	1	17.74	17.74	17.83		
1.4	64QAM	3	3	17.44	17.60	17.37		
1.4	64QAM	6	0	17.49	17.42	17.50	19	0

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

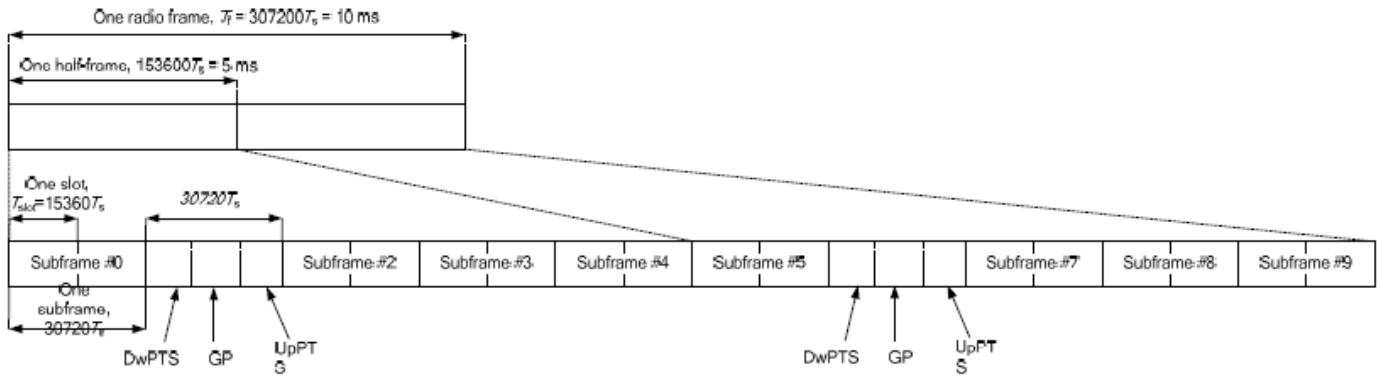

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-	-	-
9	13168 · Ts			-	-	-

<b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~4</b>	7.13%	8.33%
	<b>5~9</b>	14.3%	16.7%

<b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~3</b>	7.13%	8.33%
	<b>4~7</b>	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.





<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.00	21.96	21.89	21.80	21.67	23	0
20	QPSK	1	49	22.02	21.99	22.01	21.81	21.88		
20	QPSK	1	99	22.02	21.91	21.96	21.68	21.86		
20	QPSK	50	0	22.10	22.05	22.12	21.95	21.91	23	0
20	QPSK	50	24	22.12	22.08	22.11	21.93	21.99		
20	QPSK	50	50	22.15	22.08	22.14	21.96	22.01		
20	QPSK	100	0	22.12	22.09	22.11	21.90	21.95	23	0
20	16QAM	1	0	21.61	21.61	21.52	21.44	21.32		
20	16QAM	1	49	21.61	21.59	21.60	21.38	21.43		
20	16QAM	1	99	21.57	21.58	21.54	21.26	21.52	23	0
20	16QAM	50	0	21.66	21.61	21.64	21.50	21.48		
20	16QAM	50	24	21.68	21.64	21.67	21.46	21.52		
20	16QAM	50	50	21.69	21.57	21.68	21.39	21.56	23	0
20	16QAM	100	0	21.65	21.61	21.63	21.44	21.48		
20	64QAM	1	0	21.37	21.37	21.30	21.20	21.07		
20	64QAM	1	49	21.36	21.34	21.35	21.13	21.18	23	0
20	64QAM	1	99	21.33	21.33	21.29	21.03	21.26		
20	64QAM	50	0	20.63	20.63	20.61	20.48	20.44		
20	64QAM	50	24	20.68	20.63	20.65	20.46	20.48	22	1
20	64QAM	50	50	20.70	20.58	20.66	20.37	20.53		
20	64QAM	100	0	20.66	20.59	20.61	20.43	20.49		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	21.98	21.95	22.00	21.65	21.69	23	0
15	QPSK	1	37	21.99	21.93	21.96	21.62	21.73		
15	QPSK	1	74	21.97	21.91	22.03	21.46	21.90		
15	QPSK	36	0	22.04	22.10	22.08	21.72	21.85	23	0
15	QPSK	36	20	22.12	22.10	22.12	21.72	21.92		
15	QPSK	36	39	22.11	22.06	22.13	21.65	21.94		
15	QPSK	75	0	22.10	22.10	22.12	21.71	21.94	23	0
15	16QAM	1	0	21.58	21.58	21.60	21.22	21.32		
15	16QAM	1	37	21.55	21.55	21.56	21.13	21.36		
15	16QAM	1	74	21.61	21.55	21.58	21.09	21.51	23	0
15	16QAM	36	0	21.53	21.58	21.58	21.20	21.35		
15	16QAM	36	20	21.59	21.61	21.63	21.21	21.42		
15	16QAM	36	39	21.62	21.53	21.63	21.11	21.44	23	0
15	16QAM	75	0	21.63	21.64	21.66	21.24	21.44		
15	64QAM	1	0	21.34	21.35	21.36	21.18	21.06		
15	64QAM	1	37	21.28	21.32	21.35	21.10	21.19	23	0
15	64QAM	1	74	21.38	21.31	21.39	21.03	21.23		
15	64QAM	36	0	20.56	20.61	20.60	20.24	20.39		
15	64QAM	36	20	20.64	20.64	20.66	20.27	20.48	22	1
15	64QAM	36	39	20.65	20.59	20.66	20.16	20.47		
15	64QAM	75	0	20.62	20.62	20.65	20.24	20.44		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	21.79	21.83	21.81	21.46	21.67	23	0
10	QPSK	1	25	21.79	21.88	21.83	21.45	21.63		
10	QPSK	1	49	21.83	21.83	21.86	21.43	21.64		



**FCC SAR TEST REPORT**

**Report No. : FA940901-03**

10	QPSK	25	0	21.90	21.99	21.96	21.56	21.77	23	0
10	QPSK	25	12	21.91	22.02	21.99	21.58	21.79		
10	QPSK	25	25	21.90	21.95	21.95	21.53	21.73		
10	QPSK	50	0	21.92	22.02	21.99	21.58	21.80		
10	16QAM	1	0	21.37	21.44	21.42	21.07	21.30	23	0
10	16QAM	1	25	21.44	21.50	21.50	21.03	21.23		
10	16QAM	1	49	21.33	21.39	21.40	21.13	21.20		
10	16QAM	25	0	21.46	21.53	21.52	21.10	21.32	23	0
10	16QAM	25	12	21.50	21.54	21.53	21.11	21.33		
10	16QAM	25	25	21.45	21.51	21.48	21.07	21.27		
10	16QAM	50	0	21.47	21.55	21.53	21.14	21.33		
10	64QAM	1	0	21.19	21.27	21.24	21.23	21.03	23	0
10	64QAM	1	25	21.17	21.23	21.22	21.08	21.09		
10	64QAM	1	49	21.19	21.22	21.21	21.08	21.06		
10	64QAM	25	0	20.49	20.58	20.56	20.15	20.34	22	1
10	64QAM	25	12	20.51	20.60	20.57	20.15	20.36		
10	64QAM	25	25	20.47	20.54	20.52	20.11	20.31		
10	64QAM	50	0	20.46	20.54	20.52	20.12	20.30		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	21.78	21.93	21.88	21.46	21.73	23	0
5	QPSK	1	12	21.83	21.94	21.92	21.51	21.66		
5	QPSK	1	24	21.83	21.90	21.89	21.46	21.63		
5	QPSK	12	0	21.93	22.01	21.94	21.53	21.78	23	0
5	QPSK	12	7	21.99	22.04	21.96	21.56	21.79		
5	QPSK	12	13	21.97	22.04	22.01	21.60	21.77		
5	QPSK	25	0	21.90	21.99	21.91	21.55	21.76		
5	16QAM	1	0	21.34	21.53	21.46	21.02	21.30	23	0
5	16QAM	1	12	21.42	21.51	21.51	21.08	21.29		
5	16QAM	1	24	21.46	21.53	21.52	21.10	21.28		
5	16QAM	12	0	21.42	21.52	21.43	21.02	21.26	23	0
5	16QAM	12	7	21.48	21.57	21.46	21.04	21.28		
5	16QAM	12	13	21.47	21.55	21.48	21.11	21.28		
5	16QAM	25	0	21.48	21.56	21.49	21.09	21.33		
5	64QAM	1	0	21.12	21.33	21.20	21.07	21.04	23	0
5	64QAM	1	12	21.24	21.32	21.29	21.16	21.05		
5	64QAM	1	24	21.22	21.32	21.29	21.16	21.05		
5	64QAM	12	0	20.48	20.58	20.48	20.09	20.31	22	1
5	64QAM	12	7	20.53	20.62	20.53	20.13	20.38		
5	64QAM	12	13	20.53	20.59	20.57	20.17	20.35		
5	64QAM	25	0	20.52	20.60	20.51	20.12	20.38		



**<LTE Carrier Aggregation combinations>**

**General Note:**

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	2A-4A		3CC-1	1	2A-2A-4A		
2	2A-5A		3CC-3	2	2A-4A-4A		
3	2A-7A		3CC-5	3	2A-2A-5A		4CC-4
4	2A-12A		3CC-7	4	2A-5B		4CC-6
5	2A-13A		3CC-8	5	2A-7A-7A		
6	2A-29A	B29 SCC only		6	2A-7C		
7	2A-66A		3CC-37	7	2A-2A-12A		4CC-7
8	4A-5A		3CC-13	8	2A-2A-13A		
9	4A-7A		3CC-14	9	2A-66B		
10	4A-12A		3CC-16	10	2A-66C		
11	4A-13A		3CC-18	11	2A-2A-66A		4CC-1
12	4A-29A	B29 SCC only		12	2A-66A-66A		4CC-1
13	5A-7A		3CC-19	13	4A-4A-5A		
14	5A-66A		3CC-21	14	4A-7A-7A		
15	7A-46A	B46 SCC only	3CC-26	15	4A-7C		
16	7A-66A		3CC-40	16	4A-4A-12A		
17	12A-66A		3CC-38	17	4A-12B		
18	13A-66A		3CC-39	18	4A-4A-13A		
19	29A-66A	B29 SCC only		19	5A-7A-7A		
1	2C			20	5A-7C		
2	5B			21	5A-5A-66A		
3	7B			22	5A-66A-66A		
4	7C			23	5A-66B		
5	12B			24	5A-66C		
6	41C			25	5B-66A		4CC-2
7	66B			26	7A-46C	B46 SCC only	4CC-3
8	66C		3CC-42	27	12A-66A-66A		4CC-8
9	2A-2A			28	12A-66C		
10	4A-4A			29	12B-66A		
11	5A-5A			30	13A-66A-66A		
12	7A-7A			31	13A-66B		
13	66A-66A		3CC-44	32	13A-66C		
				33	2A-4A-5A		
				34	2A-4A-7A		
				35	2A-4A-12A		
				36	2A-4A-13A		
				37	2A-5A-66A		5CC-4
				38	2A-12A-66A		5CC-8
				39	2A-13A-66A		
				40	7A-66A-66A		
				41	2C-66A		
				42	66D		
				43	66A-66B		
				44	66A-66C		



4CC Downlink Carrier Aggregation				5CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	2A-2A-66A-66A		5CC-2	1	7A-46E	B46 SCC only	
2	5B-66A-66A		5CC-4	2	2A-2A-5A-66A-66A		
3	7A-46D	B46 SCC only	5CC-1	3	2A-2A-12A-66A-66A		
4	2A-2A-5A-66A		5CC-2	4	2A-5B-66A-66A		
5	2A-5A-66A-66A		5CC-2				
6	2A-5B-66A		5CC-4				
7	2A-2A-12A-66A		5CC-3				
8	2A-12A-66A-66A		5CC-3				

**<Power verification when LTE Carrier Aggregation Active>**

**General Note:**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**<Two Carrier power verification>**

Configure	PCC							SCC				Power		
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Inter-Band	2	20	1900	19100	QPSK	50	50	29	10	722.5	9715	18.30	18.39	
	4	20	1745	20300	QPSK	50	24	29	10	722.5	9715	18.29	18.36	
	66	20	1770	132572	QPSK	50	0	29	10	722.5	9715	18.42	18.44	
Intra-Band	Non-Contiguous	2	20	1900	19100	QPSK	50	50	2	5	1932.5	625	18.39	18.39
		4	20	1745	20300	QPSK	50	24	4	5	2112.5	1975	18.33	18.36
		5	10	844	20600	QPSK	1	0	5	5	871.5	2425	23.65	23.65
		7	20	2510	20850	QPSK	50	24	7	5	2687.5	3425	19.88	19.94
	Contiguous	2	20	1900	19100	QPSK	50	50	2	20	1960.20	902	18.32	18.39
		5	10	844	20600	QPSK	1	0	5	10	879.10	2501	23.56	23.65
		7	15	2562.5	21375	QPSK	36	20	7	5	2673.20	3282	19.80	19.89
		7	20	2510	20850	QPSK	50	24	7	20	2649.80	3048	19.89	19.94
		12	10	704	23060	QPSK	1	49	12	5	738.70	5107	23.89	23.95
		41	20	2506	39750	QPSK	50	50	41	20	2525.80	39948	22.08	22.15
66	15	1772.5	132597	QPSK	36	0	66	5	2163.20	66968	18.42	18.42		



<Three Carrier power verification>

Configure	PCC							SCC1				SCC2				Power		
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Inter-Band	2	20	1900	19100	QPSK	50	50	2	5	1932.5	625	4	20	2132.5	2175	18.31	18.39	
	2	20	1900	19100	QPSK	50	50	2	5	1932.5	625	13	10	751	5230	18.33	18.39	
	2	20	1900	19100	QPSK	50	50	4	20	2132.5	2175	4	5	2112.5	1975	18.31	18.39	
	2	20	1900	19100	QPSK	50	50	4	20	2132.5	2175	5	10	881.5	2525	18.38	18.39	
	2	20	1900	19100	QPSK	50	50	4	20	2132.5	2175	7	20	2655	3100	18.31	18.39	
	2	20	1900	19100	QPSK	50	50	4	20	2132.5	2175	12	10	737.5	5095	18.37	18.39	
	2	20	1900	19100	QPSK	50	50	4	20	2132.5	2175	13	10	751	5230	18.36	18.39	
	2	20	1900	19100	QPSK	50	50	7	20	2655	3100	7	5	2622.5	2775	18.33	18.39	
	2	20	1900	19100	QPSK	50	50	7	20	2655	3100	7	20	2674.8	3298	18.38	18.39	
	2	20	1900	19100	QPSK	50	50	13	10	751	5230	66	20	2155	66886	18.39	18.39	
	2	20	1900	19100	QPSK	50	50	66	15	2155	66886	66	5	2164.3	66979	18.29	18.39	
	2	20	1900	19100	QPSK	50	50	66	20	2155	66886	66	20	2174.8	67084	18.34	18.39	
	2	20	1900	19100	QPSK	50	50	2	20	1960.2	902	66	20	2155	66886	18.36	18.39	
	4	20	1745	20300	QPSK	50	24	4	5	2112.5	1975	5	10	881.5	2525	18.26	18.36	
	4	20	1745	20300	QPSK	50	24	4	5	2112.5	1975	12	10	737.5	5095	18.29	18.36	
	4	20	1745	20300	QPSK	50	24	4	5	2112.5	1975	13	10	751	5230	18.26	18.36	
	4	20	1745	20300	QPSK	50	24	7	20	2655	3100	7	5	2622.5	2775	18.26	18.36	
	4	20	1745	20300	QPSK	50	24	7	20	2655	3100	7	20	2674.8	3298	18.31	18.36	
	4	20	1745	20300	QPSK	50	24	12	10	740	5120	12	5	732.8	5048	18.29	18.36	
	5	10	844	20600	QPSK	1	0	5	5	871.5	2425	66	20	2155	66886	23.61	23.65	
	5	10	844	20600	QPSK	1	0	7	20	2655	3100	7	5	2622.5	2775	23.62	23.65	
	5	10	844	20600	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	23.62	23.65	
	5	10	844	20600	QPSK	1	0	66	20	2155	66886	66	5	2112.5	66461	23.63	23.65	
	5	10	844	20600	QPSK	1	0	66	15	2155	66886	66	5	2164.3	66979	23.60	23.65	
	5	10	844	20600	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	23.58	23.65	
	7	20	2510	20850	QPSK	50	24	66	20	2155	66886	66	5	2164.3	66979	19.91	19.94	
	12	10	704	23060	QPSK	1	49	66	20	2155	66886	66	20	2174.8	67084	23.85	23.95	
	12	10	704	23060	QPSK	1	49	12	5	741.2	5132	66	20	2155	66886	23.87	23.95	
	13	10	782	23230	QPSK	1	25	66	20	2155	66886	66	5	2112.5	66461	23.44	23.52	
	13	10	782	23230	QPSK	1	25	66	15	2155	66886	66	5	2164.3	66979	23.44	23.52	
13	10	782	23230	QPSK	1	25	66	20	2155	66886	66	20	2174.8	67084	23.50	23.52		
Intra-Band	Non-Contiguous	66	20	1770	132572	QPSK	50	0	66	5	2112.5	66461	66	15	2121.8	66554	18.41	18.44
		66	20	1770	132572	QPSK	50	0	66	5	2112.5	66461	66	20	2124.2	66578	18.41	18.44
		66	20	1770	132572	QPSK	50	0	66	20	2189.8	67234	66	20	2209.6	67432	18.38	18.44

<Five Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1900	19100	QPSK	50	50	2	5	1932.5	625	5	10	881.5	2525	66	20	2155	66886	66	5	2112.5	66461	18.34	18.39
	2	20	1900	19100	QPSK	50	50	2	5	1932.5	625	12	10	737.5	5095	66	20	2155	66886	66	5	2112.5	66461	18.33	18.39
	2	20	1900	19100	QPSK	50	50	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	5	2112.5	66461	18.31	18.39
	7	20	2510	20850	QPSK	50	24	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	46	20	5596.9	51259	19.88	19.94

**<WLAN Conducted Power>****General Note:**

1. The maximum power in the tune-up exhibit that the single chain in SISO operation is the same single chain in MIMO operation.
2. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
3. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.



<2.4GHz WLAN Chain 0>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	12.50	12.70	99.27
		6	2437	12.50	12.70	
		11	2462	12.30	12.70	
		12	2467	12.20	12.70	
		13	2472	10.30	10.79	
	802.11g 6Mbps	1	2412	8.60	8.92	98.31
		6	2437	12.30	12.70	
		11	2462	12.40	12.70	
		12	2467	11.00	11.42	
		13	2472	-0.50	0.42	
	802.11n-HT20 MCS0	1	2412	3.00	3.50	99.50
		6	2437	12.20	12.70	
		11	2462	12.30	12.70	
		12	2467	9.00	9.50	
		13	2472	-1.20	0.50	

<2.4GHz WLAN Chain 1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	13.10	13.50	99.07
		6	2437	13.00	13.50	
		11	2462	13.00	13.50	
		12	2467	13.10	13.50	
		13	2472	10.70	10.95	
	802.11g 6Mbps	1	2412	8.40	8.85	98.31
		6	2437	13.10	13.50	
		11	2462	13.10	13.50	
		12	2467	10.90	11.35	
		13	2472	-0.60	0.35	
	802.11n-HT20 MCS0	1	2412	2.90	3.35	99.60
		6	2437	13.20	13.50	
		11	2462	13.10	13.50	
		12	2467	9.00	9.35	
		13	2472	-1.50	0.35	



<5GHz WLAN Chain 0>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	10.40	10.50	98.54
		40	5200	10.10	10.50	
		44	5220	10.10	10.50	
		48	5240	10.00	10.50	
	802.11n-HT20 MCS0	36	5180	10.10	10.50	99.50
		40	5200	10.10	10.50	
		44	5220	10.40	10.50	
		48	5240	10.40	10.50	
	802.11n-HT40 MCS0	38	5190	10.40	10.50	98.37
		46	5230	10.10	10.50	
	802.11ac-VHT20 MCS0	36	5180	10.00	10.50	99.20
		40	5200	10.30	10.50	
		44	5220	10.30	10.50	
		48	5240	10.30	10.50	
	802.11ac-VHT40 MCS0	38	5190	10.30	10.50	98.37
		46	5230	10.00	10.50	
802.11ac-VHT80 MCS0	42	5210	10.00	10.50	96.60	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	10.30	10.50	98.54
		56	5280	10.30	10.50	
		60	5300	10.40	10.50	
		64	5320	10.10	10.50	
	802.11n-HT20 MCS0	52	5260	10.10	10.50	99.50
		56	5280	10.10	10.50	
		60	5300	10.20	10.50	
		64	5320	10.40	10.50	
	802.11n-HT40 MCS0	54	5270	10.40	10.50	98.37
		62	5310	10.10	10.50	
	802.11ac-VHT20 MCS0	52	5260	10.00	10.50	99.20
		56	5280	10.00	10.50	
		60	5300	10.10	10.50	
		64	5320	10.30	10.50	
	802.11ac-VHT40 MCS0	54	5270	10.30	10.50	98.37
		62	5310	10.00	10.50	
802.11ac-VHT80 MCS0	58	5290	10.40	10.50	96.60	





	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	10.00	10.50	98.54
		116	5580	10.00	10.50	
		124	5620	10.00	10.50	
		132	5660	10.00	10.50	
		144	5720	10.30	10.50	
	802.11n-HT20 MCS0	100	5500	10.30	10.50	99.50
		116	5580	10.20	10.50	
		124	5620	10.20	10.50	
		132	5660	10.20	10.50	
		144	5720	10.00	10.50	
	802.11n-HT40 MCS0	102	5510	10.20	10.50	98.37
		110	5550	10.20	10.50	
		126	5630	10.20	10.50	
		134	5670	10.20	10.50	
		142	5710	10.10	10.50	
	802.11ac-VHT20 MCS0	100	5500	10.20	10.50	99.20
		116	5580	10.10	10.50	
		124	5620	10.00	10.50	
		132	5660	10.00	10.50	
		144	5720	9.90	10.50	
802.11ac-VHT40 MCS0	102	5510	10.10	10.50	98.37	
	110	5550	10.10	10.50		
	126	5630	10.10	10.50		
	134	5670	10.10	10.50		
	142	5710	10.00	10.50		
802.11ac-VHT80 MCS0	106	5530	10.20	10.50	96.60	
	122	5610	10.20	10.50		
	138	5690	10.10	10.50		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	10.30	10.50	98.54
		157	5785	10.40	10.50	
		165	5825	10.00	10.50	
	802.11n-HT20 MCS0	149	5745	10.00	10.50	99.50
		157	5785	10.10	10.50	
		165	5825	10.20	10.50	
	802.11n-HT40 MCS0	151	5755	10.20	10.50	98.37
		159	5795	10.40	10.50	
	802.11ac-VHT20 MCS0	149	5745	9.90	10.50	99.20
		157	5785	10.00	10.50	
		165	5825	10.10	10.50	
	802.11ac-VHT40 MCS0	151	5755	10.10	10.50	98.37
		159	5795	10.30	10.50	
	802.11ac-VHT80 MCS0	155	5775	10.00	10.50	96.60



<5GHz WLAN Chain 1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	9.10	9.20	98.54
		40	5200	9.00	9.20	
		44	5220	9.00	9.20	
		48	5240	9.10	9.20	
	802.11n-HT20 MCS0	36	5180	8.90	9.20	98.90
		40	5200	8.90	9.20	
		44	5220	8.90	9.20	
		48	5240	9.00	9.20	
	802.11n-HT40 MCS0	38	5190	9.10	9.20	98.77
		46	5230	9.00	9.20	
	802.11ac-VHT20 MCS0	36	5180	8.80	9.20	99.10
		40	5200	8.80	9.20	
		44	5220	8.80	9.20	
		48	5240	8.90	9.20	
	802.11ac-VHT40 MCS0	38	5190	9.00	9.20	98.78
		46	5230	9.00	9.20	
802.11ac-VHT80 MCS0	42	5210	8.70	9.20	96.60	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	8.70	9.20	98.54
		56	5280	8.70	9.20	
		60	5300	8.90	9.20	
		64	5320	8.90	9.20	
	802.11n-HT20 MCS0	52	5260	9.00	9.20	98.90
		56	5280	8.70	9.20	
		60	5300	8.70	9.20	
		64	5320	8.70	9.20	
	802.11n-HT40 MCS0	54	5270	8.70	9.20	98.77
		62	5310	9.00	9.20	
	802.11ac-VHT20 MCS0	52	5260	8.90	9.20	99.10
		56	5280	8.60	9.20	
		60	5300	8.60	9.20	
		64	5320	8.60	9.20	
	802.11ac-VHT40 MCS0	54	5270	8.60	9.20	98.78
		62	5310	8.90	9.20	
802.11ac-VHT80 MCS0	58	5290	9.00	9.20	96.60	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	8.80	9.20	98.54
		116	5580	8.80	9.20	
		124	5620	8.80	9.20	
		132	5660	8.80	9.20	
		144	5720	8.80	9.20	
	802.11n-HT20 MCS0	100	5500	8.70	9.20	98.90
		116	5580	8.80	9.20	
		124	5620	8.80	9.20	
		132	5660	8.70	9.20	
		144	5720	8.70	9.20	
	802.11n-HT40 MCS0	102	5510	8.80	9.20	98.77
		110	5550	8.80	9.20	
		126	5630	8.80	9.20	
		134	5670	9.00	9.20	
		142	5710	8.70	9.20	
	802.11ac-VHT20 MCS0	100	5500	8.60	9.20	99.10
		116	5580	8.70	9.20	
		124	5620	8.60	9.20	
		132	5660	8.60	9.20	
		144	5720	8.60	9.20	
802.11ac-VHT40 MCS0	102	5510	8.70	9.20	98.78	
	110	5550	8.70	9.20		
	126	5630	8.70	9.20		
	134	5670	8.90	9.20		
	142	5710	8.60	9.20		
802.11ac-VHT80 MCS0	106	5530	8.80	9.20	96.60	
	122	5610	9.10	9.20		
	138	5690	9.00	9.20		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	9.00	9.20	98.54
		157	5785	8.90	9.20	
		165	5825	9.00	9.20	
	802.11n-HT20 MCS0	149	5745	8.90	9.20	99.50
		157	5785	8.70	9.20	
		165	5825	8.80	9.20	
	802.11n-HT40 MCS0	151	5755	9.10	9.20	98.37
		159	5795	8.80	9.20	
	802.11ac-VHT20 MCS0	149	5745	8.80	9.20	99.20
		157	5785	8.60	9.20	
		165	5825	8.70	9.20	
	802.11ac-VHT40 MCS0	151	5755	9.00	9.20	98.37
		159	5795	8.70	9.20	
	802.11ac-VHT80 MCS0	155	5775	9.00	9.20	96.60




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)			Tune-up Limit		
			1Mbps	2Mbps	3Mbps	1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.28	7.24	7.34	12.05	8.96	8.96
	CH 39	2441	10.44	7.43	7.47	11.65	8.80	8.80
	CH 78	2480	10.64	7.80	7.84	12.30	9.61	9.61

Mode	Channel	Frequency (MHz)	Average power (dBm)		Tune-up Limit	
			1Mbps	2Mbps	1Mbps	2Mbps
LE	CH 00	2402	4.60	4.60	6.53	6.53
	CH 19	2440	4.90	5.00	6.80	6.80
	CH 39	2480	5.00	5.00	6.95	6.95

General Note:

- For 2.4GHz Bluetooth Head SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.13% considered in SAR testing.

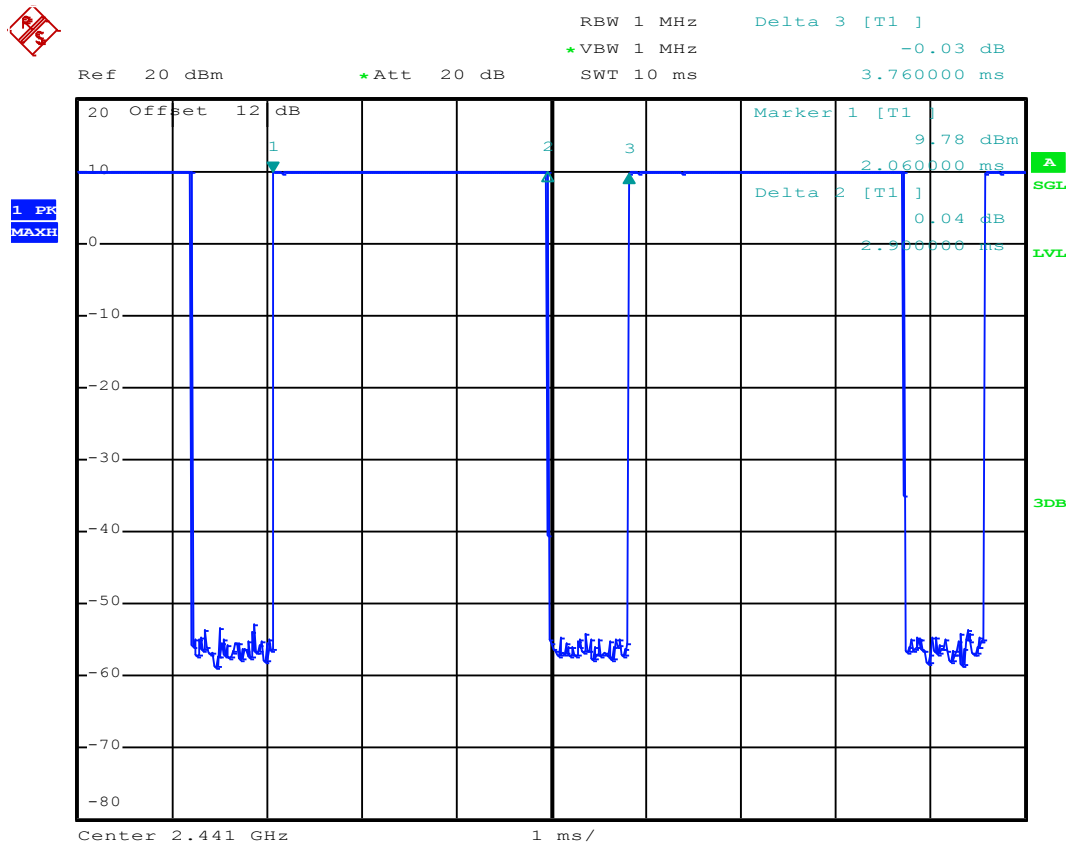

**<Bluetooth Exclusions Applied>**

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	12.3	6.95

**Note:**

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Exposure Condition	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
12.3	Hotspot	10	2.48	2.67
12.3	Body-worn	15	2.48	1.78

**Note:**

Per KDB 447498 D01v06, the 15mm and 10mm applied to determine hotspot and body-worn SAR test exclusion. The test exclusion threshold is 2.67 and 1.78 which is ≤ 3, SAR testing is not required.

**12. RF Exposure Conditions**

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN chain0	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
2.4GHz WLAN chain1	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm
5GHz WLAN chain1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN chain0	Yes	Yes	Yes	No	No	Yes
2.4GHz WLAN chain1	Yes	Yes	No	No	No	Yes
5GHz WLAN chain1	Yes	Yes	Yes	No	No	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge, The detail antenna location please refers to Appendix D.



## 13. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result.  
The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. For 5GHz WLAN product specific SAR is necessary, due to an overall diagonal dimension is  $> 16$ cm.

### GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is  $\leq 1/4$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than  $1/4$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



13.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	27.76	28.20	1.107	0	0.273	0.302
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	27.76	28.20	1.107	-0.04	0.145	0.160
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	27.76	28.20	1.107	-0.04	0.311	0.344
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	27.76	28.20	1.107	-0.07	0.156	0.173
02	GSM1900	EDGE (4 Tx slots)	Right Cheek	0mm	661	1880	20.61	22.50	1.545	0.1	0.031	0.048
	GSM1900	EDGE (4 Tx slots)	Right Tilted	0mm	661	1880	20.61	22.50	1.545	0.19	0.006	0.010
	GSM1900	EDGE (4 Tx slots)	Left Cheek	0mm	661	1880	20.61	22.50	1.545	0.1	0.015	0.023
	GSM1900	EDGE (4 Tx slots)	Left Tilted	0mm	661	1880	20.61	22.50	1.545	0.14	0.010	0.015

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9538	1907.6	18.17	18.70	1.130	0.17	0.035	0.040
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9538	1907.6	18.17	18.70	1.130	-0.01	0.009	0.010
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	18.17	18.70	1.130	0.16	0.020	0.023
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9538	1907.6	18.17	18.70	1.130	0.18	0.014	0.016
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	18.23	18.70	1.114	-0.06	0.039	0.043
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	18.23	18.70	1.114	0.16	0.013	0.014
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	18.23	18.70	1.114	0.13	0.017	0.019
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	18.23	18.70	1.114	0.12	0.007	0.008
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4182	836.4	23.85	24.70	1.216	-0.07	0.283	0.344
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4182	836.4	23.85	24.70	1.216	-0.04	0.109	0.133
05	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	23.85	24.70	1.216	-0.04	0.314	0.382
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4182	836.4	23.85	24.70	1.216	-0.07	0.126	0.153

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Right Cheek	0mm	20850	2510	19.81	21.00	1.315	-0.04	0.048	0.063
06	LTE Band 7	20M	QPSK	50	24	Right Cheek	0mm	20850	2510	19.94	21.00	1.276	0.12	0.052	0.066
	LTE Band 7	20M	QPSK	1	99	Right Tilted	0mm	20850	2510	19.81	21.00	1.315	0.1	0.019	0.025
	LTE Band 7	20M	QPSK	50	24	Right Tilted	0mm	20850	2510	19.94	21.00	1.276	0.15	0.019	0.024
	LTE Band 7	20M	QPSK	1	99	Left Cheek	0mm	20850	2510	19.81	21.00	1.315	0.12	0.030	0.039
	LTE Band 7	20M	QPSK	50	24	Left Cheek	0mm	20850	2510	19.94	21.00	1.276	-0.14	0.029	0.037
	LTE Band 7	20M	QPSK	1	99	Left Tilted	0mm	20850	2510	19.81	21.00	1.315	0.17	0.021	0.028
	LTE Band 7	20M	QPSK	50	24	Left Tilted	0mm	20850	2510	19.94	21.00	1.276	0.15	0.025	0.032
	LTE Band 12	10M	QPSK	1	49	Right Cheek	0mm	23095	707.5	23.19	25.00	1.517	-0.05	0.150	0.228
	LTE Band 12	10M	QPSK	25	25	Right Cheek	0mm	23095	707.5	22.36	24.00	1.459	-0.06	0.122	0.178
	LTE Band 12	10M	QPSK	1	49	Right Tilted	0mm	23095	707.5	23.19	25.00	1.517	-0.05	0.057	0.086
	LTE Band 12	10M	QPSK	25	25	Right Tilted	0mm	23095	707.5	22.36	24.00	1.459	-0.02	0.048	0.070
07	LTE Band 12	10M	QPSK	1	49	Left Cheek	0mm	23095	707.5	23.19	25.00	1.517	-0.01	0.173	0.262
	LTE Band 12	10M	QPSK	25	25	Left Cheek	0mm	23095	707.5	22.36	24.00	1.459	-0.01	0.144	0.210
	LTE Band 12	10M	QPSK	1	49	Left Tilted	0mm	23095	707.5	23.19	25.00	1.517	-0.02	0.080	0.121
	LTE Band 12	10M	QPSK	25	25	Left Tilted	0mm	23095	707.5	22.36	24.00	1.459	-0.1	0.048	0.070





Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	25	Right Cheek	0mm	23230	782	23.52	25.00	1.406	-0.05	0.248	0.349
	LTE Band 13	10M	QPSK	25	25	Right Cheek	0mm	23230	782	22.66	24.00	1.361	-0.06	0.208	0.283
	LTE Band 13	10M	QPSK	1	25	Right Tilted	0mm	23230	782	23.52	25.00	1.406	-0.06	0.130	0.183
	LTE Band 13	10M	QPSK	25	25	Right Tilted	0mm	23230	782	22.66	24.00	1.361	-0.07	0.110	0.150
08	LTE Band 13	10M	QPSK	1	25	Left Cheek	0mm	23230	782	23.52	25.00	1.406	-0.06	0.252	0.354
	LTE Band 13	10M	QPSK	25	25	Left Cheek	0mm	23230	782	22.66	24.00	1.361	-0.02	0.212	0.289
	LTE Band 13	10M	QPSK	1	25	Left Tilted	0mm	23230	782	23.52	25.00	1.406	-0.05	0.138	0.194
	LTE Band 13	10M	QPSK	25	25	Left Tilted	0mm	23230	782	22.66	24.00	1.361	-0.02	0.117	0.159
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26590	1905	18.31	19.00	1.172	-0.14	0.026	0.030
09	LTE Band 25	20M	QPSK	50	24	Right Cheek	0mm	26590	1905	18.39	19.00	1.151	0.07	0.028	0.032
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	26590	1905	18.31	19.00	1.172	0.11	0.006	0.008
	LTE Band 25	20M	QPSK	50	24	Right Tilted	0mm	26590	1905	18.39	19.00	1.151	0.16	0.007	0.008
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26590	1905	18.31	19.00	1.172	0.16	0.018	0.021
	LTE Band 25	20M	QPSK	50	24	Left Cheek	0mm	26590	1905	18.39	19.00	1.151	0.09	0.019	0.022
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	26590	1905	18.31	19.00	1.172	0.12	0.013	0.015
	LTE Band 25	20M	QPSK	50	24	Left Tilted	0mm	26590	1905	18.39	19.00	1.151	0.06	0.014	0.016
	LTE Band 26	15M	QPSK	1	0	Right Cheek	0mm	26865	831.5	23.50	25.00	1.413	-0.07	0.252	0.356
	LTE Band 26	15M	QPSK	36	0	Right Cheek	0mm	26865	831.5	22.70	24.00	1.349	-0.04	0.205	0.277
	LTE Band 26	15M	QPSK	1	0	Right Tilted	0mm	26865	831.5	23.50	25.00	1.413	-0.05	0.115	0.162
	LTE Band 26	15M	QPSK	36	0	Right Tilted	0mm	26865	831.5	22.70	24.00	1.349	-0.06	0.093	0.125
10	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	26865	831.5	23.50	25.00	1.413	-0.06	0.273	0.386
	LTE Band 26	15M	QPSK	36	0	Left Cheek	0mm	26865	831.5	22.70	24.00	1.349	-0.04	0.223	0.301
	LTE Band 26	15M	QPSK	1	0	Left Tilted	0mm	26865	831.5	23.50	25.00	1.413	-0.05	0.136	0.192
	LTE Band 26	15M	QPSK	36	0	Left Tilted	0mm	26865	831.5	22.70	24.00	1.349	-0.07	0.109	0.147
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132572	1770	18.36	19.00	1.159	-0.08	0.040	0.046
11	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	132572	1770	18.44	19.00	1.138	0.02	0.042	0.048
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	132572	1770	18.36	19.00	1.159	0.14	0.009	0.010
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	132572	1770	18.44	19.00	1.138	0.11	0.009	0.010
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132572	1770	18.36	19.00	1.159	0.13	0.023	0.027
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132572	1770	18.44	19.00	1.138	0.16	0.024	0.027
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	132572	1770	18.36	19.00	1.159	0.17	0.013	0.015
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	132572	1770	18.44	19.00	1.138	0.02	0.015	0.017

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Right Cheek	0mm	39750	2506	22.02	23.00	1.253	62.90	1.006	0.06	0.051	0.064
12	LTE Band 41	20M	QPSK	50	50	Right Cheek	0mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.02	0.054	0.066
	LTE Band 41	20M	QPSK	1	49	Right Tilted	0mm	39750	2506	22.02	23.00	1.253	62.90	1.006	0.13	0.020	0.025
	LTE Band 41	20M	QPSK	50	50	Right Tilted	0mm	39750	2506	22.15	23.00	1.216	62.90	1.006	0.01	0.020	0.024
	LTE Band 41	20M	QPSK	1	49	Left Cheek	0mm	39750	2506	22.02	23.00	1.253	62.90	1.006	-0.01	0.029	0.037
	LTE Band 41	20M	QPSK	50	50	Left Cheek	0mm	39750	2506	22.15	23.00	1.216	62.90	1.006	0	0.029	0.035
	LTE Band 41	20M	QPSK	1	49	Left Tilted	0mm	39750	2506	22.02	23.00	1.253	62.90	1.006	0.03	0.023	0.029
	LTE Band 41	20M	QPSK	50	50	Left Tilted	0mm	39750	2506	22.15	23.00	1.216	62.90	1.006	0.16	0.024	0.029



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	0.04	0.235	0.248
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	-0.01	0.055	0.058
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	0.03	0.082	0.086
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	0.06	0.021	0.022
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.12	0.068	0.075
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.04	0.004	0.005
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.02	0.146	0.162
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.11	0.007	0.008
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	0.12	0.160	0.169
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	0.12	0.016	0.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	-0.1	0.025	0.026
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	0	0.001	0.001
14	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	0.12	0.359	0.389
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	-0.13	0.311	0.337
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	-0.11	0.312	0.338
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	0.15	0.307	0.333
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	0.09	0.195	0.216
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	0.18	0.005	0.005
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	-0.19	0.016	0.018
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	0	0.001	0.001
15	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	-0.13	0.355	0.376
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	0.13	0.345	0.366
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	-0.03	0.325	0.344
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	-0.16	0.284	0.300
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	0.03	0.114	0.132
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	0	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	-0.19	0.048	0.056
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	0	0.009	0.011
16	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	0.09	0.224	0.243
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	0.03	0.126	0.137
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.17	0.150	0.163
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	0.04	0.141	0.153

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
17	Bluetooth	1Mbps	Right Cheek	0mm	78	2480	10.64	12.30	1.466	0.07	0.062	0.091
	Bluetooth	1Mbps	Right Tilted	0mm	78	2480	10.64	12.30	1.466	0.09	0.015	0.024
	Bluetooth	1Mbps	Left Cheek	0mm	78	2480	10.64	12.30	1.466	0.15	0.018	0.028
	Bluetooth	1Mbps	Left Tilted	0mm	78	2480	10.64	12.30	1.466	-0.18	0.006	0.009



**13.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	128	824.2	27.76	28.20	1.107	0.01	0.316	0.350
	GSM850	GPRS (4 Tx slots)	Back	10mm	128	824.2	27.76	28.20	1.107	-0.04	0.342	0.378
18	GSM850	GPRS (4 Tx slots)	Left Side	10mm	128	824.2	27.76	28.20	1.107	-0.13	0.352	0.390
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	128	824.2	27.76	28.20	1.107	-0.07	0.308	0.341
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	128	824.2	27.76	28.20	1.107	-0.14	0.077	0.085
	GSM1900	EDGE (4 Tx slots)	Front	10mm	661	1880	20.61	22.50	1.545	-0.02	0.199	0.308
	GSM1900	EDGE (4 Tx slots)	Back	10mm	661	1880	20.61	22.50	1.545	-0.09	0.205	0.317
	GSM1900	EDGE (4 Tx slots)	Left Side	10mm	661	1880	20.61	22.50	1.545	0.11	0.024	0.037
	GSM1900	EDGE (4 Tx slots)	Right Side	10mm	661	1880	20.61	22.50	1.545	-0.1	0.046	0.071
19	GSM1900	EDGE (4 Tx slots)	Bottom Side	10mm	661	1880	20.61	22.50	1.545	-0.17	0.323	0.499

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	9538	1907.6	18.17	18.70	1.130	0	0.316	0.357
	WCDMA II	RMC 12.2Kbps	Back	10mm	9538	1907.6	18.17	18.70	1.130	-0.04	0.341	0.385
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	9538	1907.6	18.17	18.70	1.130	0.03	0.022	0.025
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	9538	1907.6	18.17	18.70	1.130	-0.1	0.053	0.060
20	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	18.17	18.70	1.130	-0.13	0.506	0.572
	WCDMA IV	RMC 12.2Kbps	Front	10mm	1413	1732.6	18.23	18.70	1.114	-0.04	0.255	0.284
	WCDMA IV	RMC 12.2Kbps	Back	10mm	1413	1732.6	18.23	18.70	1.114	-0.01	0.355	0.396
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	1413	1732.6	18.23	18.70	1.114	-0.05	0.020	0.022
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	1413	1732.6	18.23	18.70	1.114	-0.14	0.040	0.045
21	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	1413	1732.6	18.23	18.70	1.114	-0.1	0.404	0.450
	WCDMA V	RMC 12.2Kbps	Front	10mm	4182	836.4	23.85	24.70	1.216	-0.08	0.261	0.317
22	WCDMA V	RMC 12.2Kbps	Back	10mm	4182	836.4	23.85	24.70	1.216	-0.03	0.298	0.362
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	4182	836.4	23.85	24.70	1.216	-0.06	0.264	0.321
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	4182	836.4	23.85	24.70	1.216	-0.03	0.235	0.286
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	4182	836.4	23.85	24.70	1.216	-0.13	0.078	0.095



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Front	10mm	20850	2510	19.81	21.00	1.315	-0.06	0.198	0.260
	LTE Band 7	20M	QPSK	50	24	Front	10mm	20850	2510	19.94	21.00	1.276	-0.08	0.204	0.260
	LTE Band 7	20M	QPSK	1	99	Back	10mm	20850	2510	19.81	21.00	1.315	-0.18	0.223	0.293
	LTE Band 7	20M	QPSK	50	24	Back	10mm	20850	2510	19.94	21.00	1.276	-0.19	0.245	0.313
	LTE Band 7	20M	QPSK	1	99	Left Side	10mm	20850	2510	19.81	21.00	1.315	0	0.038	0.050
	LTE Band 7	20M	QPSK	50	24	Left Side	10mm	20850	2510	19.94	21.00	1.276	-0.07	0.040	0.051
	LTE Band 7	20M	QPSK	1	99	Right Side	10mm	20850	2510	19.81	21.00	1.315	-0.13	0.256	0.337
	LTE Band 7	20M	QPSK	50	24	Right Side	10mm	20850	2510	19.94	21.00	1.276	-0.1	0.263	0.336
	LTE Band 7	20M	QPSK	1	99	Bottom Side	10mm	20850	2510	19.81	21.00	1.315	-0.17	0.541	0.712
23	LTE Band 7	20M	QPSK	50	24	Bottom Side	10mm	20850	2510	19.94	21.00	1.276	-0.1	0.562	0.717
	LTE Band 12	10M	QPSK	1	49	Front	10mm	23095	707.5	23.19	25.00	1.517	-0.01	0.192	0.291
	LTE Band 12	10M	QPSK	25	25	Front	10mm	23095	707.5	22.36	24.00	1.459	-0.04	0.152	0.222
24	LTE Band 12	10M	QPSK	1	49	Back	10mm	23095	707.5	23.19	25.00	1.517	-0.04	0.232	0.352
	LTE Band 12	10M	QPSK	25	25	Back	10mm	23095	707.5	22.36	24.00	1.459	-0.03	0.186	0.271
	LTE Band 12	10M	QPSK	1	49	Left Side	10mm	23095	707.5	23.19	25.00	1.517	-0.09	0.209	0.317
	LTE Band 12	10M	QPSK	25	25	Left Side	10mm	23095	707.5	22.36	24.00	1.459	-0.07	0.167	0.244
	LTE Band 12	10M	QPSK	1	49	Right Side	10mm	23095	707.5	23.19	25.00	1.517	-0.08	0.183	0.278
	LTE Band 12	10M	QPSK	25	25	Right Side	10mm	23095	707.5	22.36	24.00	1.459	-0.05	0.148	0.216
	LTE Band 12	10M	QPSK	1	49	Bottom Side	10mm	23095	707.5	23.19	25.00	1.517	-0.13	0.032	0.049
	LTE Band 12	10M	QPSK	25	25	Bottom Side	10mm	23095	707.5	22.36	24.00	1.459	-0.17	0.026	0.038
	LTE Band 13	10M	QPSK	1	25	Front	10mm	23230	782	23.52	25.00	1.406	-0.05	0.326	0.458
	LTE Band 13	10M	QPSK	25	25	Front	10mm	23230	782	22.66	24.00	1.361	-0.02	0.274	0.373
25	LTE Band 13	10M	QPSK	1	25	Back	10mm	23230	782	23.52	25.00	1.406	-0.07	0.350	0.492
	LTE Band 13	10M	QPSK	25	25	Back	10mm	23230	782	22.66	24.00	1.361	-0.04	0.293	0.399
	LTE Band 13	10M	QPSK	1	25	Left Side	10mm	23230	782	23.52	25.00	1.406	-0.08	0.343	0.482
	LTE Band 13	10M	QPSK	25	25	Left Side	10mm	23230	782	22.66	24.00	1.361	-0.04	0.291	0.396
	LTE Band 13	10M	QPSK	1	25	Right Side	10mm	23230	782	23.52	25.00	1.406	-0.03	0.338	0.475
	LTE Band 13	10M	QPSK	25	25	Right Side	10mm	23230	782	22.66	24.00	1.361	-0.06	0.289	0.393
	LTE Band 13	10M	QPSK	1	25	Bottom Side	10mm	23230	782	23.52	25.00	1.406	-0.16	0.039	0.055
	LTE Band 13	10M	QPSK	25	25	Bottom Side	10mm	23230	782	22.66	24.00	1.361	-0.15	0.032	0.044
	LTE Band 25	20M	QPSK	1	0	Front	10mm	26590	1905	18.31	19.00	1.172	-0.01	0.273	0.320
	LTE Band 25	20M	QPSK	50	24	Front	10mm	26590	1905	18.39	19.00	1.151	0.1	0.305	0.351
	LTE Band 25	20M	QPSK	1	0	Back	10mm	26590	1905	18.31	19.00	1.172	-0.01	0.310	0.363
	LTE Band 25	20M	QPSK	50	24	Back	10mm	26590	1905	18.39	19.00	1.151	0.12	0.336	0.387
	LTE Band 25	20M	QPSK	1	0	Left Side	10mm	26590	1905	18.31	19.00	1.172	-0.02	0.017	0.020
	LTE Band 25	20M	QPSK	50	24	Left Side	10mm	26590	1905	18.39	19.00	1.151	-0.16	0.022	0.025
	LTE Band 25	20M	QPSK	1	0	Right Side	10mm	26590	1905	18.31	19.00	1.172	0.03	0.056	0.066
	LTE Band 25	20M	QPSK	50	24	Right Side	10mm	26590	1905	18.39	19.00	1.151	0.04	0.057	0.066
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	26590	1905	18.31	19.00	1.172	0.02	0.438	0.513
26	LTE Band 25	20M	QPSK	50	24	Bottom Side	10mm	26590	1905	18.39	19.00	1.151	0.02	0.485	0.558
	LTE Band 26	15M	QPSK	1	0	Front	10mm	26865	831.5	23.50	25.00	1.413	-0.06	0.269	0.380
	LTE Band 26	15M	QPSK	36	0	Front	10mm	26865	831.5	22.70	24.00	1.349	-0.04	0.216	0.291
	LTE Band 26	15M	QPSK	1	0	Back	10mm	26865	831.5	23.50	25.00	1.413	-0.01	0.268	0.379
	LTE Band 26	15M	QPSK	36	0	Back	10mm	26865	831.5	22.70	24.00	1.349	-0.01	0.215	0.290
27	LTE Band 26	15M	QPSK	1	0	Left Side	10mm	26865	831.5	23.50	25.00	1.413	-0.09	0.280	0.396
	LTE Band 26	15M	QPSK	36	0	Left Side	10mm	26865	831.5	22.70	24.00	1.349	-0.08	0.223	0.301
	LTE Band 26	15M	QPSK	1	0	Right Side	10mm	26865	831.5	23.50	25.00	1.413	-0.09	0.234	0.331
	LTE Band 26	15M	QPSK	36	0	Right Side	10mm	26865	831.5	22.70	24.00	1.349	-0.04	0.189	0.255
	LTE Band 26	15M	QPSK	1	0	Bottom Side	10mm	26865	831.5	23.50	25.00	1.413	-0.12	0.068	0.096
	LTE Band 26	15M	QPSK	36	0	Bottom Side	10mm	26865	831.5	22.70	24.00	1.349	-0.11	0.055	0.074



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132572	1770	18.36	19.00	1.159	-0.01	0.278	0.322
	LTE Band 66	20M	QPSK	50	0	Front	10mm	132572	1770	18.44	19.00	1.138	-0.03	0.293	0.333
	LTE Band 66	20M	QPSK	1	0	Back	10mm	132572	1770	18.36	19.00	1.159	0.03	0.333	0.386
	LTE Band 66	20M	QPSK	50	0	Back	10mm	132572	1770	18.44	19.00	1.138	0.03	0.346	0.394
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	132572	1770	18.36	19.00	1.159	-0.04	0.020	0.023
	LTE Band 66	20M	QPSK	50	0	Left Side	10mm	132572	1770	18.44	19.00	1.138	-0.05	0.020	0.023
	LTE Band 66	20M	QPSK	1	0	Right Side	10mm	132572	1770	18.36	19.00	1.159	-0.15	0.050	0.058
	LTE Band 66	20M	QPSK	50	0	Right Side	10mm	132572	1770	18.44	19.00	1.138	-0.11	0.055	0.063
28	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	132572	1770	18.36	19.00	1.159	-0.15	0.476	0.552
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	132572	1770	18.44	19.00	1.138	-0.18	0.474	0.539

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Front	10mm	39750	2506	22.02	23.00	1.253	62.90	1.006	-0.13	0.200	0.252
	LTE Band 41	20M	QPSK	50	50	Front	10mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.08	0.209	0.256
	LTE Band 41	20M	QPSK	1	49	Back	10mm	39750	2506	22.02	23.00	1.253	62.90	1.006	-0.13	0.247	0.311
	LTE Band 41	20M	QPSK	50	50	Back	10mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.04	0.262	0.321
	LTE Band 41	20M	QPSK	1	49	Left Side	10mm	39750	2506	22.02	23.00	1.253	62.90	1.006	-0.09	0.038	0.048
	LTE Band 41	20M	QPSK	50	50	Left Side	10mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.02	0.039	0.048
	LTE Band 41	20M	QPSK	1	49	Right Side	10mm	39750	2506	22.02	23.00	1.253	62.90	1.006	0.11	0.242	0.305
	LTE Band 41	20M	QPSK	50	50	Right Side	10mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.01	0.248	0.303
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10mm	39750	2506	22.02	23.00	1.253	62.90	1.006	-0.01	0.542	0.683
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10mm	40185	2549.5	21.99	23.00	1.262	62.90	1.006	-0.06	0.542	0.688
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10mm	40620	2593	22.01	23.00	1.256	62.90	1.006	-0.06	0.550	0.695
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10mm	41055	2636.5	21.81	23.00	1.315	62.90	1.006	-0.07	0.494	0.654
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10mm	41490	2680	21.88	23.00	1.294	62.90	1.006	-0.08	0.453	0.590
	LTE Band 41	20M	QPSK	50	50	Bottom Side	10mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.01	0.567	0.694
	LTE Band 41	20M	QPSK	50	50	Bottom Side	10mm	40185	2549.5	22.08	23.00	1.236	62.90	1.006	-0.05	0.556	0.691
	LTE Band 41	20M	QPSK	50	50	Bottom Side	10mm	40620	2593	22.14	23.00	1.219	62.90	1.006	-0.09	0.567	0.695
	LTE Band 41	20M	QPSK	50	50	Bottom Side	10mm	41055	2636.5	21.96	23.00	1.271	62.90	1.006	-0.08	0.509	0.651
29	LTE Band 41	20M	QPSK	50	50	Bottom Side	10mm	41490	2680	22.01	23.00	1.256	62.90	1.006	-0.06	0.623	0.787
	LTE Band 41	20M	QPSK	100	0	Bottom Side	10mm	39750	2506	22.12	23.00	1.225	62.90	1.006	-0.05	0.534	0.658

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	-0.13	0.041	0.043
30	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	0.02	0.104	0.110
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	0.02	0.100	0.105
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	-0.17	0.004	0.004
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	-0.06	0.017	0.019
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	-0.18	0.082	0.091
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.19	0.020	0.022



**13.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	15mm	128	824.2	27.76	28.20	1.107	-0.04	0.299	0.331
31	GSM850	GPRS (4 Tx slots)	Back	15mm	128	824.2	27.76	28.20	1.107	-0.03	0.310	0.343
32	GSM1900	EDGE (4 Tx slots)	Front	15mm	661	1880	20.61	22.50	1.545	-0.12	0.100	0.155
	GSM1900	EDGE (4 Tx slots)	Back	15mm	661	1880	20.61	22.50	1.545	-0.12	0.097	0.150

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	15mm	9538	1907.6	18.17	18.70	1.130	-0.05	0.147	0.166
33	WCDMA II	RMC 12.2Kbps	Back	15mm	9538	1907.6	18.17	18.70	1.130	-0.06	0.169	0.191
	WCDMA IV	RMC 12.2Kbps	Front	15mm	1413	1732.6	18.23	18.70	1.114	-0.04	0.125	0.139
34	WCDMA IV	RMC 12.2Kbps	Back	15mm	1413	1732.6	18.23	18.70	1.114	-0.02	0.180	0.201
	WCDMA V	RMC 12.2Kbps	Front	15mm	4182	836.4	23.85	24.70	1.216	-0.08	0.241	0.293
35	WCDMA V	RMC 12.2Kbps	Back	15mm	4182	836.4	23.85	24.70	1.216	-0.05	0.256	0.311

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	99	Front	15mm	20850	2510	19.81	21.00	1.315	-0.02	0.117	0.154
	LTE Band 7	20M	QPSK	50	24	Front	15mm	20850	2510	19.94	21.00	1.276	0	0.118	0.151
	LTE Band 7	20M	QPSK	1	99	Back	15mm	20850	2510	19.81	21.00	1.315	-0.06	0.125	0.164
36	LTE Band 7	20M	QPSK	50	24	Back	15mm	20850	2510	19.94	21.00	1.276	-0.03	0.131	0.167
	LTE Band 12	10M	QPSK	1	49	Front	15mm	23095	707.5	23.19	25.00	1.517	-0.03	0.178	0.270
	LTE Band 12	10M	QPSK	25	25	Front	15mm	23095	707.5	22.36	24.00	1.459	-0.02	0.142	0.207
37	LTE Band 12	10M	QPSK	1	49	Back	15mm	23095	707.5	23.19	25.00	1.517	-0.03	0.205	0.311
	LTE Band 12	10M	QPSK	25	25	Back	15mm	23095	707.5	22.36	24.00	1.459	-0.03	0.164	0.239
	LTE Band 13	10M	QPSK	1	25	Front	15mm	23230	782	23.52	25.00	1.406	-0.07	0.313	0.440
	LTE Band 13	10M	QPSK	25	25	Front	15mm	23230	782	22.66	24.00	1.361	-0.04	0.264	0.359
38	LTE Band 13	10M	QPSK	1	25	Back	15mm	23230	782	23.52	25.00	1.406	-0.03	0.324	0.456
	LTE Band 13	10M	QPSK	25	25	Back	15mm	23230	782	22.66	24.00	1.361	-0.05	0.275	0.374
	LTE Band 25	20M	QPSK	1	0	Front	15mm	26590	1905	18.31	19.00	1.172	-0.1	0.119	0.139
	LTE Band 25	20M	QPSK	50	24	Front	15mm	26590	1905	18.39	19.00	1.151	-0.08	0.133	0.153
	LTE Band 25	20M	QPSK	1	0	Back	15mm	26590	1905	18.31	19.00	1.172	-0.14	0.138	0.162
39	LTE Band 25	20M	QPSK	50	24	Back	15mm	26590	1905	18.39	19.00	1.151	-0.15	0.150	0.173
	LTE Band 26	15M	QPSK	1	0	Front	15mm	26865	831.5	23.50	25.00	1.413	-0.04	0.233	0.329
	LTE Band 26	15M	QPSK	36	0	Front	15mm	26865	831.5	22.70	24.00	1.349	-0.16	0.189	0.255
40	LTE Band 26	15M	QPSK	1	0	Back	15mm	26865	831.5	23.50	25.00	1.413	-0.05	0.237	0.335
	LTE Band 26	15M	QPSK	36	0	Back	15mm	26865	831.5	22.70	24.00	1.349	-0.04	0.189	0.255
	LTE Band 66	20M	QPSK	1	0	Front	15mm	132572	1770	18.36	19.00	1.159	-0.12	0.138	0.160
	LTE Band 66	20M	QPSK	50	0	Front	15mm	132572	1770	18.44	19.00	1.138	-0.09	0.146	0.166
	LTE Band 66	20M	QPSK	1	0	Back	15mm	132572	1770	18.36	19.00	1.159	-0.04	0.190	0.220
41	LTE Band 66	20M	QPSK	50	0	Back	15mm	132572	1770	18.44	19.00	1.138	-0.05	0.196	0.223



**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Front	15mm	39750	2506	22.02	23.00	1.253	62.90	1.006	0	0.106	0.134
	LTE Band 41	20M	QPSK	50	50	Front	15mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.06	0.111	0.136
	LTE Band 41	20M	QPSK	1	49	Back	15mm	39750	2506	22.02	23.00	1.253	62.90	1.006	0.06	0.127	0.160
42	LTE Band 41	20M	QPSK	50	50	Back	15mm	39750	2506	22.15	23.00	1.216	62.90	1.006	-0.1	0.132	0.161

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	-0.14	0.019	0.020
43	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Chain 0	1	2412	12.50	12.70	1.047	99.27	1.007	-0.05	0.047	0.050
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.11	0.010	0.011
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Chain 1	1	2412	13.10	13.50	1.096	99.07	1.009	0.07	0.030	0.033
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	-0.1	0.006	0.006
44	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	0.05	0.076	0.080
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	-0.17	0.040	0.043
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	0.1	0.005	0.005
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	-0.19	0.007	0.008
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	0.01	0.041	0.045
45	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	-0.15	0.051	0.054
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	0.17	0.003	0.003
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	0.1	0.005	0.006
46	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	-0.01	0.023	0.027
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.12	0.011	0.012
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.13	0.009	0.009



13.4 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	-0.19	0.036	0.038
47	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	-0.16	0.403	0.427
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	-0.1	0.097	0.103
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 0	58	5290	10.40	10.50	1.023	96.60	1.035	-0.1	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	-0.13	0.166	0.180
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	-0.12	0.210	0.228
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	-0.14	0.018	0.020
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 1	58	5290	9.00	9.20	1.047	96.60	1.035	0.02	0.038	0.041
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	0.04	0.038	0.042
48	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	-0.16	0.394	0.437
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	-0.12	0.117	0.130
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 0	122	5610	10.20	10.50	1.072	96.60	1.035	0.14	0.003	0.003
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	0.13	0.156	0.165
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	0.15	0.153	0.162
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	-0.18	0.018	0.019
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 1	122	5610	9.10	9.20	1.023	96.60	1.035	-0.07	0.031	0.033
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	0.01	0.083	0.096
49	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	-0.18	0.328	0.381
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	-0.05	0.094	0.109
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 0	155	5775	10.00	10.50	1.122	96.60	1.035	0.06	0.022	0.026
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.14	0.079	0.086
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.17	0.295	0.320
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.17	0.016	0.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Chain 1	155	5775	9.00	9.20	1.047	96.60	1.035	-0.1	0.021	0.023



**14. Simultaneous Transmission Analysis**

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	(None)	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G
15	UMTS/HSPA	WLAN 2.4G	WLAN 5G
16	LTE	WLAN 2.4G	WLAN 5G

**General Note:**

1. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
2. 2.4GHz WLAN and Bluetooth share the same chain0, and cannot transmit simultaneously.
3. All licensed modes share the same antenna part and cannot transmit simultaneously
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
6. For simultaneous transmission analysis, hotspot & body worn Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}]^x \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Hotspot	Body worn
	Test separation	10 mm	15 mm
12.3dBm	Estimated SAR (W/kg)	0.357 W/kg	0.238 W/kg



14.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3	1+4+5+6	1+2+5	1+6	1+4+5	4+5+6		
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.302	0.248	0.075	0.216	0.389	0.091	0.625	0.998	0.939	0.393	0.907	0.696	
		Right Tilted	0.160	0.058	0.005	0.017	0.366	0.022	0.223	0.565	0.584	0.182	0.543	0.405	
		Left Cheek	0.344	0.086	0.162	0.056	0.344	0.026	0.592	0.770	0.774	0.370	0.744	0.426	
		Left Tilted	0.173	0.022	0.008	0.011	0.333	0.009	0.203	0.526	0.528	0.182	0.517	0.353	
	GSM1900	Right Cheek	0.048	0.248	0.075	0.216	0.389	0.091	0.371	0.744	0.685	0.139	0.653	0.696	
		Right Tilted	0.010	0.058	0.005	0.017	0.366	0.022	0.073	0.415	0.434	0.032	0.393	0.405	
		Left Cheek	0.023	0.086	0.162	0.056	0.344	0.026	0.271	0.449	0.453	0.049	0.423	0.426	
		Left Tilted	0.015	0.022	0.008	0.011	0.333	0.009	0.045	0.368	0.370	0.024	0.359	0.353	
		Right Cheek	0.040	0.248	0.075	0.216	0.389	0.091	0.363	0.736	0.677	0.131	0.645	0.696	
WCDMA	WCDMA II	Right Tilted	0.010	0.058	0.005	0.017	0.366	0.022	0.073	0.415	0.434	0.032	0.393	0.405	
		Left Cheek	0.023	0.086	0.162	0.056	0.344	0.026	0.271	0.449	0.453	0.049	0.423	0.426	
		Left Tilted	0.016	0.022	0.008	0.011	0.333	0.009	0.046	0.369	0.371	0.025	0.360	0.353	
		Right Cheek	0.043	0.248	0.075	0.216	0.389	0.091	0.366	0.739	0.680	0.134	0.648	0.696	
	WCDMA IV	Right Tilted	0.014	0.058	0.005	0.017	0.366	0.022	0.077	0.419	0.438	0.036	0.397	0.405	
		Left Cheek	0.019	0.086	0.162	0.056	0.344	0.026	0.267	0.445	0.449	0.045	0.419	0.426	
		Left Tilted	0.008	0.022	0.008	0.011	0.333	0.009	0.038	0.361	0.363	0.017	0.352	0.353	
		Right Cheek	0.344	0.248	0.075	0.216	0.389	0.091	0.667	1.040	0.981	0.435	0.949	0.696	
	WCDMA V	Right Tilted	0.133	0.058	0.005	0.017	0.366	0.022	0.196	0.538	0.557	0.155	0.516	0.405	
		Left Cheek	0.382	0.086	0.162	0.056	0.344	0.026	0.630	0.808	0.812	0.408	0.782	0.426	
		Left Tilted	0.153	0.022	0.008	0.011	0.333	0.009	0.183	0.506	0.508	0.162	0.497	0.353	
		Right Cheek	0.066	0.248	0.075	0.216	0.389	0.091	0.389	0.762	0.703	0.157	0.671	0.696	
	LTE	LTE Band 7	Right Tilted	0.025	0.058	0.005	0.017	0.366	0.022	0.088	0.430	0.449	0.047	0.408	0.405
			Left Cheek	0.039	0.086	0.162	0.056	0.344	0.026	0.287	0.465	0.469	0.065	0.439	0.426
			Left Tilted	0.032	0.022	0.008	0.011	0.333	0.009	0.062	0.385	0.387	0.041	0.376	0.353
Right Cheek			0.228	0.248	0.075	0.216	0.389	0.091	0.551	0.924	0.865	0.319	0.833	0.696	
LTE Band 12		Right Tilted	0.086	0.058	0.005	0.017	0.366	0.022	0.149	0.491	0.510	0.108	0.469	0.405	
		Left Cheek	0.262	0.086	0.162	0.056	0.344	0.026	0.510	0.688	0.692	0.288	0.662	0.426	
		Left Tilted	0.121	0.022	0.008	0.011	0.333	0.009	0.151	0.474	0.476	0.130	0.465	0.353	
		Right Cheek	0.349	0.248	0.075	0.216	0.389	0.091	0.672	1.045	0.986	0.440	0.954	0.696	
LTE Band 13		Right Tilted	0.183	0.058	0.005	0.017	0.366	0.022	0.246	0.588	0.607	0.205	0.566	0.405	
		Left Cheek	0.354	0.086	0.162	0.056	0.344	0.026	0.602	0.780	0.784	0.380	0.754	0.426	
		Left Tilted	0.194	0.022	0.008	0.011	0.333	0.009	0.224	0.547	0.549	0.203	0.538	0.353	
		Right Cheek	0.032	0.248	0.075	0.216	0.389	0.091	0.355	0.728	0.669	0.123	0.637	0.696	
LTE Band 25		Right Tilted	0.008	0.058	0.005	0.017	0.366	0.022	0.071	0.413	0.432	0.030	0.391	0.405	
		Left Cheek	0.022	0.086	0.162	0.056	0.344	0.026	0.270	0.448	0.452	0.048	0.422	0.426	
		Left Tilted	0.016	0.022	0.008	0.011	0.333	0.009	0.046	0.369	0.371	0.025	0.360	0.353	
		Right Cheek	0.356	0.248	0.075	0.216	0.389	0.091	0.679	1.052	0.993	0.447	0.961	0.696	
LTE Band 26		Right Tilted	0.162	0.058	0.005	0.017	0.366	0.022	0.225	0.567	0.586	0.184	0.545	0.405	
		Left Cheek	0.386	0.086	0.162	0.056	0.344	0.026	0.634	0.812	0.816	0.412	0.786	0.426	
		Left Tilted	0.192	0.022	0.008	0.011	0.333	0.009	0.222	0.545	0.547	0.201	0.536	0.353	
		Right Cheek	0.066	0.248	0.075	0.216	0.389	0.091	0.389	0.762	0.703	0.157	0.671	0.696	
LTE Band 41		Right Tilted	0.025	0.058	0.005	0.017	0.366	0.022	0.088	0.430	0.449	0.047	0.408	0.405	
		Left Cheek	0.037	0.086	0.162	0.056	0.344	0.026	0.285	0.463	0.467	0.063	0.437	0.426	
		Left Tilted	0.029	0.022	0.008	0.011	0.333	0.009	0.059	0.382	0.384	0.038	0.373	0.353	
		Right Cheek	0.048	0.248	0.075	0.216	0.389	0.091	0.371	0.744	0.685	0.139	0.653	0.696	
LTE Band 66		Right Tilted	0.010	0.058	0.005	0.017	0.366	0.022	0.073	0.415	0.434	0.032	0.393	0.405	
		Left Cheek	0.027	0.086	0.162	0.056	0.344	0.026	0.275	0.453	0.457	0.053	0.427	0.426	
		Left Tilted	0.017	0.022	0.008	0.011	0.333	0.009	0.047	0.370	0.372	0.026	0.361	0.353	



**14.2 Hotspot Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)		
GSM	GSM850	Front	0.350	0.043	0.019	0.357	0.412	0.707
		Back	0.378	0.110	0.091	0.357	0.579	0.735
		Left side	0.390	0.105	0.022	0.357	0.517	0.747
		Right side	0.341				0.341	0.341
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.085				0.085	0.085
	GSM1900	Front	0.308	0.043	0.019	0.357	0.370	0.665
		Back	0.317	0.110	0.091	0.357	0.518	0.674
		Left side	0.037	0.105	0.022	0.357	0.164	0.394
		Right side	0.071				0.071	0.071
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.499				0.499	0.499
WCDMA	WCDMA II	Front	0.357	0.043	0.019	0.357	0.419	0.714
		Back	0.385	0.110	0.091	0.357	0.586	0.742
		Left side	0.025	0.105	0.022	0.357	0.152	0.382
		Right side	0.060				0.060	0.060
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.572				0.572	0.572
	WCDMA IV	Front	0.284	0.043	0.019	0.357	0.346	0.641
		Back	0.396	0.110	0.091	0.357	0.597	0.753
		Left side	0.022	0.105	0.022	0.357	0.149	0.379
		Right side	0.045				0.045	0.045
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.450				0.450	0.450
	WCDMA V	Front	0.317	0.043	0.019	0.357	0.379	0.674
		Back	0.362	0.110	0.091	0.357	0.563	0.719
		Left side	0.321	0.105	0.022	0.357	0.448	0.678
		Right side	0.286				0.286	0.286
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.095				0.095	0.095



WWAN Band		Exposure Position	1	2	3	6	1+2+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Chain 0 1g SAR (W/kg)	2.4GHz WLAN Chain 1 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)		
LTE	LTE Band 7	Front	0.260	0.043	0.019	0.357	0.322	0.617
		Back	0.313	0.110	0.091	0.357	0.514	0.670
		Left side	0.051	0.105	0.022	0.357	0.178	0.408
		Right side	0.337				0.337	0.337
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.717				0.717	0.717
	LTE Band 12	Front	0.291	0.043	0.019	0.357	0.353	0.648
		Back	0.352	0.110	0.091	0.357	0.553	0.709
		Left side	0.317	0.105	0.022	0.357	0.444	0.674
		Right side	0.278				0.278	0.278
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.049				0.049	0.049
	LTE Band 13	Front	0.458	0.043	0.019	0.357	0.520	0.815
		Back	0.492	0.110	0.091	0.357	0.693	0.849
		Left side	0.482	0.105	0.022	0.357	0.609	0.839
		Right side	0.475				0.475	0.475
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.055				0.055	0.055
	LTE Band 25	Front	0.351	0.043	0.019	0.357	0.413	0.708
		Back	0.387	0.110	0.091	0.357	0.588	0.744
		Left side	0.025	0.105	0.022	0.357	0.152	0.382
		Right side	0.066				0.066	0.066
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.558				0.558	0.558
	LTE Band 26	Front	0.380	0.043	0.019	0.357	0.442	0.737
		Back	0.379	0.110	0.091	0.357	0.580	0.736
		Left side	0.396	0.105	0.022	0.357	0.523	0.753
		Right side	0.331				0.331	0.331
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.096				0.096	0.096
	LTE Band 41	Front	0.256	0.043	0.019	0.357	0.318	0.613
		Back	0.321	0.110	0.091	0.357	0.522	0.678
		Left side	0.048	0.105	0.022	0.357	0.175	0.405
		Right side	0.305				0.305	0.305
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.787				0.787	0.787
	LTE Band 66	Front	0.333	0.043	0.019	0.357	0.395	0.690
		Back	0.394	0.110	0.091	0.357	0.595	0.751
		Left side	0.023	0.105	0.022	0.357	0.150	0.380
		Right side	0.063				0.063	0.063
		Top side		0.004		0.357	0.004	0.357
		Bottom side	0.552				0.552	0.552



**14.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	4+5+6 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Chain 0	2.4GHz WLAN Chain 1	5GHz WLAN Chain 0	5GHz WLAN Chain 1	Bluetooth							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)							
GSM	GSM850	Front	0.331	0.020	0.011	0.008	0.054	0.238	<b>0.362</b>	<b>0.631</b>	<b>0.405</b>	<b>0.569</b>	<b>0.393</b>	<b>0.300</b>
		Back	0.343	0.050	0.033	0.080	0.009	0.238	<b>0.426</b>	<b>0.670</b>	<b>0.402</b>	<b>0.581</b>	<b>0.432</b>	<b>0.327</b>
	GSM1900	Front	0.155	0.020	0.011	0.008	0.054	0.238	<b>0.186</b>	<b>0.455</b>	<b>0.229</b>	<b>0.393</b>	<b>0.217</b>	<b>0.300</b>
		Back	0.150	0.050	0.033	0.080	0.009	0.238	<b>0.233</b>	<b>0.477</b>	<b>0.209</b>	<b>0.388</b>	<b>0.239</b>	<b>0.327</b>
WCDMA	WCDMA II	Front	0.166	0.020	0.011	0.008	0.054	0.238	<b>0.197</b>	<b>0.466</b>	<b>0.240</b>	<b>0.404</b>	<b>0.228</b>	<b>0.300</b>
		Back	0.191	0.050	0.033	0.080	0.009	0.238	<b>0.274</b>	<b>0.518</b>	<b>0.250</b>	<b>0.429</b>	<b>0.280</b>	<b>0.327</b>
	WCDMA V	Front	0.293	0.020	0.011	0.008	0.054	0.238	<b>0.324</b>	<b>0.593</b>	<b>0.367</b>	<b>0.531</b>	<b>0.355</b>	<b>0.300</b>
		Back	0.311	0.050	0.033	0.080	0.009	0.238	<b>0.394</b>	<b>0.638</b>	<b>0.370</b>	<b>0.549</b>	<b>0.400</b>	<b>0.327</b>
LTE	LTE Band 7	Front	0.154	0.020	0.011	0.008	0.054	0.238	<b>0.185</b>	<b>0.454</b>	<b>0.228</b>	<b>0.392</b>	<b>0.216</b>	<b>0.300</b>
		Back	0.167	0.050	0.033	0.080	0.009	0.238	<b>0.250</b>	<b>0.494</b>	<b>0.226</b>	<b>0.405</b>	<b>0.256</b>	<b>0.327</b>
	LTE Band 12	Front	0.270	0.020	0.011	0.008	0.054	0.238	<b>0.301</b>	<b>0.570</b>	<b>0.344</b>	<b>0.508</b>	<b>0.332</b>	<b>0.300</b>
		Back	0.311	0.050	0.033	0.080	0.009	0.238	<b>0.394</b>	<b>0.638</b>	<b>0.370</b>	<b>0.549</b>	<b>0.400</b>	<b>0.327</b>
	LTE Band 13	Front	0.440	0.020	0.011	0.008	0.054	0.238	<b>0.471</b>	<b>0.740</b>	<b>0.514</b>	<b>0.678</b>	<b>0.502</b>	<b>0.300</b>
		Back	0.456	0.050	0.033	0.080	0.009	0.238	<b>0.539</b>	<b>0.783</b>	<b>0.515</b>	<b>0.694</b>	<b>0.545</b>	<b>0.327</b>
	LTE Band 25	Front	0.153	0.020	0.011	0.008	0.054	0.238	<b>0.184</b>	<b>0.453</b>	<b>0.227</b>	<b>0.391</b>	<b>0.215</b>	<b>0.300</b>
		Back	0.173	0.050	0.033	0.080	0.009	0.238	<b>0.256</b>	<b>0.500</b>	<b>0.232</b>	<b>0.411</b>	<b>0.262</b>	<b>0.327</b>
	LTE Band 26	Front	0.329	0.020	0.011	0.008	0.054	0.238	<b>0.360</b>	<b>0.629</b>	<b>0.403</b>	<b>0.567</b>	<b>0.391</b>	<b>0.300</b>
		Back	0.335	0.050	0.033	0.080	0.009	0.238	<b>0.418</b>	<b>0.662</b>	<b>0.394</b>	<b>0.573</b>	<b>0.424</b>	<b>0.327</b>
	LTE Band 41	Front	0.136	0.020	0.011	0.008	0.054	0.238	<b>0.167</b>	<b>0.436</b>	<b>0.210</b>	<b>0.374</b>	<b>0.198</b>	<b>0.300</b>
		Back	0.161	0.050	0.033	0.080	0.009	0.238	<b>0.244</b>	<b>0.488</b>	<b>0.220</b>	<b>0.399</b>	<b>0.250</b>	<b>0.327</b>
	LTE Band 66	Front	0.166	0.020	0.011	0.008	0.054	0.238	<b>0.197</b>	<b>0.466</b>	<b>0.240</b>	<b>0.404</b>	<b>0.228</b>	<b>0.300</b>
		Back	0.223	0.050	0.033	0.080	0.009	0.238	<b>0.306</b>	<b>0.550</b>	<b>0.282</b>	<b>0.461</b>	<b>0.312</b>	<b>0.327</b>

**14.4 Product Specific Exposure Conditions**

Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
	5GHz WLAN Chain 0	5GHz WLAN Chain 1	
	10g SAR (W/kg)	10g SAR (W/kg)	
Front	0.096	0.180	<b>0.276</b>
Back	0.437	0.320	<b>0.757</b>
Left side	0.130	0.020	<b>0.150</b>
Right side			<b>0.000</b>
Top side	0.026	0.041	<b>0.067</b>
Bottom side			<b>0.000</b>

**Remark:**

1. According to KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN / Bluetooth SAR was excluded, due to Hotspot SAR was < 1.2W/kg.
2. According to KDB 941225 D06 v02r01, for 5GHz WLAN SAR was excluded for that position, due to transmitting antenna located larger 25mm from that surface or edge

**Test Engineer :** Neil Hsiang Randy Lin Andy Jiang Willy Yu Ted Hsieh Jay Jian Thomas Wang White Huang Wilson Lin and Carter Chuang



## **15. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, "SAR EVALUATION PROCEDURES FOR UMPC MINI-TABLET DEVICES", Oct. 2015
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.