



CERTIFICATION TEST REPORT

Report Number. : 12395502-E7V3

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-04685Y

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac &
NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
August 22, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	7/31/18	Initial Issue	
V2	8/15/18	Updated Section 5.1 & 6.4	Kiya Kedida
V3	8/22/18	Added Section 7.1 (Fundamental & Below 30MHz data) and Updated Appedinx A	Kiya Kedida

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
6. REUSE OF TEST DATA.....	9
6.1. <i>INTRODUCTION</i>	<i>9</i>
6.2. <i>DEVICES DIFFERENCES.....</i>	<i>9</i>
6.3. <i>SPOT CHECK VERIFICATION RESULTS SUMMARY</i>	<i>9</i>
6.4. <i>REFERENCE DETAIL</i>	<i>9</i>
7. SPOT CHECK DATA.....	10
7.1. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.09 - 1000 MHz)</i>	<i>12</i>
7.2. <i>TX SPURIOUS EMISSIONS (30 – 1000MHz).....</i>	<i>15</i>
8. SETUP PHOTOS.....	17

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

SERIAL NUMBER: BH93007FDH (With Antenna)

DATE TESTED: July 30, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Reviewed By:



Dan Corona
CONSUMER TECHNOLOGY DIVISION
Operations Leader
UL VERIFICATION SERVICES INC.

Kiya Kedida
CONSUMER TECHNOLOGY DIVISION
Project Engineer
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and at 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)	<input type="checkbox"/> Chamber K (ISED: 2324A-1)
<input type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)	<input type="checkbox"/> Chamber L (ISED: 2324A-3)
<input type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)	
	<input type="checkbox"/> Chamber G (ISED:22541-4)	
	<input type="checkbox"/> Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

ISED company address codes for chambers K through L are in process, and have yet to be determined.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

6. REUSE OF TEST DATA

6.1. INTRODUCTION

According to the manufacturer, the WLAN, Bluetooth and NFC hardware of PY7-04685Y are identical to PY7-12644J. In addition PY7-04685Y digital circuit is identical to PY7-12644J. Therefore the following report/data of PY7-04685Y may be represented from PY7-12644J, along with the spot check verification data.

- WLAN
- Bluetooth
- NFC
- 15B

6.2. DEVICES DIFFERENCES

Difference between PY7-04685Y and PY7-12644J:

Sony Mobile Communications Inc. hereby declares that the difference between PY7-04685Y and PY7-12644J is related only to the cellular part. Therefore the WLAN/Bluetooth/NFC/15B report/data of PY7-12644J may represent for PY7-04685Y.

6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device PY7-04685Y for radiated harmonic spurious. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.

6.4. REFERENCE DETAIL

Equipment Class	Reference FCC ID	Report Title/Section
DXX (NFC)	PY7-12644J	12380932-E7V4 FCC Report NFC

7. SPOT CHECK DATA

LIMIT

§15.225, 15.209

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown at the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

KDB 414788 OATS and Chamber Correlation Justification


Device is a Smart Phone.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

7.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.09 - 1000 MHz)

FUNDAMENTAL EMISSION MASK - TYPE A, 106Kbps (11.56 – 15.56 MHz)

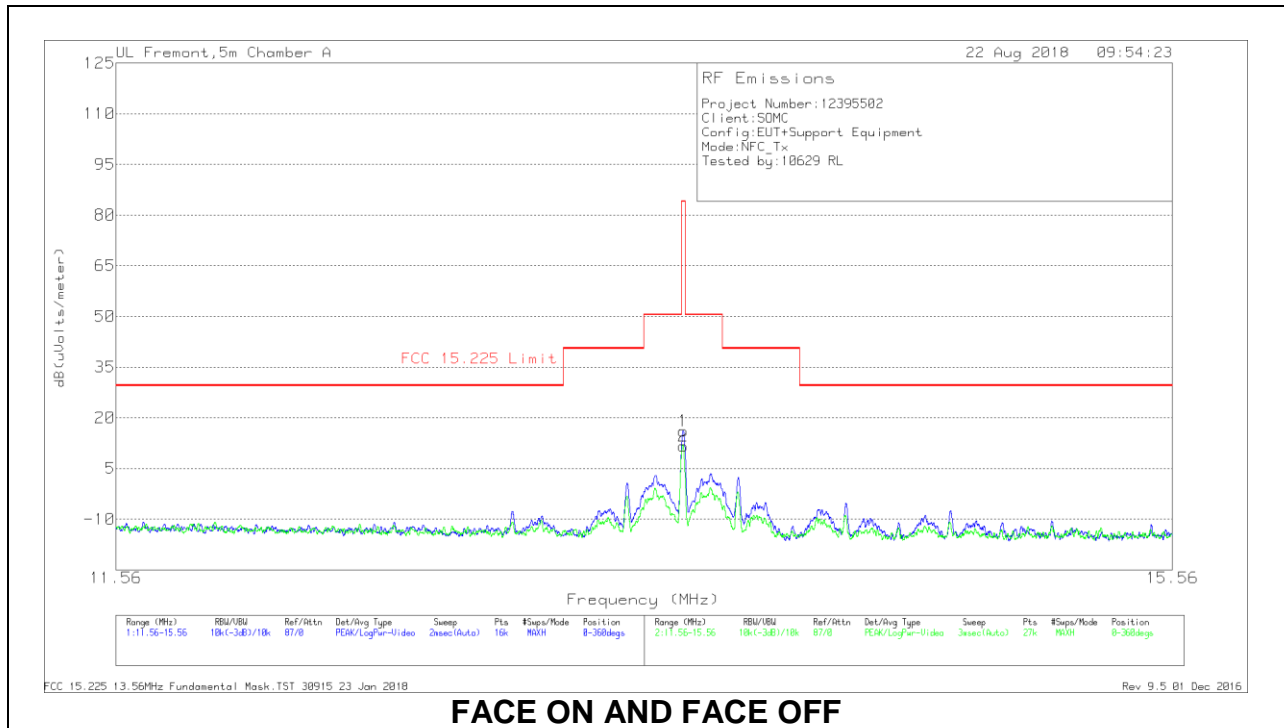

NOTE: All data rate Field Strength was investigated and Type A, 106k found to have the highest Field Strength results and represents as the worst case data rate.

DATA


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
1	13.55925	41.15	Pk	14.4	.6	-40	16.15	84	-67.85	0-360
2	13.55963	36.67	Pk	14.4	.6	-40	11.67	84	-72.33	0-360

* - Indicates fundamental frequency

Pk - Peak detector

SPURIOUS EMISSIONS - TYPE A, 106kbps (0.09 – 30MHz)

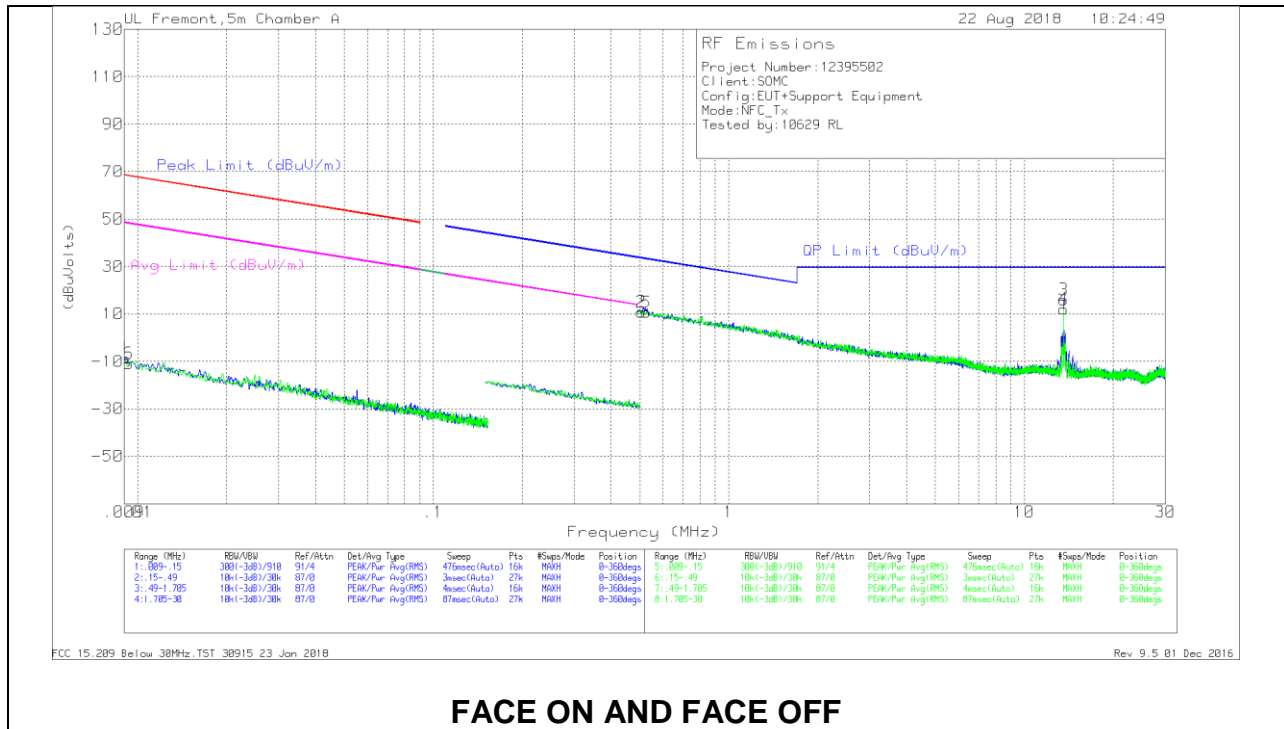

FACE ON AND FACE OFF

DATA

Trace Markers



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.00911	55.68	Pk	15.6	.1	-80	-8.62	68.4	-77.02	48.4	-57.02	-	-	0-360
6	.00931	53.5	Pk	15.5	.1	-80	-10.9	68.21	-79.11	48.21	-59.11	-	-	0-360

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
2	.50611	36.76	Pk	13.9	.1	-40	10.76	33.52	-22.76	-	-	-	-	0-360
5	.52599	36.69	Pk	13.9	.1	-40	10.69	33.19	-22.5	-	-	-	-	0-360
3	13.55945	40.97	Pk	14.4	.6	-40	15.97	84	-68.03	-	-	-	-	0-360
4	13.55945	37.07	Pk	14.4	.6	-40	12.07	84	-71.93	-	-	-	-	0-360

Pk - Peak detector

7.2. TX SPURIOUS EMISSIONS (30 – 1000MHz)

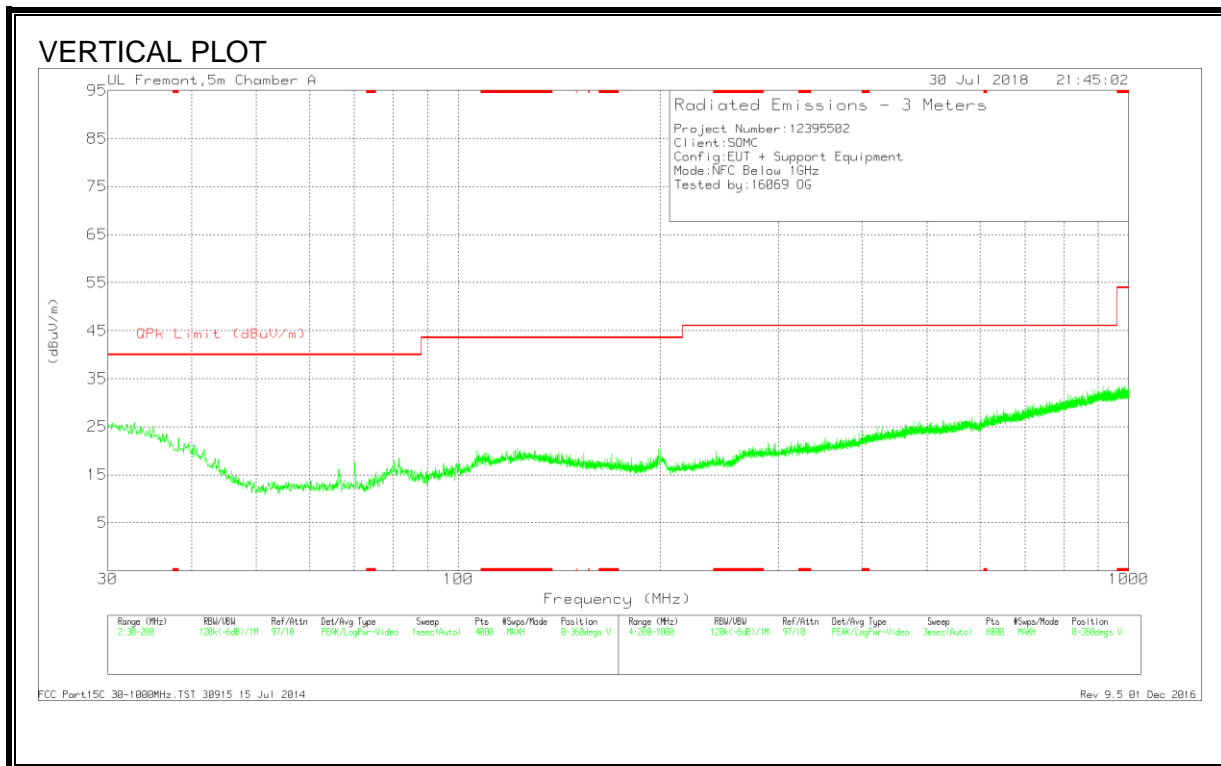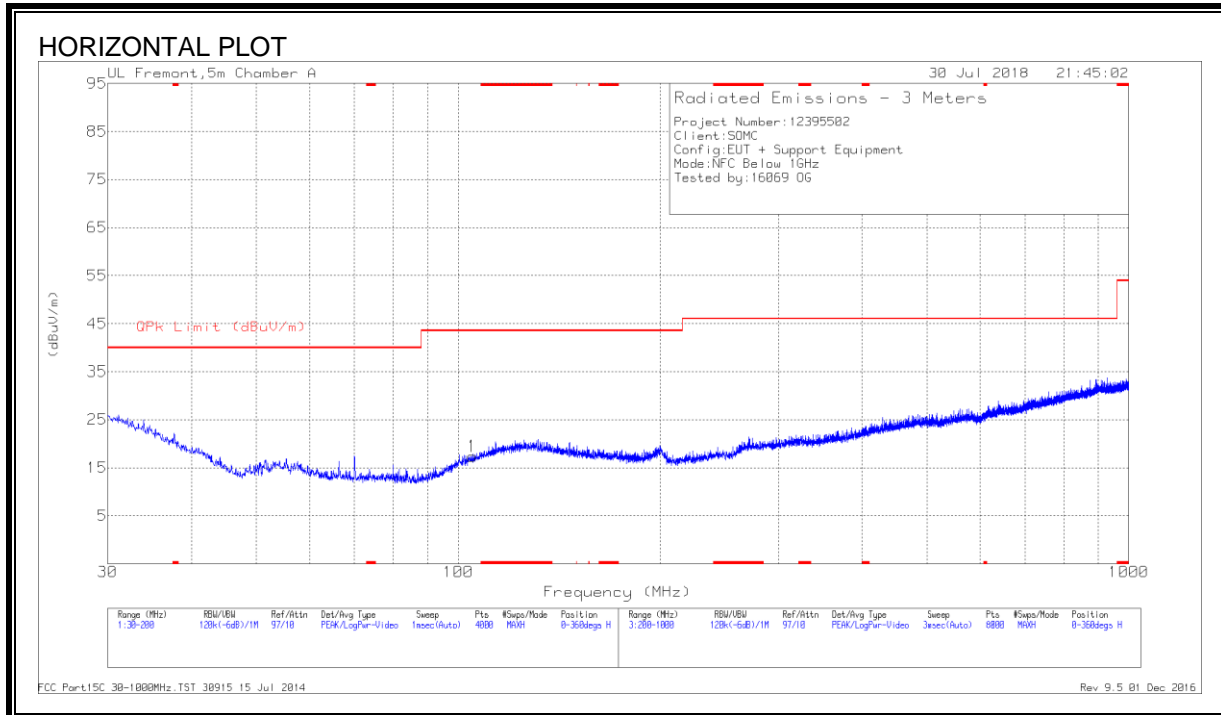

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	104.9469	28.11	Pk	15.6	-26.3	17.41	43.52	-26.11	0-360	300	H

Pk - Peak detector

APPENDIX A

PY7-04685Y SPOT CHECK RESULTS						
Technology	Test Item	Channel	Measured Frequency	PY7-12644J	PY7-04685Y	Delta (dB)
				QP	QP	QP
NFC	Spurious Emissions (0.09 – 30MHz)	N/A	.52599 MHz	32.12	33.19	-1.07
Technology	Test Item	Channel	Measured Frequency	PY7-12644J	PY7-04685Y	Delta (dB)
				Peak	Peak	Peak
NFC	Fundamental	N/A	13.55925 MHz	17.89	16.15	1.74
Note:						

END OF REPORT