


# FCC RADIO TEST REPORT

FCC ID : PY7-26817E  
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII  
a/b/g/n/ac, GPS and NFC  
Brand Name : Sony  
Applicant : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo, 140-0002, Japan  
Manufacturer : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo, 140-0002, Japan  
Standard : FCC Part 15 Subpart C §15.225

The product was received on Mar. 25, 2019 and testing was started from Jun. 12, 2019 and completed on Jun. 15, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result .....</b>	<b>4</b>
<b>1. General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2. Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Descriptions of Test Mode .....	7
2.2 Connection Diagram of Test System .....	8
2.3 Table for Supporting Units .....	10
2.4 EUT Operation Test Setup.....	10
<b>3. Test Results.....</b>	<b>11</b>
3.1 AC Power Line Conducted Emissions Measurement.....	11
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement .....	13
3.3 Frequency Stability Measurement.....	14
3.4 Field Strength of Fundamental Emissions and Mask Measurement .....	15
3.5 Radiated Emissions Measurement .....	17
3.6 Antenna Requirements .....	20
<b>4. List of Measuring Equipment .....</b>	<b>21</b>
<b>5. Uncertainty of Evaluation .....</b>	<b>22</b>
<b>Appendix A. Test Results of Conducted Emission Test</b>	
<b>Appendix B. Test Results of Conducted Test Items</b>	
B1. Test Result of 20dB Spectrum Bandwidth	
B2. Test Result of Frequency Stability	
<b>Appendix C. Test Results of Radiated Test Items</b>	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	



## History of this test report

Report No.	Version	Description	Issued Date
FR932517-01D	01	Initial issue of report	Jun. 26, 2019
FR932517-01D	02	Add the description of terminal test result.	Jul. 16, 2019

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	Under limit 16.23 dB at 0.467MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
	2.1049	99% OBW Spectrum Bandwidth	Reporting only	-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 24.04 dB $\mu$ V/m at 13.560 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass	Under limit 6.42 dB at 40.670MHz
3.6	15.203	Antenna Requirements	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Yimin Ho**

# 1. General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	Loop Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.96	BH9300UZGP	RF conducted measurement
		BH9300ZHGP	Radiated Spurious Emission
		BH9300ZHGP BH9300TMGP	Conducted Emission

Accessory List	
AC Adapter	Model Name : UCH20
	S/N:
	1116W37712558 (for Radiation)
	1116W37712313 (for Radiation)
Earphone	1116W37712433 (for Conduction)
	Model Name.: STH40D
USB Cable	S/N : N/A
	Model Name.: UCB20
	S/N : N/A

### Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
3. For other wireless features of this EUT, test report will be issued separately.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.3 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH03-HY	CO05-HY
<b>Test Engineer</b>	Benjamin Lin	Jimmy Chang
<b>Temperature</b>	22~24°C	24~26°C
<b>Relative Humidity</b>	53~55%	53~55%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	
<b>Test Engineer</b>	HAO Shu and Fu Chen	
<b>Temperature</b>	21~26°C	
<b>Relative Humidity</b>	52~57%	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz


The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report.

Pre-scanned tests X, Y, Z with Accessory in three orthogonal panels to determine the final configuration (Y plane for Mode 1 and X plane for Mode 2) from all possible combinations.


Test Cases	
AC Conducted Emission	Mode 1 : NFC Tx + Bluetooth Link + WLAN (2.4GHz) Link + USB Cable (Charging from Adapter) + Battery + Earphone
	Mode 2 : NFC Link + Bluetooth Link + WLAN (2.4GHz) Link + USB Cable (Charging from Adapter) + Battery + SD Card + Earphone

## 2.2 Connection Diagram of Test System



### <AC Conducted Emissions for Mode 1 with Tx Tool>

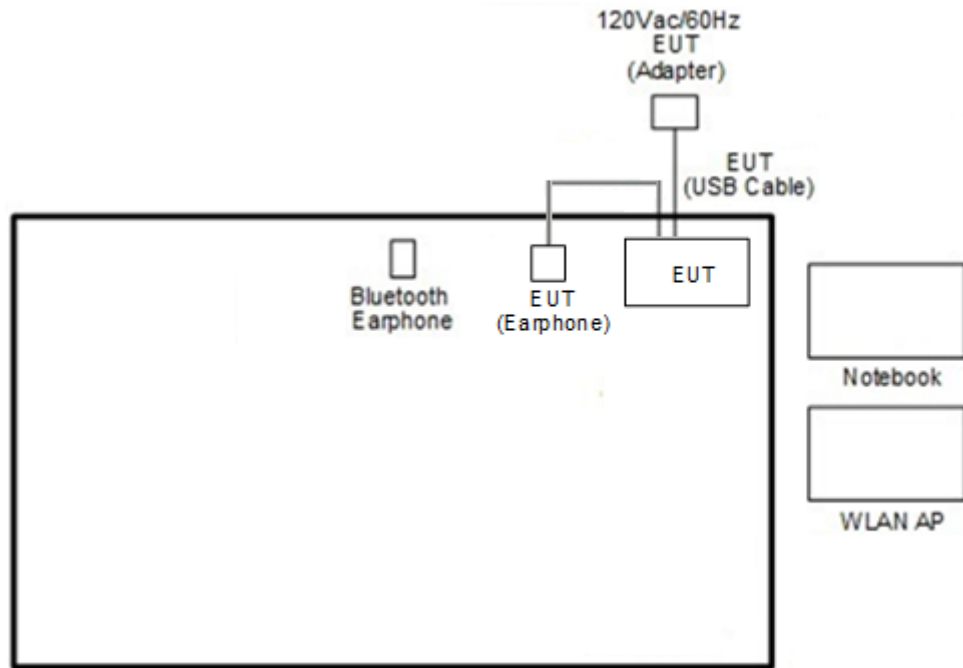

### <AC Conducted Emissions for Mode 2 with NFC Card>

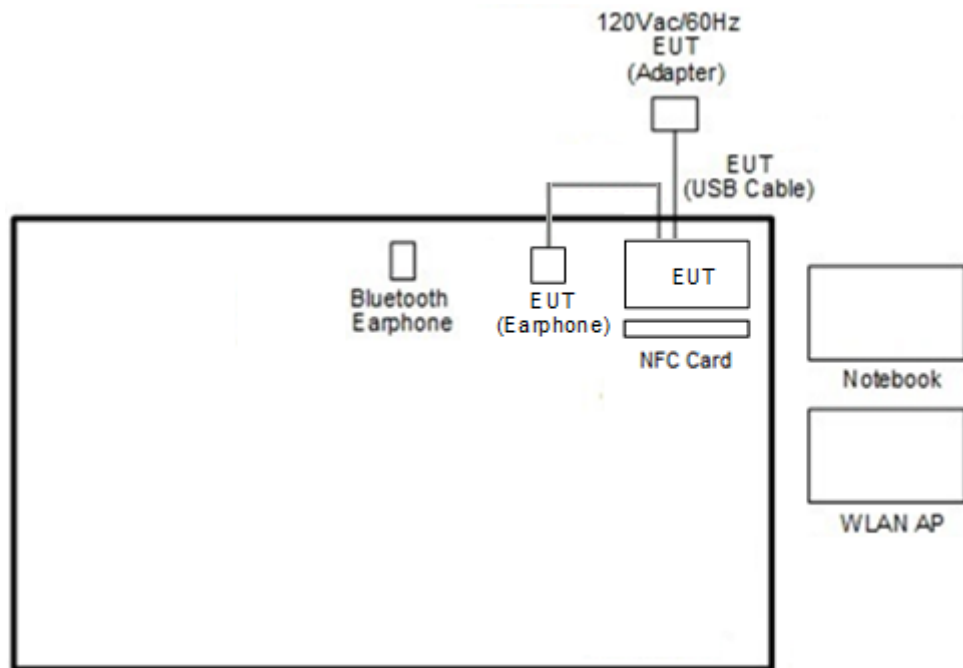

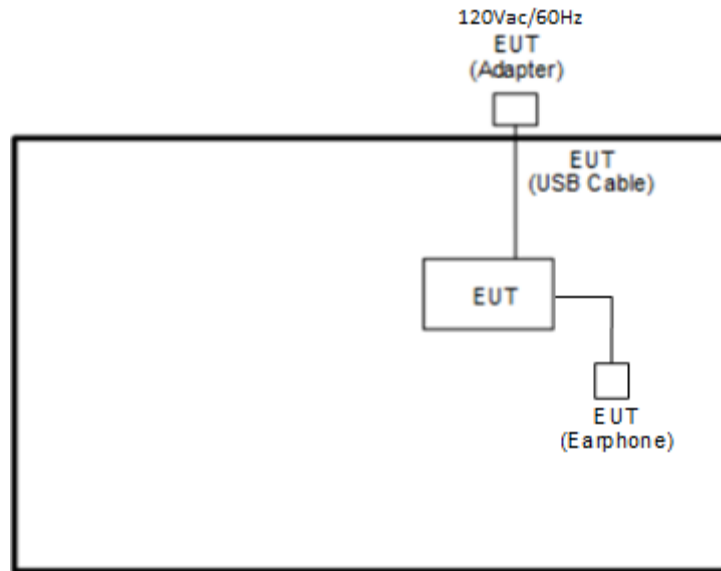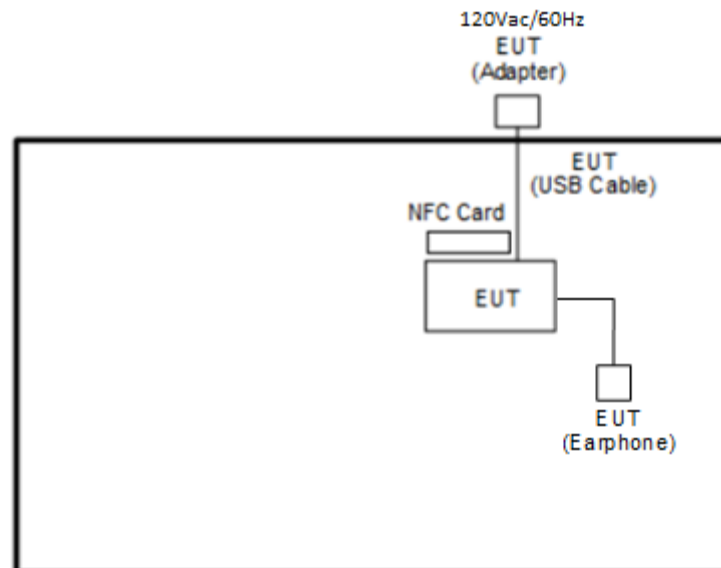

**<For Radiated Emissions Measurement with Tx Tool>**

**<For Radiated Emissions Measurement with NFC Card>**


## 2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH82D	PY7-RD0010	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
5.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A

## 2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The RF test items, utility “NFC PRBS Test Mode” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.

### 3. Test Results

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test setup

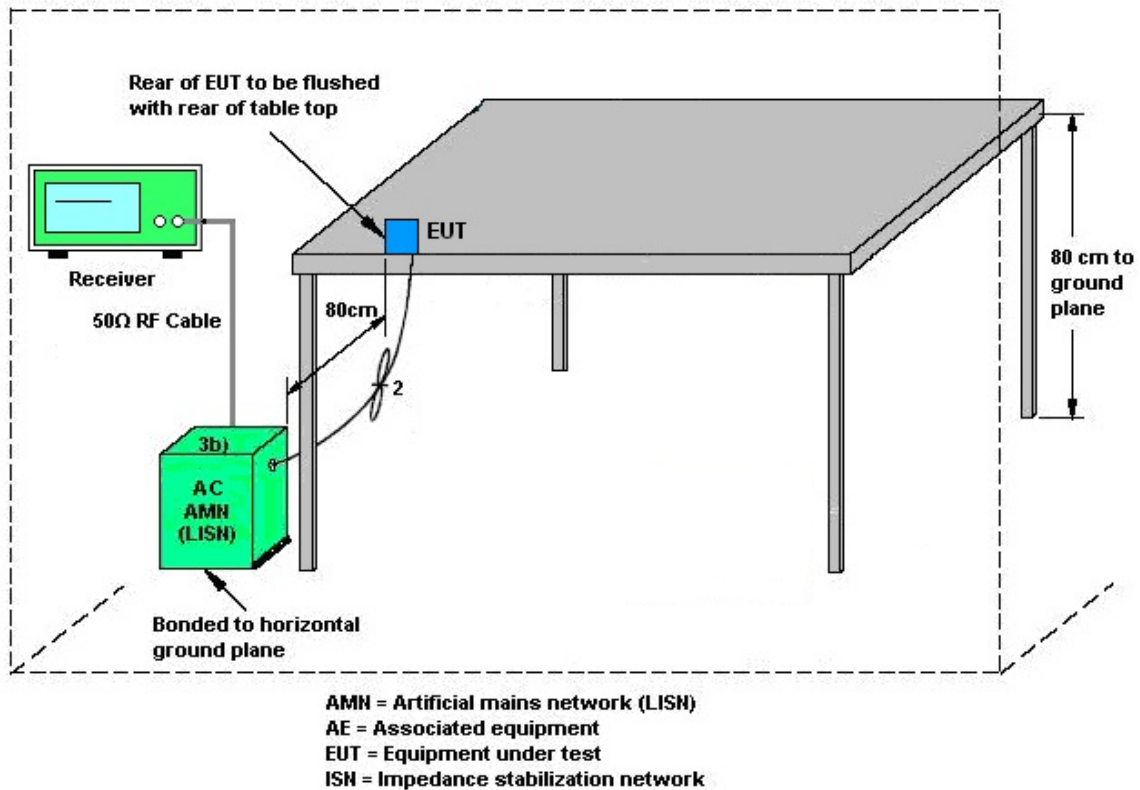

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

### 3.2.4 Test Setup

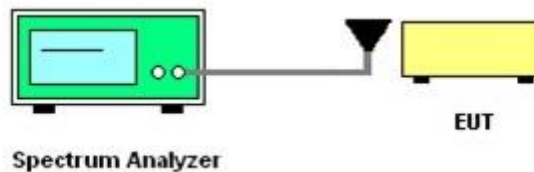

### 3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

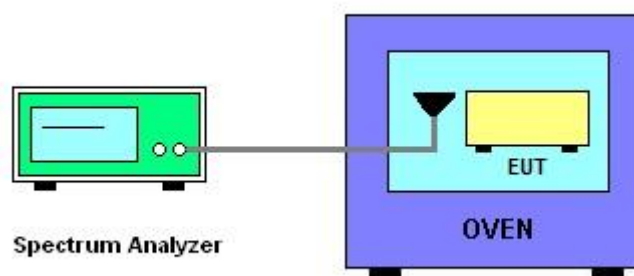

#### 3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ( $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 3.4.4 Test Setup

For radiated emissions below 30MHz

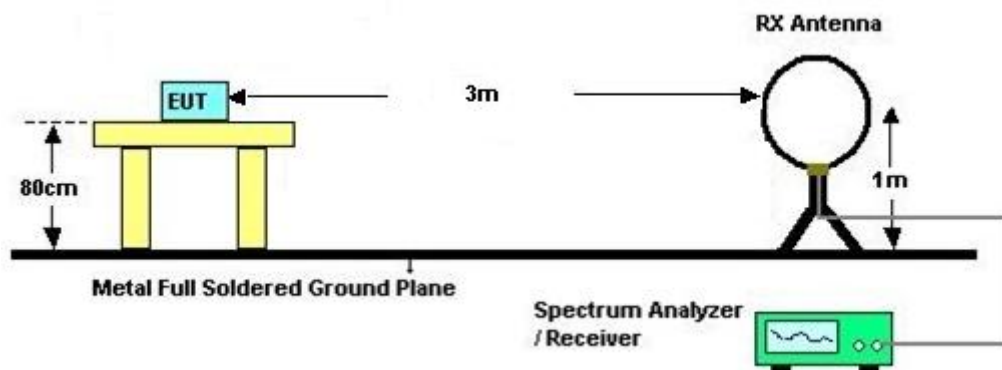

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



## 3.5 Radiated Emissions Measurement

### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak


**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

### 3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver.

### 3.5.5 Test Setup

For radiated emissions below 30MHz

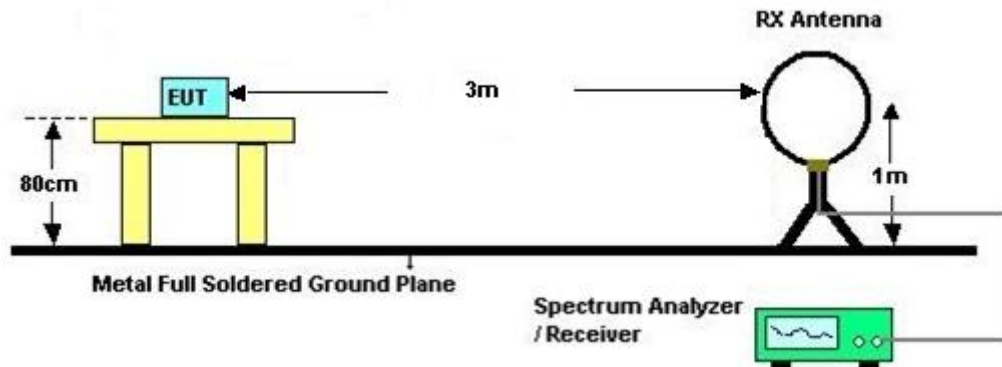

For radiated emissions above 30MHz

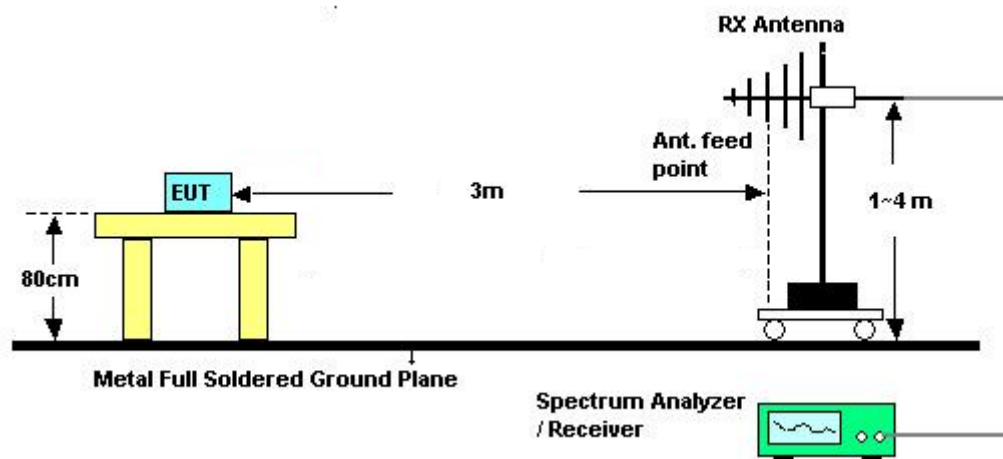

### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:**

1. There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. According to C63.10 radiated Test, the EUT pre-scanned horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.

## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F10407001 1	50Hz~60Hz	Apr. 12, 2019	Jun. 13, 2019	Apr. 11, 2020	Conducted (TH03-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 06, 2019	Jun. 13, 2019	Mar. 05, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	Jun. 13, 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 28, 2018	Jun. 13, 2019	Nov. 27, 2019	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 14, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 12, 2018	Jun. 14, 2019	Nov. 11, 2019	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Jun. 14, 2019	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jun. 14, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Jun. 14, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 14, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jun. 14, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jun. 14, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Jun. 12, 2019~ Jun. 15, 2019	Dec. 03, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D& N-6-06	35414&AT- N0602	30MHz~1GHz	Oct. 13, 2018	Jun. 12, 2019~ Jun. 15, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 05, 2018	Jun. 12, 2019~ Jun. 15, 2019	Nov. 04, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2018	Jun. 12, 2019~ Jun. 15, 2019	Oct. 18, 2019	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 12, 2019~ Jun. 15, 2019	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jun. 12, 2019~ Jun. 15, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 12, 2019~ Jun. 15, 2019	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE )	MY532900 45	N/A	Jan. 19, 2019	Jun. 12, 2019~ Jun. 15, 2019	Jan. 18, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHK20/1000 C7/40SS	SN2	20M High Pass	Sep. 16, 2018	Jun. 12, 2019~ Jun. 15, 2019	Sep. 15, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 14, 2018	Jun. 12, 2019~ Jun. 15, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 14, 2018	Jun. 12, 2019~ Jun. 15, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 14, 2018	Jun. 12, 2019~ Jun. 15, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Jun. 12, 2019~ Jun. 15, 2019	Jan. 06, 2020	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jun. 12, 2019~ Jun. 15, 2019	N/A	Radiation (03CH11-HY)

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	2.20
---	------

### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	3.45
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	5.20
---	------



## Appendix A. Test Results of Conducted Emission Test


Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	53~55%

<Original Mode>

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 1  
Test Voltage : 120Vac/60Hz  
Phase : Line

Full Spectrum

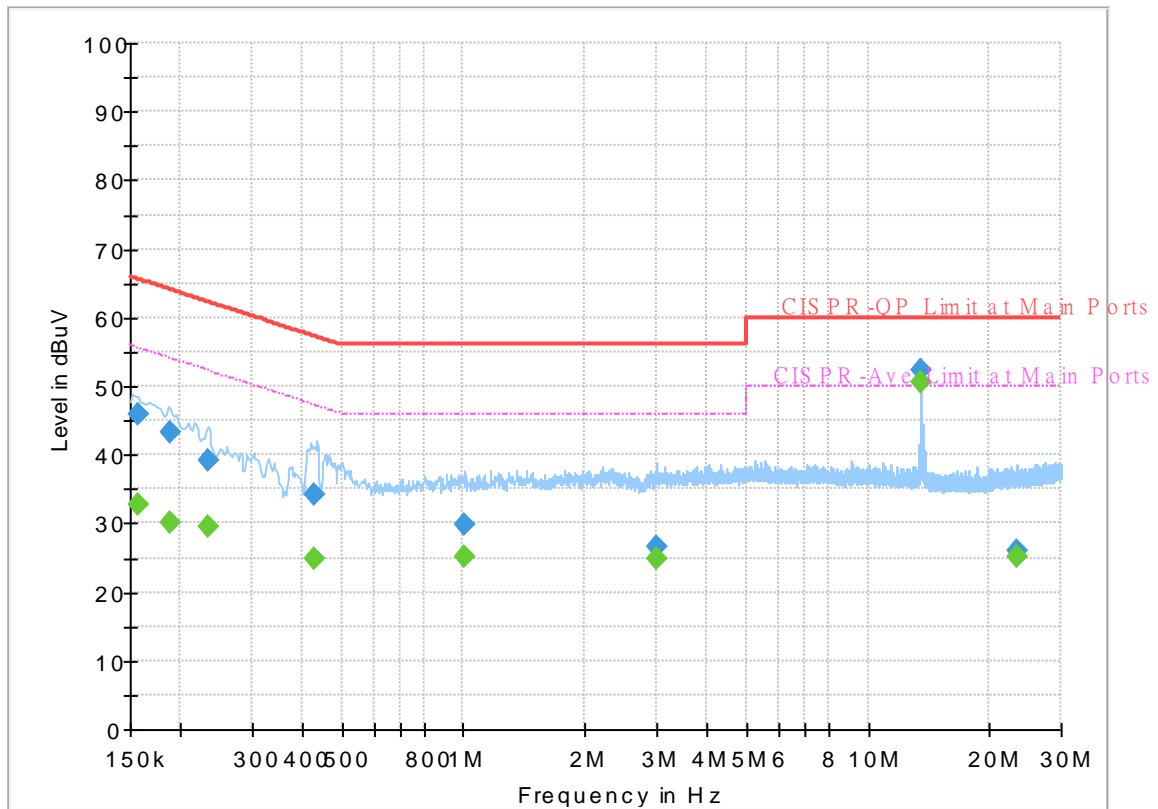

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	32.63	55.63	23.00	L1	OFF	19.5
0.156750	45.97	---	65.63	19.66	L1	OFF	19.5
0.188250	---	30.16	54.11	23.95	L1	OFF	19.5
0.188250	43.25	---	64.11	20.86	L1	OFF	19.5
0.233250	---	29.40	52.33	22.93	L1	OFF	19.5
0.233250	39.19	---	62.33	23.14	L1	OFF	19.5
0.426750	---	24.95	47.32	22.37	L1	OFF	19.5
0.426750	34.18	---	57.32	23.14	L1	OFF	19.5
1.009500	---	25.23	46.00	20.77	L1	OFF	19.6
1.009500	29.70	---	56.00	26.30	L1	OFF	19.6
2.991750	---	24.92	46.00	21.08	L1	OFF	19.6
2.991750	26.65	---	56.00	29.35	L1	OFF	19.6
13.560000	---	50.44	50.00	-0.44	L1	OFF	20.0
13.560000	52.46	---	60.00	7.54	L1	OFF	20.0
23.259750	---	25.01	50.00	24.99	L1	OFF	20.3
23.259750	25.96	---	60.00	34.04	L1	OFF	20.3



## EUT Information

Report NO : 932517-01  
Test Mode : Mode 1  
Test Voltage : 120Vac/60Hz  
Phase : Neutral

Full Spectrum

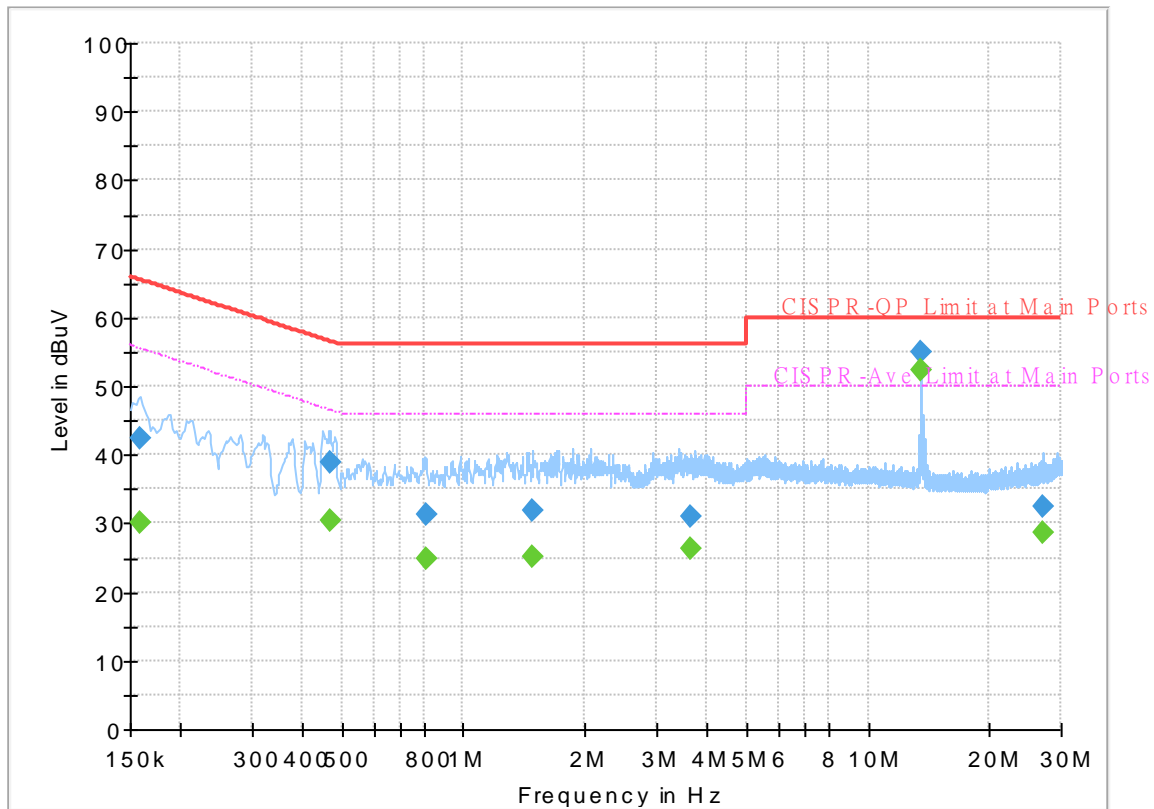

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	30.07	55.52	25.45	N	OFF	19.5
0.159000	42.33	---	65.52	23.19	N	OFF	19.5
0.467250	---	30.33	46.56	16.23	N	OFF	19.5
0.467250	38.79	---	56.56	17.77	N	OFF	19.5
0.807000	---	24.81	46.00	21.19	N	OFF	19.6
0.807000	31.15	---	56.00	24.85	N	OFF	19.6
1.484250	---	25.25	46.00	20.75	N	OFF	19.6
1.484250	31.92	---	56.00	24.08	N	OFF	19.6
3.637500	---	26.20	46.00	19.80	N	OFF	19.7
3.637500	30.97	---	56.00	25.03	N	OFF	19.7
13.560000	---	52.47	50.00	-2.47	N	OFF	20.1
13.560000	54.86	---	60.00	5.14	N	OFF	20.1
27.118500	---	28.63	50.00	21.37	N	OFF	20.6
27.118500	32.45	---	60.00	27.55	N	OFF	20.6

<Terminal Mode>

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 1  
Test Voltage : 120Vac/60Hz  
Phase : Line

Full Spectrum

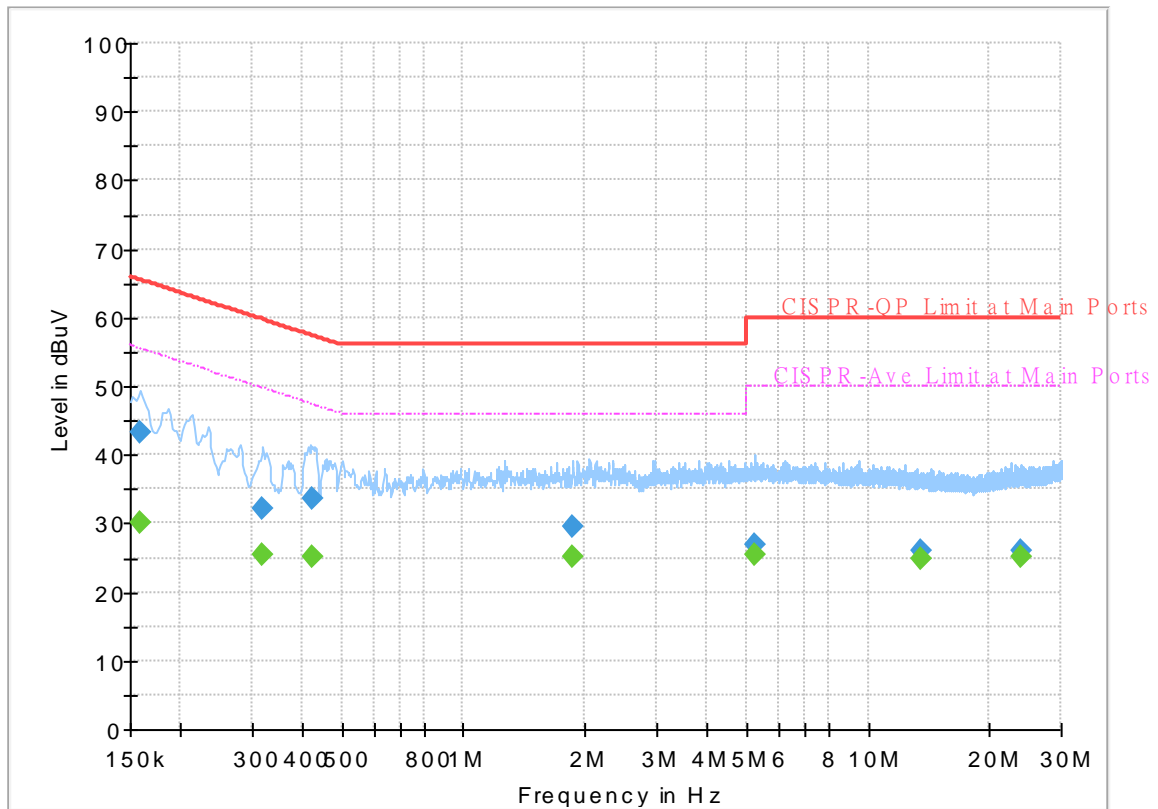


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	30.08	55.52	25.44	L1	OFF	19.5
0.159000	43.35	---	65.52	22.17	L1	OFF	19.5
0.318750	---	25.52	49.74	24.22	L1	OFF	19.5
0.318750	32.06	---	59.74	27.68	L1	OFF	19.5
0.424500	---	25.18	47.36	22.18	L1	OFF	19.5
0.424500	33.59	---	57.36	23.77	L1	OFF	19.5
1.857750	---	25.14	46.00	20.86	L1	OFF	19.6
1.857750	29.40	---	56.00	26.60	L1	OFF	19.6
5.228250	---	25.38	50.00	24.62	L1	OFF	19.7
5.228250	26.92	---	60.00	33.08	L1	OFF	19.7
13.560000	---	24.75	50.00	25.25	L1	OFF	20.0
13.560000	25.89	---	60.00	34.11	L1	OFF	20.0
23.916750	---	25.05	50.00	24.95	L1	OFF	20.3
23.916750	26.11	---	60.00	33.89	L1	OFF	20.3

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 1  
Test Voltage : 120Vac/60Hz  
Phase : Neutral

Full Spectrum

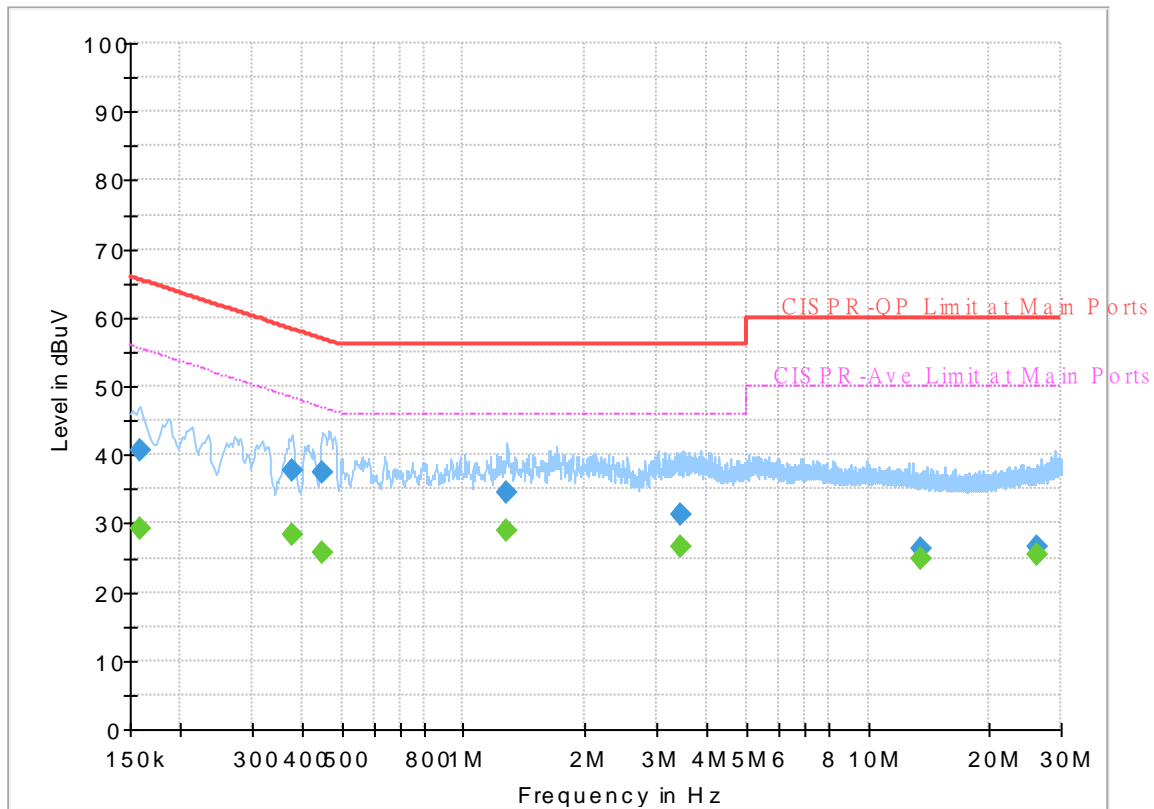

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	29.29	55.52	26.23	N	OFF	19.5
0.159000	40.55	---	65.52	24.97	N	OFF	19.5
0.377250	---	28.41	48.34	19.93	N	OFF	19.5
0.377250	37.73	---	58.34	20.61	N	OFF	19.5
0.449250	---	25.79	46.89	21.10	N	OFF	19.5
0.449250	37.39	---	56.89	19.50	N	OFF	19.5
1.279500	---	28.95	46.00	17.05	N	OFF	19.6
1.279500	34.44	---	56.00	21.56	N	OFF	19.6
3.446250	---	26.54	46.00	19.46	N	OFF	19.7
3.446250	31.20	---	56.00	24.80	N	OFF	19.7
13.560000	---	24.89	50.00	25.11	N	OFF	20.1
13.560000	26.18	---	60.00	33.82	N	OFF	20.1
26.119500	---	25.35	50.00	24.65	N	OFF	20.5
26.119500	26.56	---	60.00	33.44	N	OFF	20.5

<Original Mode>

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 2  
Test Voltage : 120Vac/60Hz  
Phase : Line

Full Spectrum

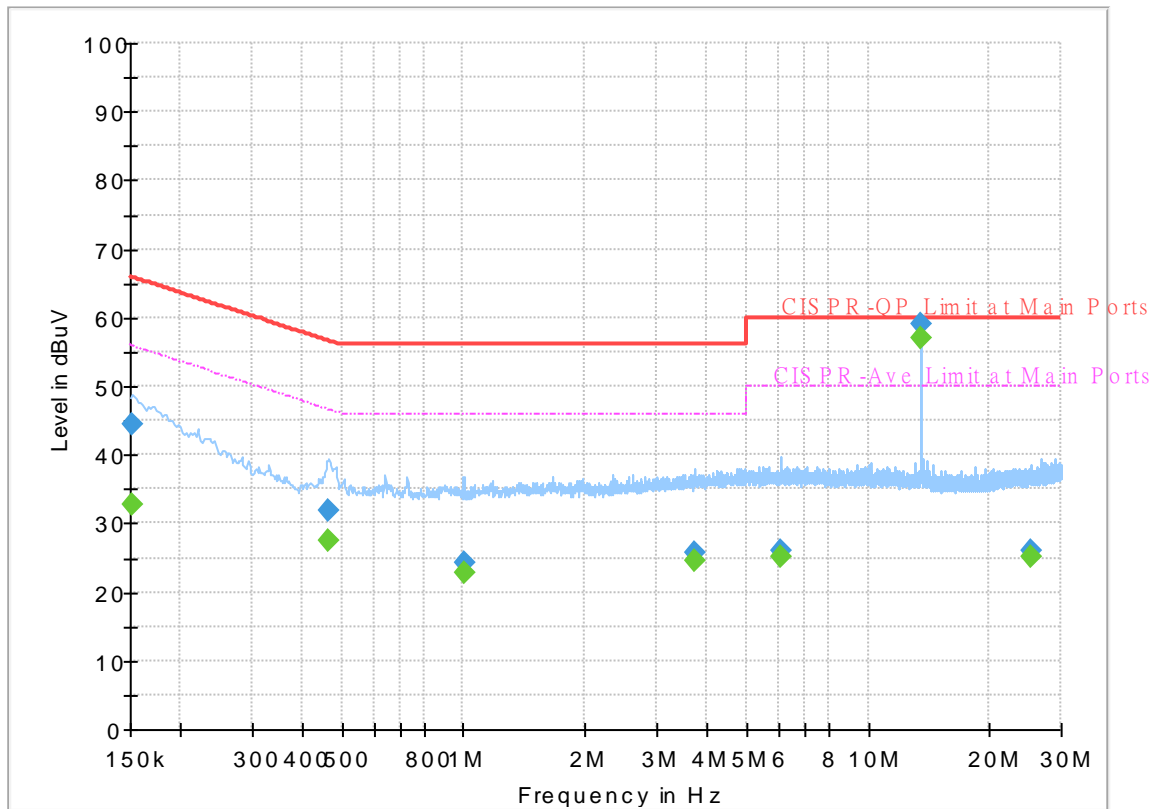


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	44.47	---	65.88	21.41	L1	OFF	19.5
0.152250	---	32.62	55.88	23.26	L1	OFF	19.5
0.465000	31.82	---	56.60	24.78	L1	OFF	19.5
0.465000	---	27.43	46.60	19.17	L1	OFF	19.5
1.000500	24.20	---	56.00	31.80	L1	OFF	19.6
1.000500	---	22.94	46.00	23.06	L1	OFF	19.6
3.734250	25.68	---	56.00	30.32	L1	OFF	19.7
3.734250	---	24.44	46.00	21.56	L1	OFF	19.7
6.078750	25.93	---	60.00	34.07	L1	OFF	19.8
6.078750	---	25.09	50.00	24.91	L1	OFF	19.8
13.560000	59.06	---	60.00	0.94	L1	OFF	20.0
13.560000	---	56.94	50.00	-6.94	L1	OFF	20.0
25.246500	25.96	---	60.00	34.04	L1	OFF	20.4
25.246500	---	25.10	50.00	24.90	L1	OFF	20.4

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 2  
Test Voltage : 120Vac/60Hz  
Phase : Neutral

Full Spectrum

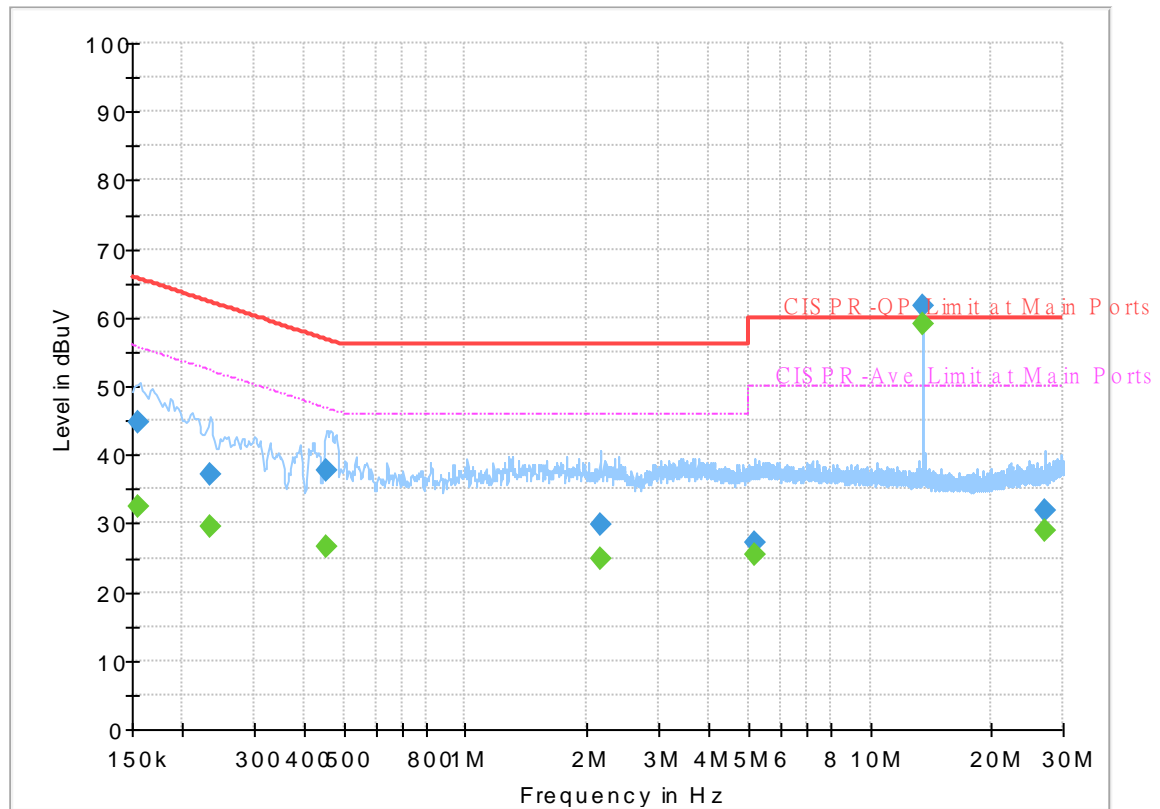

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	32.40	55.75	23.35	N	OFF	19.5
0.154500	44.74	---	65.75	21.01	N	OFF	19.5
0.233250	---	29.46	52.33	22.87	N	OFF	19.5
0.233250	37.22	---	62.33	25.11	N	OFF	19.5
0.451500	---	26.50	46.85	20.35	N	OFF	19.5
0.451500	37.71	---	56.85	19.14	N	OFF	19.5
2.148000	---	24.88	46.00	21.12	N	OFF	19.5
2.148000	29.71	---	56.00	26.29	N	OFF	19.5
5.172000	---	25.46	50.00	24.54	N	OFF	19.7
5.172000	27.09	---	60.00	32.91	N	OFF	19.7
13.560000	---	59.15	50.00	-9.15	N	OFF	20.1
13.560000	61.67	---	60.00	-1.67	N	OFF	20.1
27.118500	---	29.08	50.00	20.92	N	OFF	20.6
27.118500	31.91	---	60.00	28.09	N	OFF	20.6

<Terminal Mode>

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 2  
Test Voltage : 120Vac/60Hz  
Phase : Line

Full Spectrum

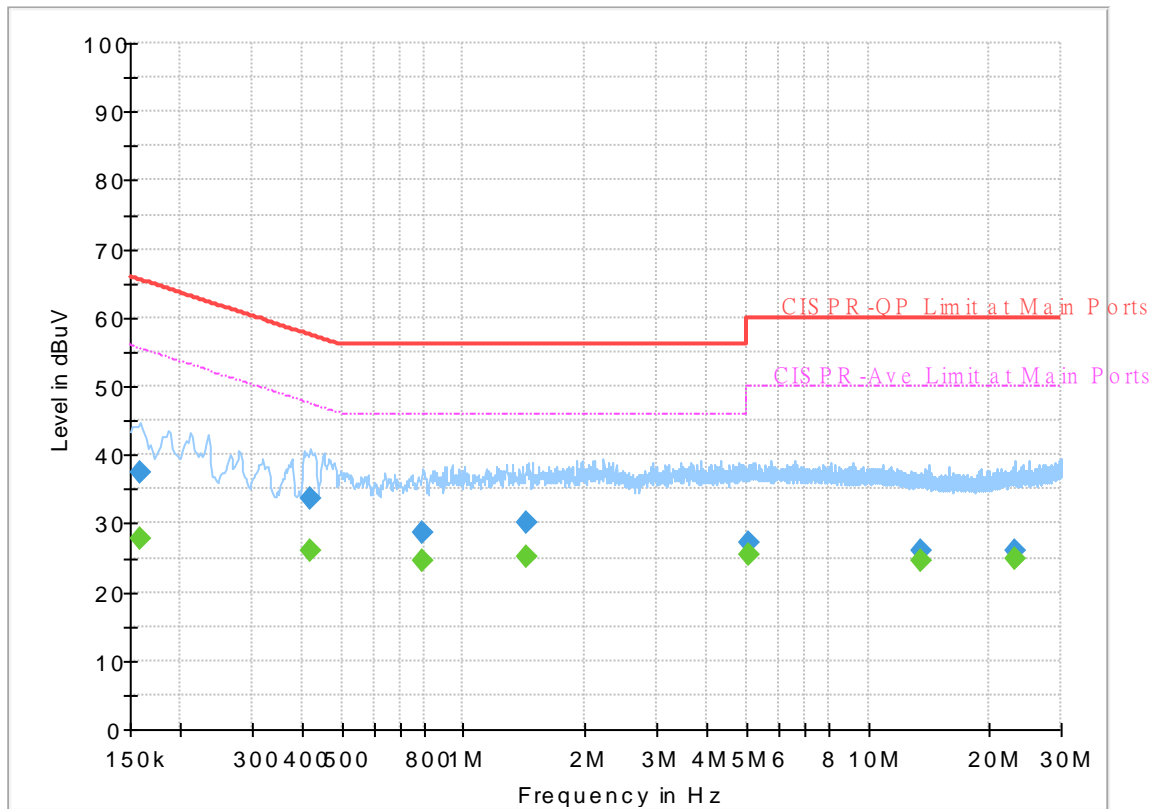


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	27.90	55.52	27.62	L1	OFF	19.5
0.159000	37.49	---	65.52	28.03	L1	OFF	19.5
0.417750	---	25.96	47.49	21.53	L1	OFF	19.5
0.417750	33.57	---	57.49	23.92	L1	OFF	19.5
0.795750	---	24.69	46.00	21.31	L1	OFF	19.6
0.795750	28.75	---	56.00	27.25	L1	OFF	19.6
1.428000	---	25.00	46.00	21.00	L1	OFF	19.6
1.428000	30.04	---	56.00	25.96	L1	OFF	19.6
5.097750	---	25.51	50.00	24.49	L1	OFF	19.7
5.097750	27.27	---	60.00	32.73	L1	OFF	19.7
13.560000	---	24.68	50.00	25.32	L1	OFF	20.0
13.560000	25.99	---	60.00	34.01	L1	OFF	20.0
23.142750	---	24.89	50.00	25.11	L1	OFF	20.3
23.142750	25.96	---	60.00	34.04	L1	OFF	20.3

## EUT Information

Report NO : 932517-01  
Test Mode : Mode 2  
Test Voltage : 120Vac/60Hz  
Phase : Neutral

Full Spectrum


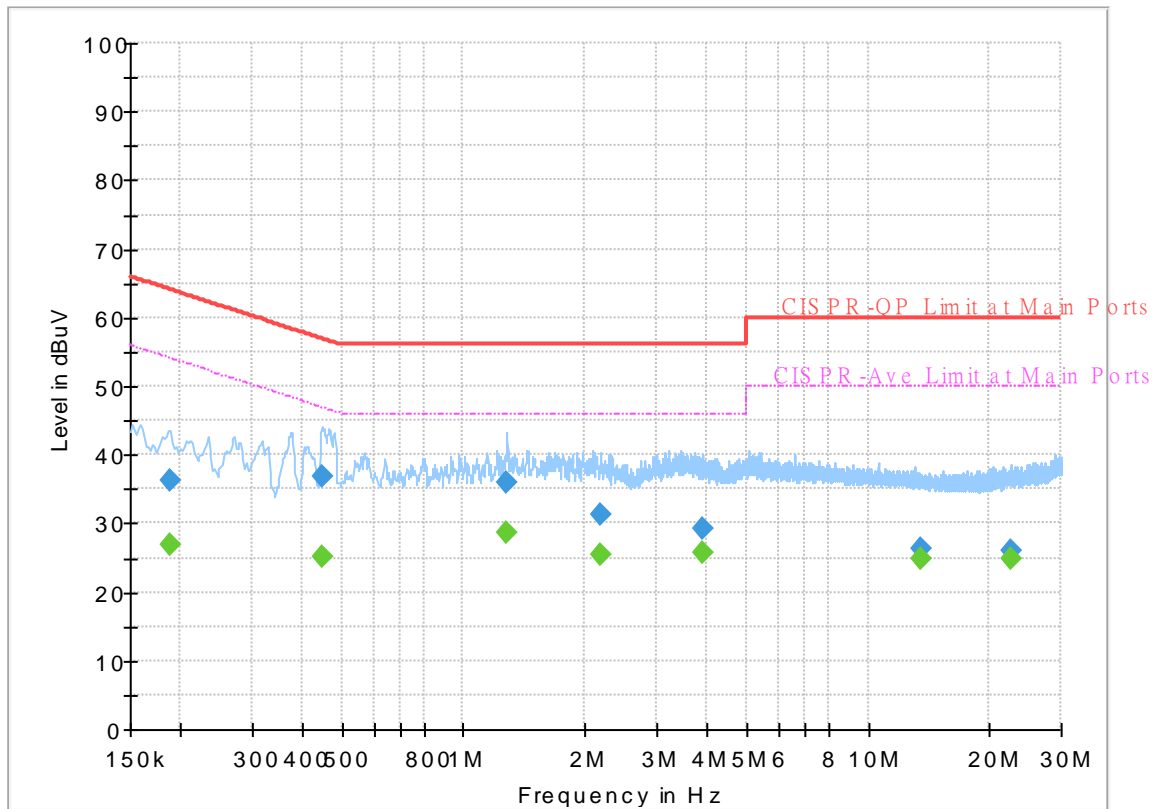


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.188250	---	26.94	54.11	27.17	N	OFF	19.5
0.188250	36.30	---	64.11	27.81	N	OFF	19.5
0.447000	---	25.28	46.93	21.65	N	OFF	19.5
0.447000	36.99	---	56.93	19.94	N	OFF	19.5
1.281750	---	28.61	46.00	17.39	N	OFF	19.6
1.281750	35.88	---	56.00	20.12	N	OFF	19.6
2.188500	---	25.46	46.00	20.54	N	OFF	19.5
2.188500	31.23	---	56.00	24.77	N	OFF	19.5
3.914250	---	25.76	46.00	20.24	N	OFF	19.7
3.914250	29.19	---	56.00	26.81	N	OFF	19.7
13.560000	---	24.87	50.00	25.13	N	OFF	20.1
13.560000	26.26	---	60.00	33.74	N	OFF	20.1
22.634250	---	24.88	50.00	25.12	N	OFF	20.4
22.634250	25.98	---	60.00	34.02	N	OFF	20.4

## Appendix B. Test Results of Conducted Test Items

### B1. Test Result of 20dB Spectrum Bandwidth

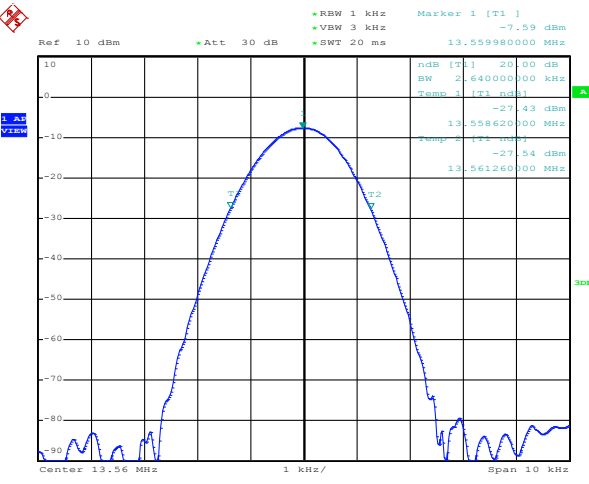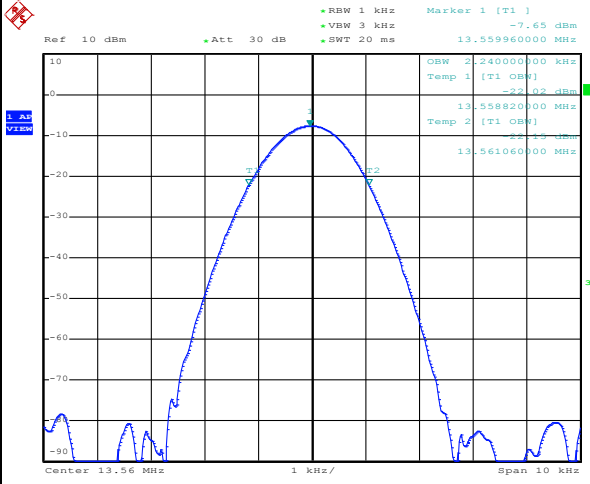Test mode		Test Frequency (MHz)	
NFC Tx		13.56	
 <p>Ref 10 dBm Att 30 dB RBW 1 kHz VSW 3 kHz SWT 20 ms</p> <p>Marker 1 [T1] -7.59 dBm</p> <p>Center 13.56 MHz 1 kHz/ Span 10 kHz</p> <p>Date: 13.JUN.2019 14:08:50</p>		 <p>Ref 10 dBm Att 30 dB RBW 1 kHz VSW 3 kHz SWT 20 ms</p> <p>Marker 1 [T1] -7.65 dBm</p> <p>Center 13.56 MHz 1 kHz/ Span 10 kHz</p> <p>Date: 13.JUN.2019 14:09:37</p>	
20dB Bandwidth (kHz)	2.64	99% OccupiedBW(kHz)	2.24
Frequency range (MHz)	$f_L > 13.553$	13.55862	Test Result
	$f_H < 13.567$	13.56126	Complies

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.



**B2. Test Result of Frequency Stability**


<b>B3. Voltage vs. Frequency Stability</b>		<b>Temperature vs. Frequency Stability</b>		
<b>Voltage (Vac)</b>	<b>Measurement Frequency (MHz)</b>	<b>Temperature (°C)</b>	<b>Time</b>	<b>Measurement Frequency (MHz)</b>
<b>120</b>	13.559940	<b>-20</b>	<b>0</b>	13.559940
<b>102</b>	13.559940		<b>2</b>	13.559940
<b>138</b>	13.559940		<b>5</b>	13.559940
			<b>10</b>	13.559940
		<b>-10</b>	<b>0</b>	13.559940
			<b>2</b>	13.559930
			<b>5</b>	13.559930
			<b>10</b>	13.559930
		<b>0</b>	<b>0</b>	13.559930
			<b>2</b>	13.559940
			<b>5</b>	13.559930
			<b>10</b>	13.559930
		<b>10</b>	<b>0</b>	13.559930
			<b>2</b>	13.559930
			<b>5</b>	13.559940
			<b>10</b>	13.559930
		<b>20</b>	<b>0</b>	13.559930
			<b>2</b>	13.559940
			<b>5</b>	13.559930
			<b>10</b>	13.559930
		<b>30</b>	<b>0</b>	13.559940
			<b>2</b>	13.559940
			<b>5</b>	13.559940
			<b>10</b>	13.559930
		<b>40</b>	<b>0</b>	13.559930
			<b>2</b>	13.559940
			<b>5</b>	13.559940
			<b>10</b>	13.559940





Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.559940
			2	13.559930
			5	13.559940
			10	13.559930
Max.Deviation (MHz)	-0.000060	Max.Deviation (MHz)		-0.000070
Max.Deviation (ppm)	-4.4248	Max.Deviation (ppm)		-5.1622
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS


## Appendix C. Test Results of Radiated Test Items


### C1. Test Result of Field Strength of Fundamental Emissions

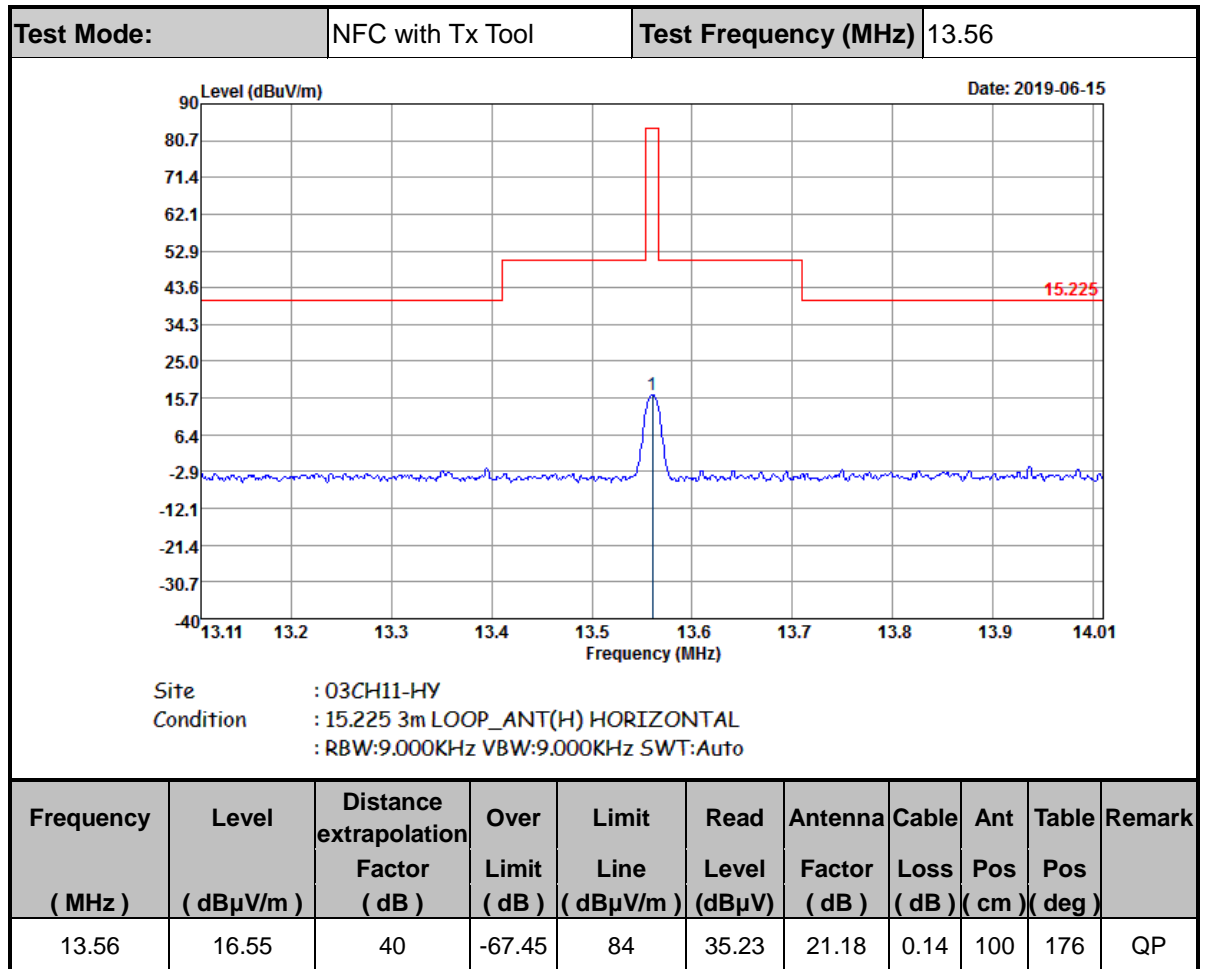


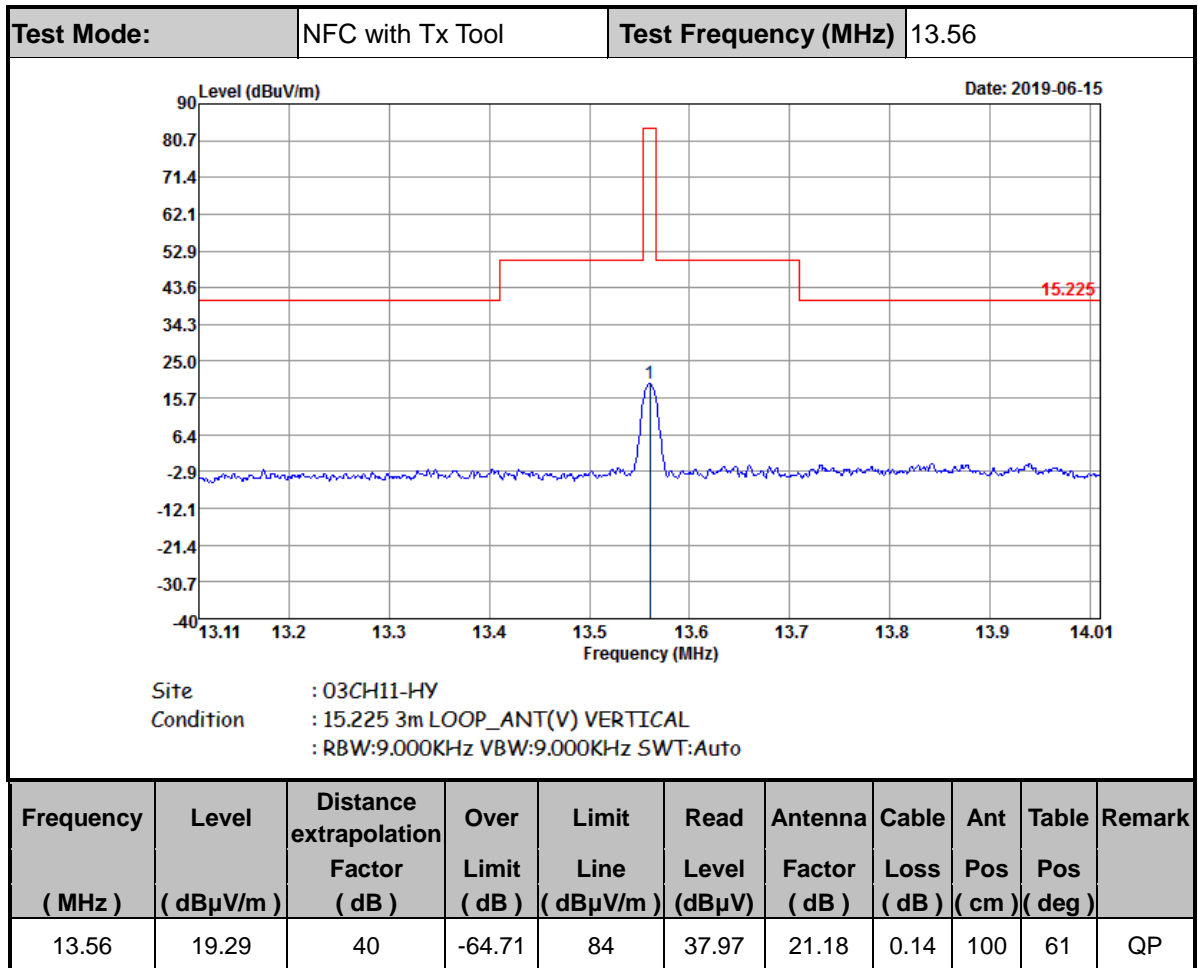

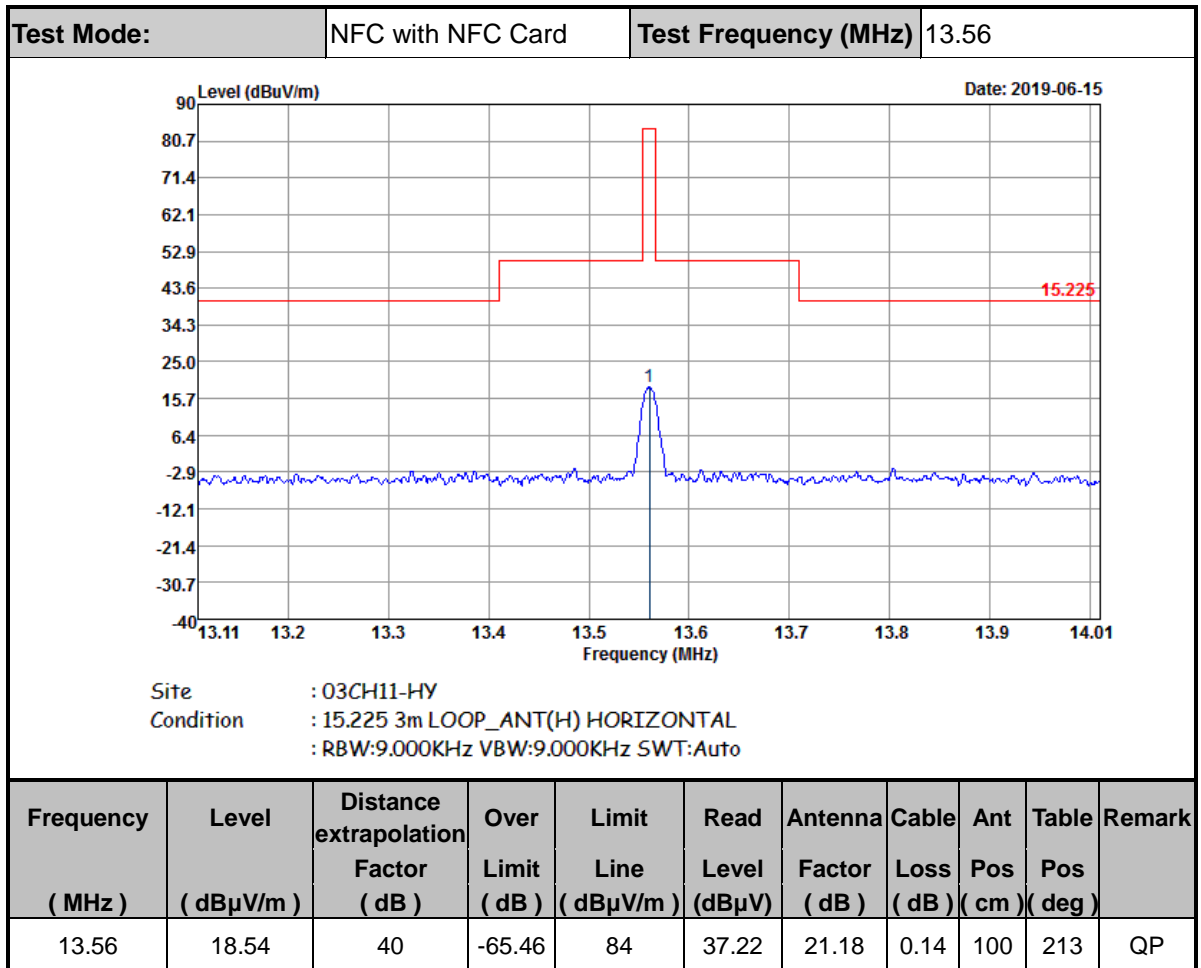

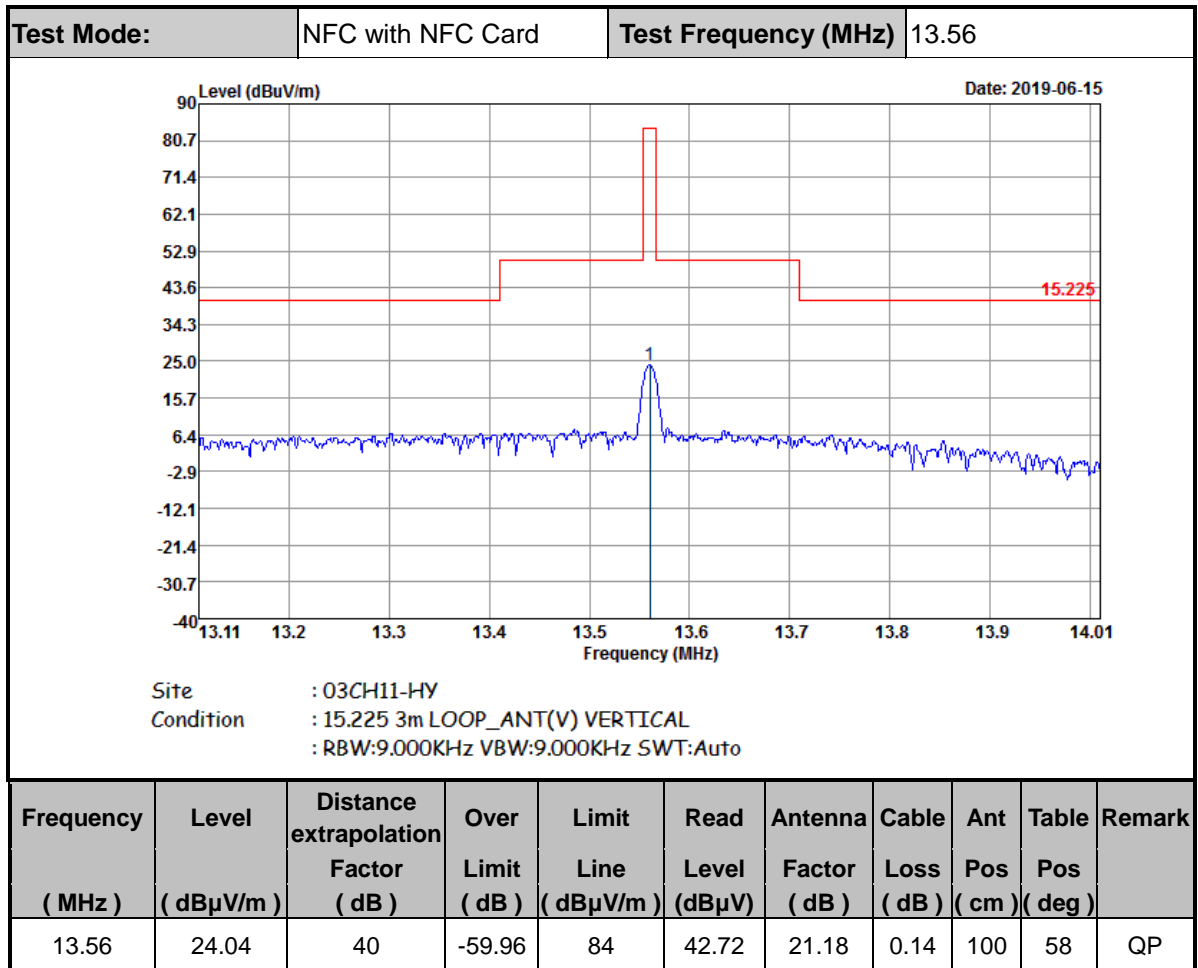


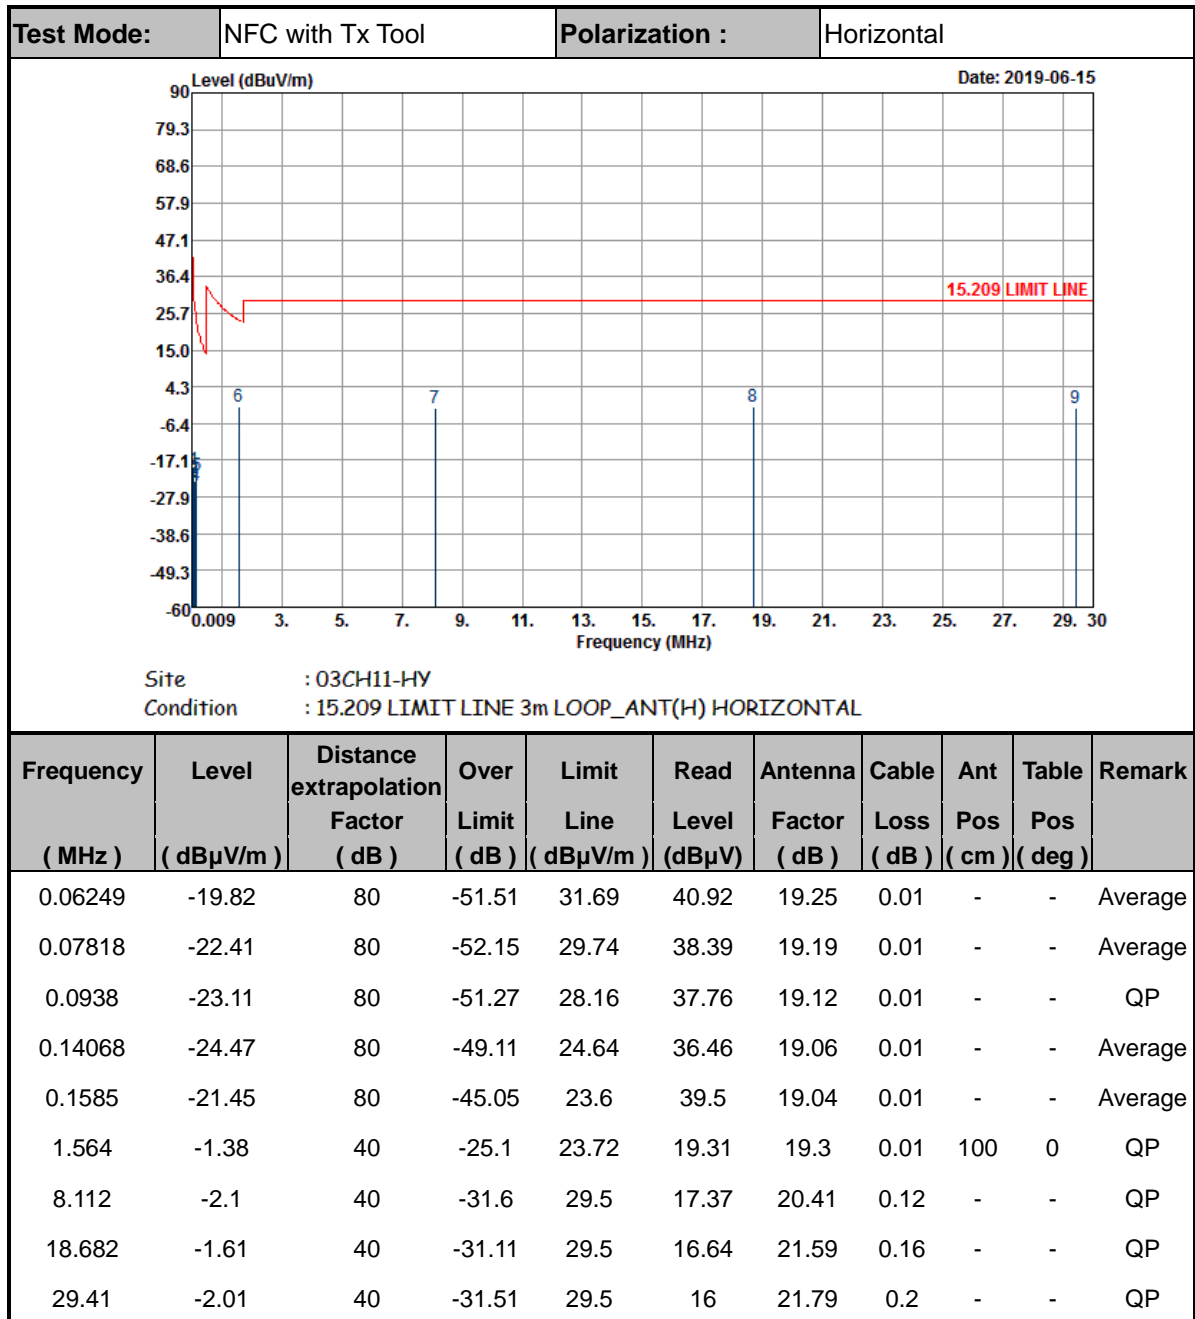
**C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)**

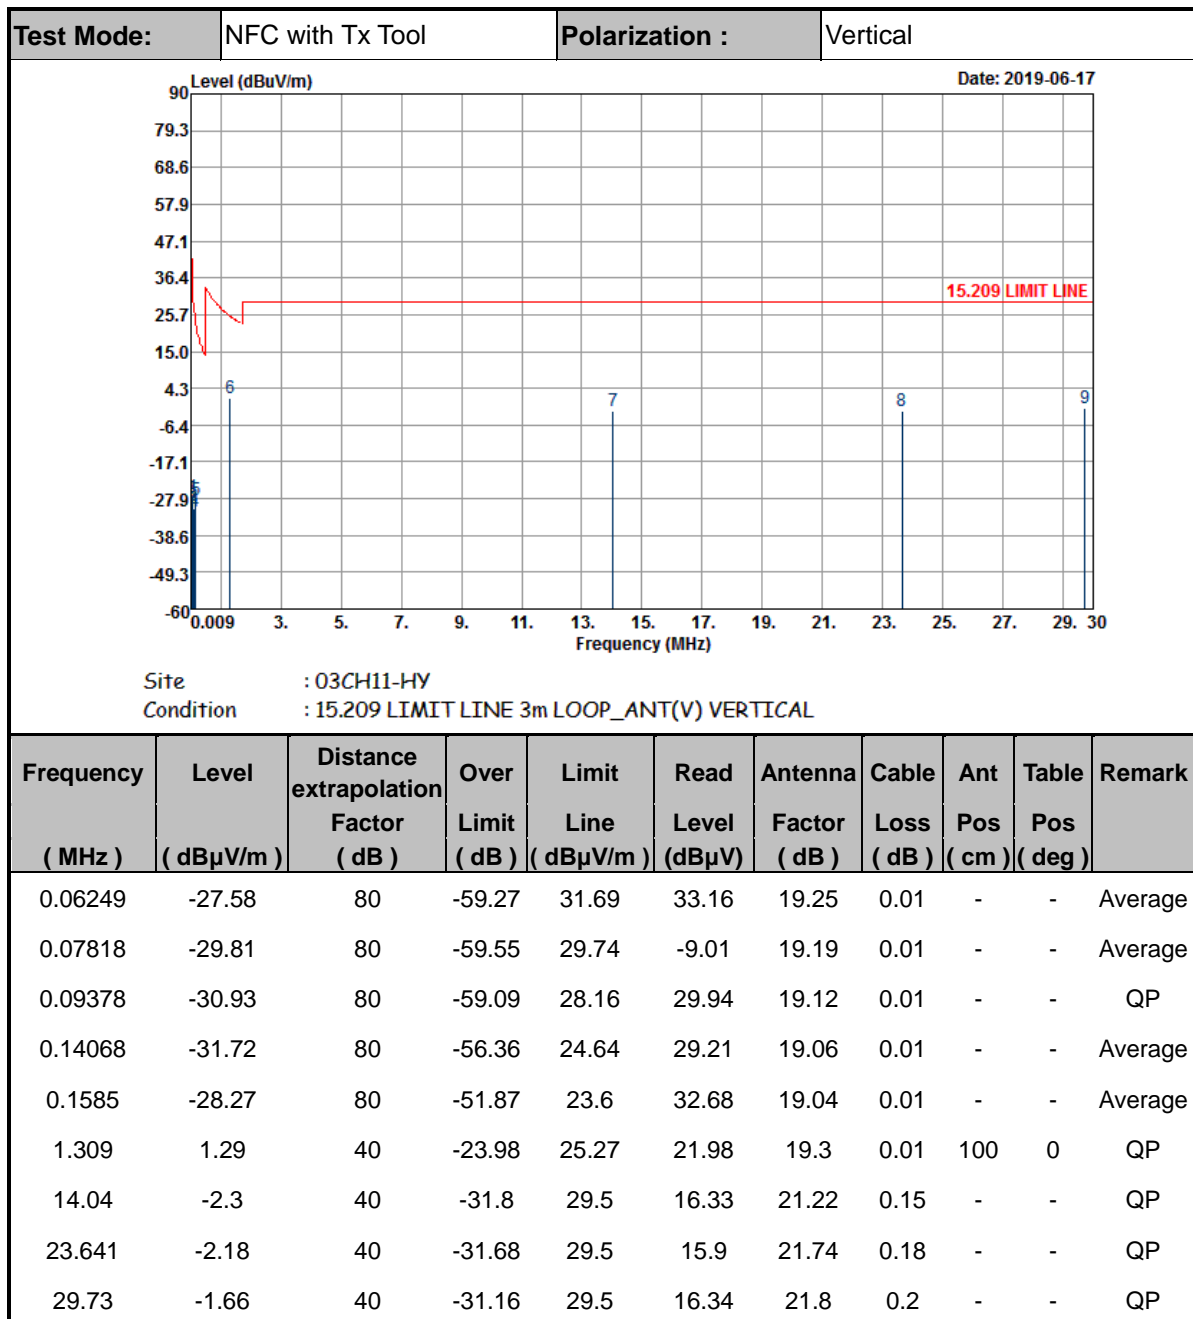

**Note:**


1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

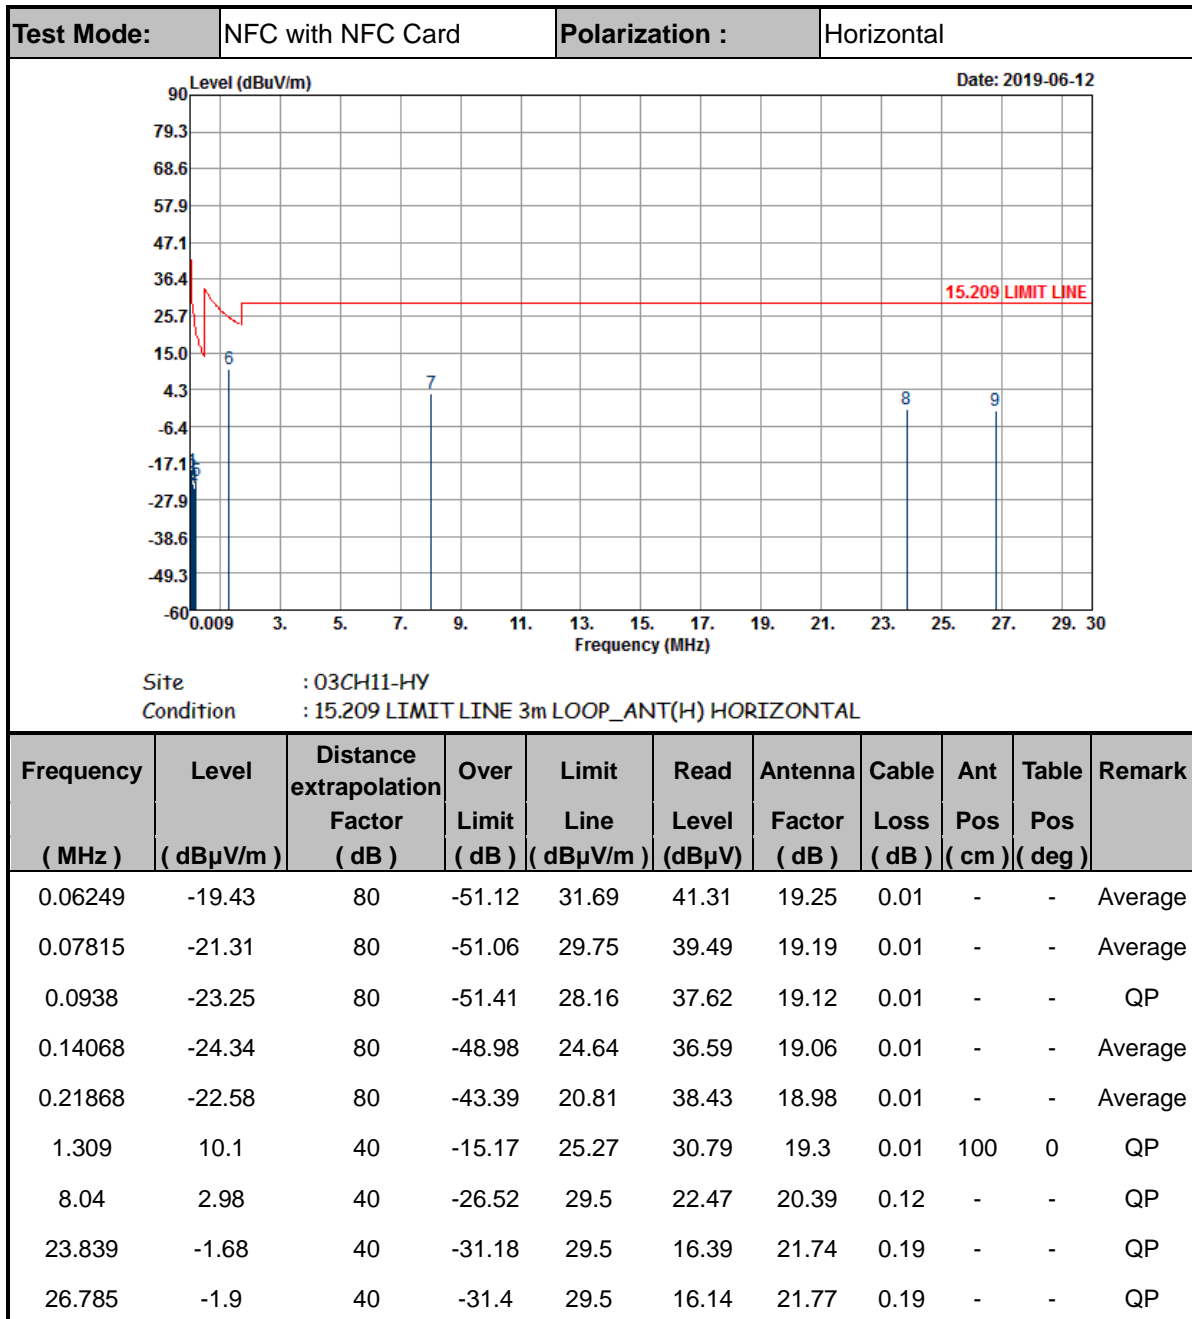


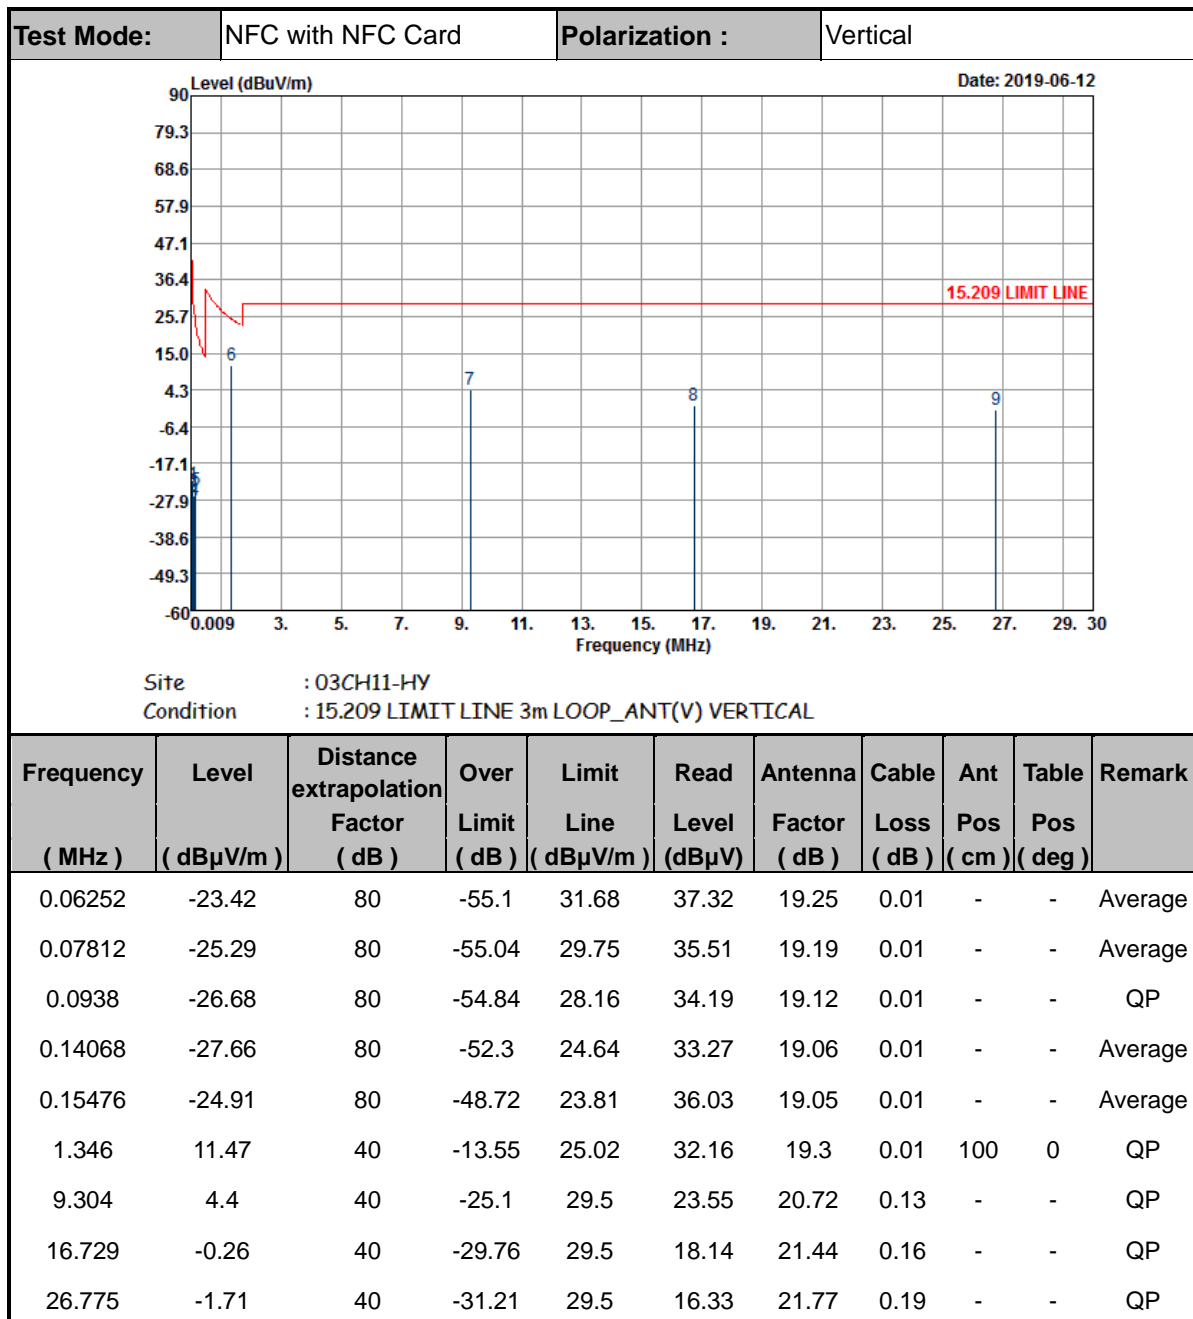



**Note:**


1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

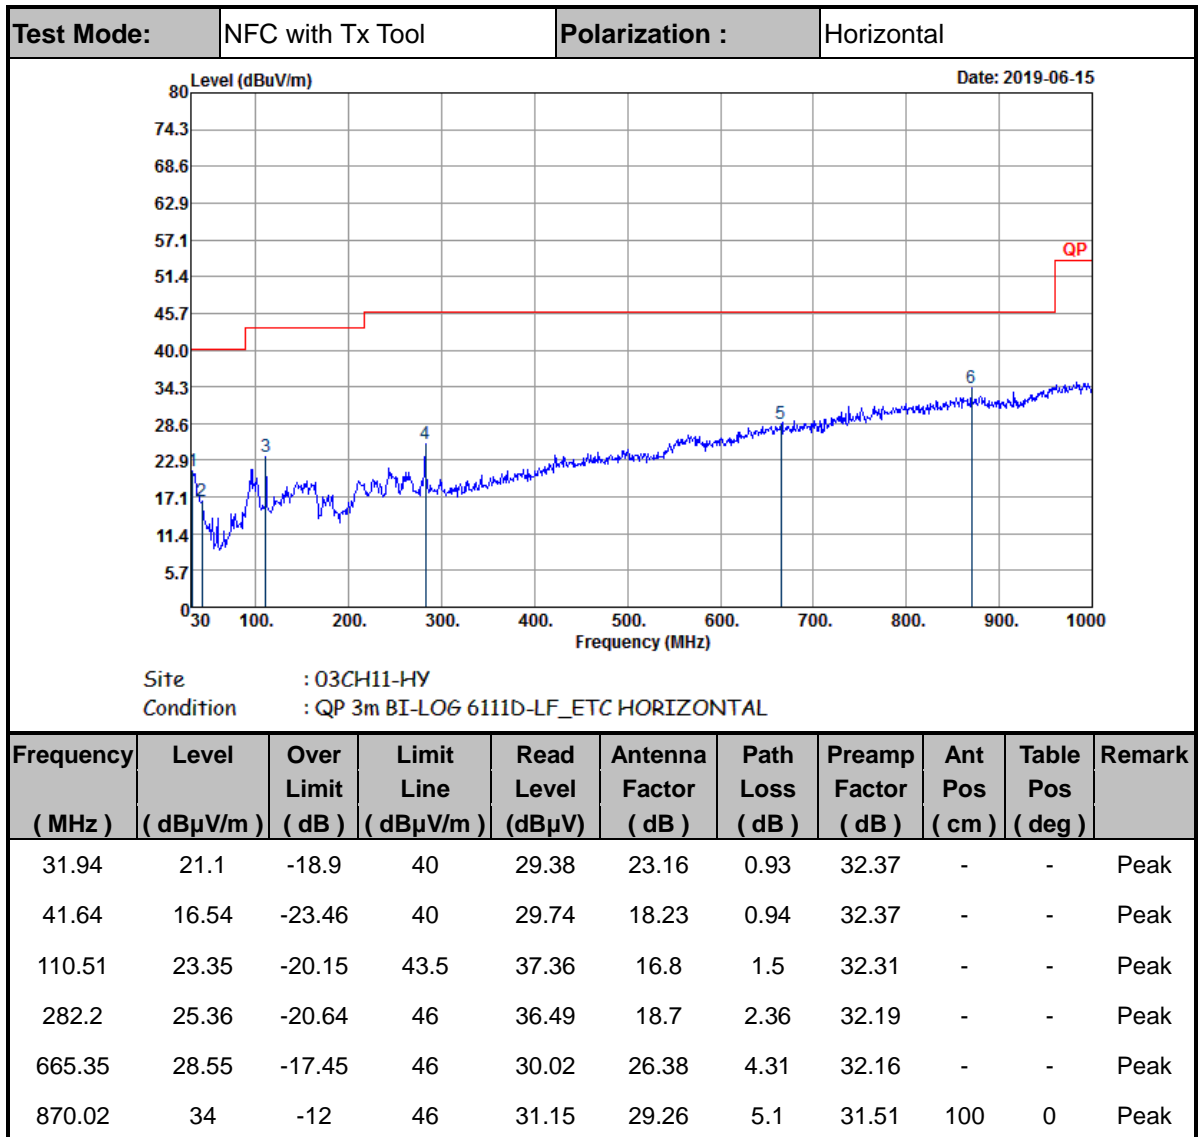**C3. Results of Radiated Spurious Emissions (30MHz~1GHz)**

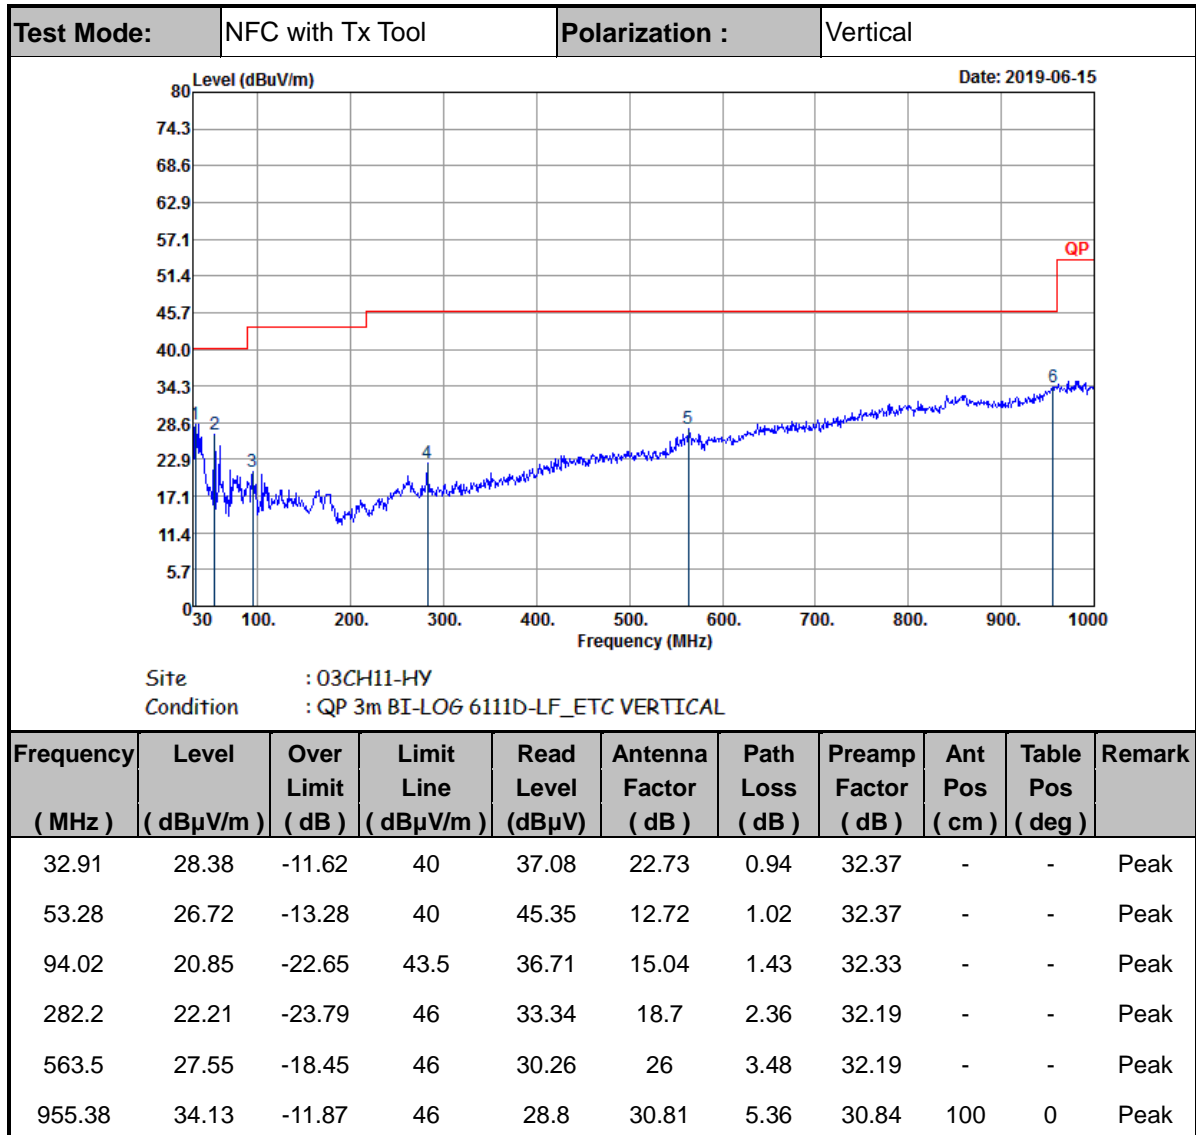

**Note:**

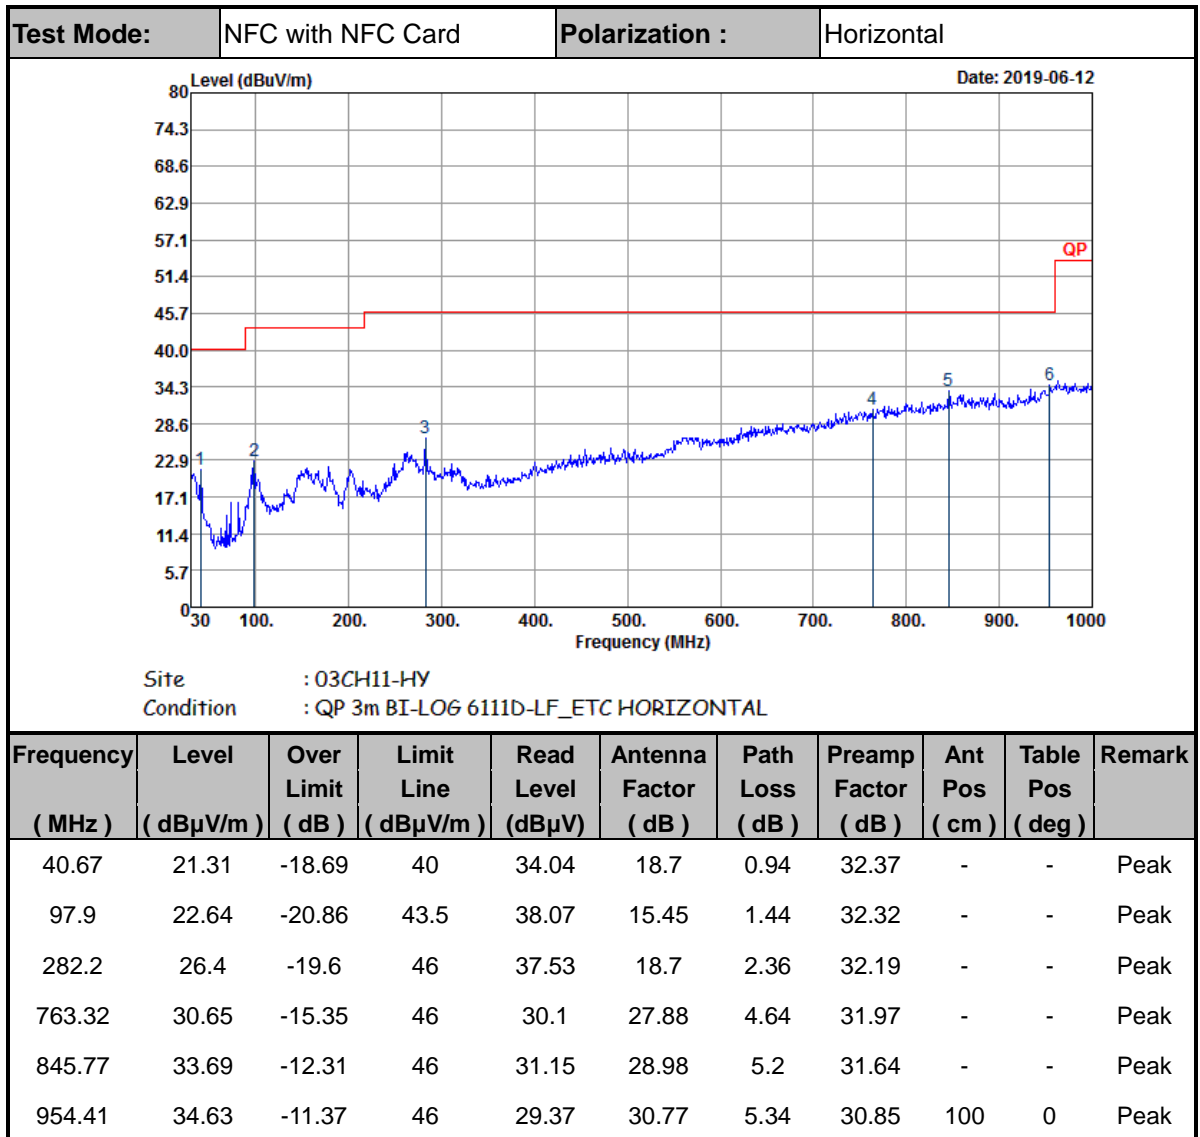1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.

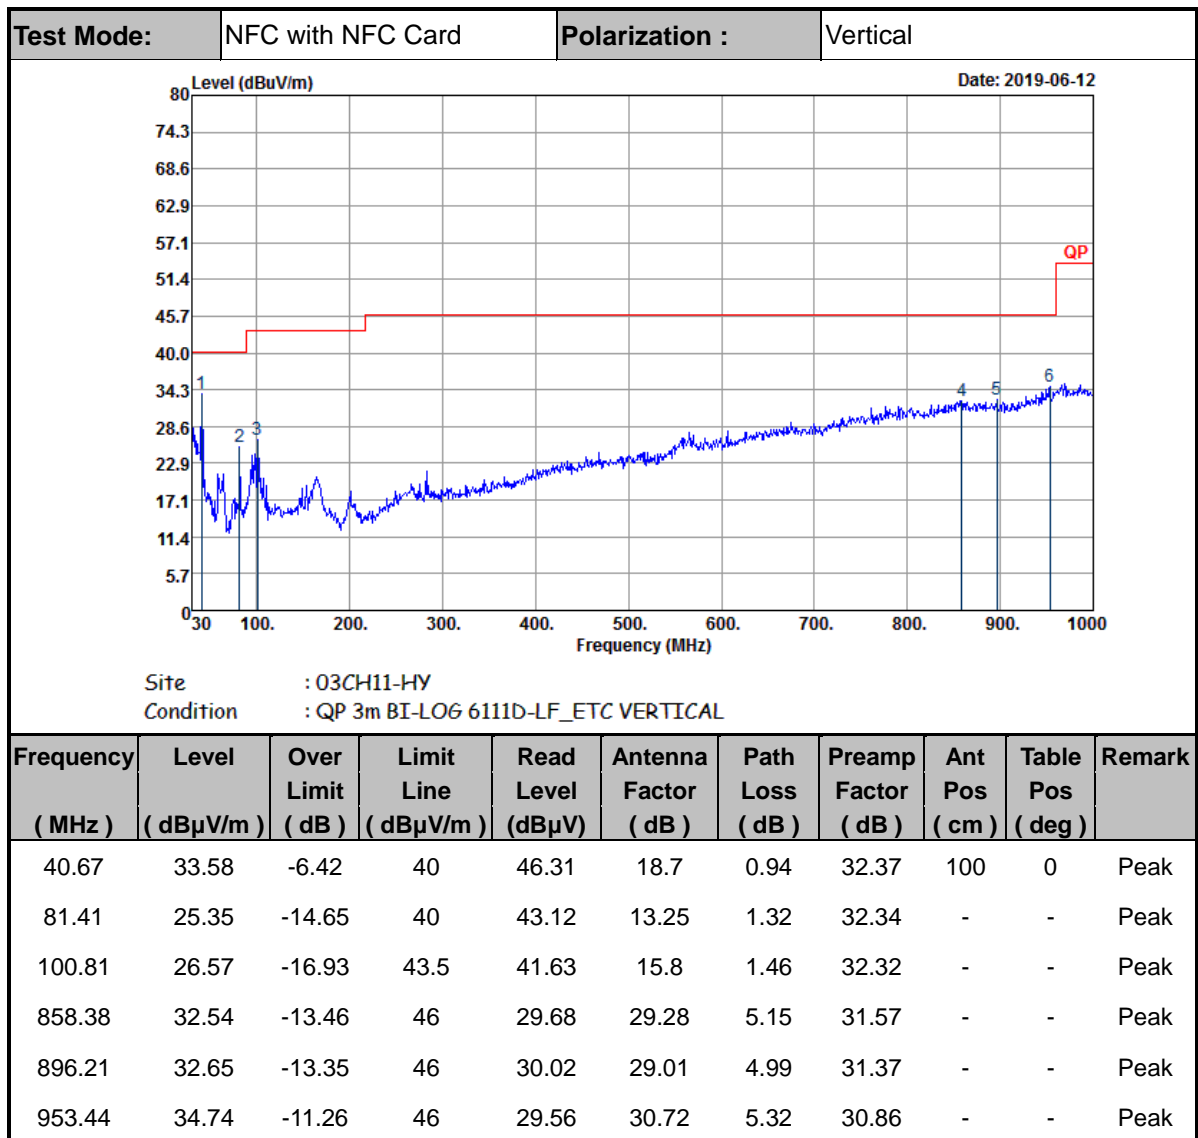


**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.

————THE END————