



# FCC RADIO TEST REPORT

**FCC ID** : PY7-45077R  
**Equipment** : GSM/WCDMA/LTE Phone with BT, DTS/UNII  
a/b/g/n/ac, GPS and NFC  
**Brand Name** : Sony  
**Applicant** : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo, 140-0002, Japan  
**Manufacturer** : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo, 140-0002, Japan  
**Standard** : FCC Part 15 Subpart E §15.407

The product was received on Nov. 13, 2019 and testing was started from Dec. 06, 2019 and completed on Jan. 13, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

**History of this test report ..... 3**

**Summary of Test Result ..... 4**

**1 General Description ..... 5**

    1.1 Product Feature of Equipment Under Test ..... 5

    1.2 Modification of EUT..... 5

    1.3 Testing Location..... 6

    1.4 Applicable Standards ..... 6

**2 Test Configuration of Equipment Under Test..... 7**

    2.1 Carrier Frequency and Channel..... 7

    2.2 Test Mode ..... 7

    2.3 Connection Diagram of Test System ..... 8

    2.4 Support Unit used in test configuration and system ..... 9

    2.5 EUT Operation Test Setup..... 10

    2.6 Measurement Results Explanation Example ..... 10

**3 Test Result ..... 11**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 11

    3.2 Maximum Conducted Output Power Measurement ..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Unwanted Emissions Measurement ..... 17

    3.5 AC Conducted Emission Measurement ..... 22

    3.6 Automatically Discontinue Transmission ..... 24

    3.7 Antenna Requirements ..... 26

**4 List of Measuring Equipment ..... 27**

**5 Uncertainty of Evaluation ..... 29**

**Appendix A. Conducted Test Results**

**Appendix B. AC Conducted Emission Test Result**

**Appendix C. Radiated Spurious Emission**

**Appendix D. Radiated Spurious Emission Plots**

**Appendix E. Duty Cycle Plots**





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 6.20 dB at 5634.750 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 19.02 dB at 0.628 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Ann Lee**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type / Gain	Inverted-F Type Antenna with gain -4.19 dBi

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	s_atp_INDUS-ETS--190911-0636_A	BH95003NJB	RF Conducted Measurement
	s_atp_INDUS-ETS--191113-0236_A	BH9500A4JL	Radiated Spurious Emission
	2.39	BH95000VJL	Conducted Emission

Accessory List	
AC Adapter	Model Name : UCH20
	S/N: 3515W45302494 (for Radiated Spurious Emission) N/A (for Conducted Emission)
Earphone	Model Name : STH40D
	S/N : N/A
Bluetooth Earphone	Model Name : SBH82D
	S/N : N/A
USB Cable	Model Name : UCB20
	S/N : N/A

**Note:**

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
3. For other wireless features of this EUT, test report will be issued separately.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.

### 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + WLAN (5GHz) Link + Bluetooth Link + MPEG4 + USB Cable (Charging from Adapter) + Earphone + Battery

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-


### 2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

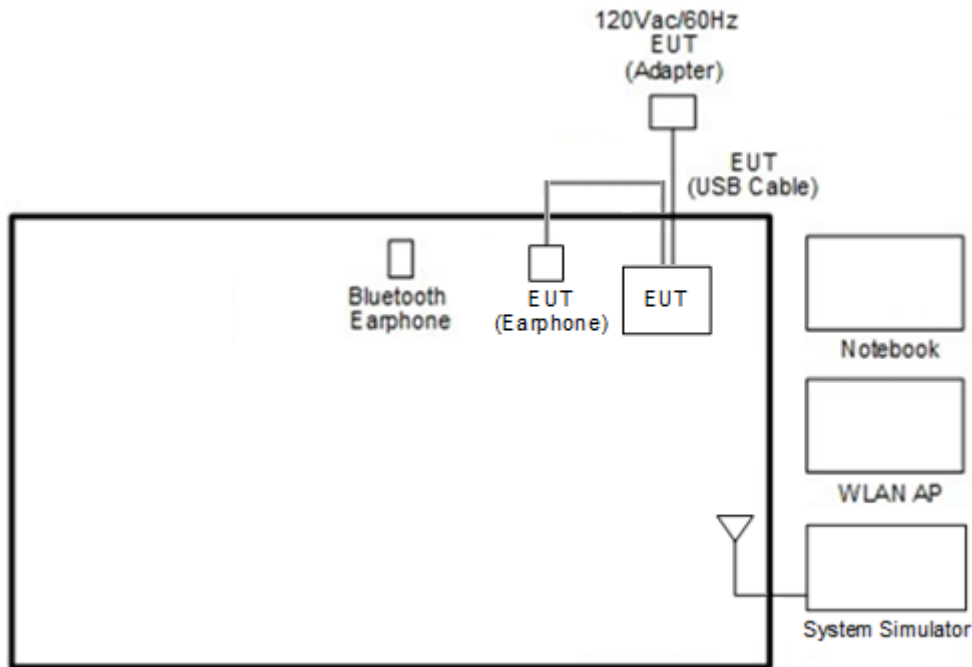



<WLAN Tx Mode>

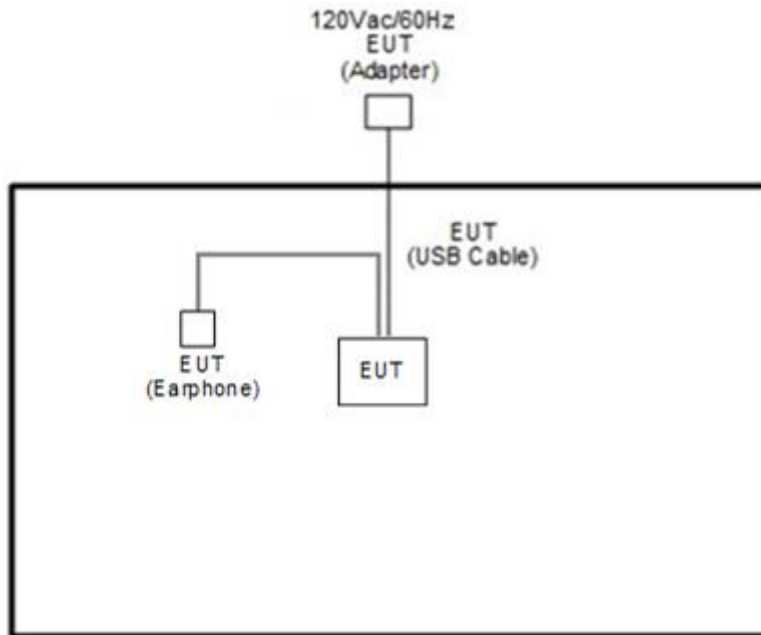

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



## 2.5 EUT Operation Test Setup

The RF test items, utility “adb” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup

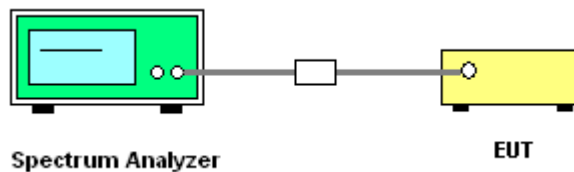

##### 3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

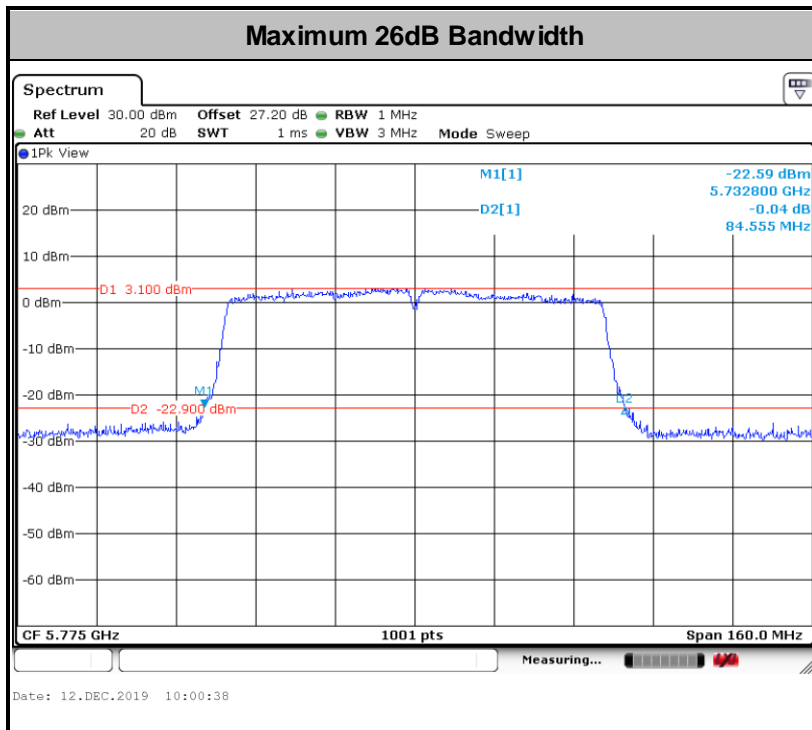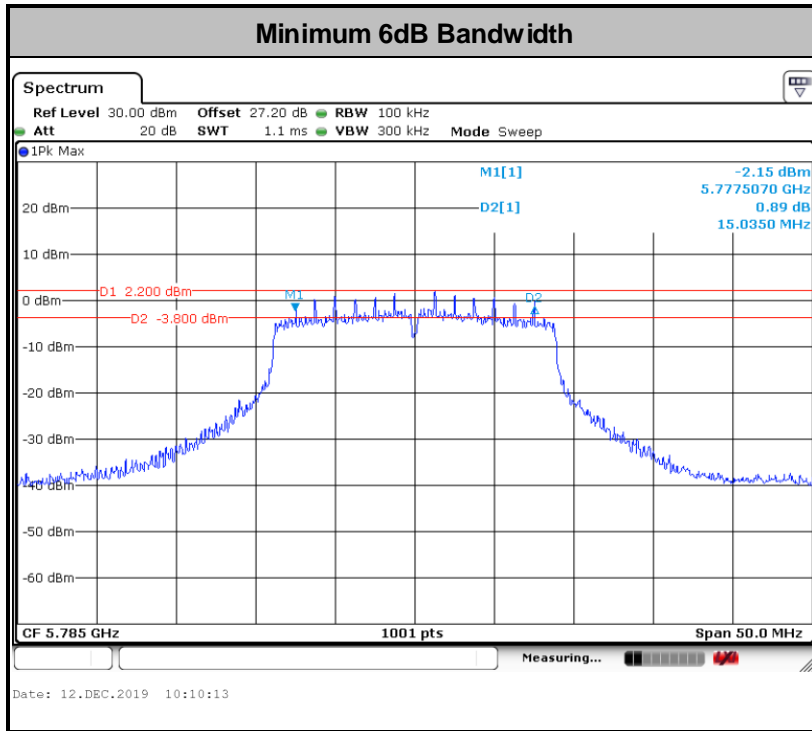

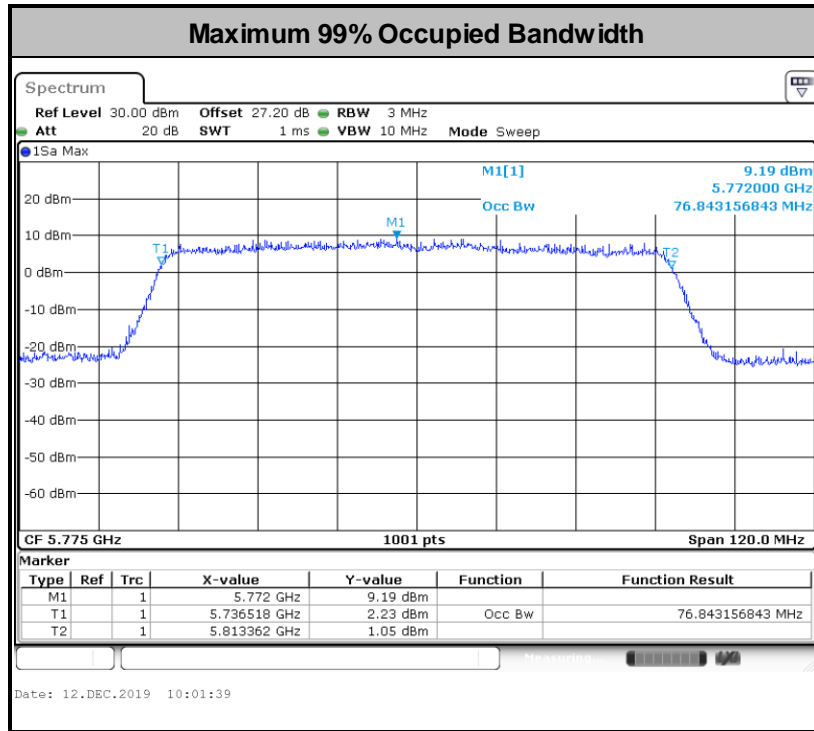

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.2.4 Test Setup

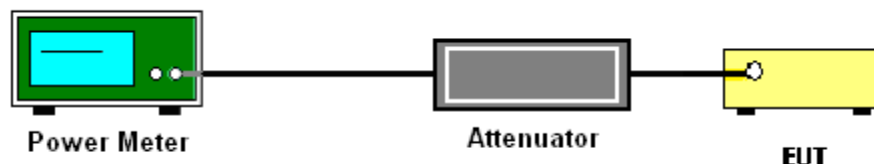

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

##### # Method SA-3 #

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time  $\leq$  (number of points in sweep)  $\times$  T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
  - Detector = power averaging (rms).
  - Trace mode = max hold.
  - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

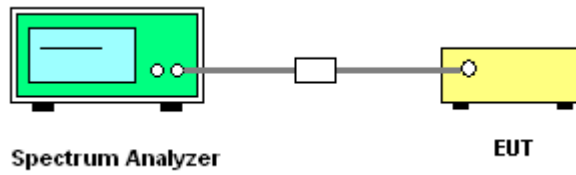

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

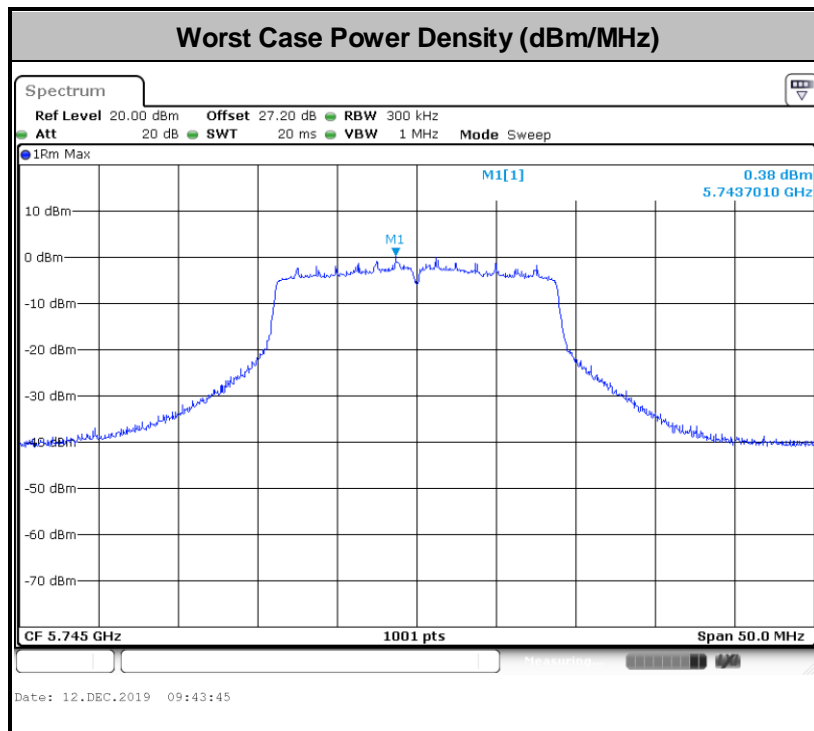





### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

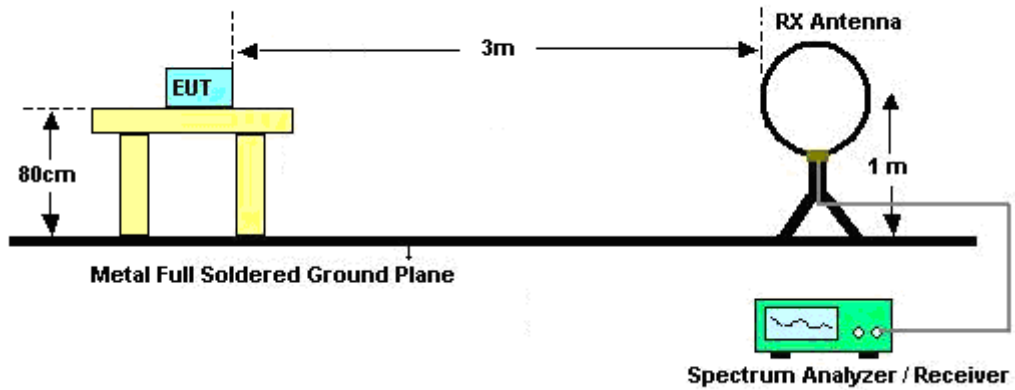

For radiated emissions from 30MHz to 1GHz

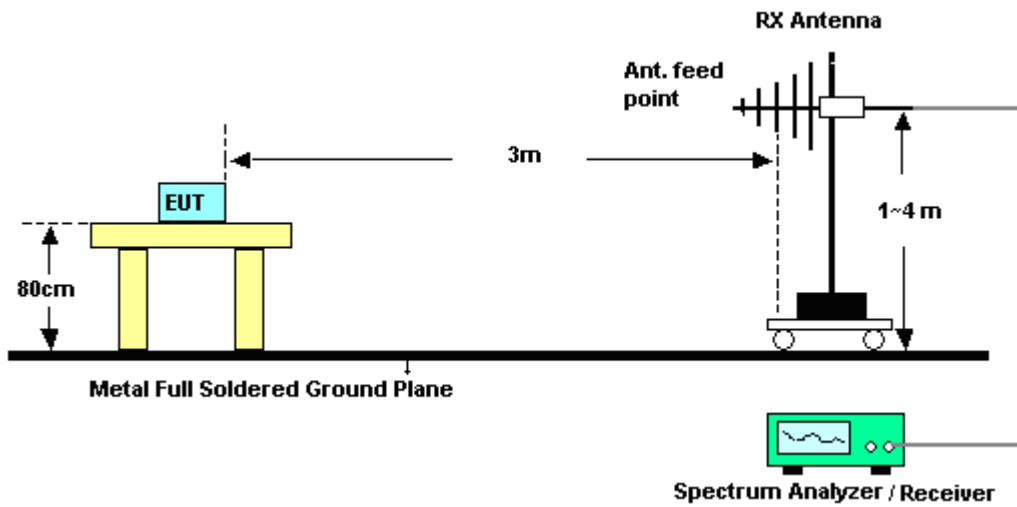

For radiated emissions above 1GHz

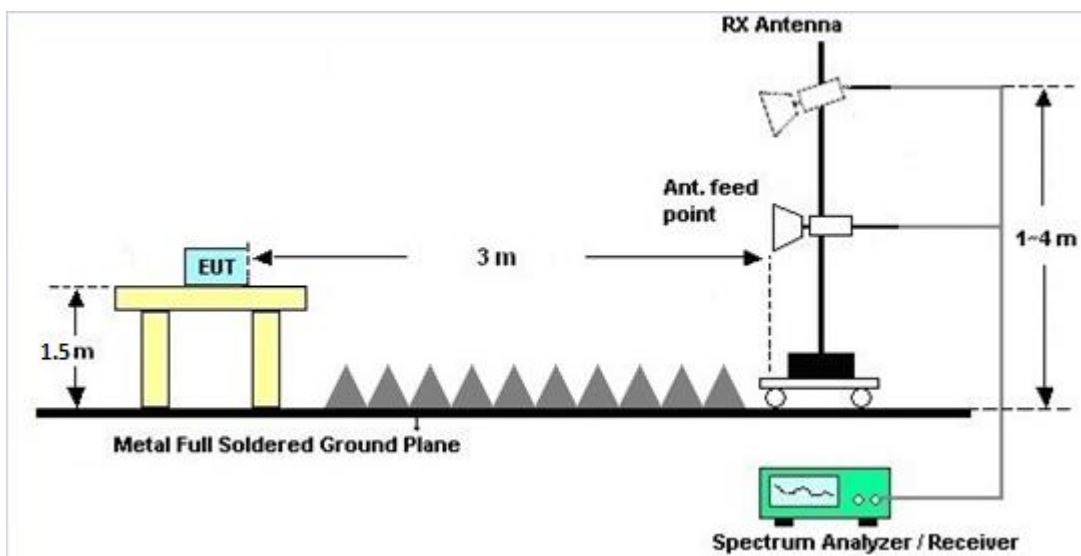



### **3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### **3.4.6 Test Result of Radiated Band Edges**

Please refer to Appendix C and D.

### **3.4.7 Duty Cycle**

Please refer to Appendix E.

### **3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)**

Please refer to Appendix C and D.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

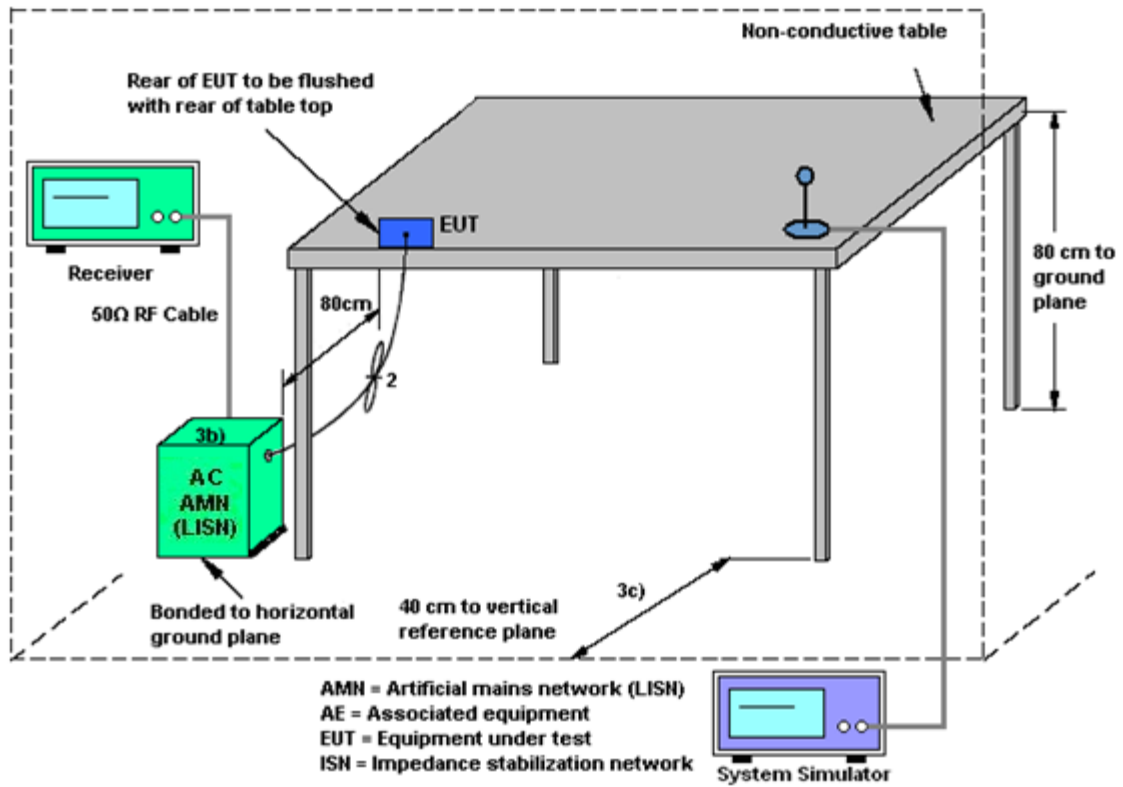

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

See list of measuring equipment of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

EUT is verified this characteristic during the function check of normal sample associated with an access point:


- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



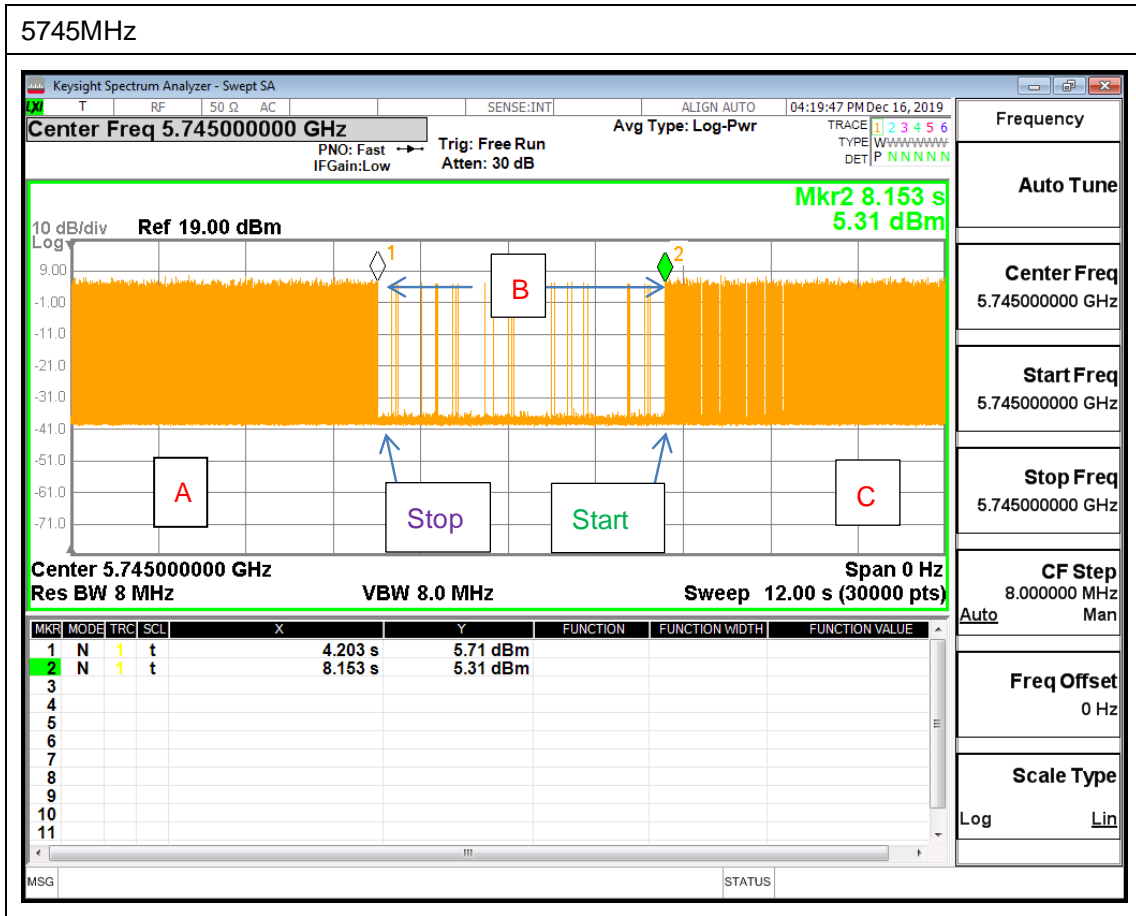

Note : The control / signalling information during the period B is precluded.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	EMCE	EMC184045B	980192	18GHz ~ 40GHz	Aug. 01, 2019	Jan. 07, 2020~ Jan. 13, 2020	Jul. 31, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Jan. 07, 2020~ Jan. 13, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	Jan. 07, 2020~ Jan. 13, 2020	Oct. 11, 2020	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Nov. 04, 2019	Jan. 07, 2020~ Jan. 13, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Jan. 07, 2020~ Jan. 13, 2020	Dec. 25, 2020	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 13, 2019	Jan. 07, 2020~ Jan. 13, 2020	Nov. 12, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 28, 2019	Jan. 07, 2020~ Jan. 13, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 07, 2020~ Jan. 13, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jan. 07, 2020~ Jan. 13, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 07, 2020~ Jan. 13, 2020	N/A	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JAP00101800 -30-10P	160118550 004	1GHz~18GHz	Sep. 27, 2019	Jan. 07, 2020~ Jan. 13, 2020	Sep. 26, 2020	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA00101800 -30-10P	160118000 2	1GHz~18GHz	Aug. 01, 2019	Jan. 07, 2020~ Jan. 13, 2020	Jul. 31, 2020	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz- 40GHz	May 14, 2019	Jan. 07, 2020~ Jan. 13, 2020	May 13, 2020	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE )	MY554201 70	20MHz~8.4GHz	Mar. 08, 2019	Jan. 07, 2020~ Jan. 13, 2020	Mar. 07, 2020	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00105 3	N/A	N/A	Jan. 07, 2020~ Jan. 13, 2020	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 13, 2019	Jan. 07, 2020~ Jan. 13, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Jan. 07, 2020~ Jan. 13, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 13, 2019	Jan. 07, 2020~ Jan. 13, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Jan. 07, 2020~ Jan. 13, 2020	Mar. 12, 2020	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLK4-1000-1530-8000-40S S	SN11	1.53G Low Pass	Sep. 15, 2019	Jan. 07, 2020~Jan. 13, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40SS	SN3	6.75GHz High Pass	Sep. 16, 2019	Jan. 07, 2020~Jan. 13, 2020	Sep. 15, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	Jan. 07, 2020~Jan. 13, 2020	Nov. 06, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP161237	N/A	Oct. 25, 2019	Jan. 07, 2020~Jan. 13, 2020	Oct. 24, 2020	Radiation (03CH11-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 31, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Dec. 31, 2019	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Dec. 31, 2019	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 20, 2019	Dec. 31, 2019	Nov. 19, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 31, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2019	Dec. 31, 2019	Jan. 02, 2020	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2019	Dec. 31, 2019	Jan. 02, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Dec. 06, 2019~Dec. 12, 2019	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 19, 2018	Dec. 06, 2019~Dec. 12, 2019	Dec. 18, 2019	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Oct. 03, 2019	Dec. 06, 2019~Dec. 12, 2019	Oct. 02, 2020	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Oct. 03, 2019	Dec. 06, 2019~Dec. 12, 2019	Oct. 02, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Dec. 06, 2019~Dec. 12, 2019	Jul. 14, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Dec. 06, 2019~Dec. 12, 2019	Mar. 26, 2020	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.00
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.12
---	------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2019/12/6~2019/12/12	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	16.83	-	24.98	-	15.44	-	0.5	Pass
11a	6Mbps	1	157	5785	16.88	-	25.28	-	15.63	-	0.5	Pass
11a	6Mbps	1	165	5825	16.83	-	24.98	-	15.73	-	0.5	Pass
HT20	MCS0	1	149	5745	17.98	-	26.62	-	15.63	-	0.5	Pass
HT20	MCS0	1	157	5785	17.98	-	26.47	-	15.04	-	0.5	Pass
HT20	MCS0	1	165	5825	17.93	-	26.22	-	15.68	-	0.5	Pass
HT40	MCS0	1	151	5755	36.66	-	42.26	-	35.43	-	0.5	Pass
HT40	MCS0	1	159	5795	36.66	-	42.35	-	36.32	-	0.5	Pass
VHT80	MCS0	1	155	5775	76.84	-	84.56	-	75.13	-	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	12.60		-	30.00	-	-4.19	-	Pass
11a	6Mbps	1	157	5785	12.50			30.00	-	-4.19	-	Pass
11a	6Mbps	1	165	5825	12.50			30.00	-	-4.19	-	Pass
HT20	MCS0	1	149	5745	12.70			30.00	-	-4.19	-	Pass
HT20	MCS0	1	157	5785	12.40			30.00	-	-4.19	-	Pass
HT20	MCS0	1	165	5825	12.40			30.00	-	-4.19	-	Pass
HT40	MCS0	1	151	5755	12.30			30.00	-	-4.19	-	Pass
HT40	MCS0	1	159	5795	12.70			30.00	-	-4.19	-	Pass
VHT20	MCS0	1	149	5745	12.60			30.00	-	-4.19	-	Pass
VHT20	MCS0	1	157	5785	12.30			30.00	-	-4.19	-	Pass
VHT20	MCS0	1	165	5825	12.30			30.00	-	-4.19	-	Pass
VHT40	MCS0	1	151	5755	12.20			30.00	-	-4.19	-	Pass
VHT40	MCS0	1	159	5795	12.60			30.00	-	-4.19	-	Pass
VHT80	MCS0	1	155	5775	12.30			30.00	-	-4.19	-	Pass



**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	-	1.99	-	-	30.00	-	-4.19	-	Pass
11a	6Mbps	1	157	5785	2.22	-	2.02	-	-	30.00	-	-4.19	-	Pass
11a	6Mbps	1	165	5825	2.22	-	1.61	-	-	30.00	-	-4.19	-	Pass
HT20	MCS0	1	149	5745	2.22	-	2.60	-	-	30.00	-	-4.19	-	Pass
HT20	MCS0	1	157	5785	2.22	-	2.20	-	-	30.00	-	-4.19	-	Pass
HT20	MCS0	1	165	5825	2.22	-	2.23	-	-	30.00	-	-4.19	-	Pass
HT40	MCS0	1	151	5755	2.22	-	-2.56	-	-	30.00	-	-4.19	-	Pass
HT40	MCS0	1	159	5795	2.22	-	-1.54	-	-	30.00	-	-4.19	-	Pass
VHT80	MCS0	1	155	5775	2.22	-	-3.78	-	-	30.00	-	-4.19	-	Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	22~25°C
		Relative Humidity :	45~52%

# EUT Information

Report NO : 9O1524-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

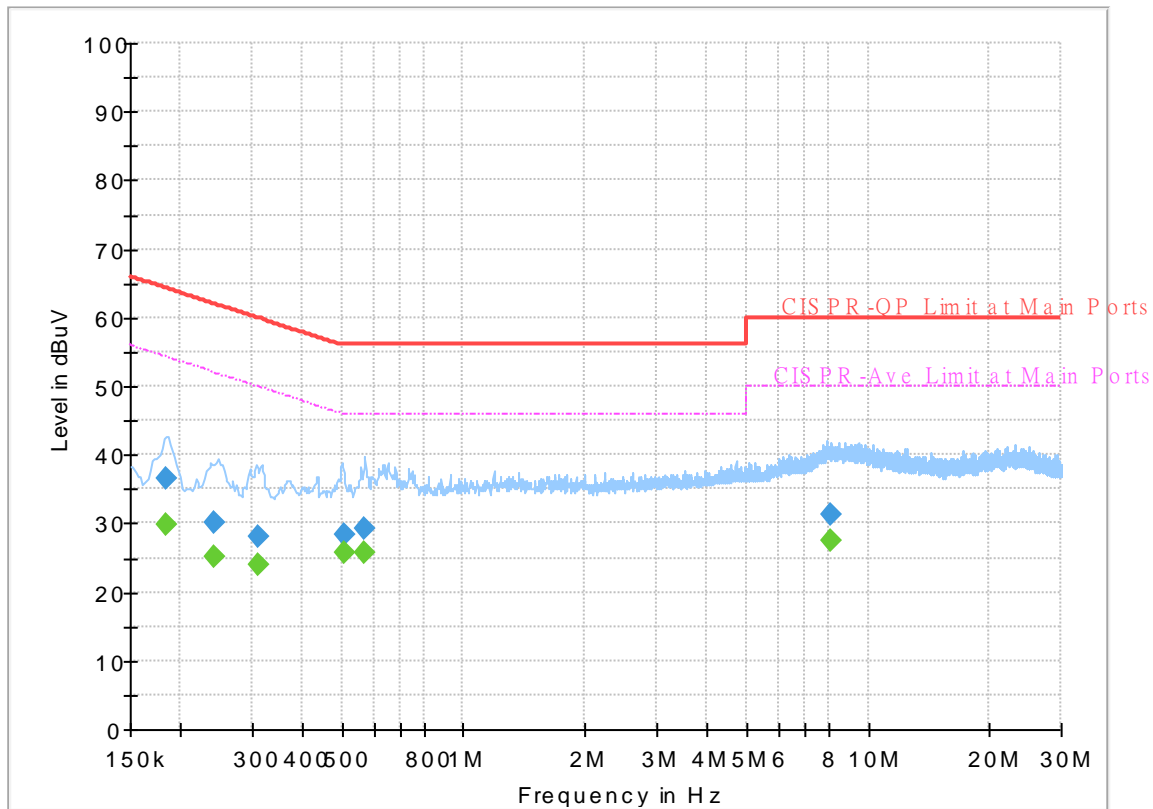


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.184290	---	29.77	54.29	24.52	L1	OFF	19.5
0.184290	36.67	---	64.29	27.62	L1	OFF	19.5
0.243420	---	25.23	51.98	26.75	L1	OFF	19.5
0.243420	30.23	---	61.98	31.75	L1	OFF	19.5
0.312000	---	23.90	49.92	26.02	L1	OFF	19.5
0.312000	28.12	---	59.92	31.80	L1	OFF	19.5
0.505500	---	25.76	46.00	20.24	L1	OFF	19.5
0.505500	28.41	---	56.00	27.59	L1	OFF	19.5
0.566340	---	25.67	46.00	20.33	L1	OFF	19.5
0.566340	29.16	---	56.00	26.84	L1	OFF	19.5
8.128410	---	27.52	50.00	22.48	L1	OFF	19.8
8.128410	31.32	---	60.00	28.68	L1	OFF	19.8

## EUT Information

Report NO : 901524-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

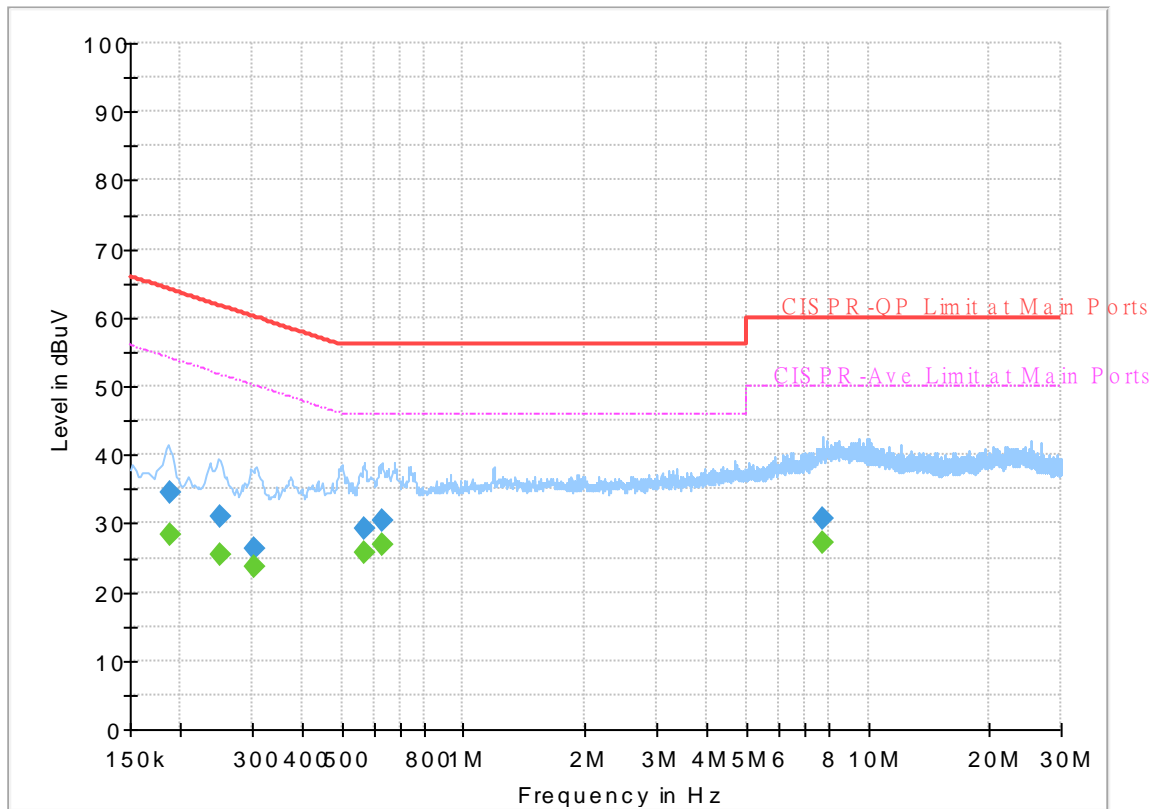

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.188070	---	28.40	54.12	25.72	N	OFF	19.5
0.188070	34.39	---	64.12	29.73	N	OFF	19.5
0.249450	---	25.55	51.78	26.23	N	OFF	19.5
0.249450	31.07	---	61.78	30.71	N	OFF	19.5
0.303000	---	23.69	50.16	26.47	N	OFF	19.5
0.303000	26.28	---	60.16	33.88	N	OFF	19.5
0.566430	---	25.77	46.00	20.23	N	OFF	19.6
0.566430	29.12	---	56.00	26.88	N	OFF	19.6
0.627540	---	26.98	46.00	19.02	N	OFF	19.6
0.627540	30.41	---	56.00	25.59	N	OFF	19.6
7.748250	---	27.31	50.00	22.69	N	OFF	19.9
7.748250	30.78	---	60.00	29.22	N	OFF	19.9



### Appendix C. Radiated Spurious Emission

Test Engineer :	Cookie Ku, Fu Chen, and Troye Hsieh	Temperature :	20.2~26.4°C
		Relative Humidity :	43.1~69.3%

**Band 4 - 5725~5850MHz**

**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11a CH 149 5745MHz		5640.8	50.37	-17.83	68.2	40.62	31.82	10.48	32.55	249	349	P	H	
		5694.6	52.48	-48.74	101.22	42.44	32.07	10.51	32.54	249	349	P	H	
		5709.2	55.4	-52.38	107.78	45.29	32.12	10.52	32.53	249	349	P	H	
		5724.6	54.58	-66.71	121.29	44.43	32.15	10.53	32.53	249	349	P	H	
	*	5745	103.45	-	-	93.24	32.19	10.54	32.52	249	349	P	H	
	*	5745	95.57	-	-	85.36	32.19	10.54	32.52	249	349	A	H	
														H
														H
			5629.4	51.14	-17.06	68.2	41.37	31.84	10.48	32.55	200	19	P	V
			5697.4	49.32	-53.96	103.28	39.26	32.08	10.51	32.53	200	19	P	V
			5702.6	49.87	-56.06	105.93	39.77	32.11	10.52	32.53	200	19	P	V
			5724.8	49.29	-72.45	121.74	39.14	32.15	10.53	32.53	200	19	P	V
	*		5745	97.88	-	-	87.67	32.19	10.54	32.52	200	19	P	V
	*		5745	90.04	-	-	79.83	32.19	10.54	32.52	200	19	A	V
													V	
													V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5640.75	49.59	-18.61	68.2	39.84	31.82	10.48	32.55	240	350	P	H
		5661	50.08	-26.29	76.37	40.26	31.87	10.49	32.54	240	350	P	H
		5702.25	51.19	-54.64	105.83	41.1	32.1	10.52	32.53	240	350	P	H
		5721.25	48.81	-64.84	113.65	38.67	32.14	10.53	32.53	240	350	P	H
	*	5785	104.77	-	-	94.45	32.27	10.56	32.51	240	350	P	H
	*	5785	97.06	-	-	86.74	32.27	10.56	32.51	240	350	A	H
		5851.25	50.98	-68.37	119.35	40.48	32.4	10.59	32.49	240	350	P	H
		5872	49.53	-56.51	106.04	38.98	32.44	10.6	32.49	240	350	P	H
		5905.25	59.59	-23.19	82.78	48.94	32.52	10.61	32.48	240	350	P	H
		5944.75	50.88	-17.32	68.2	40.04	32.68	10.63	32.47	240	350	P	H
													H
													H
<b>802.11a</b>													
<b>CH 157</b>													
<b>5785MHz</b>		5611	50.11	-18.09	68.2	40.32	31.88	10.47	32.56	199	18	P	V
		5698	49.42	-54.31	103.73	39.35	32.09	10.51	32.53	199	18	P	V
		5713	51.02	-57.82	108.84	40.9	32.13	10.52	32.53	199	18	P	V
		5723.25	49.64	-68.57	118.21	39.49	32.15	10.53	32.53	199	18	P	V
	*	5785	99.71	-	-	89.39	32.27	10.56	32.51	199	18	P	V
	*	5785	92.11	-	-	81.79	32.27	10.56	32.51	199	18	A	V
		5851.25	48.77	-70.58	119.35	38.27	32.4	10.59	32.49	199	18	P	V
		5869.75	49.23	-57.44	106.67	38.68	32.44	10.6	32.49	199	18	P	V
		5888	50.33	-45.22	95.55	39.72	32.48	10.61	32.48	199	18	P	V
		5944	50.96	-17.24	68.2	40.12	32.68	10.63	32.47	199	18	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 165 5825MHz	*	5825	104.98	-	-	94.55	32.35	10.58	32.5	231	345	P	H	
	*	5825	96.96	-	-	86.53	32.35	10.58	32.5	231	345	A	H	
		5853.2	51.18	-63.72	114.9	40.67	32.41	10.59	32.49	231	345	P	H	
		5869.4	51.25	-55.52	106.77	40.7	32.44	10.6	32.49	231	345	P	H	
		5906	52.33	-29.89	82.22	41.68	32.52	10.61	32.48	231	345	P	H	
		5948	50.71	-17.49	68.2	39.85	32.69	10.63	32.46	231	345	P	H	
														H
														H
	*	5825	100.62	-	-	90.19	32.35	10.58	32.5	192	18	P	V	
	*	5825	92.77	-	-	82.34	32.35	10.58	32.5	192	18	A	V	
		5854	50.45	-62.63	113.08	39.94	32.41	10.59	32.49	192	18	P	V	
		5874.4	50.37	-55	105.37	39.81	32.45	10.6	32.49	192	18	P	V	
		5885	51.04	-46.73	97.77	40.45	32.47	10.6	32.48	192	18	P	V	
		5939.6	50.62	-17.58	68.2	39.8	32.66	10.63	32.47	192	18	P	V	
														V
														V
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz  
WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 149 5745MHz		11490	46.83	-27.17	74	53.24	39.61	17.48	63.5	100	0	P	H	
		17235	47.45	-20.75	68.2	46.89	40.17	22.06	61.67	100	0	P	H	
													H	
													H	
			11490	46.08	-27.92	74	52.49	39.61	17.48	63.5	100	0	P	V
			17235	46.43	-21.77	68.2	45.87	40.17	22.06	61.67	100	0	P	V
														V
802.11a CH 157 5785MHz		11570	46.31	-27.69	74	52.75	39.46	17.6	63.5	100	0	P	H	
		17355	46.68	-21.52	68.2	45.51	40.49	22.18	61.5	100	0	P	H	
													H	
													H	
			11570	46.51	-27.49	74	52.95	39.46	17.6	63.5	100	0	P	V
			17355	46.86	-21.34	68.2	45.69	40.49	22.18	61.5	100	0	P	V
														V
802.11a CH 165 5825MHz		11650	45.38	-28.62	74	52.01	39.15	17.72	63.5	100	0	P	H	
		17475	48.3	-19.9	68.2	46.18	41.17	22.28	61.33	100	0	P	H	
													H	
													H	
			11650	46.71	-27.29	74	53.34	39.15	17.72	63.5	100	0	P	V
			17475	48.33	-19.87	68.2	46.21	41.17	22.28	61.33	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 149 5745MHz		5615.6	49.24	-18.96	68.2	39.46	31.87	10.47	32.56	249	360	P	H	
		5682	51.26	-40.66	91.92	41.3	31.99	10.51	32.54	249	360	P	H	
		5718.8	50.55	-59.91	110.46	40.41	32.14	10.53	32.53	249	360	P	H	
		5724.8	57.36	-64.38	121.74	47.21	32.15	10.53	32.53	249	360	P	H	
	*	5745	100.95	-	-	90.74	32.19	10.54	32.52	249	360	P	H	
	*	5745	93.26	-	-	83.05	32.19	10.54	32.52	249	360	A	H	
														H
														H
			5624	50.04	-18.16	68.2	40.28	31.85	10.47	32.56	200	17	P	V
			5685.4	51.33	-43.1	94.43	41.35	32.01	10.51	32.54	200	17	P	V
			5714	52.91	-56.21	109.12	42.79	32.13	10.52	32.53	200	17	P	V
			5725	52.08	-70.12	122.2	41.93	32.15	10.53	32.53	200	17	P	V
	*		5745	98.14	-	-	87.93	32.19	10.54	32.52	200	17	P	V
	*		5745	90.24	-	-	80.03	32.19	10.54	32.52	200	17	A	V
														V
													V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5616.25	49.31	-18.89	68.2	39.53	31.87	10.47	32.56	240	349	P	H
		5665.75	49.8	-30.09	79.89	39.95	31.89	10.5	32.54	240	349	P	H
		5708.5	49.72	-57.86	107.58	39.61	32.12	10.52	32.53	240	349	P	H
		5723.5	48.46	-70.32	118.78	38.31	32.15	10.53	32.53	240	349	P	H
	*	5785	104.25	-	-	93.93	32.27	10.56	32.51	240	349	P	H
	*	5785	96.69	-	-	86.37	32.27	10.56	32.51	240	349	A	H
		5851.75	50.03	-68.18	118.21	39.53	32.4	10.59	32.49	240	349	P	H
		5857.25	50.68	-59.49	110.17	40.17	32.41	10.59	32.49	240	349	P	H
		5923.5	51.01	-18.3	69.31	40.27	32.59	10.62	32.47	240	349	P	H
		5937.75	49.91	-18.29	68.2	39.1	32.65	10.63	32.47	240	349	P	H
													H
													H
<b>802.11n</b>													
<b>HT20</b>													
<b>CH 157</b>		5620.25	49.18	-19.02	68.2	39.41	31.86	10.47	32.56	197	16	P	V
<b>5785MHz</b>		5652.25	50.1	-19.77	69.87	40.35	31.81	10.49	32.55	197	16	P	V
		5712.5	51.38	-57.32	108.7	41.27	32.12	10.52	32.53	197	16	P	V
		5725	48.75	-73.45	122.2	38.6	32.15	10.53	32.53	197	16	P	V
	*	5785	99.33	-	-	89.01	32.27	10.56	32.51	197	16	P	V
	*	5785	91.72	-	-	81.4	32.27	10.56	32.51	197	16	A	V
		5852	49.23	-68.41	117.64	38.73	32.4	10.59	32.49	197	16	P	V
		5874	51.76	-53.72	105.48	41.2	32.45	10.6	32.49	197	16	P	V
		5923	50.06	-19.61	69.67	39.32	32.59	10.62	32.47	197	16	P	V
		5934.5	50.29	-17.91	68.2	39.5	32.64	10.62	32.47	197	16	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 165 5825MHz	*	5825	105.41	-	-	94.98	32.35	10.58	32.5	258	349	P	H	
	*	5825	97.48	-	-	87.05	32.35	10.58	32.5	258	349	A	H	
		5854.8	51.16	-60.1	111.26	40.65	32.41	10.59	32.49	258	349	P	H	
		5871.2	50.88	-55.38	106.26	40.33	32.44	10.6	32.49	258	349	P	H	
		5897.2	56.99	-31.74	88.73	46.37	32.49	10.61	32.48	258	349	P	H	
		5936	50.57	-17.63	68.2	39.78	32.64	10.62	32.47	258	349	P	H	
														H
														H
	*	5825	100.71	-	-	90.28	32.35	10.58	32.5	400	336	P	V	
	*	5825	92.29	-	-	81.86	32.35	10.58	32.5	400	336	A	V	
		5850.8	49.74	-70.64	120.38	39.24	32.4	10.59	32.49	400	336	P	V	
		5861.4	50.39	-58.62	109.01	39.87	32.42	10.59	32.49	400	336	P	V	
		5911	51.66	-26.87	78.53	40.98	32.54	10.61	32.47	400	336	P	V	
		5948.2	49.16	-19.04	68.2	38.3	32.69	10.63	32.46	400	336	P	V	
														V
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		11490	45.9	-28.1	74	52.31	39.61	17.48	63.5	100	0	P	H
		17235	46.63	-21.57	68.2	46.07	40.17	22.06	61.67	100	0	P	H
													H
													H
		11490	47.19	-26.81	74	53.6	39.61	17.48	63.5	100	0	P	V
		17235	47.11	-21.09	68.2	46.55	40.17	22.06	61.67	100	0	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	46.44	-27.56	74	52.88	39.46	17.6	63.5	100	0	P	H
		17355	46.3	-21.9	68.2	45.13	40.49	22.18	61.5	100	0	P	H
													H
													H
		11570	46.15	-27.85	74	52.59	39.46	17.6	63.5	100	0	P	V
		17355	45.92	-22.28	68.2	44.75	40.49	22.18	61.5	100	0	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	46.96	-27.04	74	53.59	39.15	17.72	63.5	100	0	P	H
		17475	47.13	-21.07	68.2	45.01	41.17	22.28	61.33	100	0	P	H
													H
													H
		11650	46.25	-27.75	74	52.88	39.15	17.72	63.5	100	0	P	V
		17475	47.83	-20.37	68.2	45.71	41.17	22.28	61.33	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5634.75	62	-6.2	68.2	52.24	31.83	10.48	32.55	248	348	P	H
		5683.25	59.54	-33.3	92.84	49.57	32	10.51	32.54	248	348	P	H
		5707	59.91	-47.25	107.16	49.81	32.11	10.52	32.53	248	348	P	H
		5723.25	57.99	-60.22	118.21	47.84	32.15	10.53	32.53	248	348	P	H
	*	5755	99.17	-	-	88.93	32.21	10.55	32.52	248	348	P	H
	*	5755	91.1	-	-	80.86	32.21	10.55	32.52	248	348	A	H
		5851	50.94	-68.98	119.92	40.44	32.4	10.59	32.49	248	348	P	H
		5874.25	55.31	-50.1	105.41	44.75	32.45	10.6	32.49	248	348	P	H
		5875.5	60.69	-44.14	104.83	50.12	32.45	10.6	32.48	248	348	P	H
		5949.75	50.84	-17.36	68.2	39.97	32.7	10.63	32.46	248	348	P	H
<b>802.11n</b>													H
<b>HT40</b>													H
<b>CH 151</b>		5635	59.7	-8.5	68.2	49.94	31.83	10.48	32.55	354	295	P	V
<b>5755MHz</b>		5659.5	51.56	-23.7	75.26	41.76	31.86	10.49	32.55	354	295	P	V
		5718.75	54.31	-56.14	110.45	44.17	32.14	10.53	32.53	354	295	P	V
		5722	53.78	-61.58	115.36	43.64	32.14	10.53	32.53	354	295	P	V
	*	5755	94.57	-	-	84.33	32.21	10.55	32.52	354	295	P	V
	*	5755	86.58	-	-	76.34	32.21	10.55	32.52	354	295	A	V
		5850.75	52.86	-67.63	120.49	42.36	32.4	10.59	32.49	354	295	P	V
		5875	60.77	-44.43	105.2	50.21	32.45	10.6	32.49	354	295	P	V
		5875	60.77	-44.43	105.2	50.21	32.45	10.6	32.49	354	295	P	V
		5928.25	50.73	-17.47	68.2	39.97	32.61	10.62	32.47	354	295	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5616	50.76	-17.44	68.2	40.98	31.87	10.47	32.56	254	348	P	H
		5675	63.37	-23.37	86.74	53.46	31.95	10.5	32.54	254	348	P	H
		5716.5	52.5	-57.32	109.82	42.38	32.13	10.52	32.53	254	348	P	H
		5722.5	52.7	-63.8	116.5	42.55	32.15	10.53	32.53	254	348	P	H
	*	5795	100.6	-	-	90.25	32.29	10.57	32.51	254	348	P	H
	*	5795	93.15	-	-	82.8	32.29	10.57	32.51	254	348	A	H
		5853.5	53.47	-60.75	114.22	42.96	32.41	10.59	32.49	254	348	P	H
		5867	60.99	-46.45	107.44	50.45	32.43	10.6	32.49	254	348	P	H
		5890.75	58.23	-35.28	93.51	47.62	32.48	10.61	32.48	254	348	P	H
		5939	53.37	-14.83	68.2	42.55	32.66	10.63	32.47	254	348	P	H
802.11n													H
HT40													H
CH 159		5627.25	50.86	-17.34	68.2	41.09	31.85	10.47	32.55	223	15	P	V
5795MHz		5699.25	50.96	-53.69	104.65	40.88	32.1	10.51	32.53	223	15	P	V
		5708.5	50.91	-56.67	107.58	40.8	32.12	10.52	32.53	223	15	P	V
		5723	55.16	-62.48	117.64	45.01	32.15	10.53	32.53	223	15	P	V
	*	5795	96.98	-	-	86.63	32.29	10.57	32.51	223	15	P	V
	*	5795	89.03	-	-	78.68	32.29	10.57	32.51	223	15	A	V
		5853	50.58	-64.78	115.36	40.07	32.41	10.59	32.49	223	15	P	V
		5861.25	51.41	-57.64	109.05	40.89	32.42	10.59	32.49	223	15	P	V
		5915	60.75	-14.82	75.57	50.04	32.56	10.62	32.47	223	15	P	V
		5938.5	52.23	-15.97	68.2	41.42	32.65	10.63	32.47	223	15	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		11510	45.2	-28.8	74	51.61	39.58	17.51	63.5	100	0	P	H
		17265	47.71	-20.49	68.2	47.12	40.13	22.09	61.63	100	0	P	H
													H
													H
		11510	45.8	-28.2	74	52.21	39.58	17.51	63.5	100	0	P	V
		17265	46.32	-21.88	68.2	45.73	40.13	22.09	61.63	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	45.77	-28.23	74	52.22	39.42	17.63	63.5	100	0	P	H
		17385	46.94	-21.26	68.2	45.51	40.69	22.2	61.46	100	0	P	H
													H
													H
		11590	46.1	-27.9	74	52.55	39.42	17.63	63.5	100	0	P	V
		17385	48	-20.2	68.2	46.57	40.69	22.2	61.46	100	0	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5644.75	50.85	-17.35	68.2	41.11	31.81	10.48	32.55	243	347	P	H
		5655	62.92	-8.99	71.91	53.15	31.83	10.49	32.55	243	347	P	H
		5702.75	58.63	-47.34	105.97	48.53	32.11	10.52	32.53	243	347	P	H
		5720	57.72	-53.08	110.8	47.58	32.14	10.53	32.53	243	347	P	H
	*	5775	96.79	-	-	86.49	32.25	10.56	32.51	243	347	P	H
	*	5775	88.83	-	-	78.53	32.25	10.56	32.51	243	347	A	H
		5852	53.27	-64.37	117.64	42.77	32.4	10.59	32.49	243	347	P	H
		5871.25	56.11	-50.14	106.25	45.56	32.44	10.6	32.49	243	347	P	H
		5895	63.94	-26.42	90.36	53.32	32.49	10.61	32.48	243	347	P	H
		5932.25	50.92	-17.28	68.2	40.14	32.63	10.62	32.47	243	347	P	H
<b>802.11ac</b>													H
<b>VHT80</b>													H
<b>CH 155</b>		5610.25	51.67	-16.53	68.2	41.88	31.88	10.47	32.56	200	15	P	V
<b>5775MHz</b>		5655.25	57.24	-14.86	72.1	47.47	31.83	10.49	32.55	200	15	P	V
		5713.75	53.82	-55.23	109.05	43.7	32.13	10.52	32.53	200	15	P	V
		5721.75	54	-60.79	114.79	43.86	32.14	10.53	32.53	200	15	P	V
	*	5775	92.2	-	-	81.9	32.25	10.56	32.51	200	15	P	V
	*	5775	84.48	-	-	74.18	32.25	10.56	32.51	200	15	A	V
		5851.25	52.35	-67	119.35	41.85	32.4	10.59	32.49	200	15	P	V
		5856.5	51.55	-58.83	110.38	41.04	32.41	10.59	32.49	200	15	P	V
		5895	59.4	-30.96	90.36	48.78	32.49	10.61	32.48	200	15	P	V
		5941	51.52	-16.68	68.2	40.7	32.66	10.63	32.47	200	15	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 4 5725~5850MHz  
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11ac VHT80 CH 155 5775MHz		11550	47.31	-26.69	74	53.74	39.5	17.57	63.5	100	0	P	H	
		17325	47.62	-20.58	68.2	46.74	40.27	22.15	61.54	100	0	P	H	
													H	
													H	
			11550	45.95	-28.05	74	52.38	39.5	17.57	63.5	100	0	P	V
			17325	46.52	-21.68	68.2	45.64	40.27	22.15	61.54	100	0	P	V
														V
														V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz  
5GHz WIFI 802.11n VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
5GHz 802.11n VHT80 LF		30	21.71	-18.29	40	29.21	24.15	0.77	32.42	-	-	P	H	
		115.36	21.61	-21.89	43.5	35.6	16.98	1.44	32.41	-	-	P	H	
		180.35	22.41	-21.09	43.5	38.33	14.72	1.91	32.55	-	-	P	H	
		851.59	32.61	-13.39	46	31.62	28.83	4.1	31.94	-	-	P	H	
		945.68	33	-13	46	29.95	29.85	4.33	31.13	-	-	P	H	
		953.44	33.01	-12.99	46	29.42	30.26	4.35	31.02	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			30.97	29.06	-10.94	40	36.84	23.86	0.78	32.42	100	0	P	V
			38.73	26.55	-13.45	40	38.18	20	0.84	32.47	-	-	P	V
			53.28	24.58	-15.42	40	43.44	12.68	0.99	32.53	-	-	P	V
			871.96	32.89	-13.11	46	31.52	29.07	4.15	31.85	-	-	P	V
			881.66	33.11	-12.89	46	31.72	29.03	4.17	31.81	-	-	P	V
			958.29	33.51	-12.49	46	29.54	30.57	4.36	30.96	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Cookie Ku, Fu Chen, and Troye Hsieh	Temperature :	20.2~26.4°C
		Relative Humidity :	43.1~69.3%

### Note symbol



-L	Low channel location
-R	High channel location






**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_8E(84)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 115 (17)</p>	<p>Site : 03CH11-HY            Condition : PEAK(LINE) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 115 (17)</p>

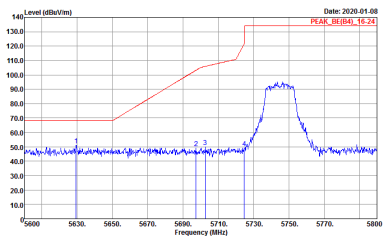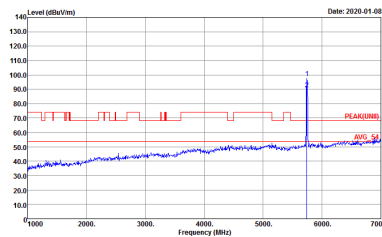


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2020-01-08 PEAK_BE(B4)_16-24</p> <p>Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 901524-02 Setting : 11.5 (17)</p>	 <p>Date: 2020-01-08 PEAKUNB</p> <p>Site : 03CH11-14Y Condition : PEAKUNB1 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 901524-02 Setting : 11.5 (17)</p>

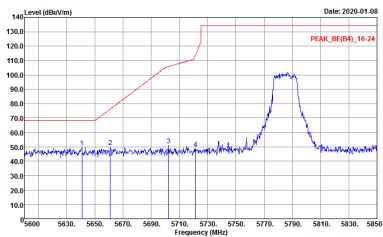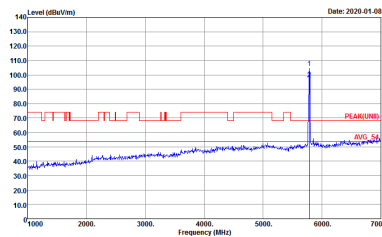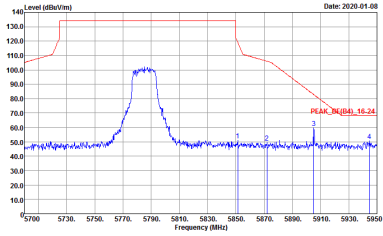



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Site : 03CH11-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	Left blank




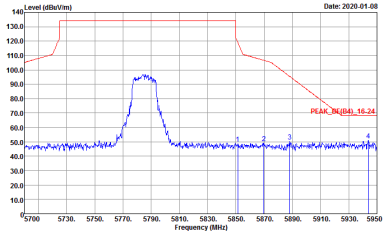


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	<p><b>Left blank</b></p>

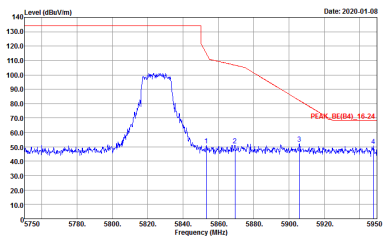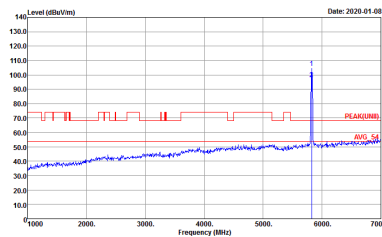

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-11Y          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 901524-02          Setting : 12 (18)</p>	 <p>Site : 03CH11-11Y          Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 901524-02          Setting : 12 (18)</p>

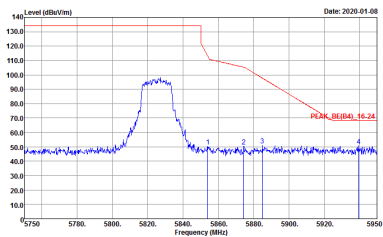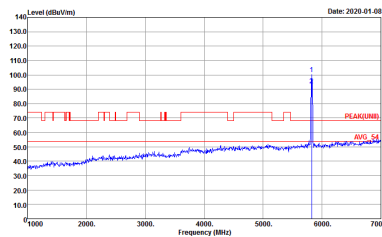



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2020-01-08</p> <p>Site : 03CH11-14Y          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 901524-02          Setting : 12 (18)</p>	 <p>Date: 2020-01-08</p> <p>Site : 03CH11-14Y          Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 901524-02          Setting : 12 (18)</p>






**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CHI1-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 1Z (18)</p>	<p>Site : 03CHI1-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 1Z (18)</p>

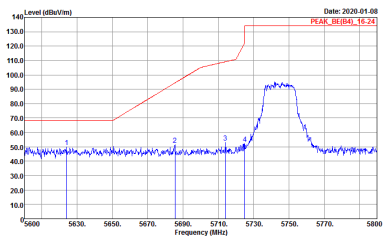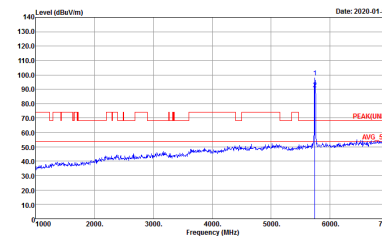

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-11Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 901524-02 Setting : 12 (18)</p>	 <p>Site : 03CH11-11Y Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 901524-02 Setting : 12 (18)</p>

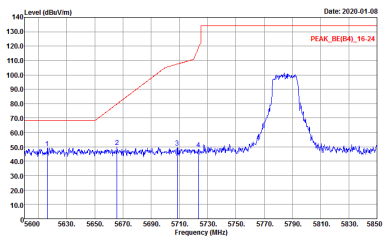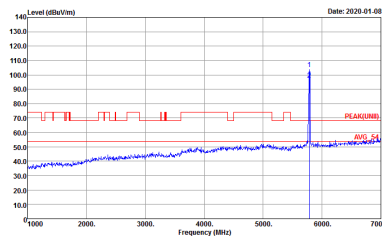
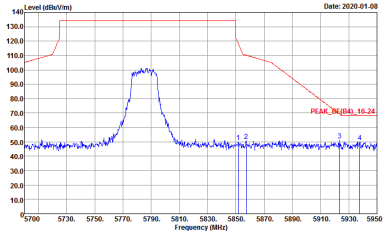


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	<p><b>Left blank</b></p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Date: 2020-01-08</p> <p>PEAK_BE(B4)_16-24</p> <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	<p>Date: 2020-01-08</p> <p>PEAK(LIM)</p> <p>Site : 03CH11-HY            Condition : PEAK(LIM) 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>
<p><b>Peak</b></p>	<p>Date: 2020-01-08</p> <p>PEAK_BE(B4)_16-24</p> <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	<p><b>Left blank</b></p>

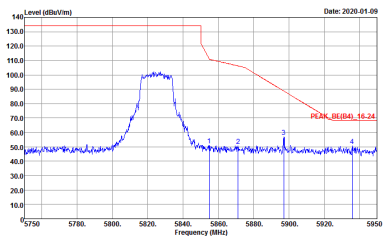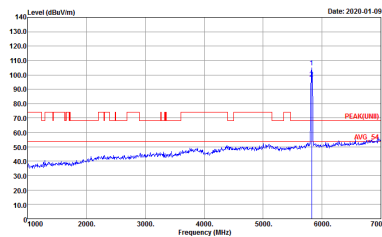

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2020-01-09</p> <p>Site : 03CH11-14Y            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Date: 2020-01-09</p> <p>Site : 03CH11-14Y            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>



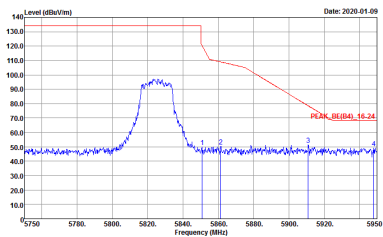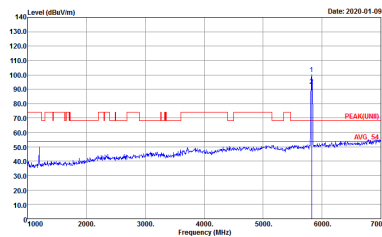


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2020-01-09</p> <p>Site : 03CH11-14Y            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Date: 2020-01-09</p> <p>Site : 03CH11-14Y            Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 11 (16)</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 11 (16)</p>
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 11 (16)</p>	<b>Left blank</b>



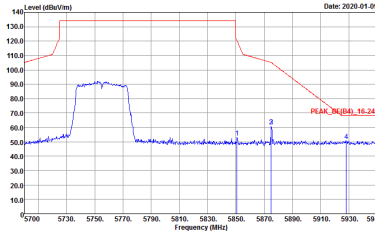


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 11 (16)</p>	 <p>Site : 03CH11-HY            Condition : PEAK(LNB) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 11 (16)</p>
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_N(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 11 (16)</p>	Left blank

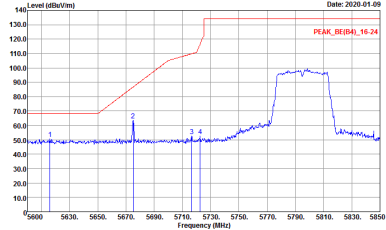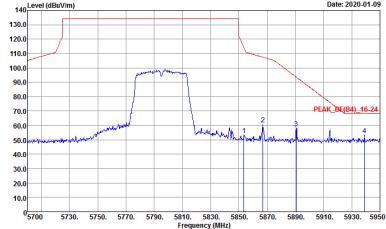

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Site : 03CH11-HY            Condition : PEAKUNII 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	<p><b>Left blank</b></p>

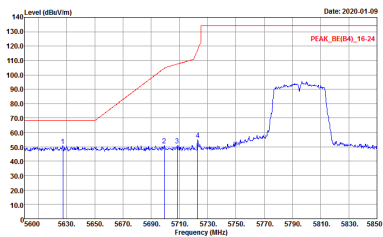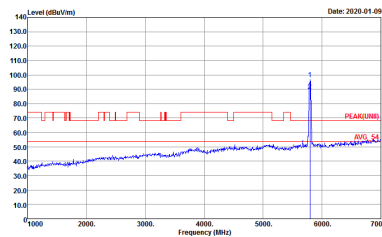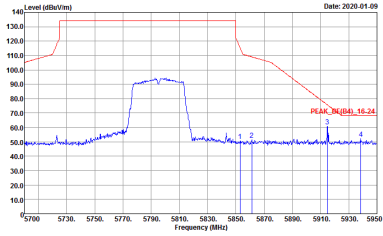

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	 <p>Site : 03CH11-HY            Condition : PEAK(FUNB) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_V(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 12 (18)</p>	Left blank



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 901524-02            Setting : 11.5 (17)</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 901524-02            Setting : 11.5 (17)</p>
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 901524-02            Setting : 11.5 (17)</p>	<b>Left blank</b>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 11.5 (17)</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 11.5 (17)</p>
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02            Setting : 11.5 (17)</p>	<p><b>Left blank</b></p>



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 2 columns: Horizontal and Vertical. Each column contains a graph of Level (dBuV/m) vs Frequency (MHz) and associated test parameters like Site, Condition, Detector, and Project.





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CHEL14Y Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 901524-02</p>	<p>Site : 03CHEL14Y Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 901524-02</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CHEL14Y Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 901524-02</p>	<p>Site : 03CHEL14Y Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 901524-02</p>





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
<b>Peak</b>  <b>Avg.</b>	<p>Site : 03CHI1-HY          Condition : PEAK(LINII) 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 901524-02</p>	<p>Site : 03CHI1-HY          Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 901524-02</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CHEL14Y Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 901524-02</p>	<p>Site : 03CHEL14Y Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 901524-02</p>

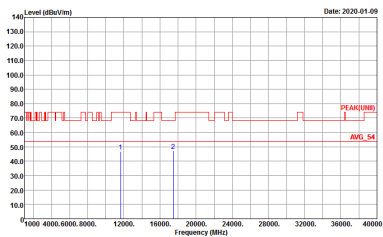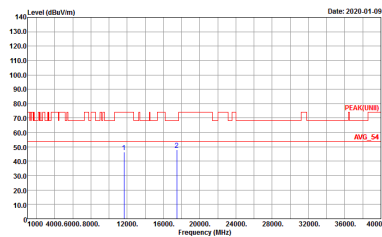



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CHEL14Y          Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 901524-02</p>	 <p>Site : 03CHEL14Y          Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 901524-02</p>



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CHI1-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 901524-02</p>	<p>Site : 03CHI1-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 901524-02</p>

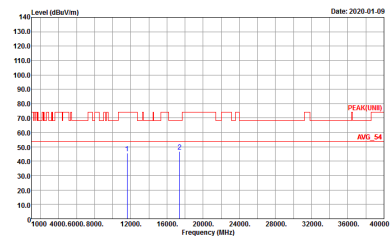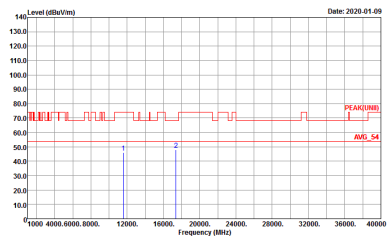

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CHEL14Y          Condition : PEAK(LINEI) 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 901524-02</p>	 <p>Site : 03CHEL14Y          Condition : PEAK(LINEI) 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 901524-02</p>



**Band 4 5725~5850MHz  
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CHI1-HY Condition : PEAK(LINII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 901524-02</p>	<p>Site : 03CHI1-HY Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 901524-02</p>





Emission below 1GHz  
5GHz WIFI 802.11ac VHT80 (LF)

WIFI	5GHz 5725-5850MHz	
ANT	802.11ac VHT80 LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 901524-02</p>	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 901524-02</p>




### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	98.31	-	-	10Hz	0.07
5GHz 802.11n HT20	97.46	4985	0.20	300Hz	0.11
5GHz 802.11n HT40	94.51	2410	0.41	1kHz	0.25
5GHz 802.11ac VHT20	97.46	4980	0.20	300Hz	0.11
5GHz 802.11ac VHT40	94.90	2420	0.41	1kHz	0.23
5GHz 802.11ac VHT80	85.66	1135	0.88	1kHz	0.67




802.11a

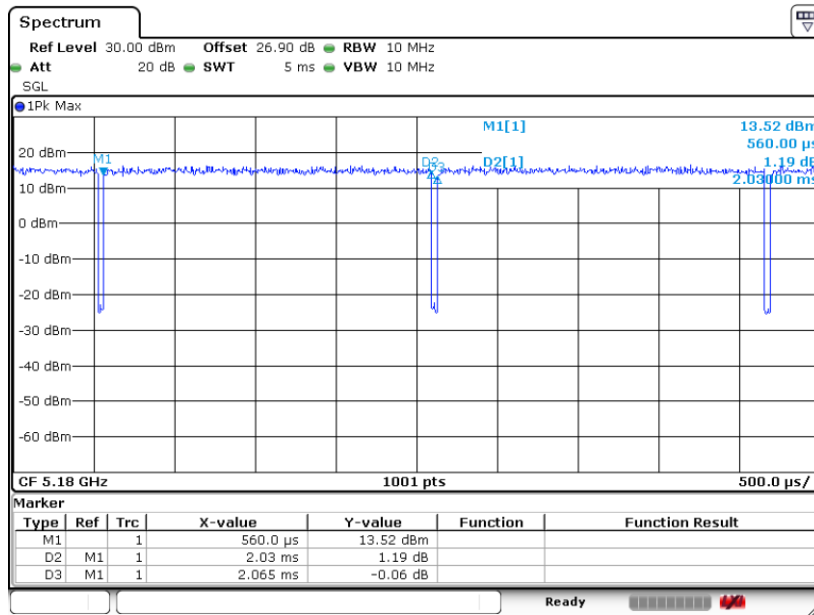

Date: 6.DEC.2019 05:09:59


802.11n HT20

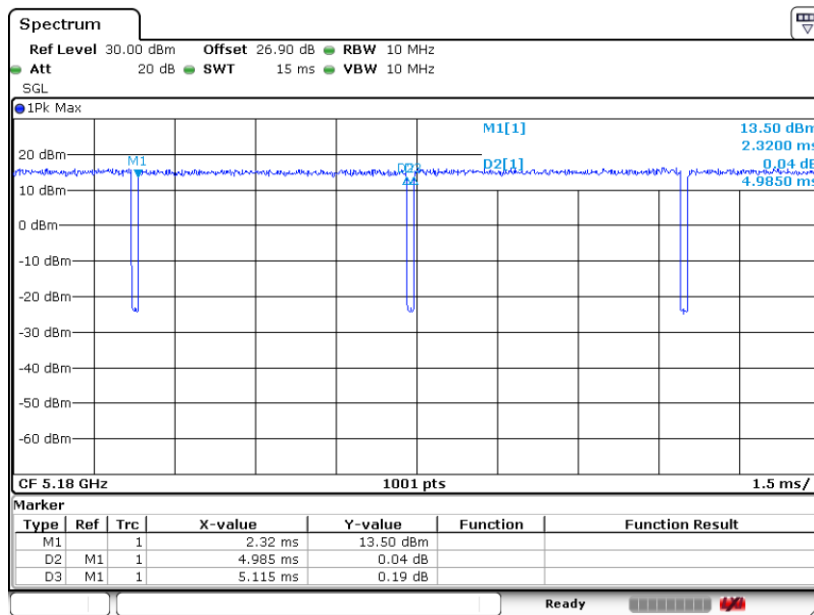

Date: 6.DEC.2019 05:13:24




802.11n HT40

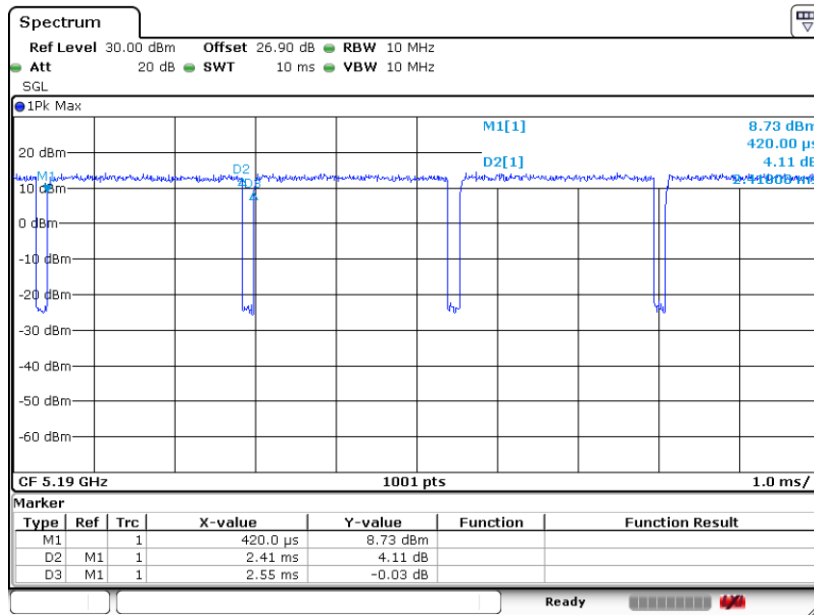

Date: 6.DEC.2019 05:15:09


802.11ac VHT20

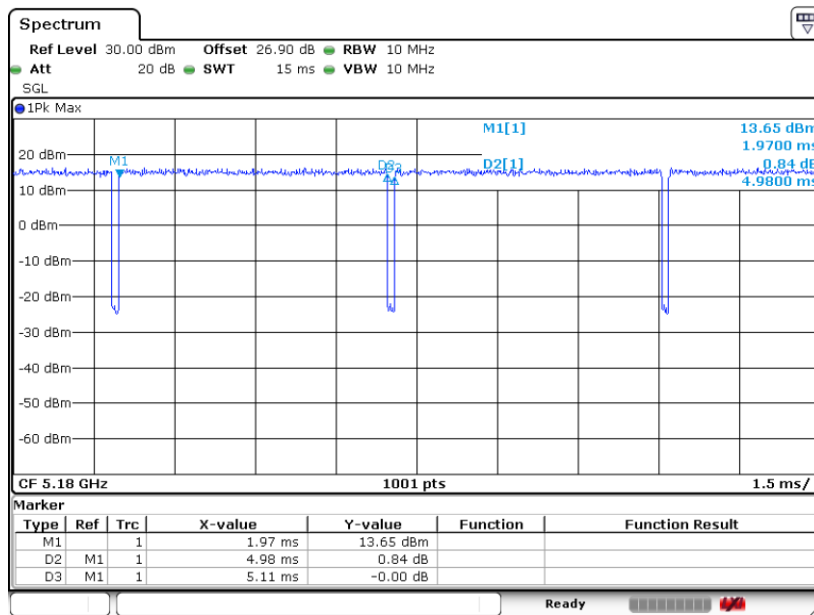

Date: 6.DEC.2019 05:18:31




802.11ac VHT40

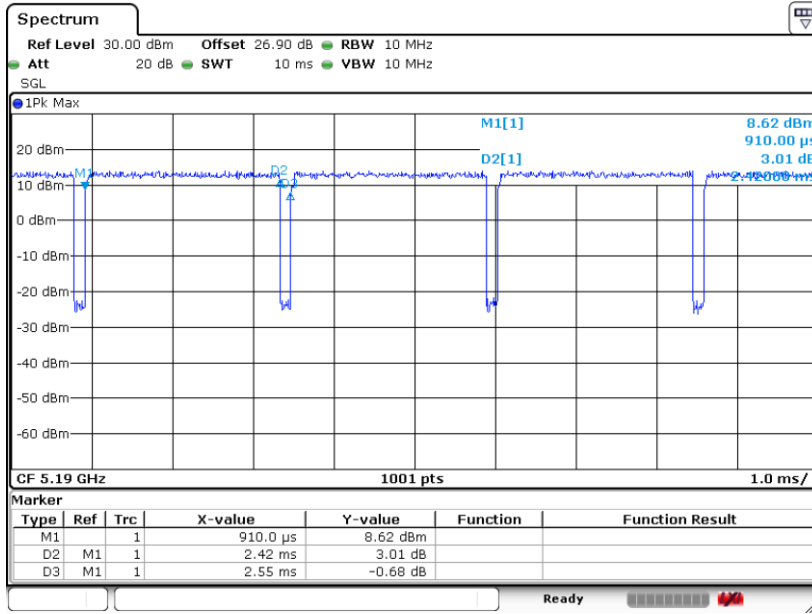

Date: 6.DEC.2019 05:20:07

802.11ac VHT80

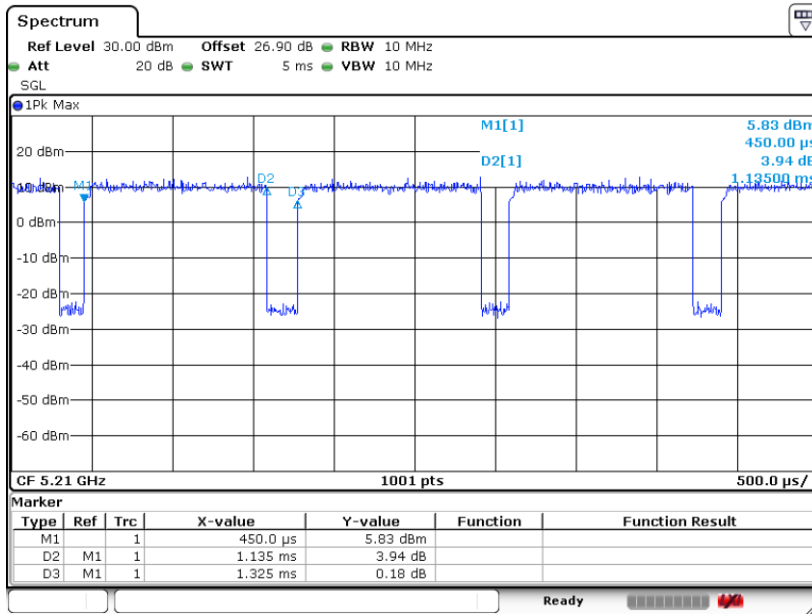

Date: 6.DEC.2019 05:21:21

—THE END—