





CSE Plot on Ch 78 between 30MHz ~ 3 GHz

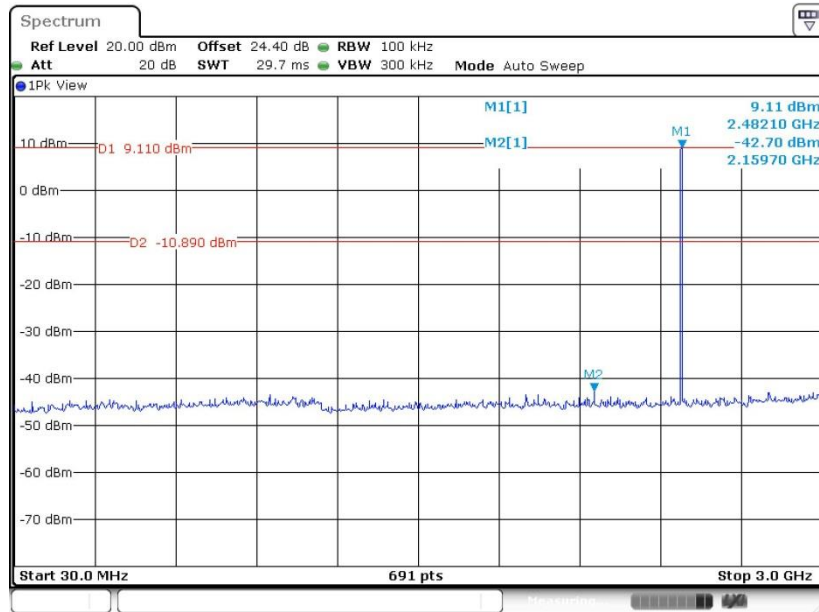

Date: 22 JUN 2019 18:02:27

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

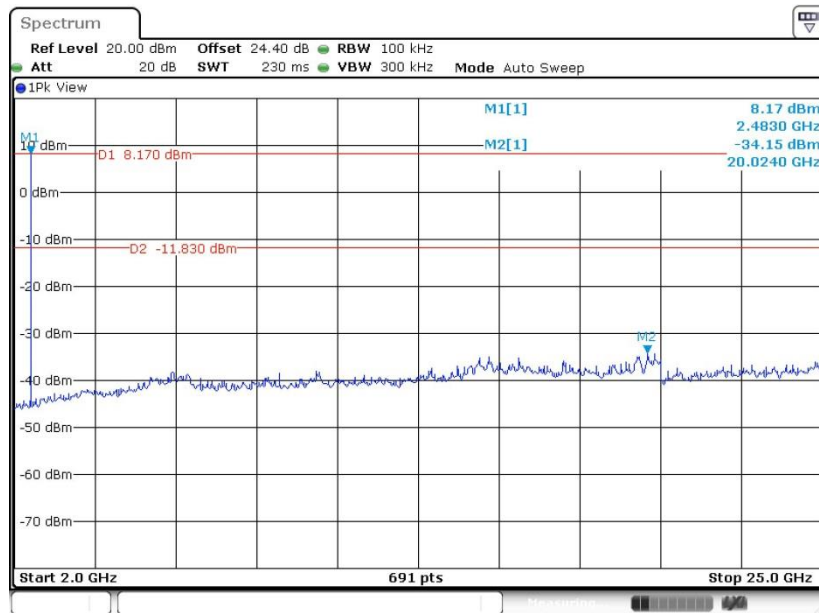


Date: 22 JUN 2019 18:02:55




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

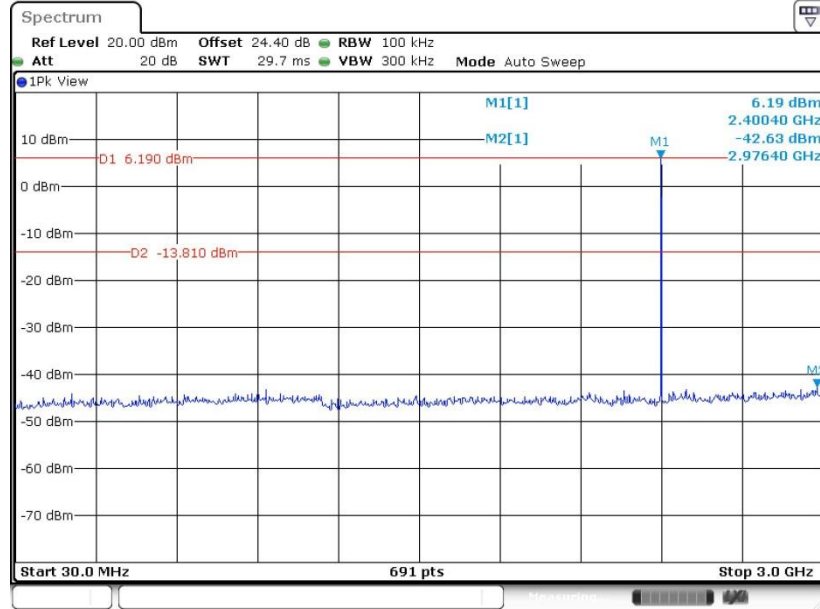

Date: 22 JUN 2019 18:15:17


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

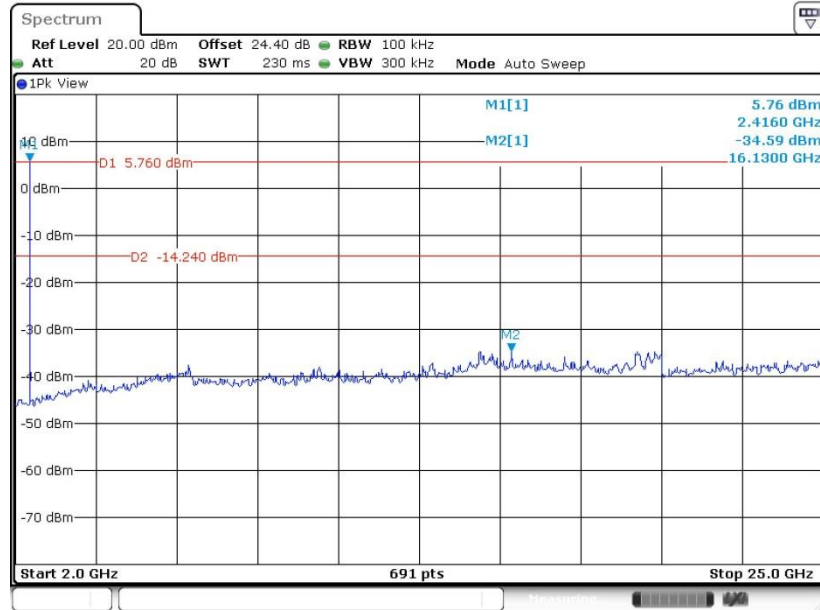

Date: 22 JUN 2019 18:15:45




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

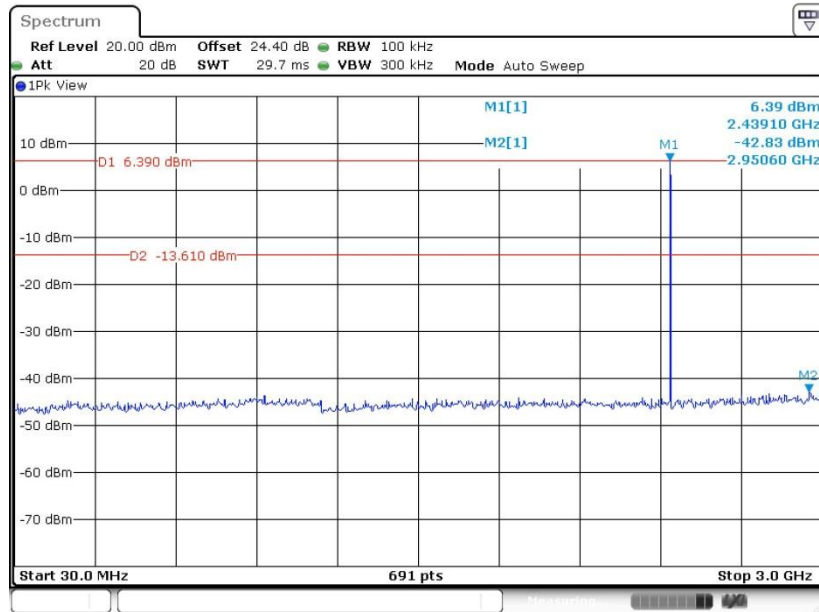

Date: 22 JUN 2019 18:20:01


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

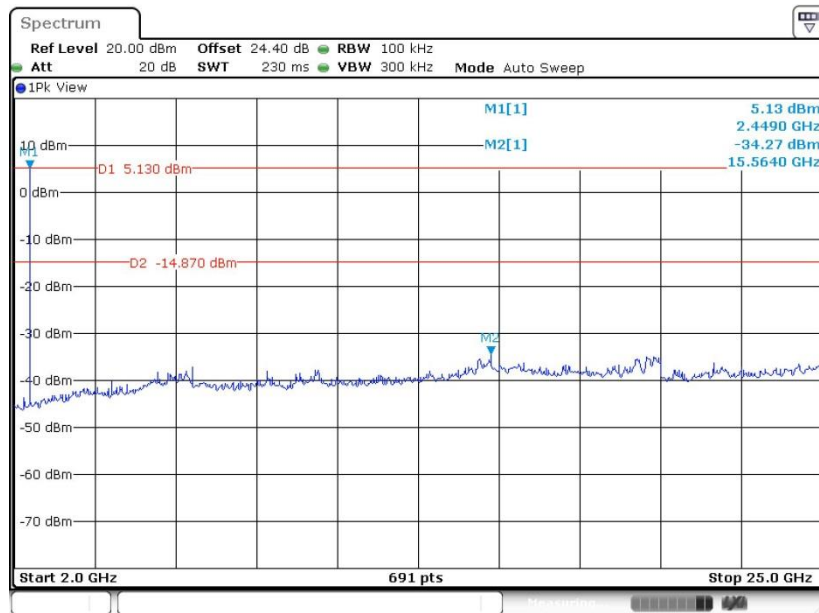

Date: 22 JUN 2019 18:20:27




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

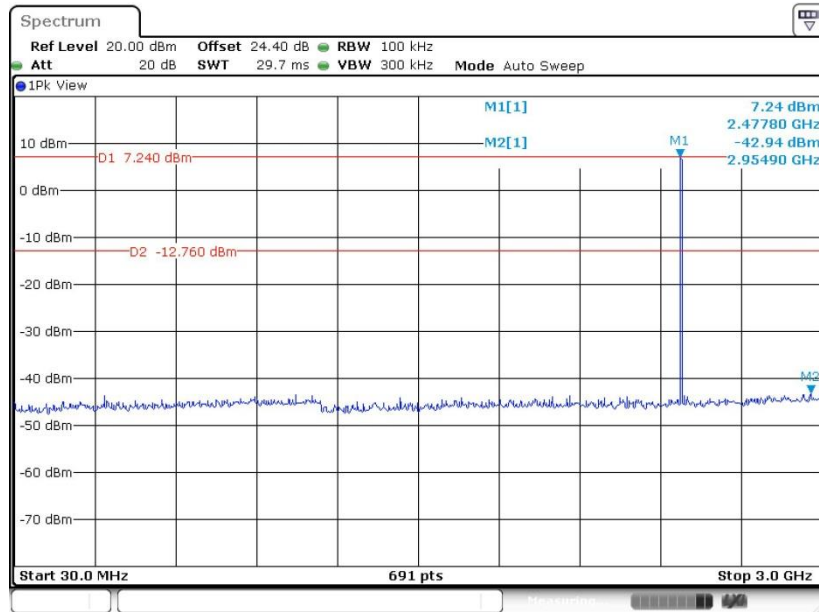

Date: 22 JUN 2019 18:23:13

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

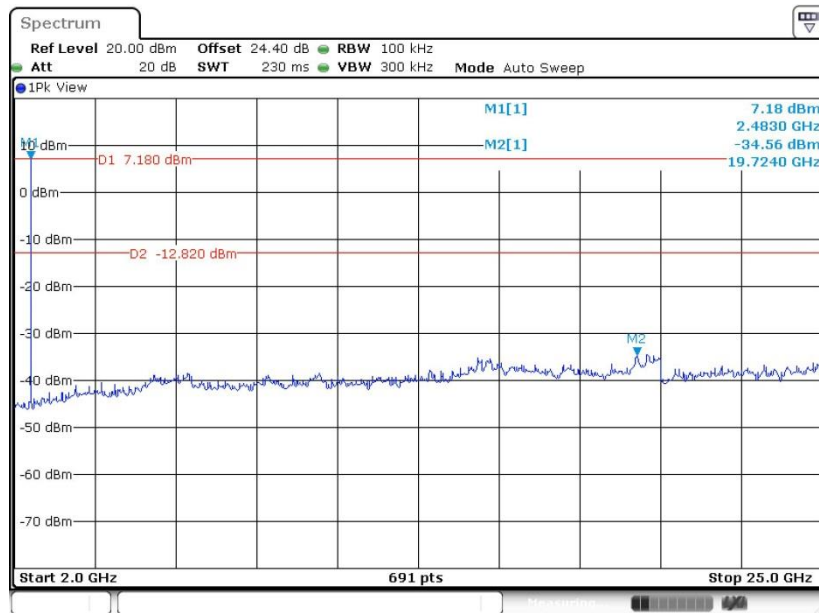


Date: 22 JUN 2019 18:24:14




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

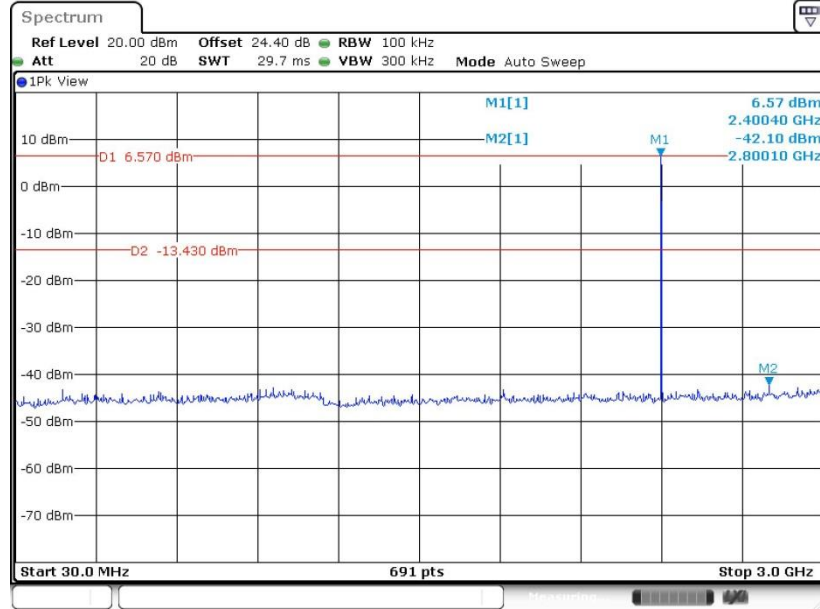

Date: 24.JUN.2019 08:10:18


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

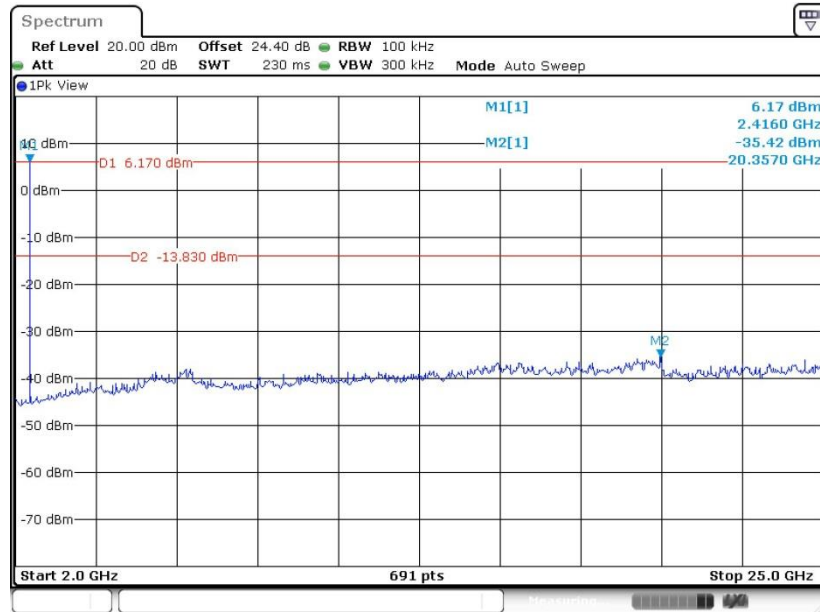

Date: 24.JUN.2019 08:10:46




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

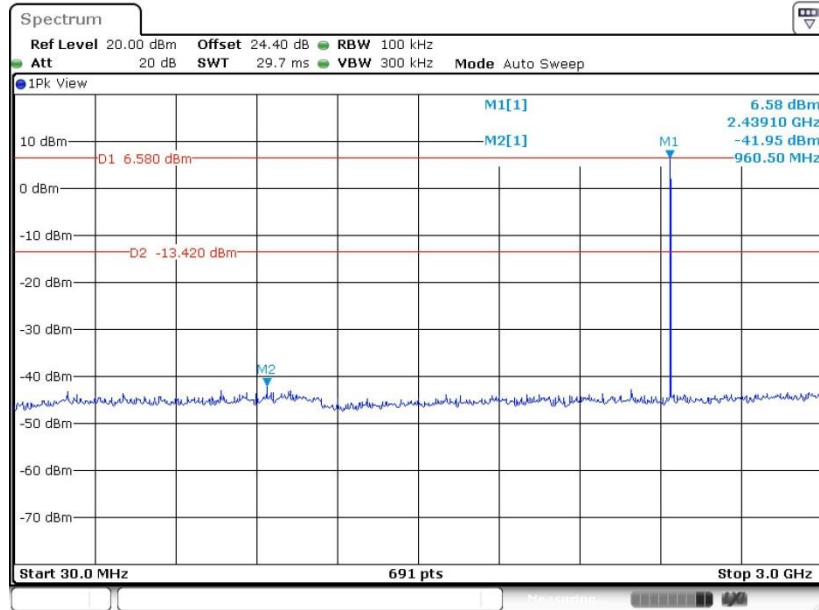

Date: 24.JUN.2019 08:18:20


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

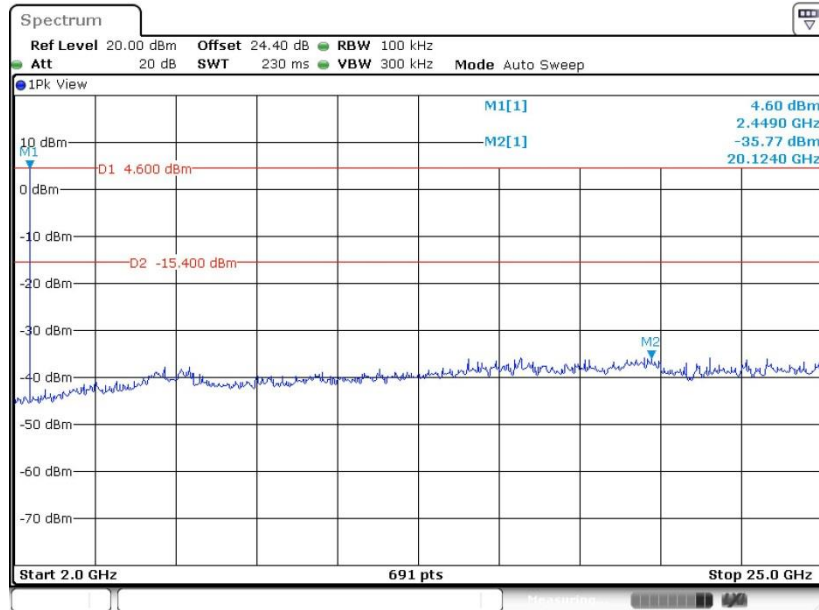

Date: 24.JUN.2019 08:18:47




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

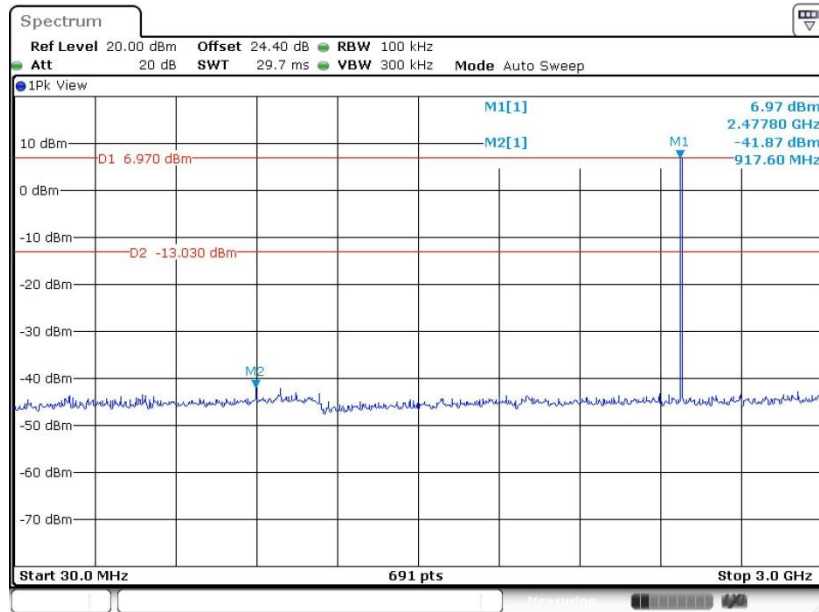

Date: 24.JUN.2019 08:31:52

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

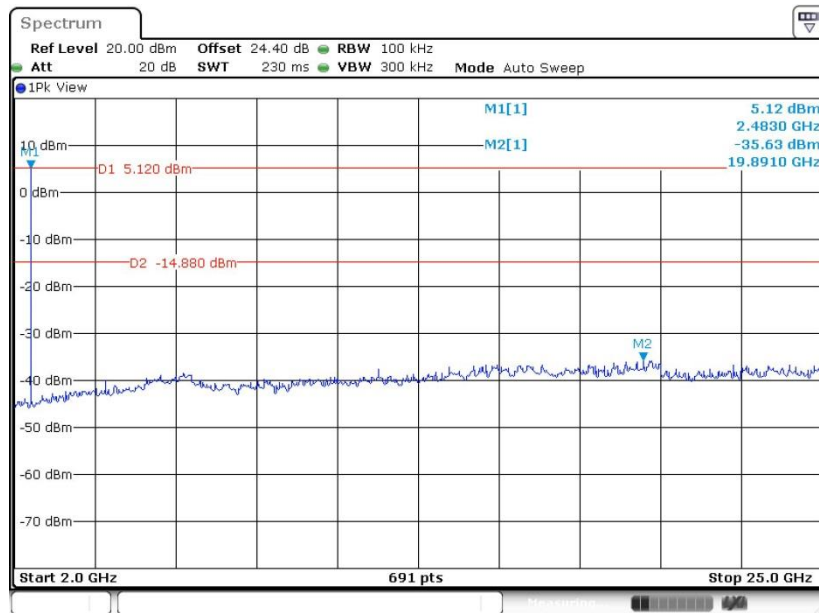

Date: 24.JUN.2019 08:32:19



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring equipment of this test report.






### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

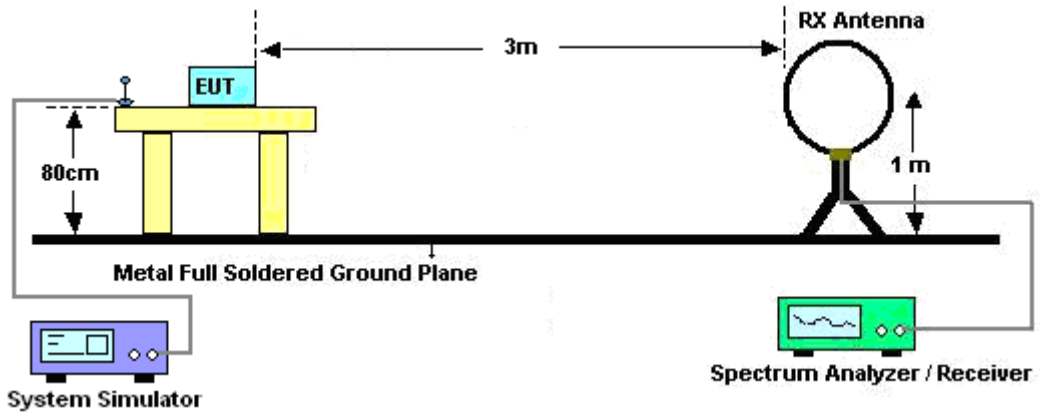

For radiated emissions from 30MHz to 1GHz

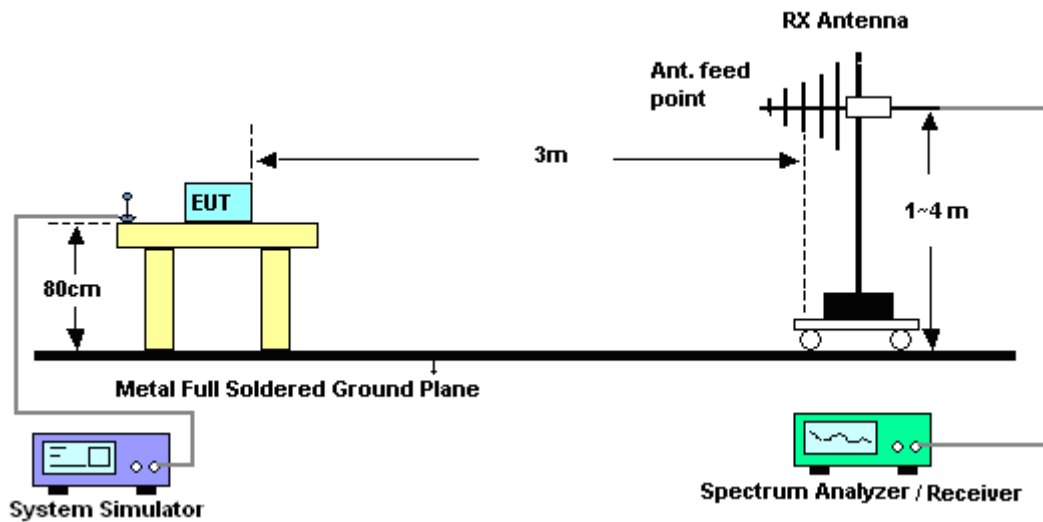

For radiated emissions above 1GHz

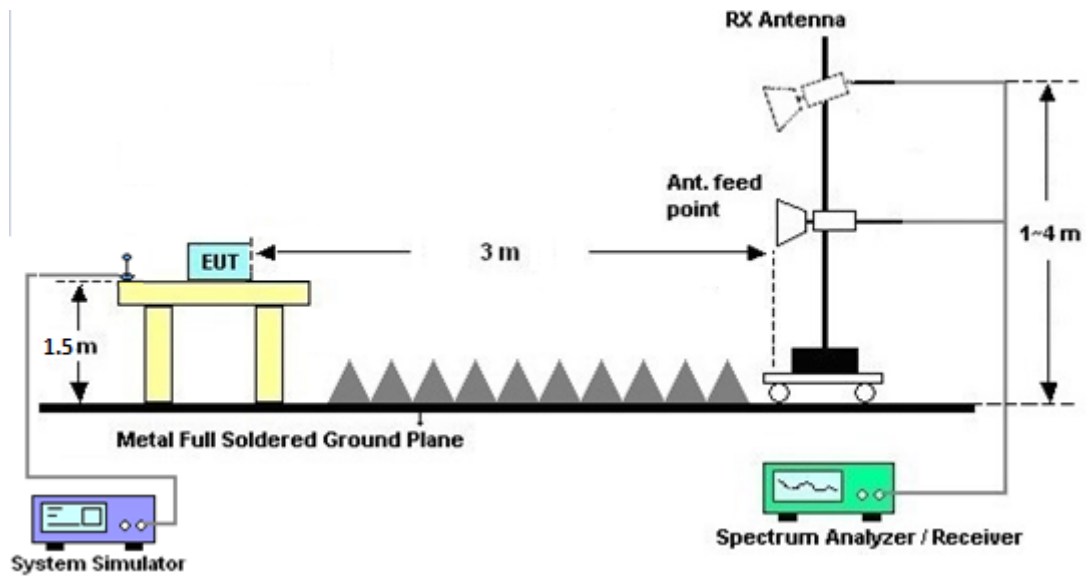

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.8.7 Duty Cycle

Please refer to Appendix E.

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

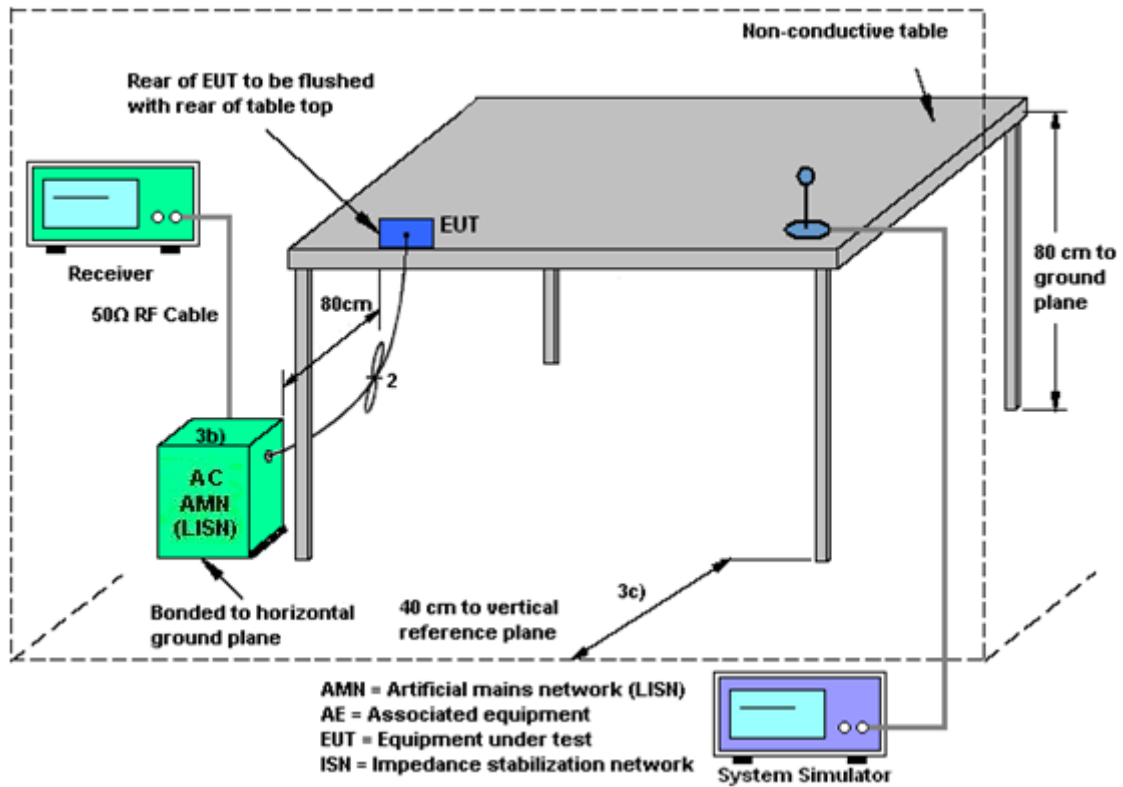

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	DTM-303A	TP157075	N/A	Nov. 05, 2018	Jun. 12, 2019~ Jun. 24, 2019	Nov. 04, 2019	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB4129234 4	N/A	Dec. 27, 2018	Jun. 12, 2019~ Jun. 24, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 27, 2018	Jun. 12, 2019~ Jun. 24, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 13, 2018	Jun. 12, 2019~ Jun. 24, 2019	Nov. 12, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1208382	N/A	Mar. 27, 2019	Jun. 12, 2019~ Jun. 24, 2019	Mar. 26, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 21, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 12, 2018	Jun. 21, 2019	Nov. 11, 2019	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Jun. 21, 2019	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jun. 21, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Jun. 21, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 21, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jun. 21, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jun. 21, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Jun. 25, 2019~ Jun. 29, 2019	Jan. 06, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D &N-6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 13, 2018	Jun. 25, 2019~ Jun. 29, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 30, 2018	Jun. 25, 2019~ Jun. 29, 2019	Oct. 29, 2019	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Dec. 05, 2018	Jun. 25, 2019~ Jun. 29, 2019	Dec. 04, 2019	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Jun. 25, 2019~ Jun. 29, 2019	Dec. 03, 2019	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55- 303	1710001800 055007	1GHz~18GHz	Apr. 01, 2019	Jun. 25, 2019~ Jun. 29, 2019	Mar. 31, 2020	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY5327008 0	1GHz~26.5GHz	Nov. 14, 2018	Jun. 25, 2019~ Jun. 29, 2019	Nov. 13, 2020	Radiation (03CH11-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jun. 25, 2019~ Jun. 29, 2019	Jul. 15, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHz	Oct. 19, 2018	Jun. 25, 2019~ Jun. 29, 2019	Oct. 18, 2019	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTN-303B	TP140325	N/A	Nov. 05, 2018	Jun. 25, 2019~ Jun. 29, 2019	Nov. 04, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000- 1530-8000-4 0SS	SN11	1G Low Pass	Sep. 16, 2018	Jun. 25, 2019~ Jun. 29, 2019	Sep. 17, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-27 00-3000-180 00-60SS	SN3	2.7G High Pass	Sep. 16, 2018	Jun. 25, 2019~ Jun. 29, 2019	Sep. 17, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4P E	9kHz-30MHz	Mar. 13, 2019	Jun. 25, 2019~ Jun. 29, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Jun. 25, 2019~ Jun. 29, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4P E	30M-18G	Mar. 13, 2019	Jun. 25, 2019~ Jun. 29, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Jun. 25, 2019~ Jun. 29, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 25, 2019~ Jun. 29, 2019	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1~4m	N/A	Jun. 25, 2019~ Jun. 29, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 25, 2019~ Jun. 29, 2019	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Jun. 25, 2019~ Jun. 29, 2019	N/A	Radiation (03CH11-HY)





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.20
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.50
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Leo Li	Temperature:	21~25	°C
Test Date:	2019/6/12~2019/6/24	Relative Humidity:	51~54	%

**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.871	0.825	0.999	0.5808	Pass
DH	1Mbps	1	39	2441	0.871	0.825	1.155	0.5808	Pass
DH	1Mbps	1	78	2480	0.871	0.819	0.999	0.5808	Pass
2DH	2Mbps	1	0	2402	1.255	1.164	0.999	0.8365	Pass
2DH	2Mbps	1	39	2441	1.255	1.164	1.003	0.8365	Pass
2DH	2Mbps	1	78	2480	1.250	1.164	0.999	0.8336	Pass
3DH	3Mbps	1	0	2402	1.216	1.149	0.999	0.8104	Pass
3DH	3Mbps	1	39	2441	1.233	1.152	1.003	0.8220	Pass
3DH	3Mbps	1	78	2480	1.237	1.146	0.999	0.8249	Pass

**TEST RESULTS DATA****Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	10.34	20.97	Pass
	39	1	10.52	20.97	Pass
	78	1	10.73	20.97	Pass
2DH1	0	1	9.59	20.97	Pass
	39	1	9.81	20.97	Pass
	78	1	10.14	20.97	Pass
3DH1	0	1	9.89	20.97	Pass
	39	1	10.16	20.97	Pass
	78	1	10.42	20.97	Pass

**TEST RESULTS DATA****Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	10.28	5.16
	39	1	10.44	5.16
	78	1	10.64	5.16
2DH1	0	1	7.24	5.07
	39	1	7.43	5.07
	78	1	7.80	5.07
3DH1	0	1	7.34	5.12
	39	1	7.47	5.12
	78	1	7.84	5.12

**TEST RESULTS DATA****Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%

# EUT Information

Report NO : 940901-03  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

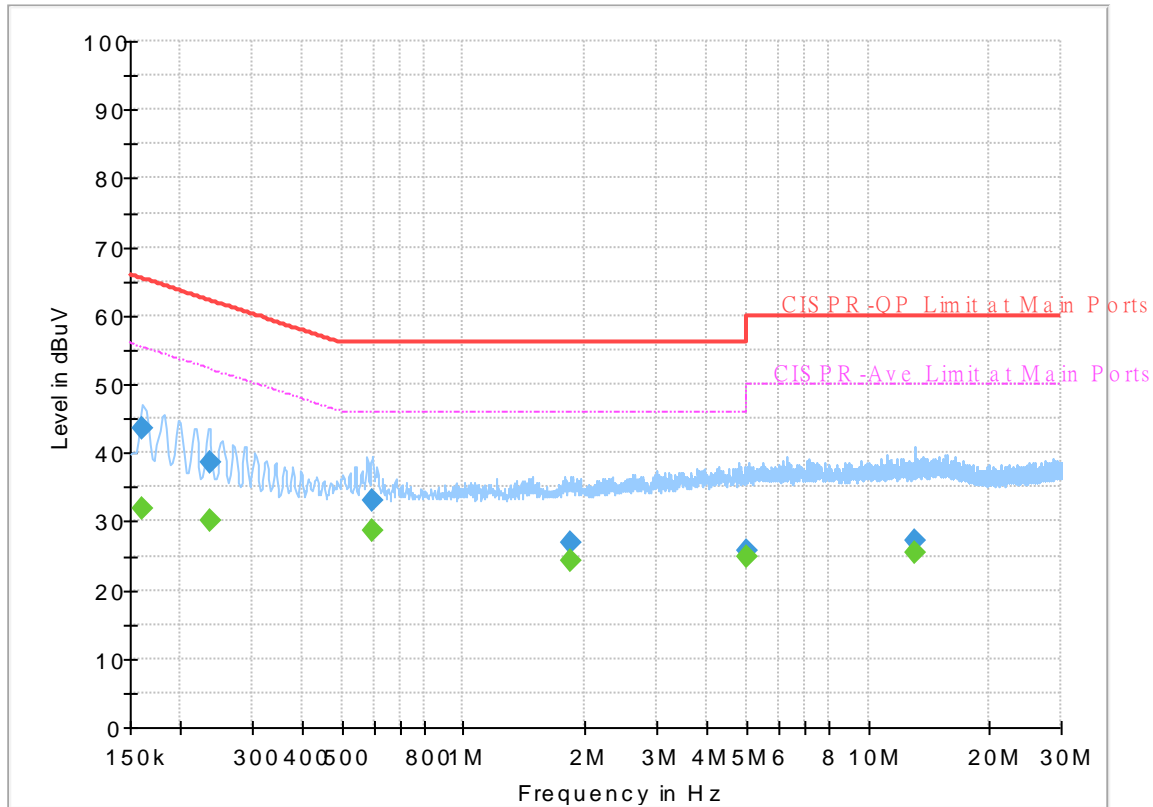


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	31.93	55.40	23.47	L1	OFF	19.5
0.161250	43.49	---	65.40	21.91	L1	OFF	19.5
0.235500	---	30.16	52.25	22.09	L1	OFF	19.5
0.235500	38.73	---	62.25	23.52	L1	OFF	19.5
0.595500	---	28.76	46.00	17.24	L1	OFF	19.5
0.595500	33.14	---	56.00	22.86	L1	OFF	19.5
1.837500	---	24.36	46.00	21.64	L1	OFF	19.6
1.837500	26.76	---	56.00	29.24	L1	OFF	19.6
5.005500	---	24.87	50.00	25.13	L1	OFF	19.7
5.005500	25.82	---	60.00	34.18	L1	OFF	19.7
12.993000	---	25.50	50.00	24.50	L1	OFF	20.0
12.993000	27.25	---	60.00	32.75	L1	OFF	20.0

## EUT Information

Report NO : 940901-03  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

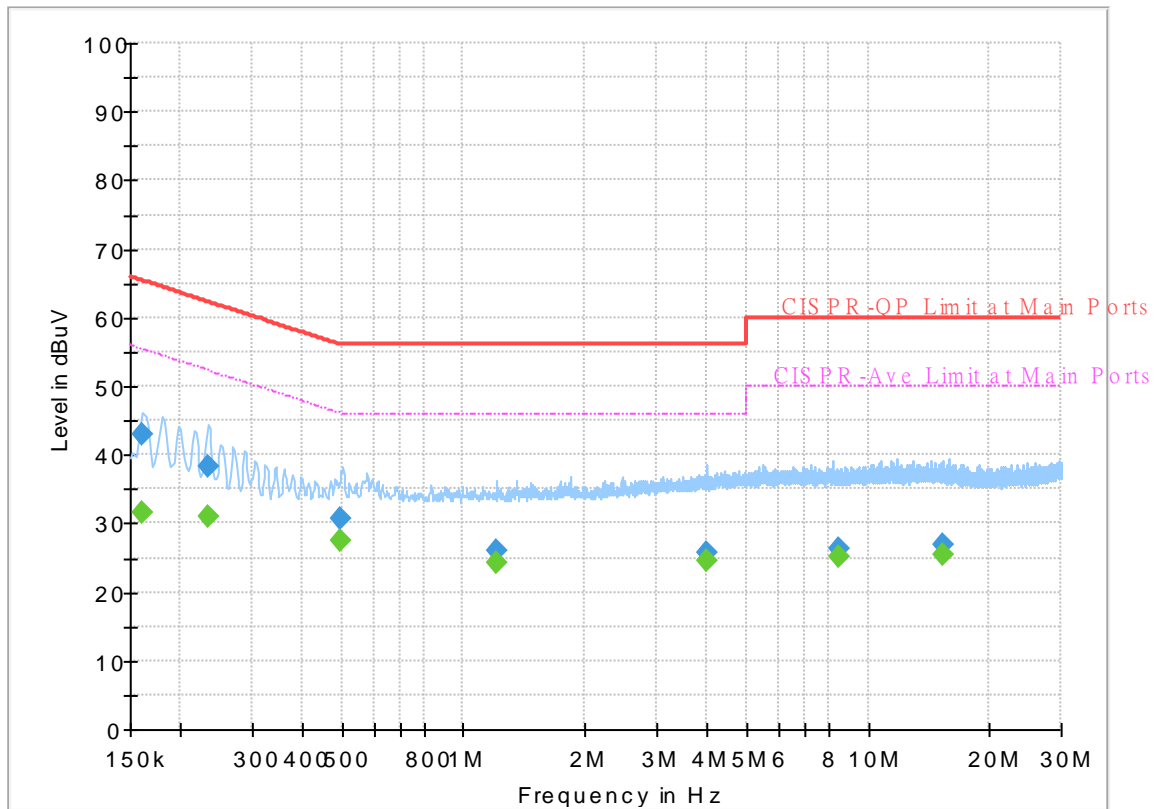

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	31.54	55.40	23.86	N	OFF	19.5
0.161250	42.99	---	65.40	22.41	N	OFF	19.5
0.233250	---	30.88	52.33	21.45	N	OFF	19.5
0.233250	38.42	---	62.33	23.91	N	OFF	19.5
0.498750	---	27.56	46.02	18.46	N	OFF	19.5
0.498750	30.61	---	56.02	25.41	N	OFF	19.5
1.209750	---	24.23	46.00	21.77	N	OFF	19.6
1.209750	26.16	---	56.00	29.84	N	OFF	19.6
3.984000	---	24.61	46.00	21.39	N	OFF	19.7
3.984000	25.79	---	56.00	30.21	N	OFF	19.7
8.499750	---	25.07	50.00	24.93	N	OFF	19.9
8.499750	26.29	---	60.00	33.71	N	OFF	19.9
15.315000	---	25.34	50.00	24.66	N	OFF	20.1
15.315000	27.03	---	60.00	32.97	N	OFF	20.1



### Appendix C. Radiated Spurious Emission

Test Engineer :	HAO Xu, Fu Chen, and Troye Hsieh	Temperature :	21~25°C
		Relative Humidity :	50~56%

2.4GHz 2400~2483.5MHz

BT 1Mbps (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2360.82	42.99	-31.01	74	42.4	27.56	6.67	33.64	348	335	P	H	
		2360.82	18.2	-35.8	54	-	-	-	-	-	-	A	H	
	*	2402	98.92	-	-	98.43	27.4	6.72	33.63	348	335	P	H	
	*	2402	74.13	-	-	-	-	-	-	-	-	A	H	
													H	
			2320.5	42.57	-31.43	74	41.87	27.72	6.63	33.65	260	78	P	V
			2320.5	17.78	-36.22	54	-	-	-	-	-	-	A	V
	*		2402	103.3	-	-	102.81	27.4	6.72	33.63	260	78	P	V
	*		2402	78.51	-	-	-	-	-	-	-	-	A	V
														V
BT CH 39 2441MHz		2315.88	42.21	-31.79	74	41.51	27.74	6.62	33.66	342	318	P	H	
		2315.88	17.42	-36.58	54	-	-	-	-	-	-	A	H	
	*	2441	97.56	-	-	97.09	27.32	6.76	33.61	342	318	P	H	
	*	2441	72.77	-	-	-	-	-	-	-	-	A	H	
			2487.96	42.74	-31.26	74	42.22	27.3	6.81	33.59	342	318	P	H
			2487.96	17.95	-36.05	54	-	-	-	-	-	-	A	H
			2317.28	42.46	-31.54	74	41.77	27.73	6.62	33.66	289	42	P	V
			2317.28	17.67	-36.33	54	-	-	-	-	-	-	A	V
	*		2441	103.27	-	-	102.8	27.32	6.76	33.61	289	42	P	V
	*		2441	78.48	-	-	-	-	-	-	-	-	A	V
			2484.11	43.02	-30.98	74	42.51	27.3	6.81	33.6	289	42	P	V
			2484.11	18.23	-35.77	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	97.16	-	-	96.66	27.3	6.8	33.6	320	360	P	H
	*	2480	72.37	-	-	-	-	-	-	-	-	A	H
		2483.52	45.17	-28.83	74	44.66	27.3	6.81	33.6	320	360	P	H
		2483.52	20.38	-33.62	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	103.81	-	-	103.31	27.3	6.8	33.6	247	55	P	V
	*	2480	79.02	-	-	-	-	-	-	-	-	A	V
		2483.56	49.82	-24.18	74	49.31	27.3	6.81	33.6	247	55	P	V
		2483.56	25.03	-28.97	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz**

**BT 1Mbps (Harmonic @ 3m)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH 00 2402MHz		4804	36.05	-37.95	74	53.11	31.1	10.56	59.16	100	0	P	H	
		4804	11.26	-42.74	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	36.47	-37.53	74	53.53	31.1	10.56	59.16	100	0	P	V	
		4804	11.68	-42.32	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	38.02	-35.98	74	55.1	31.04	10.63	59.18	100	0	P	H	
		4882	13.23	-40.77	54	-	-	-	-	-	-	A	H	
		7323	41.47	-32.53	74	50.44	36.55	13.24	59.17	100	0	P	H	
		7323	16.68	-37.32	54	-	-	-	-	-	-	A	H	
		4882	37.4	-36.6	74	54.48	31.04	10.63	59.18	100	0	P	V	
		4882	12.61	-41.39	54	-	-	-	-	-	-	A	V	
		7323	41.71	-32.29	74	50.68	36.55	13.24	59.17	100	0	P	V	
		7323	16.92	-37.08	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	38.41	-35.59	74	55.17	31.32	10.7	59.19	100	0	P	H	
		4960	13.62	-40.38	54	-	-	-	-	-	-	A	H	
		7440	41.42	-32.58	74	50.44	36.48	13.24	59.12	100	0	P	H	
		7440	16.63	-37.37	54	-	-	-	-	-	-	A	H	
		4960	37.93	-36.07	74	54.69	31.32	10.7	59.19	100	0	P	V	
		4960	13.14	-40.86	54	-	-	-	-	-	-	A	V	
		7440	40.97	-33.03	74	49.99	36.48	13.24	59.12	100	0	P	V	
		7440	16.18	-37.82	54	-	-	-	-	-	-	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													





Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		122.15	24.64	-18.86	43.5	38.1	17.37	1.45	32.3	-	-	P	H	
		149.31	27.33	-16.17	43.5	41.05	16.91	1.6	32.28	-	-	P	H	
		181.32	29.77	-13.73	43.5	45.37	14.74	1.79	32.25	-	-	P	H	
		806	30.96	-15.04	46	30.69	28.18	3.79	31.85	-	-	P	H	
		851.59	32.12	-13.88	46	30.5	29.16	3.9	31.61	-	-	P	H	
		954.41	33.76	-12.24	46	29.52	30.77	4.13	30.85	100	0	P	H	
														H
														H
														H
														H
														H
														H
			40.67	33.28	-6.72	40	46.11	18.7	0.84	32.37	100	0	P	V
			76.56	23.52	-16.48	40	41.96	12.7	1.15	32.34	-	-	P	V
			180.35	25.6	-17.9	43.5	41.18	14.78	1.78	32.26	-	-	P	V
			864.2	32.08	-13.92	46	30.23	29.29	3.93	31.54	-	-	P	V
			921.43	32.74	-13.26	46	30.48	29.17	4.06	31.15	-	-	P	V
			959.26	34.06	-11.94	46	29.55	30.97	4.14	30.8	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**2.4GHz 2400~2483.5MHz**

**BT 2Mbps (Band Edge @ 3m)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2361.24	42.35	-31.65	74	41.75	27.56	6.68	33.64	307	337	P	H	
		2361.24	17.59	-36.41	54	-	-	-	-	-	-	A	H	
	*	2402	96.78	-	-	96.29	27.4	6.72	33.63	307	337	P	H	
	*	2402	72.02	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2318.715	42.59	-31.41	74	41.89	27.73	6.63	33.66	302	41	P	V
			2318.715	17.83	-36.17	54	-	-	-	-	-	-	A	V
	*		2402	102.12	-	-	101.63	27.4	6.72	33.63	302	41	P	V
	*		2402	77.36	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2380.14	42.27	-31.73	74	41.72	27.48	6.7	33.63	335	335	P	H	
		2380.14	17.51	-36.49	54	-	-	-	-	-	-	A	H	
	*	2441	97.34	-	-	96.87	27.32	6.76	33.61	335	335	P	H	
	*	2441	72.58	-	-	-	-	-	-	-	-	A	H	
			2498.04	42.3	-31.7	74	41.77	27.3	6.82	33.59	335	335	P	H
			2498.04	17.54	-36.46	54	-	-	-	-	-	-	A	H
			2322.74	42.38	-31.62	74	41.69	27.71	6.63	33.65	293	40	P	V
			2322.74	17.62	-36.38	54	-	-	-	-	-	-	A	V
	*		2441	103.14	-	-	102.67	27.32	6.76	33.61	293	40	P	V
	*		2441	78.38	-	-	-	-	-	-	-	-	A	V
			2491.74	42.14	-31.86	74	41.61	27.3	6.82	33.59	293	40	P	V
			2491.74	17.38	-36.62	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	95.23	-	-	94.73	27.3	6.8	33.6	322	354	P	H	
	*	2480	70.47	-	-	-	-	-	-	-	-	A	H	
		2483.96	42.71	-31.29	74	42.2	27.3	6.81	33.6	322	354	P	H	
		2483.96	17.95	-36.05	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	101.69	-	-	101.19	27.3	6.8	33.6	284	75	P	V	
	*	2480	76.93	-	-	-	-	-	-	-	-	-	A	V
		2483.6	46.65	-27.35	74	46.14	27.3	6.81	33.6	284	75	P	V	
		2483.6	21.89	-32.11	54	-	-	-	-	-	-	A	V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>													



**2.4GHz 2400~2483.5MHz**

**BT 2Mbps (Harmonic @ 3m)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					Line	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH 00 2402MHz		4804	36.11	-37.89	74	53.17	31.1	10.56	59.16	100	0	P	H	
		4804	11.35	-42.62	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	39.99	-34.01	74	57.05	31.1	10.56	59.16	100	0	P	V	
		4804	15.23	-38.77	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	37.19	-36.81	74	54.27	31.04	10.63	59.18	100	0	P	H	
		4882	12.43	-41.57	54	-	-	-	-	-	-	A	H	
		7323	41.34	-32.66	74	50.31	36.55	13.24	59.17	100	0	P	H	
		7323	16.58	-37.42	54	-	-	-	-	-	-	A	H	
		4882	37.01	-36.99	74	54.09	31.04	10.63	59.18	100	0	P	V	
		4882	12.25	-41.75	54	-	-	-	-	-	-	-	A	V
		7323	41.83	-32.17	74	50.8	36.55	13.24	59.17	100	0	P	V	
		7323	17.07	-36.93	54	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	38.59	-35.41	74	55.35	31.32	10.7	59.19	100	0	P	H	
		4960	13.83	-40.17	54	-	-	-	-	-	-	A	H	
		7440	41.32	-32.68	74	50.34	36.48	13.24	59.12	100	0	P	H	
		7440	16.56	-37.44	54	-	-	-	-	-	-	A	H	
		4960	37.85	-36.15	74	54.61	31.32	10.7	59.19	100	0	P	V	
		4960	13.09	-40.91	54	-	-	-	-	-	-	A	V	
		7440	41.48	-32.52	74	50.5	36.48	13.24	59.12	100	0	P	V	
		7440	16.72	-37.28	54	-	-	-	-	-	-	-	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz**

**BT 3Mbps (Band Edge @ 3m)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2352.525	42.66	-31.34	74	42.04	27.59	6.67	33.64	308	337	P	H	
		2352.525	17.9	-36.1	54	-	-	-	-	-	-	A	H	
	*	2402	96.69	-	-	96.2	27.4	6.72	33.63	308	337	P	H	
	*	2402	71.93	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2360.085	42.57	-31.43	74	41.98	27.56	6.67	33.64	328	78	P	V
			2360.085	17.81	-36.19	54	-	-	-	-	-	-	A	V
	*		2402	102.97	-	-	102.48	27.4	6.72	33.63	328	78	P	V
	*		2402	78.21	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2359.28	42.63	-31.37	74	42.04	27.56	6.67	33.64	336	337	P	H	
		2359.28	17.87	-36.13	54	-	-	-	-	-	-	A	H	
	*	2441	99.31	-	-	98.84	27.32	6.76	33.61	336	337	P	H	
	*	2441	74.55	-	-	-	-	-	-	-	-	A	H	
			2487.33	42.77	-31.23	74	42.25	27.3	6.81	33.59	336	337	P	H
			2487.33	18.01	-35.99	54	-	-	-	-	-	-	A	H
			2363.48	42.92	-31.08	74	42.33	27.55	6.68	33.64	284	76	P	V
			2363.48	18.16	-35.84	54	-	-	-	-	-	-	A	V
	*		2441	102.66	-	-	102.19	27.32	6.76	33.61	284	76	P	V
	*		2441	77.9	-	-	-	-	-	-	-	-	A	V
			2491.95	42.83	-31.17	74	42.3	27.3	6.82	33.59	284	76	P	V
			2491.95	18.07	-35.93	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	97.16	-	-	96.66	27.3	6.8	33.6	320	360	P	H
	*	2480	72.4	-	-	-	-	-	-	-	-	A	H
		2483.52	45.17	-28.83	74	44.66	27.3	6.81	33.6	320	360	P	H
		2483.52	20.41	-33.59	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	101.69	-	-	101.19	27.3	6.8	33.6	284	75	P	V
	*	2480	76.93	-	-	-	-	-	-	-	-	A	V
		2483.6	45.65	-28.35	74	45.14	27.3	6.81	33.6	284	75	P	V
		2483.6	20.89	-33.11	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz**

**BT 3Mbps (Harmonic @ 3m)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH 00 2402MHz		4804	37.48	-36.52	74	54.54	31.1	10.56	59.16	100	0	P	H	
		4804	12.72	-41.28	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	36.9	-37.1	74	53.96	31.1	10.56	59.16	100	0	P	V	
		4804	12.14	-41.86	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	37.25	-36.75	74	54.33	31.04	10.63	59.18	100	0	P	H	
		4882	12.49	-41.51	54	-	-	-	-	-	-	A	H	
		7323	41.67	-32.33	74	50.64	36.55	13.24	59.17	100	0	P	H	
		7323	16.91	-37.09	54	-	-	-	-	-	-	A	H	
		4882	36.85	-37.15	74	53.93	31.04	10.63	59.18	100	0	P	V	
		4882	12.09	-41.91	54	-	-	-	-	-	-	-	A	V
		7323	41.33	-32.67	74	50.3	36.55	13.24	59.17	100	0	P	V	
		7323	16.57	-37.43	54	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	38.88	-35.12	74	55.64	31.32	10.7	59.19	100	0	P	H	
		4960	14.12	-39.88	54	-	-	-	-	-	-	A	H	
		7440	41.66	-32.34	74	50.68	36.48	13.24	59.12	100	0	P	H	
		7440	16.9	-37.1	54	-	-	-	-	-	-	A	H	
		4960	37.93	-36.07	74	54.69	31.32	10.7	59.19	100	0	P	V	
		4960	13.17	-40.83	54	-	-	-	-	-	-	A	V	
		7440	41.83	-32.17	74	50.85	36.48	13.24	59.12	100	0	P	V	
		7440	17.07	-36.93	54	-	-	-	-	-	-	-	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots



Test Engineer :	HAO Xu, Fu Chen, and Troye Hsieh	Temperature :	21~25°C
		Relative Humidity :	50~56%

### 2.4GHz 2400~2483.5MHz

### BT 1Mbps (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>

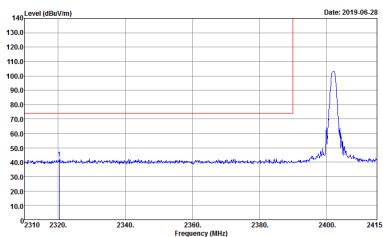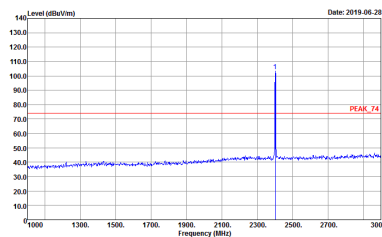

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 940901-03</p>
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p><b>Left blank</b></p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p><b>Left blank</b></p>

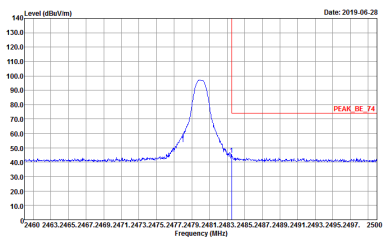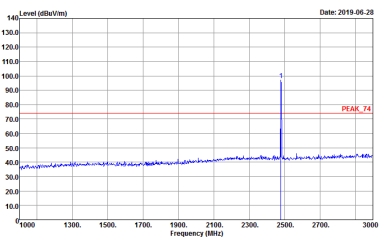

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY          Condition : PEAK_BE_74 3m HORN 91200-JF HORIZONTAL          Detector : Peak          Project : 940901-03</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-JF HORIZONTAL          Detector : Peak          Project : 940901-03</p>

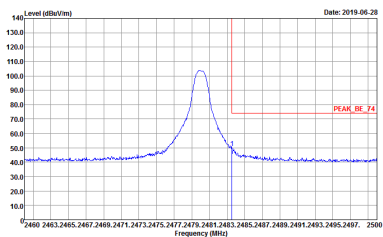
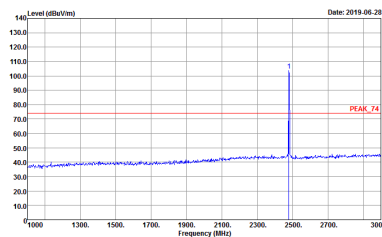


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
<b>Peak</b>	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-JF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-JF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>





2.4GHz 2400~2483.5MHz

BT 1Mbps (Harmonic @ 3m)

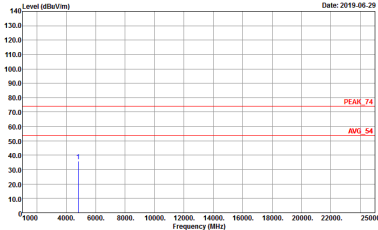
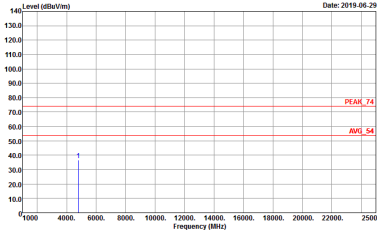
BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m BT CH00 2402MHz	
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>



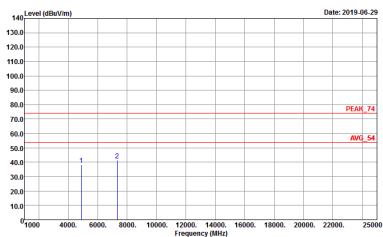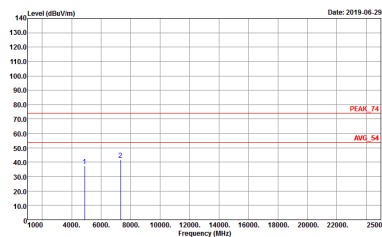

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>BT CH39 2441MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 940901-03</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 940901-03</p>

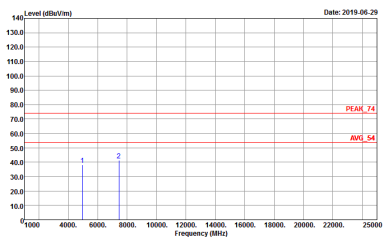
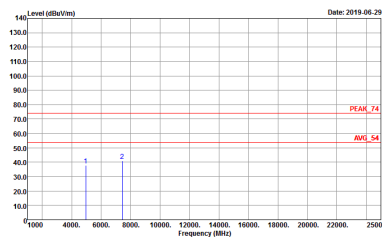


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH78 2480MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY  Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL  Detector : Peak  Project : 940901-03</p>	 <p>Site : 03CH11-HY  Condition : PEAK_74 3m HORN 91200-HF VERTICAL  Detector : Peak  Project : 940901-03</p>





Emission below 1GHz

2.4GHz BT (LF)

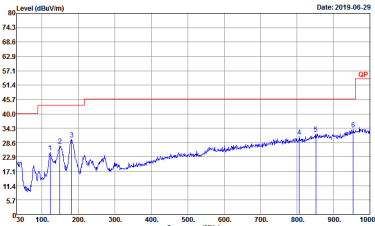
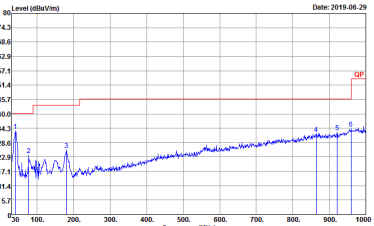
BT	2.4GHz 2400~2483.5MHz BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CHI1-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CHI1-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 940901-03</p>



2.4GHz 2400~2483.5MHz  
BT 2Mbps (Band Edge @ 3m)

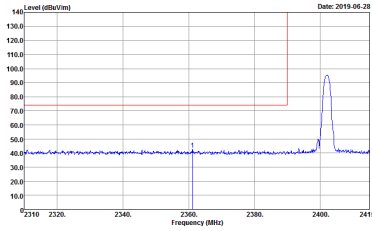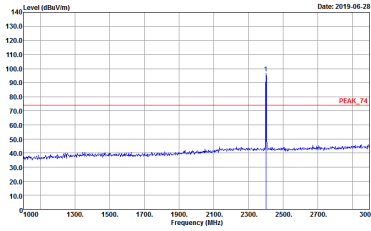BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>

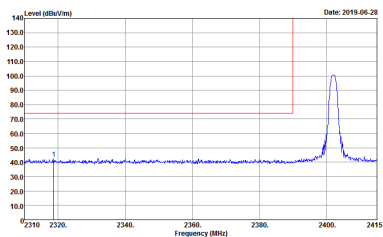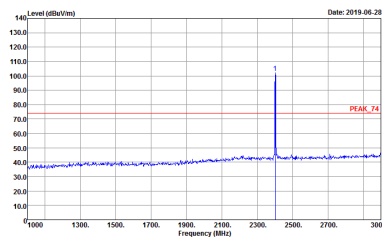

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 940901-03</p>
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p><b>Left blank</b></p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Date: 2019-06-28</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p>Date: 2019-06-28</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>
<p><b>Peak</b></p>	<p>Date: 2019-06-28</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p><b>Left blank</b></p>

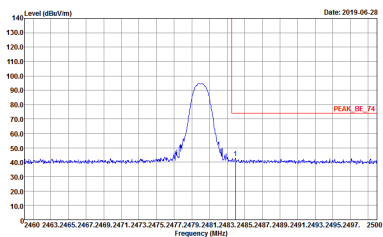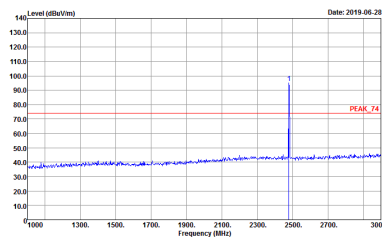

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-JF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-JF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>



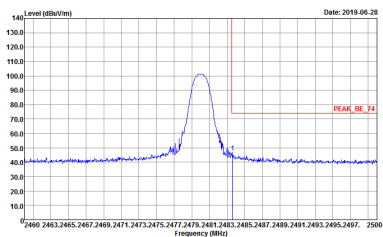
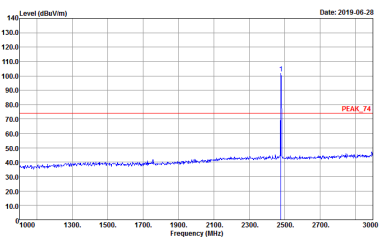


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY          Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 940901-03</p>	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 940901-03</p>





**2.4GHz 2400~2483.5MHz**



**BT 2Mbps (Harmonic @ 3m)**

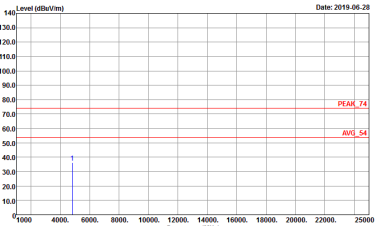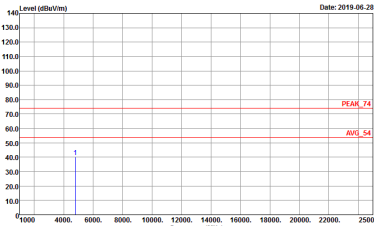BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m BT CH00 2402MHz	
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>

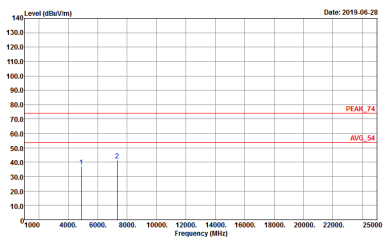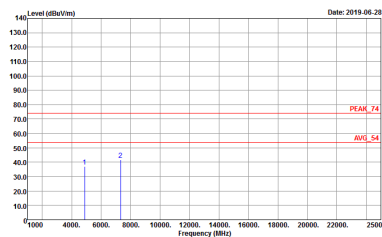

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>BT CH39 2441MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 940901-03</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 940901-03</p>

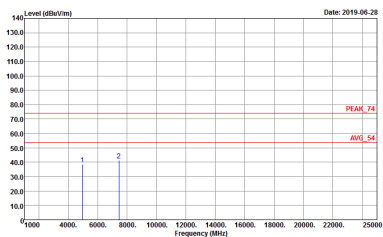
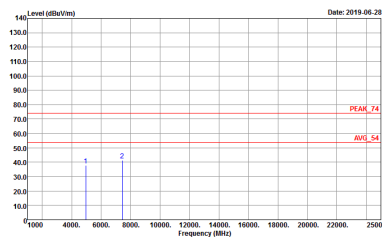


<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>BT CH78 2480MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 940901-03</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 940901-03</p>





2.4GHz 2400~2483.5MHz

BT 3Mbps (Band Edge @ 3m)

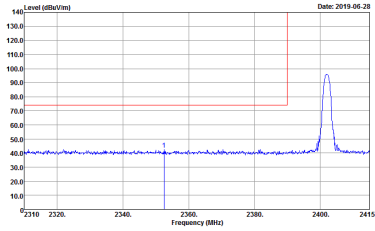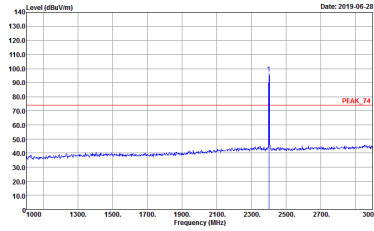BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL SFW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>	 <p>Date: 2019-06-28</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL SFW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>

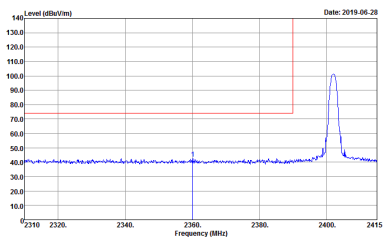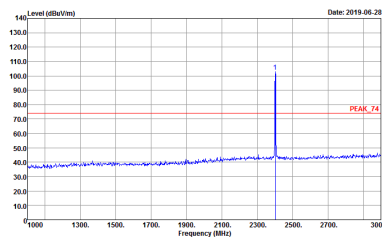

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-JF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-JF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 940901-03</p>



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p><b>Left blank</b></p>



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Vertical		Fundamental
Peak	<p>Date: 2019-06-28</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	<p>Date: 2019-06-28</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>
Peak	<p>Date: 2019-06-28</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 940901-03</p>	Left blank







BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
Horizontal		Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-JF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-JF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
	Vertical	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-JF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-JF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 940901-03</p>



**2.4GHz 2400~2483.5MHz  
BT 3Mbps (Harmonic @ 3m)**

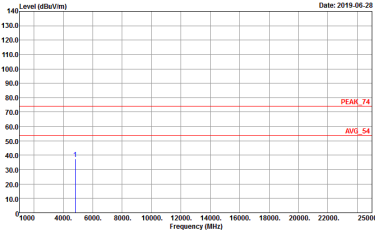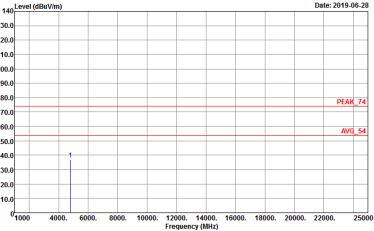BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m BT CH00 2402MHz	
	Horizontal	Vertical
<p><b>Peak</b> <b>Avg.</b></p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 940901-03</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 940901-03</p>

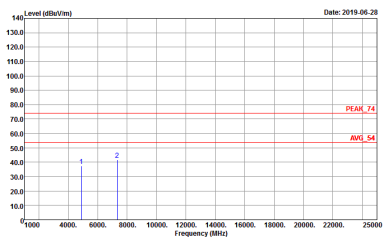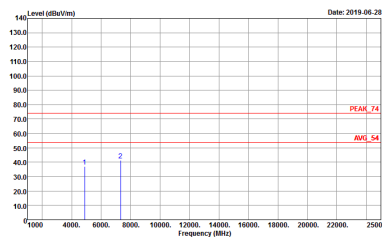

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>BT CH39 2441MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 940901-03</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 940901-03</p>




<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>BT CH78 2480MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 940901-03</p>	<p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 940901-03</p>




# Appendix E. Duty Cycle Plots

<1Mbps>

DH5 on time (One Pulse) Plot on Channel 39

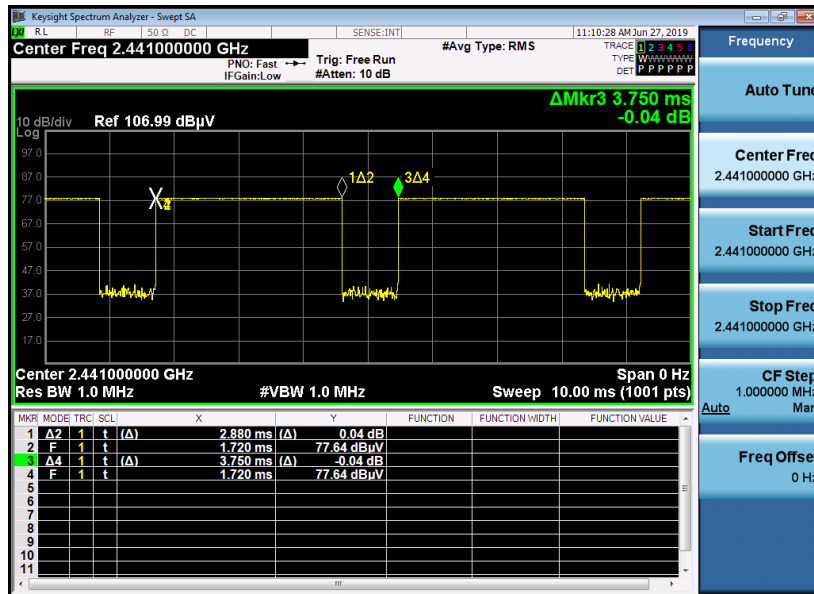

on time (Count Pulses) Plot on Channel 39

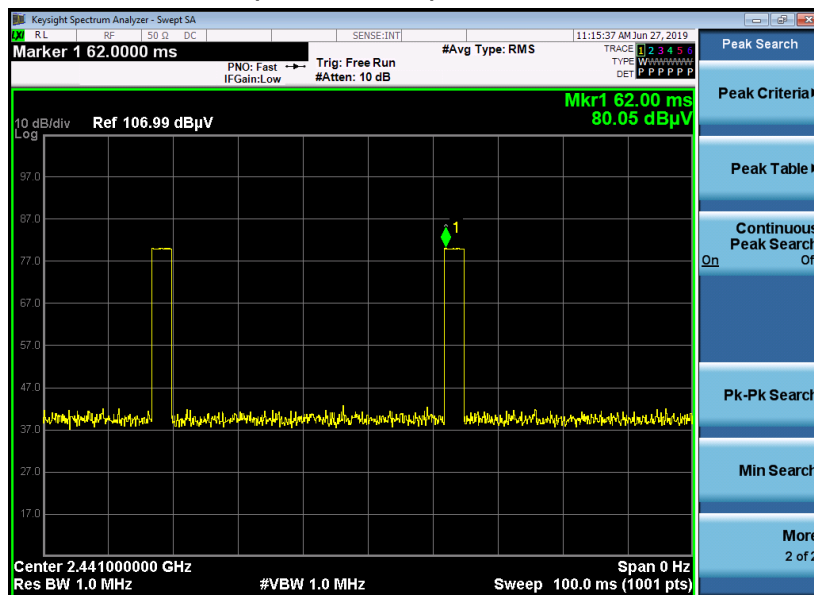


**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.




<2Mbps>

2DH5 on time (One Pulse) Plot on Channel 39

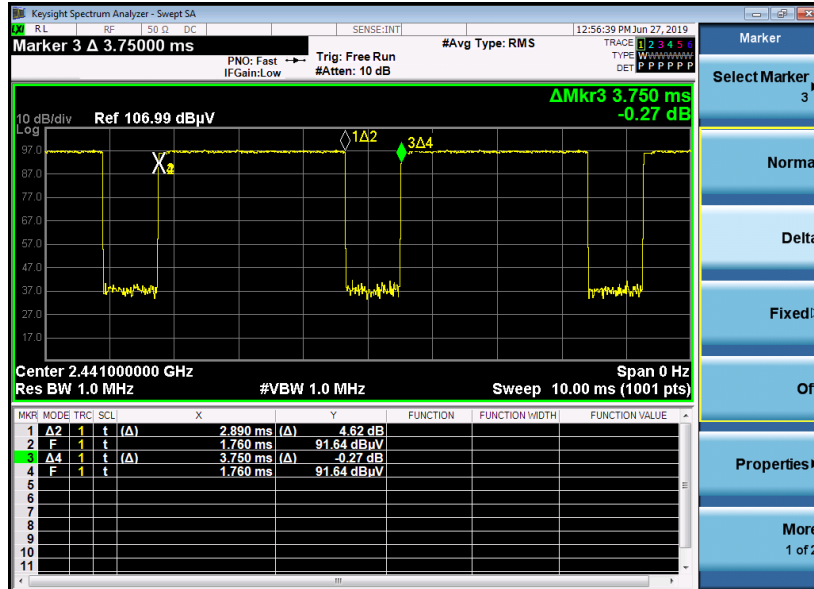

on time (Count Pulses) Plot on Channel 39

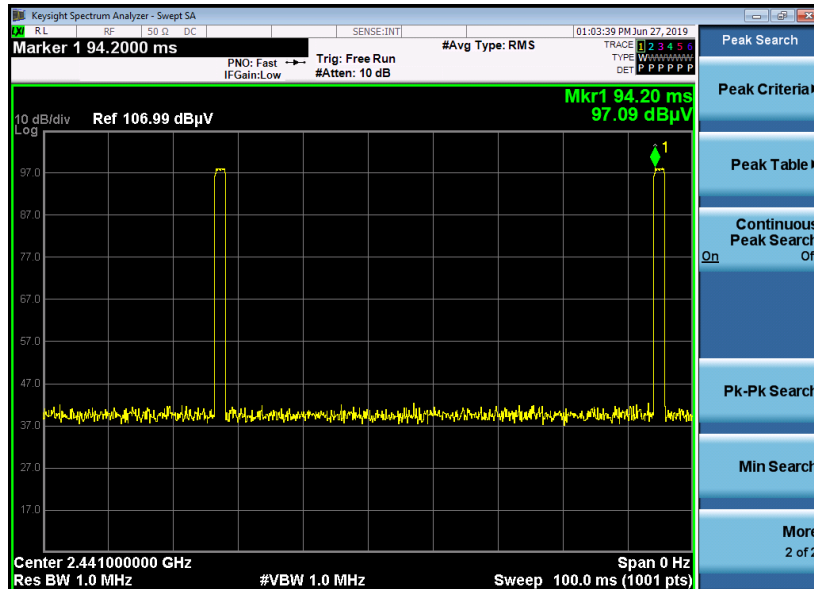


Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.89 / 100 = 5.78\%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 2DH5 has the highest duty cycle worst case and is reported.




<3Mbps>

3DH5 on time (One Pulse) Plot on Channel 39

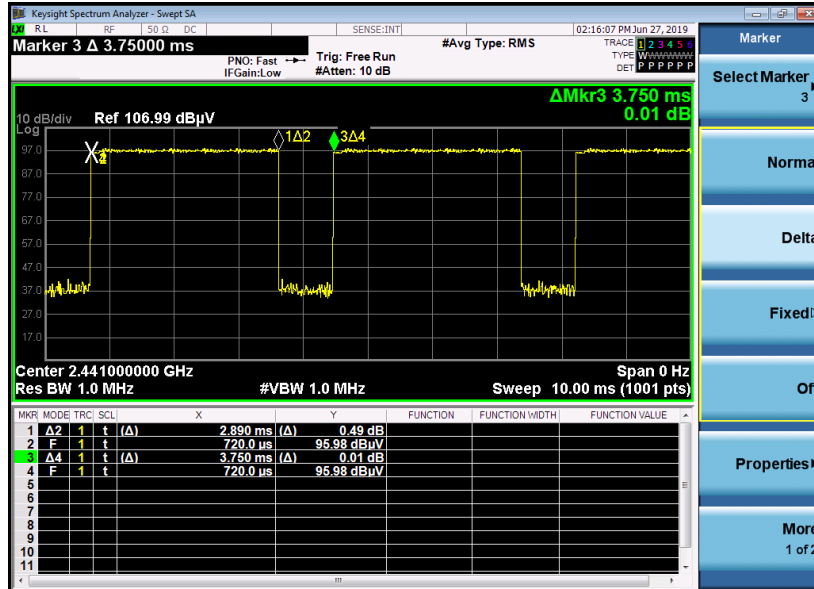

on time (Count Pulses) Plot on Channel 39

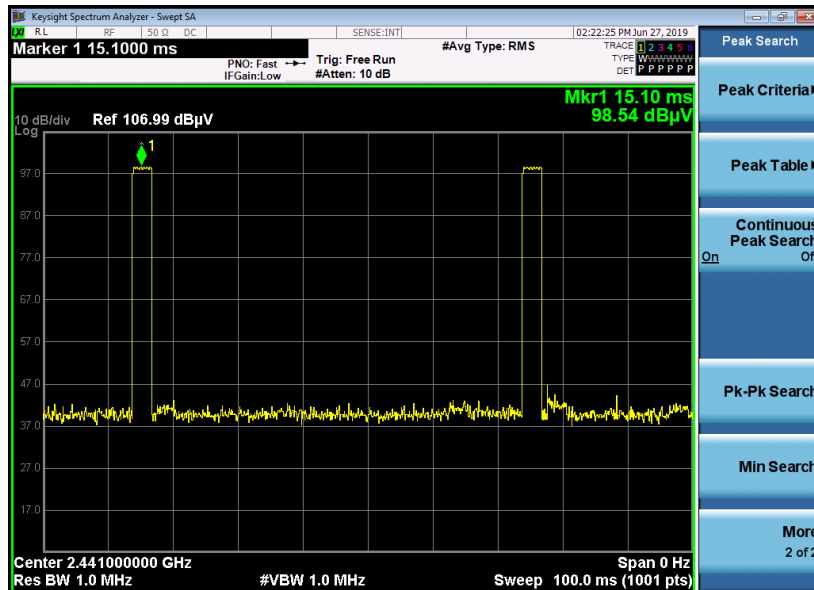

Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.89 / 100 = 5.78\%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.





**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

—————THE END—————