



Plot 7-269. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 91)

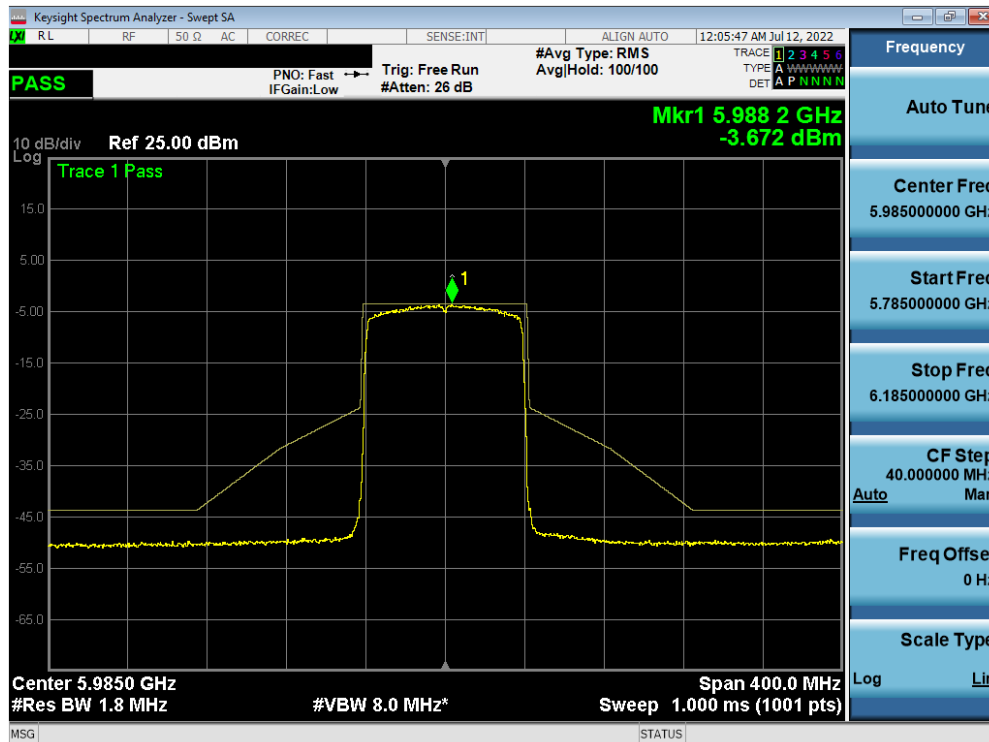


Plot 7-270. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 7)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 163 of 234

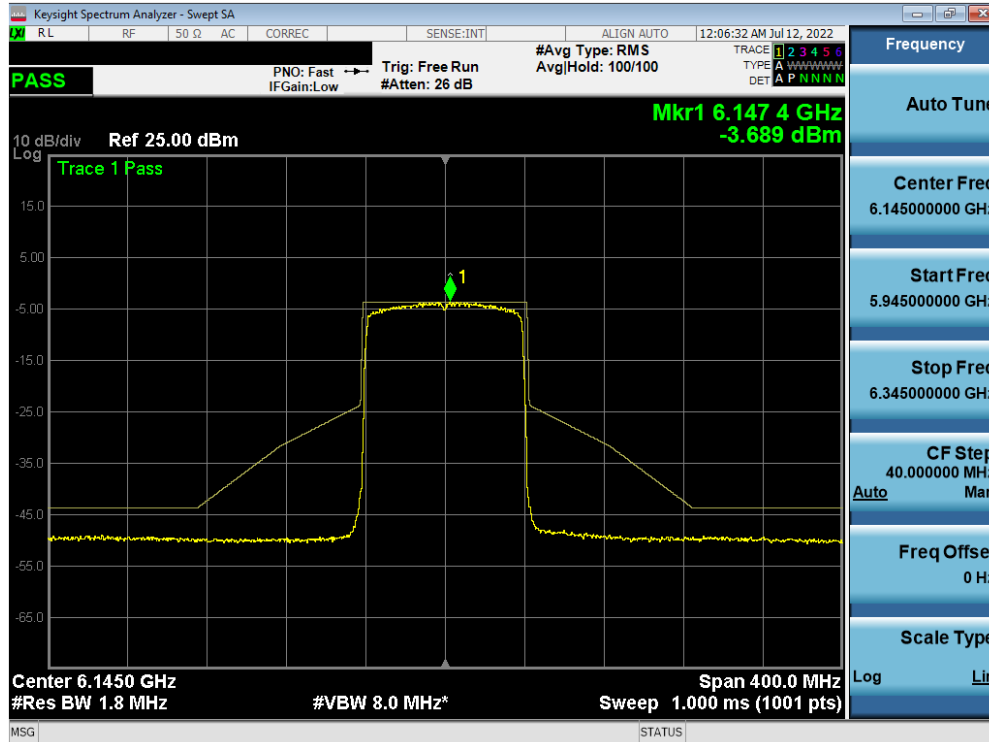


Plot 7-271. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

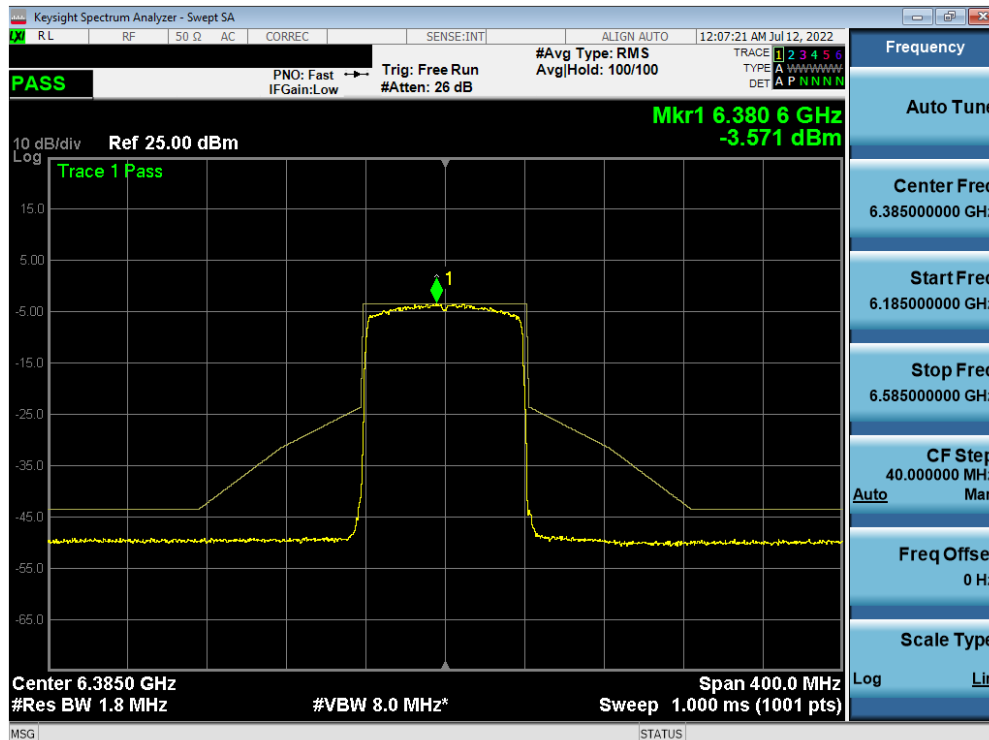


Plot 7-272. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 87)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 164 of 234

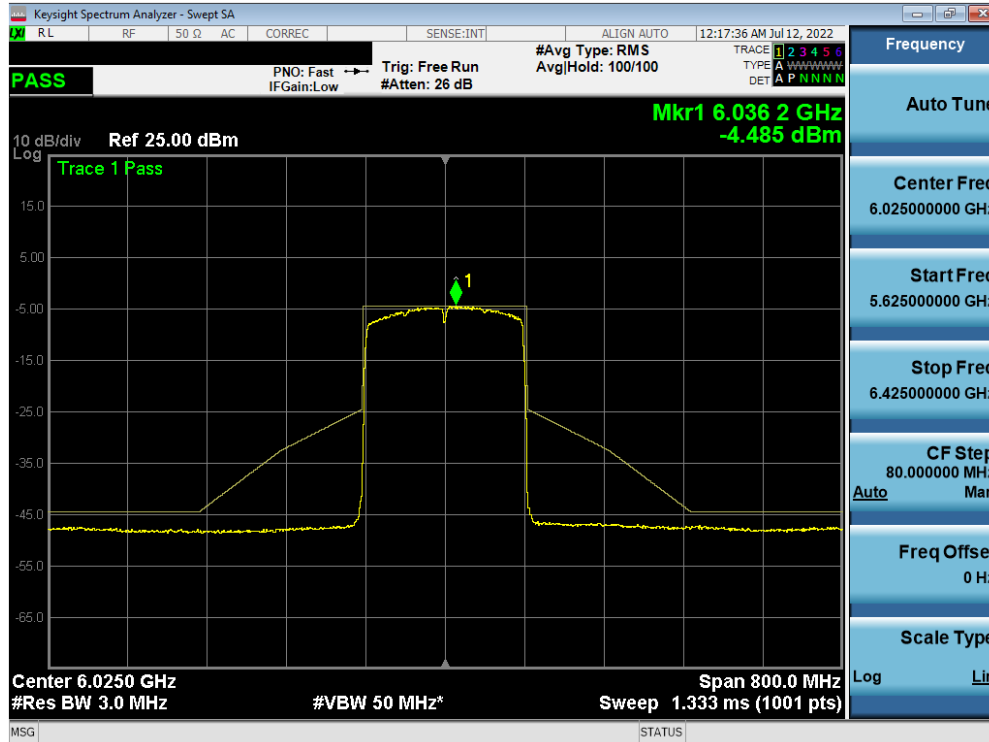


Plot 7-273. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 15)

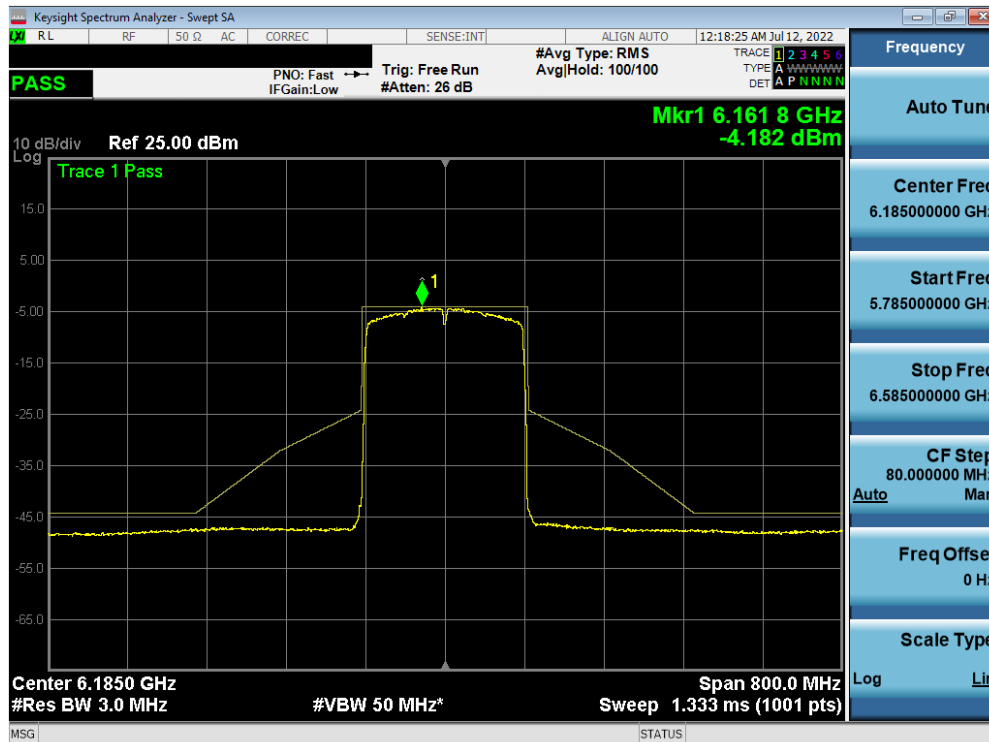

Plot 7-274. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 165 of 234

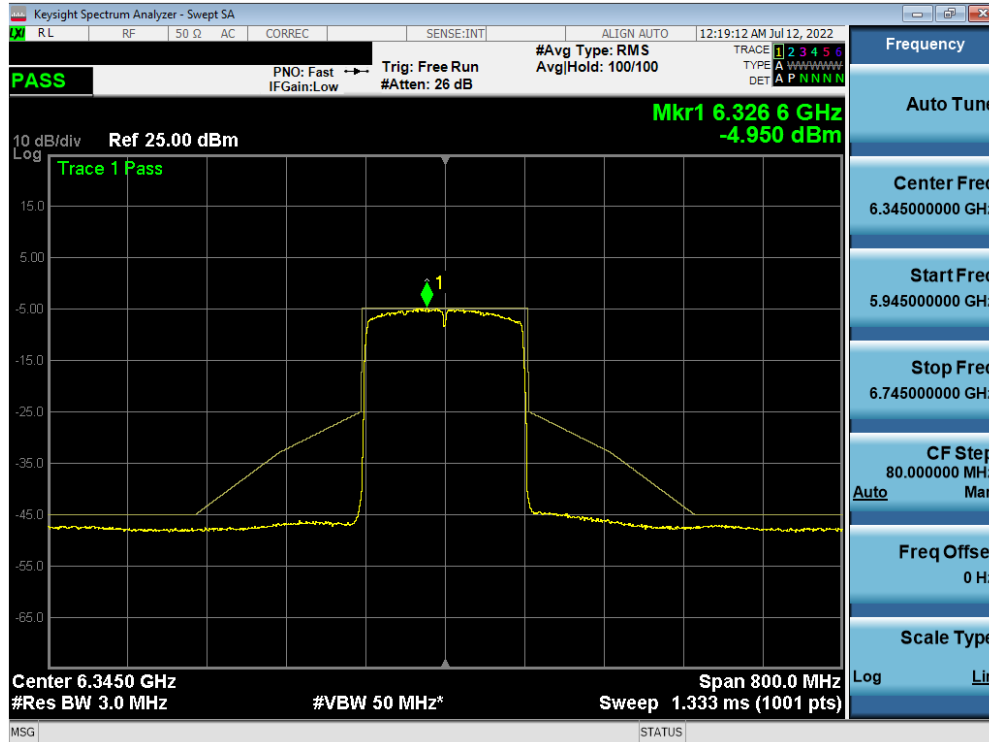


Plot 7-275. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 79)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 166 of 234

MIMO Antenna-2 In-Band Emission Plot Measurement - (UNII Band 6)

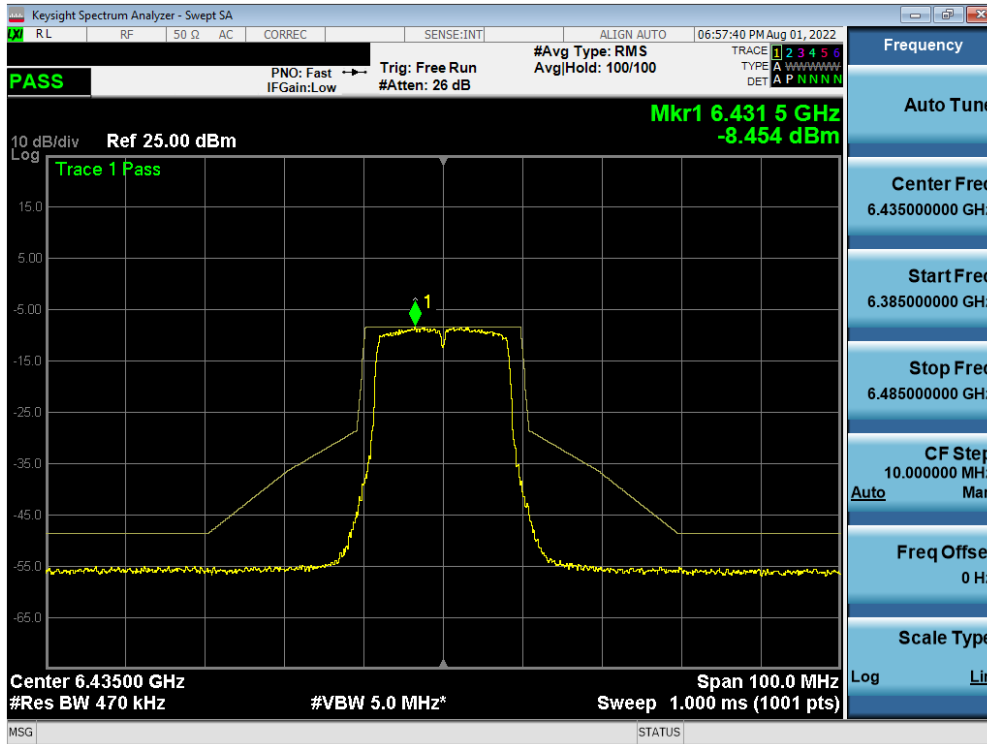


Plot 7-276. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 97)

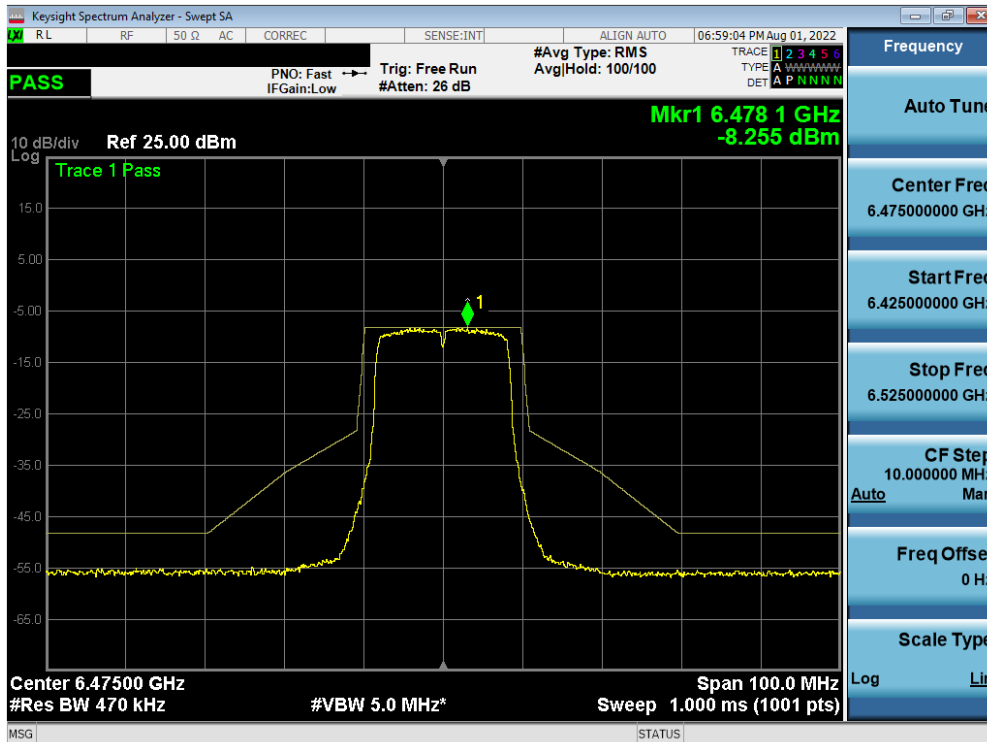


Plot 7-277. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 105)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 167 of 234

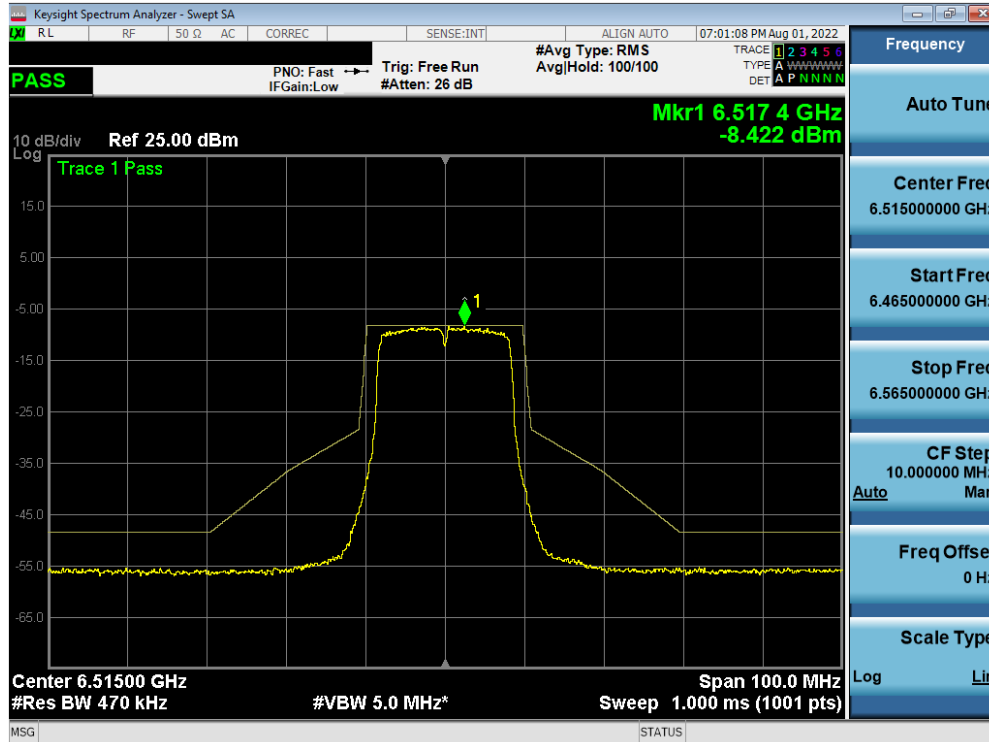


Plot 7-278. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 113)

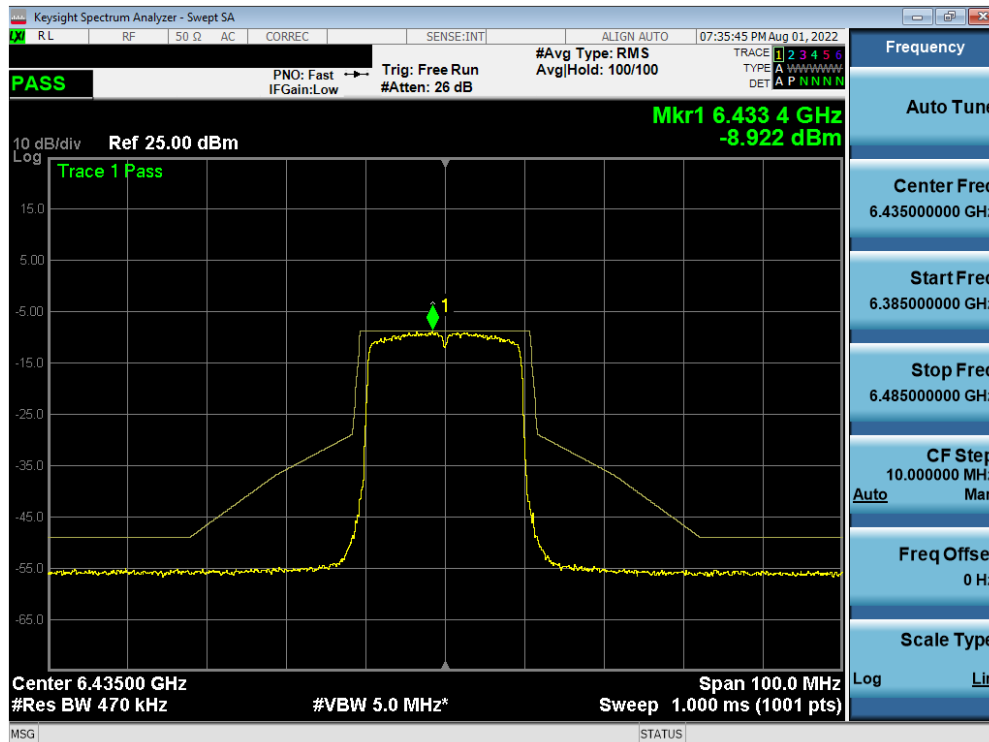


Plot 7-279. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 6) – Ch. 97)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 168 of 234

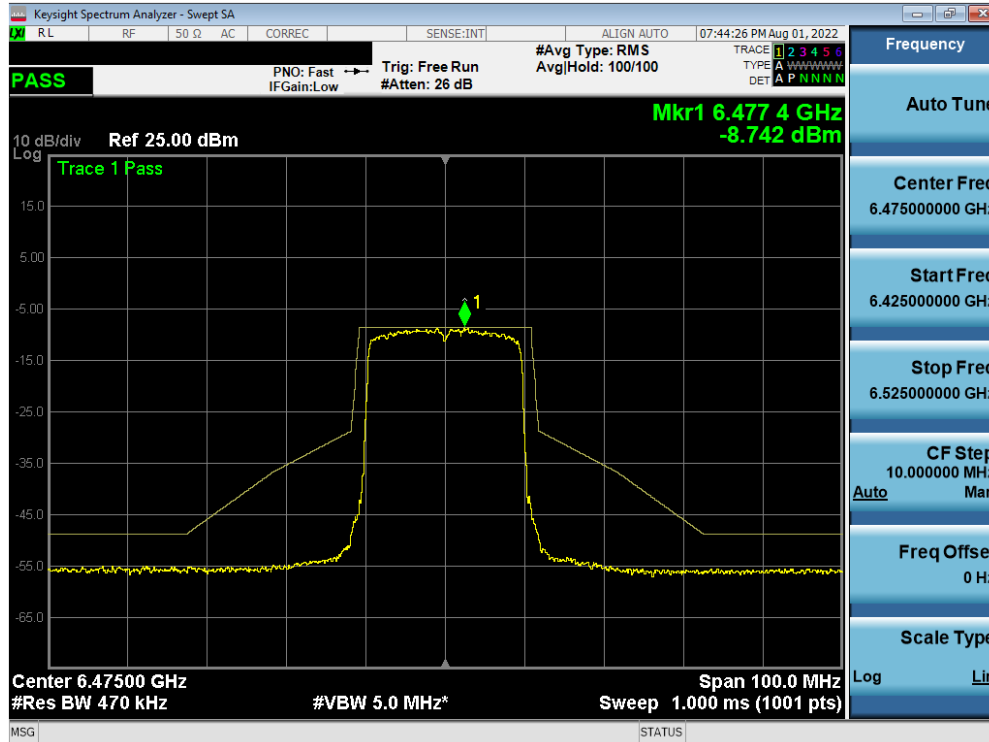


Plot 7-280. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 6) – Ch. 105)

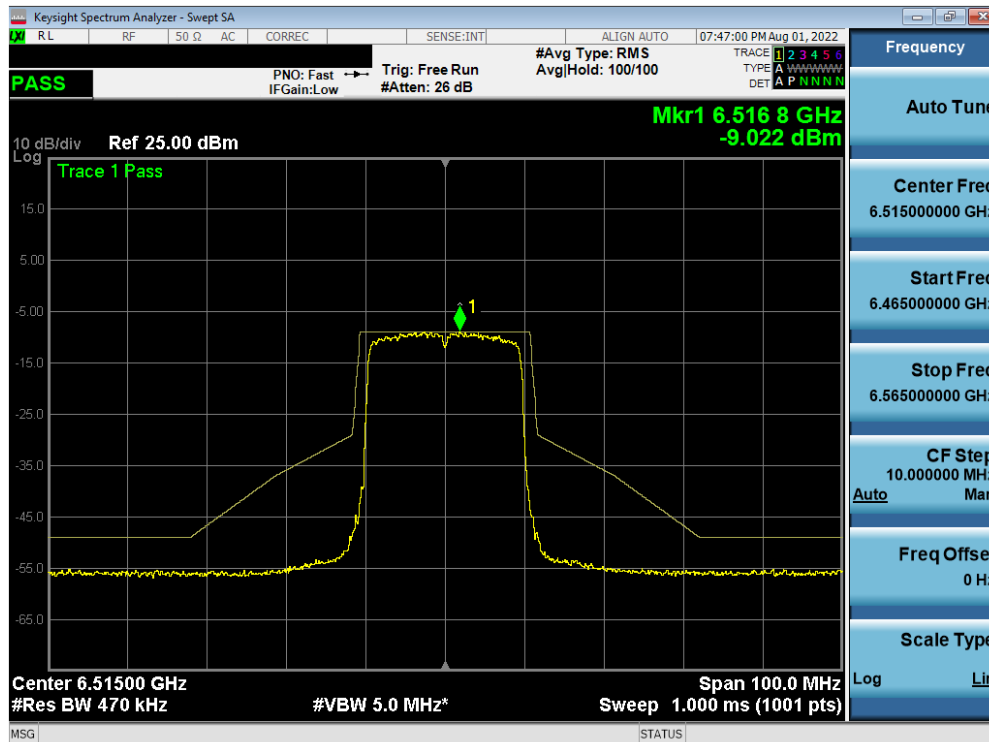


Plot 7-281. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 6) – Ch. 113)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 169 of 234

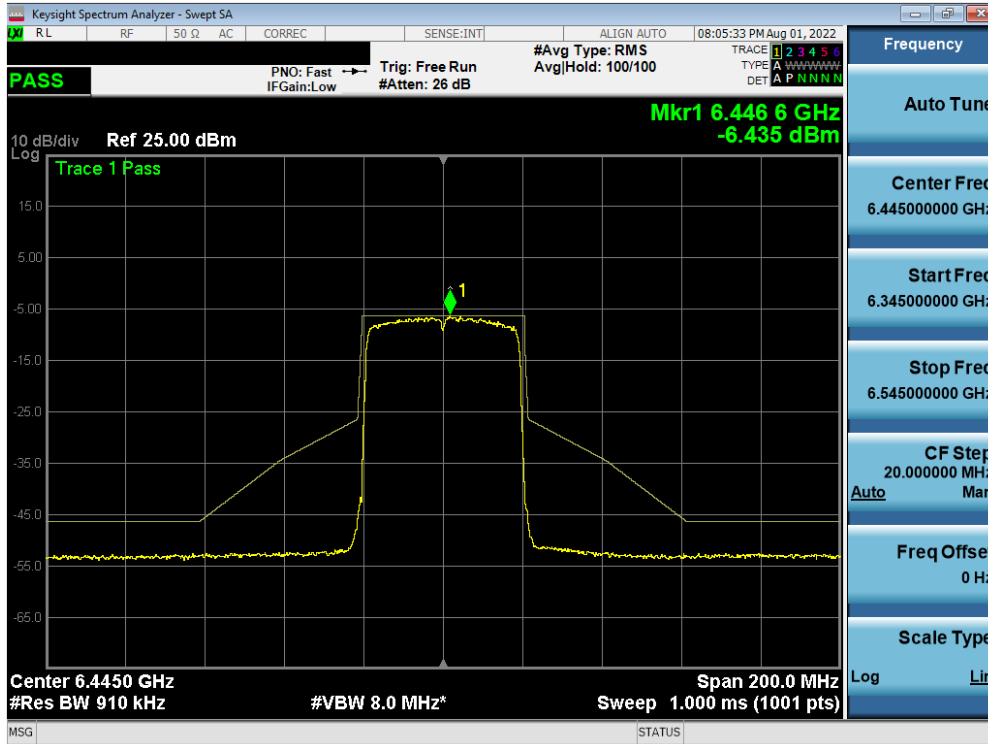


Plot 7-282. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 99)

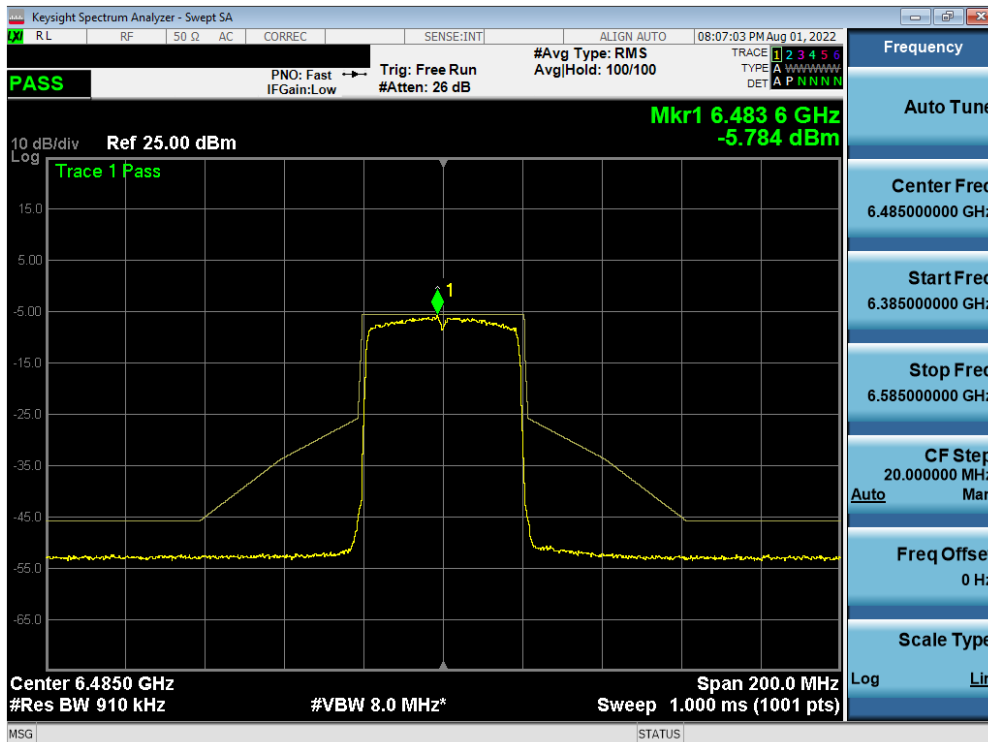


Plot 7-283. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 170 of 234

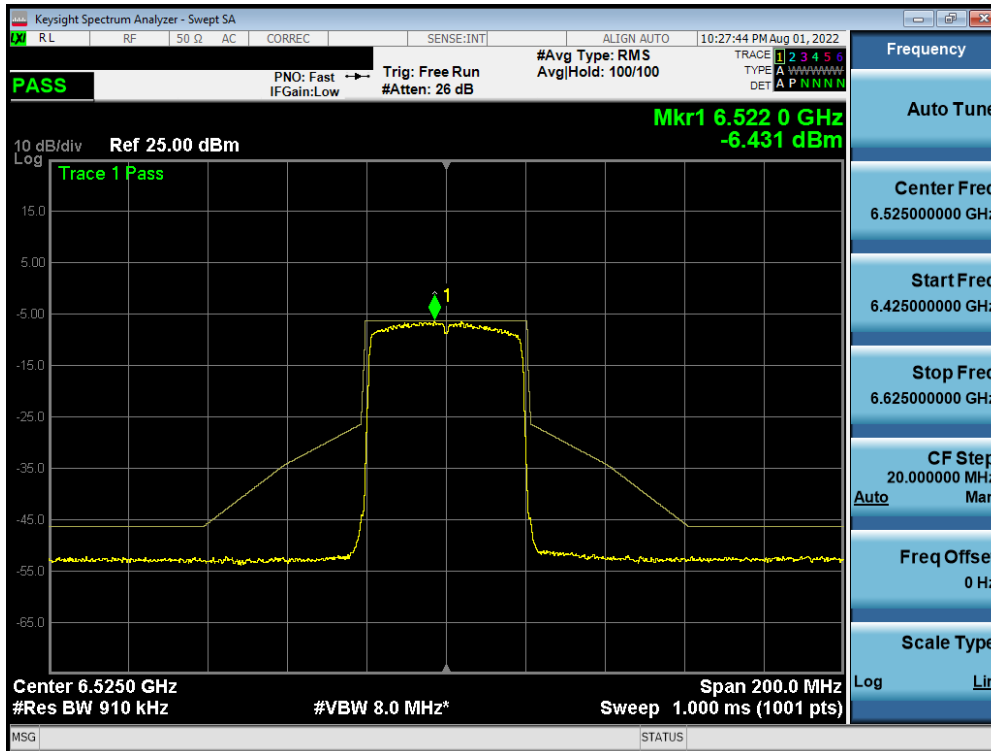


Plot 7-284. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 115)

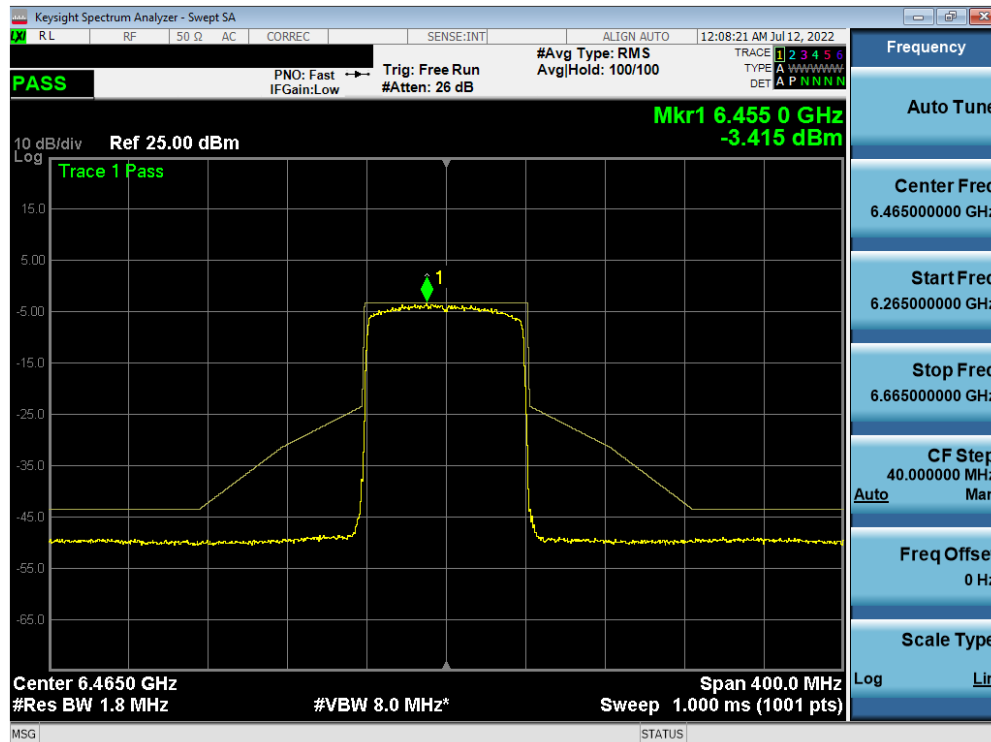

Plot 7-285. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 6) – Ch. 103)


FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 171 of 234

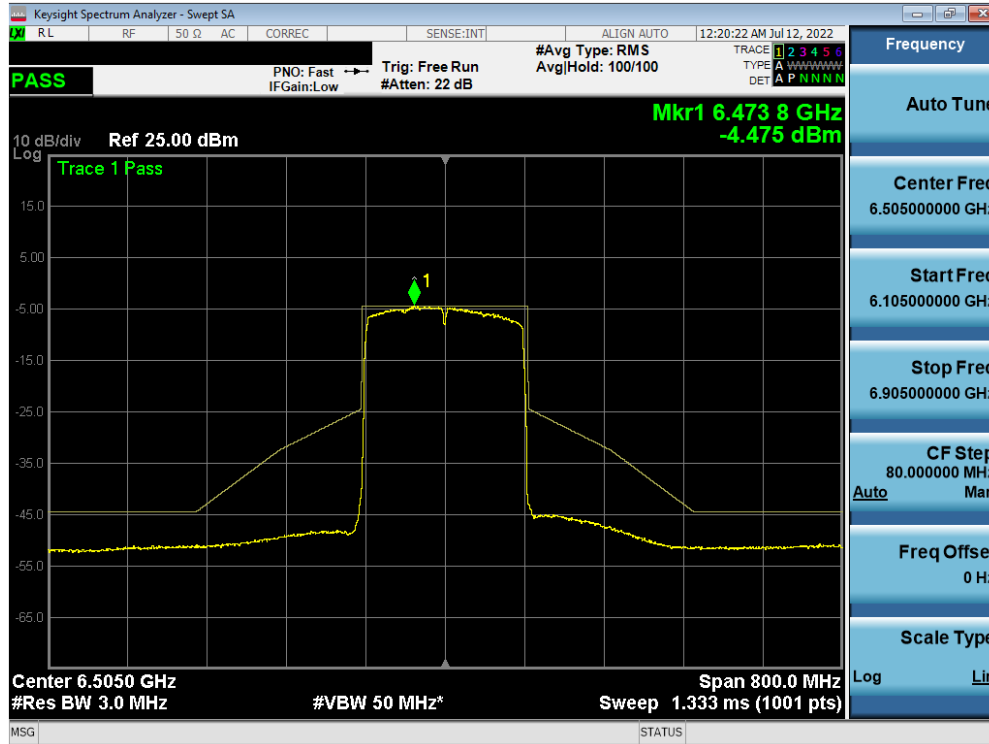


Plot 7-286. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 172 of 234

MIMO Antenna-2 In-Band Emission Plot Measurement - (UNII Band 7)

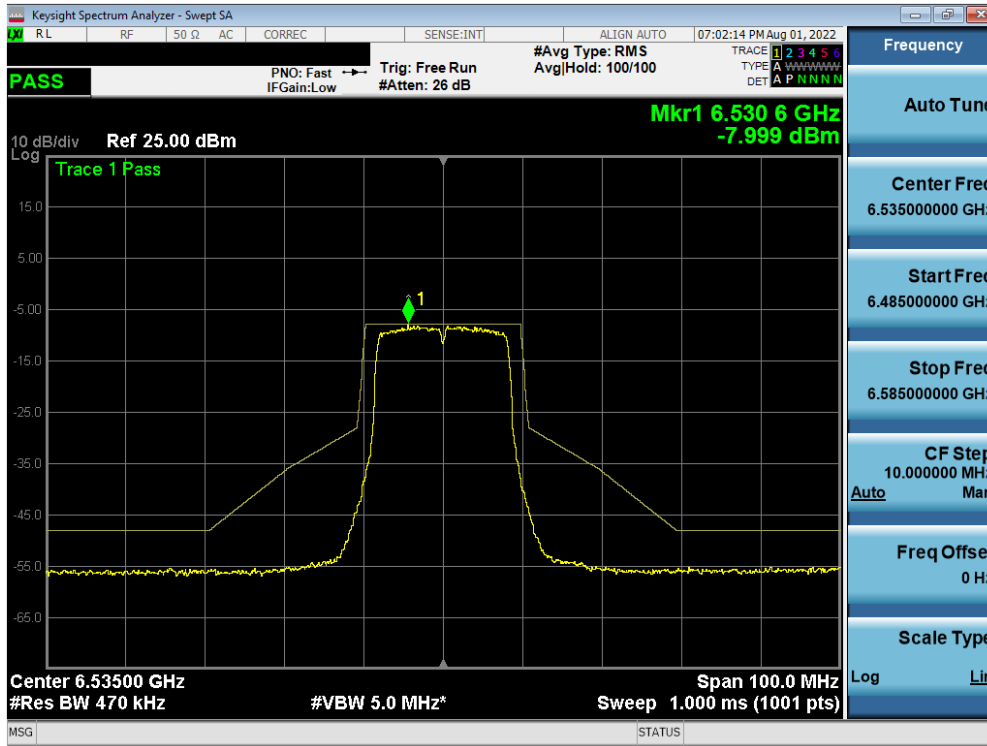


Plot 7-287. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 117)

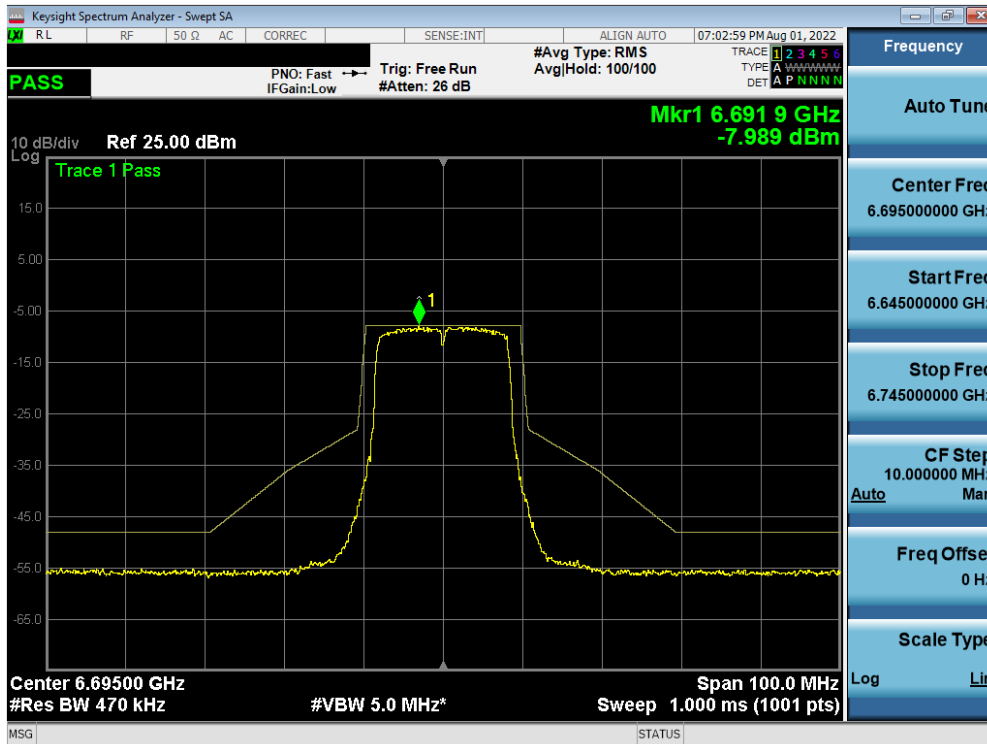


Plot 7-288. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 149)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 173 of 234

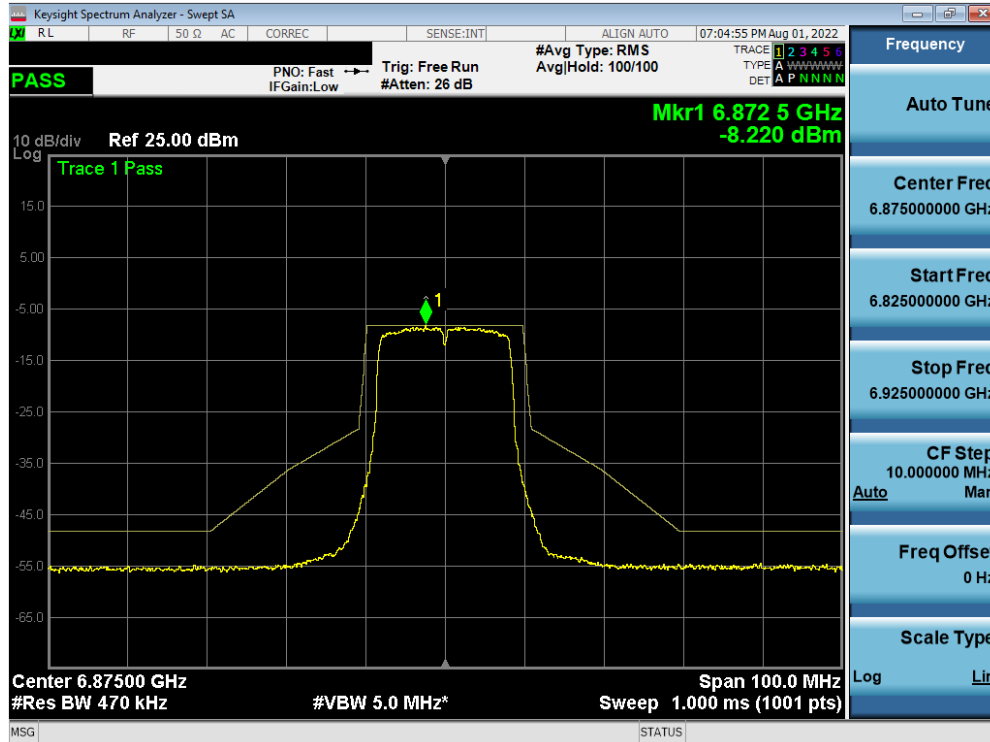


Plot 7-289. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 185)

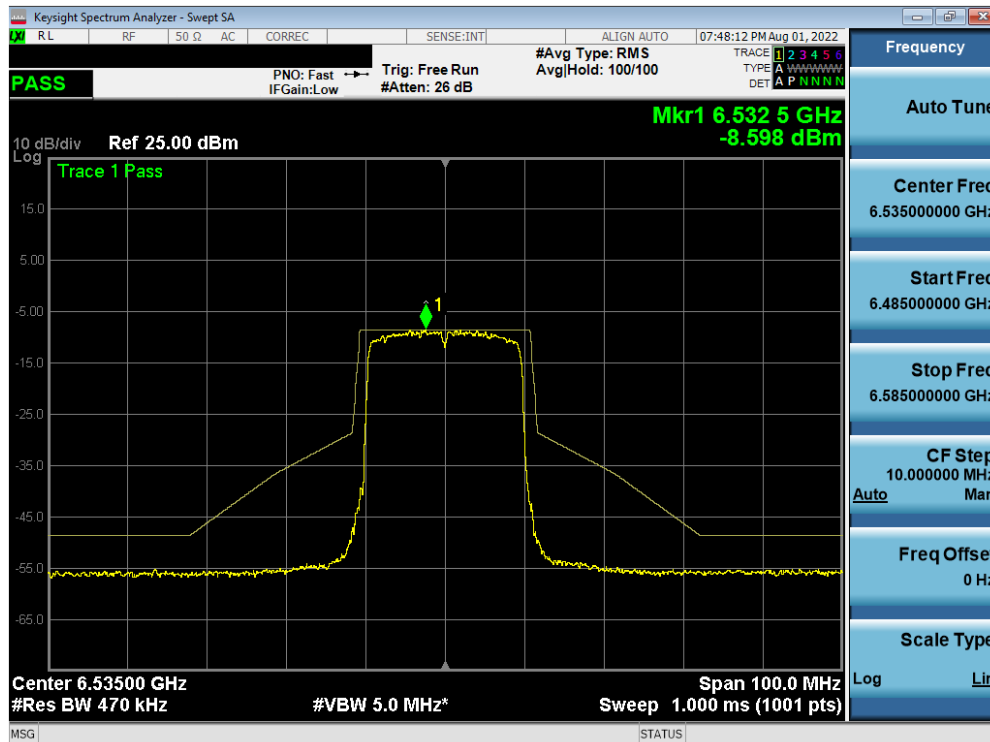


Plot 7-290. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 7) – Ch. 117)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 174 of 234

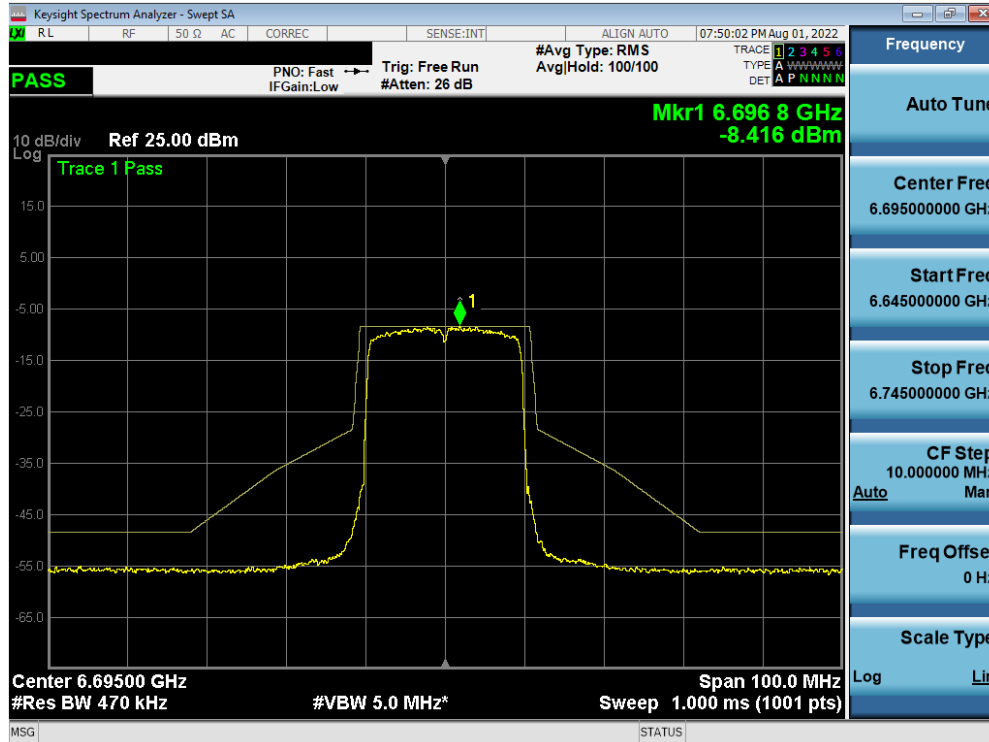


Plot 7-291. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 7) – Ch. 149)

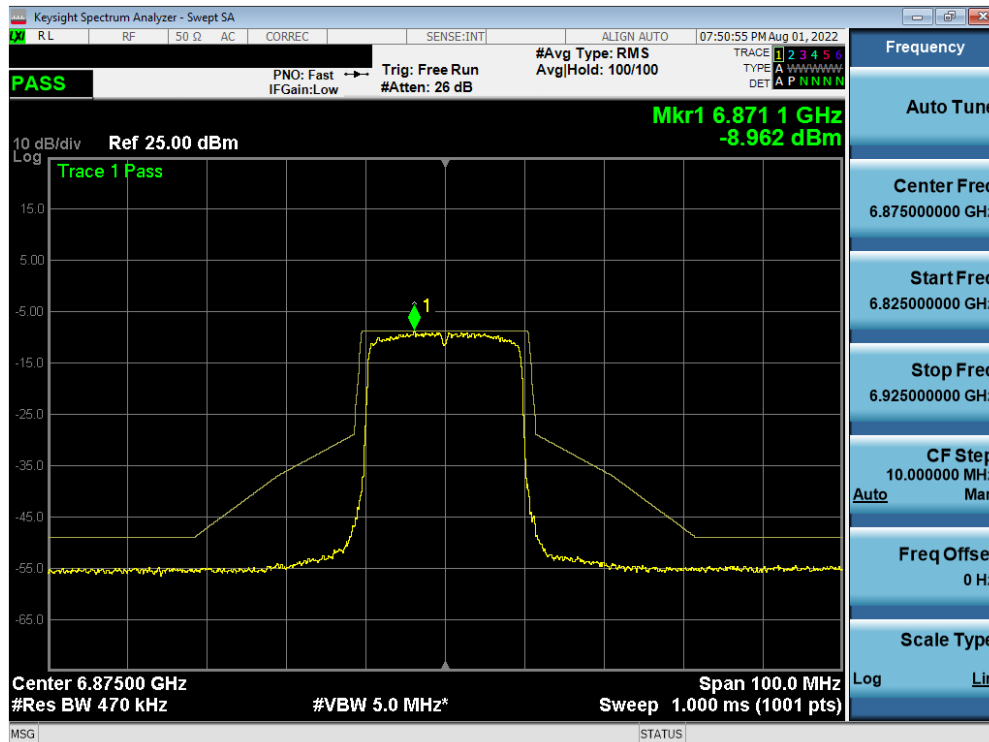


Plot 7-292. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 7) – Ch. 185)

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset
			Page 175 of 234

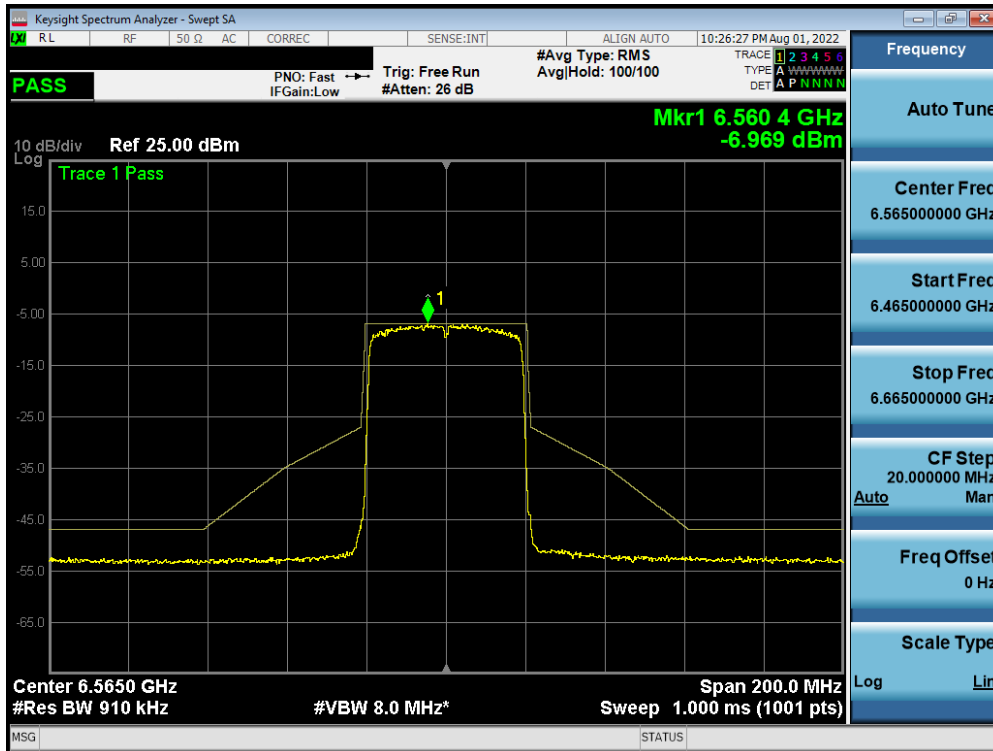


Plot 7-293. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 123)

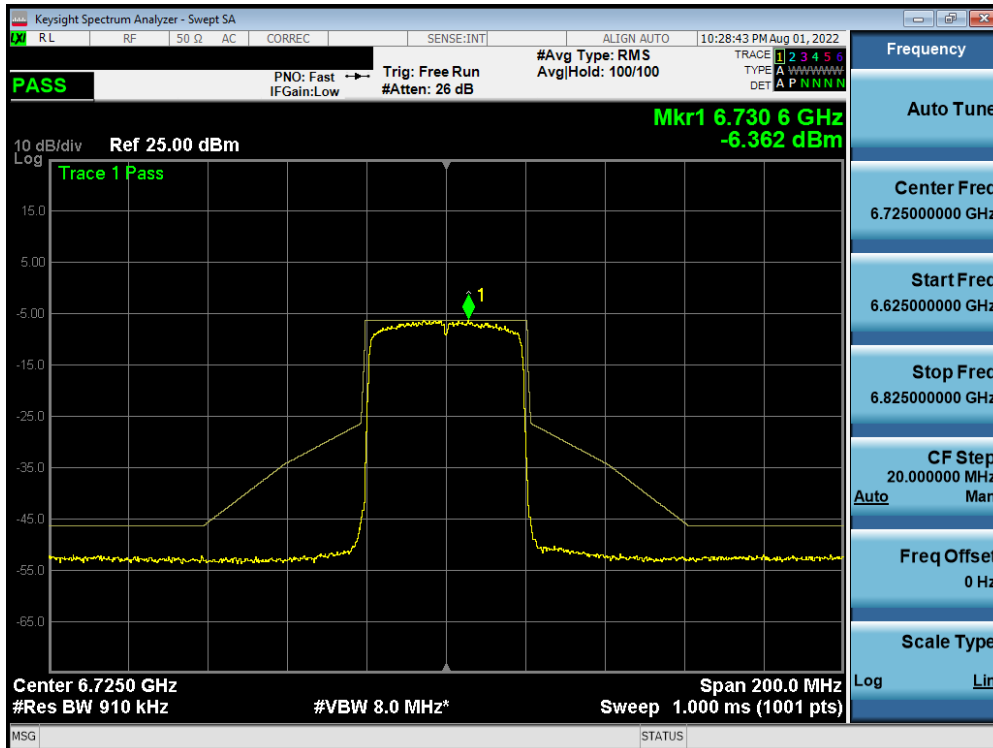


Plot 7-294. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 176 of 234

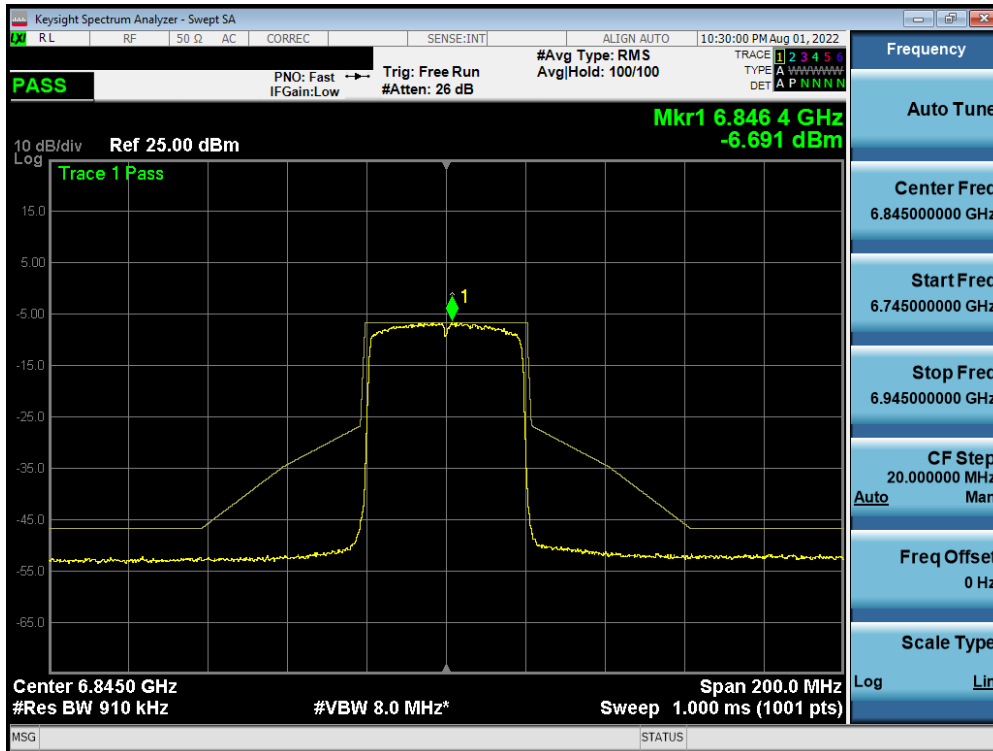


Plot 7-295. In-Band Emission Plot Measurement MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 179)

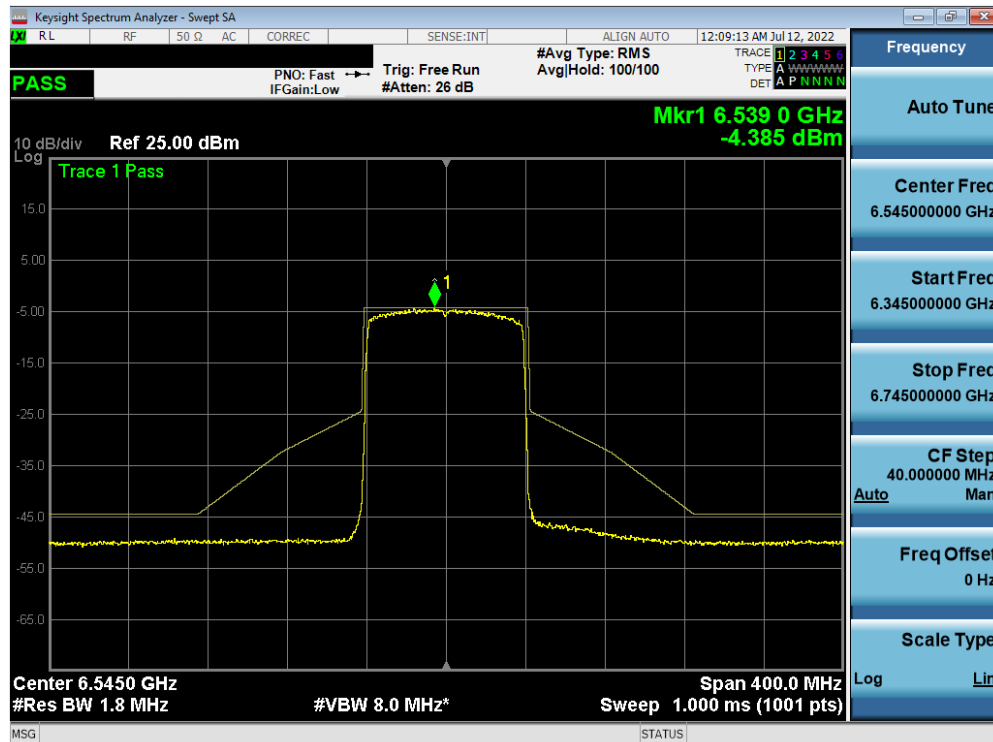


Plot 7-296. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 119)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 177 of 234

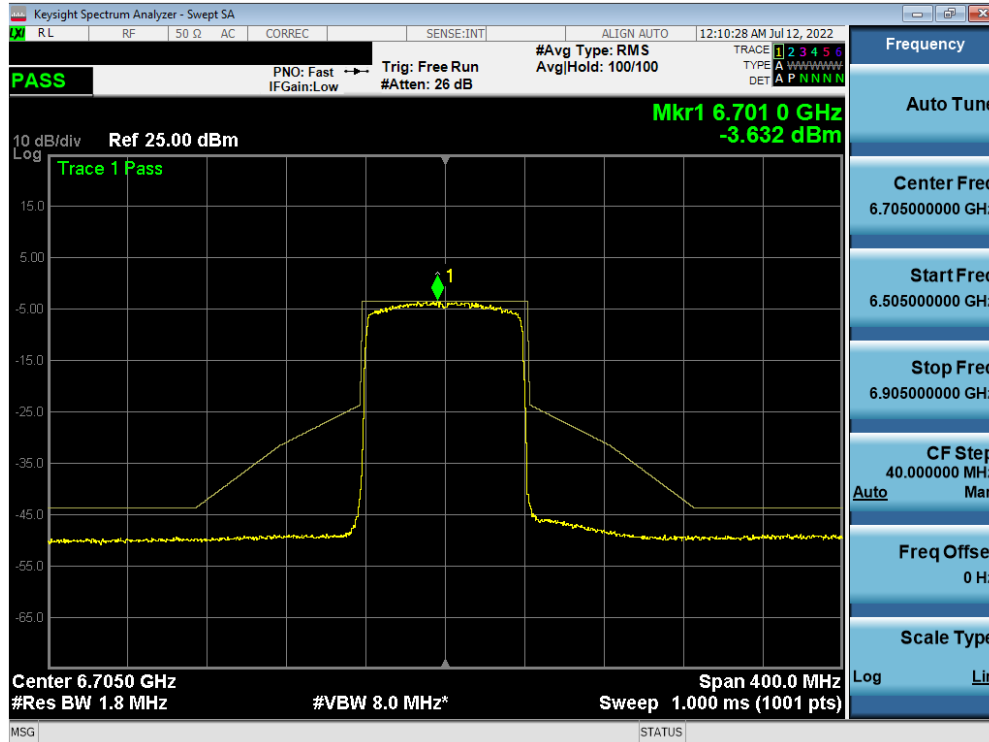


Plot 7-297. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

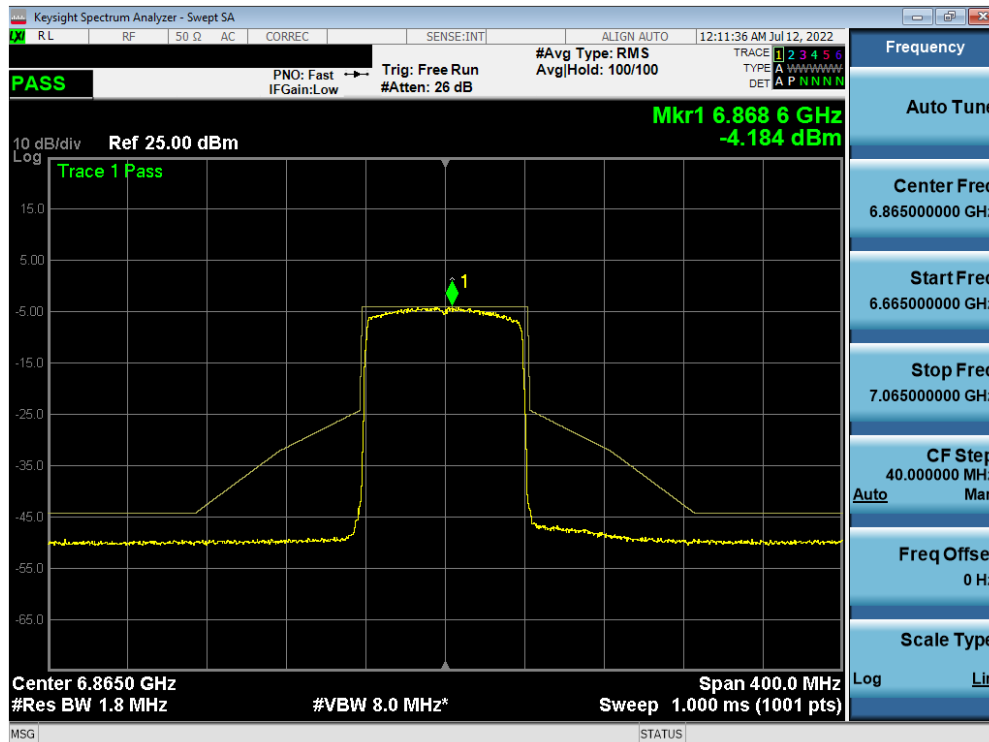


Plot 7-298. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 183)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 178 of 234

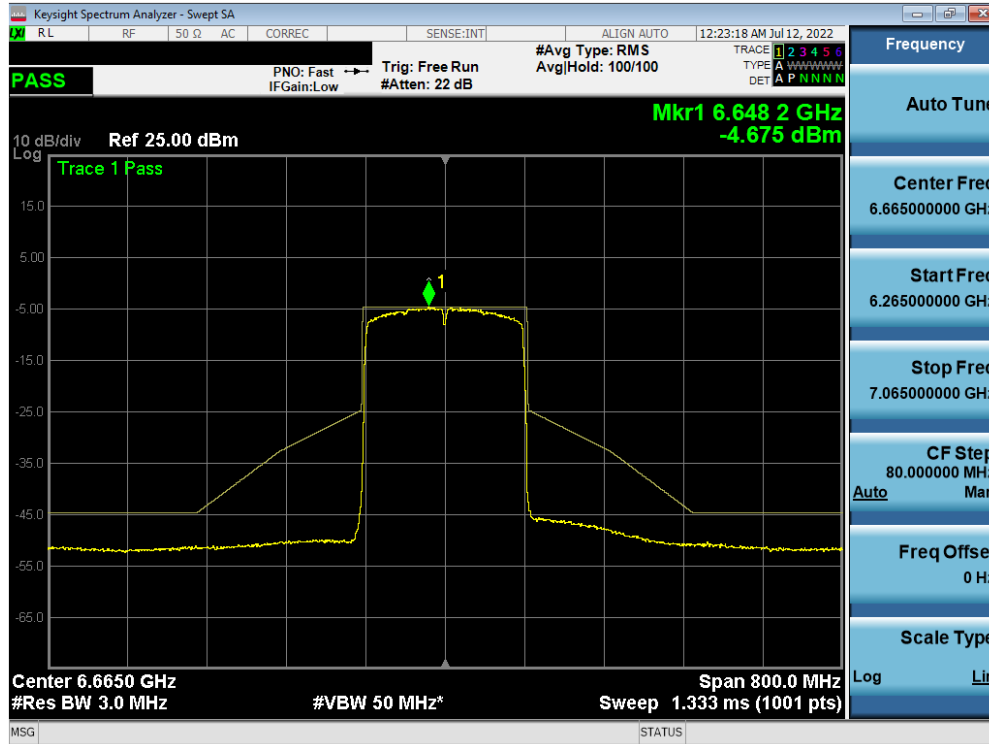


Plot 7-299. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

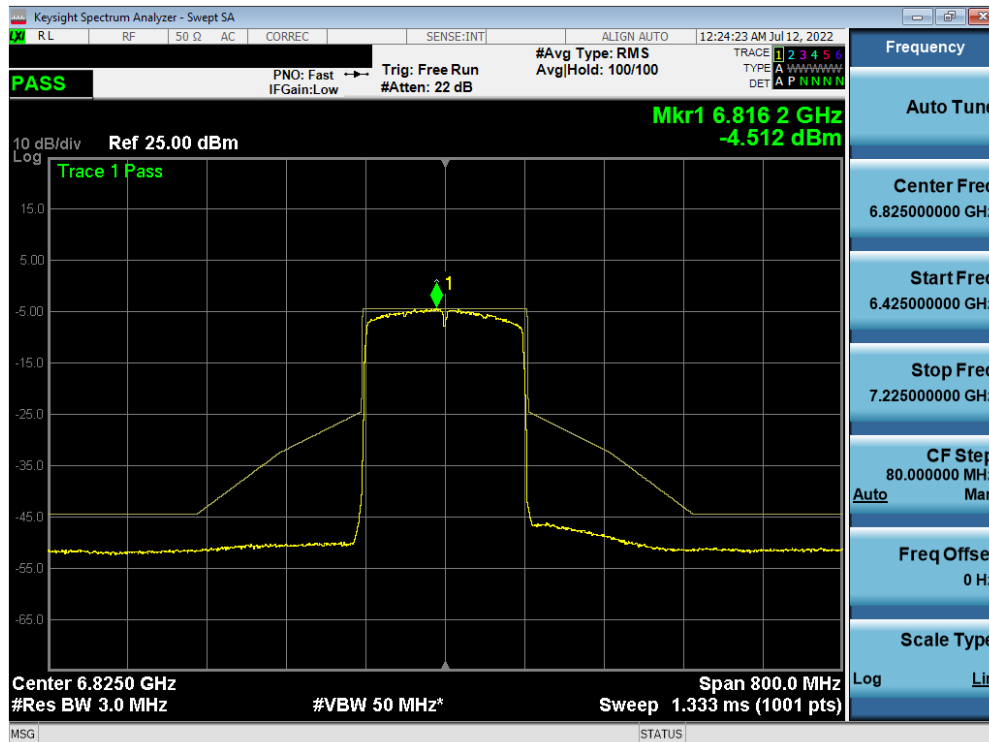


Plot 7-300. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 7) – Ch. 175)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 179 of 234

MIMO Antenna-2 In-Band Emission Plot Measurement - (UNII Band 8)

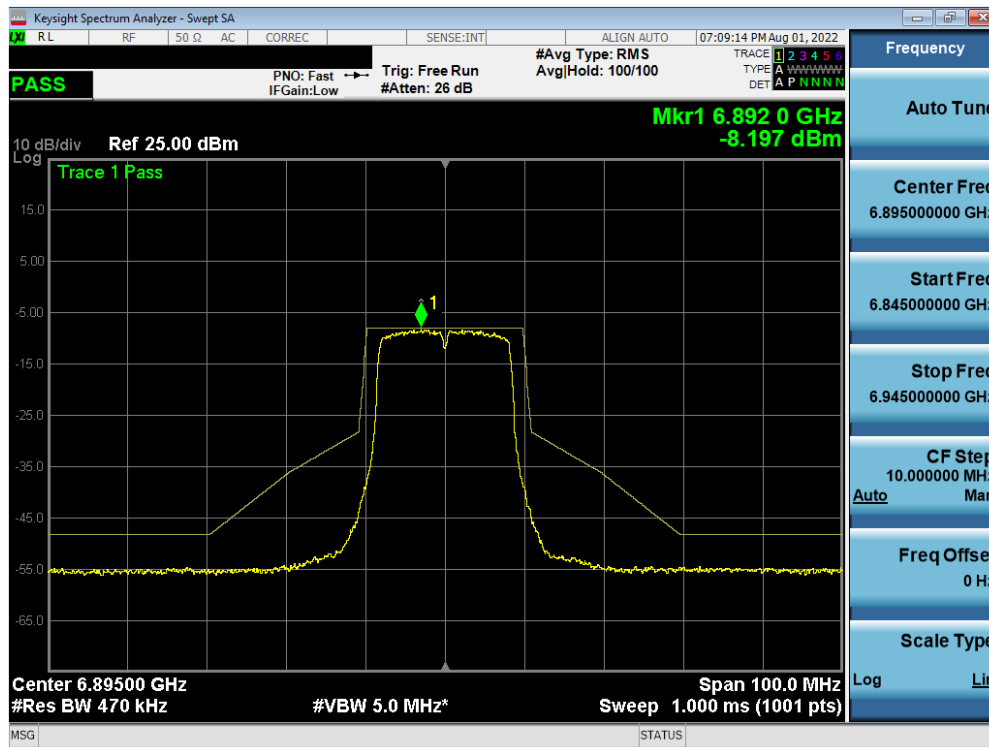


Plot 7-301. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 189)

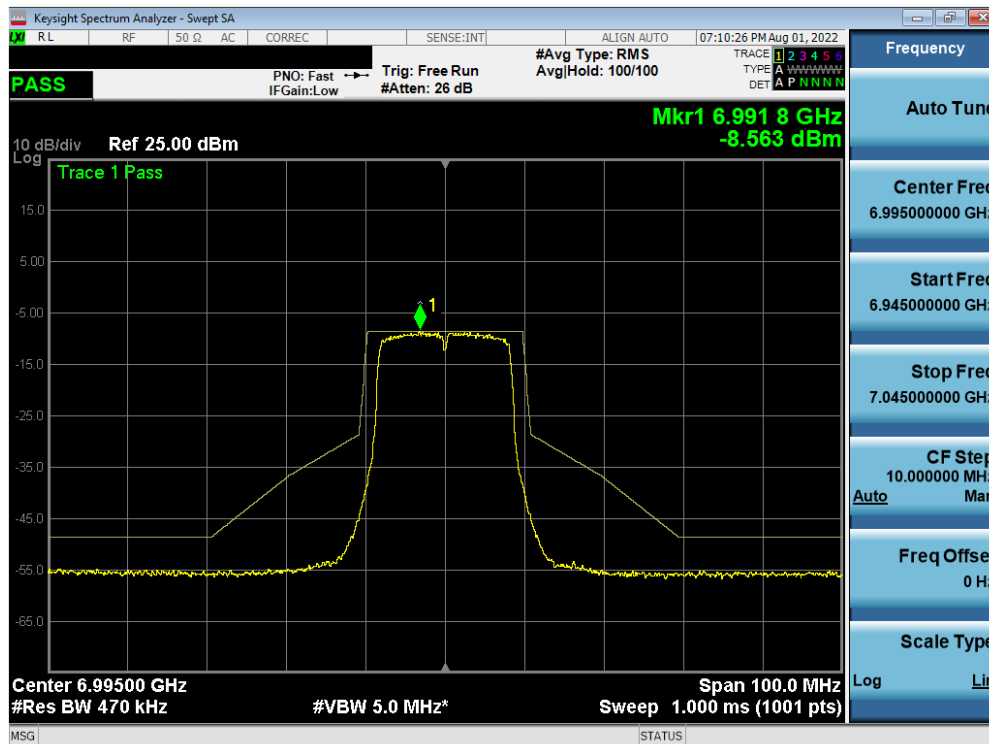


Plot 7-302. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 209)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 180 of 234

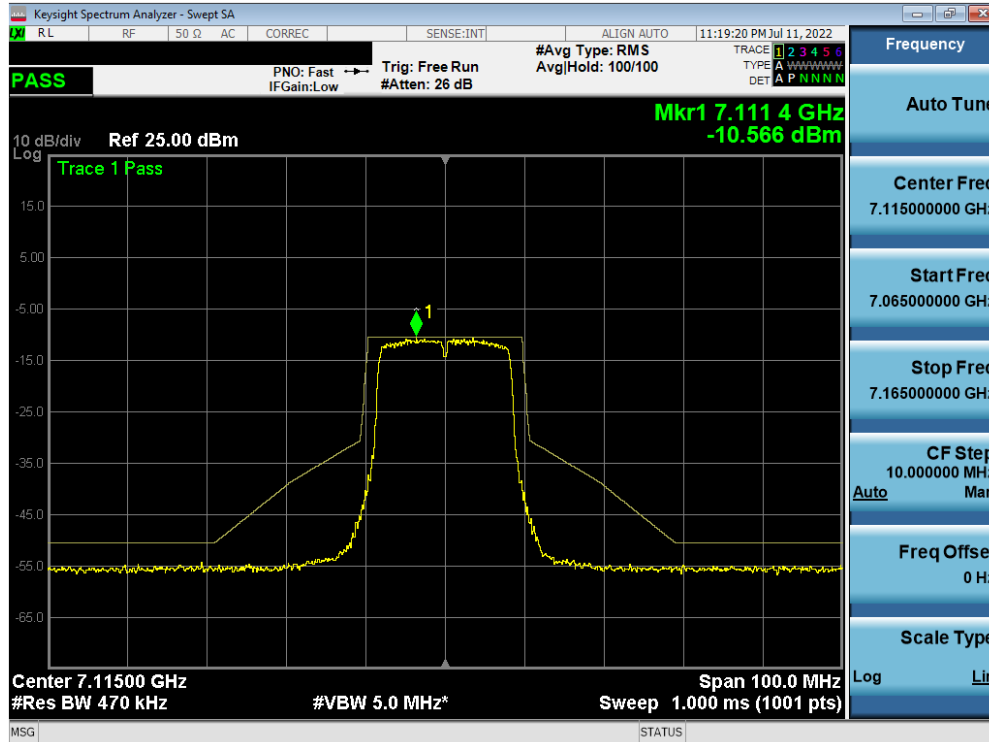


Plot 7-303. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 233)

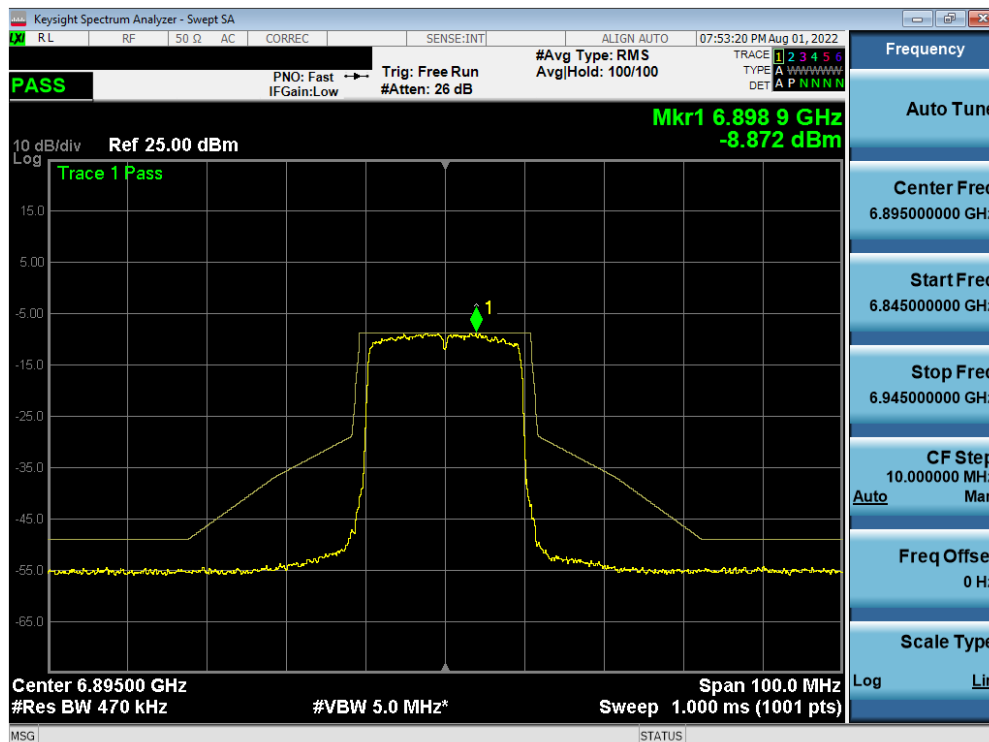


Plot 7-304. In-Band Emission Plot Measurement MIMO ANT2 (20MHz 802.11ax (UNII Band 8) – Ch. 189)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 181 of 234

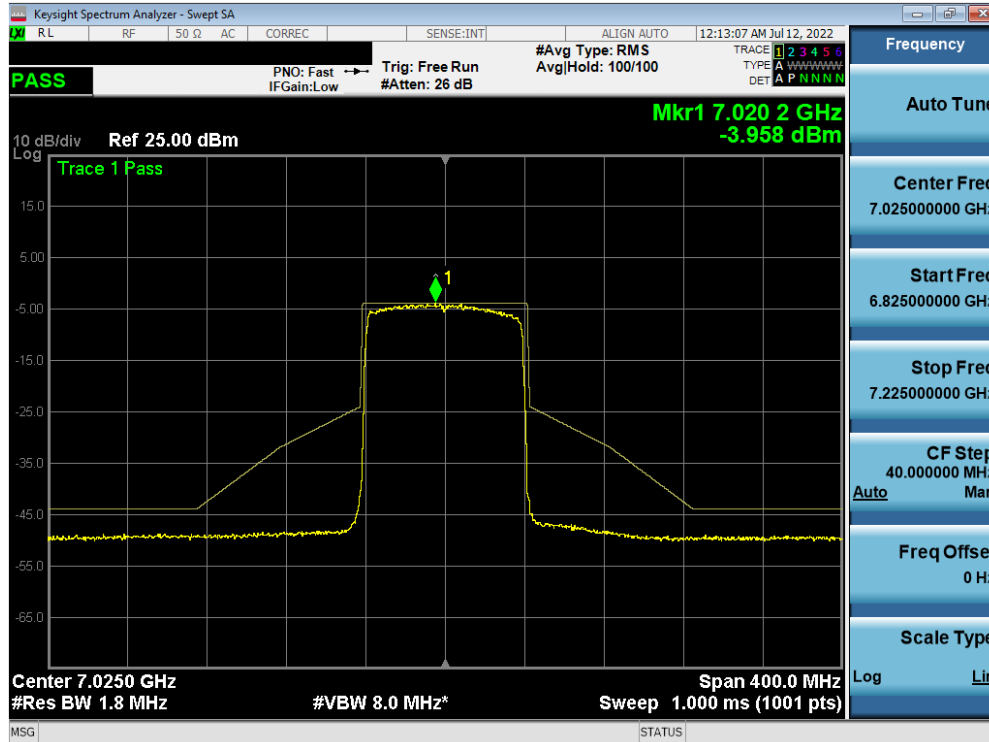

Plot 7-311. In-Band Emission Plot Measurement MIMO ANT2 (80MHz 802.11ax (UNII Band 8) – Ch. 215)

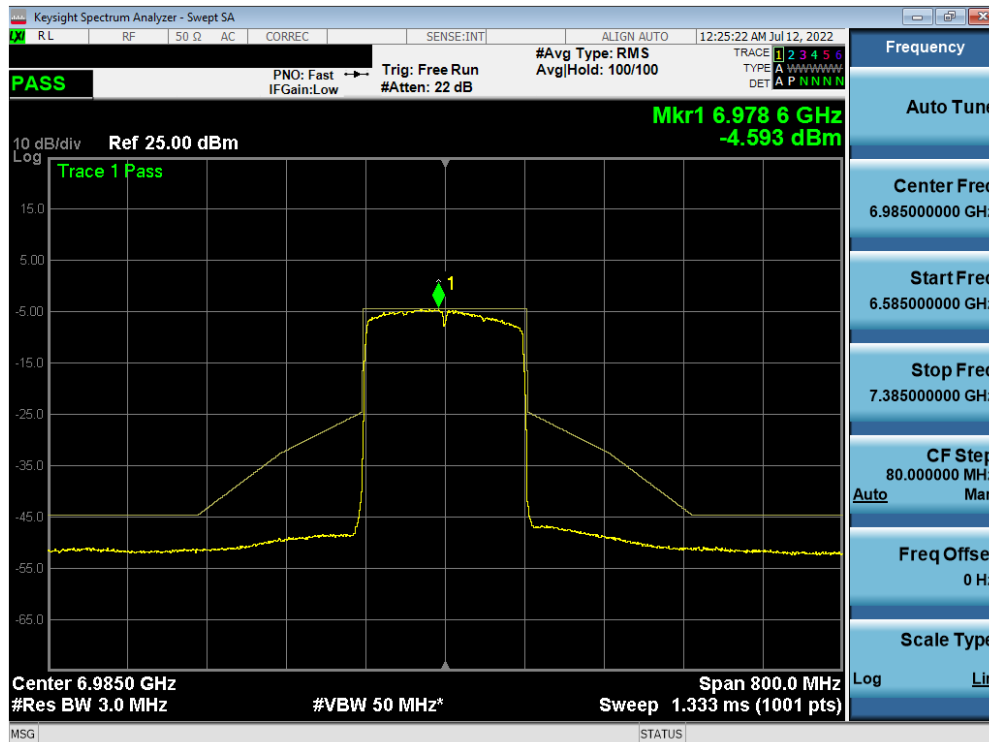

Plot 7-312. In-Band Emission Plot Measurement MIMO ANT2 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 185 of 234



7.6 Contention Based Protocol – 802.11a/ax
§15.407(d)(6)

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
 KDB 987594 D02 v01r01

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 186 of 234

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

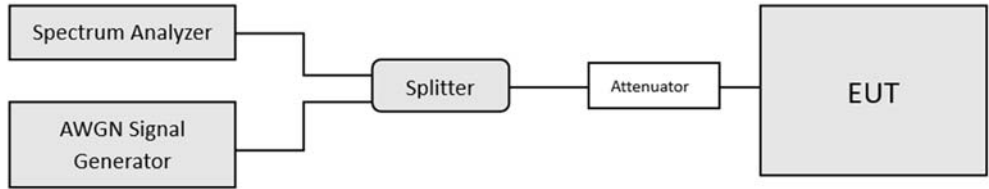


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. Per guidance from KDB 987594 D02 v01r01, contention based protocol was tested using an AWGN signal with a bandwidth of 10MHz (see Plot 7-313). The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission (see Plot 7-329), marker indicates the point at which the AWGN signal is introduced.
2. 15 trials were ran in order to assure that at least 90% of certainty was met.
3. Per Guidance from KDB 987594 D04 v01, contention based protocol was tested with receiver with the lowest antenna gain.

	Min. Gain [dBi]
5925 – 6425 MHz	-5.90
6425 – 6525 MHz	-6.40
6525 – 6875 MHz	-5.70
6875 – 7125 MHz	-4.50

Table 7-8. Antenna Lowest Gain

$$\text{Detection Level} = \text{Injected AWGN Power (dBm)} - \text{Antenna Gain (dBi)} + \text{Path Loss (dB)}$$

Equation 7-1. Detection Level Calculation

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 187 of 234

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Path Loss (dB)	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-75.84	-5.90	0.49	-69.45	-62.0	-7.45
				6110	-75.84	-5.90	0.46	-69.48	-62.0	-7.48
	47	6185	160	6185	-77.72	-5.90	0.48	-71.34	-62.0	-9.34
				6260	-74.83	-5.90	0.50	-68.43	-62.0	-6.43
UNII Band 6	101	6455	20	6455	-74.32	-6.40	0.54	-67.38	-62.0	-5.38
				6430	-74.30	-6.40	0.53	-67.37	-62.0	-5.37
	111	6505	160	6505	-74.21	-6.40	0.55	-67.26	-62.0	-5.26
				6580	-73.89	-6.40	0.57	-66.92	-62.0	-4.92
UNII Band 7	149	6695	20	6695	-80.53	-5.70	0.59	-74.24	-62.0	-12.24
				6750	-75.61	-5.70	0.60	-69.31	-62.0	-7.31
	175	6825	160	6825	-74.84	-5.70	0.62	-68.52	-62.0	-6.52
				6900	-75.51	-5.70	0.63	-69.18	-62.0	-7.18
UNII Band 8	197	6935	20	6935	-78.28	-4.50	0.64	-73.14	-62.0	-11.14
				6910	-74.69	-4.50	0.64	-69.55	-62.0	-7.55
	207	6985	160	6985	-75.60	-4.50	0.65	-70.45	-62.0	-8.45
				7060	-75.31	-4.50	0.66	-70.15	-62.0	-8.15

Table 7-9. Contention Based Protocol – Incumbent Detection Results


Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	EUT Transmission Status			Margin [dB]
					Adjusted AWGN Power (dBm)			
					Normal	Minimal	Ceased	
UNII Band 5	53	6215	20	6215	-76.87	-73.62	-70.75	-7.45
				6110	-75.89	-73.10	-70.78	-7.48
	47	6185	160	6185	-78.14	-74.75	-72.64	-9.34
				6260	-75.97	-72.53	-69.73	-6.43
UNII Band 6	101	6455	20	6455	-73.97	-70.72	-68.08	-5.38
				6430	-73.51	-70.77	-68.07	-5.37
	111	6505	160	6505	-72.75	-70.18	-67.96	-5.26
				6580	-72.54	-69.71	-67.62	-4.92
UNII Band 7	149	6695	20	6695	-78.74	-76.20	-74.14	-12.24
				6750	-74.24	-71.50	-69.21	-7.31
	175	6825	160	6825	-73.81	-71.01	-68.42	-6.52
				6900	-74.55	-72.04	-69.08	-7.18
UNII Band 8	197	6935	20	6935	-79.05	-76.07	-73.24	-11.14
				6910	-75.63	-72.36	-69.65	-7.55
	207	6985	160	6985	-75.85	-73.16	-70.55	-8.45
				7060	-75.88	-73.04	-70.25	-8.15

Table 7-10. Contention Based Protocol – Detection Results – All Tx Cases

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 188 of 234

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate (%)			
UNII Band 5	53	6215	20	6215	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100		
				6110	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
	47	6185	160	6185	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
				6260	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 6	101	6455	20	6455	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
				6430	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	111	6505	160	6505	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6580	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 7	149	6695	20	6695	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6750	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	175	6825	160	6825	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6900	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 8	197	6935	20	6935	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6910	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	207	6985	160	6985	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				7060	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1


Table 7-11. Contention Based Protocol – Incumbent Detection Trial Results

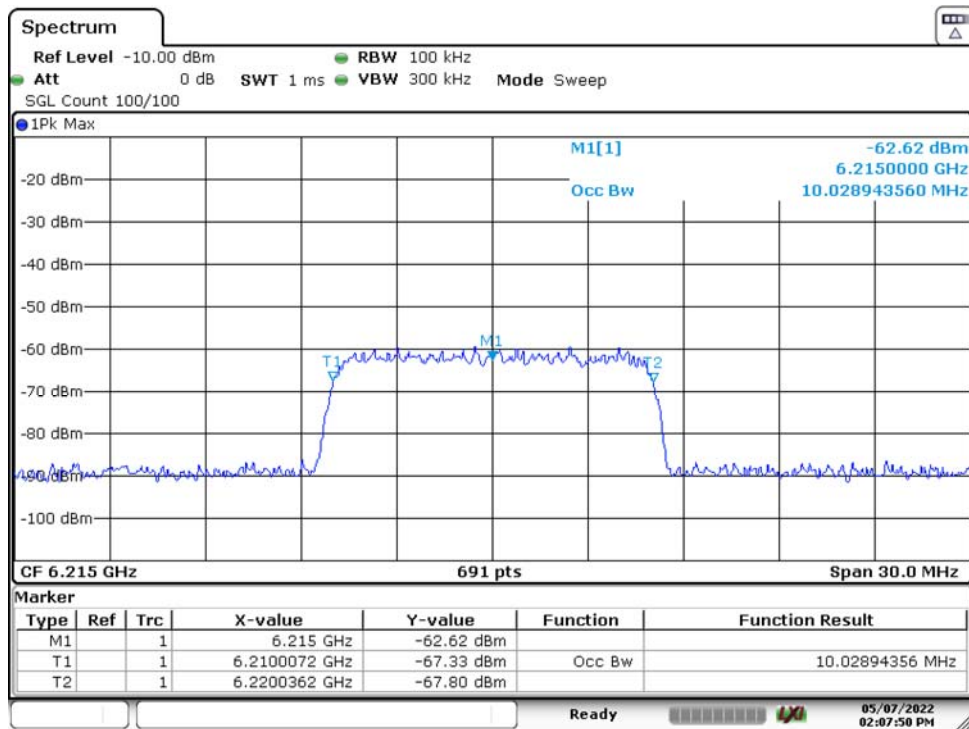

Date: 7.MAY.2022 14:07:50


Plot 7-313. AWGN Signal – UNII 5 – 20MHz

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 189 of 234

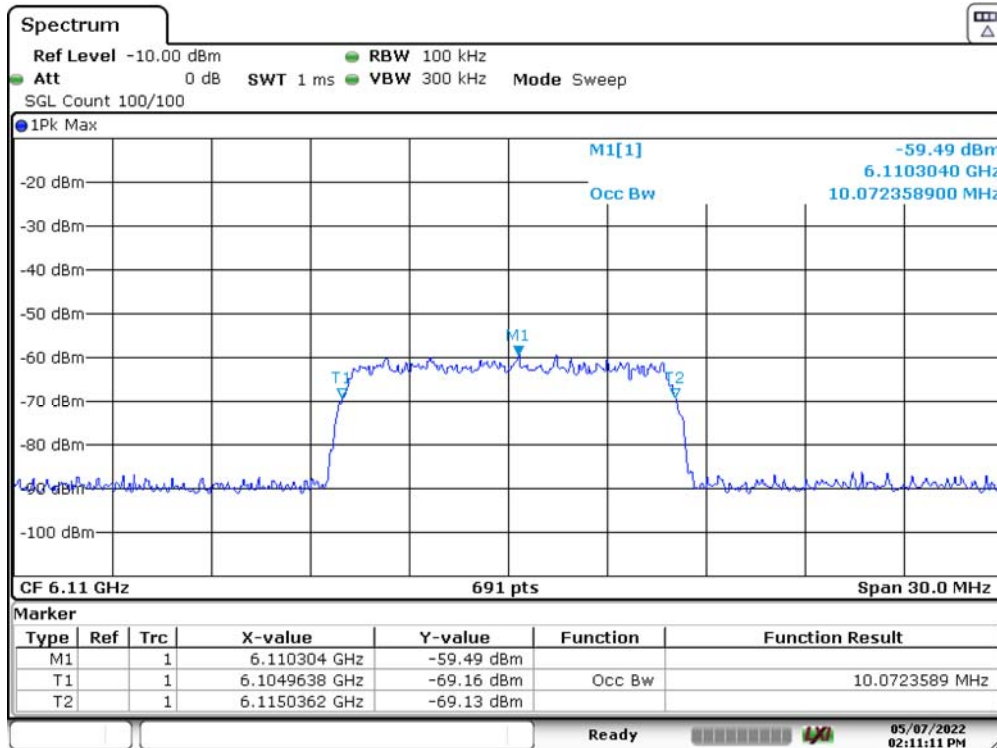

Date: 7.MAY.2022 14:11:11


Plot 7-314. AWGN Signal – UNII 5 – 160MHz - Low

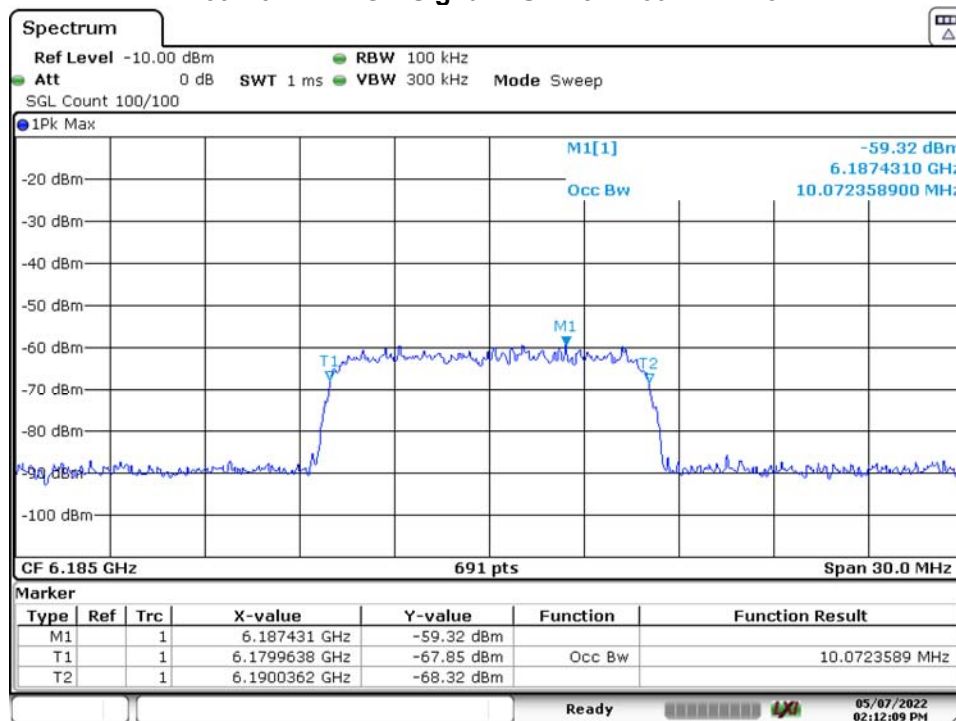

Date: 7.MAY.2022 14:12:09


Plot 7-315. AWGN Signal – UNII 5 – 160MHz - Mid

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 190 of 234

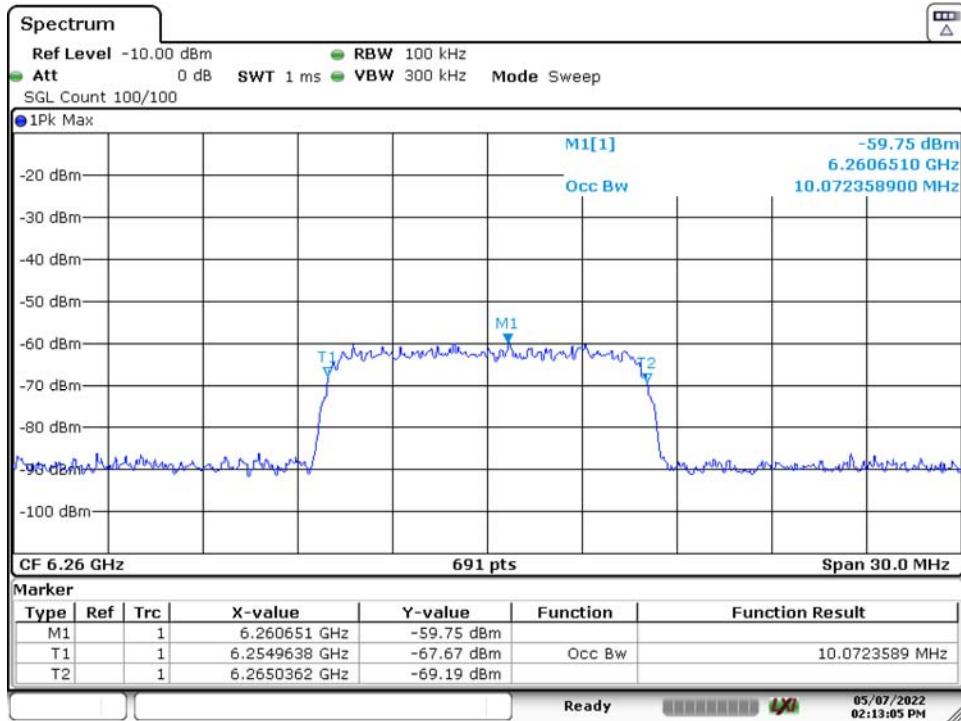

Date: 7.MAY.2022 14:13:05


Plot 7-316. AWGN Signal – UNII 5 – 160MHz - High

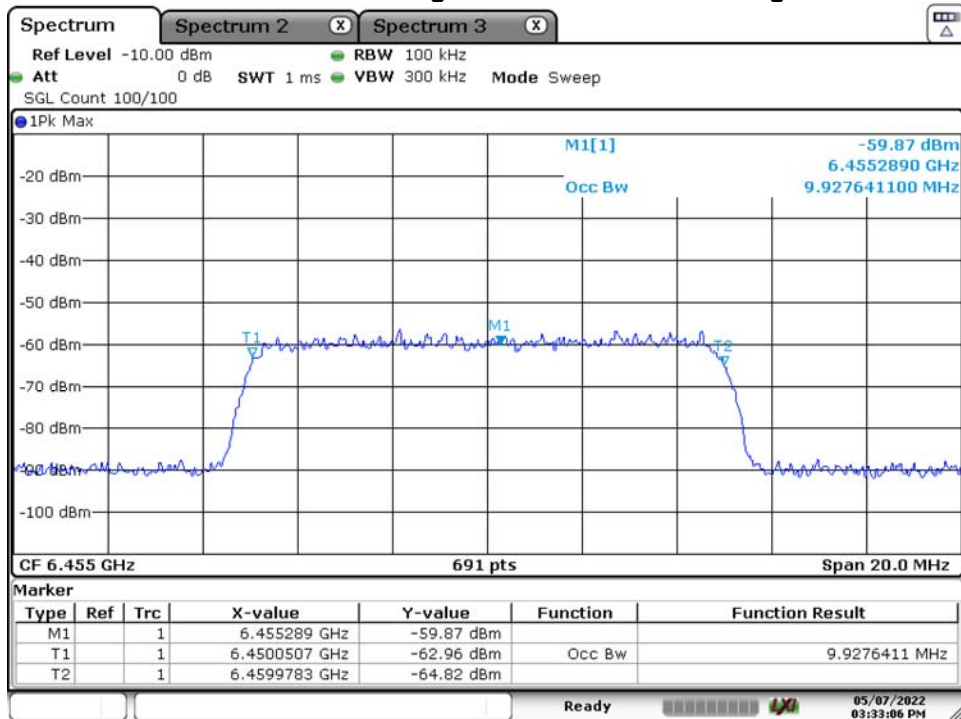

Date: 7.MAY.2022 15:33:06


Plot 7-317. AWGN Signal – UNII 6 – 20MHz

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	Page 191 of 234
EUT Type: Portable Handset			

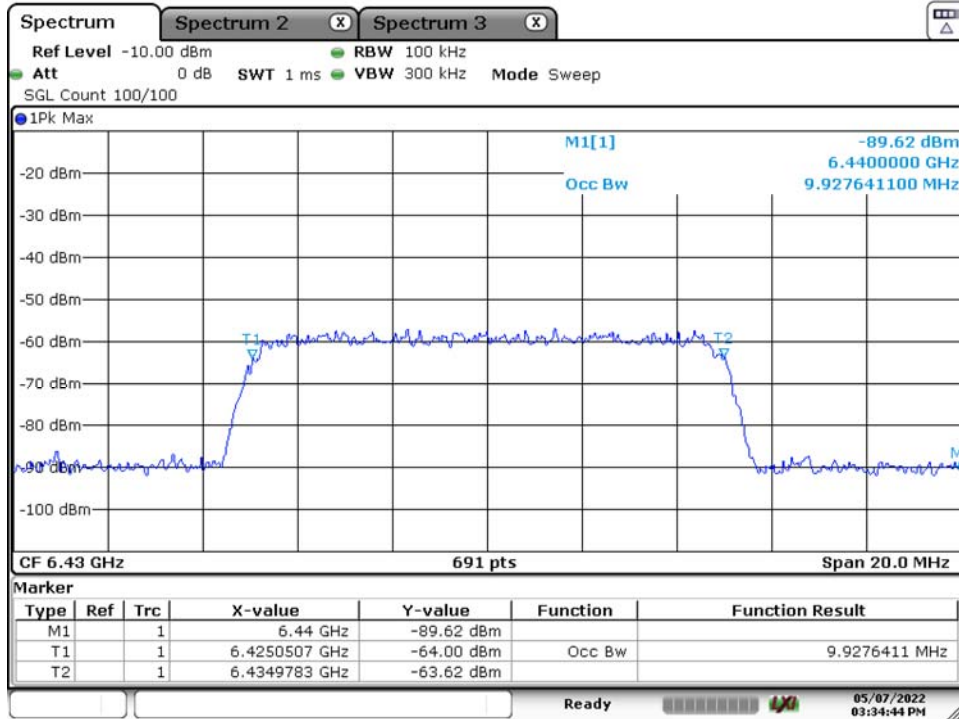

Date: 7.MAY.2022 15:34:43


Plot 7-318. AWGN Signal – UNII 6 – 160MHz - Low

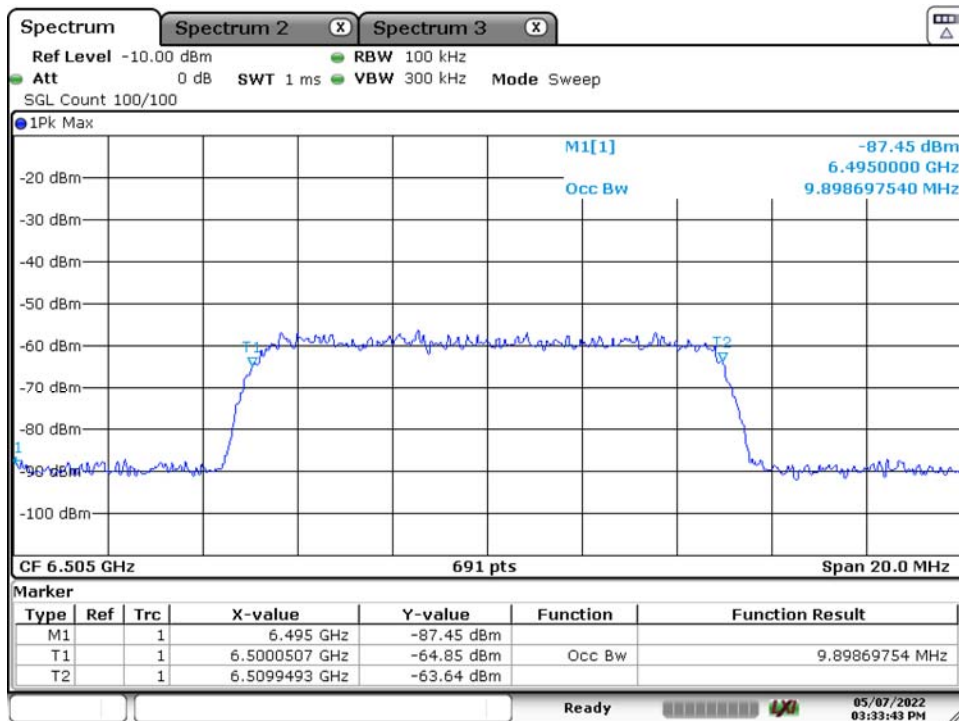

Date: 7.MAY.2022 15:33:43


Plot 7-319. AWGN Signal – UNII 6 – 160MHz - Mid

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 192 of 234

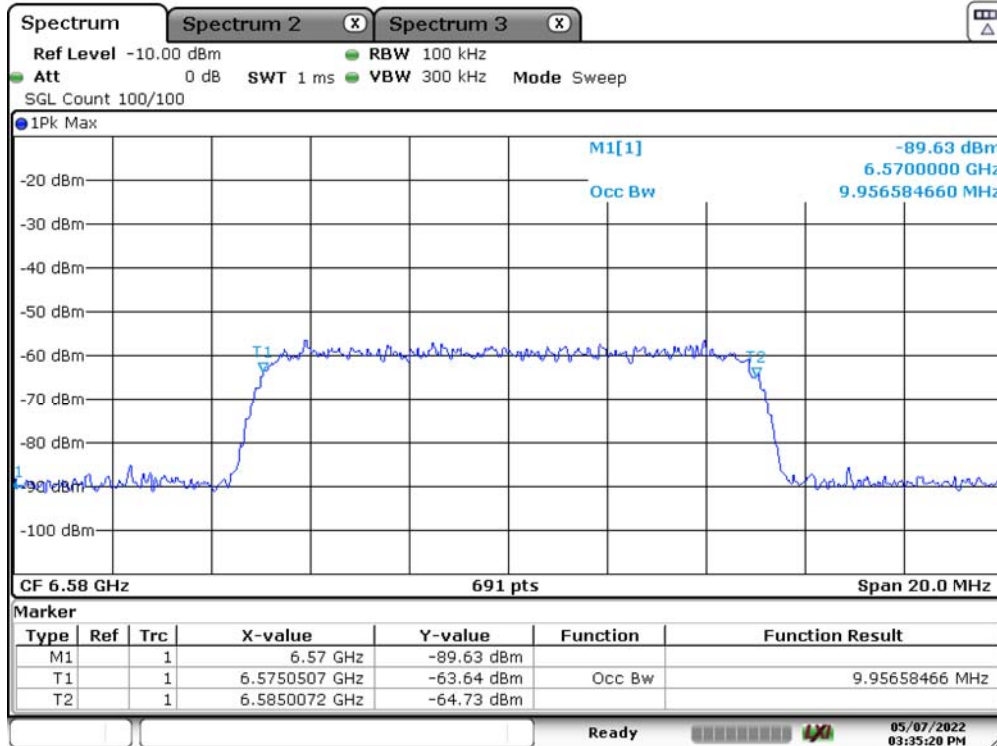

Date: 7.MAY.2022 15:35:20


Plot 7-320. AWGN Signal – UNII 6 – 160MHz - High

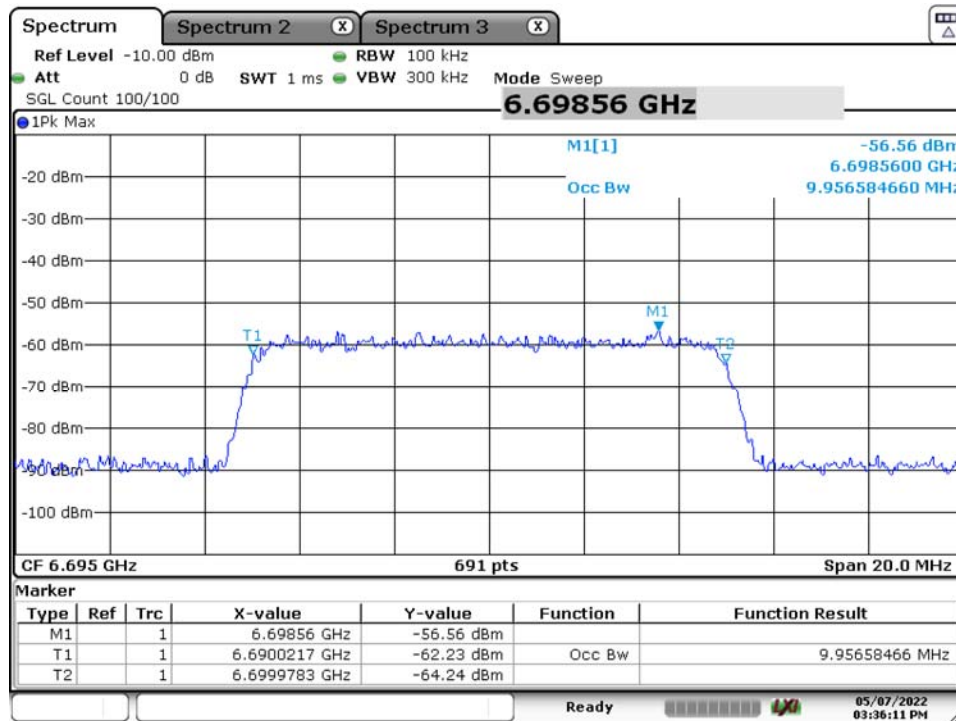

Date: 7.MAY.2022 15:36:11


Plot 7-321. AWGN Signal – UNII 7 – 20MHz

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset
			Page 193 of 234

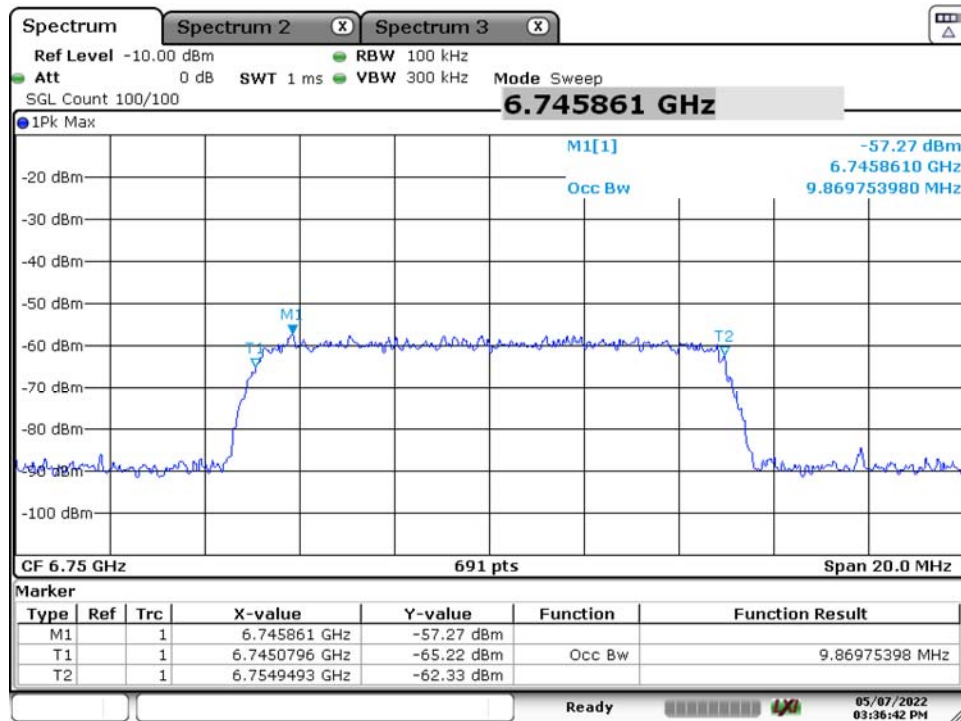

Date: 7.MAY.2022 15:36:42


Plot 7-322. AWGN Signal – UNII 7 – 160MHz - Low

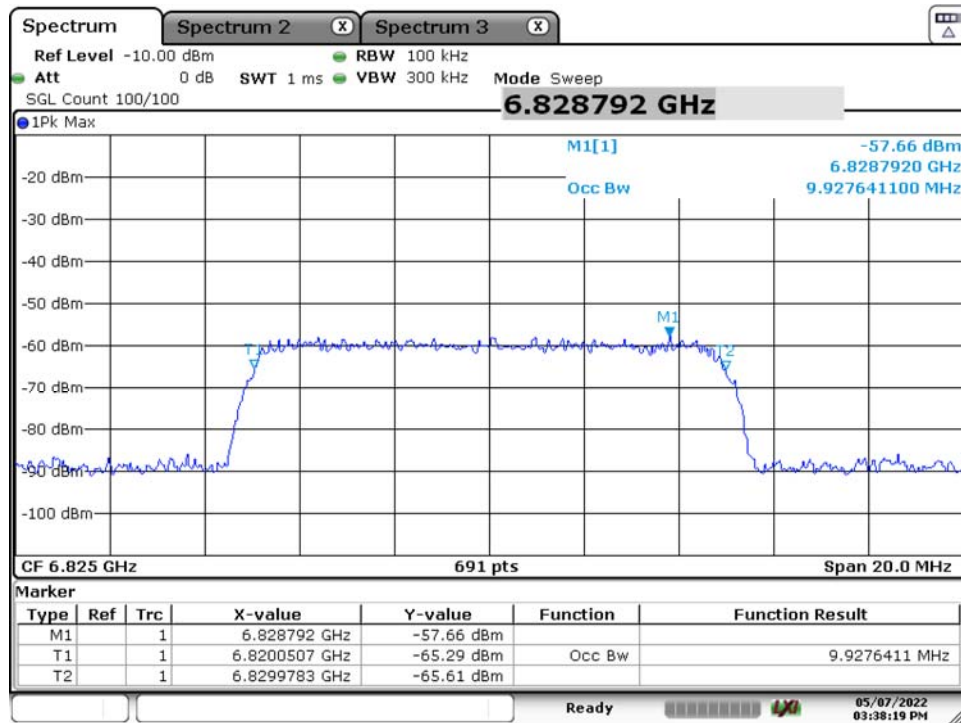

Date: 7.MAY.2022 15:38:18


Plot 7-323. AWGN Signal – UNII 7 – 160MHz - Mid

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	Page 194 of 234
EUT Type: Portable Handset			

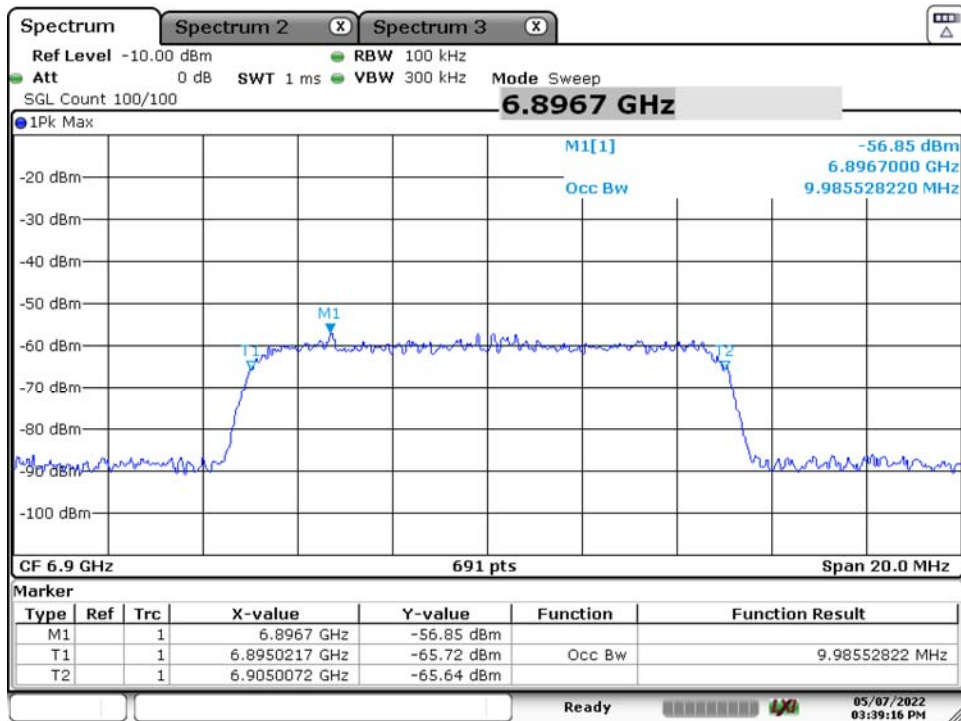

Date: 7.MAY.2022 15:39:16


Plot 7-324. AWGN Signal – UNII 7 – 160MHz - High

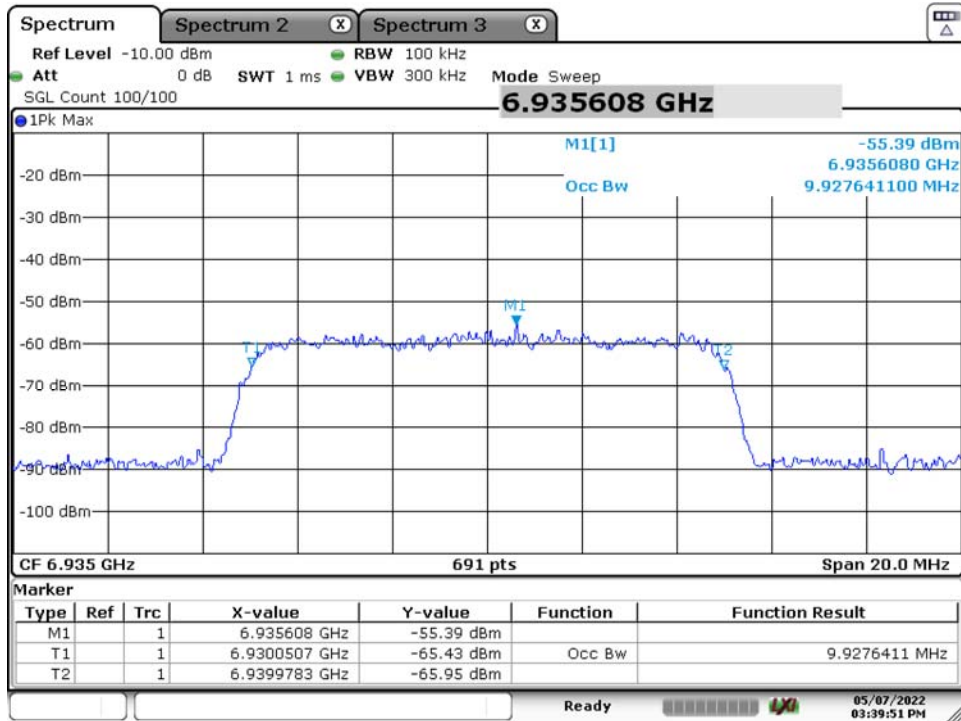

Date: 7.MAY.2022 15:39:51


Plot 7-325. AWGN Signal – UNII 8 – 20MHz

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 195 of 234

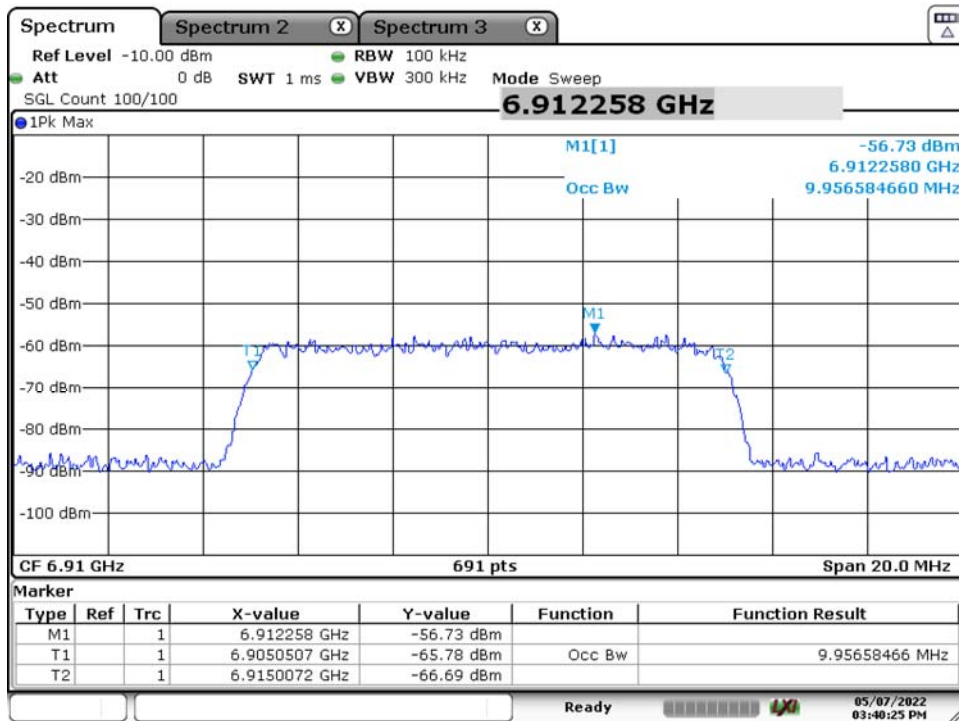

Date: 7.MAY.2022 15:40:24


Plot 7-326. AWGN Signal – UNII 8 – 160MHz - Low

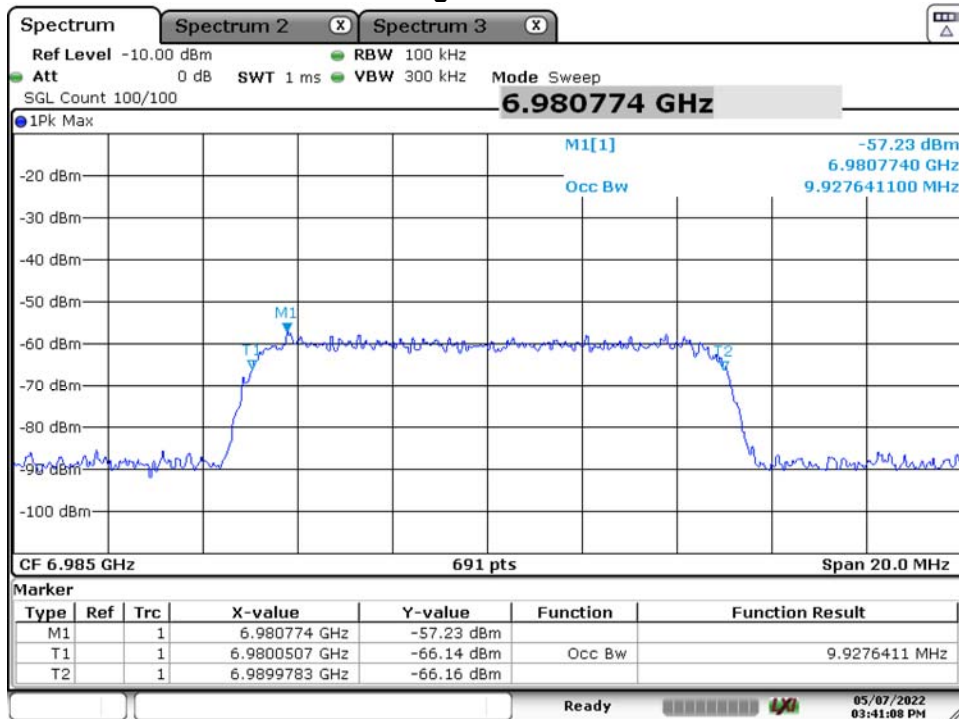

Date: 7.MAY.2022 15:41:07

Plot 7-327. AWGN Signal – UNII 8 – 160MHz - Mid

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: PY7-76056F	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 196 of 234

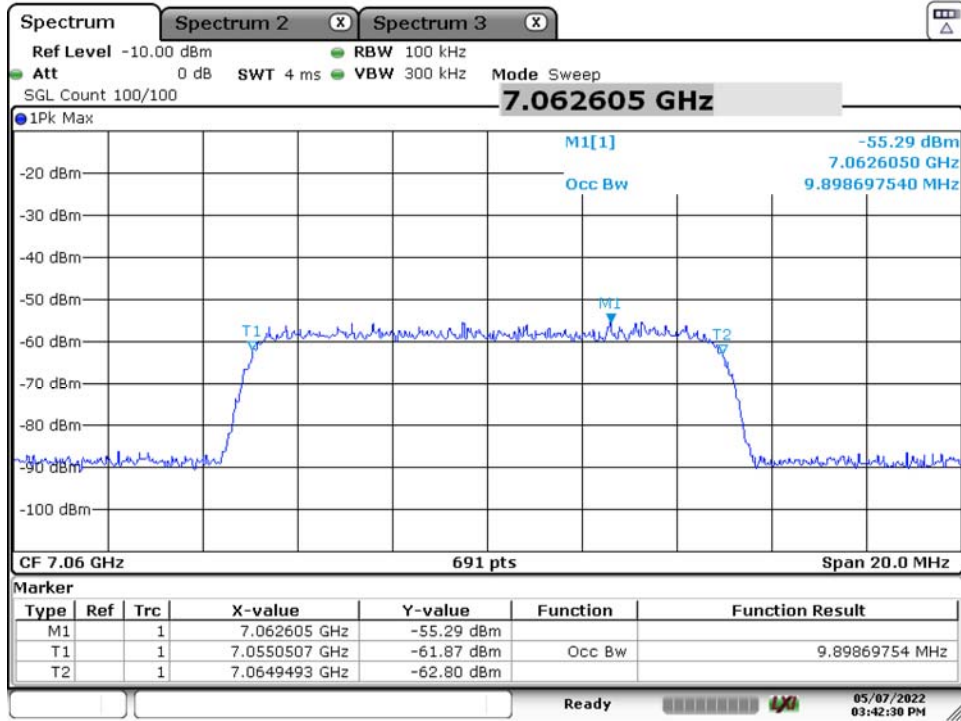

Date: 7.MAY.2022 15:42:30

Plot 7-328. AWGN Signal – UNII 8 – 160MHz - High

FCC ID: PY7-76056F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset		Page 197 of 234



Plot 7-331. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Ch47 – Mid




Plot 7-332. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Ch47 - High

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 199 of 234



Plot 7-333. Contention Based Protocol Timing Plot – UNII 6 – 20MHz Ch101

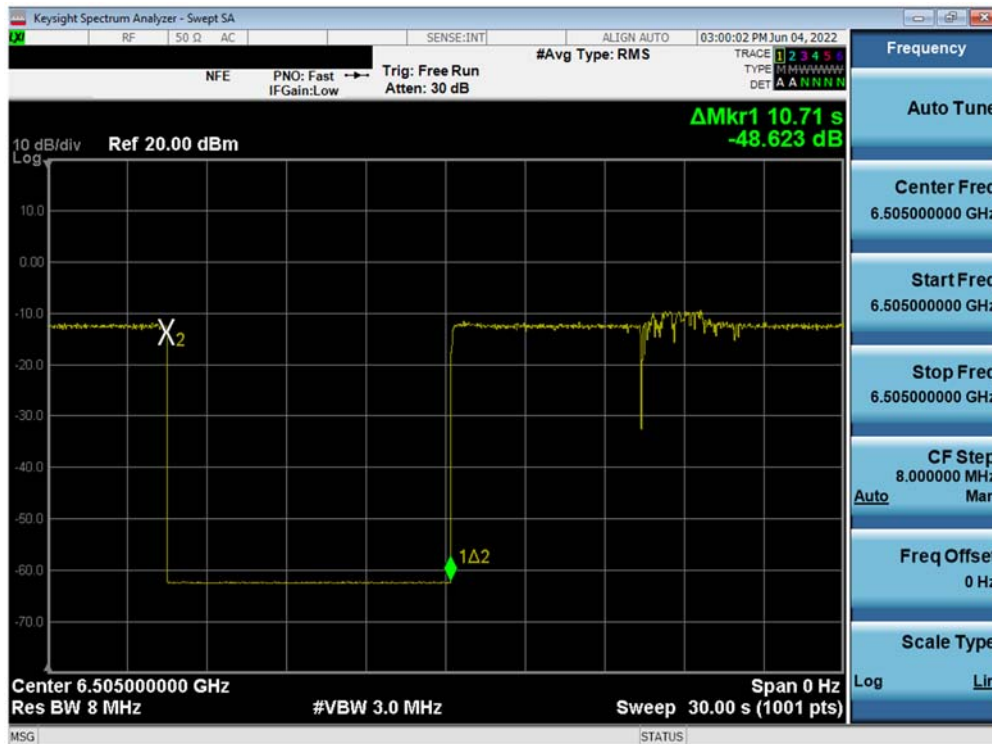

Plot 7-334. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Ch111 – Low

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 200 of 234



Plot 7-337. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Ch149



Plot 7-338. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Ch175 – Low

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 202 of 234



Plot 7-339. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Ch175 – Mid




Plot 7-340. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Ch175 - High

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 203 of 234



Plot 7-341. Contention Based Protocol Timing Plot – UNII 8 – 20MHz Ch197

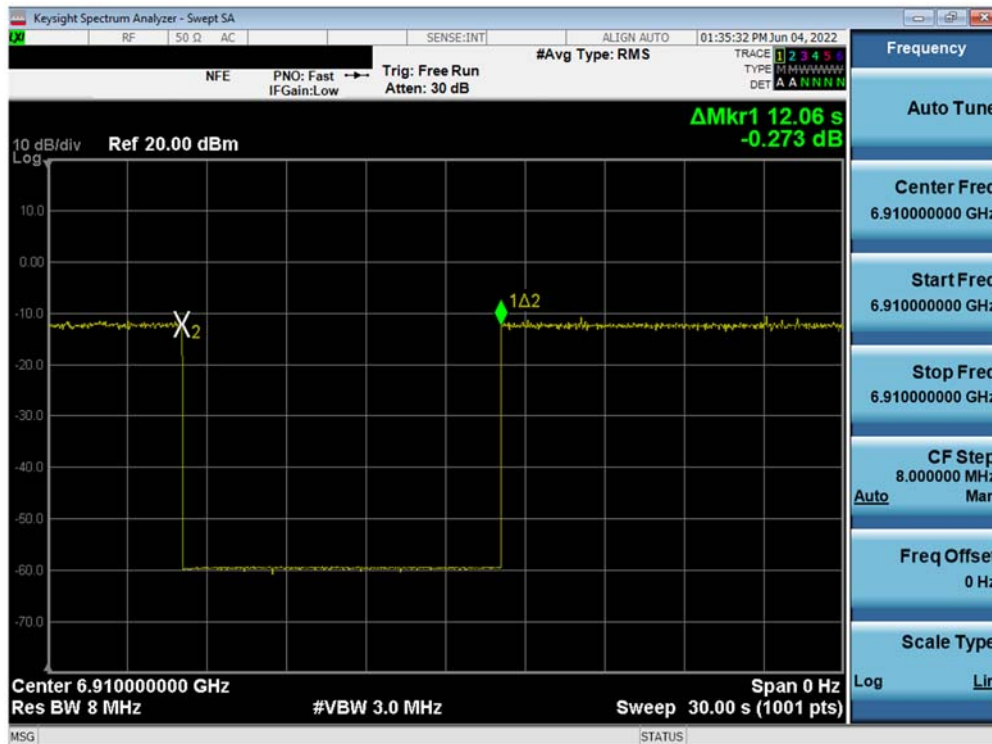


Plot 7-342. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Ch207 – Low

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 204 of 234



Plot 7-343. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Ch207 – Mid

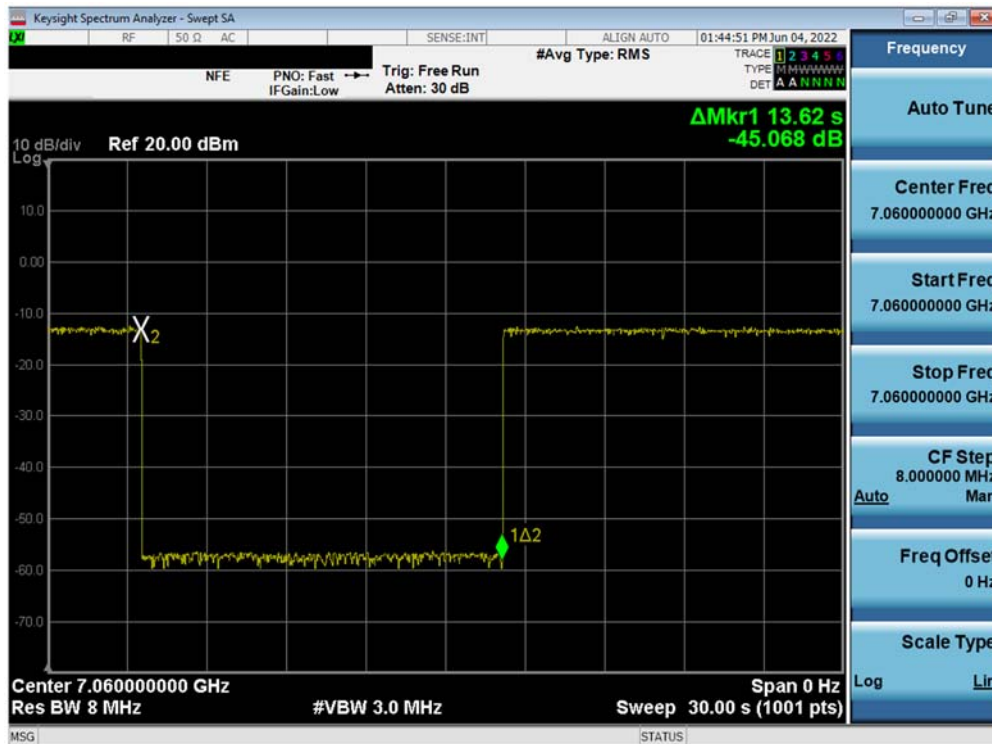

Plot 7-344. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Ch207 - High

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 205 of 234



7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.205, §15.209, §15.407(b)(6)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11ax (20/40/80/160MHz), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz.

Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 206 of 234

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

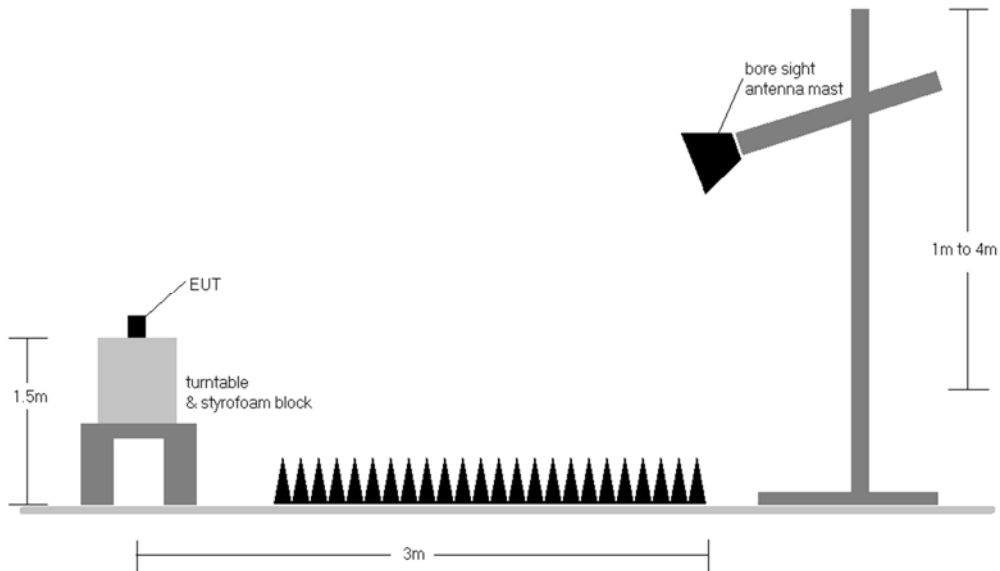


Figure 7-6. Test Instrument & Measurement Setup

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 207 of 234

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-12. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dBμV/m]. If a peak measurement passes the average limit it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 208 of 234


7.7.1 MIMO Radiated Spurious Emission Measurements

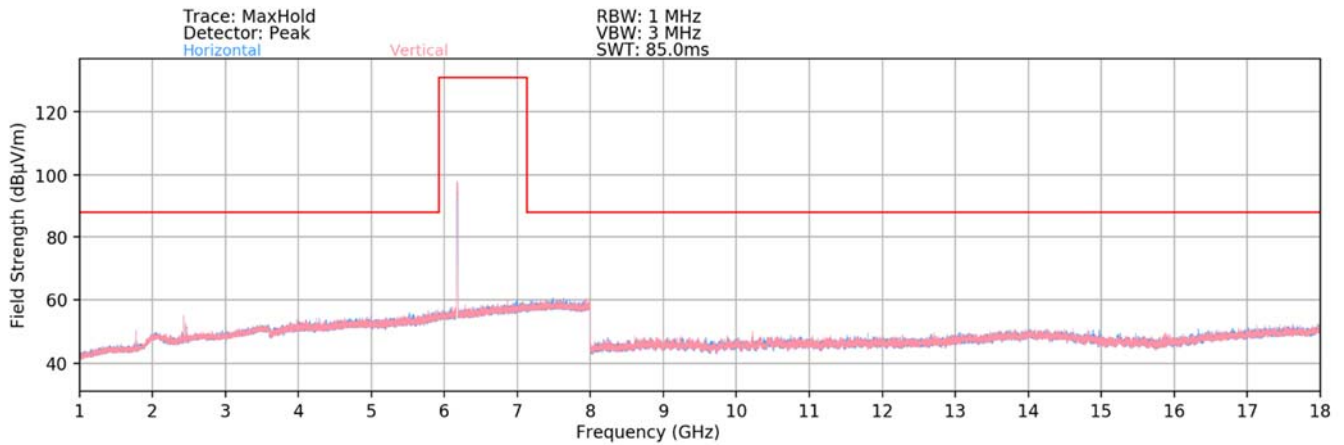

Plot 7-345. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII Band 5 – 20MHz – Ch.45)

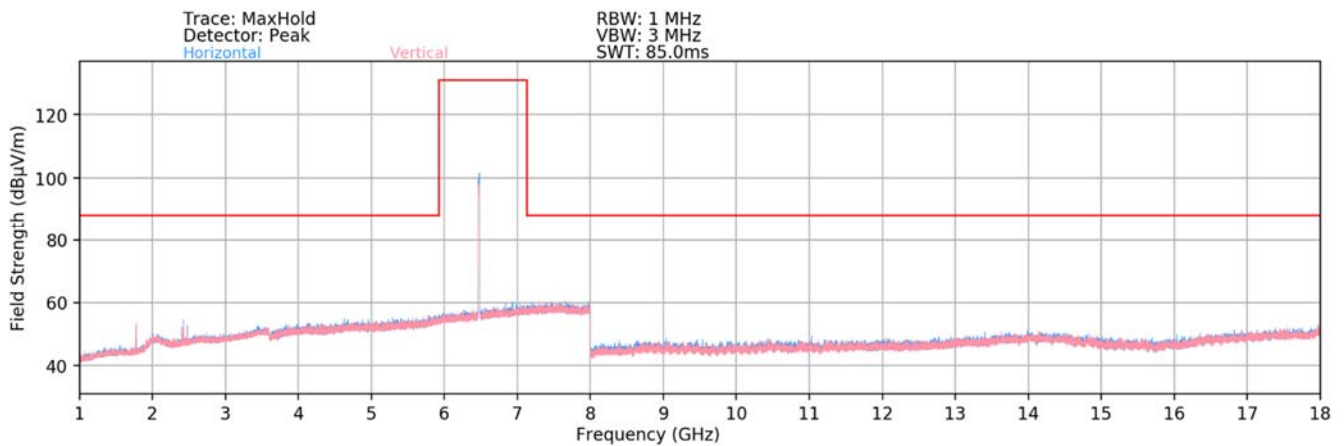


Plot 7-346. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 6 – 20MHz – Ch.105)

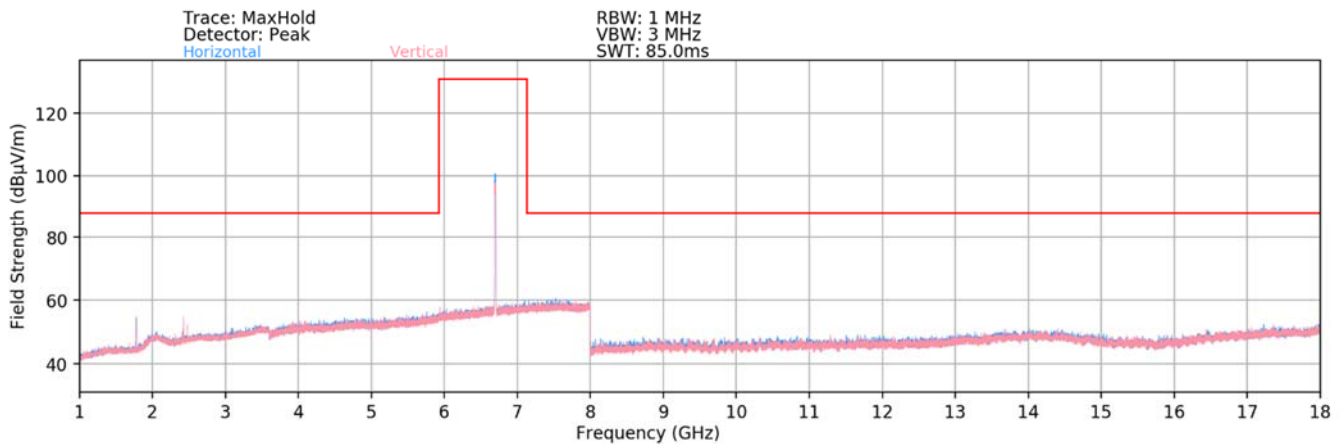


Plot 7-347. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 7 – 20MHz – Ch.149)


FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 209 of 234

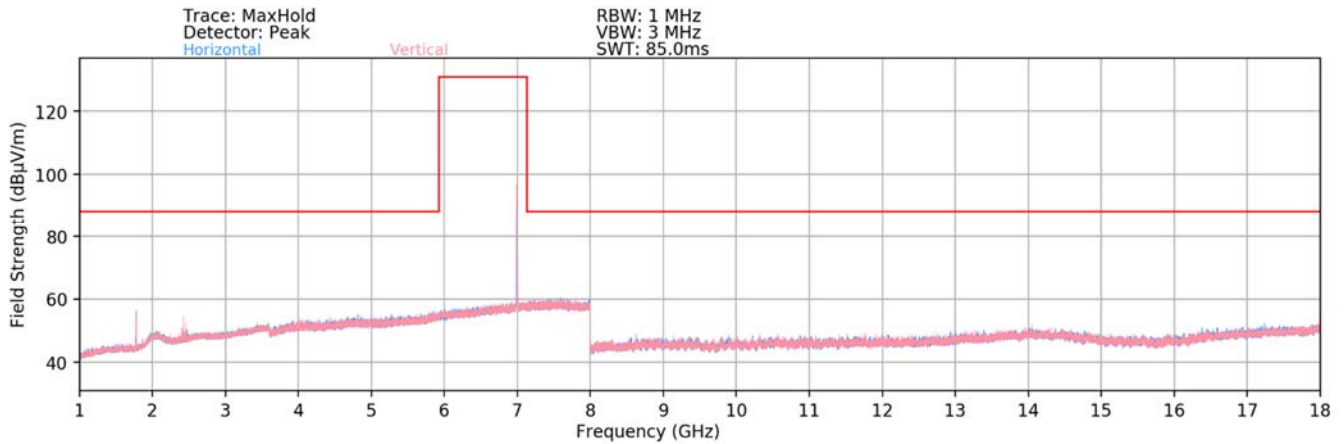

Plot 7-348. Radiated Spurious Plot above 1GHz MIMO (802.11ax- UNII Band 8 – 20MHz – Ch.209)

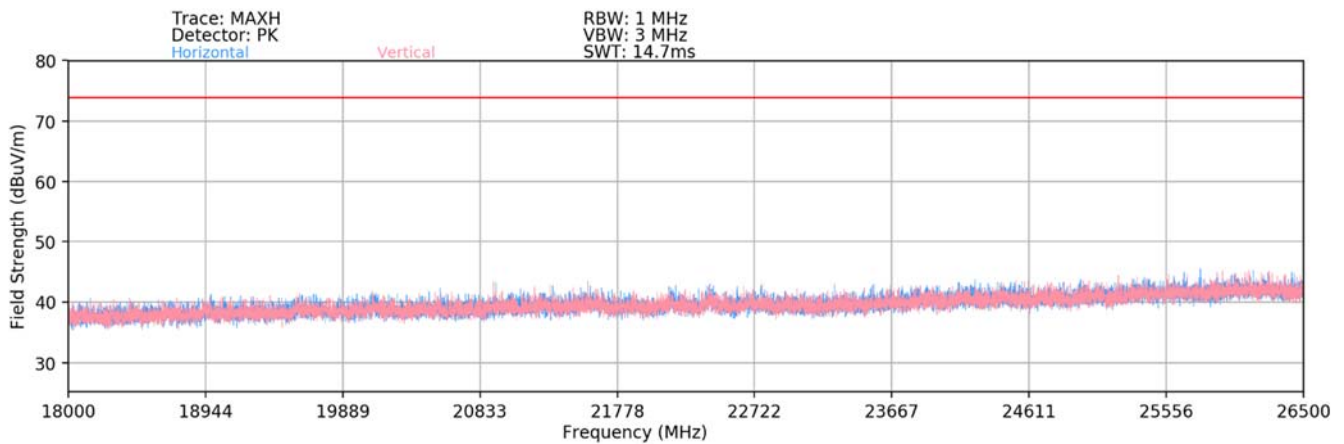

Plot 7-349. Radiated Spurious Plot above 18GHz - 26.5GHz – CH 117 - MIMO (802.11ax)

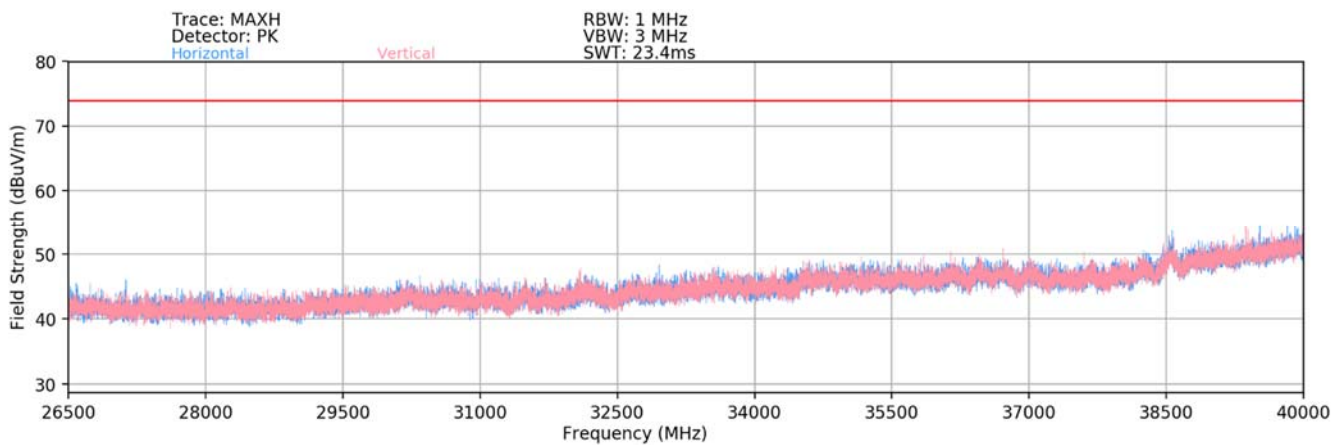

Plot 7-350. Radiated Spurious Plot 26.5GHz - 40GHz – CH 117 - MIMO (802.11ax)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 210 of 234



MIMO Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-79.27	11.97	0.00	39.70	53.98	-14.28
* 11910.00	Peak	H	-	-	-68.16	11.97	0.00	50.81	73.98	-23.17
* 17865.00	Average	H	-	-	-79.89	19.16	0.00	46.27	53.98	-7.71
* 17865.00	Peak	H	-	-	-67.58	19.16	0.00	58.58	73.98	-15.40
* 23820.00	Average	H	-	-	-62.71	3.99	-9.54	38.74	53.98	-15.24
* 23820.00	Peak	H	-	-	-54.82	3.99	-9.54	46.62	73.98	-27.36
29775.00	Peak	H	-	-	-54.61	6.33	-9.54	49.18	68.20	-19.02

Table 7-13. Radiated Measurements MIMO (UNII Band 5 – Low Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-80.93	12.08	0.00	38.15	53.98	-15.83
* 12350.00	Peak	H	-	-	-69.23	12.08	0.00	49.85	73.98	-24.13
* 18525.00	Average	H	-	-	-62.32	1.93	-9.54	37.07	53.98	-16.91
* 18525.00	Peak	H	-	-	-53.86	1.93	-9.54	45.52	73.98	-28.46
24700.00	Peak	H	-	-	-53.69	4.39	-9.54	48.15	68.20	-20.05
30875.00	Peak	H	-	-	-54.76	6.89	-9.54	49.59	68.20	-18.61

Table 7-14. Radiated Measurements MIMO (UNII Band 5 – Mid Channel – 20MHz)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 211 of 234



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Peak	H	-	-	-66.78	12.39	0.00	52.61	68.20	-15.59
* 19245.00	Average	H	-	-	-62.15	2.30	-9.54	37.61	53.98	-16.37
* 19245.00	Peak	H	-	-	-52.98	2.30	-9.54	46.78	73.98	-27.20
25660.00	Peak	H	-	-	-53.39	4.61	-9.54	48.67	68.20	-19.53
32075.00	Peak	H	-	-	-52.16	7.18	-9.54	52.48	68.20	-15.72

Table 7-15. Radiated Measurements MIMO (UNII Band 5 – High Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-81.58	12.08	0.00	37.50	53.98	-16.48
* 12350.00	Peak	H	-	-	-69.85	12.08	0.00	49.23	73.98	-24.75
* 18525.00	Average	H	-	-	-62.11	1.93	-9.54	37.27	53.98	-16.71
* 18525.00	Peak	H	-	-	-53.32	1.93	-9.54	46.06	73.98	-27.92
24700.00	Peak	H	-	-	-53.18	4.39	-9.54	48.66	68.20	-19.54
30875.00	Peak	H	-	-	-53.72	6.89	-9.54	50.63	68.20	-17.57

Table 7-16. Radiated Measurements MIMO (UNII Band 5 – Mid Channel – 20MHz - WCP)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 212 of 234

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Peak	H	-	-	-70.39	12.51	0.00	49.12	68.20	-19.08
* 19305.00	Average	H	-	-	-61.76	2.61	-9.54	38.31	53.98	-15.67
* 19305.00	Peak	H	-	-	-54.02	2.61	-9.54	46.04	73.98	-27.94
25740.00	Peak	H	-	-	-53.85	4.71	-9.54	48.32	68.20	-19.88
32175.00	Peak	H	-	-	-53.15	7.21	-9.54	51.51	68.20	-16.69

Table 7-17. Radiated Measurements MIMO (UNII Band 6 – Low Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Peak	H	-	-	-69.72	12.67	0.00	49.95	68.20	-18.25
* 19425.00	Average	H	-	-	-62.20	2.67	-9.54	37.92	53.98	-16.06
* 19425.00	Peak	H	-	-	-53.56	2.67	-9.54	46.56	73.98	-27.42
25900.00	Peak	H	-	-	-53.70	4.77	-9.54	48.53	68.20	-19.67
32375.00	Peak	H	-	-	-53.88	6.96	-9.54	50.54	68.20	-17.66

Table 7-18. Radiated Measurements MIMO (UNII Band 6 – Mid Channel – 20MHz)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 213 of 234

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Peak	H	-	-	-68.01	12.83	0.00	51.82	68.20	-16.38
* 19545.00	Average	H	-	-	-62.15	2.63	-9.54	37.94	53.98	-16.04
* 19545.00	Peak	H	-	-	-53.41	2.63	-9.54	46.68	73.98	-27.30
26060.00	Peak	H	-	-	-54.48	4.83	-9.54	47.81	68.20	-20.39
32575.00	Peak	H	-	-	-53.51	6.80	-9.54	50.75	68.20	-17.45

Table 7-19. Radiated Measurements MIMO (UNII Band 6 – High Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Peak	H	-	-	-69.93	12.67	0.00	49.74	68.20	-18.46
* 19425.00	Average	H	-	-	-62.29	2.67	-9.54	37.83	53.98	-16.15
* 19425.00	Peak	H	-	-	-53.40	2.67	-9.54	46.72	73.98	-27.26
25900.00	Peak	H	-	-	-53.77	4.77	-9.54	48.47	68.20	-19.73
32375.00	Peak	H	-	-	-54.43	6.96	-9.54	50.00	68.20	-18.20

Table 7-20. Radiated Measurements MIMO (UNII Band 6 – Mid Channel – 20MHz - WCP)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 214 of 234

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Peak	H	-	-	-70.06	12.94	0.00	49.88	68.20	-18.32
* 19605.00	Average	H	-	-	-61.90	2.75	-9.54	38.32	73.98	-35.66
* 19605.00	Peak	H	-	-	-54.80	2.75	-9.54	45.41	68.20	-22.79
26140.00	Peak	H	-	-	-53.27	5.14	-9.54	49.33	68.20	-18.87
32675.00	Peak	H	-	-	-52.86	7.15	-9.54	51.75	68.20	-16.45

Table 7-21. Radiated Measurements MIMO (UNII Band 7 – Low Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-81.58	12.97	0.00	38.39	53.98	-15.59
* 13390.00	Peak	H	-	-	-69.43	12.97	0.00	50.54	73.98	-23.44
* 20085.00	Average	H	-	-	-63.22	3.06	-9.54	37.30	53.98	-16.68
* 20085.00	Peak	H	-	-	-53.26	3.06	-9.54	47.25	73.98	-26.73
26780.00	Peak	H	-	-	-52.64	5.33	-9.54	50.14	68.20	-18.06
33475.00	Peak	H	-	-	-52.74	7.51	-9.54	52.23	68.20	-15.97

Table 7-22. Radiated Measurements MIMO (UNII Band 7 – Mid Channel – 20MHz)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 215 of 234

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Peak	H	-	-	-69.73	13.83	0.00	51.10	68.20	-17.10
* 20625.00	Average	H	-	-	-61.80	3.32	-9.54	38.98	53.98	-15.00
* 20625.00	Peak	H	-	-	-53.46	3.32	-9.54	47.32	73.98	-26.66
27500.00	Peak	H	-	-	-53.47	4.97	-9.54	48.95	68.20	-19.25
34375.00	Peak	H	-	-	-52.81	7.82	-9.54	52.47	68.20	-15.73

Table 7-23. Radiated Measurements MIMO (UNII Band 7 – High Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-81.45	12.97	0.00	38.52	53.98	-15.46
* 13390.00	Peak	H	-	-	-69.14	12.97	0.00	50.83	73.98	-23.15
* 20085.00	Average	H	-	-	-62.50	3.06	-9.54	38.02	53.98	-15.96
* 20085.00	Peak	H	-	-	-53.89	3.06	-9.54	46.63	73.98	-27.35
26780.00	Peak	H	-	-	-54.64	5.33	-9.54	48.15	68.20	-20.05
33475.00	Peak	H	-	-	-52.63	7.51	-9.54	52.34	68.20	-15.86

Table 7-24. Radiated Measurements MIMO (UNII Band 7 – Mid Channel – 20MHz - WCP)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 216 of 234

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Peak	H	-	-	-69.01	13.66	0.00	51.65	68.20	-16.55
* 20685.00	Average	H	-	-	-62.53	3.24	-9.54	38.16	53.98	-15.82
* 20685.00	Peak	H	-	-	-54.27	3.24	-9.54	46.43	73.98	-27.55
27580.00	Peak	H	-	-	-53.87	5.11	-9.54	48.70	68.20	-19.50
34475.00	Peak	H	-	-	-52.40	7.75	-9.54	52.81	68.20	-15.39

Table 7-25. Radiated Measurements MIMO (UNII Band 8 – Low Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Peak	H	-	-	-68.67	13.89	0.00	52.22	68.20	-15.98
* 20985.00	Average	H	-	-	-62.53	3.52	-9.54	38.45	53.98	-15.53
* 20985.00	Peak	H	-	-	-55.28	3.52	-9.54	45.70	73.98	-28.28
27980.00	Peak	H	-	-	-53.64	4.92	-9.54	48.74	68.20	-19.46
34975.00	Peak	H	-	-	-51.71	8.03	-9.54	53.78	68.20	-14.42

Table 7-26. Radiated Measurements MIMO (UNII Band 8 – Mid Channel – 20MHz)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 217 of 234

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Peak	H	-	-	-69.19	14.92	0.00	52.73	68.20	-15.47
* 21345.00	Average	H	-	-	-62.69	3.97	-9.54	38.73	53.98	-15.25
* 21345.00	Peak	H	-	-	-54.65	3.97	-9.54	46.77	73.98	-27.21
28460.00	Peak	H	-	-	-53.26	5.18	-9.54	49.37	68.20	-18.83
35575.00	Peak	H	-	-	-51.99	7.82	-9.54	53.29	68.20	-14.91

Table 7-27. Radiated Measurements MIMO (UNII Band 8 – High Channel – 20MHz)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Peak	H	-	-	-68.89	13.89	0.00	52.00	68.20	-16.20
* 20985.00	Average	H	-	-	-63.44	3.52	-9.54	37.54	53.98	-16.44
* 20985.00	Peak	H	-	-	-55.29	3.52	-9.54	45.69	73.98	-28.29
27980.00	Peak	H	-	-	-53.36	4.92	-9.54	49.03	68.20	-19.17
34975.00	Peak	H	-	-	-52.52	8.03	-9.54	52.98	68.20	-15.22


Table 7-28. Radiated Measurements MIMO (UNII Band 8 – Mid Channel – 20MHz - WCP)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 218 of 234


7.7.2 MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b)(6) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5955MHz
Channel:	1

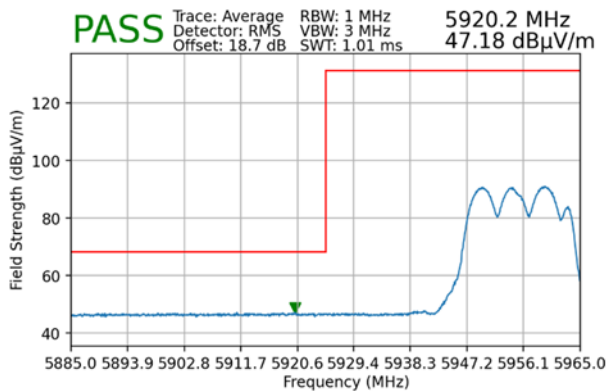


Plot 7-351. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

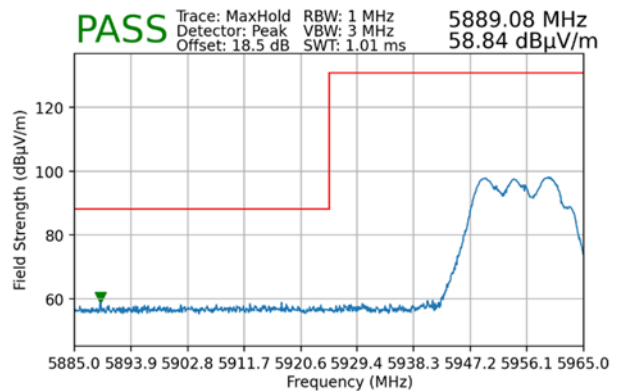


Plot 7-352. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

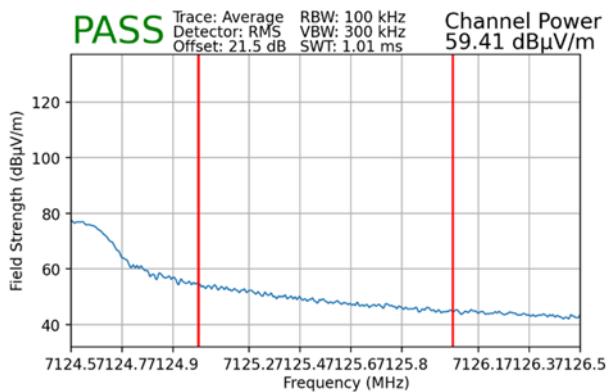

Plot 7-353. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

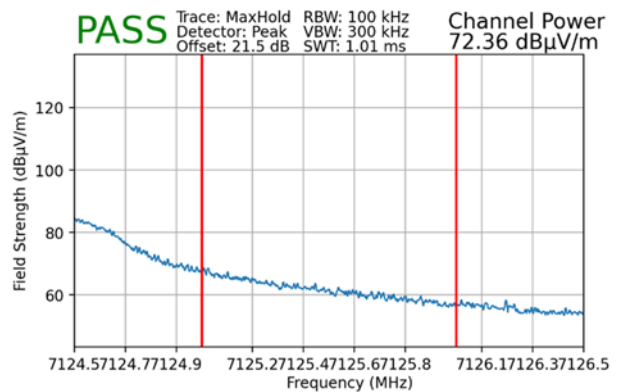


Plot 7-354. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 219 of 234

7.7.3 MIMO Radiated Band Edge Measurements (40MHz BW)


§15.407(b.5) §15.205 §15.209

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

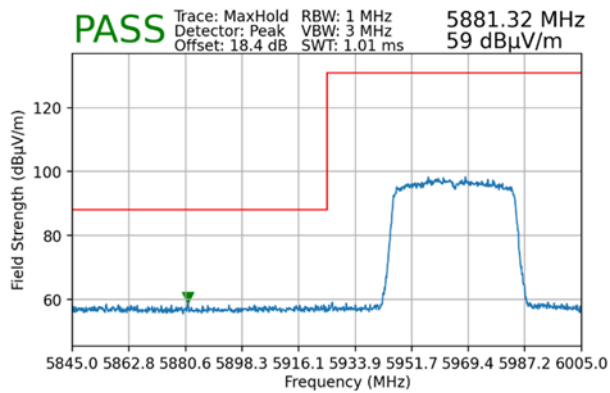

Plot 7-355. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

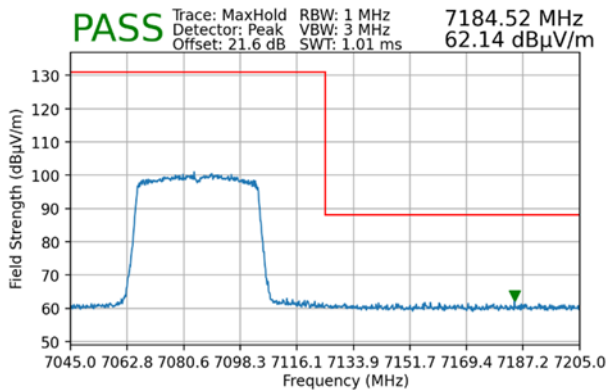


Plot 7-356. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 220 of 234


7.7.4 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.5) §15.205 §15.209

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

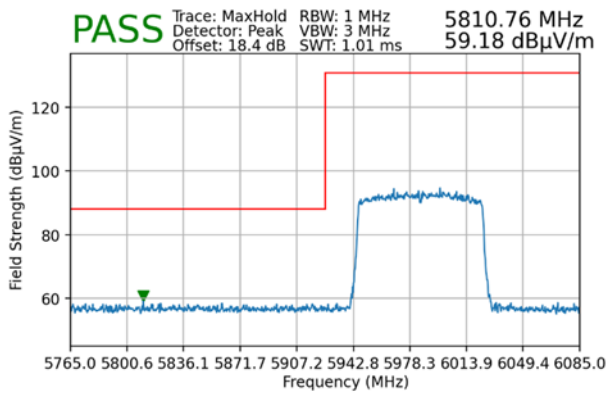

**Plot 7-357. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 5)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

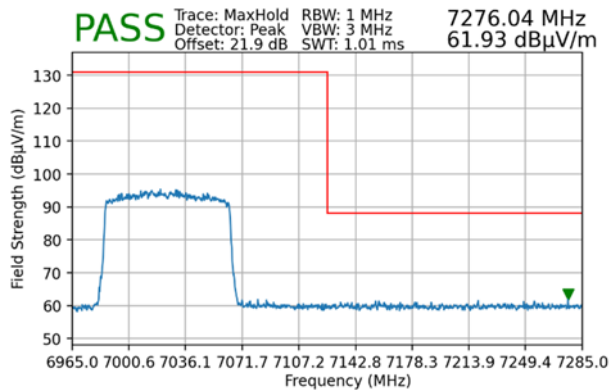


**Plot 7-358. Radiated Upper Band Edge Plot MIMO
(Peak – UNII Band 8)**


FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 221 of 234

7.7.5 MIMO Radiated Band Edge Measurements (160MHz BW) §15.407(b.5) §15.205 §15.209

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

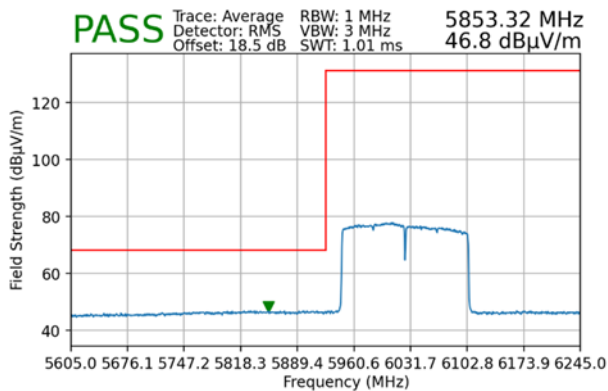


Plot 7-359. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

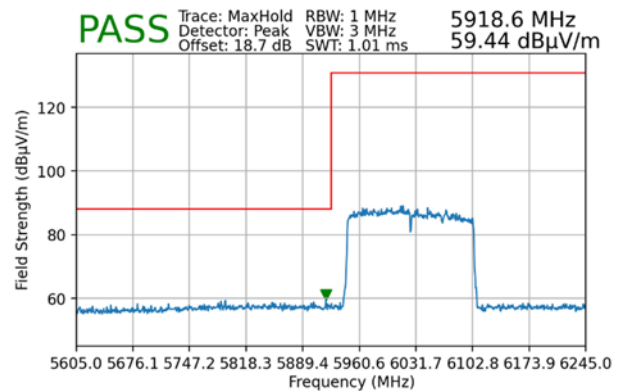


Plot 7-360. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

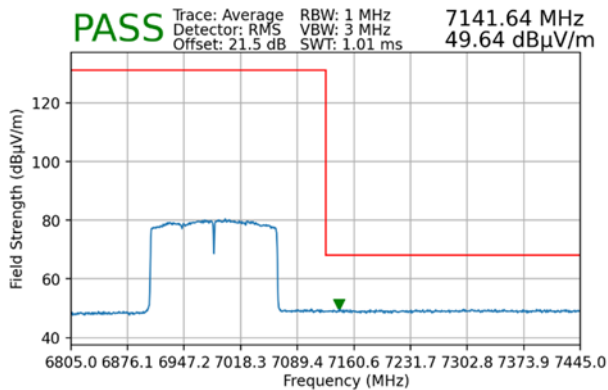

Plot 7-361. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

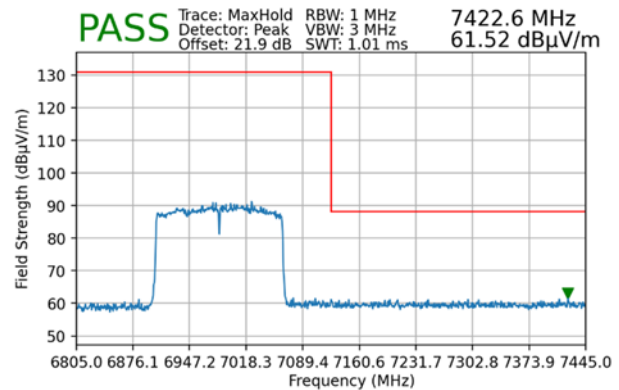

Plot 7-362. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 222 of 234



7.8 Radiated Spurious Emissions Measurements – Below 1GHz §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All emissions <1GHz must not exceed the limit shown in Table 7-29 per Section 15.209

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-29. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 223 of 234

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

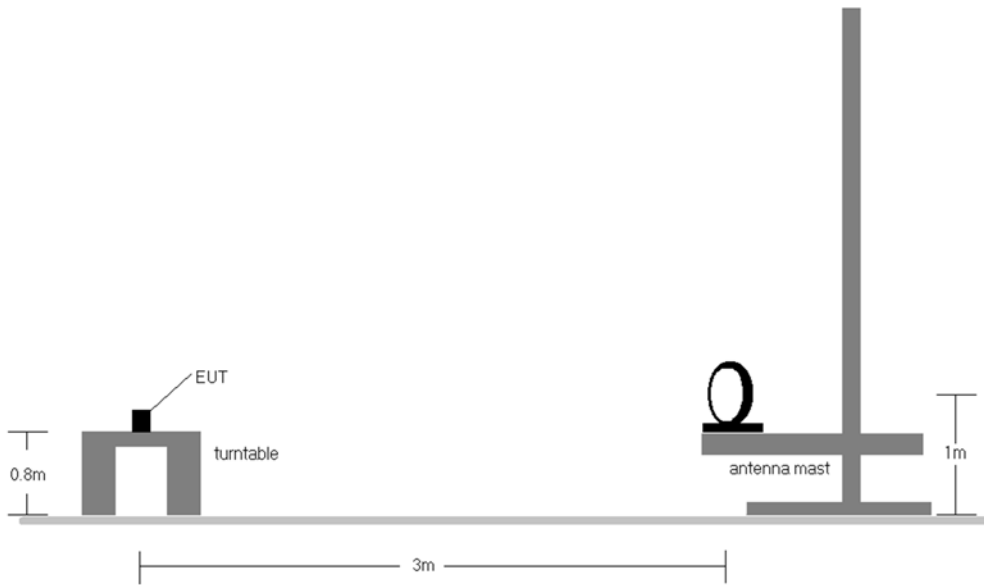


Figure 7-7. Radiated Test Setup < 30MHz

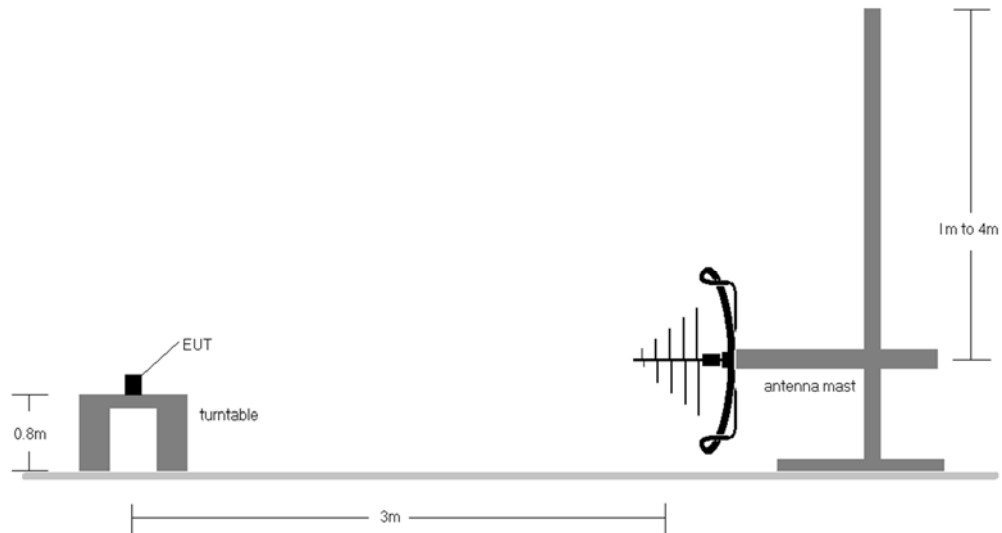


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 224 of 234


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-29.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 225 of 234

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

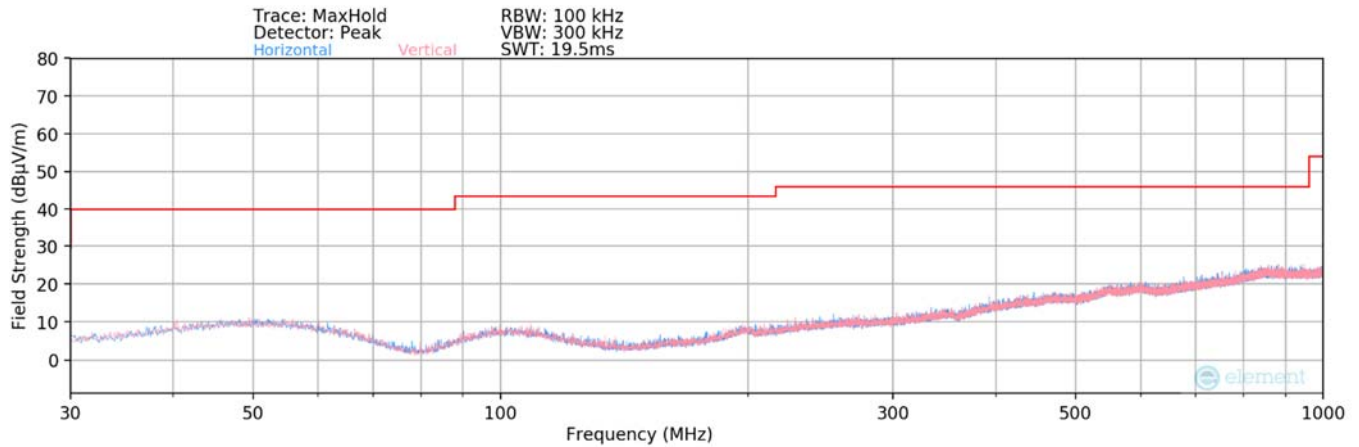

Plot 7-363. Radiated Spurious Plot below 1GHz

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 226 of 234

7.9 Line-Conducted Test Data

§15.407

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-30. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 227 of 234

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


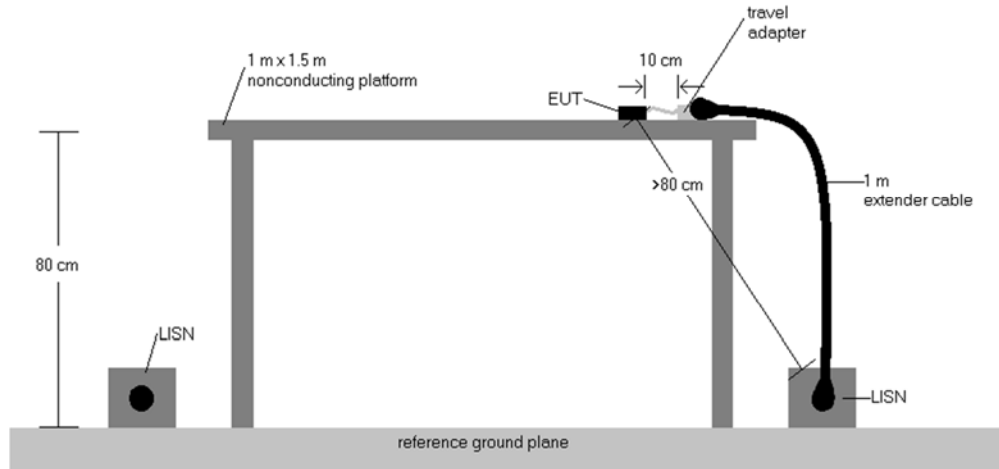


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: PY7-76056F	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset	Page 228 of 234

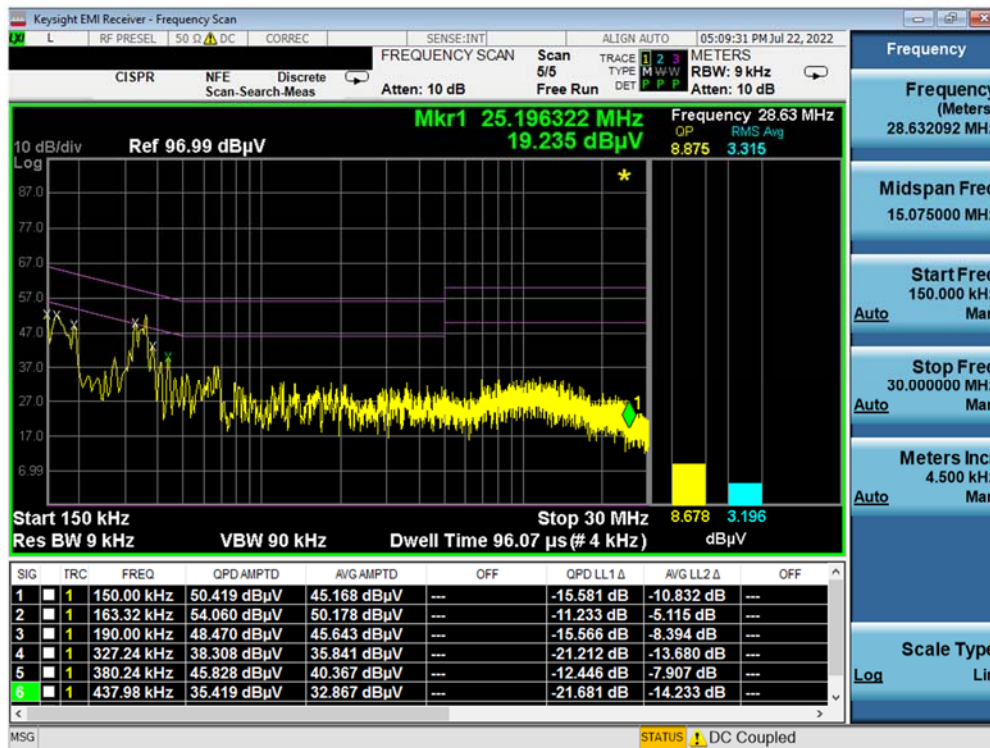

Plot 7-364. Line Conducted Plot with 802.11a UNII Band 5 (L1)

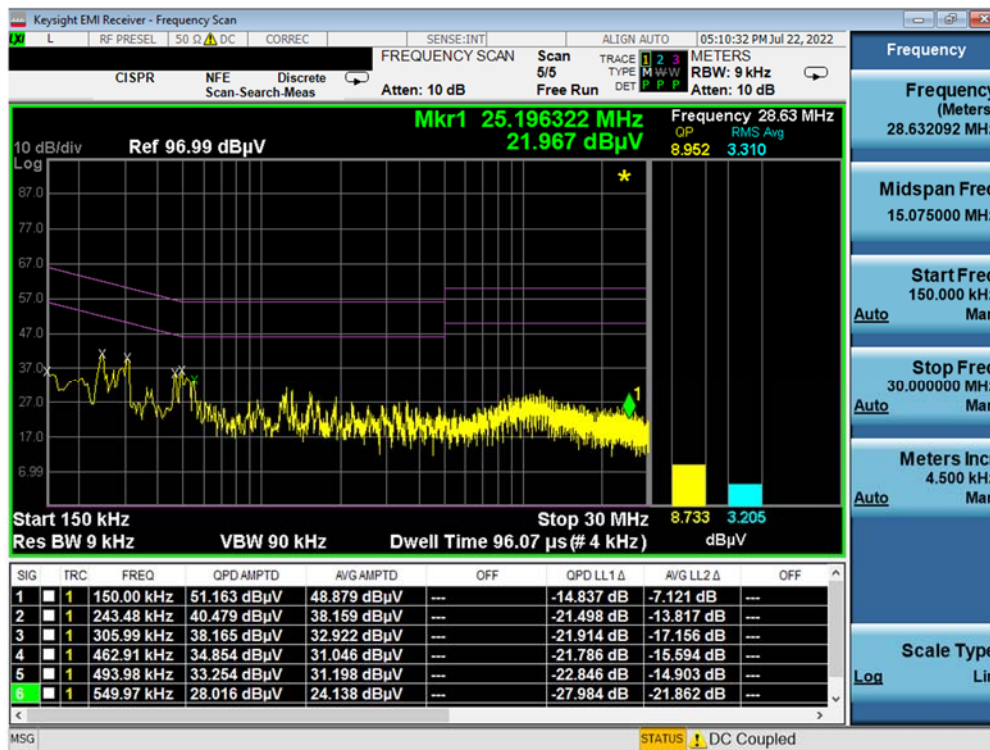

Plot 7-365. Line Conducted Plot with 802.11a UNII Band 5 (N)

FCC ID: PY7-76056F		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2205240063-22.PY7	Test Dates: 6/3/2022 – 8/10/2022	EUT Type: Portable Handset		Page 229 of 234