



# FCC RF Test Report

**APPLICANT** : Sony Mobile Communications Inc.  
**EQUIPMENT** : GSM/WCDMA/LTE Phone+Bluetooth,  
DTS/UNII a/b/g/n/ac and NFC  
**BRAND NAME** : Sony  
**FCC ID** : PY7-48140L  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DSS) Spread Spectrum Transmitter

The product was received on Jun. 27, 2017 and testing was completed on Oct. 20, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL INFORMATION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Modification of EUT ..... 6

    1.5 Testing Location ..... 7

    1.6 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

    2.1 Carrier Frequency Channel ..... 8

    2.2 Descriptions of Test Mode ..... 9

    2.3 Test Mode ..... 10

    2.4 Connection Diagram of Test System ..... 11

    2.5 Support Unit used in test configuration and system ..... 12

    2.6 UT Operation Test Setup ..... 12

    2.7 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 Number of Channel Measurement ..... 13

    3.2 Hopping Channel Separation Measurement ..... 15

    3.3 Dwell Time Measurement ..... 21

    3.4 20dB and 99% Bandwidth Measurement ..... 24

    3.5 Output Power Measurement..... 35

    3.6 Conducted Band Edges Measurement..... 36

    3.7 Conducted Spurious Emission Measurement ..... 43

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 53

    3.9 AC Conducted Emission Measurement..... 57

    3.10 Antenna Requirements ..... 59

**4 LIST OF MEASURING EQUIPMENT ..... 60**

**5 UNCERTAINTY OF EVALUATION..... 62**

**APPENDIX A. TEST RESULT OF CONDUCTED TEST ITEMS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR762713-01A	Rev. 01	Initial issue of report	Nov. 06, 2017



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.88 dB at 37.020 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.30 dB at 1.070 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 GENERAL INFORMATION

## 1.1 Applicant

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

## 1.2 Manufacturer

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, FM Receiver, NFC, and GPS.

Standards-related Product Specification			
Antenna Type / Gain		Monopole Antenna with gain -1.50 dBi	

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	2.27	RQ3005X7GH	RF conducted measurement
		CQ300000QK	Radiated Spurious Emission
		CQ30000211	AC Conducted Emission



Accessory List	
AC Adapter	Model Name: UCH12
	S/N:
	VB17W34100228 (for radiated spurious emission) VB17W34100256 (for conducted emission)
Earphone 1	Model Name: MH410c
	S/N: N/A
USB Cable	Model Name: UCB20
	S/N: N/A

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH13-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-





## 2.2 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Peak Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	9.80 dBm	8.74 dBm	9.01 dBm
Ch39	2441MHz	8.78 dBm	7.79 dBm	8.28 dBm
Ch78	2480MHz	8.86 dBm	7.75 dBm	8.19 dBm

Channel	Frequency	Bluetooth RF Output Average Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	9.72 dBm	6.31 dBm	6.27 dBm
Ch39	2441MHz	8.70 dBm	5.34 dBm	5.36 dBm
Ch78	2480MHz	8.67 dBm	5.40 dBm	5.42 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Z plane for 1Mbps, X plane for 2Mbps and 3Mbps as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.




### 2.3 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth 1Mbps GFSK / EDR 2Mbps $\pi/4$ -DQPSK / EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz for 1Mbps Mode 2: CH39_2441 MHz for 1Mbps Mode 3: CH78_2480 MHz for 1Mbps Mode 4: CH00_2402 MHz for 2Mbps Mode 5: CH39_2441 MHz for 2Mbps Mode 6: CH78_2480 MHz for 2Mbps Mode 7: CH00_2402 MHz for 3Mbps Mode 8: CH39_2441 MHz for 3Mbps Mode 9: CH78_2480 MHz for 3Mbps		
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (2.4GHz) Link + Earphone 1 + Battery + USB Cable (Charging from Adapter)		

## 2.4 Connection Diagram of Test System

<Bluetooth Tx Mode>

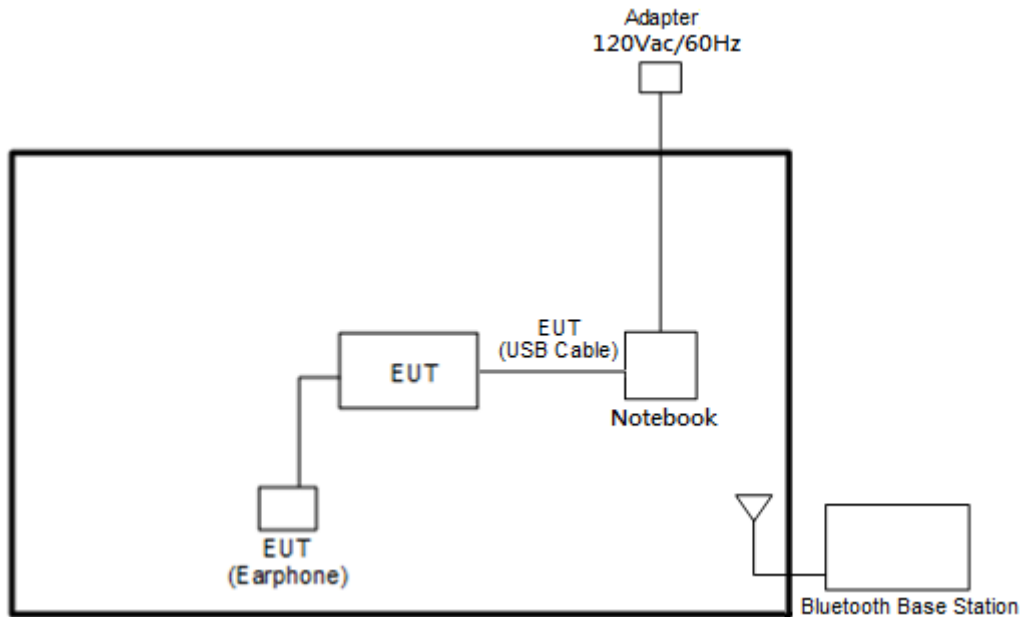

<AC Conducted Emission Mode>

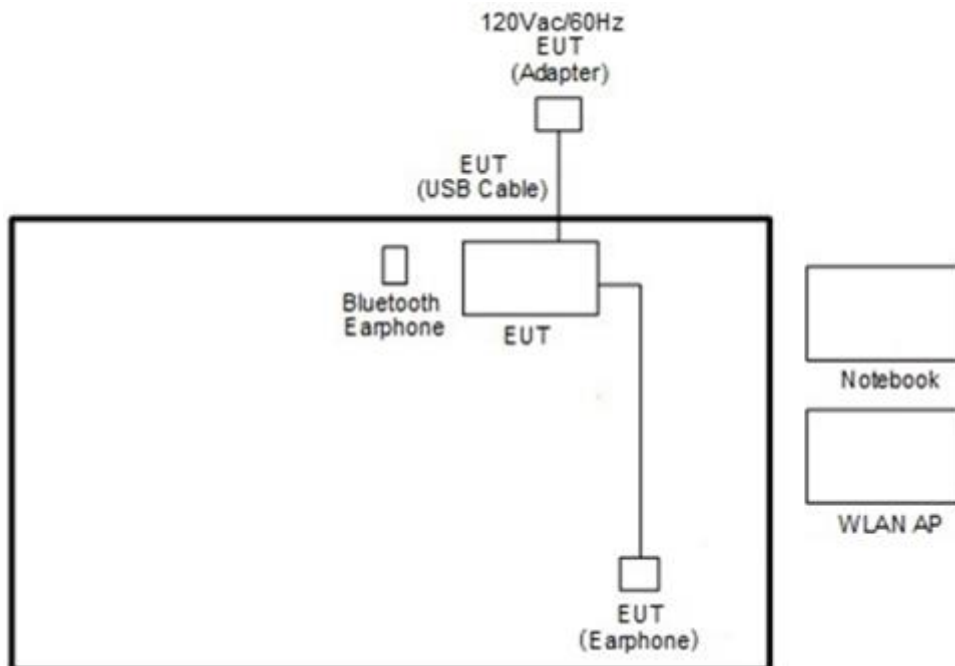



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2.6 UT Operation Test Setup

The RF test items utility, an engineering test program was programmed in order to make the EUT get into the engineering modes to contact with base station for continuous transmitting.

## 2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

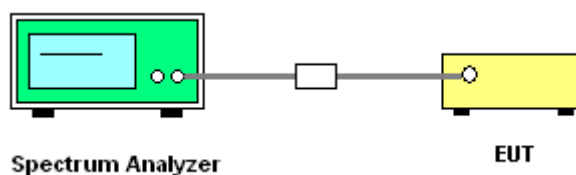





### 3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

Number of Hopping Channel Plot on Channel 00 - 78

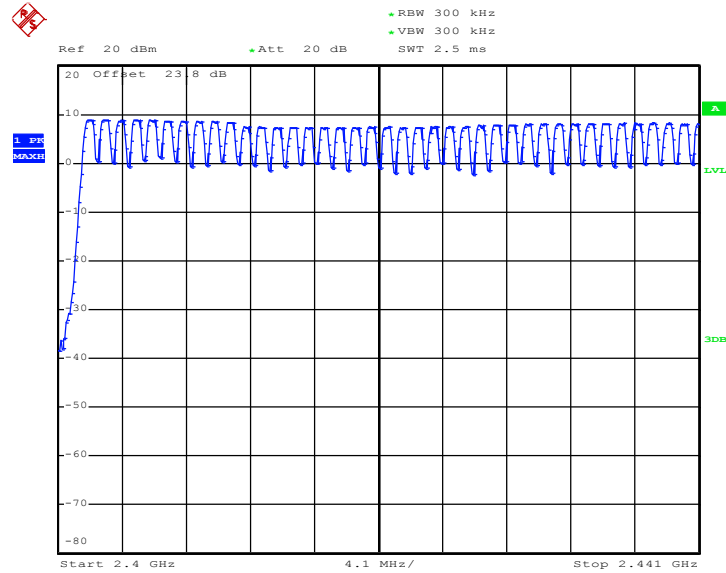

Date: 13.OCT.2017 13:58:51

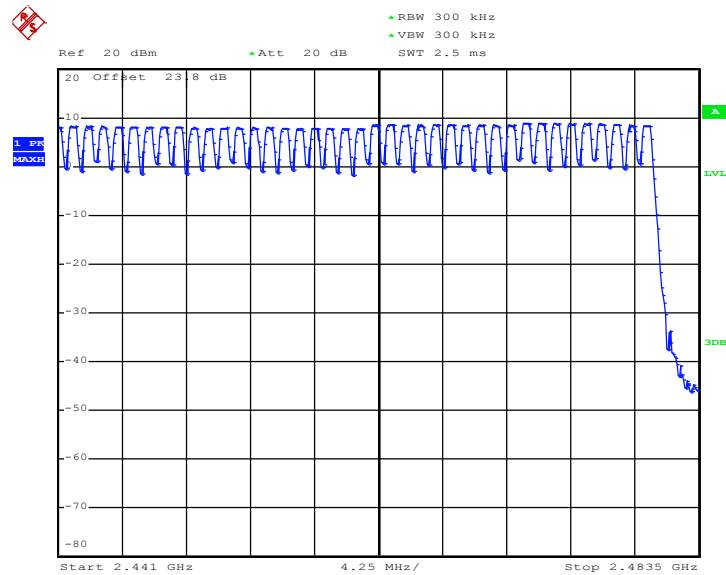

Date: 13.OCT.2017 14:00:11

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup






### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

<1Mbps>

Channel Separation Plot on Channel 00 - 01

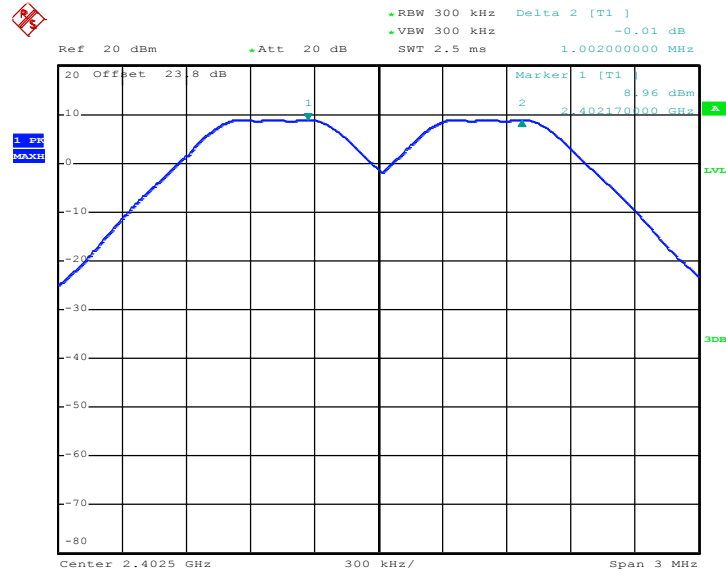


Date: 13.OCT.2017 13:52:50






### Channel Separation Plot on Channel 39 - 40

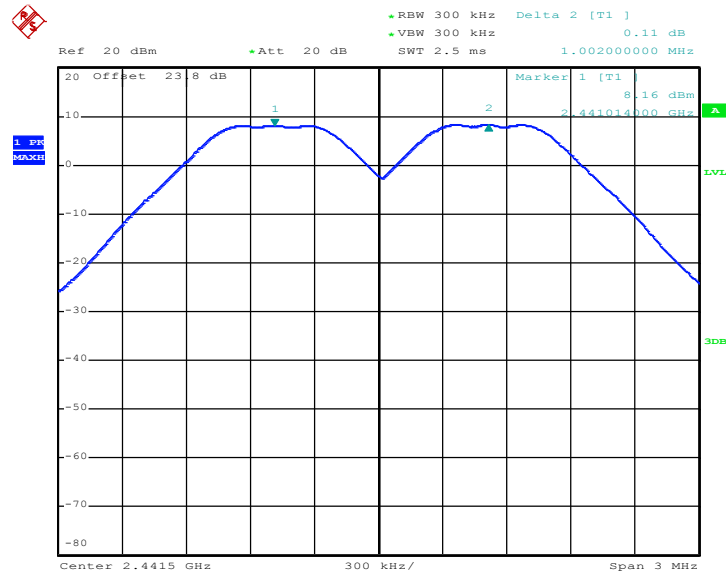

Date: 13.OCT.2017 14:08:16

### Channel Separation Plot on Channel 77 - 78

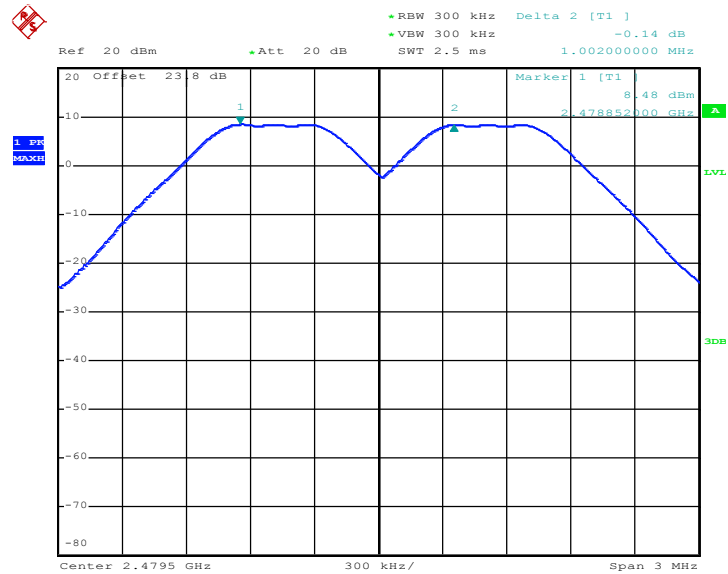


Date: 13.OCT.2017 14:15:20




<2Mbps>

Channel Separation Plot on Channel 00 - 01

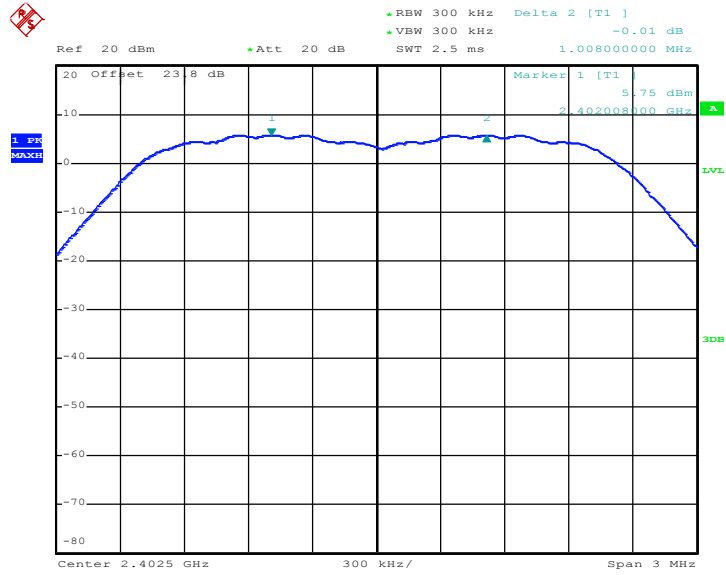

Date: 13.OCT.2017 14:19:31


Channel Separation Plot on Channel 39 - 40

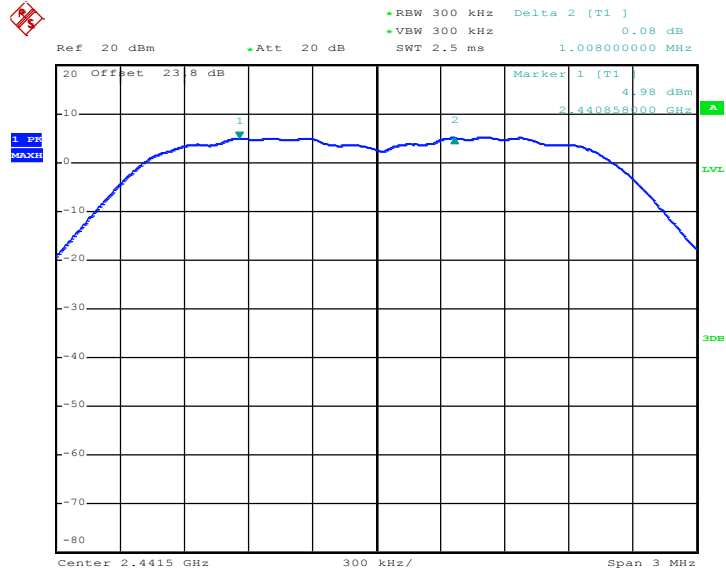

Date: 13.OCT.2017 14:29:32




Channel Separation Plot on Channel 77 - 78

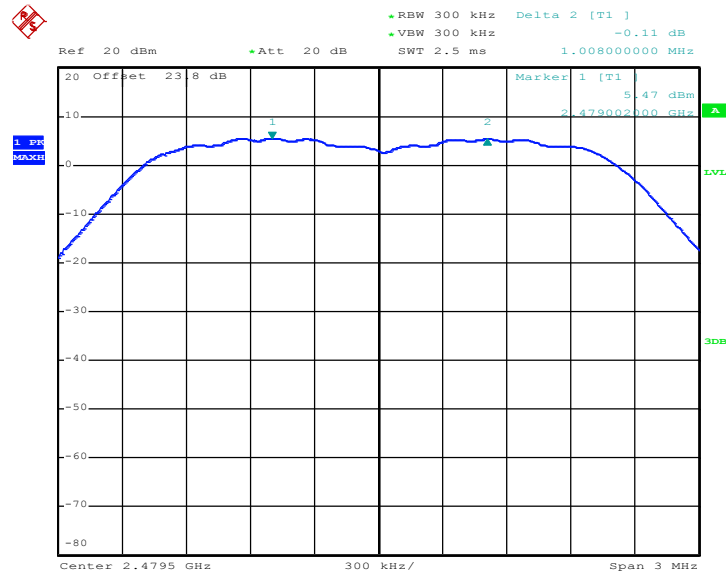

Date: 13.OCT.2017 14:30:26

<3Mbps>


Channel Separation Plot on Channel 00 - 01

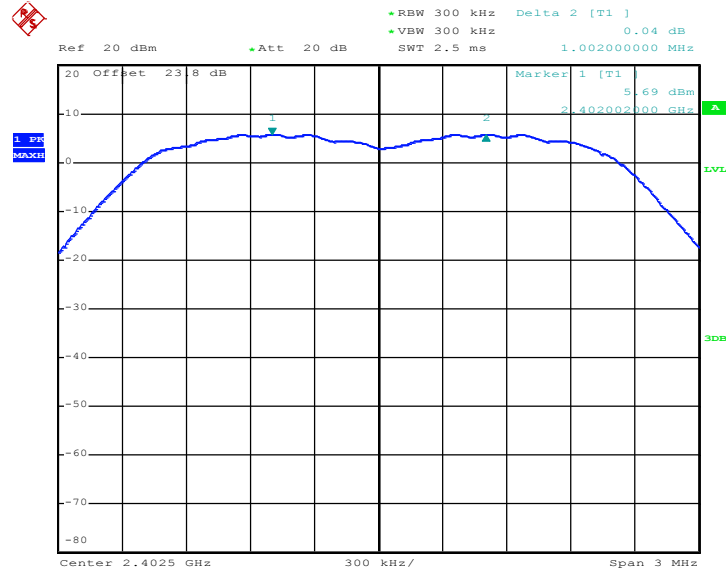

Date: 13.OCT.2017 14:36:19




Channel Separation Plot on Channel 39 - 40

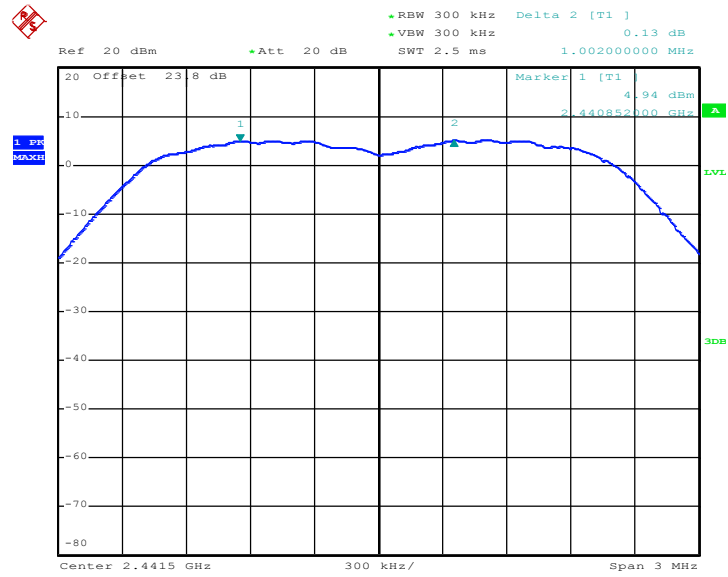

Date: 13.OCT.2017 14:40:44

Channel Separation Plot on Channel 77 - 78

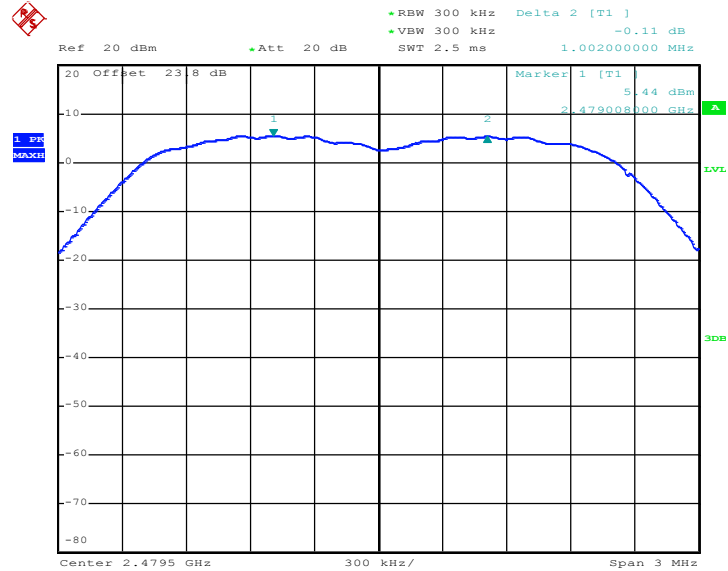

Date: 13.OCT.2017 14:45:41

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup





### 3.3.5 Test Result of Dwell Time


Please refer to Appendix A.

**Remark:**

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

**Package Transfer Time Plot**


<1Mbps>

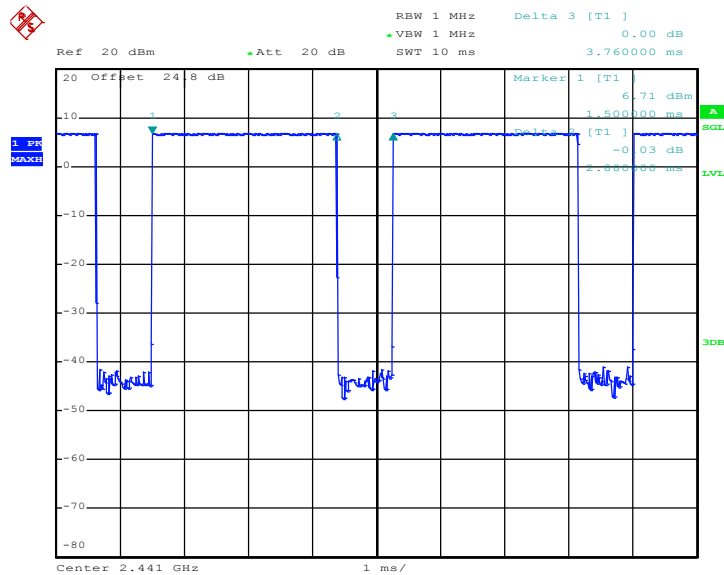

Date: 25.SEP.2017 15:59:00




<2Mbps>

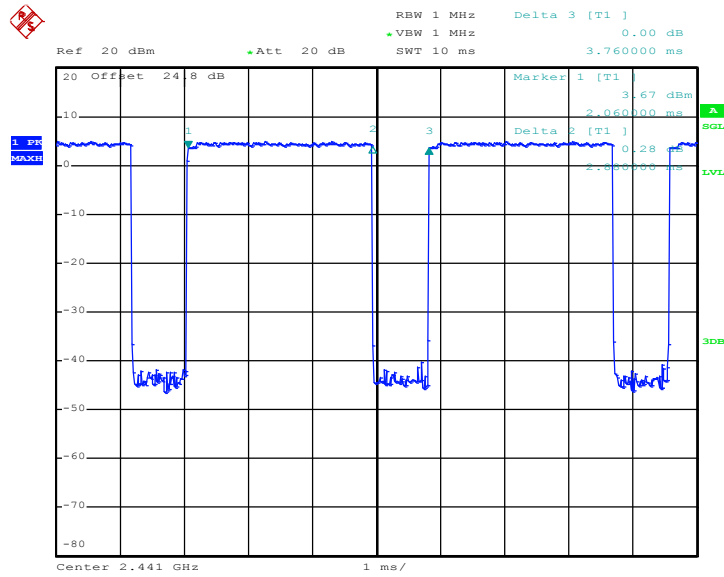

Date: 25.SEP.2017 16:00:59

<3Mbps>

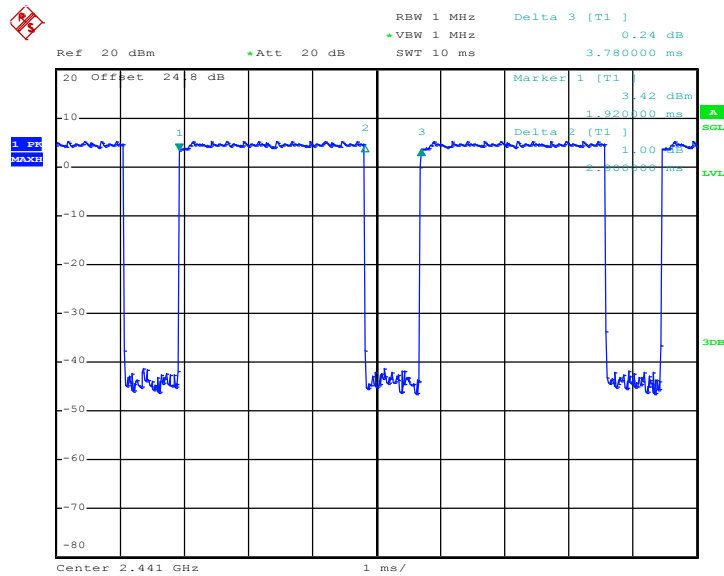

Date: 25.SEP.2017 16:06:06

### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup



#### 3.4.5 Test Result of 20dB Bandwidth


Please refer to Appendix A.






<1Mbps>

20 dB Bandwidth Plot on Channel 00

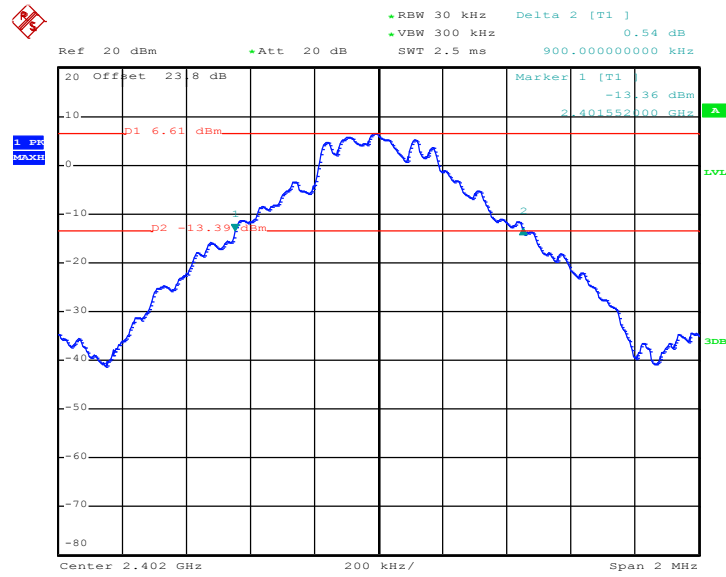

Date: 13.OCT.2017 14:11:53


20 dB Bandwidth Plot on Channel 39

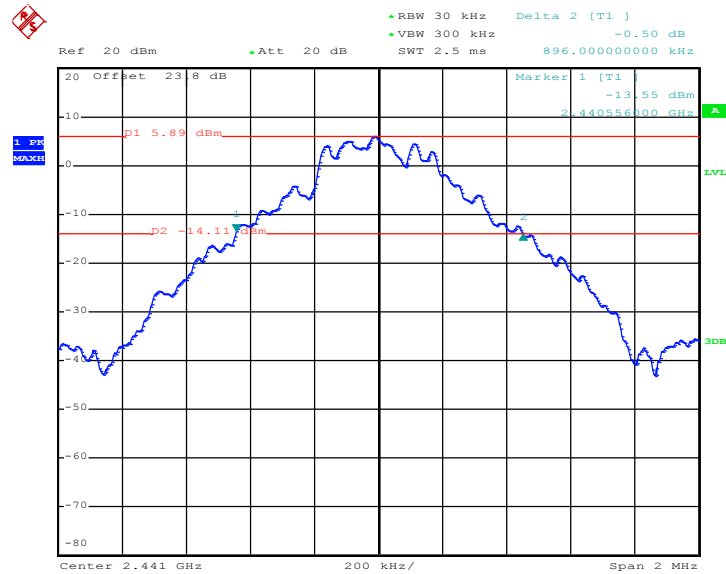

Date: 13.OCT.2017 14:12:46




20 dB Bandwidth Plot on Channel 78

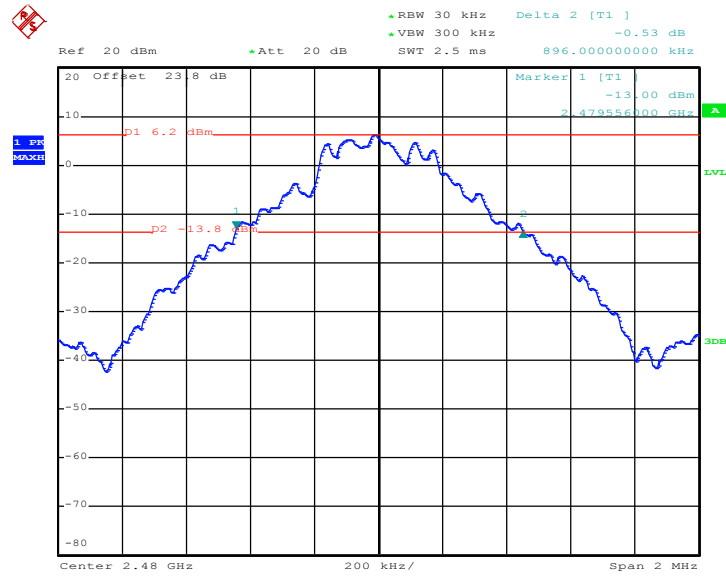

Date: 13.OCT.2017 14:16:09

<2Mbps>


20 dB Bandwidth Plot on Channel 00

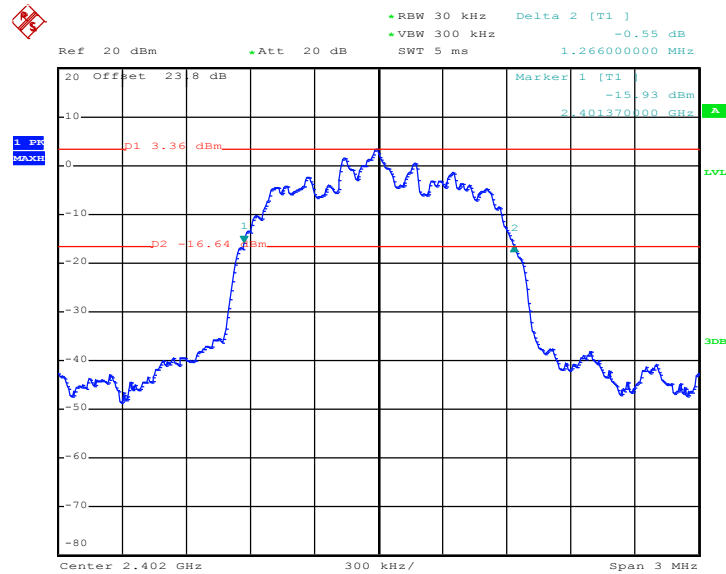

Date: 13.OCT.2017 14:20:24




20 dB Bandwidth Plot on Channel 39

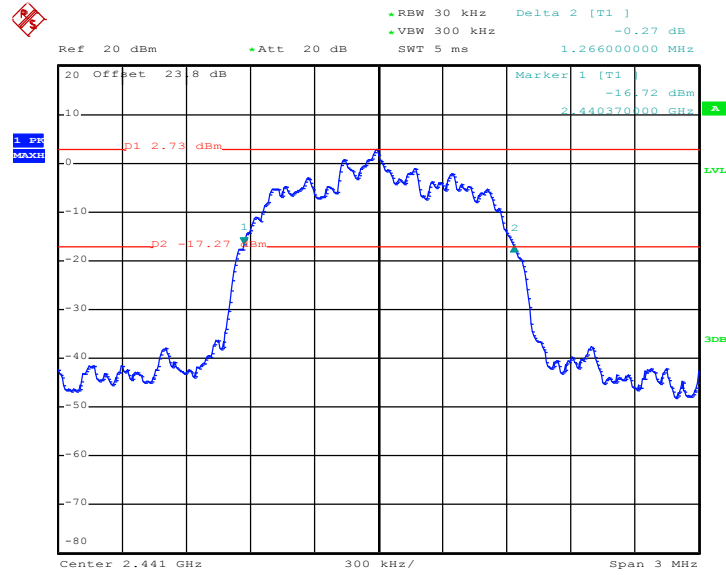

Date: 13.OCT.2017 14:25:53

20 dB Bandwidth Plot on Channel 78

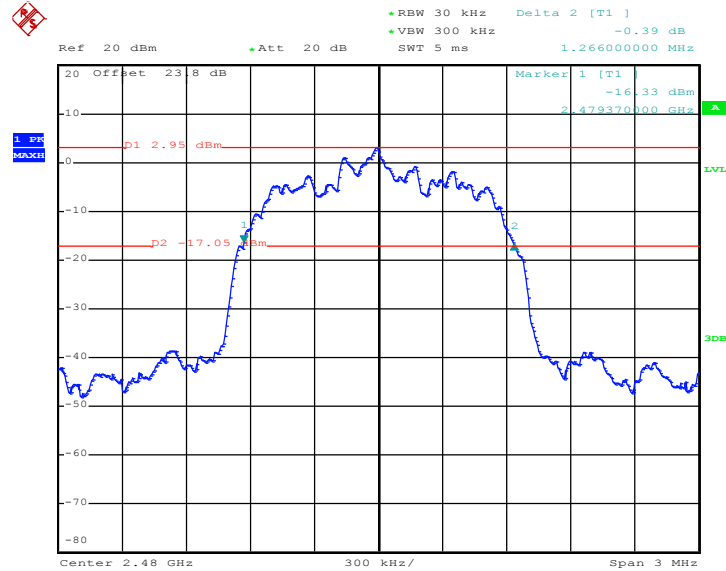


Date: 13.OCT.2017 14:31:38




<3Mbps>

20 dB Bandwidth Plot on Channel 00

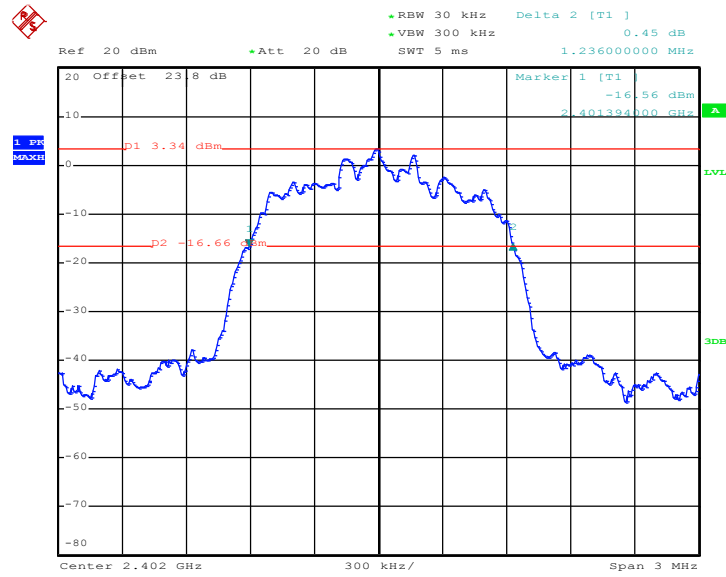

Date: 13.OCT.2017 14:37:01


20 dB Bandwidth Plot on Channel 39

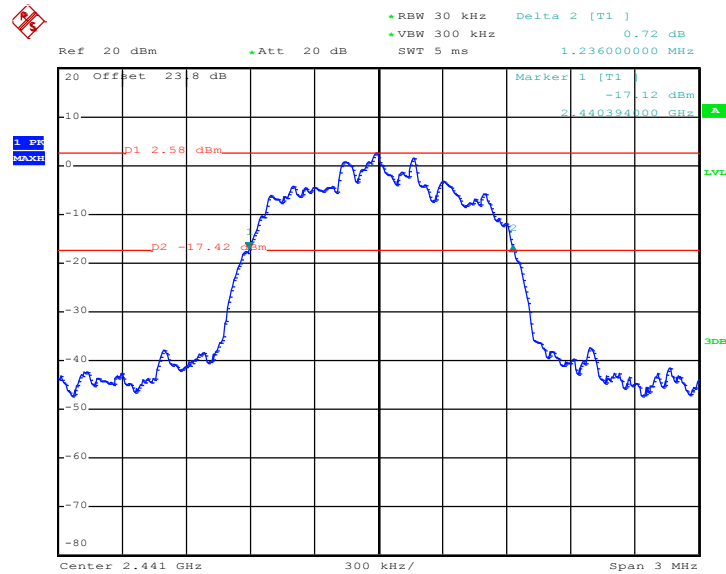

Date: 13.OCT.2017 14:41:55



20 dB Bandwidth Plot on Channel 78

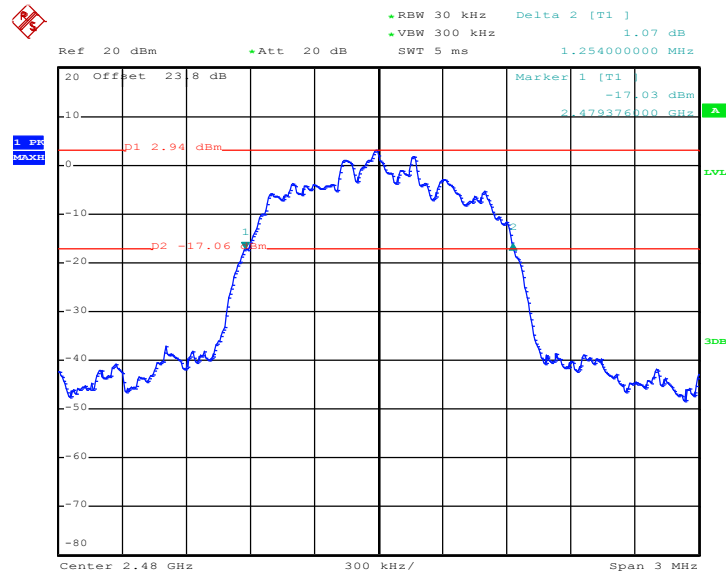

Date: 13.OCT.2017 14:46:38




### 3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>


#### 99% Occupied Bandwidth Plot on Channel 00

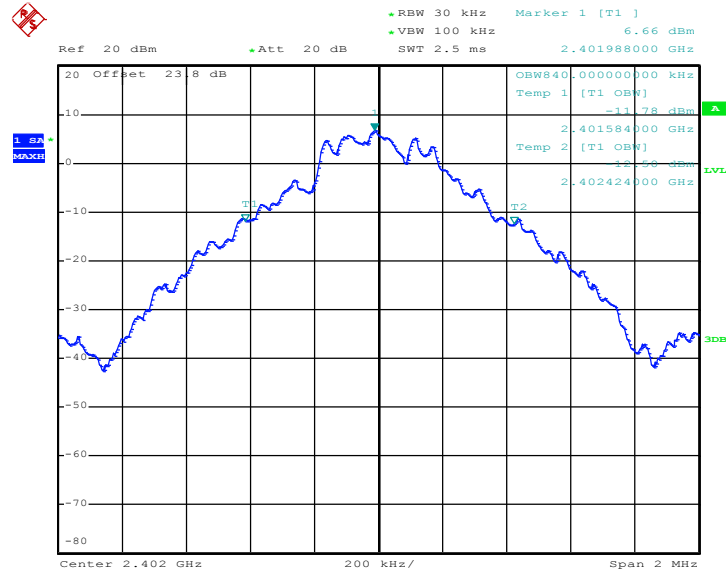

Date: 13.OCT.2017 13:54:39




99% Occupied Bandwidth Plot on Channel 39

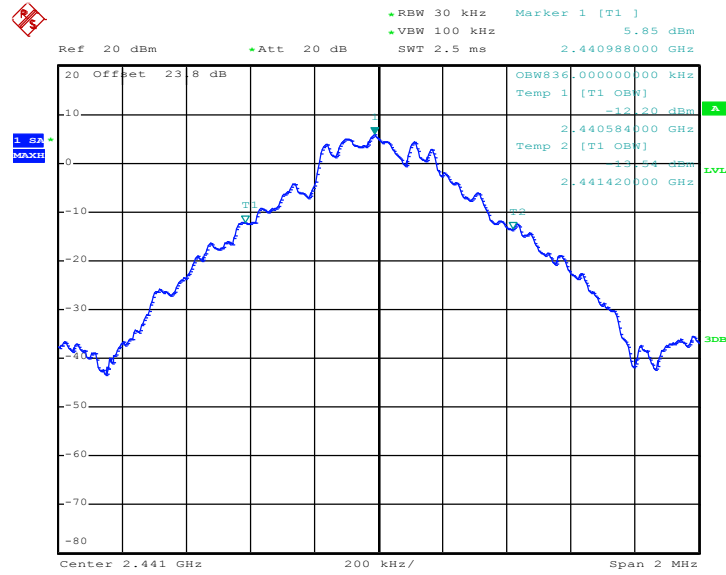

Date: 13.OCT.2017 14:13:21

99% Occupied Bandwidth Plot on Channel 78

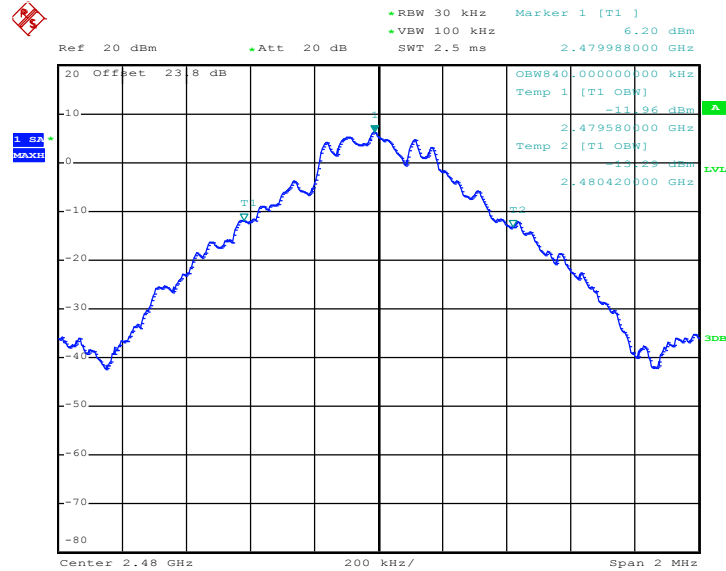


Date: 13.OCT.2017 14:17:15




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

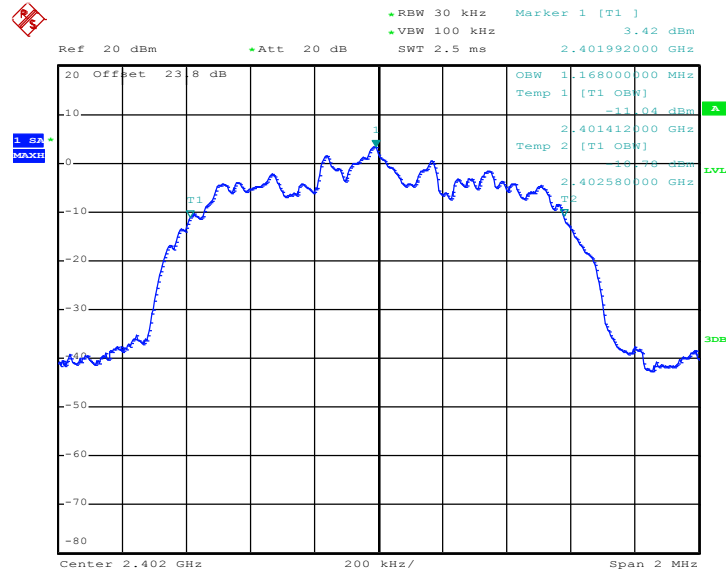

Date: 13.OCT.2017 14:22:04

99% Occupied Bandwidth Plot on Channel 39

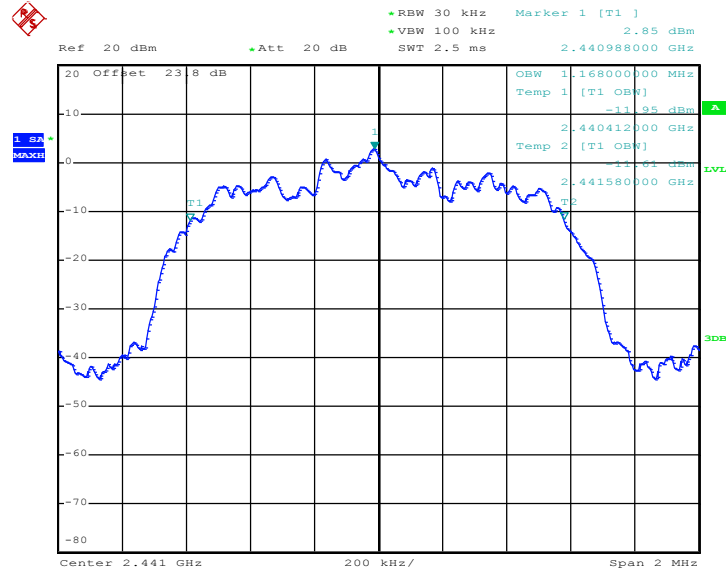


Date: 13.OCT.2017 14:26:32






99% Occupied Bandwidth Plot on Channel 78

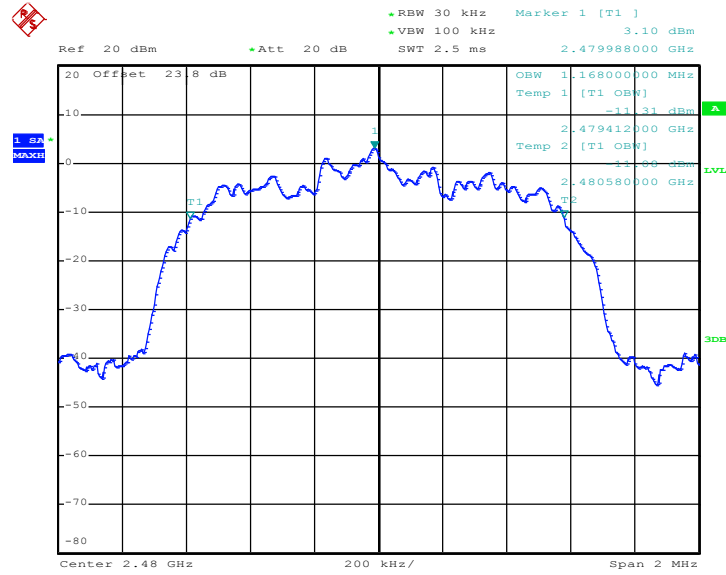

Date: 13.OCT.2017 14:33:03

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

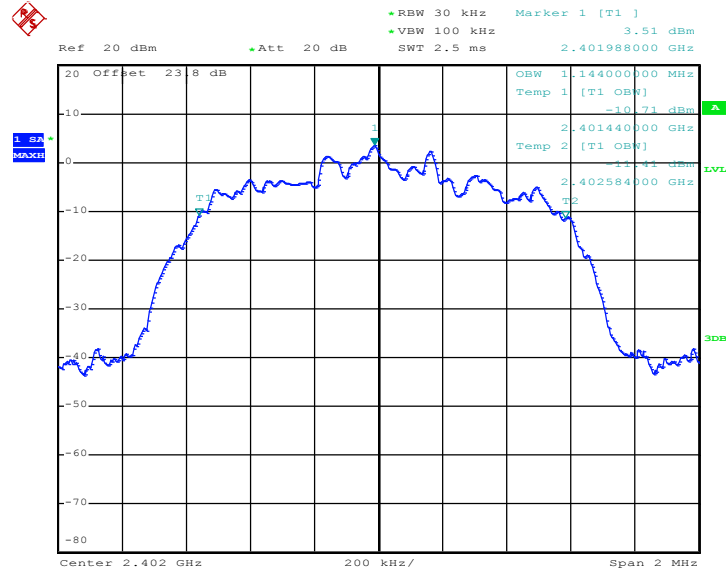

Date: 13.OCT.2017 14:37:57




99% Occupied Bandwidth Plot on Channel 39

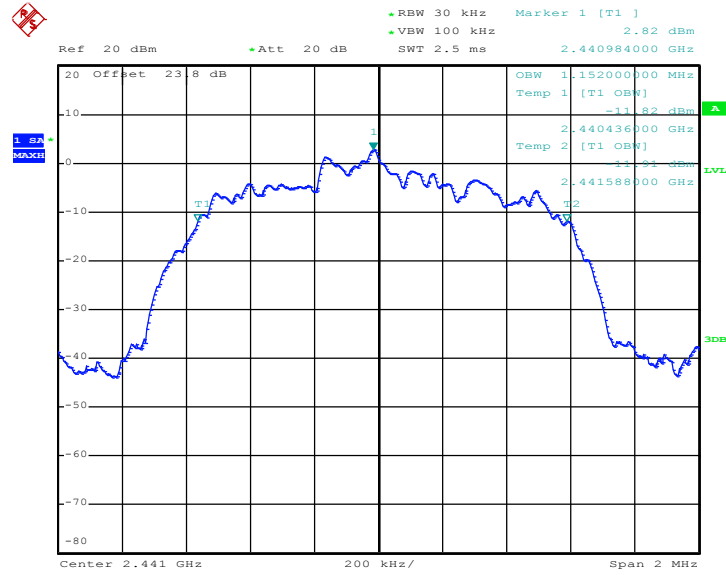

Date: 13.OCT.2017 14:42:31

99% Occupied Bandwidth Plot on Channel 78

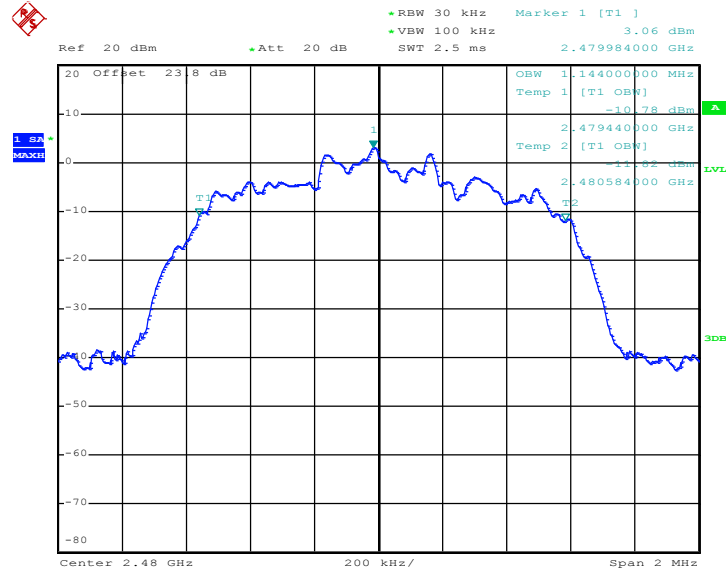

Date: 13.OCT.2017 14:47:45

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

### **3.5 Output Power Measurement**

#### **3.5.1 Limit of Output Power**

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


#### **3.5.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.5.3 Test Procedures**

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### **3.5.4 Test Setup**

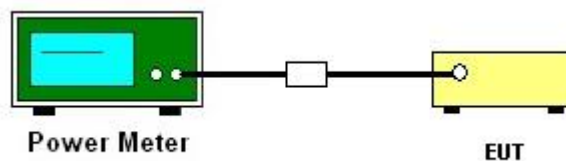

#### **3.5.5 Test Result of Peak Output Power**

Please refer to Appendix A.

#### **3.5.6 Test Result of Average Output Power (Reporting Only)**

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

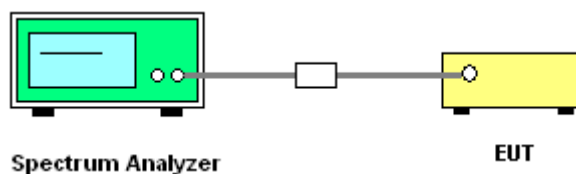




### 3.6.5 Test Result of Conducted Band Edges


<1Mbps>

Low Band Edge Plot on Channel 00

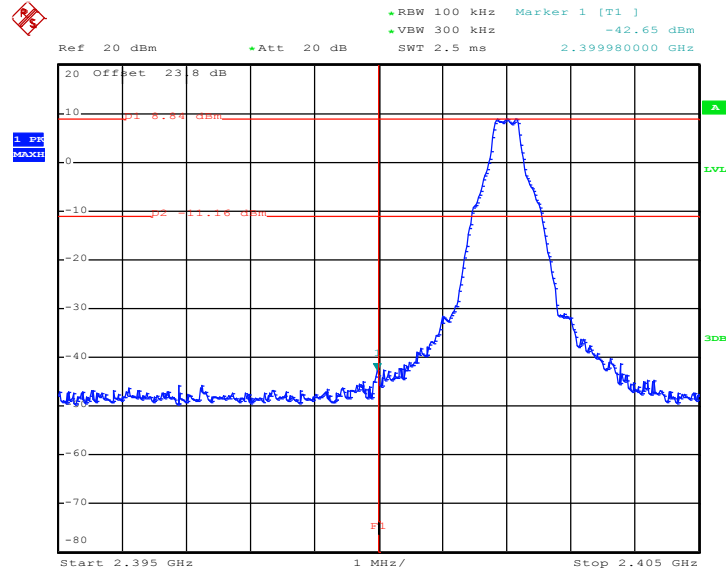

Date: 13.OCT.2017 14:05:57

High Band Edge Plot on Channel 78

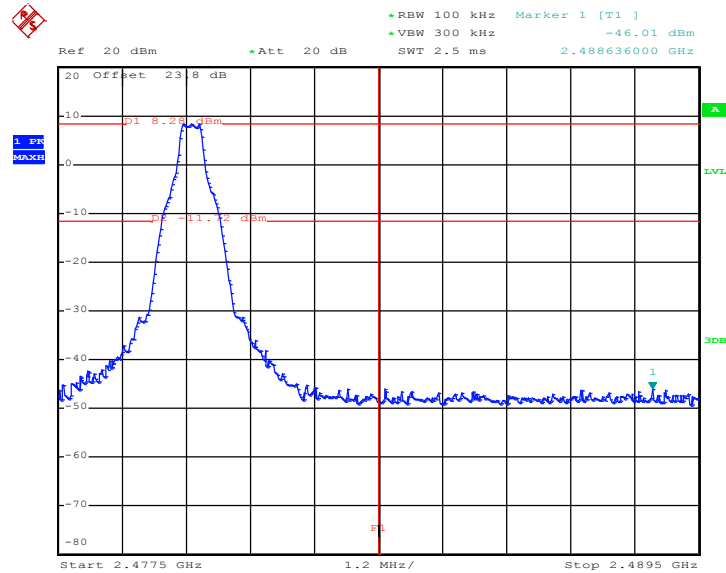


Date: 13.OCT.2017 14:16:37




<2Mbps>

Low Band Edge Plot on Channel 00

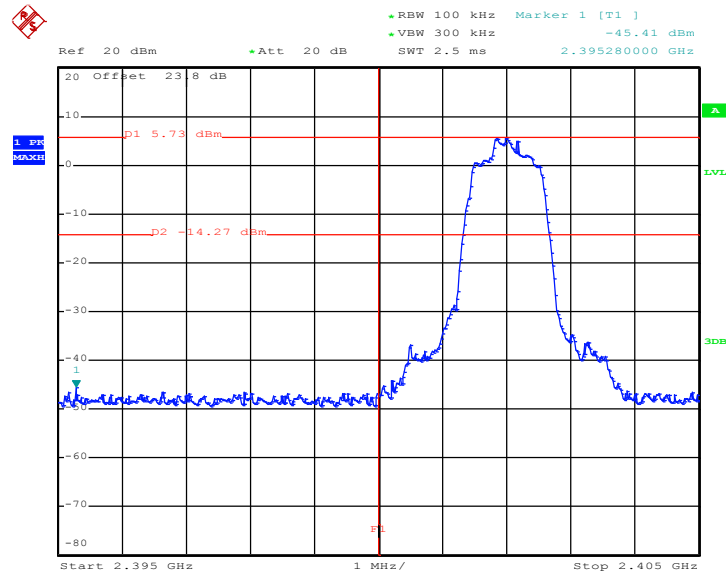

Date: 13.OCT.2017 14:20:47

High Band Edge Plot on Channel 78

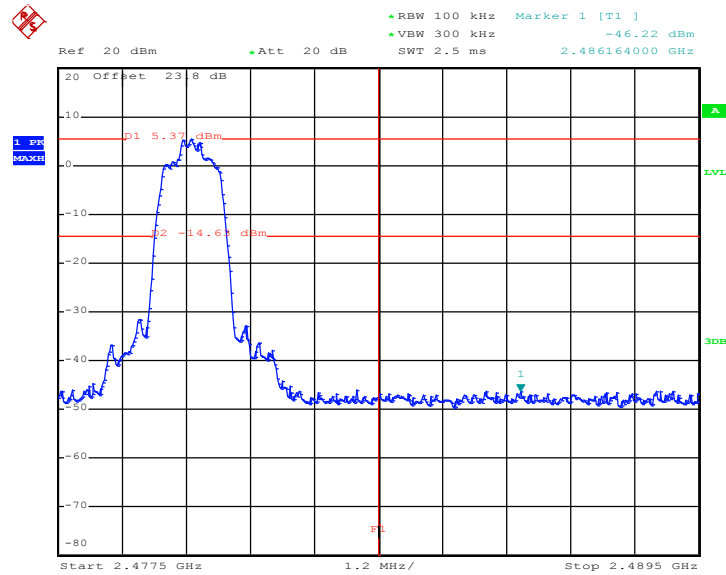


Date: 13.OCT.2017 14:32:23




<3Mbps>

Low Band Edge Plot on Channel 00

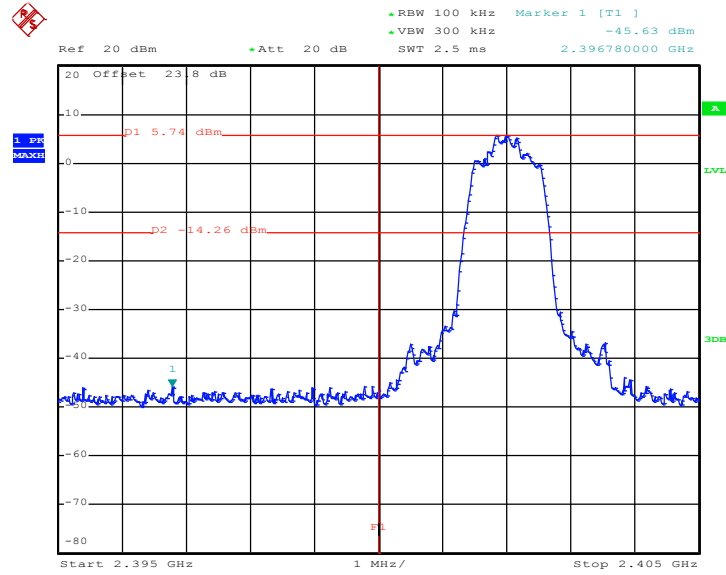

Date: 13.OCT.2017 14:37:20

High Band Edge Plot on Channel 78

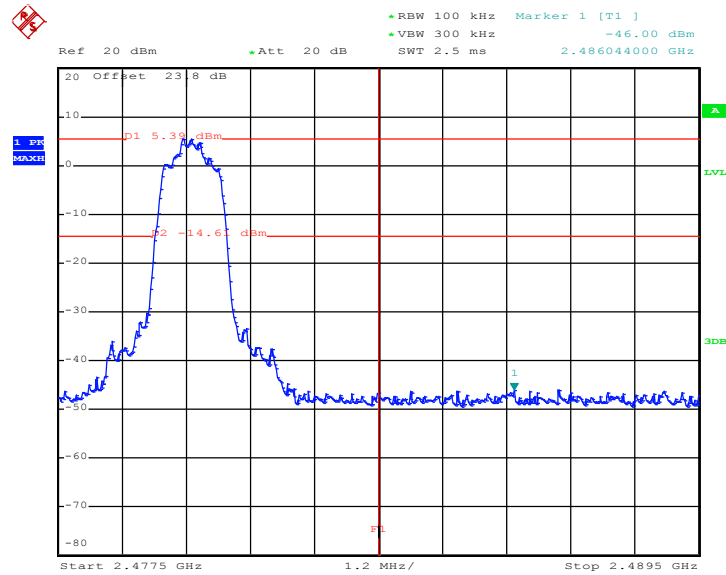


Date: 13.OCT.2017 14:47:01




### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

1Mbps Hopping Mode Low Band Edge Plot

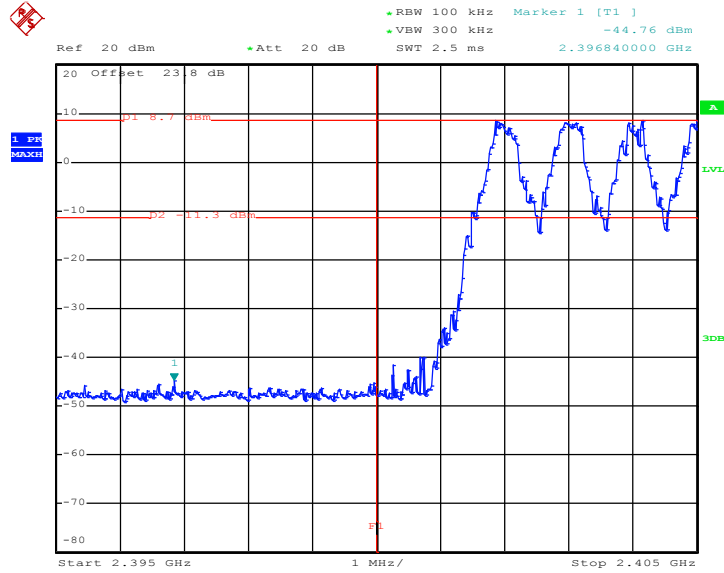

Date: 13.OCT.2017 13:57:14

1Mbps Hopping Mode High Band Edge Plot

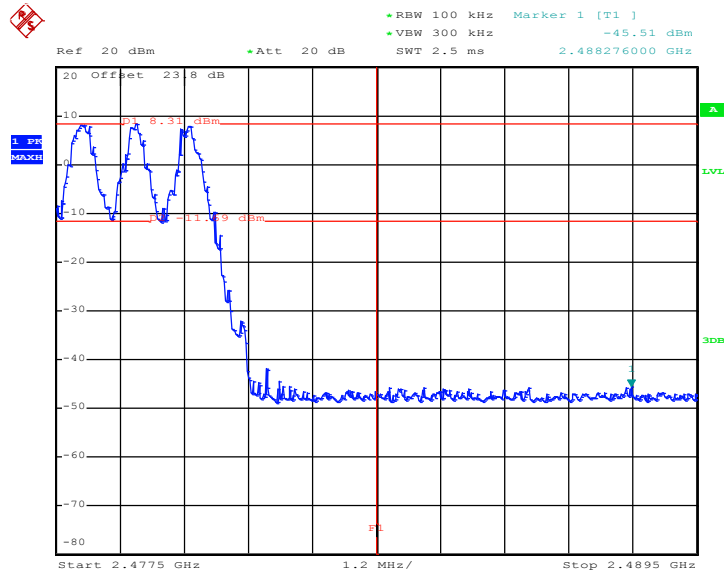


Date: 13.OCT.2017 14:00:55






### 2Mbps Hopping Mode Low Band Edge Plot

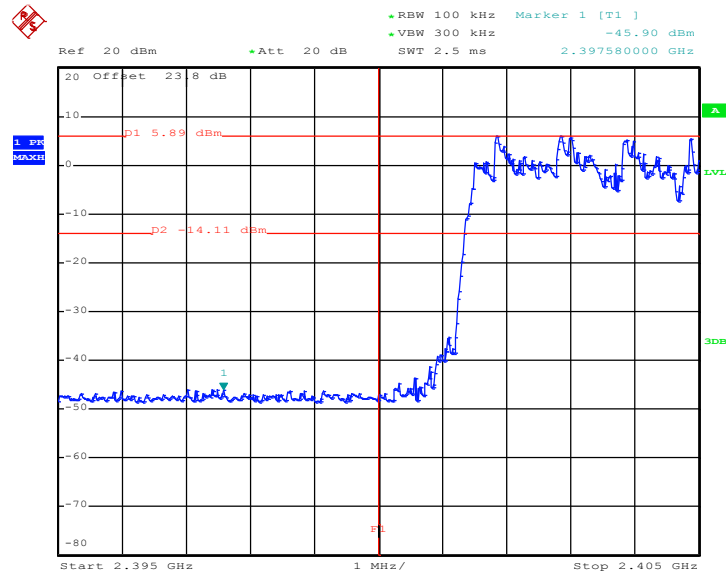

Date: 13.OCT.2017 14:02:00


### 2Mbps Hopping Mode High Band Edge Plot

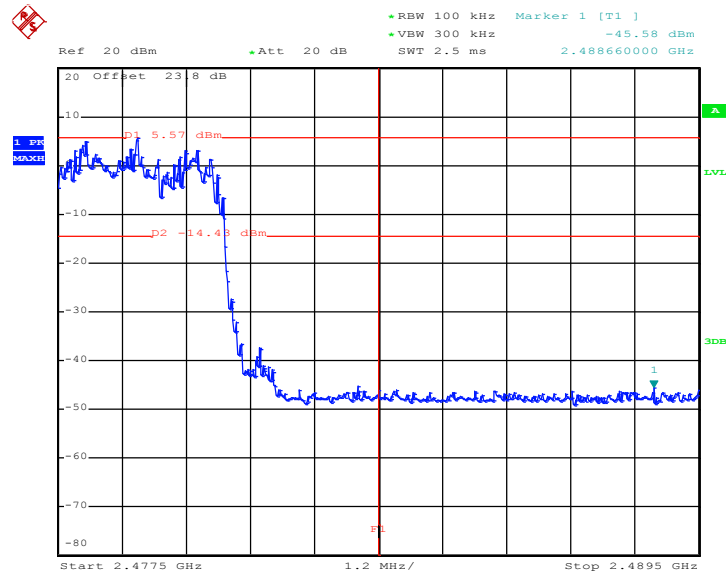

Date: 13.OCT.2017 14:02:37




### 3Mbps Hopping Mode Low Band Edge Plot

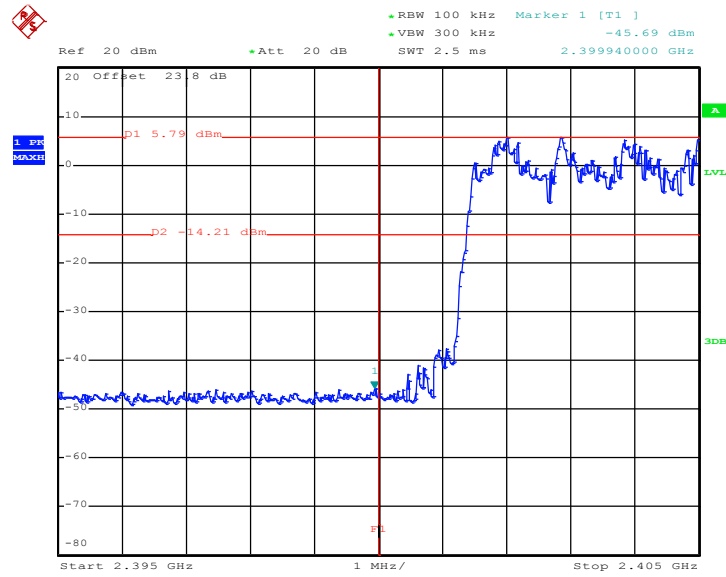

Date: 13.OCT.2017 14:03:42

### 3Mbps Hopping Mode High Band Edge Plot

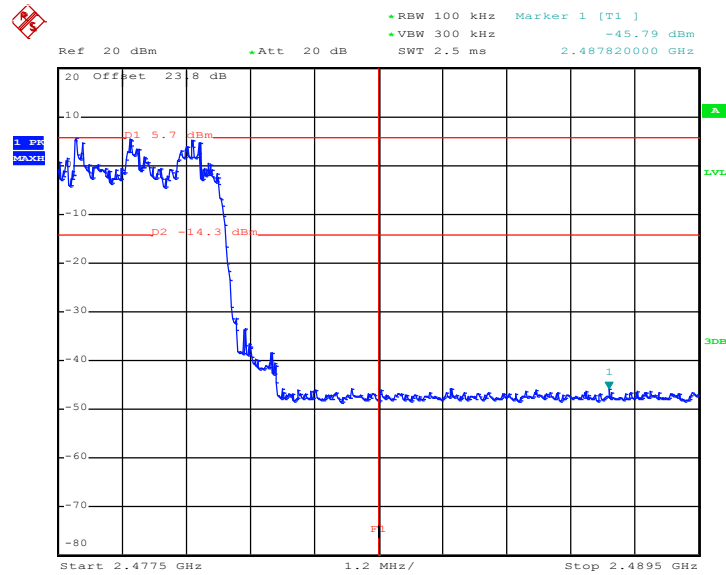

Date: 13.OCT.2017 14:04:38

### 3.7 Conducted Spurious Emission Measurement

#### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


#### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


#### 3.7.4 Test Setup

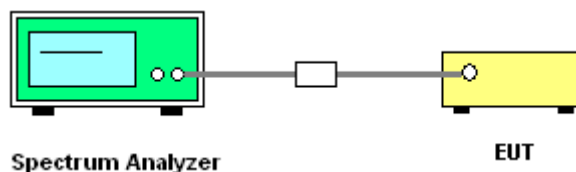




### 3.7.5 Test Result of Conducted Spurious Emission

#### 1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

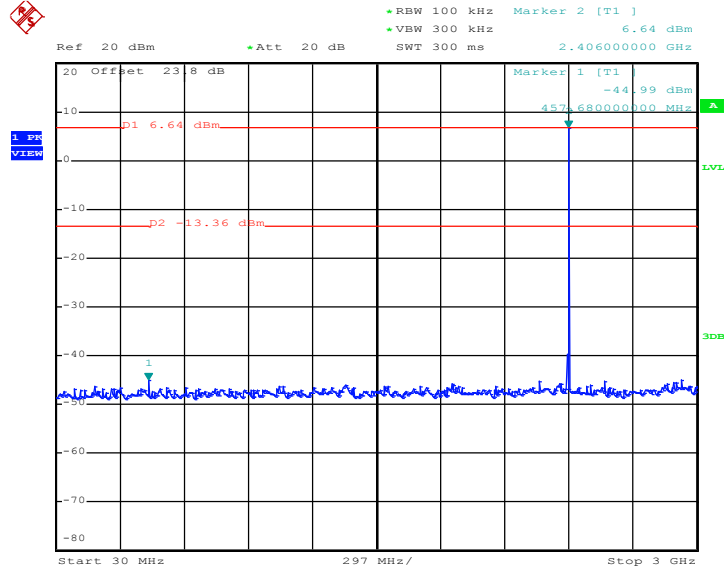

Date: 20.OCT.2017 09:51:23


#### 1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

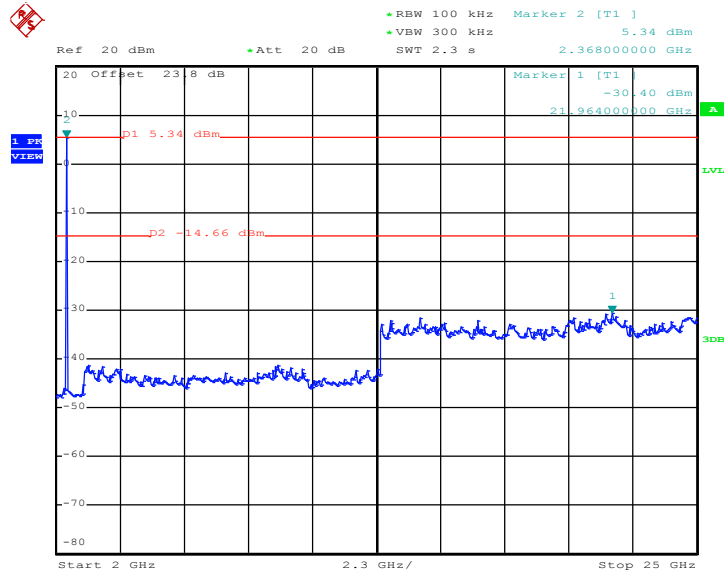

Date: 20.OCT.2017 09:51:45




1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

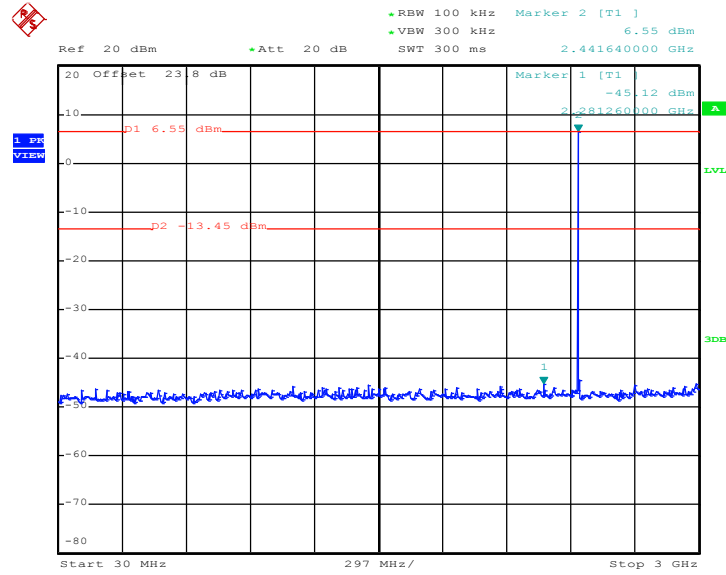

Date: 20.OCT.2017 09:52:31


1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

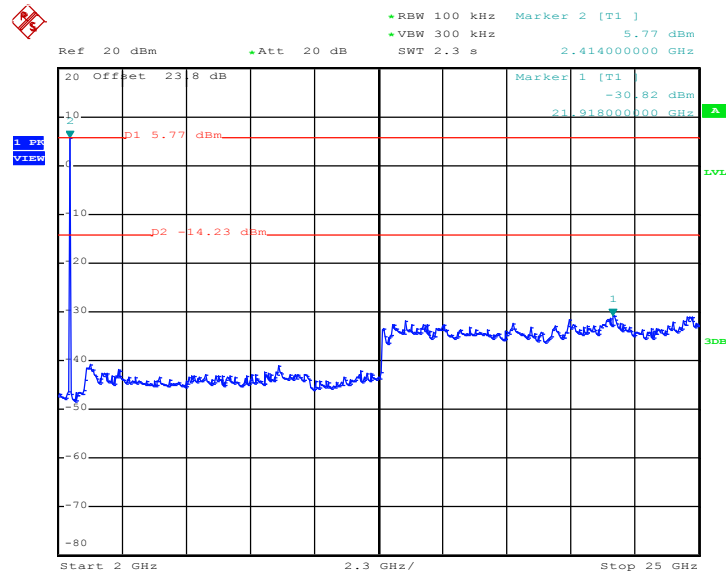

Date: 20.OCT.2017 09:52:53




### 1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

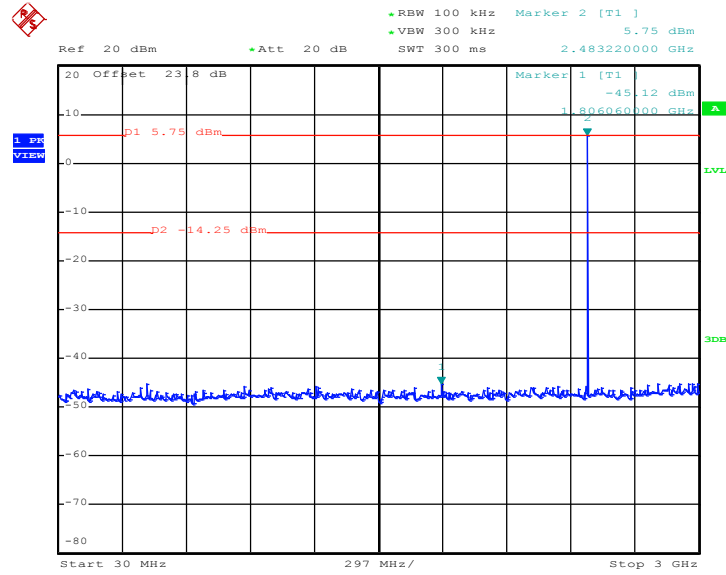

Date: 20.OCT.2017 09:53:41


### 1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

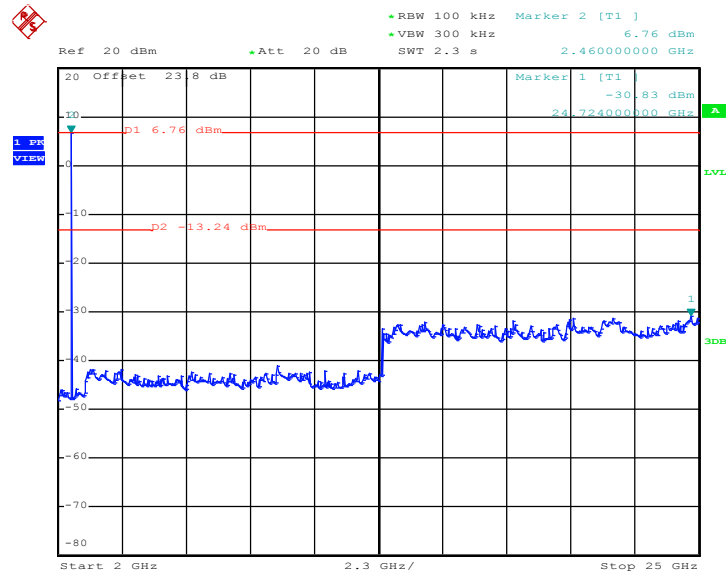

Date: 20.OCT.2017 09:54:02




2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

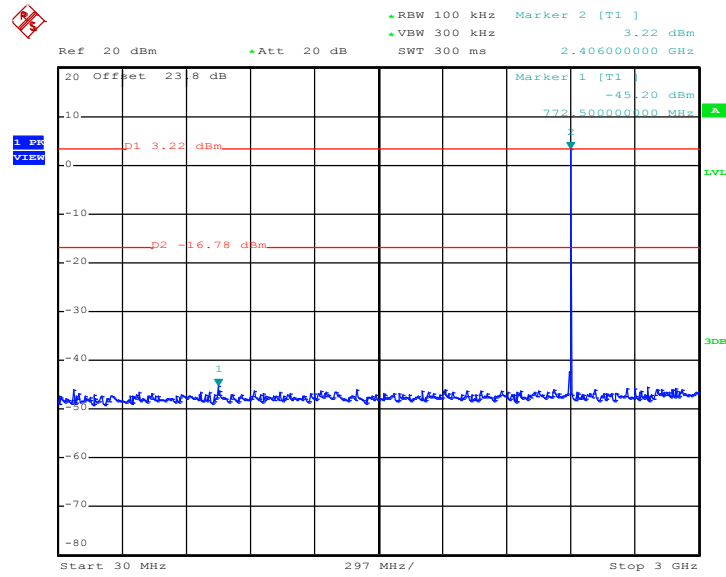

Date: 20.OCT.2017 10:01:34


2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

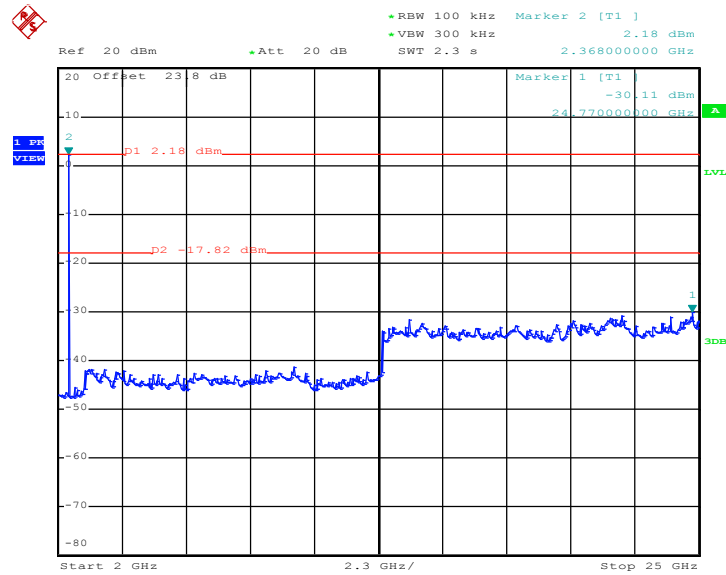

Date: 20.OCT.2017 10:01:56




2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

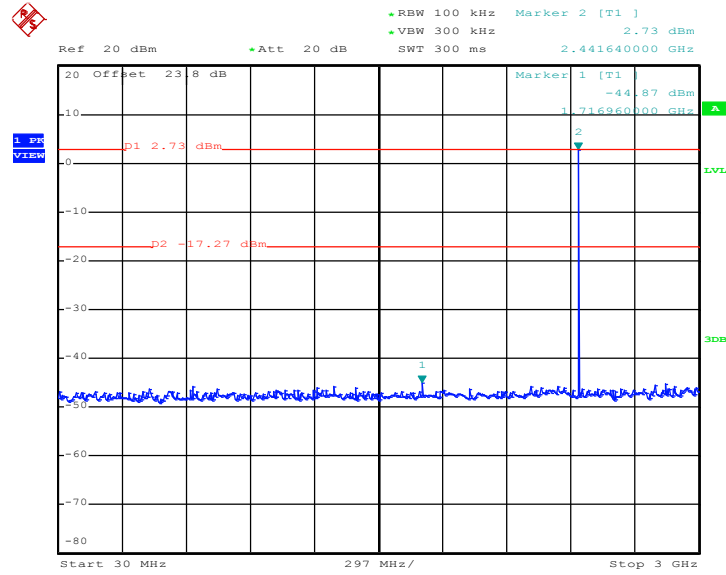

Date: 20.OCT.2017 10:02:41

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

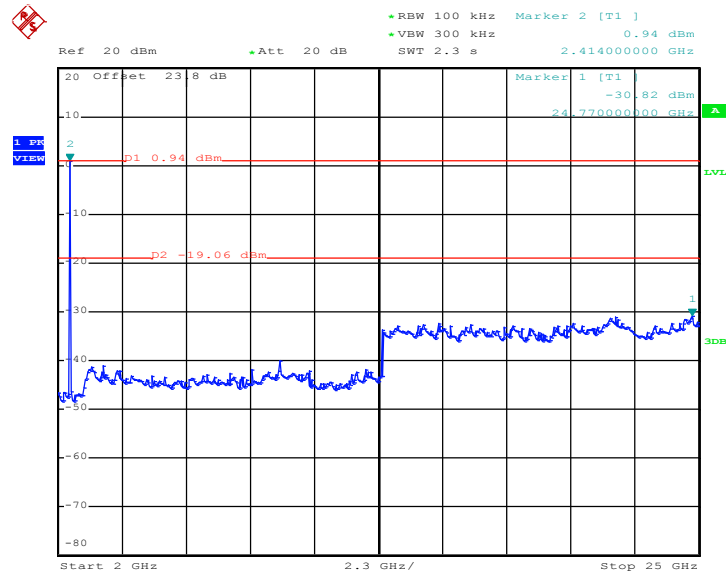


Date: 20.OCT.2017 10:03:03






2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

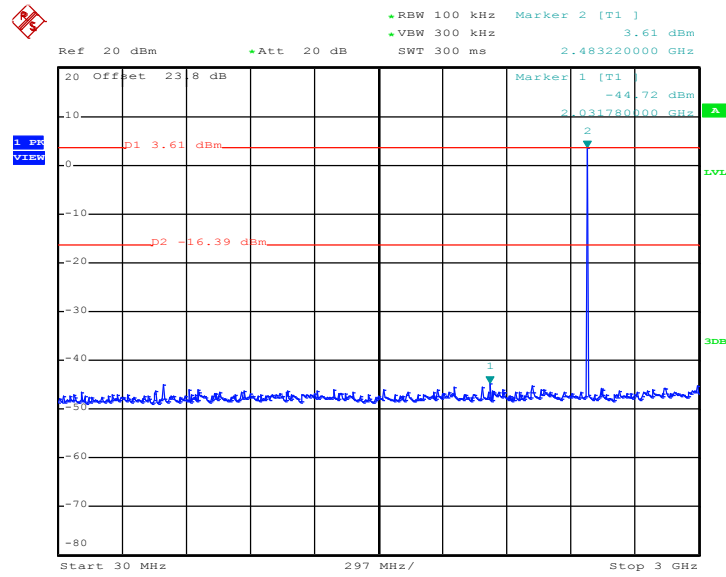

Date: 20.OCT.2017 10:07:51


2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

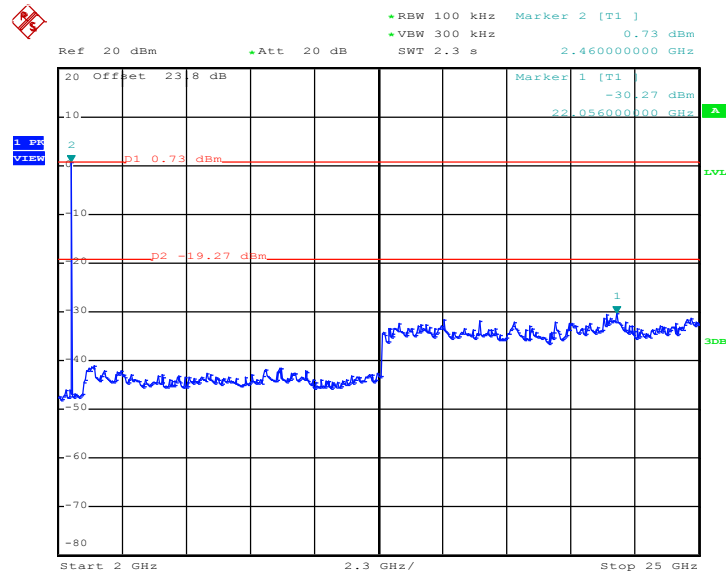

Date: 20.OCT.2017 10:08:13




3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

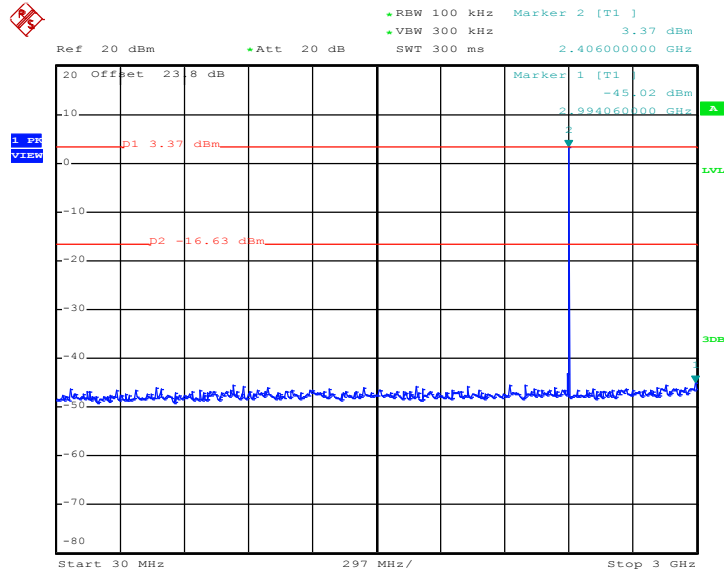

Date: 20.OCT.2017 10:10:47


3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

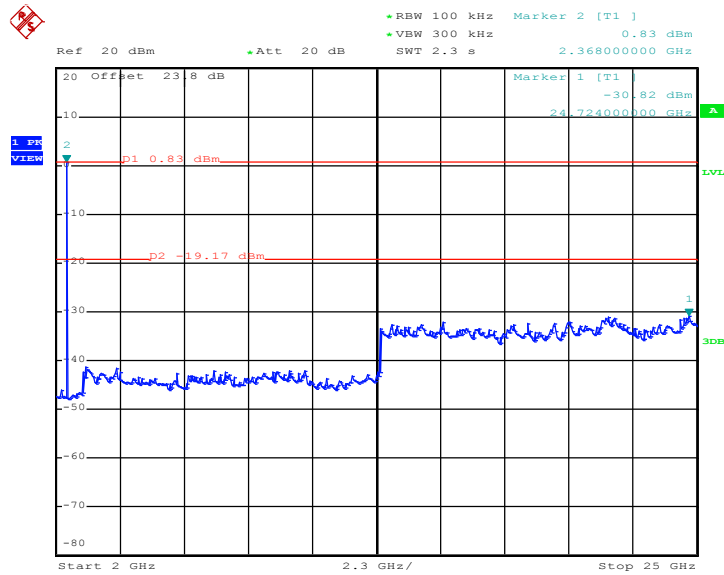

Date: 20.OCT.2017 10:11:09




3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

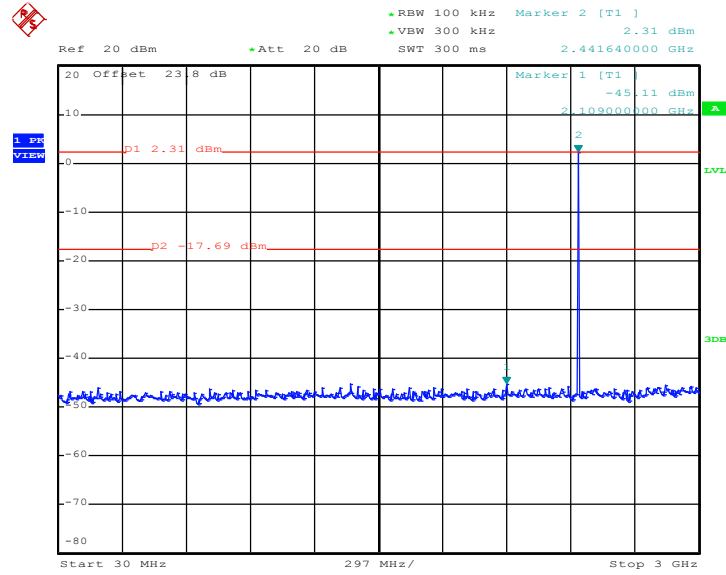

Date: 20.OCT.2017 10:13:33


3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

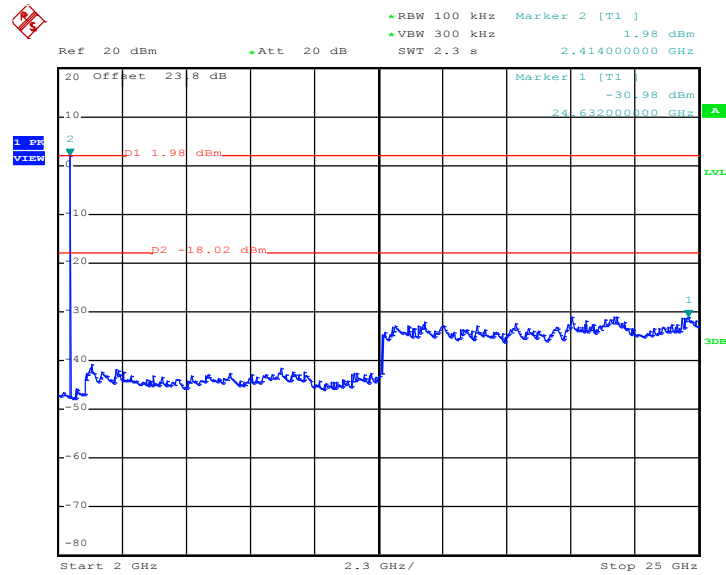

Date: 20.OCT.2017 10:13:55




3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

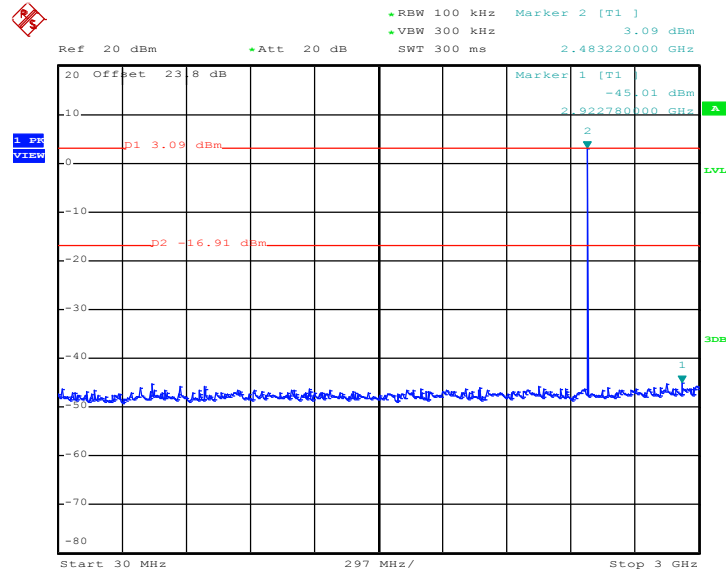

Date: 20.OCT.2017 10:15:16

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

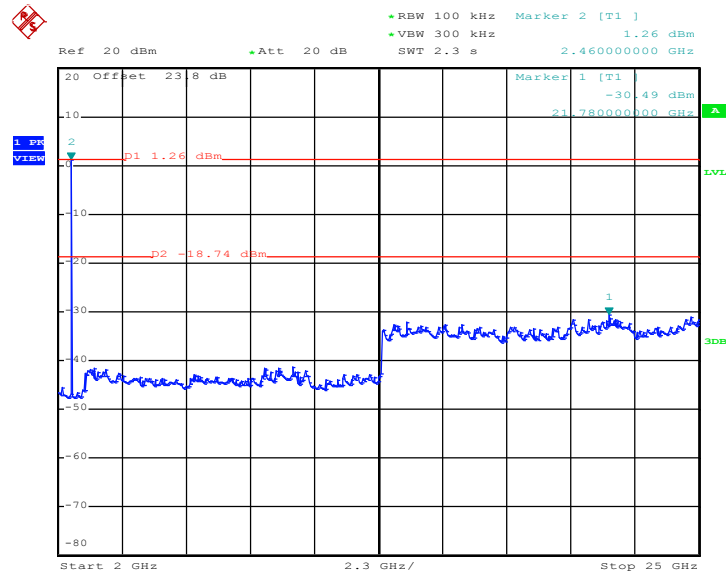

Date: 20.OCT.2017 10:15:37



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

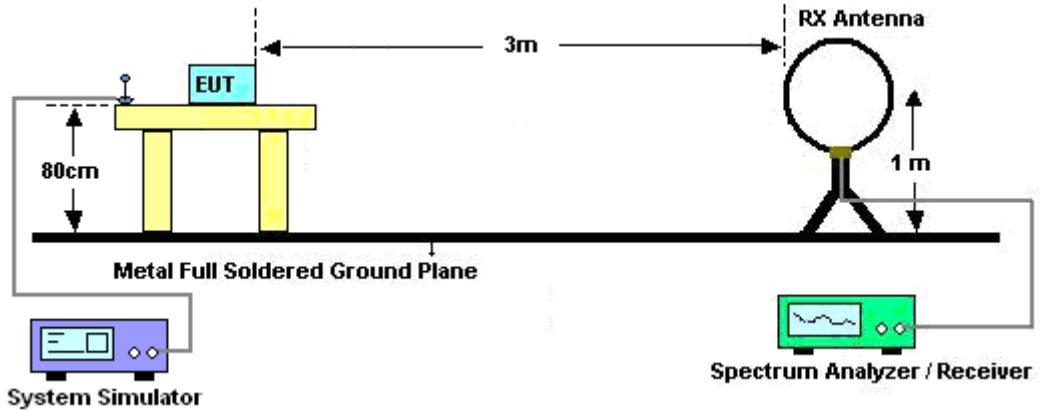

For radiated emissions from 30MHz to 1GHz

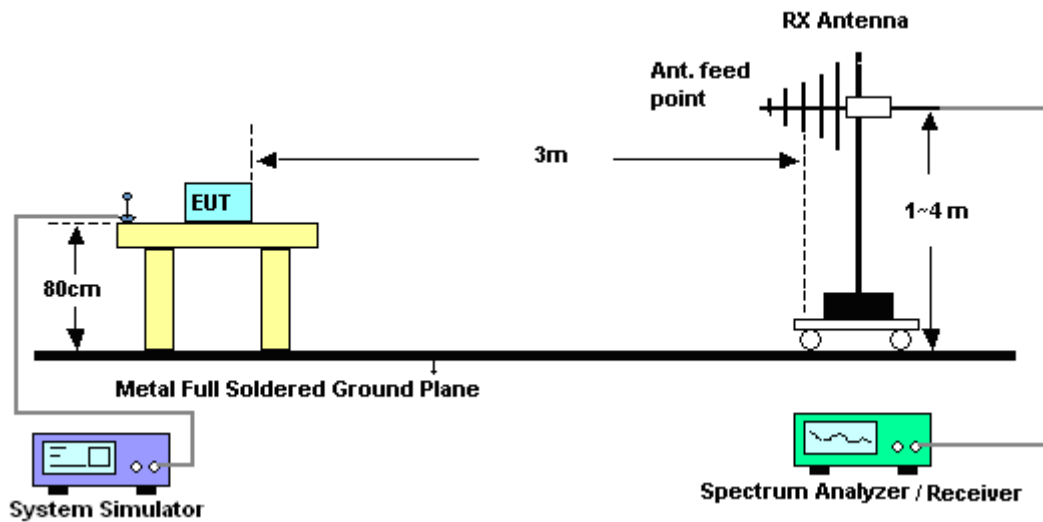

For radiated emissions above 1GHz

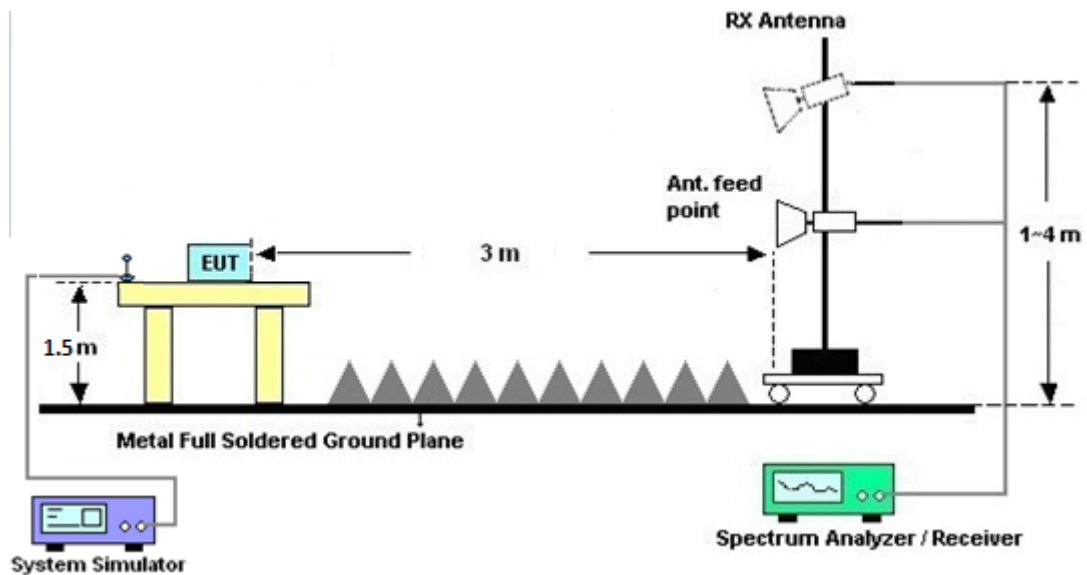

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.8.7 Duty Cycle

Please refer to Appendix E.

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.





### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

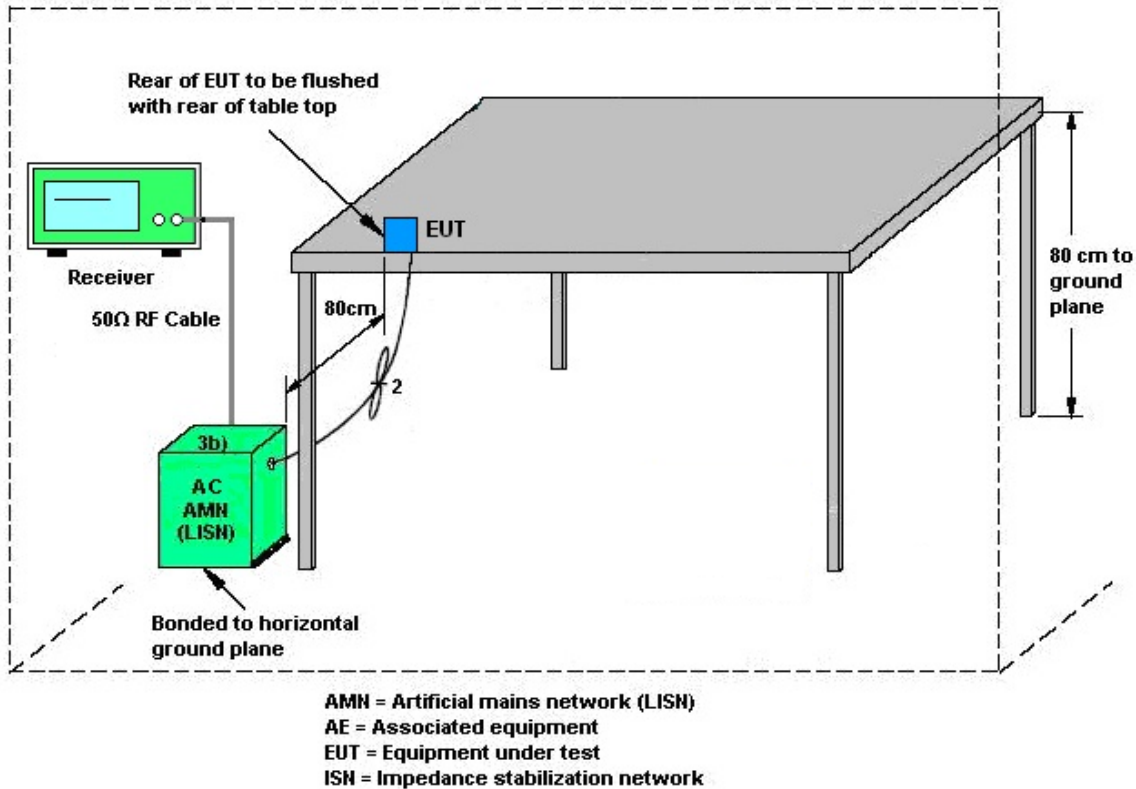

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 26, 2016	Sep. 25, 2017~ Oct. 20, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 26, 2016	Sep. 25, 2017~ Oct. 20, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 17, 2016	Sep. 25, 2017~ Oct. 20, 2017	Nov. 16, 2017	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303B	TP157151	N/A	Mar. 20, 2017	Sep. 25, 2017~ Oct. 20, 2017	Mar. 19, 2018	Conducted (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~26GHz	Dec. 02, 2016	Sep. 25, 2017~ Oct. 20, 2017	Dec. 01, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 14, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 20, 2017	Oct. 14, 2017	Sep. 19, 2018	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 20, 2017	Oct. 14, 2017	Mar. 19, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Oct. 14, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 05, 2017	Oct. 14, 2017	Jan. 04, 2018	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Oct. 14, 2017	N/A	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	May 15, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	May 14, 2019	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&04	30MHz to 1GHz	Jan. 07, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Jan. 06, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBEC K	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	May 02, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	May 01, 2018	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Oct. 11, 2017 ~ Oct. 13, 2017	Nov. 07, 2017	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	N/A	Mar. 15, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Mar. 14, 2018	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz to 26.5GHz	Jan. 12, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Jan. 11, 2018	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Oct. 11, 2017 ~ Oct. 13, 2017	Dec. 20, 2017	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 22, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	May 21, 2018	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Jan. 09, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Jan. 08, 2018	Radiation (03CH13-HY)
Preamplifier	MITEQ	TTA 1840-35-HG	1871923	18GHz ~ 40GHz	Jul. 18, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Jul. 17, 2018	Radiation (03CH13-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 14, 2016	Oct. 11, 2017 ~ Oct. 13, 2017	Nov. 13, 2017	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY335041/4M Y9840/4 MY9838/4	26GHz~40GHz	Mar. 27, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Mar. 26, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY335041/4M Y9840/4 MY9838/4	30MHz~1GHz	Jan. 27, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Jan. 26, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY335041/4M Y9840/4 MY9838/4	1GHz~26GHz	Jan. 27, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Jan. 26, 2018	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 11, 2017 ~ Oct. 13, 2017	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Oct. 11, 2017 ~ Oct. 13, 2017	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Oct. 11, 2017 ~ Oct. 13, 2017	N/A	Radiation (03CH13-HY)
Test Software	Audix	E3	6.2009-8-24	N/A	N/A	Oct. 11, 2017 ~ Oct. 13, 2017	N/A	Radiation (03CH13-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2G Low Pass	Sep. 18, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Sep. 17, 2018	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3G High Pass	Sep. 18, 2017	Oct. 11, 2017 ~ Oct. 13, 2017	Sep. 17, 2018	Radiation (03CH13-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.70
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.90
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.40
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.30
---	------

## Appendix A. Test Result of Conducted Test Items

### Bluetooth

Test Engineer:	AC Chang	Temperature:	21~25	°C
Test Date:	2017/9/25-2017/10/20	Relative Humidity:	51~54	%

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.900	0.840	1.002	0.6000	Pass
DH	1Mbps	1	39	2441	0.896	0.836	1.002	0.5973	Pass
DH	1Mbps	1	78	2480	0.896	0.840	1.002	0.5973	Pass
2DH	2Mbps	1	0	2402	1.266	1.168	1.008	0.8440	Pass
2DH	2Mbps	1	39	2441	1.266	1.168	1.008	0.8440	Pass
2DH	2Mbps	1	78	2480	1.266	1.168	1.008	0.8440	Pass
3DH	3Mbps	1	0	2402	1.236	1.144	1.002	0.8240	Pass
3DH	3Mbps	1	39	2441	1.236	1.152	1.002	0.8240	Pass
3DH	3Mbps	1	78	2480	1.254	1.144	1.002	0.8360	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

<b>TEST RESULTS DATA</b>					
<b>Peak Power Table</b>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	9.80	20.97	Pass
	39	1	8.78	20.97	Pass
	78	1	8.86	20.97	Pass
2DH1	0	1	8.74	20.97	Pass
	39	1	7.79	20.97	Pass
	78	1	7.75	20.97	Pass
3DH1	0	1	9.01	20.97	Pass
	39	1	8.28	20.97	Pass
	78	1	8.19	20.97	Pass

<b>TEST RESULTS DATA</b>				
<b>Average Power Table</b>				
<b>(Reporting Only)</b>				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	9.72	30.48
	39	1	8.70	65.34
	78	1	8.67	76.60
2DH1	0	1	6.31	30.79
	39	1	5.34	65.60
	78	1	5.40	76.60
3DH1	0	1	6.27	30.79
	39	1	5.36	65.34
	78	1	5.42	76.72

<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Blue Lan	Temperature :	25~26°C
		Relative Humidity :	49~50%



# EUT Information

Report NO : 762713-01  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

ENV216 Auto Test FCC Power Bar - L

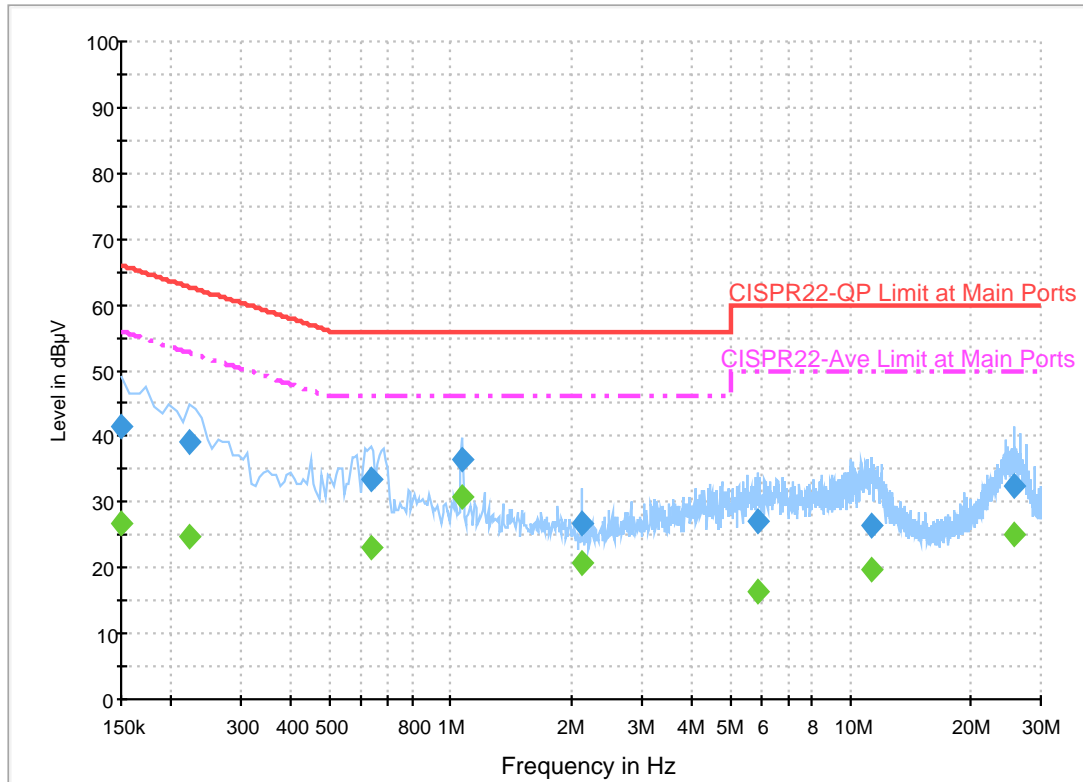

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.5	Off	L1	19.6	24.5	66.0
0.222000	39.0	Off	L1	19.6	23.7	62.7
0.630000	33.3	Off	L1	19.6	22.7	56.0
1.070000	36.4	Off	L1	19.6	19.6	56.0
2.134000	26.9	Off	L1	18.2	29.1	56.0
5.870000	27.1	Off	L1	19.8	32.9	60.0
11.262000	26.3	Off	L1	20.1	33.7	60.0
25.598000	32.5	Off	L1	20.8	27.5	60.0


## Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	26.7	Off	L1	19.6	29.3	56.0
0.222000	24.6	Off	L1	19.6	28.1	52.7
0.630000	23.0	Off	L1	19.6	23.0	46.0
1.070000	30.7	Off	L1	19.6	15.3	46.0
2.134000	20.6	Off	L1	18.2	25.4	46.0
5.870000	16.4	Off	L1	19.8	33.6	50.0
11.262000	19.9	Off	L1	20.1	30.1	50.0
25.598000	25.2	Off	L1	20.8	24.8	50.0

# EUT Information

Report NO : 762713-01  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

ENV216 Auto Test FCC Power Bar - N

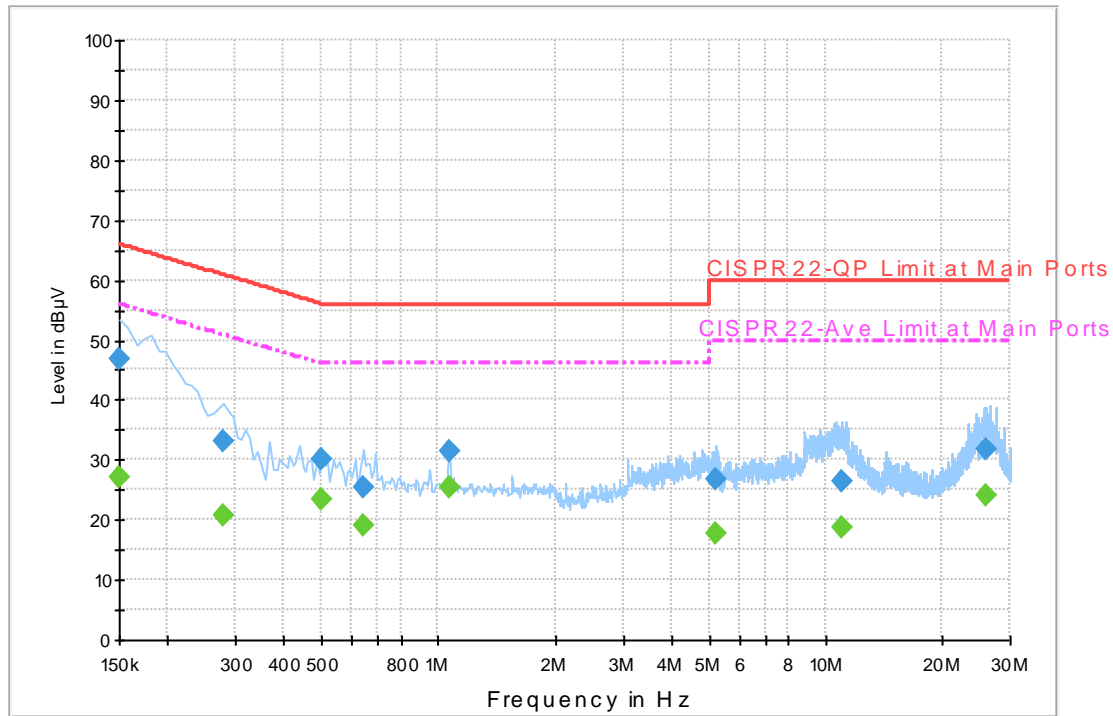

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	46.9	Off	N	19.5	19.1	66.0
0.278000	33.0	Off	N	19.5	27.9	60.9
0.502000	30.1	Off	N	19.5	25.9	56.0
0.638000	25.3	Off	N	19.5	30.7	56.0
1.070000	31.5	Off	N	19.6	24.5	56.0
5.190000	26.7	Off	N	11.5	33.3	60.0
10.974000	26.3	Off	N	20.1	33.7	60.0
25.910000	31.7	Off	N	21.0	28.3	60.0

## Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	27.1	Off	N	19.5	28.9	56.0
0.278000	20.8	Off	N	19.5	30.1	50.9
0.502000	23.6	Off	N	19.5	22.4	46.0
0.638000	19.1	Off	N	19.5	26.9	46.0
1.070000	25.5	Off	N	19.6	20.5	46.0
5.190000	17.8	Off	N	19.8	32.2	50.0
10.974000	18.7	Off	N	20.1	31.3	50.0
25.910000	24.1	Off	N	21.0	25.9	50.0



### Appendix C. Radiated Spurious Emission

Test Engineer :	Alex Jheng / Bill Chang / Wilson Wu	Temperature :	25.0~25.2°C
		Relative Humidity :	53~55%

2.4GHz 2400~2483.5MHz

BT (1M) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2365.86	41.43	-32.57	74	40.83	26.79	4.8	30.99	307	35	P	H	
		2365.86	16.64	-37.36	54	-	-	-	-	-	-	A	H	
	*	2402	98.47	-	-	97.72	26.89	4.85	30.99	307	35	P	H	
	*	2402	73.68	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2328.375	42.85	-31.15	74	42.42	26.68	4.76	31.01	346	0	P	V
			2328.375	18.06	-35.94	54	-	-	-	-	-	-	A	V
	*		2402	99.76	-	-	99.01	26.89	4.85	30.99	346	0	P	V
	*		2402	74.97	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2356.76	41.79	-32.21	74	41.22	26.79	4.78	31	305	32	P	H	
		2356.76	17	-37	54	-	-	-	-	-	-	A	H	
	*	2441	98.01	-	-	97.06	27.04	4.88	30.97	305	32	P	H	
	*	2441	73.22	-	-	-	-	-	-	-	-	A	H	
			2486.07	42.04	-31.96	74	40.93	27.15	4.93	30.97	305	32	P	H
			2486.07	17.25	-36.75	54	-	-	-	-	-	-	A	H
			2385.6	41.92	-32.08	74	41.19	26.89	4.83	30.99	332	0	P	V
			2385.6	17.13	-36.87	54	-	-	-	-	-	-	A	V
	*		2441	99.73	-	-	98.78	27.04	4.88	30.97	332	0	P	V
	*		2441	74.94	-	-	-	-	-	-	-	-	A	V
			2496.64	42.51	-31.49	74	41.34	27.2	4.93	30.96	332	0	P	V
			2496.64	17.72	-36.28	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	100.95	-	-	99.85	27.15	4.92	30.97	273	128	P	H
	*	2480	76.16	-	-	-	-	-	-	-	-	A	H
		2483.52	47.58	-26.42	74	46.47	27.15	4.93	30.97	273	128	P	H
		2483.52	22.79	-31.21	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	101.09	-	-	99.99	27.15	4.92	30.97	325	0	P	V
	*	2480	76.3	-	-	-	-	-	-	-	-	A	V
		2483.56	47.92	-26.08	74	46.81	27.15	4.93	30.97	325	0	P	V
		2483.56	23.13	-30.87	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

BT (1M) (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	39.34	-34.66	74	57.26	31.53	7.3	57.27	100	0	P	H	
		4804	14.55	-39.45	54	-	-	-	-	-	-	A	H	
													H	
													H	
			4804	39.99	-34.01	74	57.91	31.53	7.3	57.27	100	0	P	V
			4804	15.2	-38.8	54	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	38.53	-35.47	74	56.13	31.63	7.44	57.17	100	0	P	H	
		4882	13.74	-40.26	54	-	-	-	-	-	-	A	H	
		7323	43.7	-30.3	74	55.2	36.19	9.14	57.29	100	0	P	H	
		7323	18.91	-35.09	54	-	-	-	-	-	-	A	H	
		4882	37.84	-36.16	74	55.44	31.63	7.44	57.17	100	0	P	V	
		4882	13.05	-40.95	54	-	-	-	-	-	-	A	V	
		7323	43.1	-30.9	74	54.6	36.19	9.14	57.29	100	0	P	V	
		7323	18.31	-35.69	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	39.51	-34.49	74	56.73	31.75	7.59	57.05	100	0	P	H	
		4960	14.72	-39.28	54	-	-	-	-	-	-	A	H	
		7440	42.8	-31.2	74	54.16	36.41	9.21	57.44	100	0	P	H	
		7440	18.01	-35.99	54	-	-	-	-	-	-	A	H	
		4960	38.88	-35.12	74	56.1	31.75	7.59	57.05	100	0	P	V	
		4960	14.09	-39.91	54	-	-	-	-	-	-	A	V	
		7440	42.92	-31.08	74	54.28	36.41	9.21	57.44	100	0	P	V	
		7440	18.13	-35.87	54	-	-	-	-	-	-	A	V	
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>													



2.4GHz 2400~2483.5MHz

BT (2M) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2335.515	40.81	-33.19	74	40.33	26.73	4.76	31.01	100	115	P	H	
		2335.515	16.05	-37.95	54	-	-	-	-	-	-	A	H	
	*	2402	99.53	-	-	98.78	26.89	4.85	30.99	100	115	P	H	
	*	2402	74.77	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2387.49	41.22	-32.78	74	40.49	26.89	4.83	30.99	100	265	P	V
			2387.49	16.46	-37.54	54	-	-	-	-	-	-	A	V
	*		2402	95.78	-	-	95.03	26.89	4.85	30.99	100	265	P	V
	*		2402	71.02	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2377.34	42.4	-31.6	74	41.72	26.84	4.83	30.99	100	117	P	H	
		2377.34	17.64	-36.36	54	-	-	-	-	-	-	A	H	
	*	2441	97.56	-	-	96.61	27.04	4.88	30.97	100	117	P	H	
	*	2441	72.8	-	-	-	-	-	-	-	-	A	H	
			2487.05	42.79	-31.21	74	41.68	27.15	4.93	30.97	100	117	P	H
			2487.05	18.03	-35.97	54	-	-	-	-	-	-	A	H
			2333.52	41.1	-32.9	74	40.67	26.68	4.76	31.01	100	268	P	V
			2333.52	16.34	-37.66	54	-	-	-	-	-	-	A	V
	*		2441	94.47	-	-	93.52	27.04	4.88	30.97	100	268	P	V
	*		2441	69.71	-	-	-	-	-	-	-	-	A	V
			2483.83	42.26	-31.74	74	41.15	27.15	4.93	30.97	100	268	P	V
			2483.83	17.5	-36.5	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	98.39	-	-	97.29	27.15	4.92	30.97	125	119	P	H
	*	2480	73.63	-	-	-	-	-	-	-	-	A	H
		2483.64	45.59	-28.41	74	44.48	27.15	4.93	30.97	125	119	P	H
		2483.64	20.83	-33.17	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	96	-	-	94.9	27.15	4.92	30.97	109	265	P	V
	*	2480	71.24	-	-	-	-	-	-	-	-	A	V
		2484.4	42.62	-31.38	74	41.51	27.15	4.93	30.97	109	265	P	V
		2484.4	17.86	-36.14	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
BT (2M) (Harmonic @ 3m)**

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	38.18	-35.82	74	56.1	31.53	7.3	57.27	100	0	P	H	
		4804	13.42	-40.58	54	-	-	-	-	-	-	A	H	
													H	
													H	
			4804	39.16	-34.84	74	57.08	31.53	7.3	57.27	100	0	P	V
			4804	14.4	-39.6	54	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	38.55	-35.45	74	56.15	31.63	7.44	57.17	100	0	P	H	
		4882	13.79	-40.21	54	-	-	-	-	-	-	A	H	
		7323	43.05	-30.95	74	54.55	36.19	9.14	57.29	100	0	P	H	
		7323	18.29	-35.71	54	-	-	-	-	-	-	A	H	
		4882	38	-36	74	55.6	31.63	7.44	57.17	100	0	P	V	
		4882	13.24	-40.76	54	-	-	-	-	-	-	A	V	
		7323	43.52	-30.48	74	55.02	36.19	9.14	57.29	100	0	P	V	
		7323	18.76	-35.24	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	39.11	-34.89	74	56.33	31.75	7.59	57.05	100	0	P	H	
		4960	14.35	-39.65	54	-	-	-	-	-	-	A	H	
		7440	43.4	-30.6	74	54.76	36.41	9.21	57.44	100	0	P	H	
		7440	18.64	-35.36	54	-	-	-	-	-	-	A	H	
		4960	39.05	-34.95	74	56.27	31.75	7.59	57.05	100	0	P	V	
		4960	14.29	-39.71	54	-	-	-	-	-	-	A	V	
		7440	43.53	-30.47	74	54.89	36.41	9.21	57.44	100	0	P	V	
		7440	18.77	-35.23	54	-	-	-	-	-	-	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													





2.4GHz 2400~2483.5MHz

BT (3M) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2368.38	41.6	-32.4	74	41	26.79	4.8	30.99	112	177	P	H	
		2368.38	16.84	-37.16	54	-	-	-	-	-	-	A	H	
	*	2402	100.7	-	-	99.95	26.89	4.85	30.99	112	177	P	H	
	*	2402	75.94	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2382.03	41.98	-32.02	74	41.3	26.84	4.83	30.99	398	88	P	V
			2382.03	17.22	-36.78	54	-	-	-	-	-	-	A	V
	*		2402	100.31	-	-	99.56	26.89	4.85	30.99	398	88	P	V
	*		2402	75.55	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2320.78	41.26	-32.74	74	40.85	26.68	4.74	31.01	113	175	P	H	
		2320.78	16.5	-37.5	54	-	-	-	-	-	-	A	H	
	*	2441	98.72	-	-	97.77	27.04	4.88	30.97	113	175	P	H	
	*	2441	73.96	-	-	-	-	-	-	-	-	A	H	
			2496.78	42.1	-31.9	74	40.93	27.2	4.93	30.96	113	175	P	H
			2496.78	17.34	-36.66	54	-	-	-	-	-	-	A	H
			2388.54	41.29	-32.71	74	40.56	26.89	4.83	30.99	386	88	P	V
			2388.54	16.53	-37.47	54	-	-	-	-	-	-	A	V
	*		2441	98.34	-	-	97.39	27.04	4.88	30.97	386	88	P	V
	*		2441	73.58	-	-	-	-	-	-	-	-	A	V
		2489.71	42.33	-31.67	74	41.16	27.2	4.93	30.96	386	88	P	V	
		2489.71	17.57	-36.43	54	-	-	-	-	-	-	A	V	



<b>BT CH 78 2480MHz</b>	*	2480	99.56	-	-	98.46	27.15	4.92	30.97	111	173	P	H
	*	2480	74.8	-	-	-	-	-	-	-	-	A	H
		2483.68	45.18	-28.82	74	44.07	27.15	4.93	30.97	111	173	P	H
		2483.68	20.42	-33.58	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	97.61	-	-	96.51	27.15	4.92	30.97	374	89	P	V
	*	2480	72.85	-	-	-	-	-	-	-	-	A	V
		2483.56	44.4	-29.6	74	43.29	27.15	4.93	30.97	374	89	P	V
		2483.56	19.64	-34.36	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
BT (3M) (Harmonic @ 3m)**

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	37.89	-36.11	74	55.81	31.53	7.3	57.27	100	0	P	H
		4804	13.13	-40.87	54	-	-	-	-	-	-	A	H
													H
													H
		4804	38.44	-35.56	74	56.36	31.53	7.3	57.27	100	0	P	V
		4804	13.68	-40.32	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	39.04	-34.96	74	56.64	31.63	7.44	57.17	100	0	P	H
		4882	14.28	-39.72	54	-	-	-	-	-	-	A	H
		7323	43.92	-30.08	74	55.42	36.19	9.14	57.29	100	0	P	H
		7323	19.16	-34.84	54	-	-	-	-	-	-	A	H
		4882	38.17	-35.83	74	55.77	31.63	7.44	57.17	100	0	P	V
		4882	13.41	-40.59	54	-	-	-	-	-	-	A	V
		7323	43.55	-30.45	74	55.05	36.19	9.14	57.29	100	0	P	V
		7323	18.79	-35.21	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	39.36	-34.64	74	56.58	31.75	7.59	57.05	100	0	P	H
		4960	14.6	-39.4	54	-	-	-	-	-	-	A	H
		7440	43	-31	74	54.36	36.41	9.21	57.44	100		P	H
		7440	18.24	-35.76	54	-	-	-	-	-	-	A	H
		4960	38.94	-35.06	74	56.16	31.75	7.59	57.05	100	0	P	V
		4960	14.18	-39.82	54	-	-	-	-	-	-	A	V
		7440	43.64	-30.36	74	55	36.41	9.21	57.44	100	0	P	V
		7440	18.88	-35.12	54	-	-	-	-	-	-	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		103.44	36.75	-6.75	43.5	54.1	13.8	1	32.29	-	-	P	H	
		132.87	37.82	-5.68	43.5	55.23	13.63	1.19	32.28	100	0	P	H	
		217.92	39.46	-6.54	46	58.23	11.92	1.48	32.24	-	-	P	H	
		314.7	39.58	-6.42	46	53.89	15.99	1.76	32.13	-	-	P	H	
		600.3	30.2	-15.8	46	37.18	22.71	2.42	32.21	-	-	P	H	
		799.8	34.59	-11.41	46	38.67	25.01	2.78	31.99	-	-	P	H	
														H
														H
														H
														H
														H
														H
			37.02	36.12	-3.88	40	51.01	16.85	0.59	32.33	100	0	P	V
			104.79	33.28	-10.22	43.5	50.4	14.05	1	32.29	-	-	P	V
			266.52	28.35	-17.65	46	42.5	16.33	1.63	32.18	-	-	P	V
			339.9	29.3	-16.7	46	42.6	16.95	1.81	32.14	-	-	P	V
			799.8	31.17	-14.83	46	35.25	25.01	2.78	31.99	-	-	P	V
			960.1	32.55	-21.45	54	31.72	28.58	3.07	30.96	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Alex Jheng / Bill Chang / Wilson Wu	Temperature :	25.0~25.2°C
		Relative Humidity :	53~55%

Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz  
BT (1M) (Band Edge @ 3m)




BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH13-I-Y Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	<p>Site : 03CH13-I-Y Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>



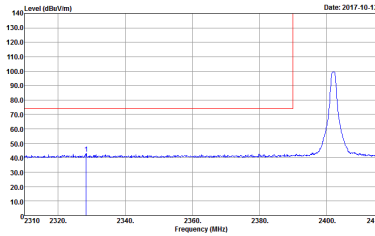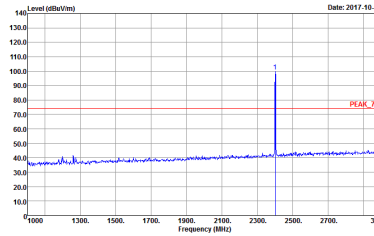

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p data-bbox="430 761 702 795">Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	 <p data-bbox="901 761 1173 795">Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>

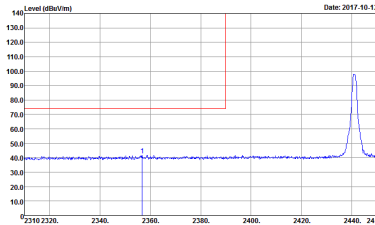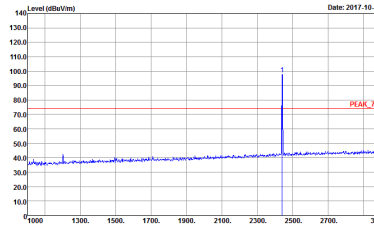
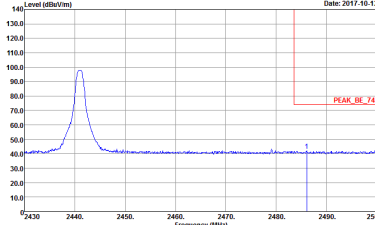


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH39 2441MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	<p><b>Left blank</b></p>

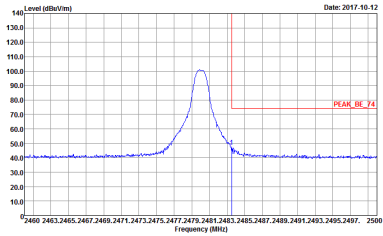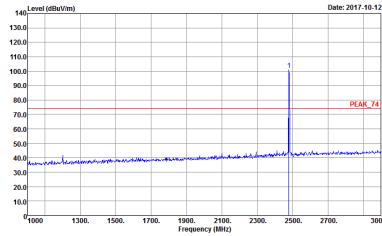

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p data-bbox="430 761 813 795">Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	 <p data-bbox="901 761 1284 795">Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>BT (1M) CH78 2480MHz</b>	
<b>1</b>	<b>Vertical</b>	<b>Fundamental</b>
<b>Peak</b>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>





2.4GHz 2400~2483.5MHz  
BT (1M) (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (1M) CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-14Y Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	<p>Site : 03CH13-14Y Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT (1M) CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>

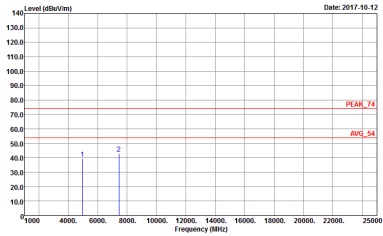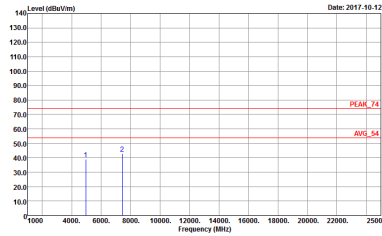

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT (1M) CH78 2480MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b> <b>Avg.</b></p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>










2.4GHz 2400~2483.5MHz  
BT (2M) (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH13-I-Y Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	<p>Site : 03CH13-I-Y Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>

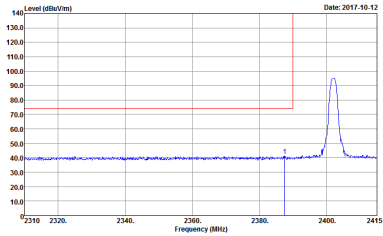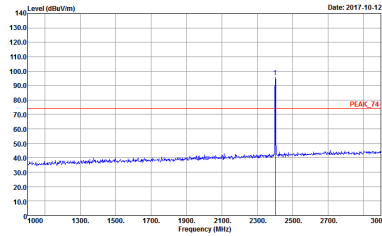

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH00 2402MHz	
1	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>

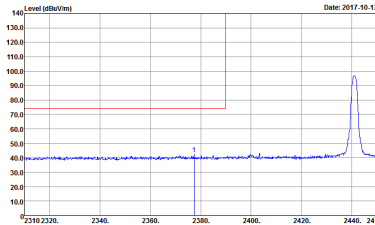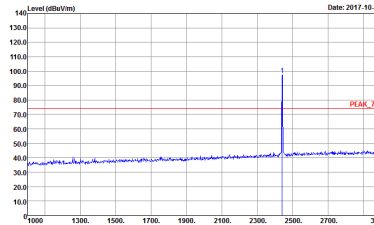
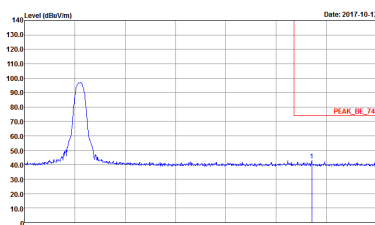


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH39 2441MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN 9120D 1241 VERTICAL</p>	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN 9120D 1241 VERTICAL</p>
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN 9120D 1241 VERTICAL</p>	<p><b>Left blank</b></p>

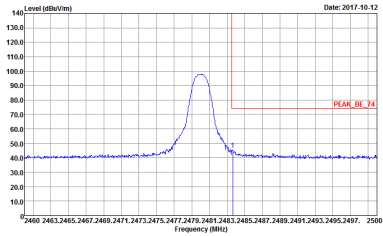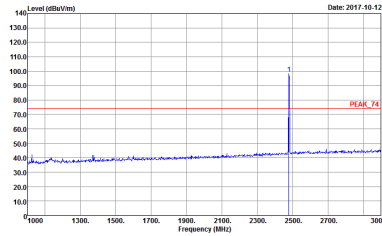

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>BT (2M) CH78 2480MHz</b>	
<b>1</b>	<b>Vertical</b>	<b>Fundamental</b>
<b>Peak</b>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>



2.4GHz 2400~2483.5MHz  
BT (2M) (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (2M) CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>		



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT (2M) CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>







<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT (2M) CH78 2480MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>



2.4GHz 2400~2483.5MHz  
BT (3M) (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH13-1FY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	<p>Site : 03CH13-1FY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>

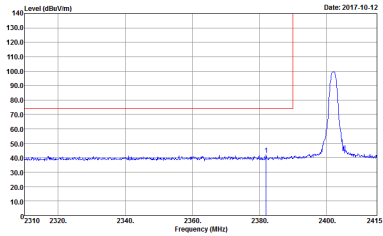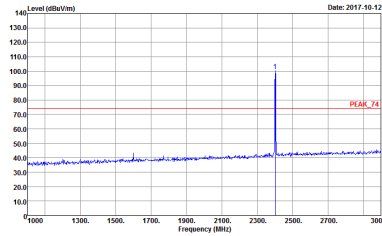

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH39 2441MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	<p><b>Left blank</b></p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH39 2441MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	<p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>
<p><b>Peak</b></p>	<p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	<p><b>Left blank</b></p>

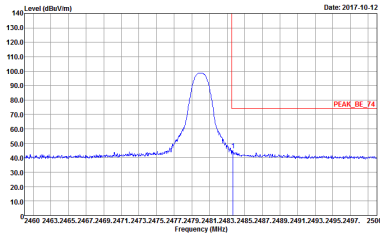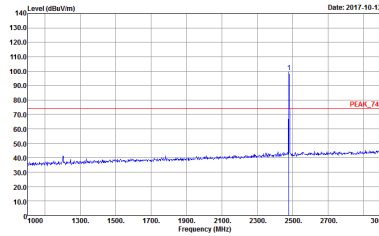

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 HORIZONTAL</p>

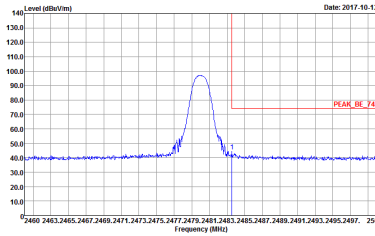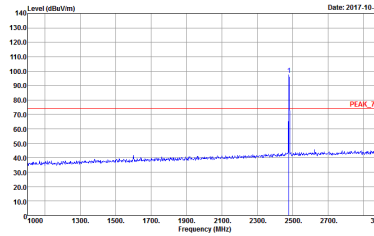

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH78 2480MHz	
1	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH13-HY Condition : PEAK BE 74 3m HORN 9120D 1241 VERTICAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m HORN 9120D 1241 VERTICAL</p>





2.4GHz 2400~2483.5MHz  
BT (3M) (Harmonic @ 3m)



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (3M) CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-14Y Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	<p>Site : 03CH13-14Y Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>



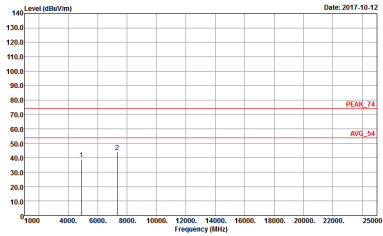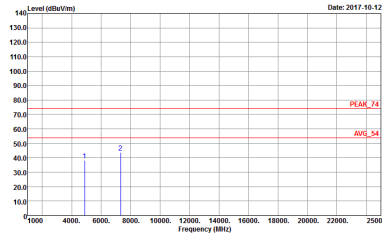



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT (3M) CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b> <b>Avg.</b></p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>

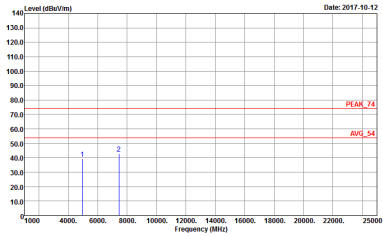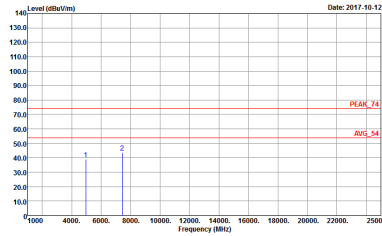

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT (3M) CH78 2480MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b> <b>Avg.</b></p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK 74 3m SHF HORN 584 VERTICAL</p>




Emission below 1GHz  
2.4GHz BT (LF)

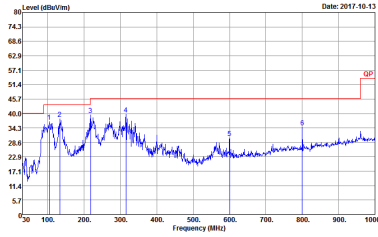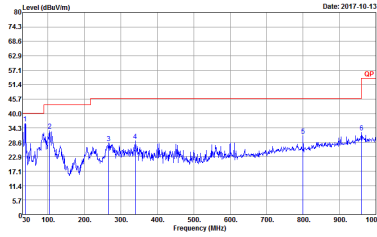BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH3-HY Condition : QP 3m B1LOG 40103 HORIZONTAL</p>	 <p>Site : 03CH3-HY Condition : QP 3m B1LOG 40103 VERTICAL</p>


## Appendix E. Duty Cycle Plots

<1Mbps>

DH5 on time (One Pulse) Plot on Channel 39

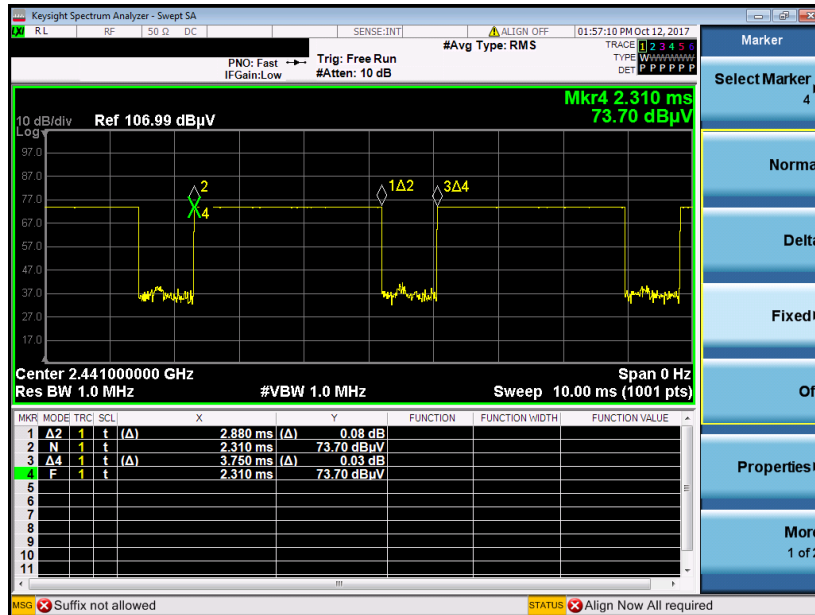

on time (Count Pulses) Plot on Channel 39

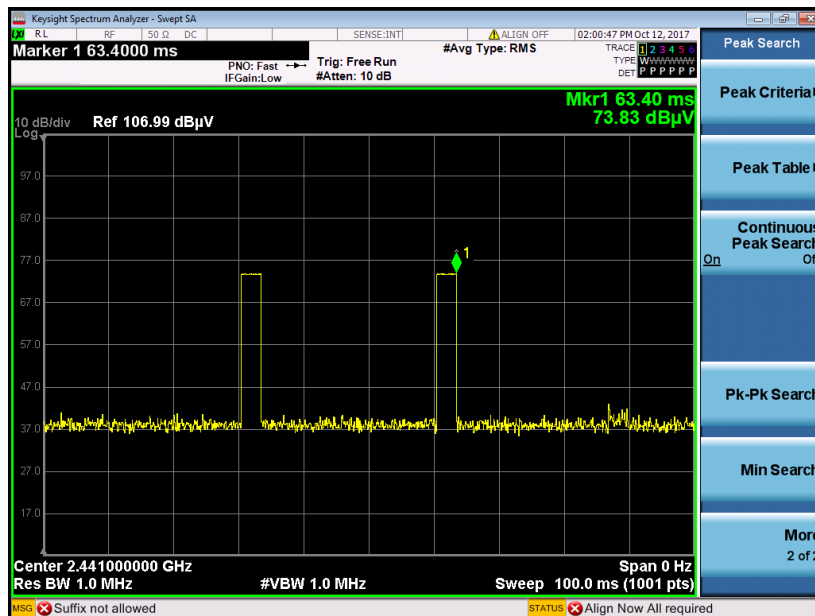


**Note:**


1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

<2Mbps>

2DH5 on time (One Pulse) Plot on Channel 39

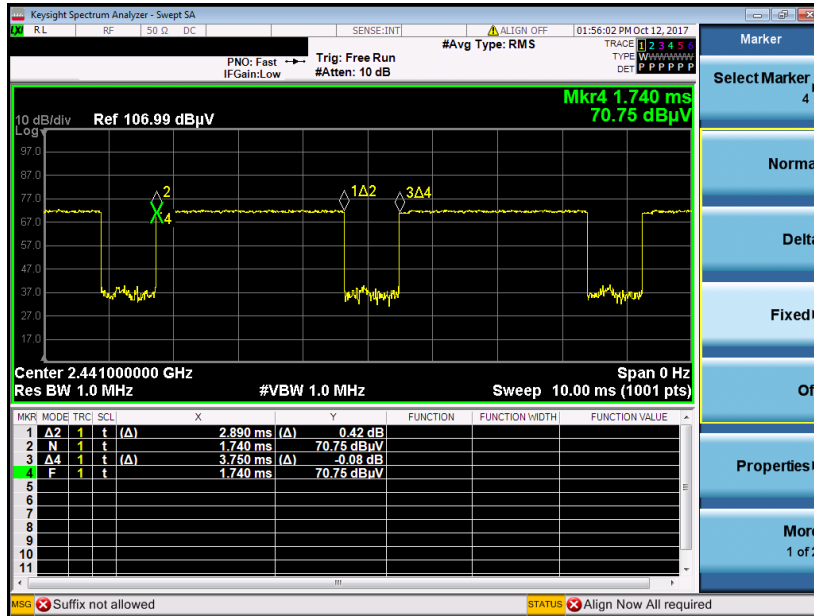

on time (Count Pulses) Plot on Channel 39

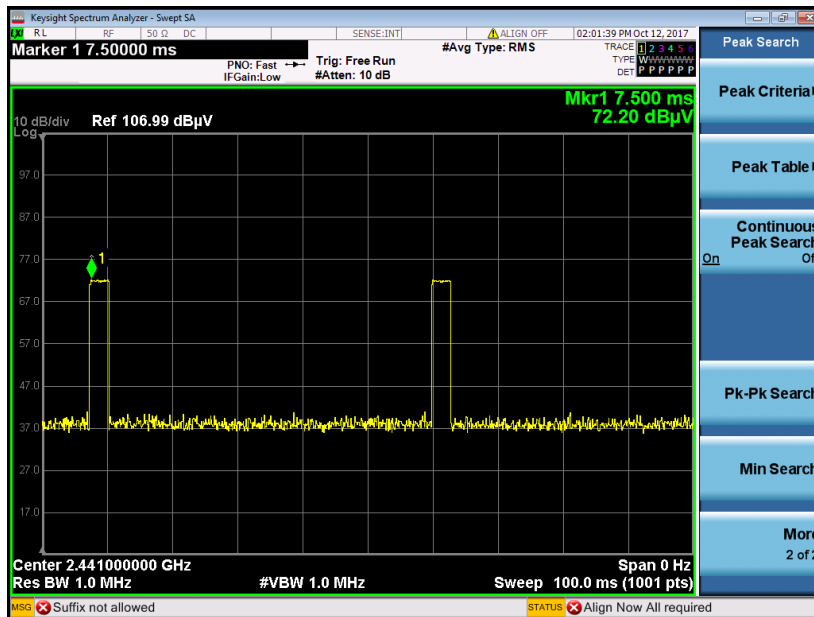


Note:


1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.89 / 100 = 5.78\%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 2DH5 has the highest duty cycle worst case and is reported.

<3Mbps>

3DH5 on time (One Pulse) Plot on Channel 39

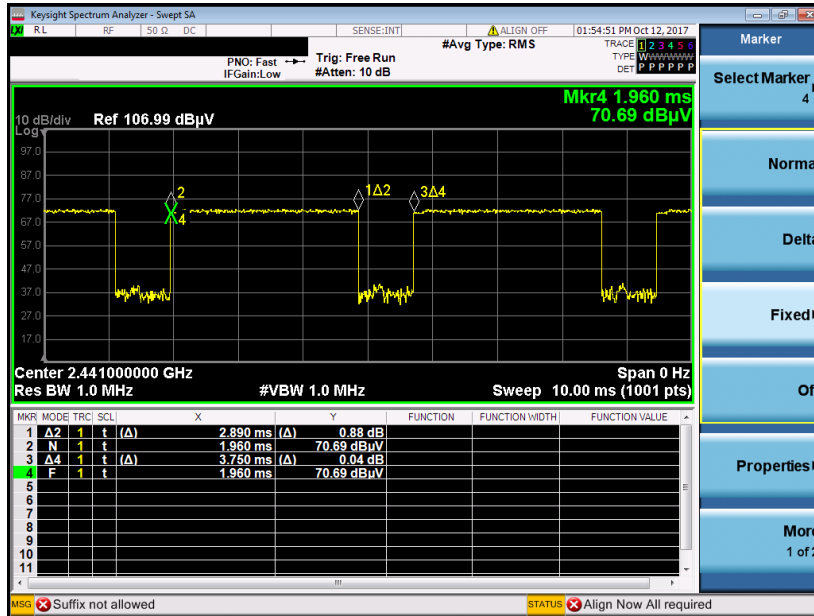

on time (Count Pulses) Plot on Channel 39

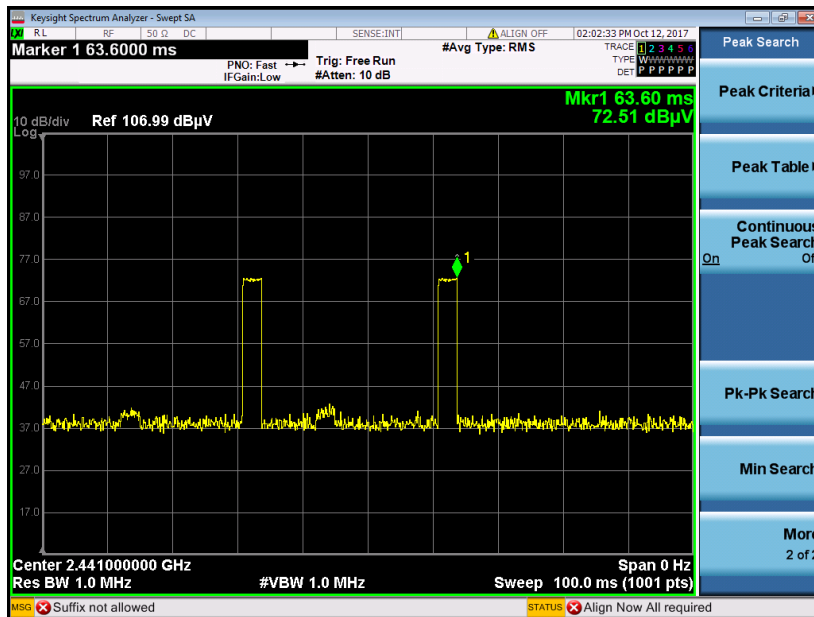

Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.89 / 100 = 5.768 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$