



FCC RADIO TEST REPORT

FCC ID : PY7-80422D
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac, GPS and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 02, 2018 and testing was started from Mar. 01, 2019 and completed on Mar. 18, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 EUT Operation Test Setup 9

3 Test Result 10

 3.1 Maximum Conducted Output Power Measurement 10

 3.2 Power Spectral Density Measurement 12

 3.3 Unwanted Emissions Measurement..... 14

 3.4 Antenna Requirements 19

4 List of Measuring Equipment..... 20

5 Uncertainty of Evaluation 22

Appendix A. Conducted Test Results

Appendix B. Radiated Spurious Emission

Appendix C. Radiated Spurious Emission Plots

Appendix D. Duty Cycle Plots



History of this test report

Report No.	Version	Description	Issued Date
FR8O2425-02E	01	Initial issue of report	Mar. 27, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.403(i)	26dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.407(a)	Maximum Conducted Output Power	Pass	-
-	15.407(a)	Power Spectral Density	Not Required	-
3.3	15.407(b)	Unwanted Emissions	Pass	Under limit 3.20 dB at 5725.480 MHz
-	15.207	AC Conducted Emission	Not Required	-
-	15.407(c)	Automatically Discontinue Transmission	Not Required	-
3.4	15.203 15.407(a)	Antenna Requirement	Pass	-

Remark:

- Not required means after assessing, test items are not necessary to carry out.
- This is a variant report. All the test cases were performed on original report which can be referred to Sporton Report Number FR802423-02E.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Standards-related Product Specification	
Antenna Type	<Ant. 1>: Loop Antenna <Ant. 2>: Monopole Antenna
Antenna Gain	<5150 MHz ~ 5250 MHz> <Ant. 1>: -5.7 dBi <Ant. 2>: -7.3 dBi <5250 MHz ~ 5350 MHz> <Ant. 1>: -5.3 dBi <Ant. 2>: -4.9 dBi <5470 MHz ~ 5725 MHz> <Ant. 1>: -5.7 dBi <Ant. 2>: 1.3 dBi

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.203	BH97004JFY	RF conducted measurement
		BH9700C6FY	Radiated Spurious Emission

Accessory List	
AC Adapter	Model Name : UCH32
	S/N : 6218W30200106
Earphone	Model Name.: MH750
	S/N : N/A
USB Cable	Model Name.: UCB24
	S/N : N/A
2 in 1 USB Audio Cable	Model Name: EC270
	S/N : N/A

Note:

- Above EUT list used are electrically identical per declared by manufacturer.
- Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
- For other wireless features of this EUT, test report will be issued separately.
- The antenna 1 and antenna 2 in this test report are equivalent to WLAN chain 0 and chain 1 in Antenna Specification by manufacturer.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11n HT40	802.11n HT20
L	Low	-	-	-
M	Middle	42	-	-
H	High	-	62	140
Straddle			-	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

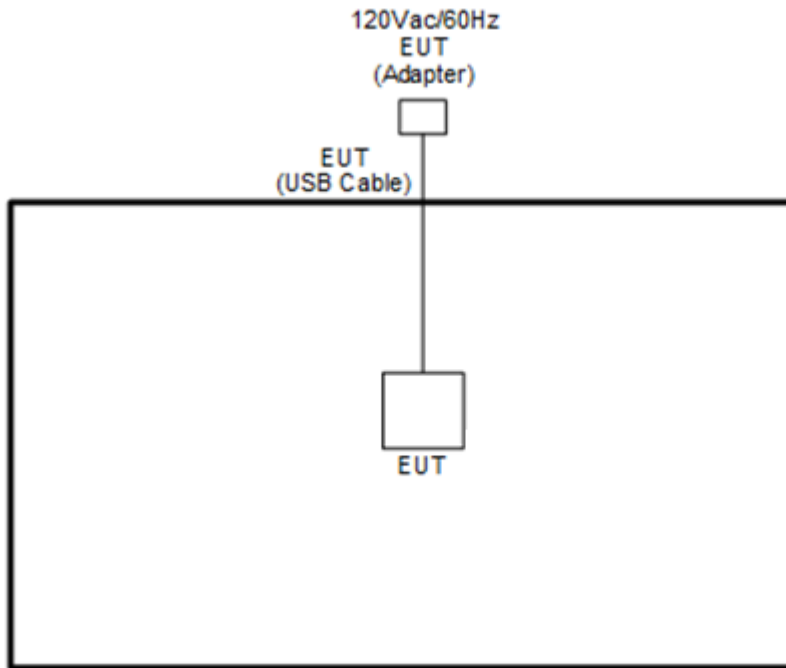

2.4 EUT Operation Test Setup

The RF test items, utility “Tera Term” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

- For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

- The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.4 Test Setup

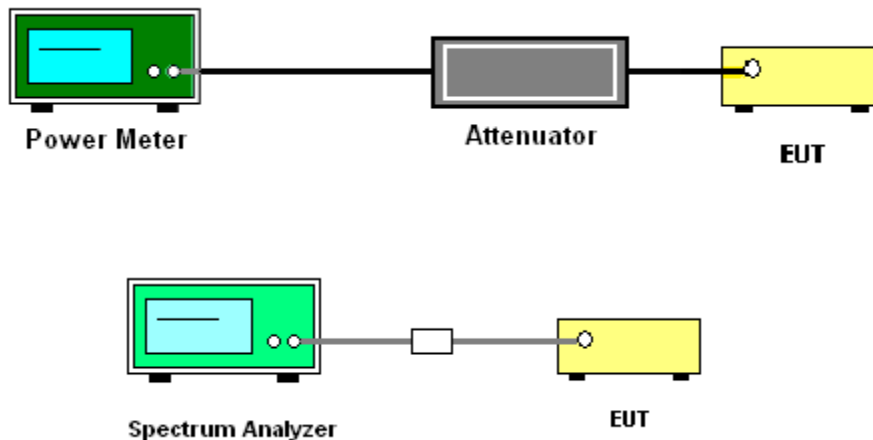

3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.2 Power Spectral Density Measurement

3.2.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.2.4 Test Setup

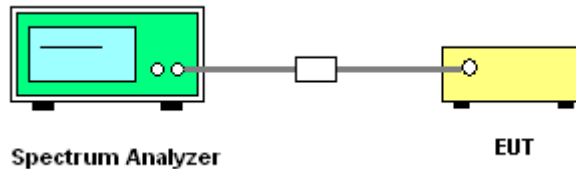

3.2.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.3 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.3.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold




(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
 3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
 4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
 5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
 6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.3.4 Test Setup


For radiated emissions below 30MHz

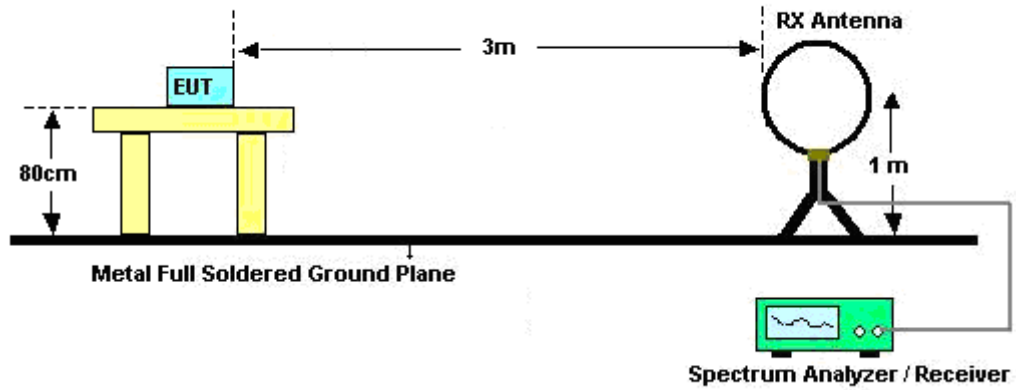

For radiated emissions from 30MHz to 1GHz

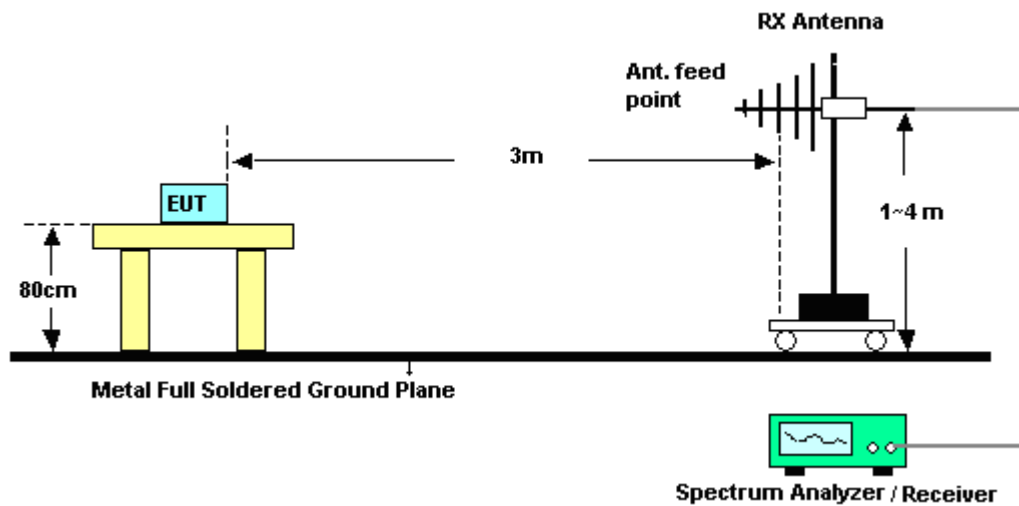

For radiated emissions above 1GHz

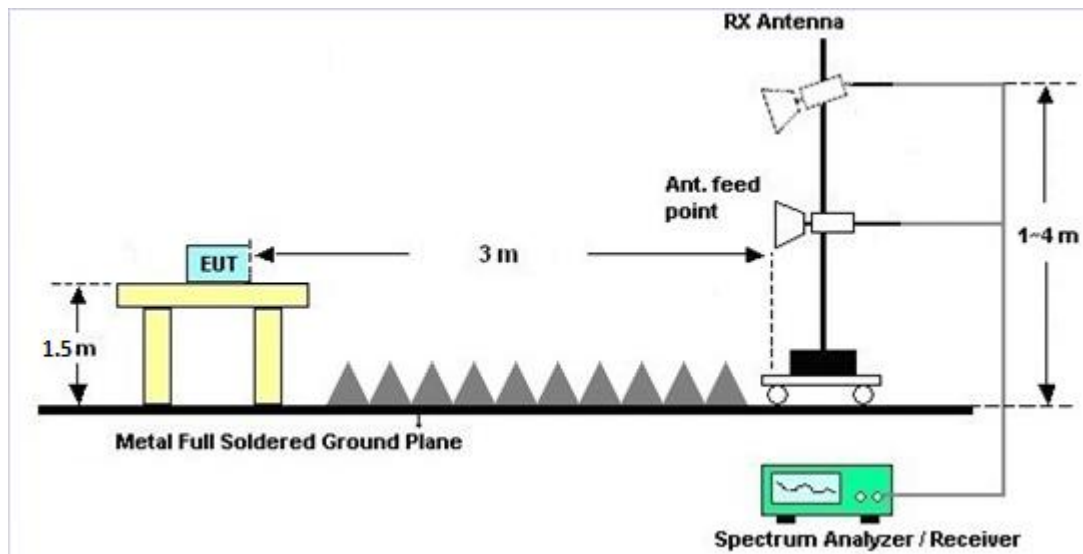

3.3.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.3.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.3.7 Duty Cycle

Please refer to Appendix D.

3.3.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG	DG	Power	PSD
	(dBi)	(dBi)	for	for	Limit	Limit
			Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	-5.70	-7.30	-5.70	-3.45	0.00	0.00
Band II	-5.30	-4.90	-4.90	-2.09	0.00	0.00
Band III	-5.70	1.30	1.30	1.50	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	HTC-1	4	N/A	May 12, 2018	Mar. 01, 2019~ Mar. 18, 2019	May 11, 2019	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15100041SN O10	10MHz~6GHz	May 07, 2018	Mar. 01, 2019~ Mar. 18, 2019	May 06, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Feb. 28, 2019	Mar. 01, 2019~ Mar. 18, 2019	Feb. 27, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 02, 2018	Mar. 01, 2019~ Mar. 18, 2019	Oct. 01, 2019	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Mar. 14, 2019	Jan. 06, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N -6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 13, 2018	Mar. 14, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 30, 2018	Mar. 14, 2019	Oct. 29, 2019	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Dec. 05, 2018	Mar. 14, 2019	Dec. 04, 2019	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Mar. 14, 2019	Dec. 03, 2019	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	1710001800 054001	1GHz~18GHz	Apr. 16, 2018	Mar. 14, 2019	Apr. 15, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 14, 2018	Mar. 14, 2019	Nov. 13, 2020	Radiation (03CH11-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Mar. 14, 2019	Jul. 15, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 19, 2018	Mar. 14, 2019	Oct. 18, 2019	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY53290045	N/A	Jan. 19, 2019	Mar. 14, 2019	Jan. 18, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 05, 2018	Mar. 14, 2019	Nov. 04, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1G Low Pass	Sep. 16, 2018	Mar. 14, 2019	Sep. 17, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN3	6.75GHz High Pass	Sep. 17, 2018	Mar. 14, 2019	Sep. 16, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	2.7G High Pass	Sep. 16, 2018	Mar. 14, 2019	Sep. 17, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 13, 2019	Mar. 14, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Mar. 14, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 13, 2019	Mar. 14, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Mar. 14, 2019	Mar. 12, 2020	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 14, 2019	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 14, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 14, 2019	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Mar. 14, 2019	N/A	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Tommy Lee / Kai Liao	Temperature:	21~25	°C
Test Date:	2019/3/1~2019/3/18	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC Band I												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	13.80	11.90		24.00	24.00	-5.70	-7.30	Pass
11a	6Mbps	1	44	5220	13.80	11.40		24.00	24.00	-5.70	-7.30	Pass
11a	6Mbps	1	48	5240	13.70	11.80		24.00	24.00	-5.70	-7.30	Pass
HT20	MCS0	1	36	5180	13.60	11.80		24.00	24.00	-5.70	-7.30	Pass
HT20	MCS0	1	44	5220	13.70	11.50		24.00	24.00	-5.70	-7.30	Pass
HT20	MCS0	1	48	5240	13.80	11.70		24.00	24.00	-5.70	-7.30	Pass
HT40	MCS0	1	38	5190	13.90	11.90		24.00	24.00	-5.70	-7.30	Pass
HT40	MCS0	1	46	5230	13.70	11.70		24.00	24.00	-5.70	-7.30	Pass
VHT20	MCS0	1	36	5180	13.50	11.70		24.00	24.00	-5.70	-7.30	Pass
VHT20	MCS0	1	44	5220	13.60	11.40		24.00	24.00	-5.70	-7.30	Pass
VHT20	MCS0	1	48	5240	13.70	11.60		24.00	24.00	-5.70	-7.30	Pass
VHT40	MCS0	1	38	5190	13.80	11.80		24.00	24.00	-5.70	-7.30	Pass
VHT40	MCS0	1	46	5230	13.60	11.60		24.00	24.00	-5.70	-7.30	Pass
VHT80	MCS0	1	42	5210	13.80	11.80		24.00	24.00	-5.70	-7.30	Pass
11a	6Mbps	2	36	5180	13.90	12.00	16.06	24.00		-5.70		Pass
11a	6Mbps	2	44	5220	14.00	11.70	16.01	24.00		-5.70		Pass
11a	6Mbps	2	48	5240	13.80	11.90	15.96	24.00		-5.70		Pass
HT20	MCS0	2	36	5180	13.60	12.00	15.88	24.00		-5.70		Pass
HT20	MCS0	2	44	5220	14.10	11.70	16.07	24.00		-5.70		Pass
HT20	MCS0	2	48	5240	13.60	11.90	15.84	24.00		-5.70		Pass
HT40	MCS0	2	38	5190	13.80	12.00	16.00	24.00		-5.70		Pass
HT40	MCS0	2	46	5230	14.00	11.70	16.01	24.00		-5.70		Pass
VHT20	MCS0	2	36	5180	13.50	11.90	15.78	24.00		-5.70		Pass
VHT20	MCS0	2	44	5220	14.00	11.60	15.97	24.00		-5.70		Pass
VHT20	MCS0	2	48	5240	13.70	11.80	15.86	24.00		-5.70		Pass
VHT40	MCS0	2	38	5190	13.80	11.90	15.96	24.00		-5.70		Pass
VHT40	MCS0	2	46	5230	13.80	11.60	15.85	24.00		-5.70		Pass
VHT80	MCS0	2	42	5210	13.40	11.90	15.72	24.00		-5.70		Pass

TEST RESULTS DATA
Average Power Table

FCC Band II													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	13.60	11.80		23.98	23.98	-5.30	-4.90	30	Pass
11a	6Mbps	1	60	5300	13.70	11.80		23.98	23.98	-5.30	-4.90	30	Pass
11a	6Mbps	1	64	5320	13.80	11.80		23.98	23.98	-5.30	-4.90	30	Pass
HT20	MCS0	1	52	5260	13.90	11.80		23.98	23.98	-5.30	-4.90	30	Pass
HT20	MCS0	1	60	5300	13.60	11.90		23.98	23.98	-5.30	-4.90	30	Pass
HT20	MCS0	1	64	5320	13.60	11.80		23.98	23.98	-5.30	-4.90	30	Pass
HT40	MCS0	1	54	5270	13.60	11.70		23.98	23.98	-5.30	-4.90	30	Pass
HT40	MCS0	1	62	5310	13.70	11.90		23.98	23.98	-5.30	-4.90	30	Pass
VHT20	MCS0	1	52	5260	13.80	11.70		23.98	23.98	-5.30	-4.90	30	Pass
VHT20	MCS0	1	60	5300	13.50	11.70		23.98	23.98	-5.30	-4.90	30	Pass
VHT20	MCS0	1	64	5320	13.50	11.70		23.98	23.98	-5.30	-4.90	30	Pass
VHT40	MCS0	1	54	5270	13.50	11.60		23.98	23.98	-5.30	-4.90	30	Pass
VHT40	MCS0	1	62	5310	13.60	11.80		23.98	23.98	-5.30	-4.90	30	Pass
VHT80	MCS0	1	58	5290	13.80	11.60		23.98	23.98	-5.30	-4.90	30	Pass
11a	6Mbps	2	52	5260	13.70	12.00	15.94	23.98		-4.90		30	Pass
11a	6Mbps	2	60	5300	13.80	11.90	15.96	23.98		-4.90		30	Pass
11a	6Mbps	2	64	5320	13.70	11.80	15.86	23.98		-4.90		30	Pass
HT20	MCS0	2	52	5260	13.50	12.00	15.82	23.98		-4.90		30	Pass
HT20	MCS0	2	60	5300	13.70	12.00	15.94	23.98		-4.90		30	Pass
HT20	MCS0	2	64	5320	13.80	11.90	15.96	23.98		-4.90		30	Pass
HT40	MCS0	2	54	5270	13.70	12.00	15.94	23.98		-4.90		30	Pass
HT40	MCS0	2	62	5310	13.70	12.00	15.94	23.98		-4.90		30	Pass
VHT20	MCS0	2	52	5260	13.30	11.90	15.67	23.98		-4.90		30	Pass
VHT20	MCS0	2	60	5300	13.70	11.90	15.90	23.98		-4.90		30	Pass
VHT20	MCS0	2	64	5320	13.70	11.80	15.86	23.98		-4.90		30	Pass
VHT40	MCS0	2	54	5270	13.50	11.90	15.78	23.98		-4.90		30	Pass
VHT40	MCS0	2	62	5310	13.70	11.90	15.90	23.98		-4.90		30	Pass
VHT80	MCS0	2	58	5290	13.80	11.70	15.89	23.98		-4.90		30	Pass

TEST RESULTS DATA
Average Power Table

FCC Band III													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	13.60	11.90		23.98	23.98	-5.70	1.30	30	Pass
11a	6Mbps	1	116	5580	13.90	11.90		23.98	23.98	-5.70	1.30	30	Pass
11a	6Mbps	1	140	5700	11.20	11.70		23.98	23.98	-5.70	1.30	30	Pass
11a	6Mbps	1	144	5720	13.70	11.80		23.98	23.98	-5.70	1.30	30	Pass
HT20	MCS0	1	100	5500	13.90	11.90		23.98	23.98	-5.70	1.30	30	Pass
HT20	MCS0	1	116	5580	13.80	11.90		23.98	23.98	-5.70	1.30	30	Pass
HT20	MCS0	1	140	5700	12.50	11.80		23.98	23.98	-5.70	1.30	30	Pass
HT20	MCS0	1	144	5720	13.90	11.60		23.98	23.98	-5.70	1.30	30	Pass
HT40	MCS0	1	102	5510	13.60	11.90		23.98	23.98	-5.70	1.30	30	Pass
HT40	MCS0	1	110	5550	13.60	11.90		23.98	23.98	-5.70	1.30	30	Pass
HT40	MCS0	1	134	5670	13.80	11.80		23.98	23.98	-5.70	1.30	30	Pass
HT40	MCS0	1	142	5710	13.70	11.70		23.98	23.98	-5.70	1.30	30	Pass
VHT20	MCS0	1	100	5500	13.80	11.80		23.98	23.98	-5.70	1.30	30	Pass
VHT20	MCS0	1	116	5580	13.70	11.80		23.98	23.98	-5.70	1.30	30	Pass
VHT20	MCS0	1	140	5700	12.50	11.70		23.98	23.98	-5.70	1.30	30	Pass
VHT20	MCS0	1	144	5720	13.80	11.50		23.98	23.98	-5.70	1.30	30	Pass
VHT40	MCS0	1	102	5510	13.50	11.80		23.98	23.98	-5.70	1.30	30	Pass
VHT40	MCS0	1	110	5550	13.50	11.80		23.98	23.98	-5.70	1.30	30	Pass
VHT40	MCS0	1	134	5670	13.70	11.60		23.98	23.98	-5.70	1.30	30	Pass
VHT40	MCS0	1	142	5710	13.60	11.60		23.98	23.98	-5.70	1.30	30	Pass
VHT80	MCS0	1	106	5530	14.00	11.60		23.98	23.98	-5.70	1.30	30	Pass
VHT80	MCS0	1	122	5610	13.80	11.50		23.98	23.98	-5.70	1.30	30	Pass
VHT80	MCS0	1	138	5690	13.70	11.60		23.98	23.98	-5.70	1.30	30	Pass

FCC Band III													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	13.80	12.00	16.00	23.98		1.30		30	Pass
11a	6Mbps	2	116	5580	13.70	12.00	15.94	23.98		1.30		30	Pass
11a	6Mbps	2	140	5700	11.50	11.70	14.61	23.98		1.30		30	Pass
11a	6Mbps	2	144	5720	13.70	11.80	15.86	23.98		1.30		30	Pass
HT20	MCS0	2	100	5500	13.90	11.80	15.99	23.98		1.30		30	Pass
HT20	MCS0	2	116	5580	14.00	11.70	16.01	23.98		1.30		30	Pass
HT20	MCS0	2	140	5700	12.30	11.60	14.97	23.98		1.30		30	Pass
HT20	MCS0	2	144	5720	13.90	11.60	15.91	23.98		1.30		30	Pass
HT40	MCS0	2	102	5510	13.90	12.00	16.06	23.98		1.30		30	Pass
HT40	MCS0	2	110	5550	13.80	12.00	16.00	23.98		1.30		30	Pass
HT40	MCS0	2	134	5670	13.70	11.90	15.90	23.98		1.30		30	Pass
HT40	MCS0	2	142	5710	13.80	11.80	15.92	23.98		1.30		30	Pass
VHT20	MCS0	2	100	5500	13.80	12.00	16.00	23.98		1.30		30	Pass
VHT20	MCS0	2	116	5580	13.70	11.90	15.90	23.98		1.30		30	Pass
VHT20	MCS0	2	140	5700	12.10	11.80	14.96	23.98		1.30		30	Pass
VHT20	MCS0	2	144	5720	13.60	11.80	15.80	23.98		1.30		30	Pass
VHT40	MCS0	2	102	5510	13.50	11.90	15.78	23.98		1.30		30	Pass
VHT40	MCS0	2	110	5550	13.80	11.90	15.96	23.98		1.30		30	Pass
VHT40	MCS0	2	134	5670	13.50	11.80	15.74	23.98		1.30		30	Pass
VHT40	MCS0	2	142	5710	13.70	11.70	15.82	23.98		1.30		30	Pass
VHT80	MCS0	2	106	5530	13.40	11.70	15.64	23.98		1.30		30	Pass
VHT80	MCS0	2	122	5610	13.60	11.60	15.72	23.98		1.30		30	Pass
VHT80	MCS0	2	138	5690	13.40	11.70	15.64	23.98		1.30		30	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	HAO Shu 、 JC Liang 、 KenWu	Temperature :	20~25°C
		Relative Humidity :	50~55%

Band 1 - 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5149.6	52.45	-21.55	74	43.99	31.9	9.68	33.12	135	358	P	H
		5144.84	41.66	-12.34	54	33.21	31.89	9.68	33.12	135	358	A	H
	*	5210	94.41	-	-	86.21	31.56	9.76	33.12	135	358	P	H
	*	5210	86.51	-	-	78.31	31.56	9.76	33.12	135	358	A	H
		5399.68	48.87	-25.13	74	40.54	31.6	9.84	33.11	135	358	P	H
		5459.48	40.22	-13.78	54	31.7	31.74	9.89	33.11	135	358	A	H
		5133.96	54.03	-19.97	74	45.62	31.87	9.66	33.12	204	333	P	V
		5148.58	45.24	-8.76	54	36.78	31.9	9.68	33.12	204	333	A	V
	*	5210	96.48	-	-	88.28	31.56	9.76	33.12	204	333	P	V
	*	5210	87.31	-	-	79.11	31.56	9.76	33.12	204	333	A	V
		5392.14	48.09	-25.91	74	39.81	31.55	9.84	33.11	204	333	P	V
	5444.4	40.21	-13.79	54	31.75	31.69	9.88	33.11	204	333	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		10420	44.8	-23.4	68.2	50.65	39.7	15.3	60.85	100	0	P	H
		15630	43.86	-30.14	74	47.56	37.85	18.94	60.49	100	0	P	H
													H
													H
		10420	44.21	-23.99	68.2	50.06	39.7	15.3	60.85	100	0	P	V
		15630	44.12	-29.88	74	47.82	37.85	18.94	60.49	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5069.02	48.91	-25.09	74	40.79	31.68	9.56	33.12	135	360	P	H
		5055.42	40.67	-13.33	54	32.63	31.62	9.54	33.12	135	360	A	H
	*	5310	98.52	-	-	90.53	31.3	9.8	33.11	135	360	P	H
	*	5310	89.65	-	-	81.66	31.3	9.8	33.11	135	360	A	H
		5387.76	58.41	-15.59	74	50.15	31.53	9.84	33.11	135	360	P	H
		5413.92	46.21	-7.79	54	37.84	31.63	9.85	33.11	135	360	A	H
		5077.86	49.1	-24.9	74	40.93	31.71	9.58	33.12	150	341	P	V
		5050.32	40.79	-13.21	54	32.77	31.6	9.54	33.12	150	341	A	V
	*	5310	97.89	-	-	89.9	31.3	9.8	33.11	150	341	P	V
	*	5310	88.89	-	-	80.9	31.3	9.8	33.11	150	341	A	V
		5355.84	59.56	-14.44	74	51.51	31.34	9.82	33.11	150	341	P	V
		5413.92	43.96	-10.04	54	35.59	31.63	9.85	33.11	150	341	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 62		10620	42.92	-31.08	74	48.93	39.68	15.41	61.1	100	0	P	H
		15930	42.67	-31.33	74	46.76	37.11	19.06	60.26	100	0	P	H
													H
													H
5310MHz		10620	42.97	-31.03	74	48.98	39.68	15.41	61.1	100	0	P	V
		15930	42.14	-31.86	74	46.23	37.11	19.06	60.26	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 140 5700MHz	*	5700	105.06	-	-	96.07	32	10.16	33.17	120	359	P	H
	*	5700	96.09	-	-	87.1	32	10.16	33.17	120	359	A	H
		5725.48	65	-3.2	68.2	55.93	32.05	10.2	33.18	120	359	P	H
													H
													H
													H
	*	5700	99.49	-	-	90.5	32	10.16	33.17	103	11	P	V
	*	5700	90.79	-	-	81.8	32	10.16	33.17	103	11	A	V
		5728.84	54.91	-13.29	68.2	45.83	32.06	10.2	33.18	103	11	P	V
													V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 140 5700MHz		11400	45.47	-28.53	74	51.31	39.7	15.86	61.4	100	0	P	H
		17100	45.58	-22.62	68.2	43.34	40.1	20.1	57.96	100	0	P	H
													H
													H
		11400	44.77	-29.23	74	50.61	39.7	15.86	61.4	100	0	P	V
		17100	45.84	-22.36	68.2	43.6	40.1	20.1	57.96	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
WIFI 802.11n HT20 (LF @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 LF		30	20.93	-19.07	40	28.55	24.01	0.75	32.38			P	H	
		45.52	20.37	-19.63	40	35.48	16.32	0.94	32.37			P	H	
		159.98	23.44	-20.06	43.5	37.6	16.37	1.74	32.27			P	H	
		751.68	31.12	-14.88	46	31.64	27.83	3.65	32			P	H	
		887.48	32.92	-13.08	46	31.27	29.07	4	31.42			P	H	
		952.47	34.83	-11.17	46	30.86	30.68	4.16	30.87	100	0	P	H	
														H
														H
														H
														H
														H
														H
														H
			31.94	28.33	-11.67	40	36.77	23.16	0.77	32.37	100	0	P	V
			45.52	23.55	-16.45	40	38.66	16.32	0.94	32.37			P	V
			91.11	30.19	-13.31	43.5	46.43	14.76	1.33	32.33			P	V
			750.71	29.99	-16.01	46	30.52	27.82	3.65	32			P	V
			855.47	32.28	-13.72	46	30.7	29.23	3.94	31.59			P	V
			954.41	33.74	-12.26	46	29.66	30.77	4.16	30.85			P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission




Test Engineer :	HAO Shu 、 JC Liang 、 KenWu	Temperature :	20~25°C
		Relative Humidity :	50~55%

Note symbol



-L	Low channel location
-R	High channel location






Band 1 - 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

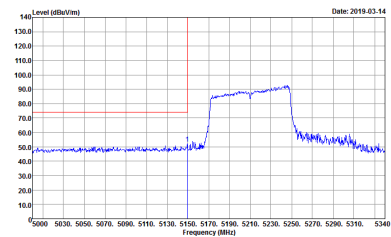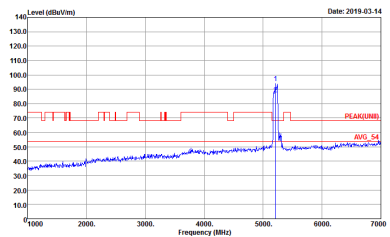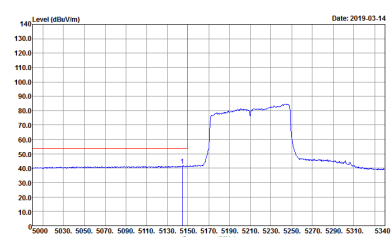WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - L	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : O X IE</p>	 <p>Site : 03CH11-HY Condition : PEAK(FUNDT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : O X IE</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : O X IE</p>	Left blank

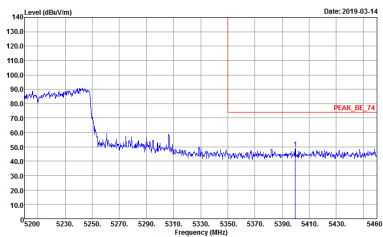
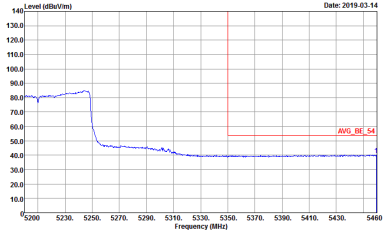


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1+2	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p>Left blank</p>

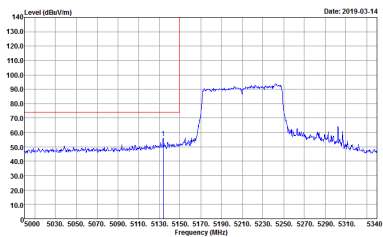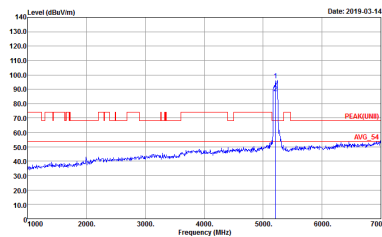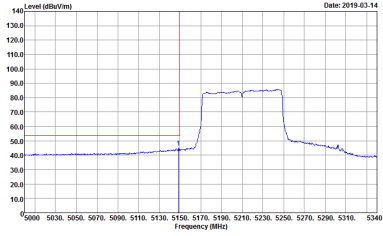

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X 1E</p>	 <p>Site : 03CH11-HY Condition : PEAK(LINB) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X 1E</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X 1E</p>	Left blank

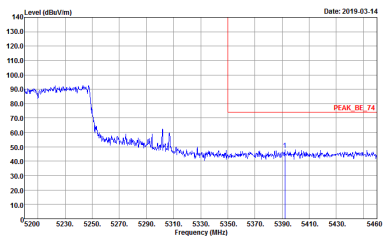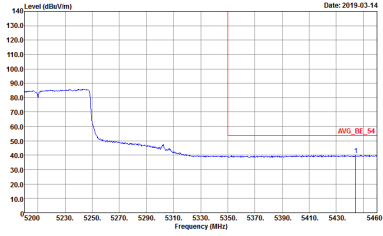

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1+2	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p>Left blank</p>



Band 1 - 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK(LINE1) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p>Site : 03CH11-HY Condition : PEAK(LINE1) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>



**Band 2 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 MHz - L	
1+2	Horizontal	Fundamental
<p align="center">Peak</p>	<p>Date: 2019-03-14</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p>Date: 2019-03-14</p> <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>
<p align="center">Avg.</p>	<p>Date: 2019-03-14</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	<p align="center">Left blank</p>





WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 MHz - R	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	Left blank



WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 MHz - L	
1+2	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2019-03-14</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X 1E</p>	<p>Date: 2019-03-14</p> <p>Site : 03CH11-HY Condition : PEAK(LINB) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X 1E</p>
<p>Avg.</p>	<p>Date: 2019-03-14</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X 1E</p>	<p>Left blank</p>

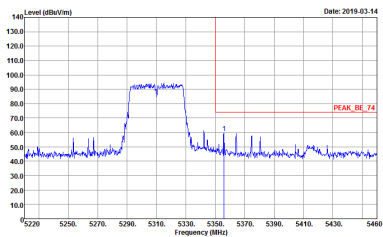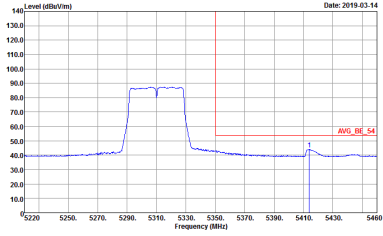

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 MHz - R	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1E</p>	Left blank



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT40 CH62 5310	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CHE11-14Y Condition : PEAK(LINE) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : O X IE</p>	<p>Site : 03CHE11-14Y Condition : PEAK(LINE) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : O X IE</p>



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)



Table with 2 columns: Horizontal and Fundamental. It contains two spectral plots showing Level (dBm/Vm) vs Frequency (MHz) with associated test parameters like Site, Condition, Detector, Project, and Setting.



WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11n HT20 CH140 5700MHz	
1+2	Vertical	Fundamental
Peak.	<p>Site : 03CH11-14Y Condition : PEAK_BE(UNI)_B3 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1B</p>	<p>Site : 03CH11-14Y Condition : PEAK(UNI)_B3 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1B</p>



**Band 3 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

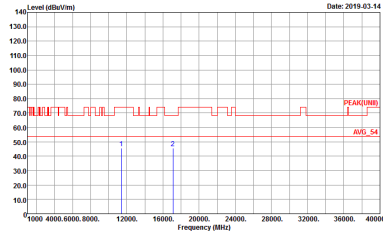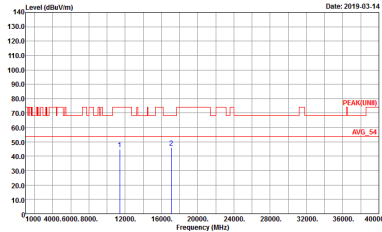WIFI	Band 3 5470~5725MHz Harmonic @ 3m	
ANT	802.11n HT20 CH140 5700MHz	
1+2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CHE1-14Y Condition : PEAK(LINE1) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 802425-03 Setting : 0 X 1B</p>	 <p>Site : 03CHE1-14Y Condition : PEAK(LINE1) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 802425-03 Setting : 0 X 1B</p>



Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

WIFI	5GHz WIFI	
ANT	802.11n HT20 LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 802425-03</p>	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 802425-03</p>




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1+2	5GHz 802.11n HT20 for Ant. 1	98.82	-	-	10Hz	0.05
1+2	5GHz 802.11n HT20 for Ant. 2	98.82	-	-	10Hz	0.05
1+2	5GHz 802.11n HT40 for Ant. 1	97.23	1230	0.81	1kHz	0.12
1+2	5GHz 802.11n HT40 for Ant. 2	97.23	1230	0.81	1kHz	0.12
1+2	5GHz 802.11ac VHT80 for Ant. 1	94.29	594	1.68	3kHz	0.26
1+2	5GHz 802.11ac VHT80 for Ant. 2	94.29	594	1.68	3kHz	0.26




MIMO <Ant. 1>

802.11n HT20

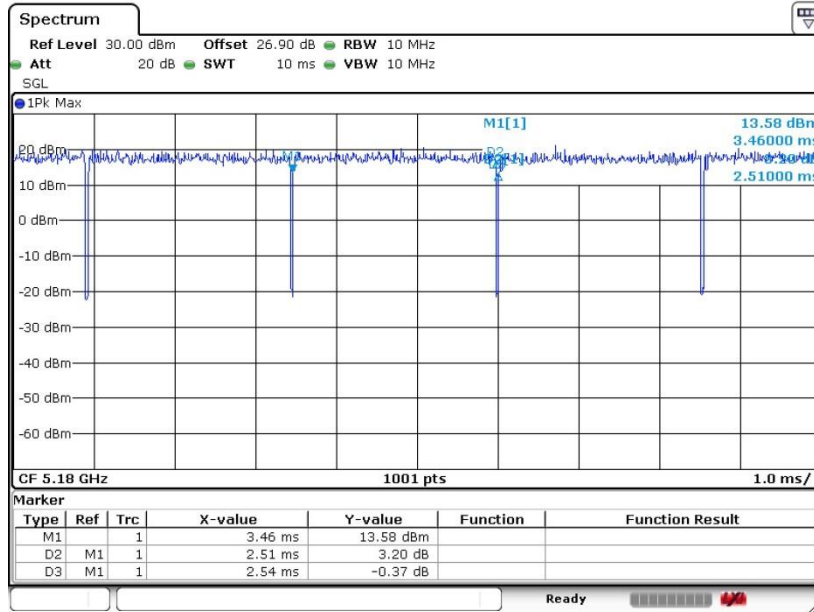

Date: 1.MAR.2019 13:08:27


802.11n HT40

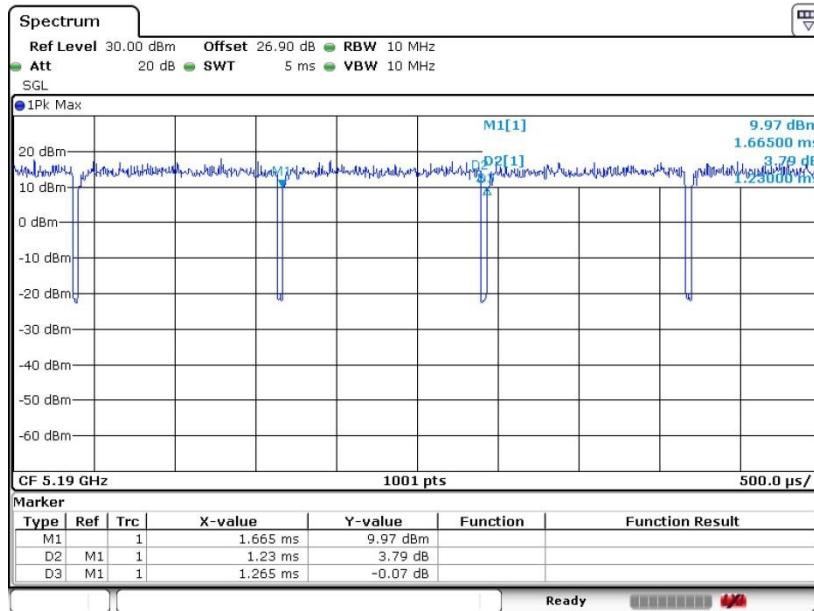

Date: 1.MAR.2019 13:10:52




802.11ac VHT80

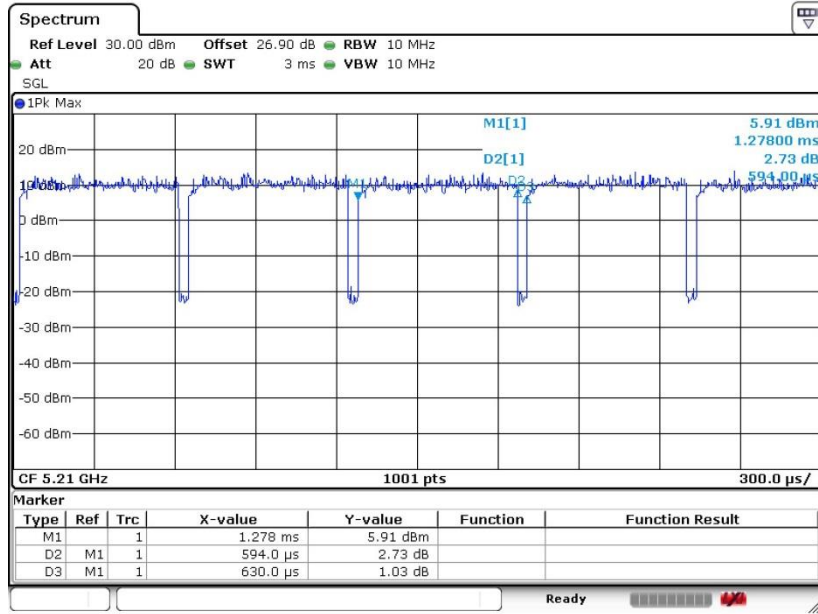

Date: 1.MAR.2019 13:20:28

MIMO <Ant. 2>


802.11n HT20

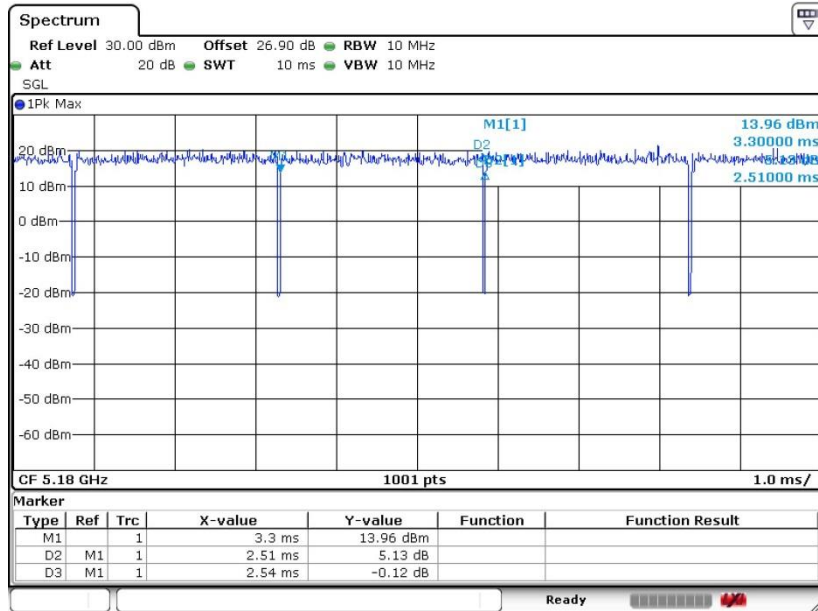

Date: 1.MAR.2019 13:09:20




802.11n HT40

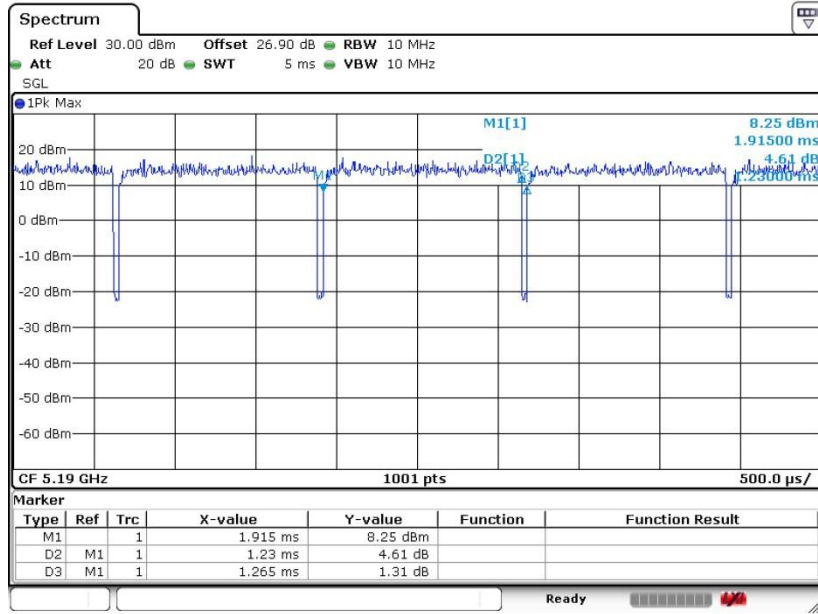

Date: 1.MAR.2019 13:17:45

802.11ac VHT80

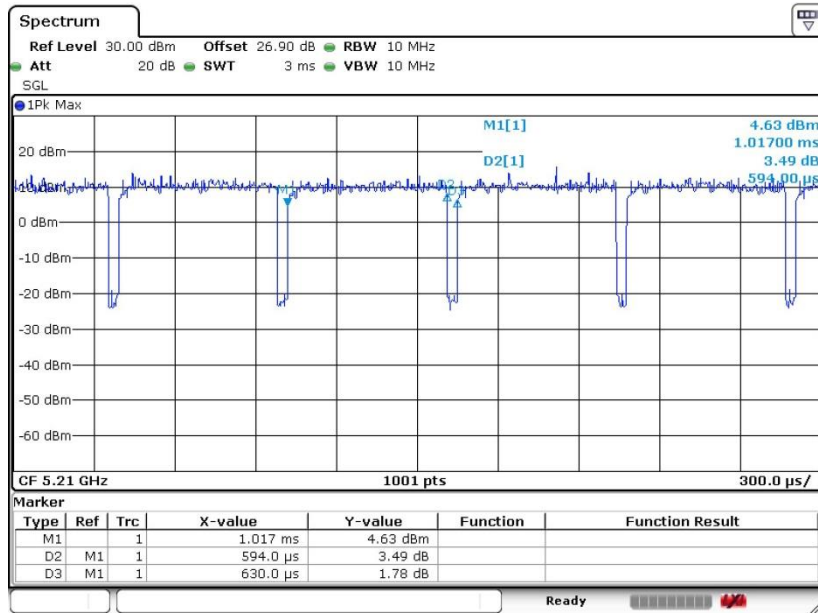

Date: 1.MAR.2019 13:21:34

—THE END—