



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.381.1520
<http://www.element.com>

MEASUREMENT REPORT FCC Part 15.407 802.11a/ax 6E (OFDM)

Applicant Name:
Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0075
Japan

Date of Testing:
01/30/2023 - 04/18/2023
Test Report Issue Date:
04/18/2023
Test Site/Location:
Element lab., Columbia, MD, USA
Test Report Serial No.:
1M2302060006-08-R3.PY7

FCC ID:	PY7-84558E
APPLICANT:	Sony Corporation

Application Type: Certification
EUT Type: Portable Handset
Frequency Range: 5955 – 7115MHz
Modulation Type: OFDM
FCC Classification: 15E 6GHz Low Power Indoor Client (6XD)
FCC Rule Part(s): Part 15 Subpart E (15.407)
Test Procedure(s): ANSI C63.10-2013, KDB 987594 D02 v01r01, KDB 648474 D03 v01r04

Note: This revised Test Report (S/N: 1M2302060006-08-R2.PY7) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 1 of 237

T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	7
2.4	Test Configuration.....	8
2.5	Software and Firmware.....	8
2.6	EMI Suppression Device(s) / Modifications.....	8
3.0	DESCRIPTION OF TESTS.....	9
3.1	Evaluation Procedure.....	9
3.2	AC Line Conducted Emissions.....	9
3.3	Radiated Emissions.....	10
3.4	Environmental Conditions.....	10
4.0	ANTENNA REQUIREMENTS.....	11
5.0	MEASUREMENT UNCERTAINTY.....	12
6.0	TEST EQUIPMENT CALIBRATION DATA.....	13
7.0	TEST RESULTS.....	14
7.1	Summary.....	14
7.2	26dB Bandwidth Measurement.....	16
7.3	UNII Output Power Measurement.....	71
7.4	Maximum Power Spectral Density.....	75
7.5	In-Band Emissions.....	132
7.6	Contention Based Protocol.....	188
7.7	Radiated Emission Measurements.....	207
7.8	Line Conducted Test Data.....	227
8.0	CONCLUSION.....	237

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 2 of 237

MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	MIMO	
			Max. Power [mW]	Max. Power [dBm]
20	5	5955 - 6415	6.295	7.99
	6	6435 - 6515	6.039	7.81
	7	6535 - 6875	5.984	7.77
	8	6895 - 7115	8.531	9.31
40	5	5965 - 6405	11.858	10.74
	6	6445 - 6525	10.740	10.31
	7	6565 - 6845	11.508	10.61
	8	6885 - 7085	17.100	12.33
80	5	5985 - 6385	26.792	14.28
	6	6465	25.704	14.10
	7	6545 - 6865	25.586	14.08
	8	6945 - 7025	25.942	14.14
160	5	6025 - 6345	25.763	14.11
	6	6505	25.942	14.14
	7	6665 - 6825	26.122	14.17
	8	6985	27.606	14.41

EUT Overview

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 3 of 237

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO\IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 4 of 237

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sony Corporation Portable Handset FCC: PY7-84558E**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: 69881, 70046, 02847, 02748, 02862

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR FR1, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5 and 6 GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	5955	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 5 of 237

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
47	6185			175	6825		
79	6345						

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO
		Duty Cycle [%]
6GHz	a	99.20
	ax (HT20)	99.71
	ax (HT40)	99.73
	ax (HT80)	99.73
	ax (HT160)	99.69

Table 2-5. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
6GHz	11a	x	x	✓	✓	x	x
	11ax	x	x	✓	✓	✓	✓

Table 2-6. Antenna / Technology Configurations

✓ = Support; x = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 6 of 237



3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index	Spatial Stream	OFDM (802.11ax)											
			20MHz			40MHz			80MHz			160MHz		
			0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
6	0	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	1	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	2	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	3	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	4	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	5	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	6	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	7	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
8	1	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
9	1	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
10	1	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
11	1	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
6	0	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	1	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	2	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	3	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	4	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	5	2	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	6	2	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	7	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
8	2	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
9	2	2	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
10	2	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
11	2	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7

Table 2-7. Supported Data Rates

2.3 Antenna Description

The following antenna gains are used in this device per the "Unlicensed Band Antenna Gain" document provided by the client. This document is also included in the filing as a public exhibit.

Frequency	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]
5955 MHz	-1.43	-3.98
6050 MHz	-1.68	-4.79
6175 MHz	-2.12	-4.32
6300 MHz	-1.40	-4.27
6415 MHz	-1.30	-4.02
6435 MHz	-1.60	-3.83
6475 MHz	-1.68	-3.42
6515 MHz	-1.94	-2.87
6535 MHz	-2.33	-2.55
6640 MHz	-2.32	-2.33
6760 MHz	-2.86	-4.32
6875 MHz	-2.61	-4.22
6895 MHz	-2.54	-4.19
7000 MHz	-3.10	-4.33
7115 MHz	-2.82	-3.82

Table 2-8 Antenna Peak Gain per Frequency

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 7 of 237

	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5955 – 6415 MHz	-1.30	-3.98	0.47
6435 – 6515 MHz	-1.60	-2.87	0.80
6535 – 6875 MHz	-2.32	-2.33	0.69
6895 – 7115 MHz	-2.54	-3.82	-0.15

Table 2-9. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 987594 D02 v01r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Belkin F7U050 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with firmware version 0.621 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 8 of 237

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 987594 D02 v01r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 9 of 237

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precautions were taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height were noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 10 of 237

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 11 of 237

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Contention Based Protocol Conducted Measurements	0.86
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 12 of 237

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-1
-	WL25-3	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-3
-	WL25-4	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-4
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	7/21/2023	MY51210133
Anritsu	ML2495A	Power Meter	5/9/2022	Annual	5/9/2023	1328004
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2023	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	8/11/2022	Biennial	8/11/2024	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	9/6/2022	Annual	9/6/2023	MY54490576
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/11/2023	Annual	1/11/2024	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/25/2022	Annual	8/25/2023	100348
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/14/2022	Biennial	1/14/2024	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 13 of 237

7.0 TEST RESULTS

7.1 Summary

Company Name: Sony Corporation
 FCC ID: PY7-84558E
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046, 15.407(a)(11)	Maximum Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.3
15.407(a)(8)	Maximum Radiated Output Power	< 24dBm over the frequency band of operation		PASS	Section 7.3
2.1049, 15.407(a)(10)	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands. The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.		PASS	Section 7.2
15.407(a)(8)	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p.		PASS	Section 7.4
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7)		PASS	Section 7.5
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7
15.407(b)(9)	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 14 of 237



Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 15 of 237

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 16 of 237

7.2.1 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 5)

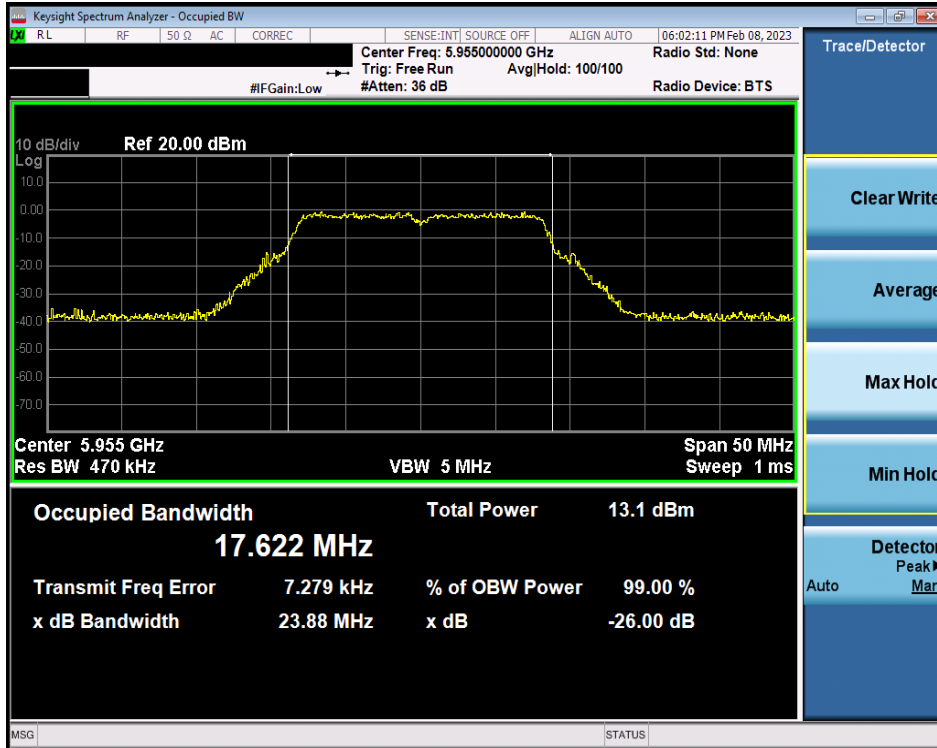


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 1)

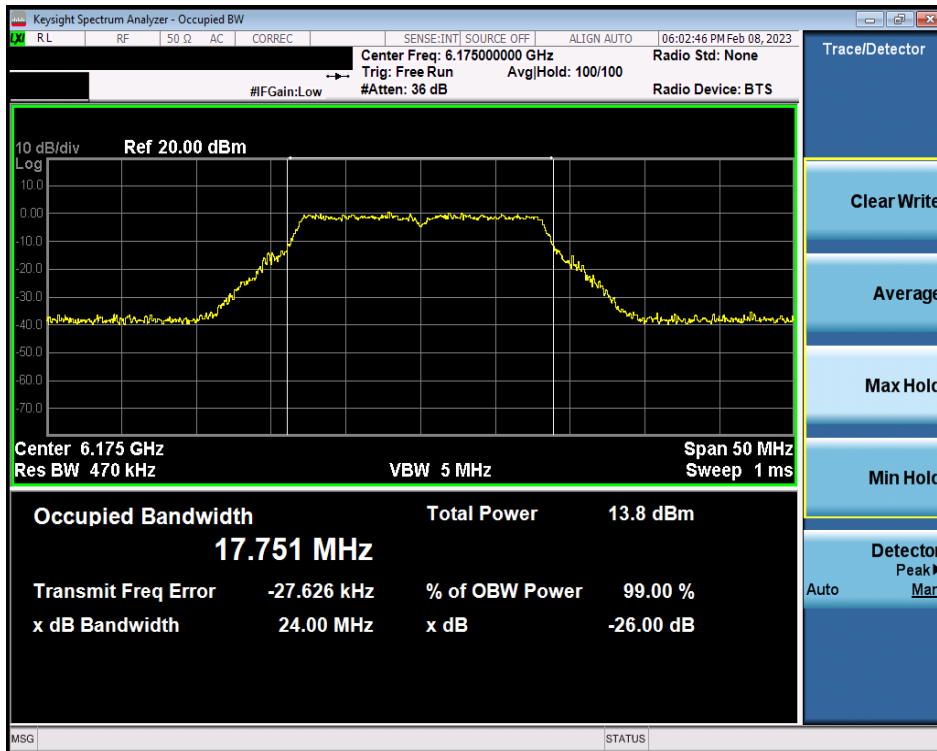


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 17 of 237

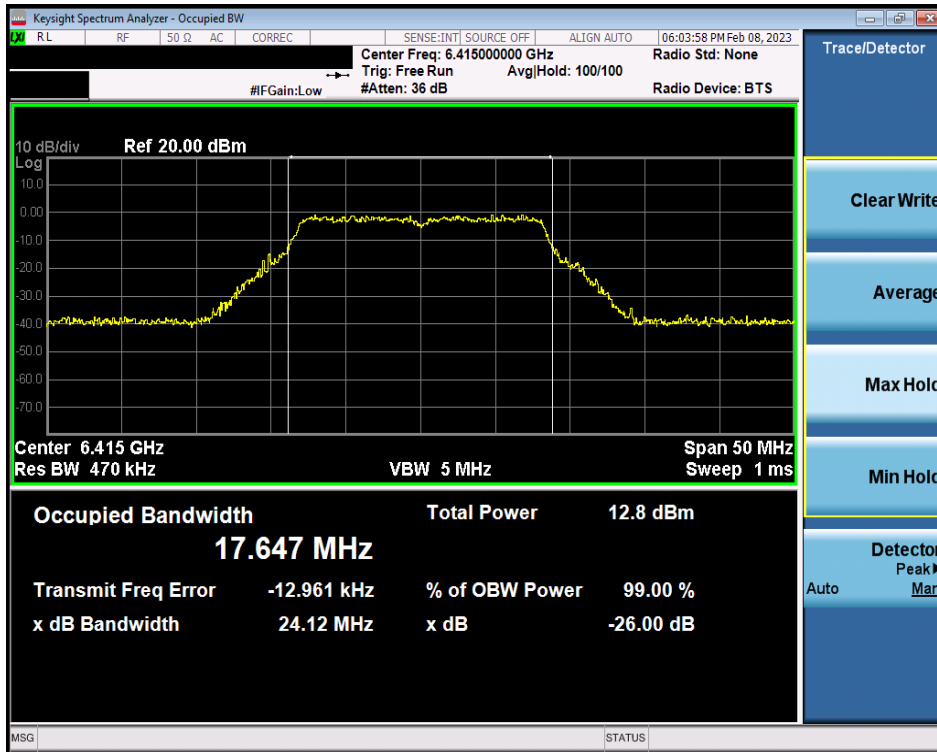


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 93)

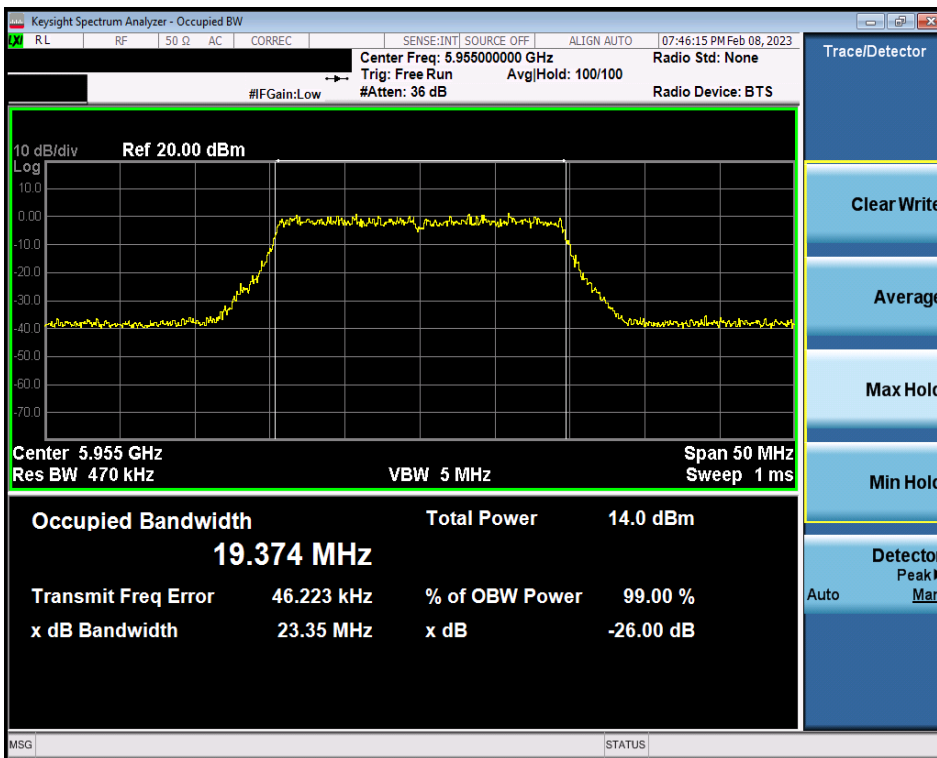


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 1)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 18 of 237

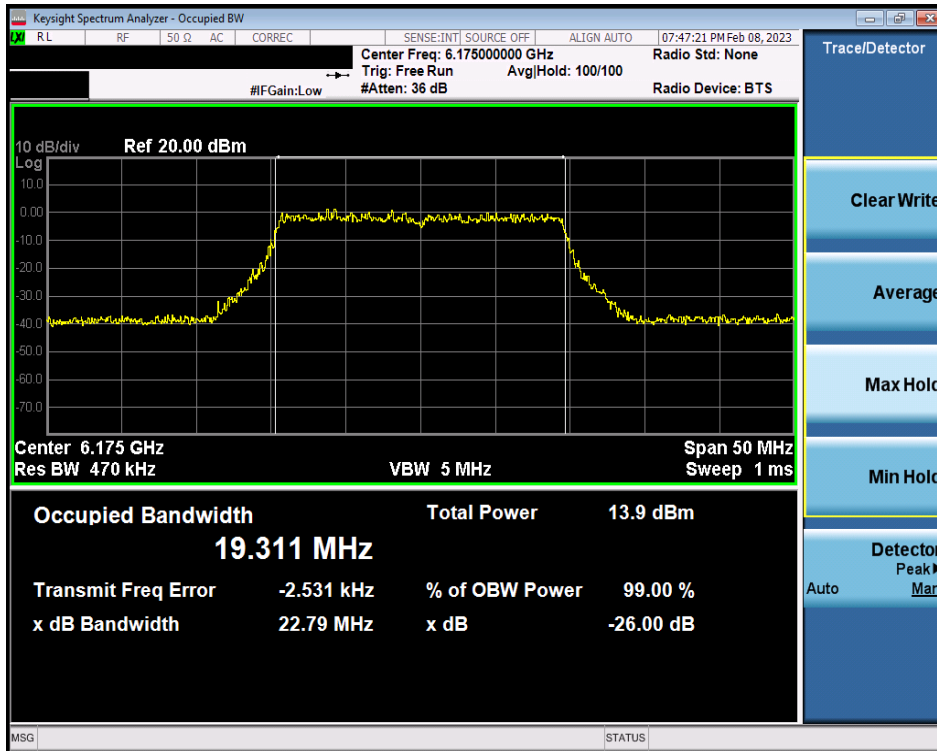


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45)

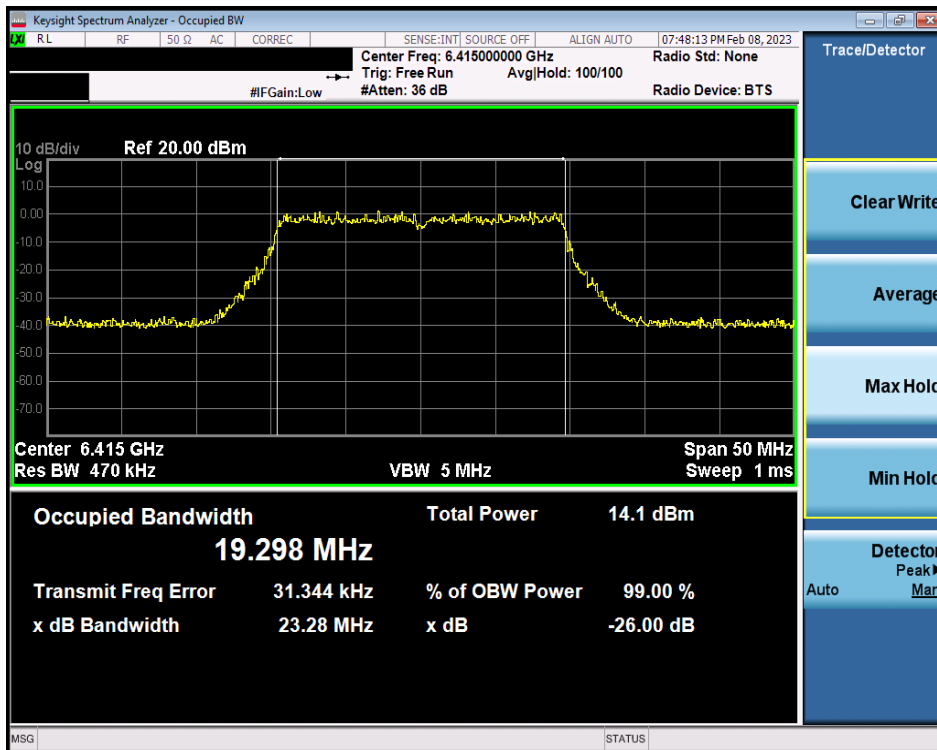


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 93)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 19 of 237

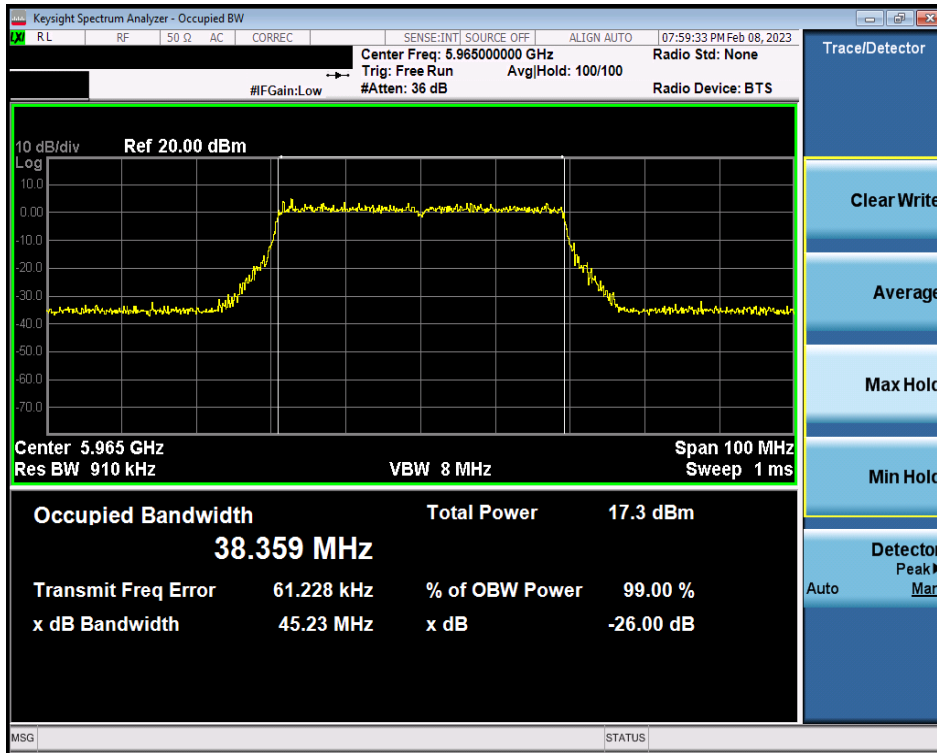


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 3)

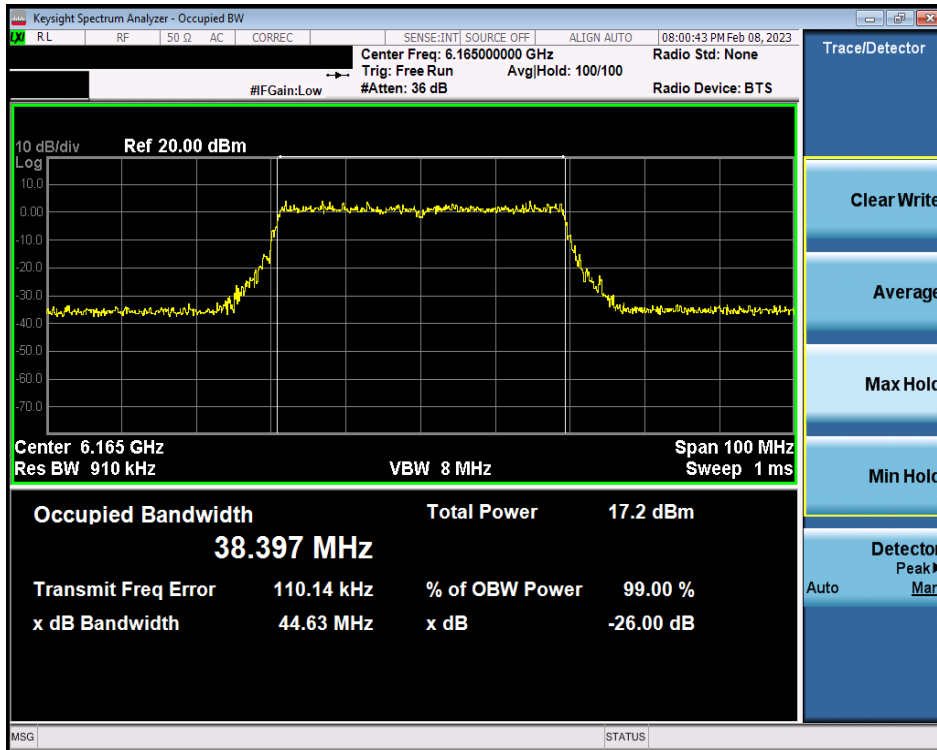


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 20 of 237

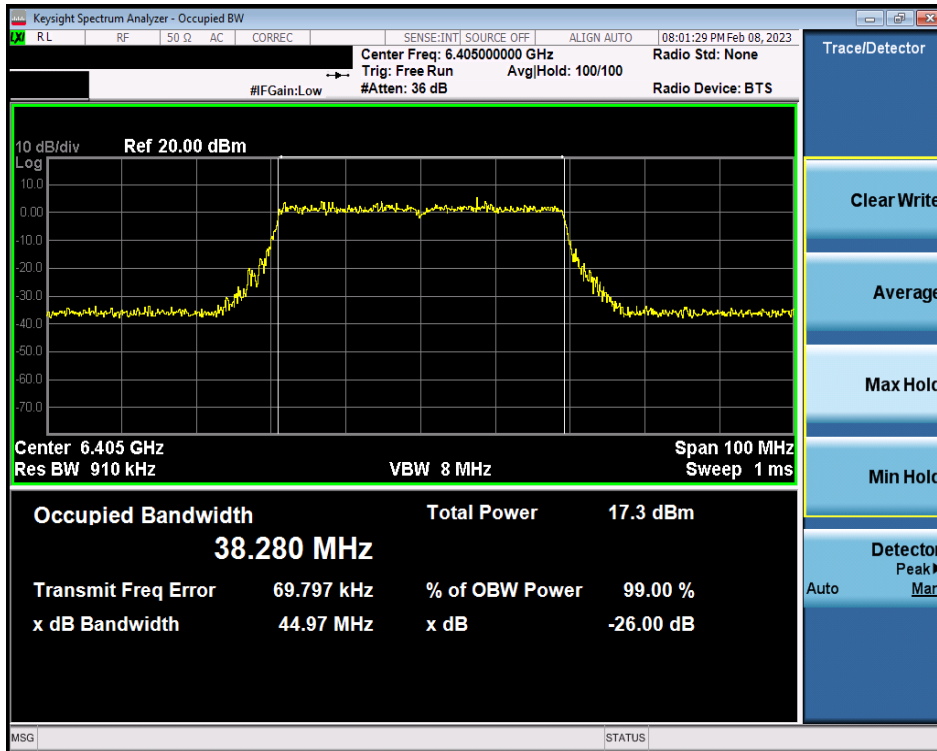


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 91)

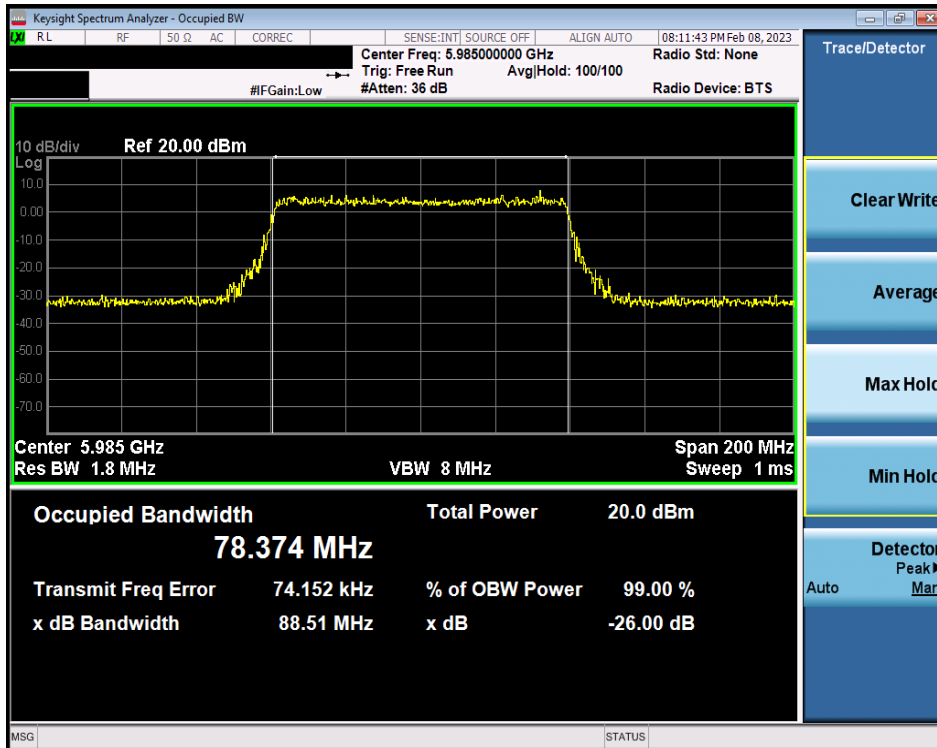


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 7)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 21 of 237

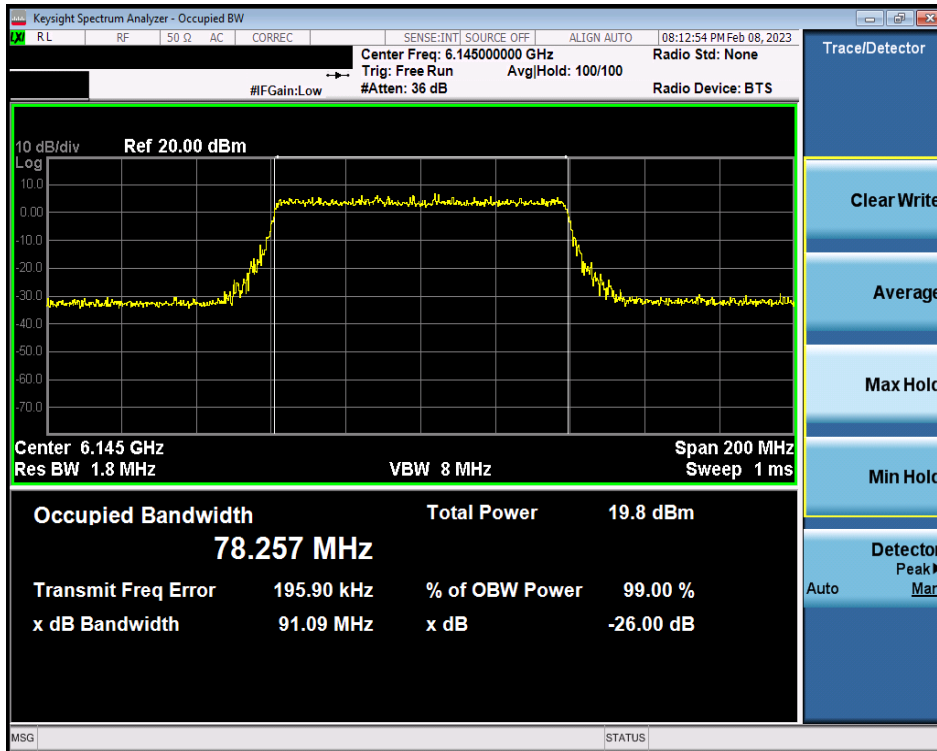


Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

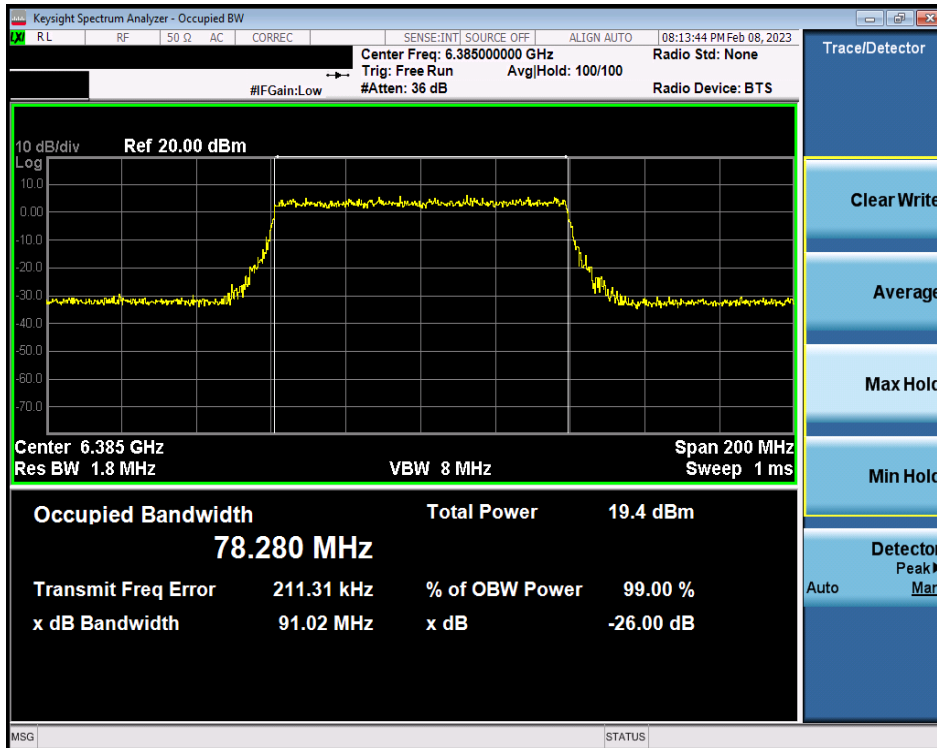


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 87)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 22 of 237

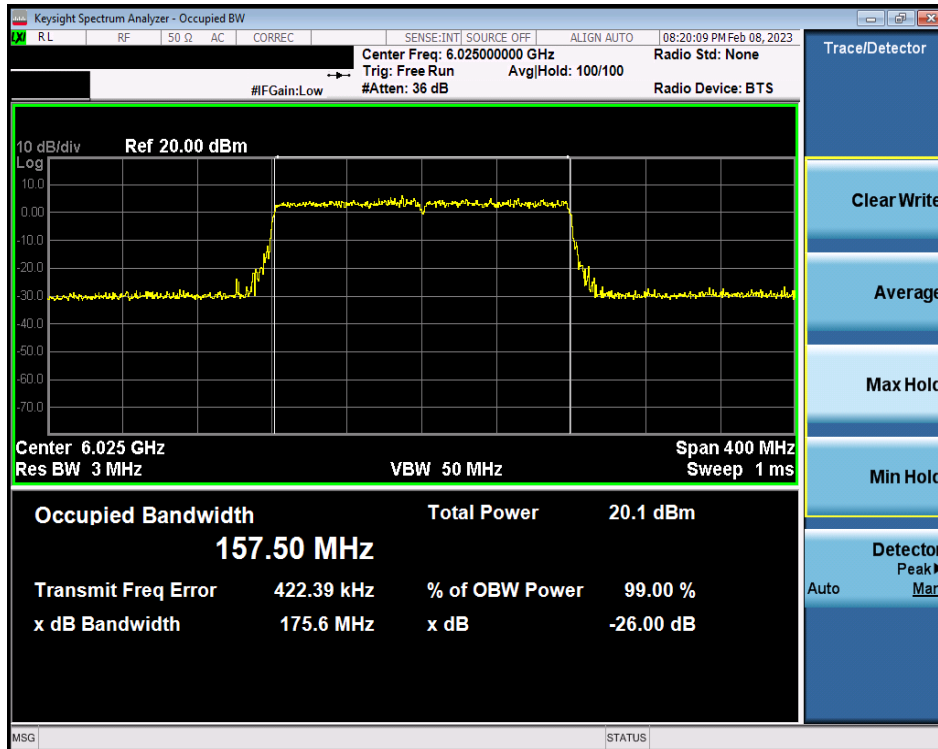


Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 15)

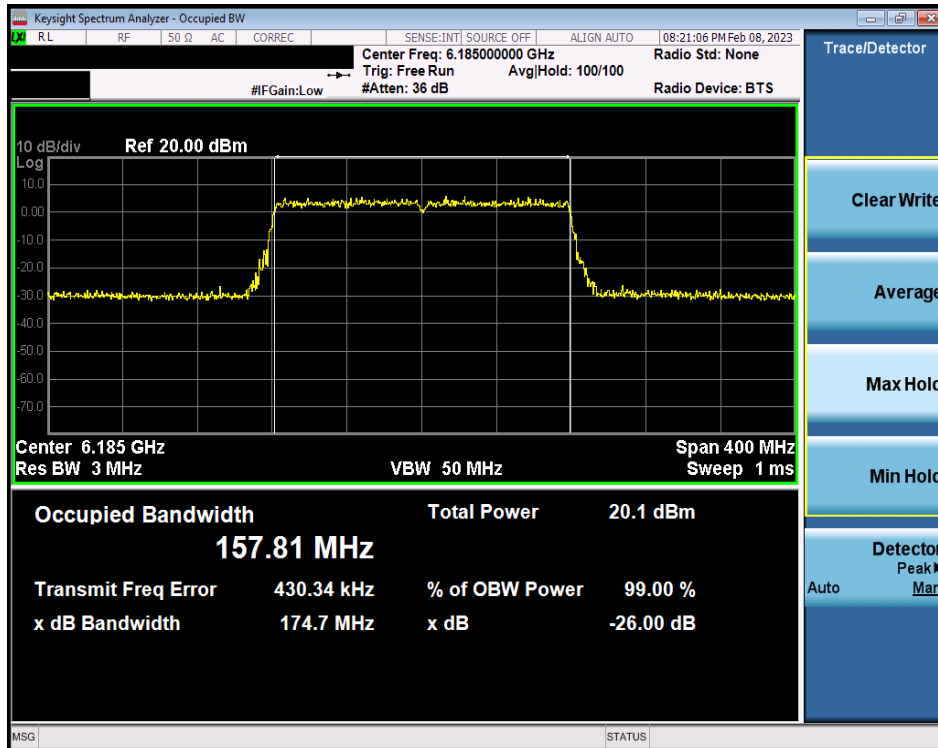

Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 23 of 237

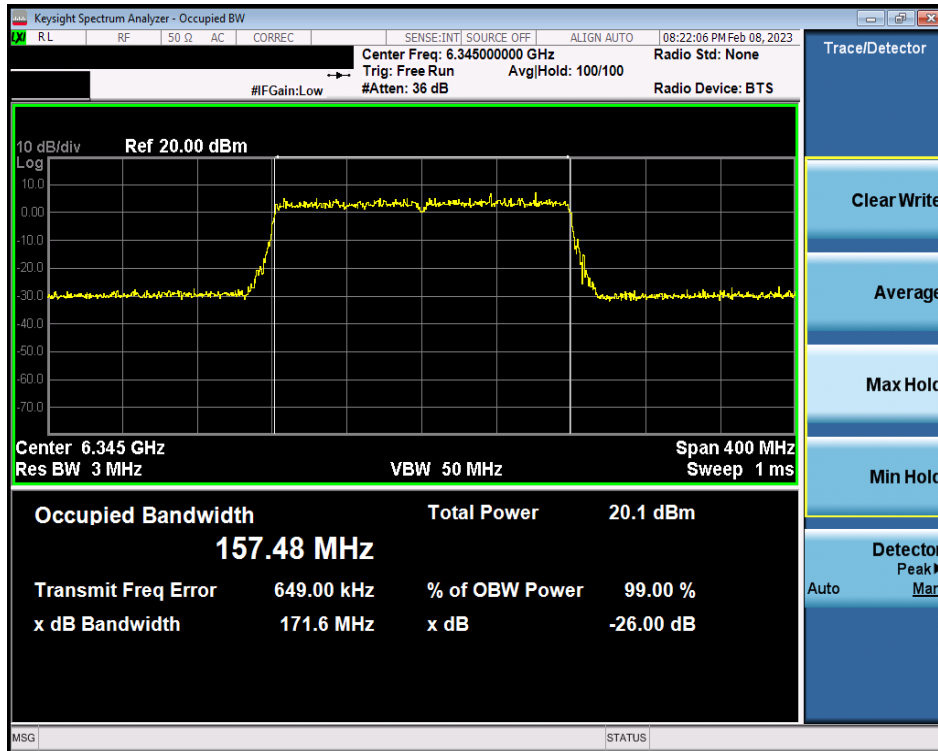


Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 79)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 24 of 237

7.2.2 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 6)

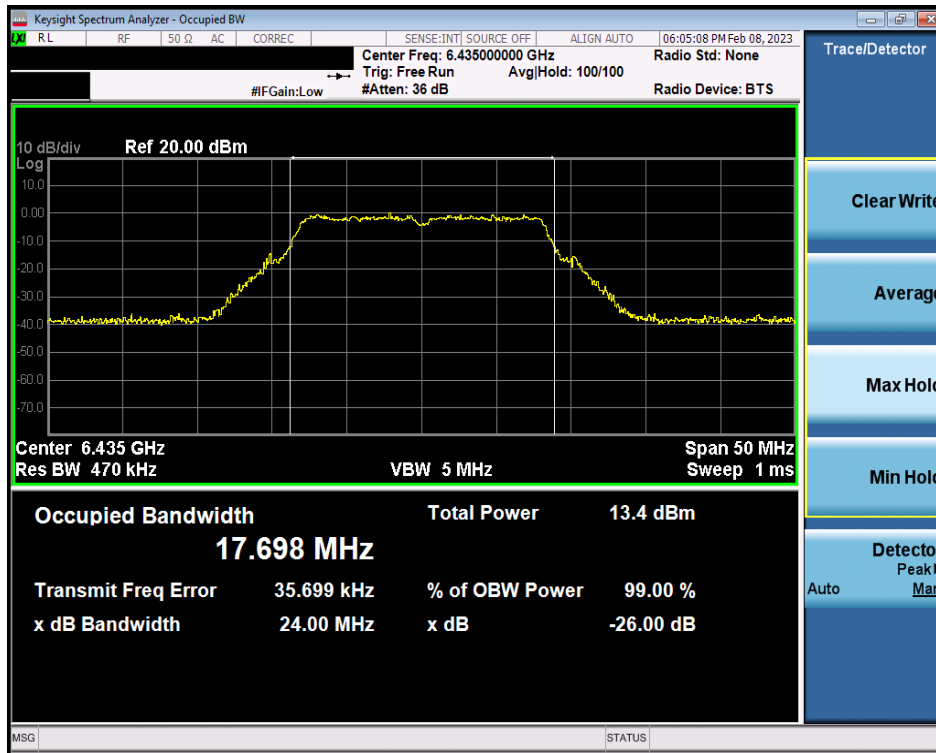


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 97)

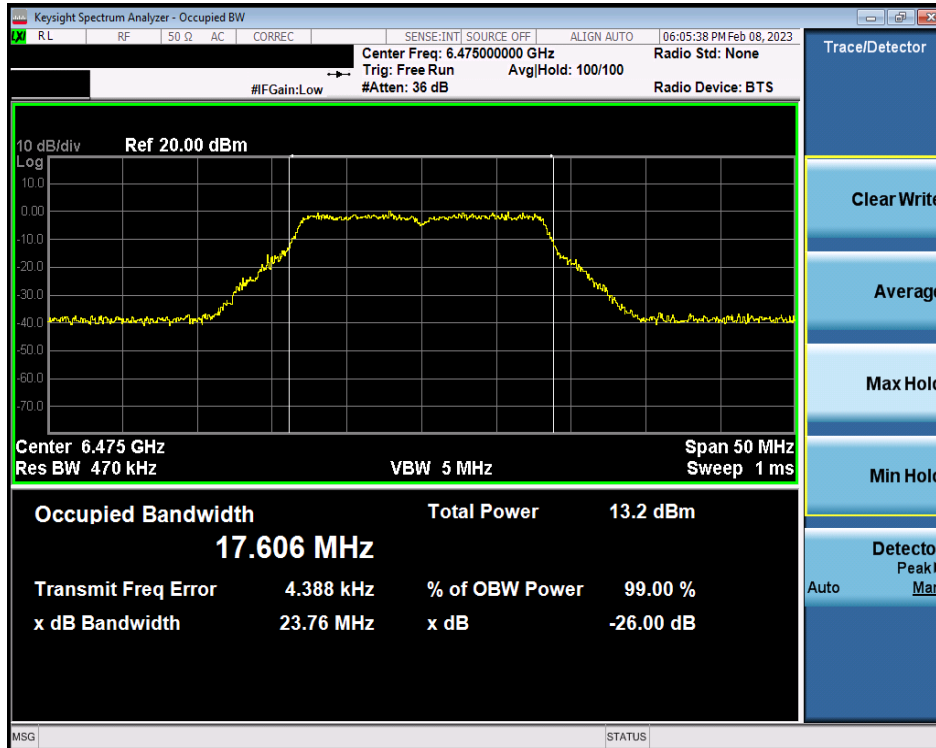


Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 105)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 25 of 237

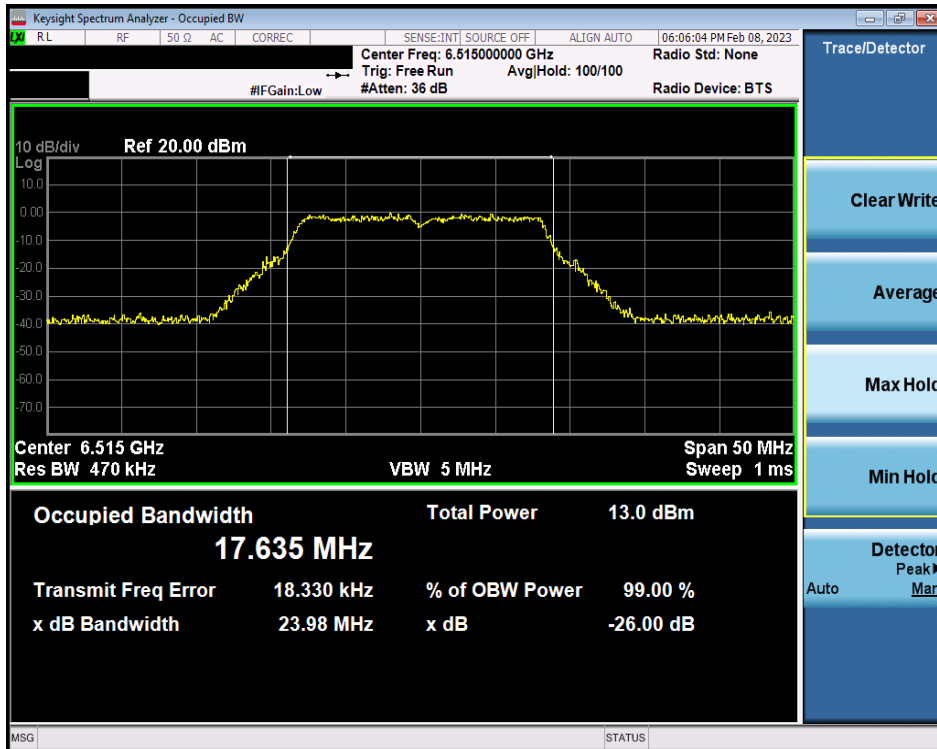


Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 6) – Ch. 113)

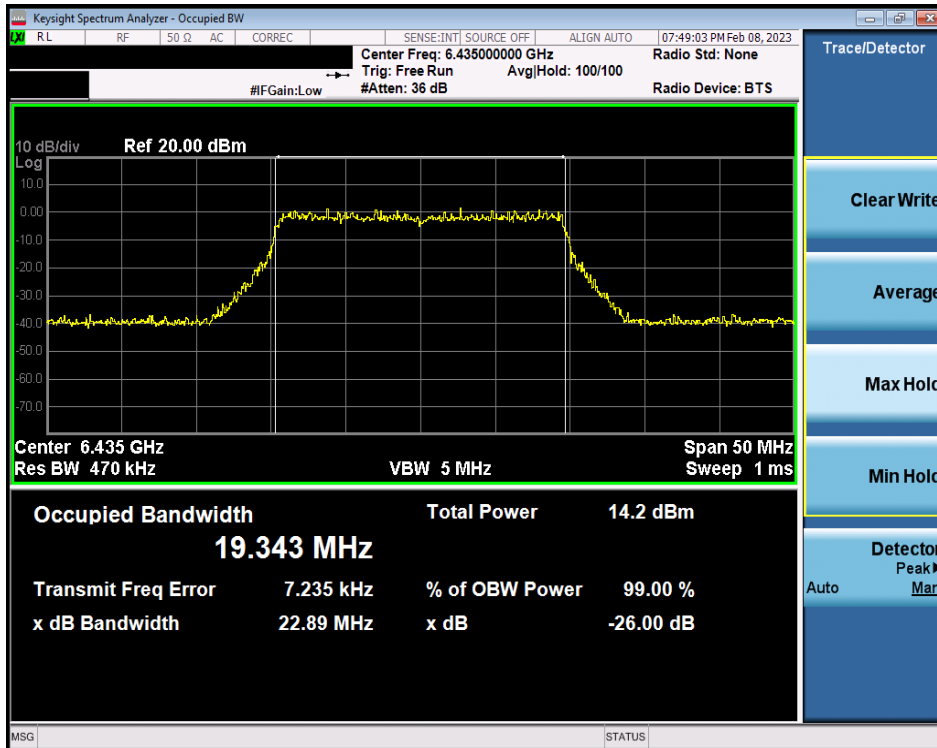


Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 6) – Ch. 97)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 26 of 237

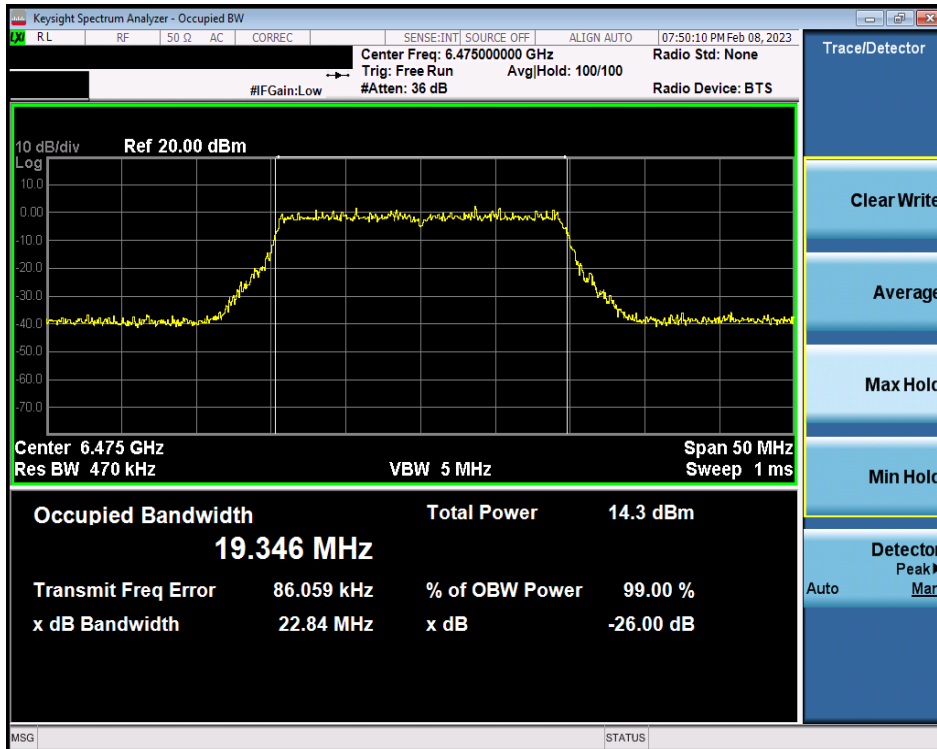


Plot 7-20. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 6) – Ch. 105)

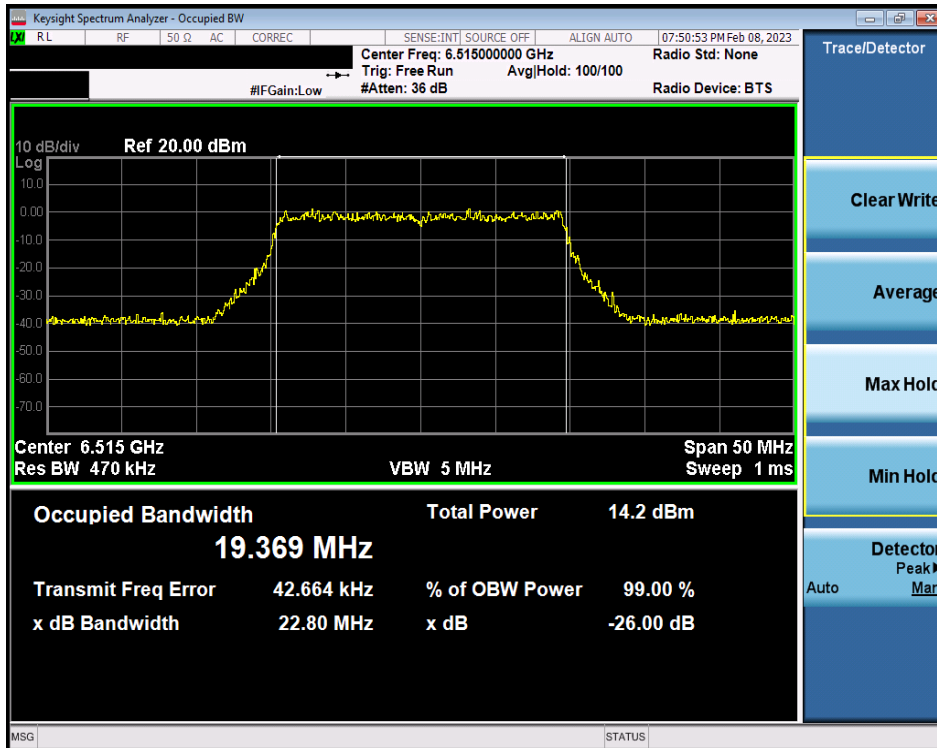


Plot 7-21. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 6) – Ch. 113)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 27 of 237

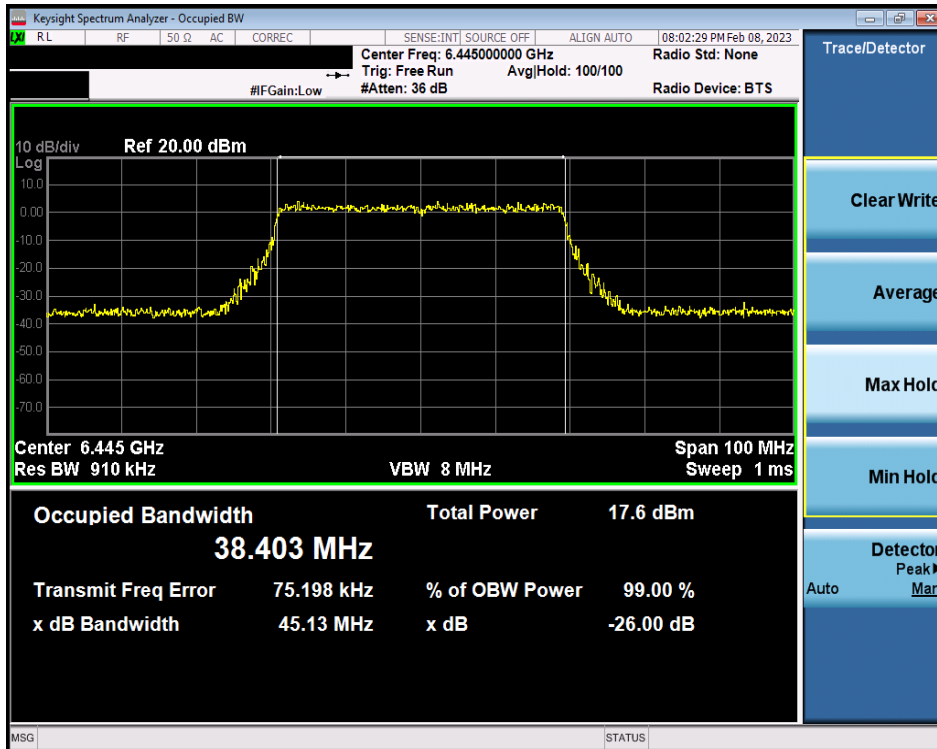


Plot 7-22. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 6) – Ch. 99)

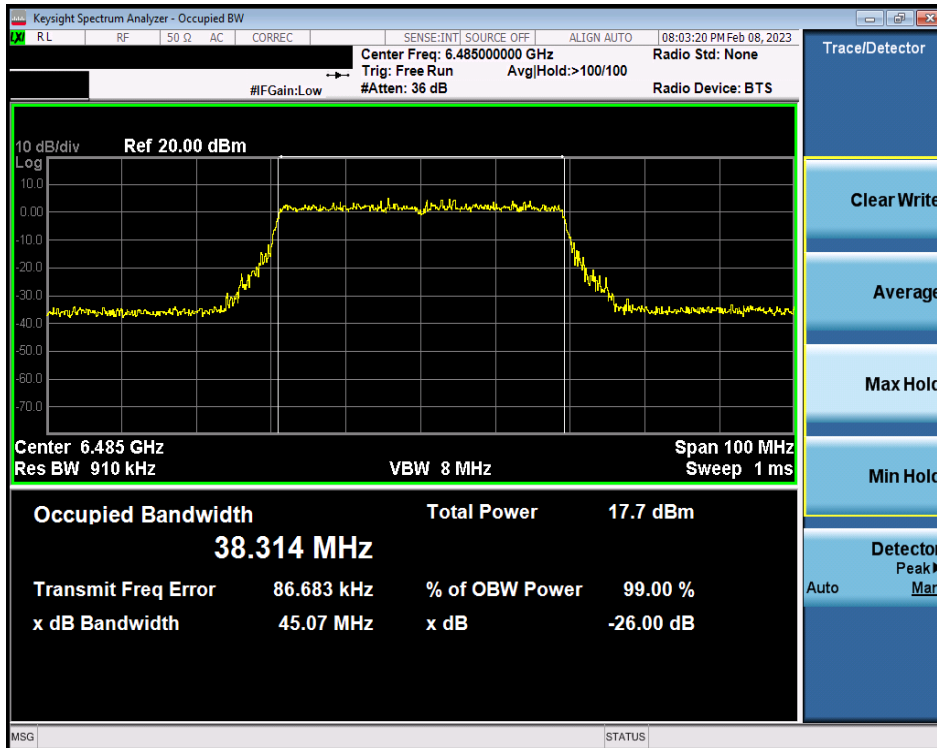


Plot 7-23. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 28 of 237

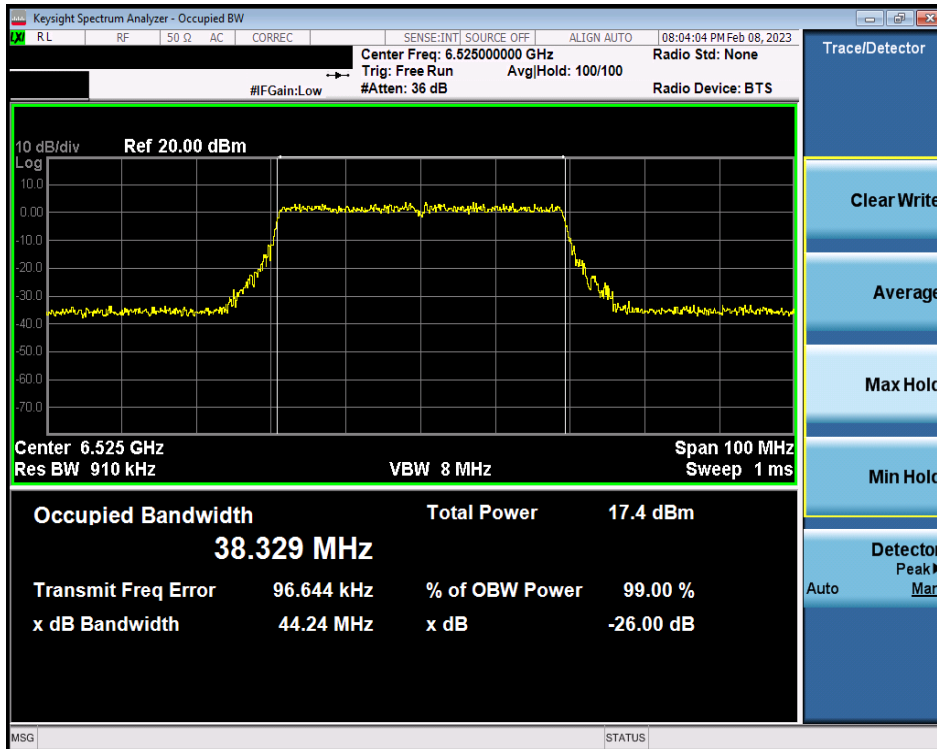


Plot 7-24. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 6) – Ch. 115)

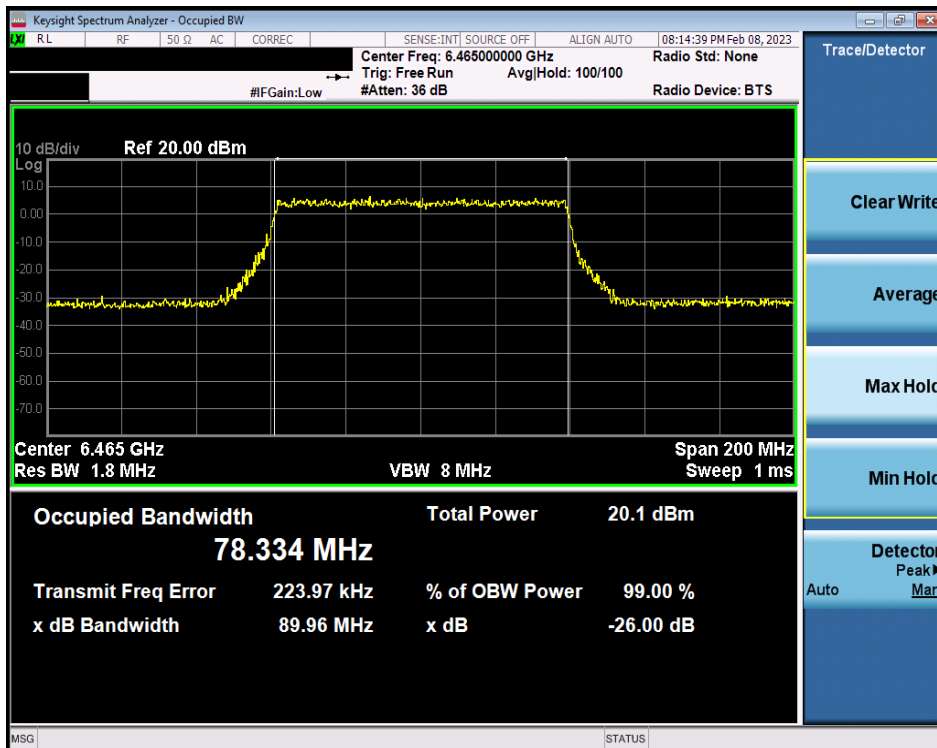

Plot 7-25. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 6) – Ch. 103)


FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 29 of 237

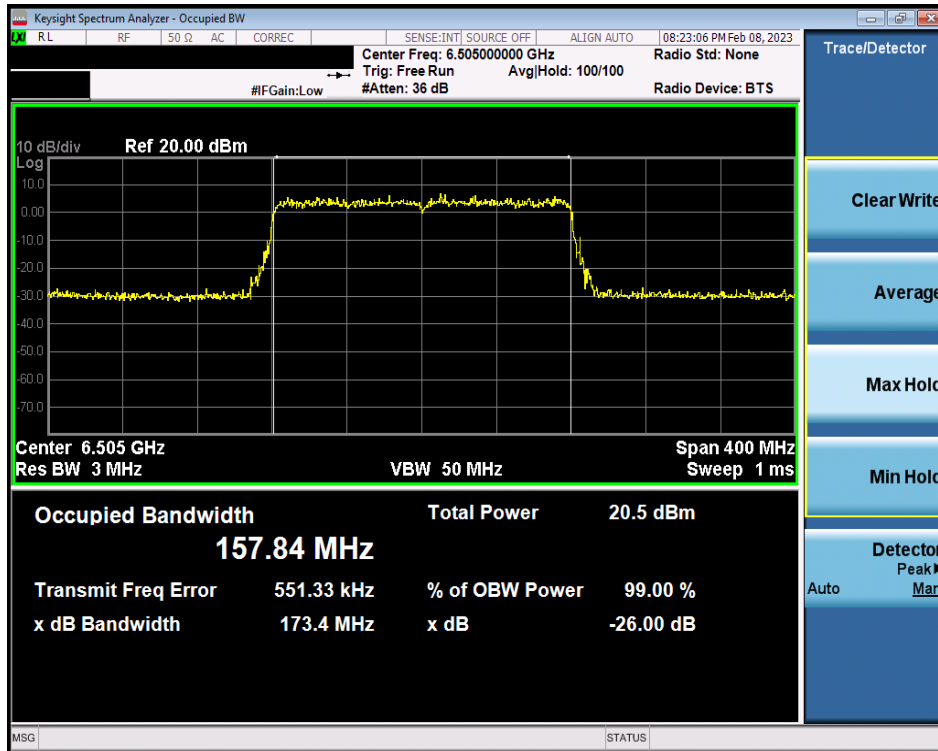


Plot 7-26. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 30 of 237

7.2.3 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 7)

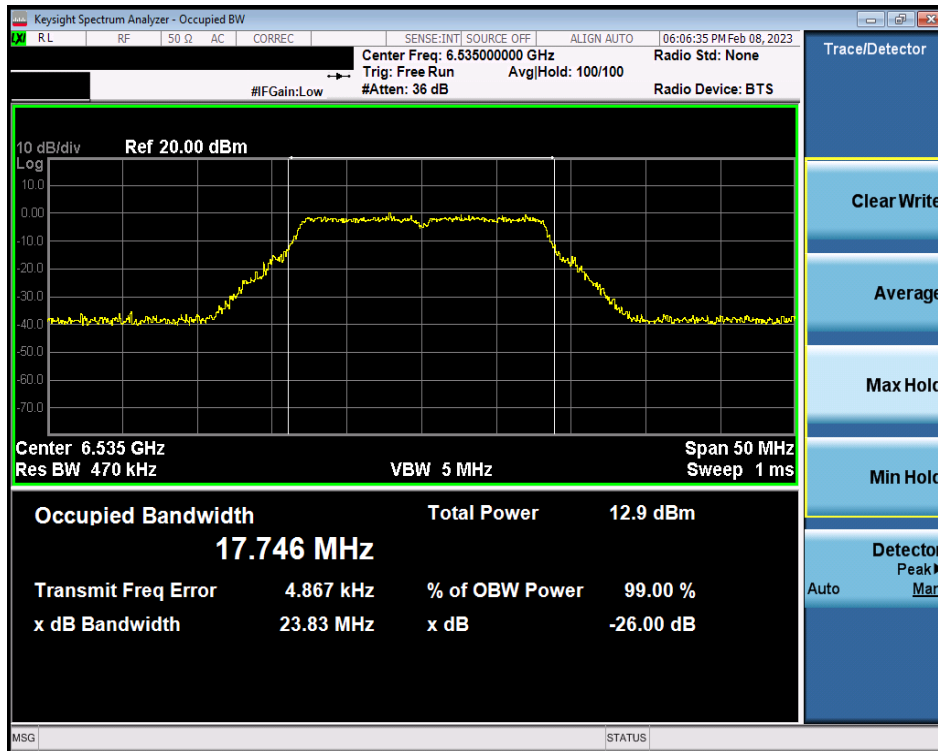


Plot 7-27. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 117)

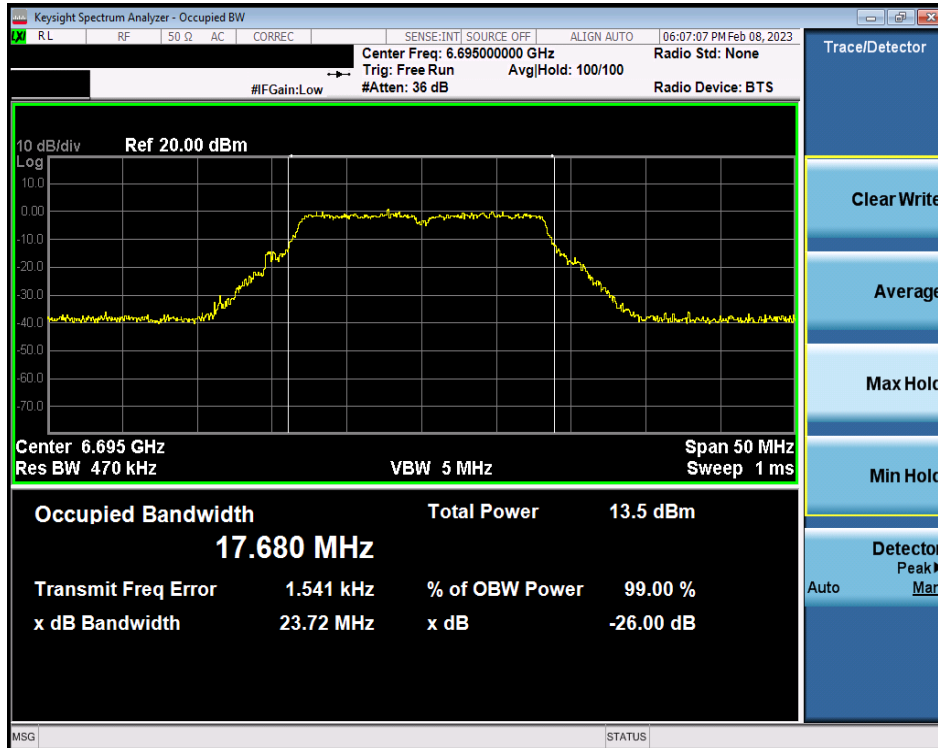


Plot 7-28. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 149)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 31 of 237

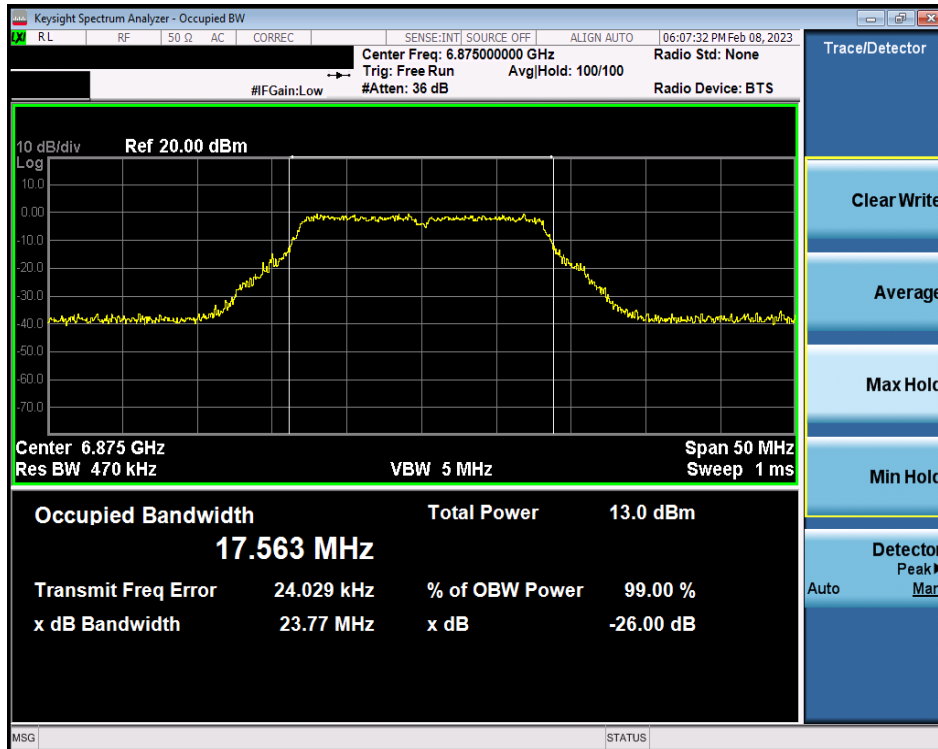


Plot 7-29. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 7) – Ch. 185)

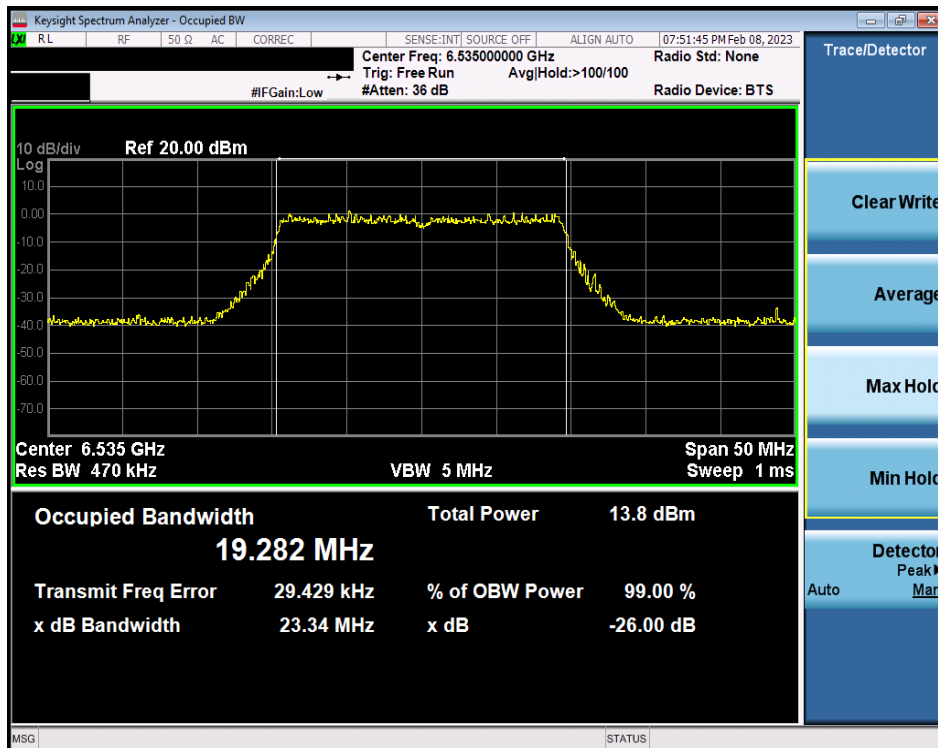


Plot 7-30. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 7) – Ch. 117)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 32 of 237

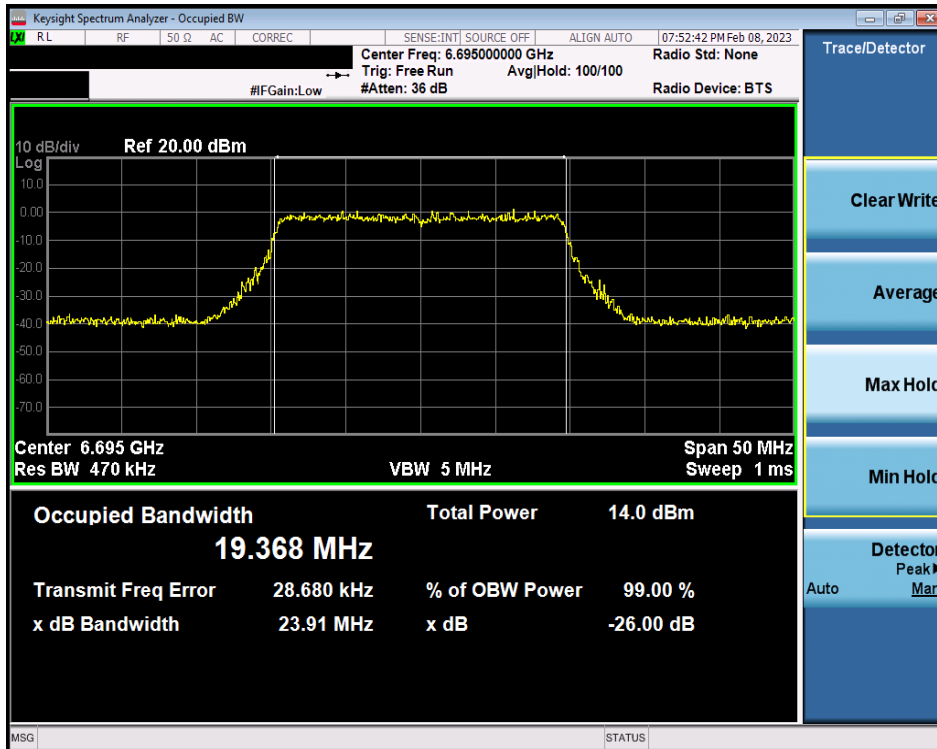


Plot 7-31. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 7) – Ch. 149)

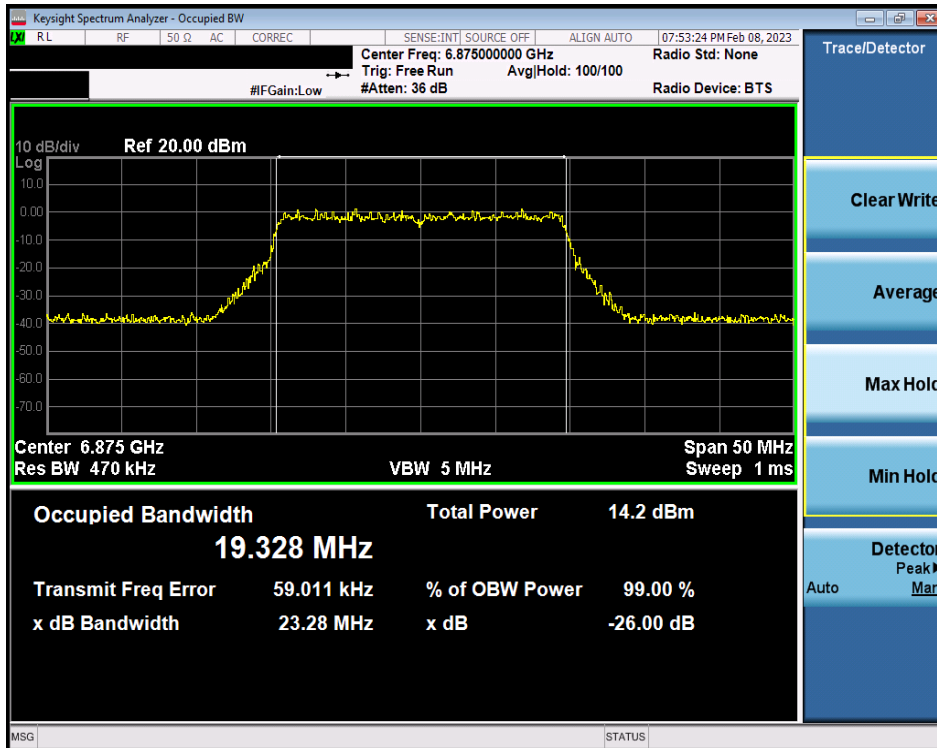


Plot 7-32. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 7) – Ch. 185)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 33 of 237

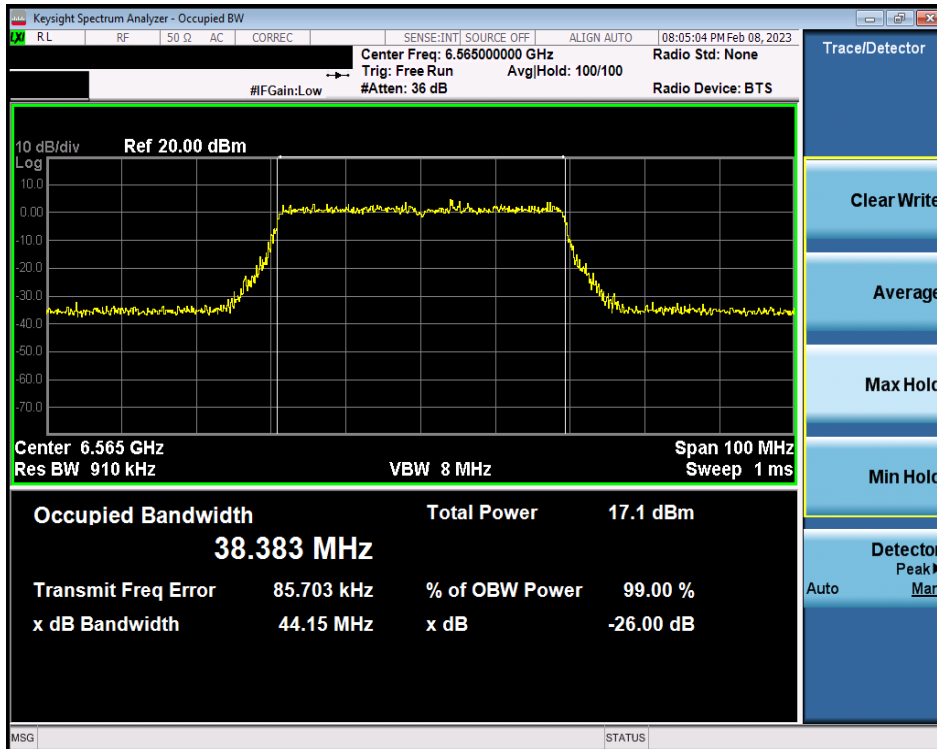


Plot 7-33. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 123)

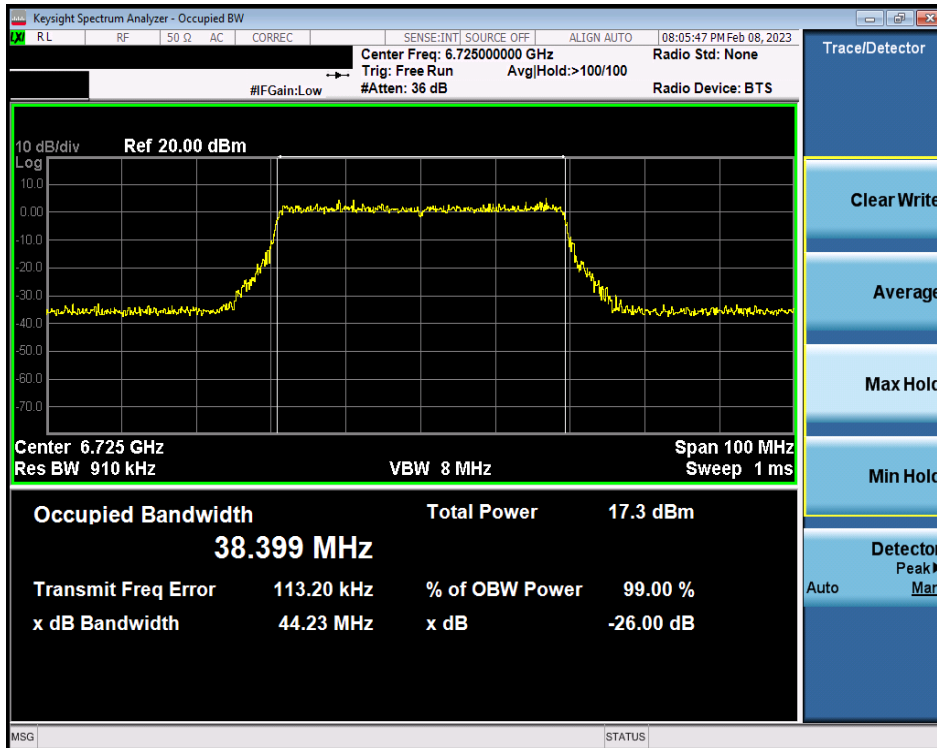


Plot 7-34. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 34 of 237

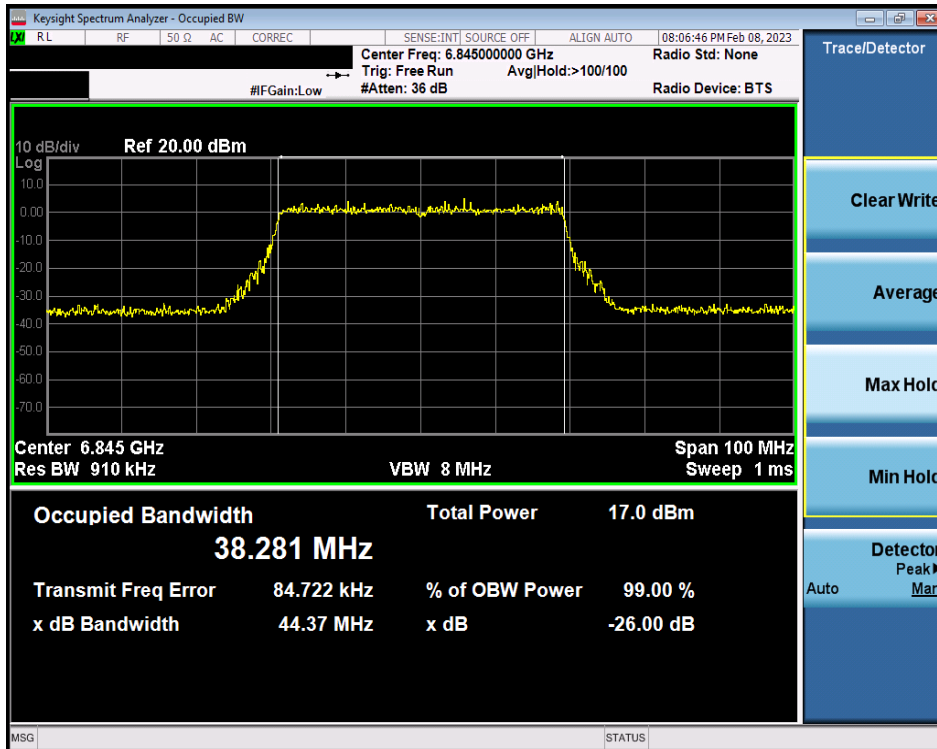


Plot 7-35. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 7) – Ch. 179)

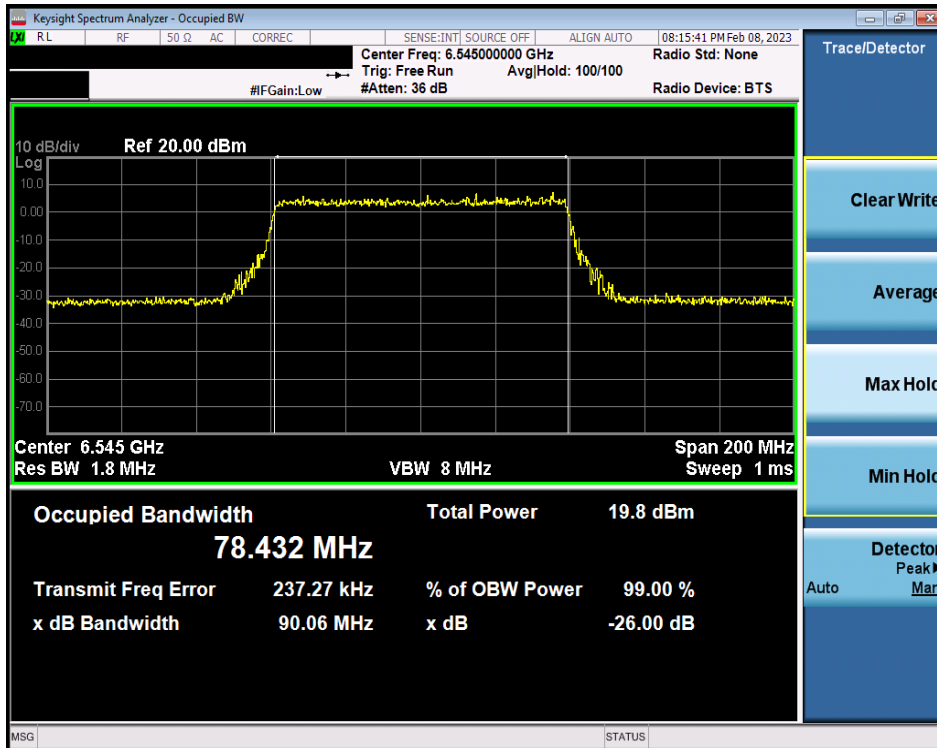


Plot 7-36. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 7) – Ch. 119)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 35 of 237

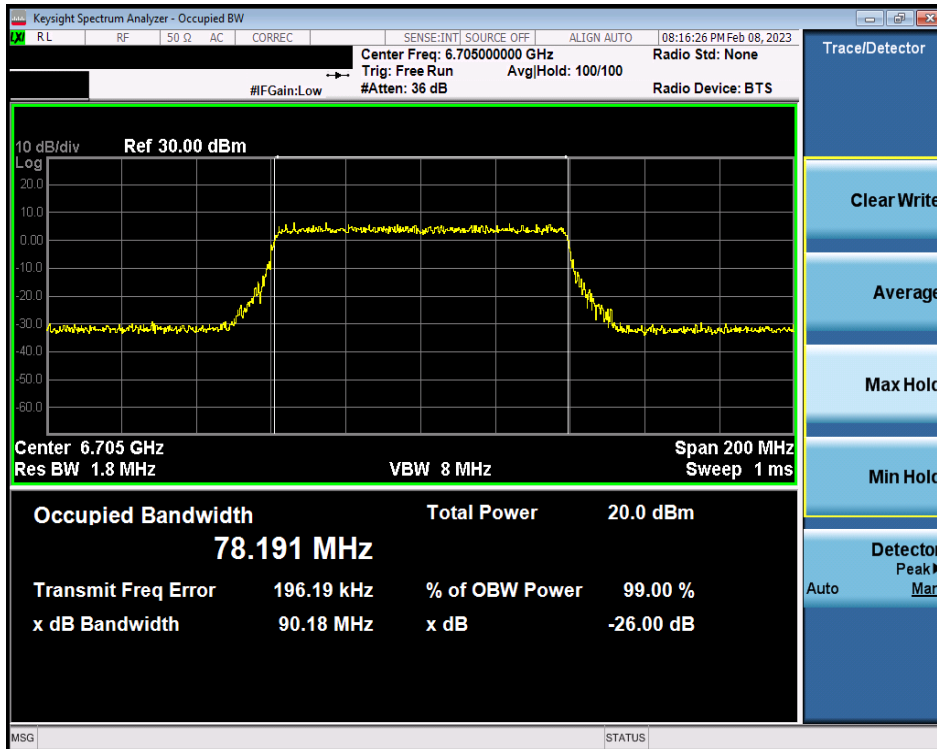


Plot 7-37. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

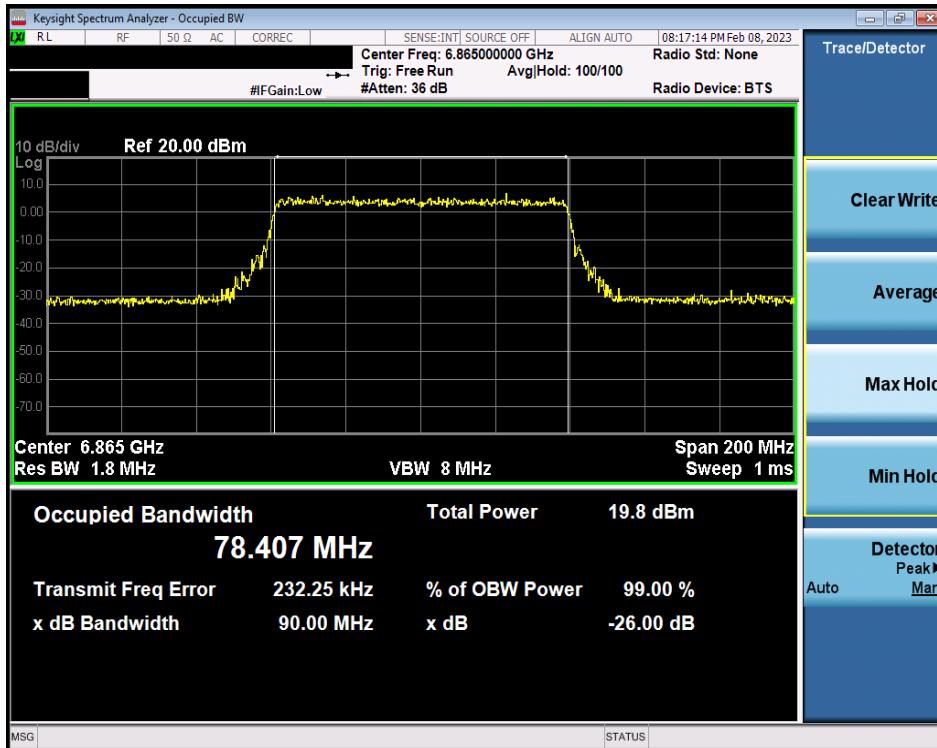


Plot 7-38. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 7) – Ch. 183)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 36 of 237

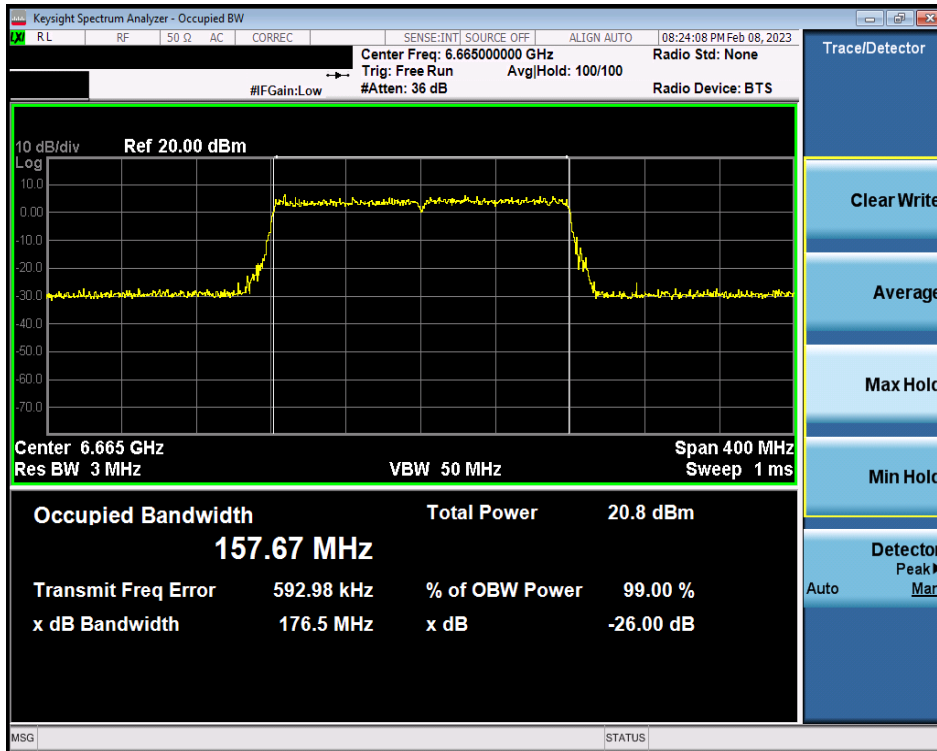


Plot 7-39. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

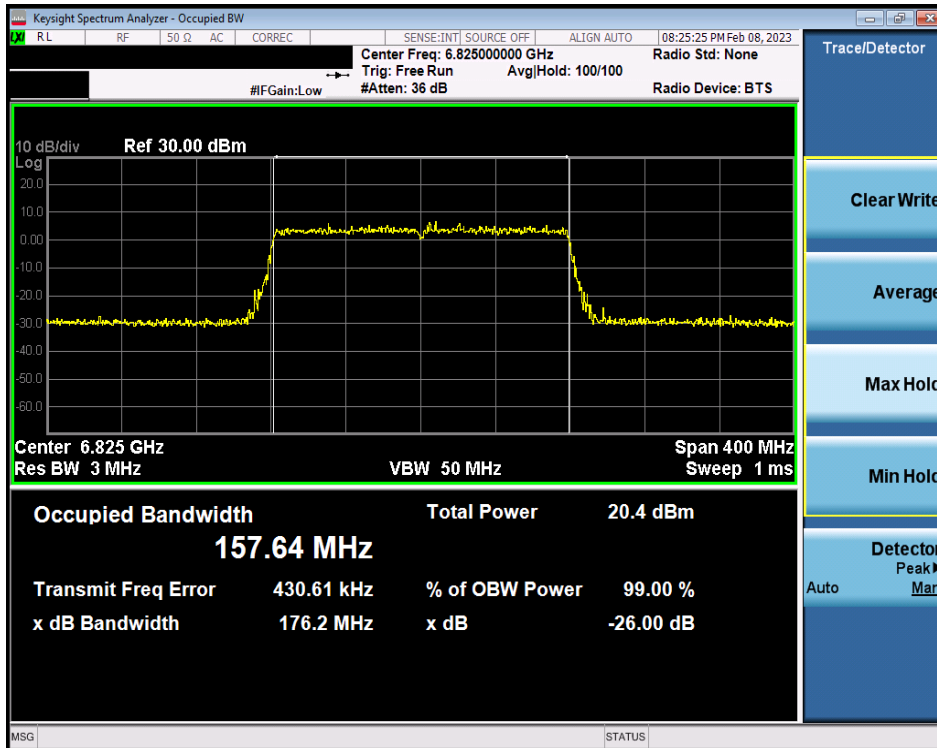


Plot 7-40. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 7) – Ch. 175)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 37 of 237

7.2.4 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 8)

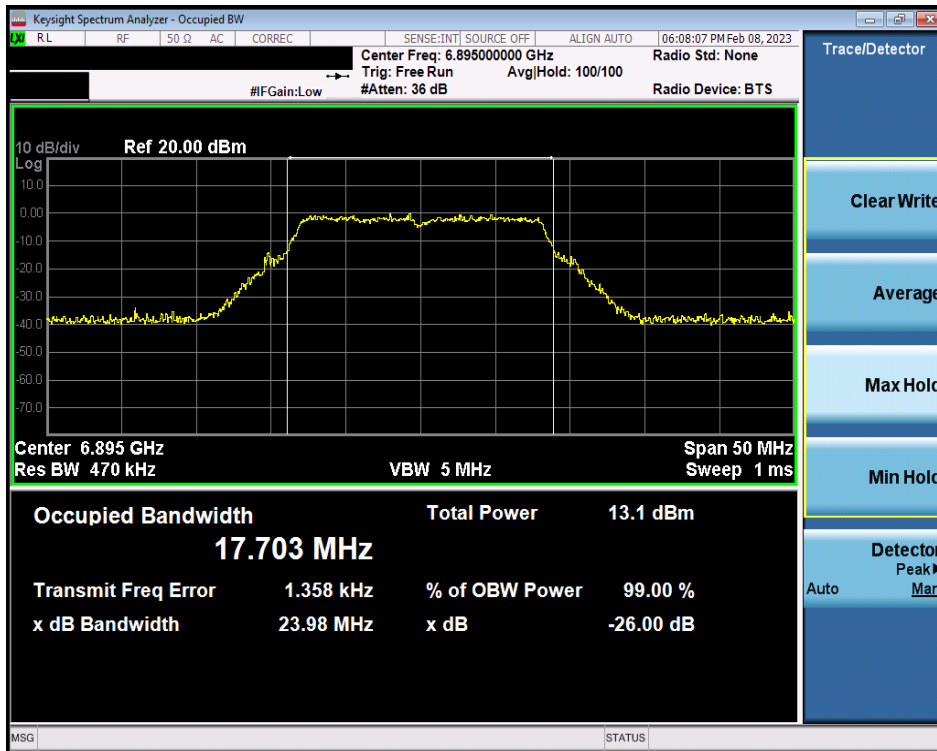


Plot 7-41. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 189)

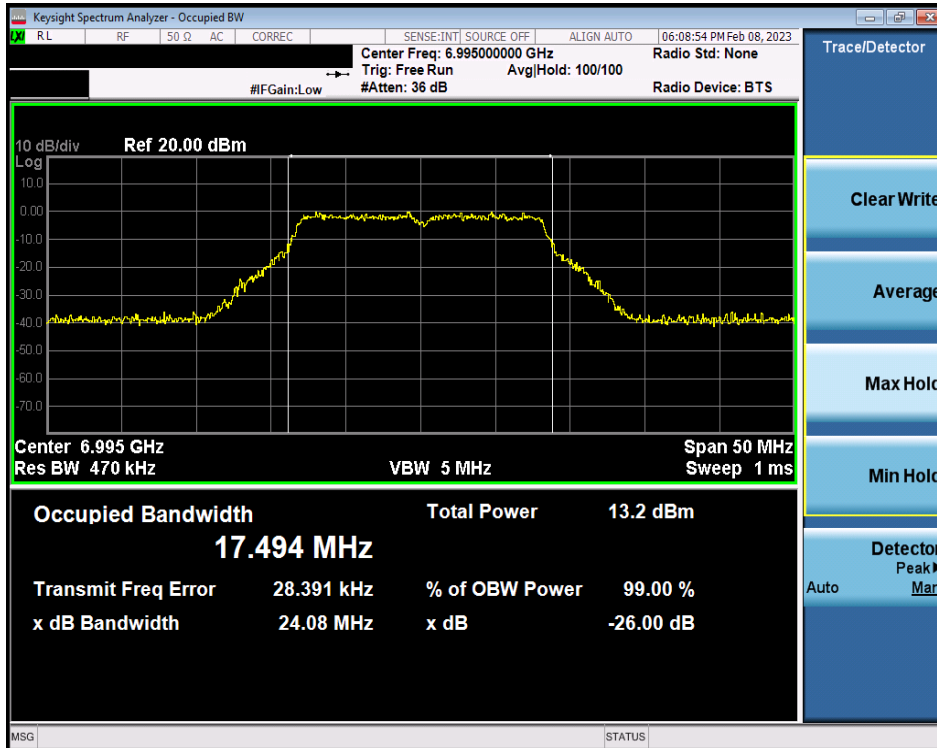


Plot 7-42. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 209)

FCC ID: PY7-84558E		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 38 of 237	

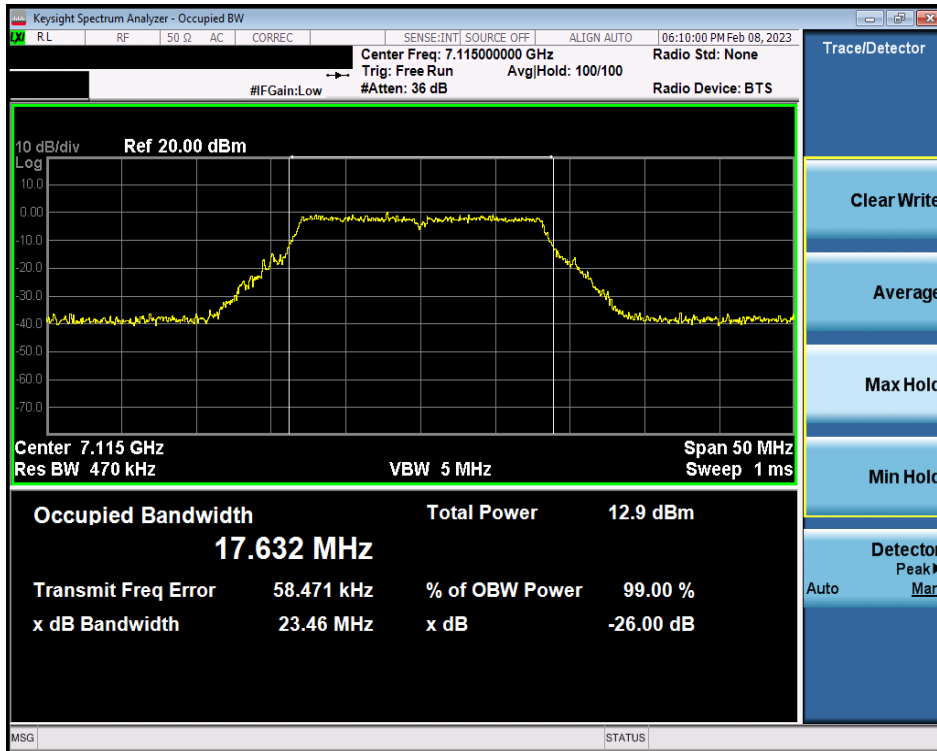


Plot 7-43. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 8) – Ch. 233)

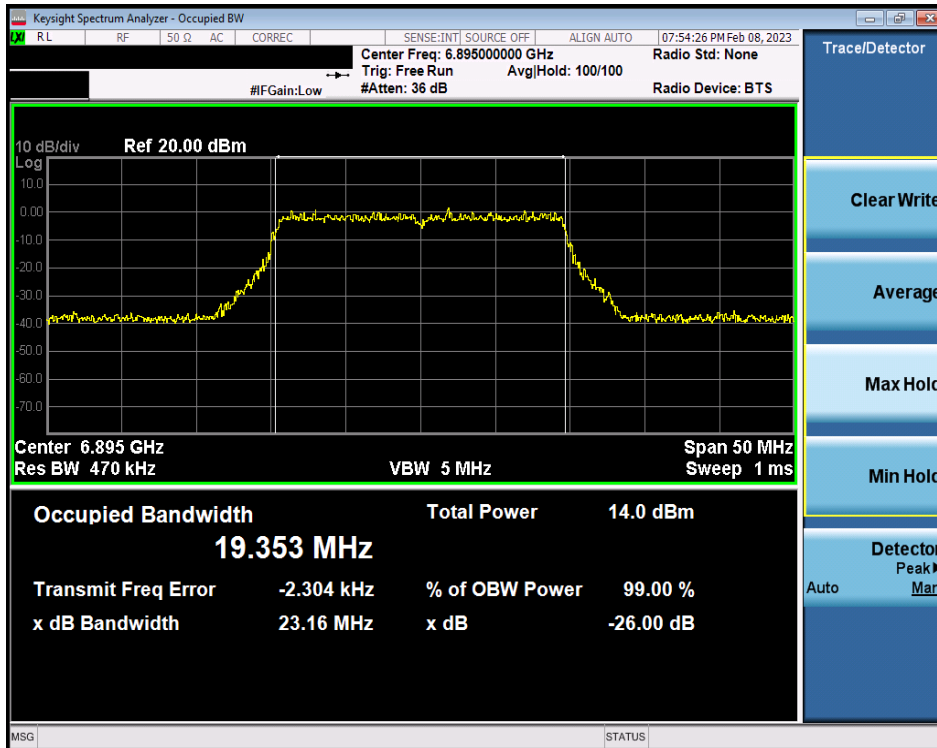


Plot 7-44. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 8) – Ch. 189)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 39 of 237

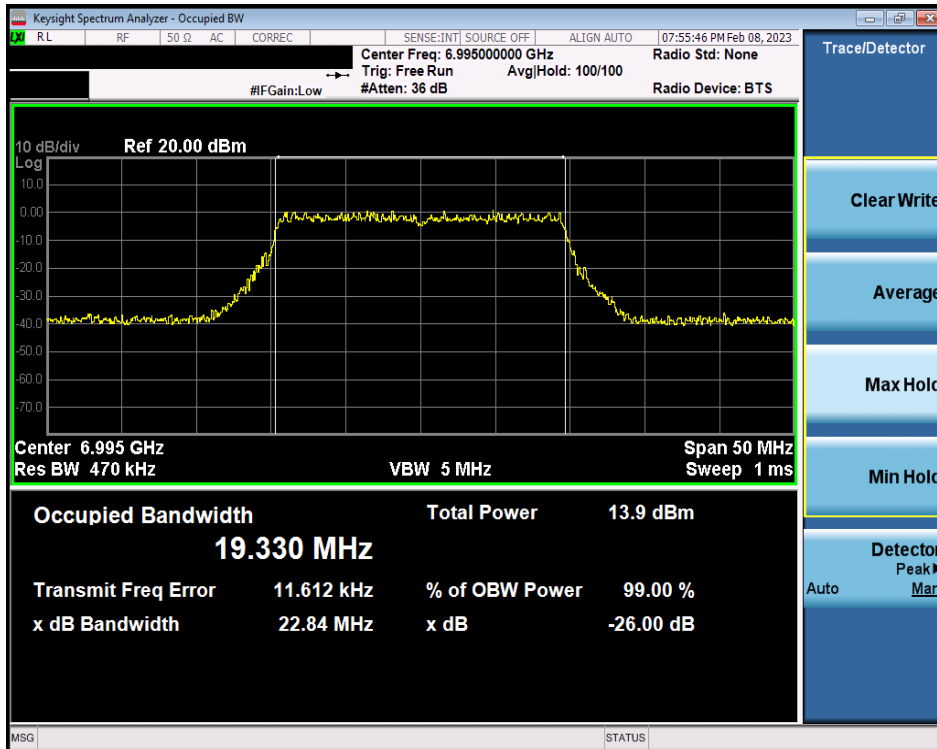


Plot 7-45. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 8) – Ch. 209)

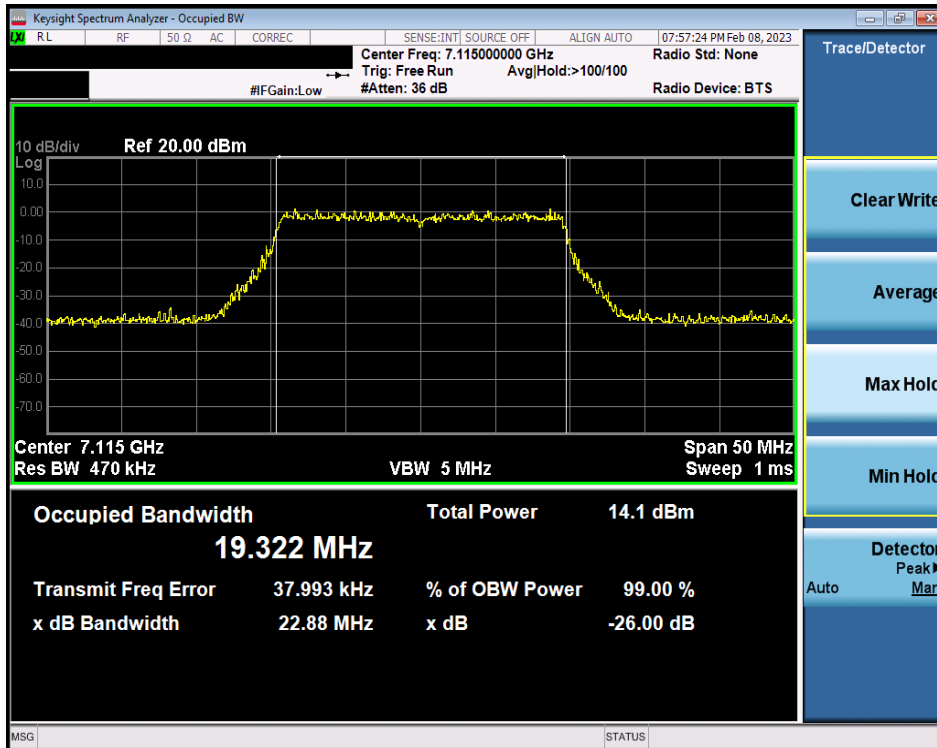


Plot 7-46. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 8) – Ch. 233)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 40 of 237

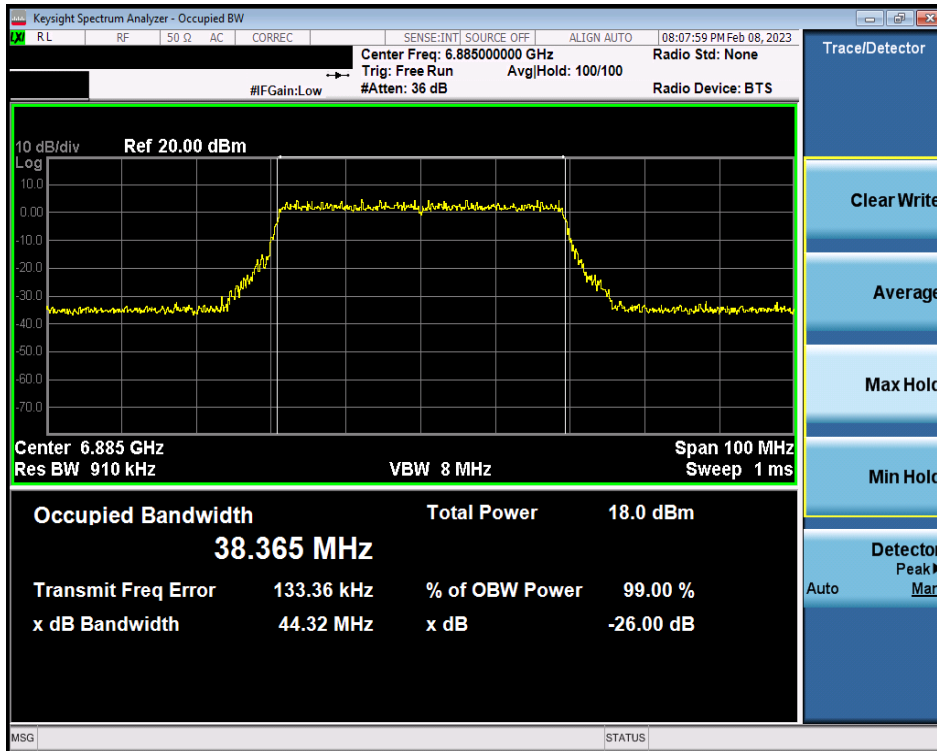


Plot 7-47. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 8) – Ch. 187)

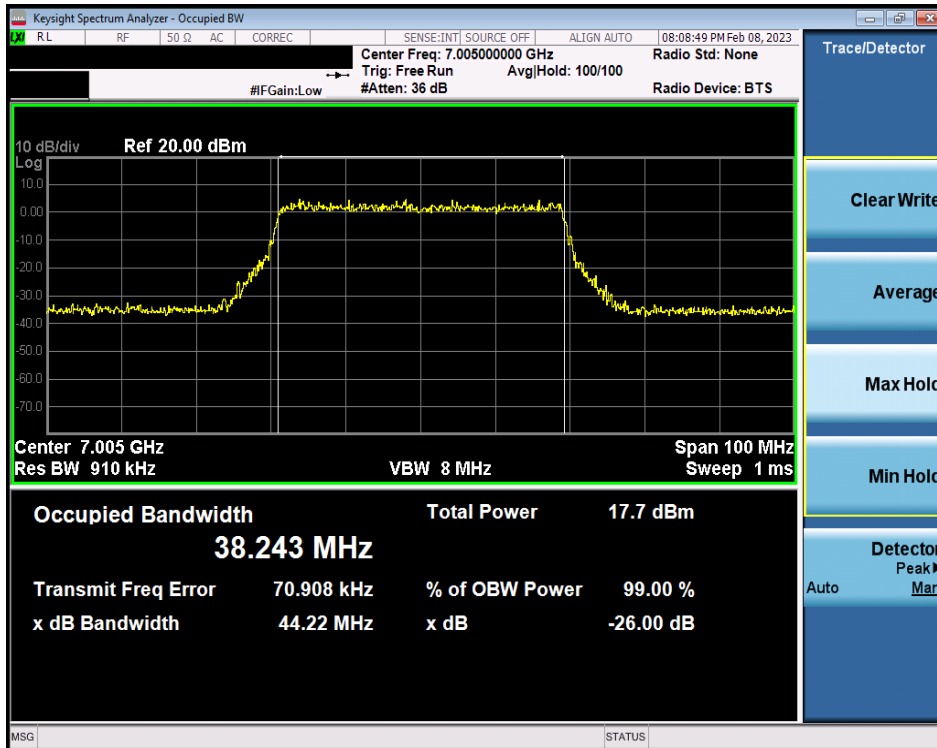


Plot 7-48. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 41 of 237

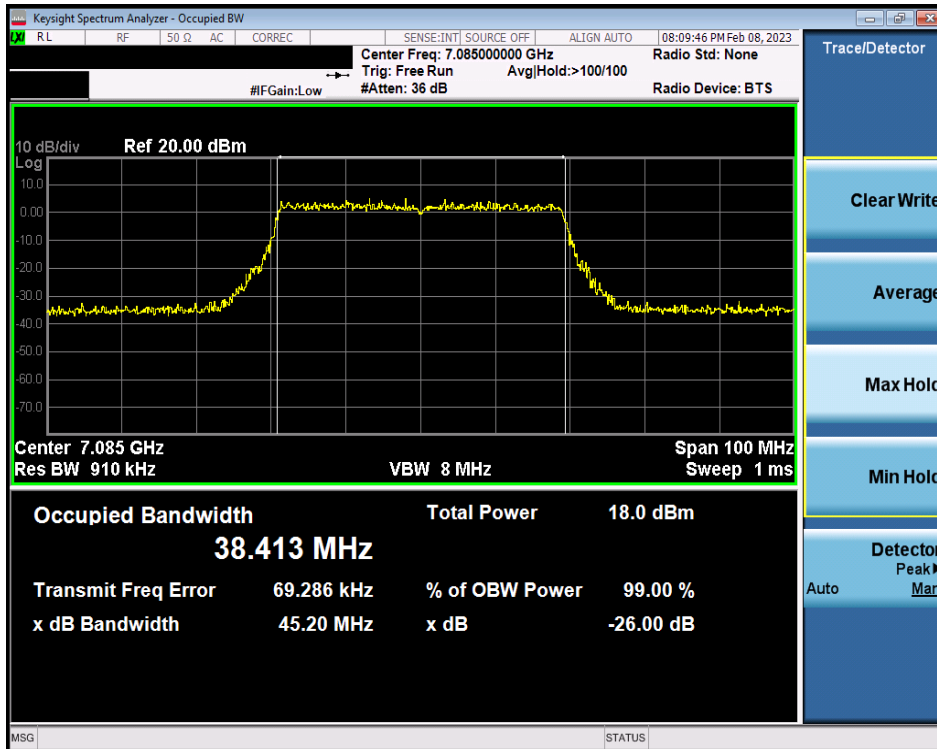


Plot 7-49. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 8) – Ch. 227)

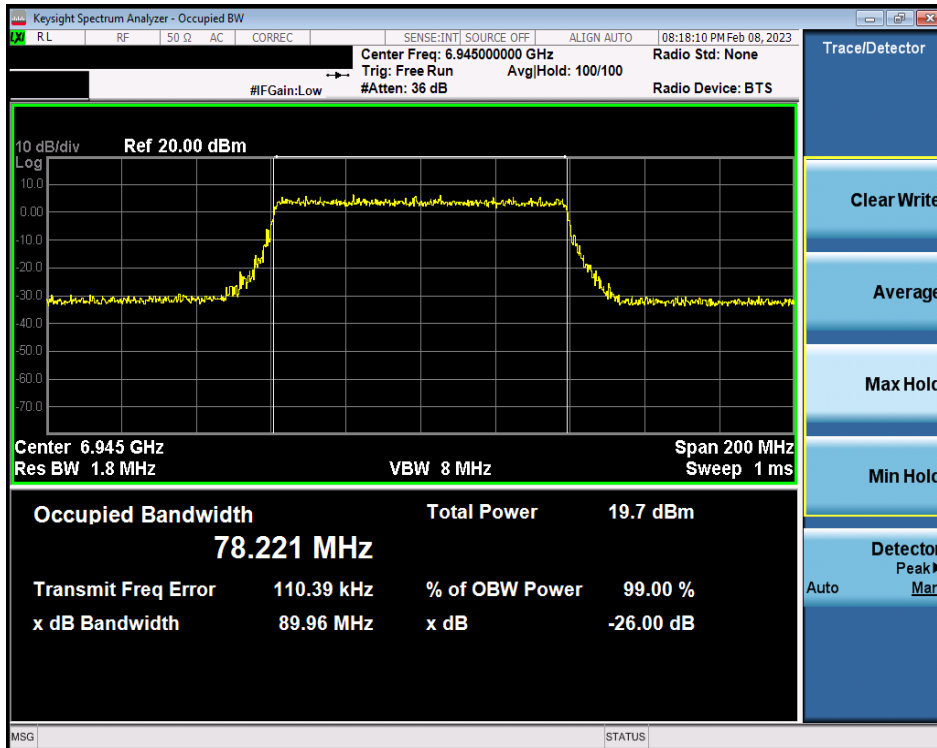


Plot 7-50. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 42 of 237

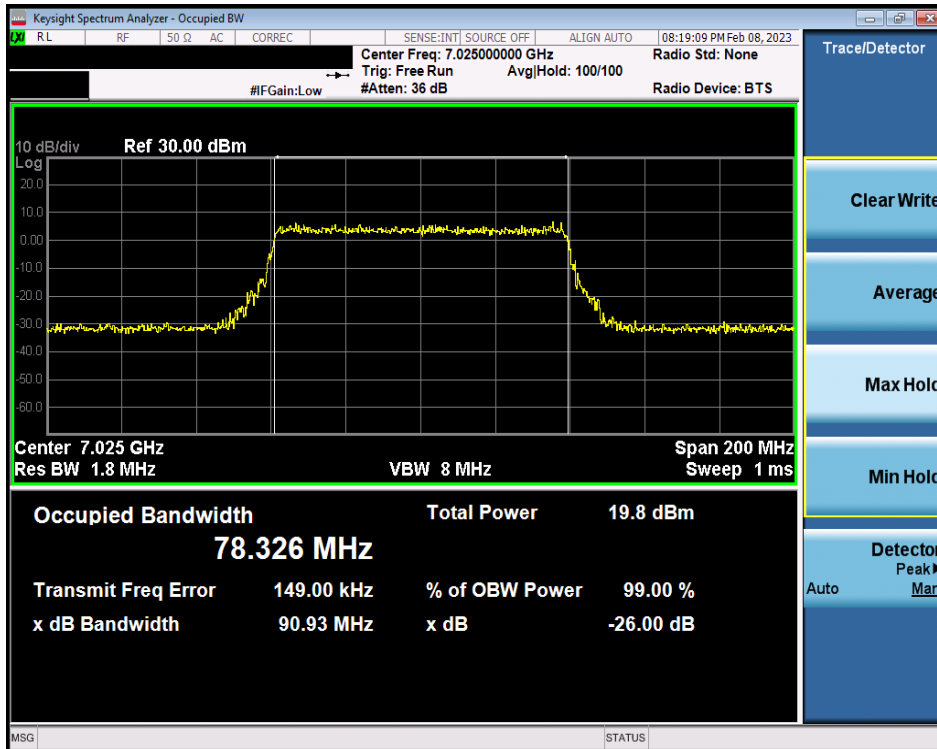


Plot 7-51. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 8) – Ch. 215)

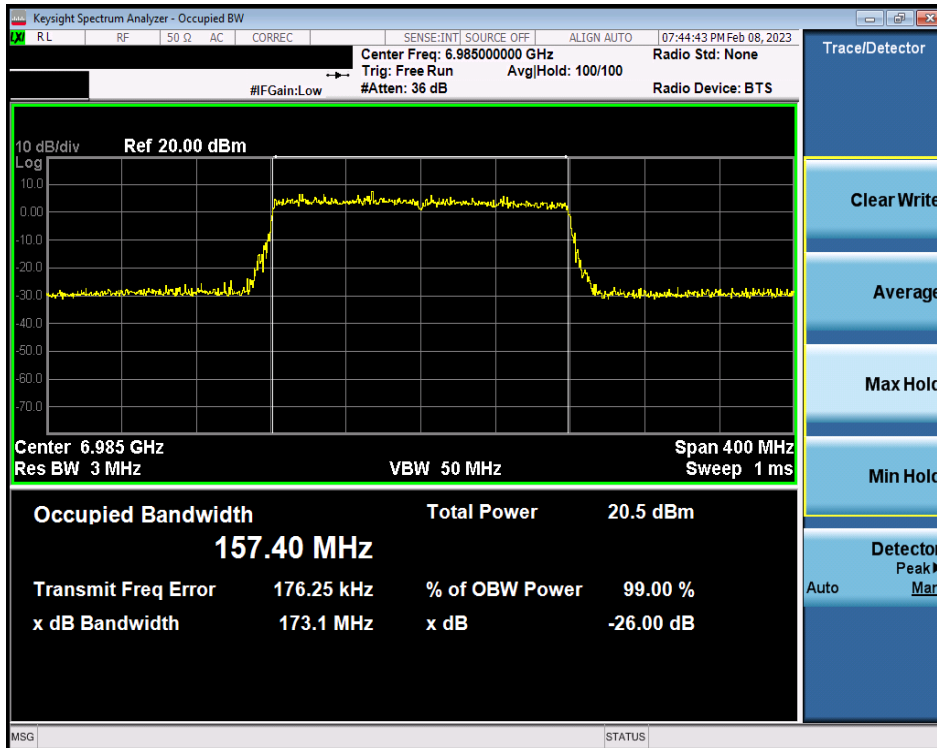


Plot 7-52. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 43 of 237

7.2.5 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 5)

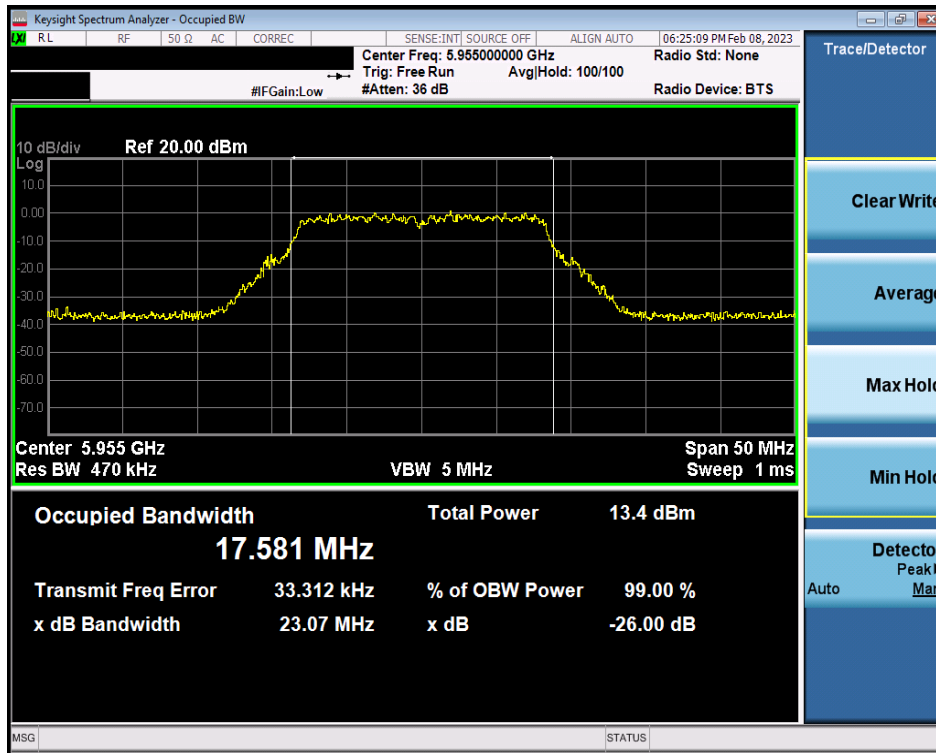


Plot 7-53. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 1)

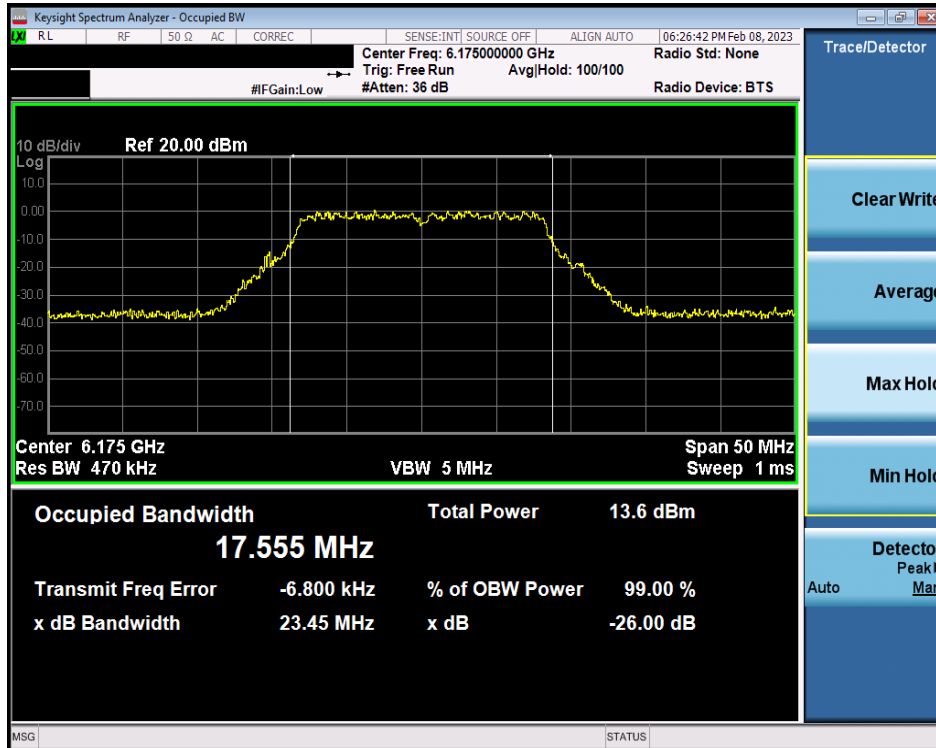


Plot 7-54. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 44 of 237

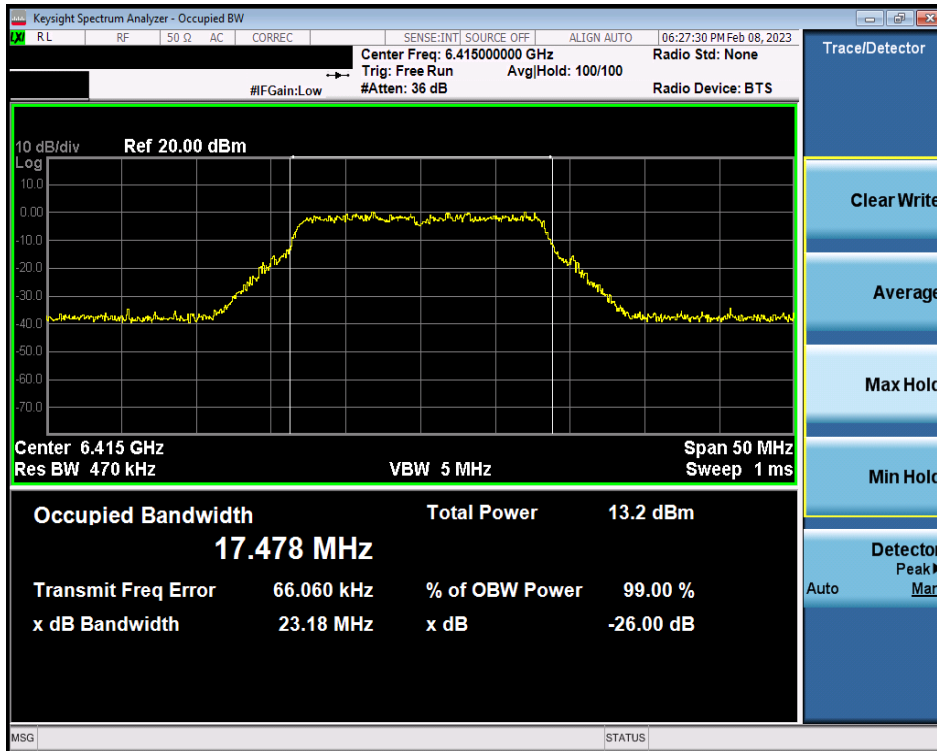


Plot 7-55. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 93)

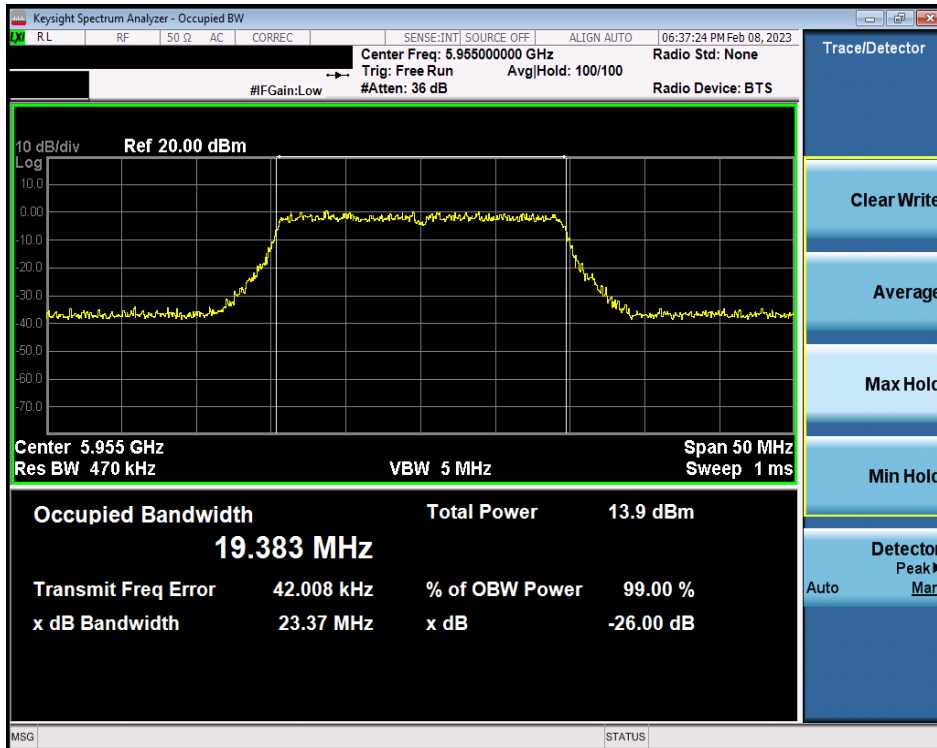


Plot 7-56. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 1)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 45 of 237

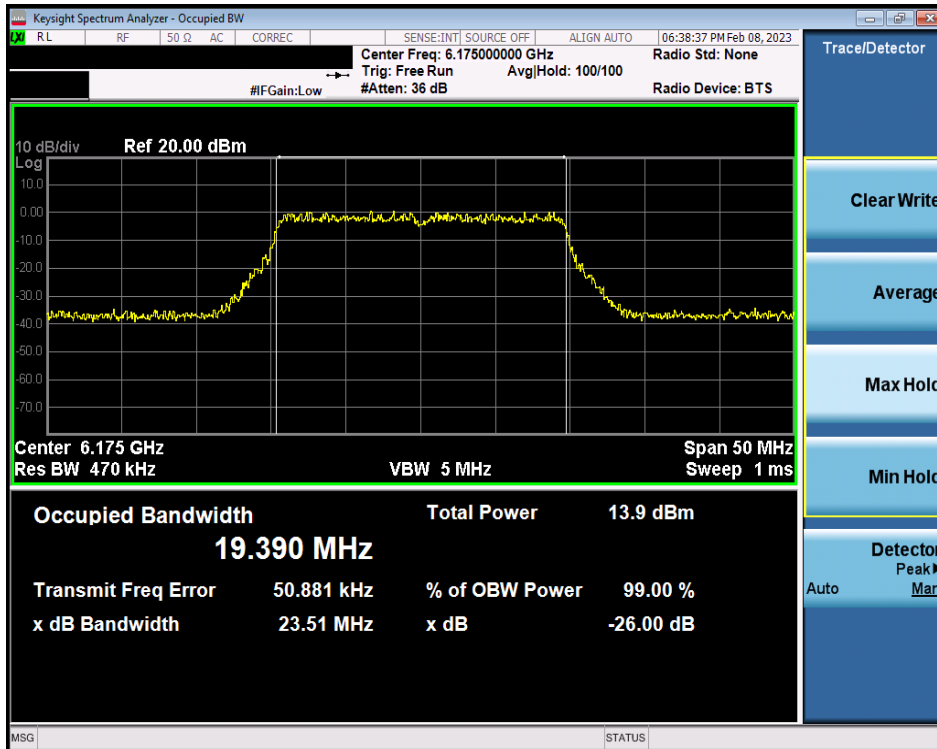


Plot 7-57. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45)

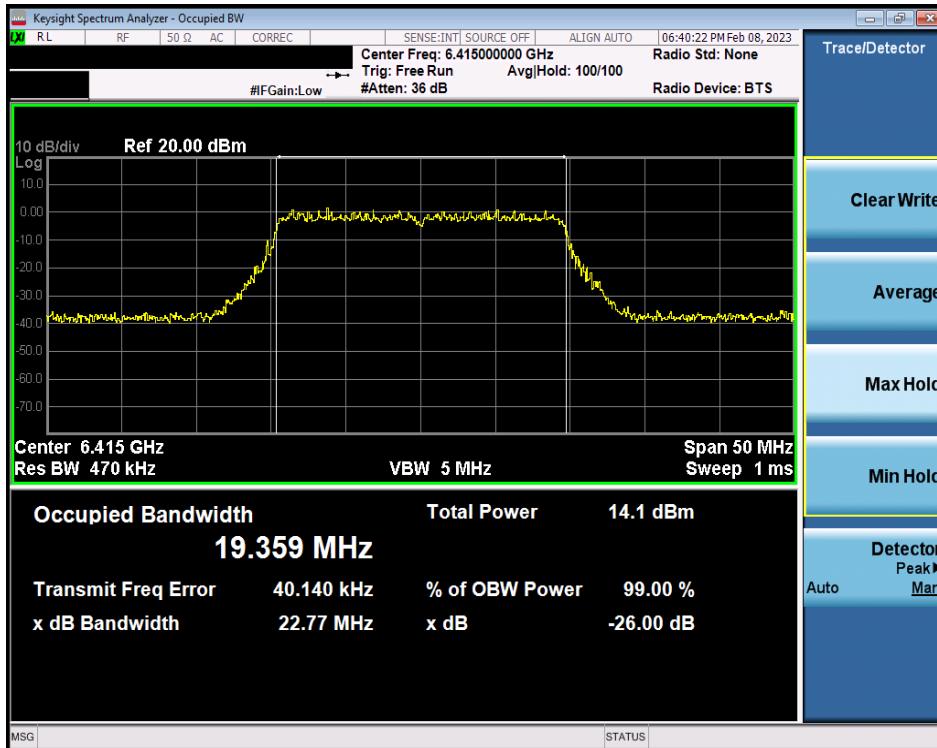


Plot 7-58. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 93)

FCC ID: PY7-84558E		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 46 of 237	

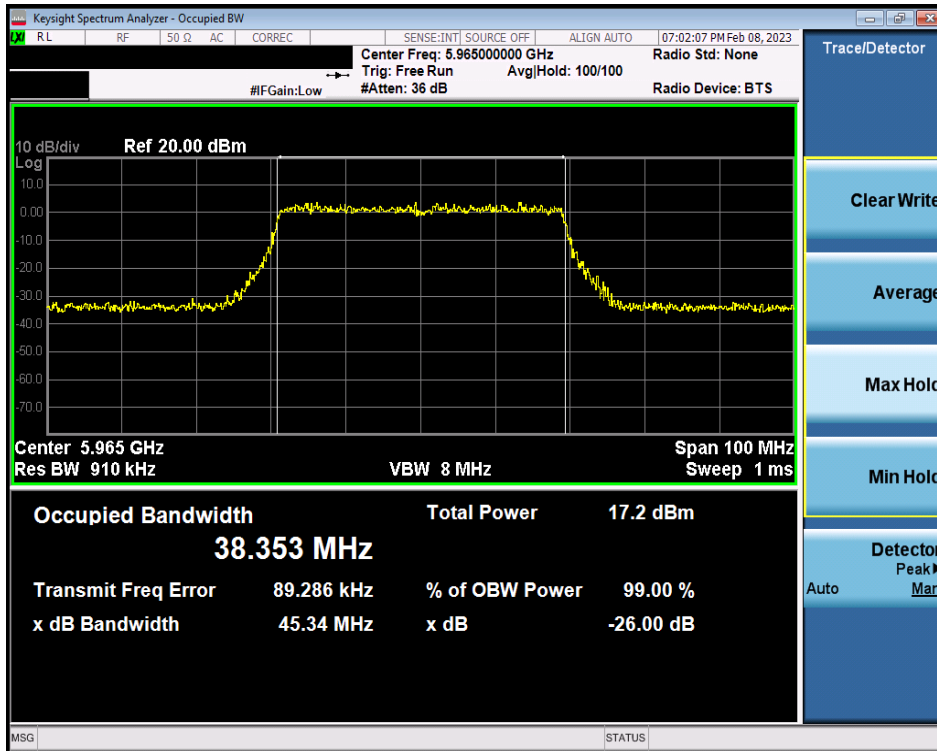


Plot 7-59. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 3)

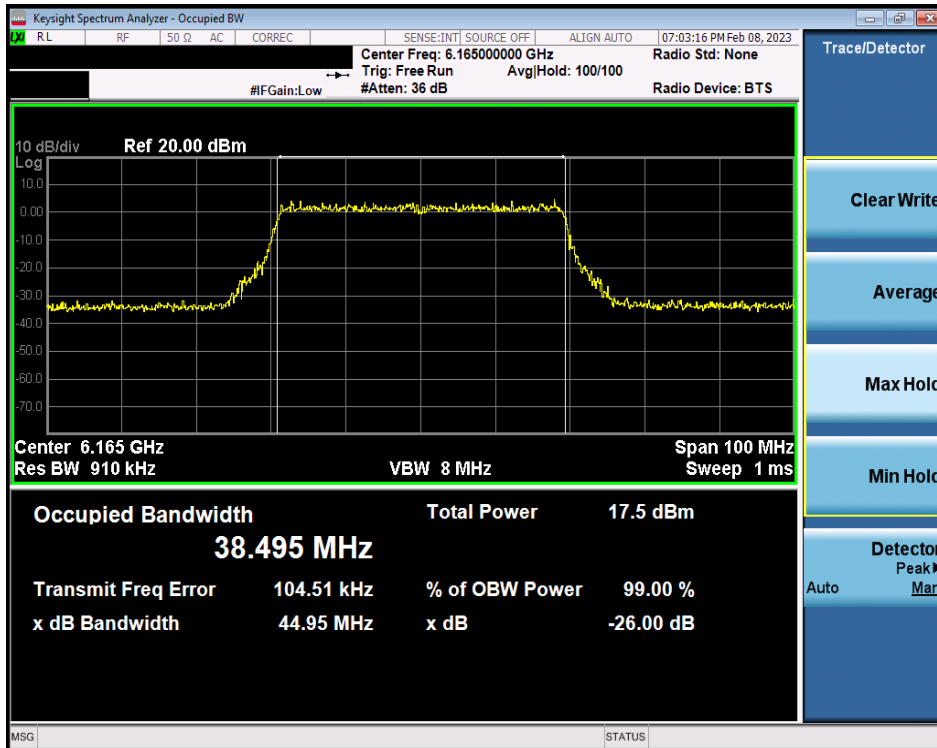


Plot 7-60. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 47 of 237

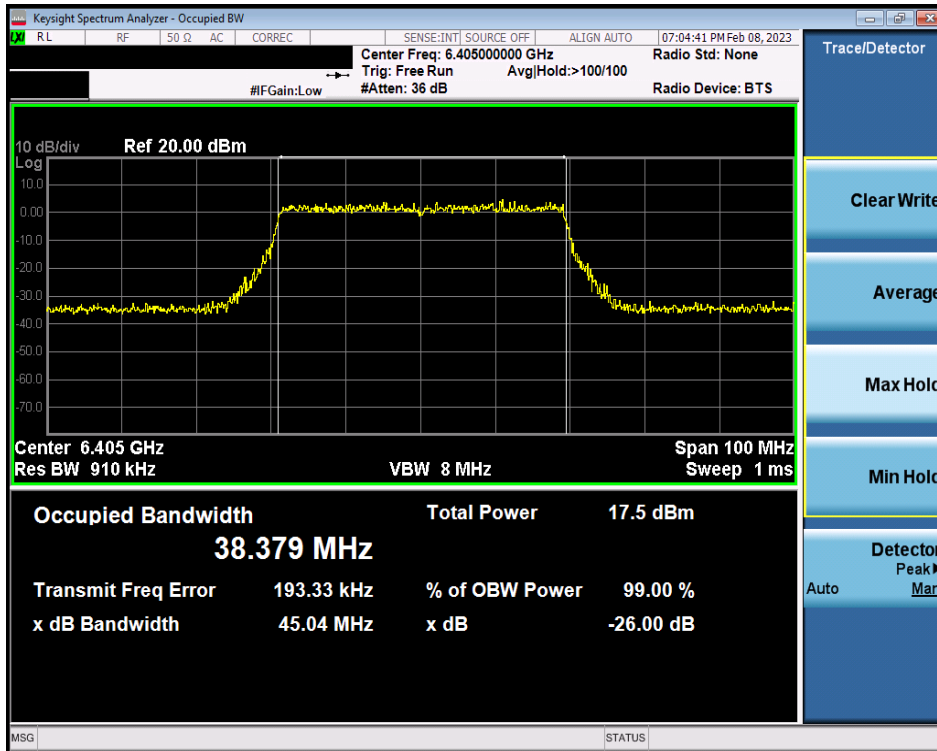


Plot 7-61. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 91)

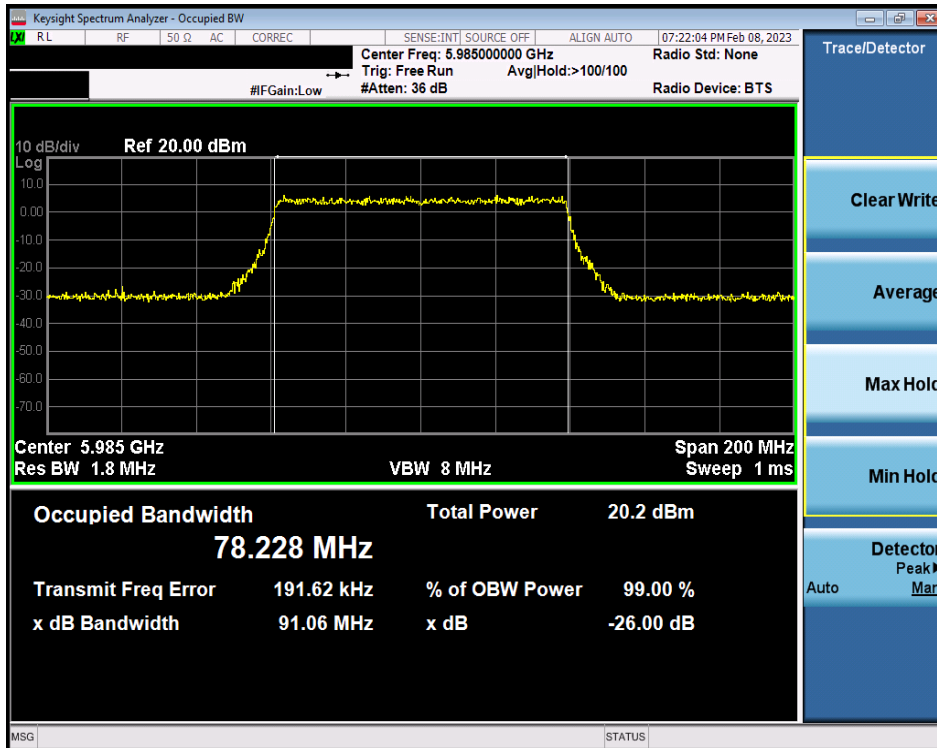


Plot 7-62. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 7)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 48 of 237

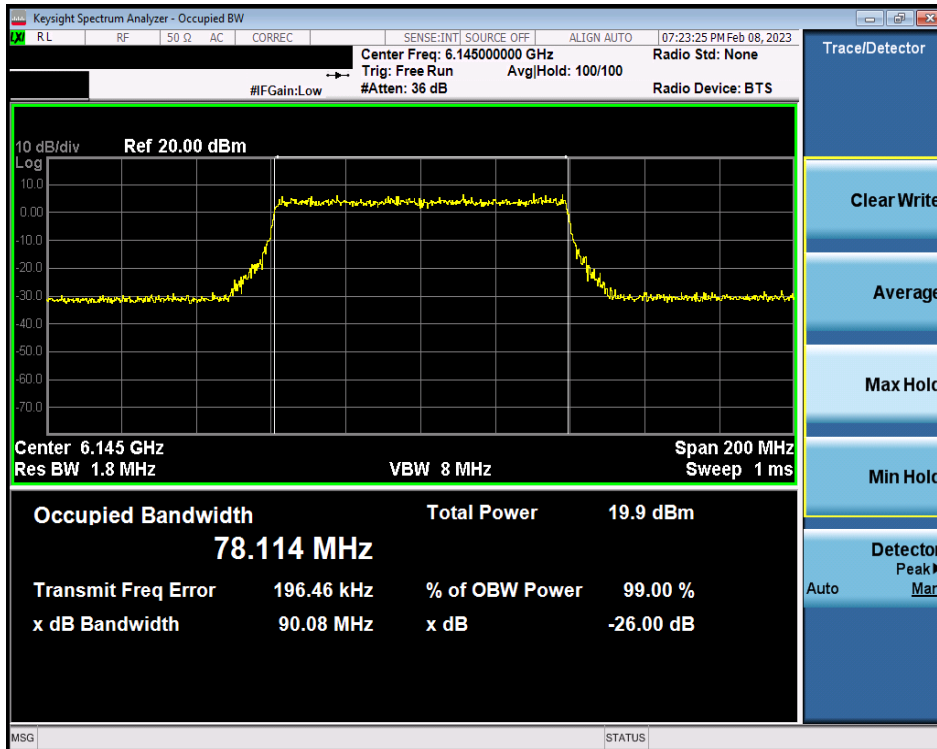


Plot 7-63. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39)

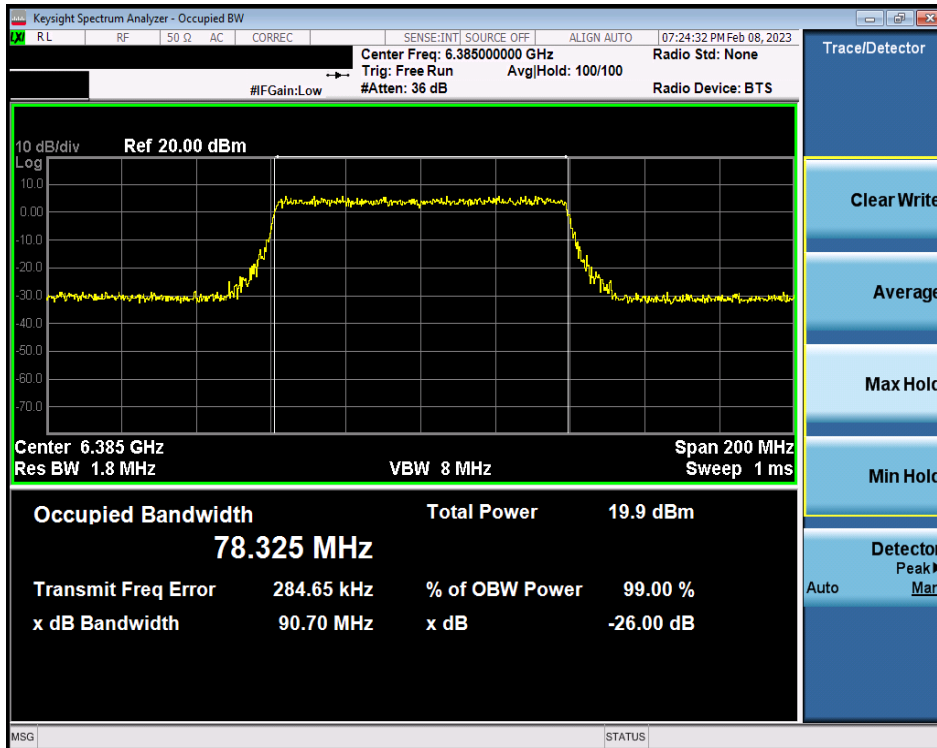


Plot 7-64. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 87)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 49 of 237

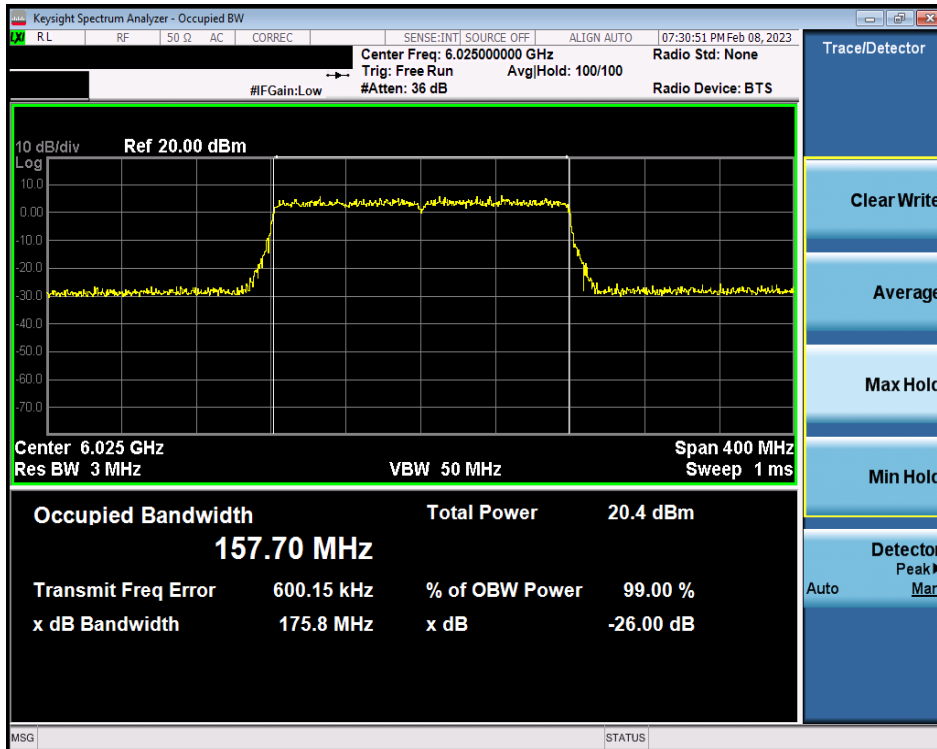


Plot 7-65. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 15)

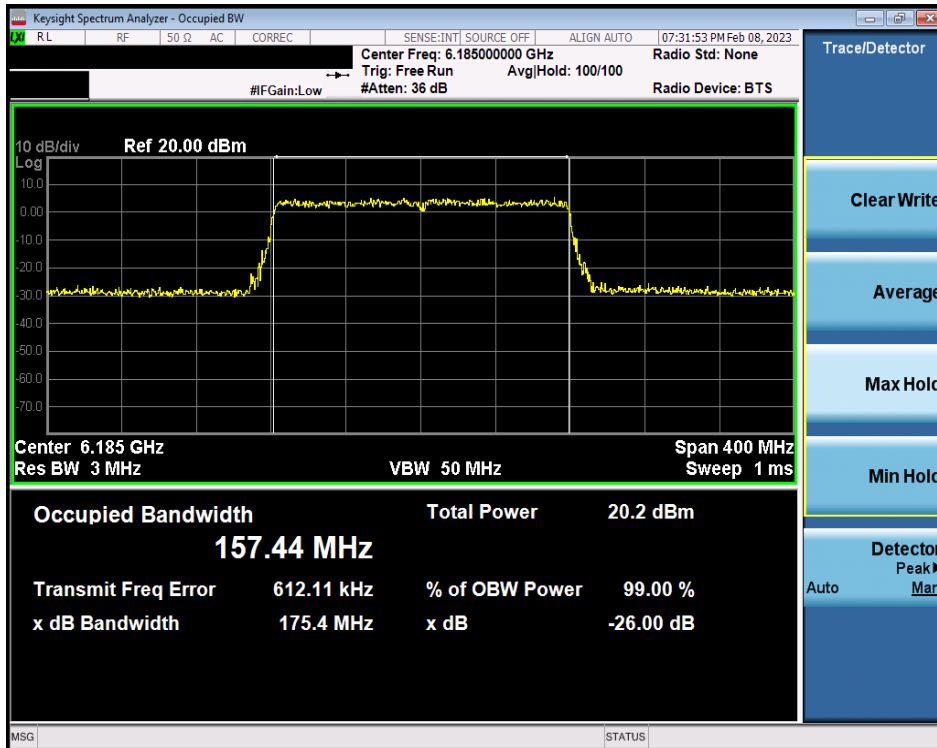

Plot 7-66. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 50 of 237

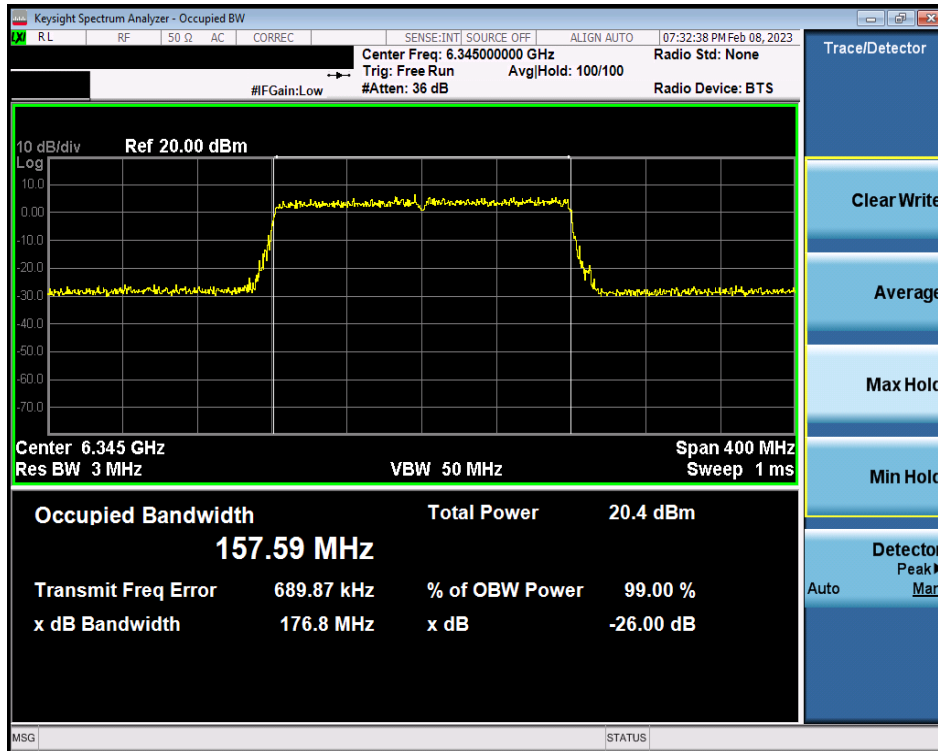


Plot 7-67. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 79)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 51 of 237

7.2.6 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 6)

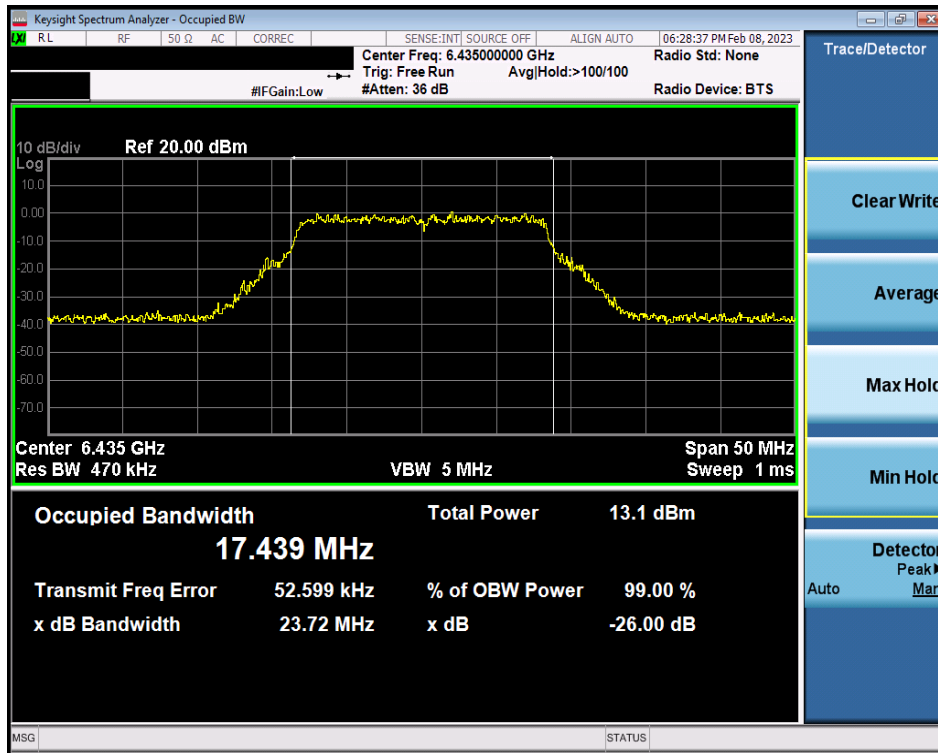


Plot 7-68. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 97)

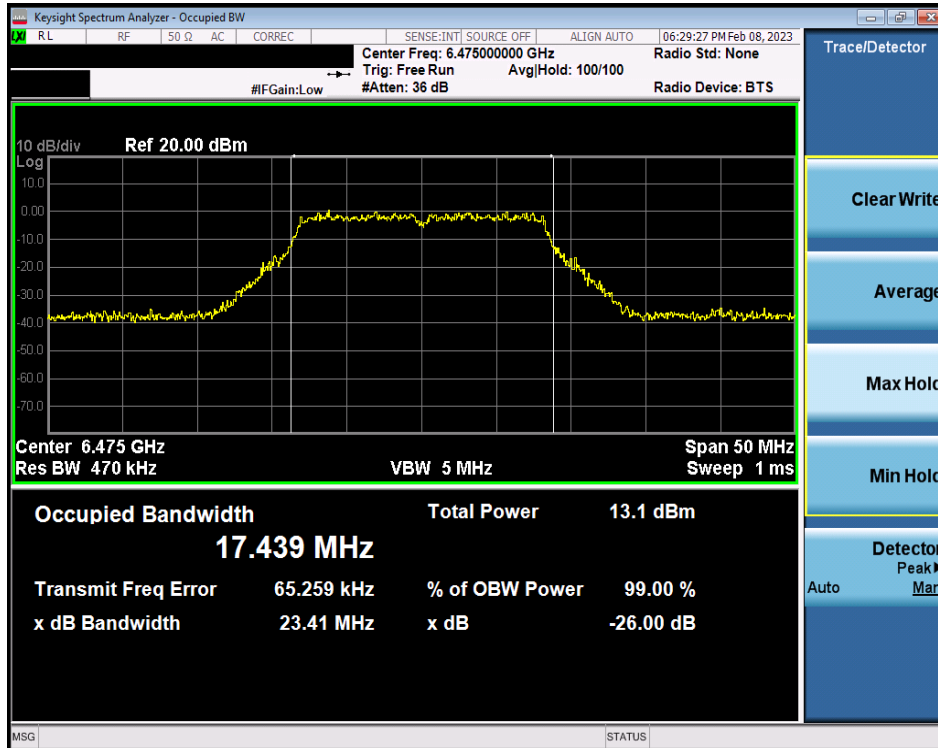


Plot 7-69. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 105)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 52 of 237

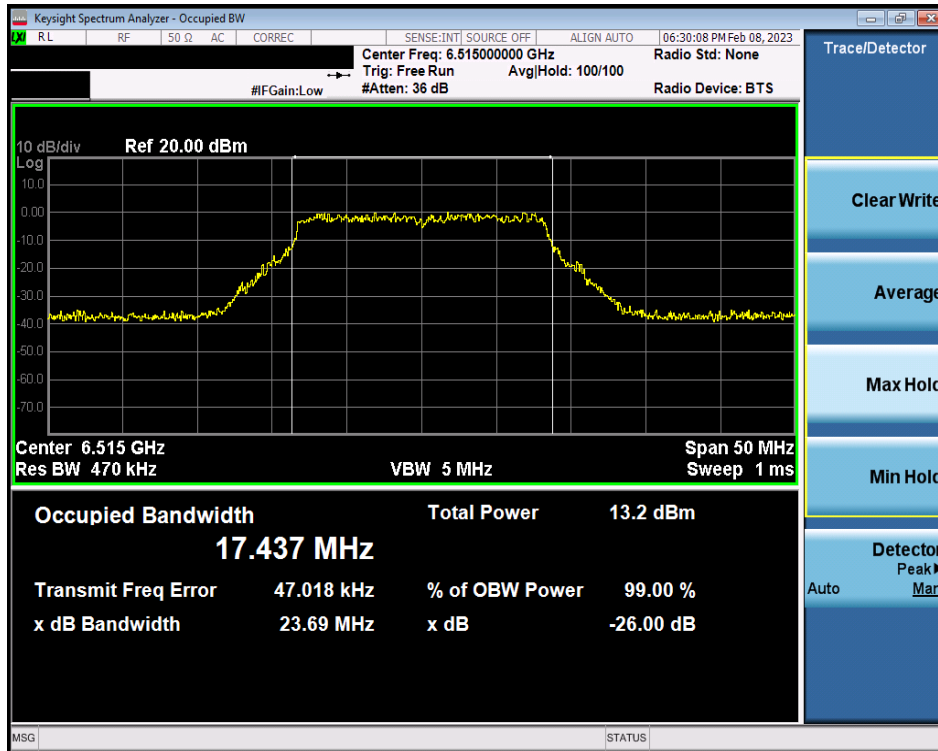


Plot 7-70. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 6) – Ch. 113)

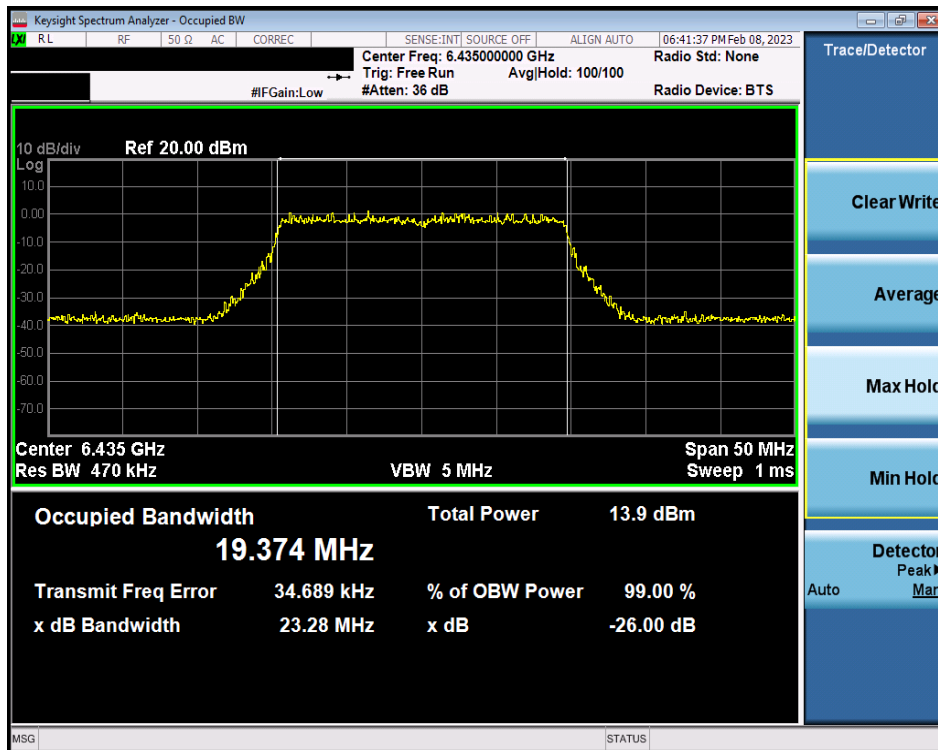


Plot 7-71. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 6) – Ch. 97)

FCC ID: PY7-84558E		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 53 of 237	

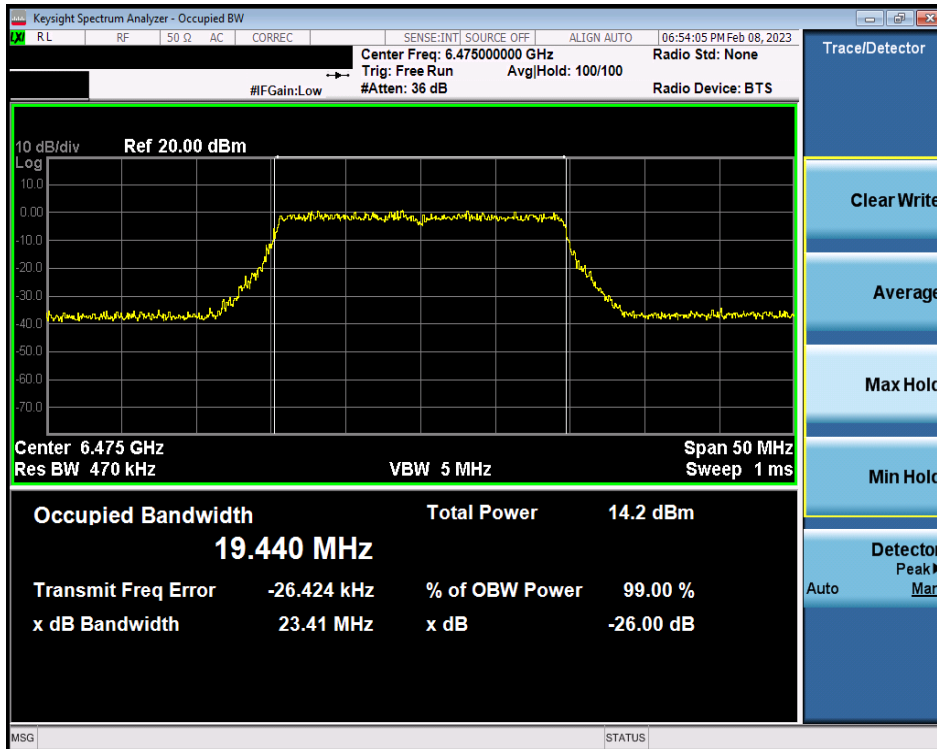


Plot 7-72. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 6) – Ch. 105)

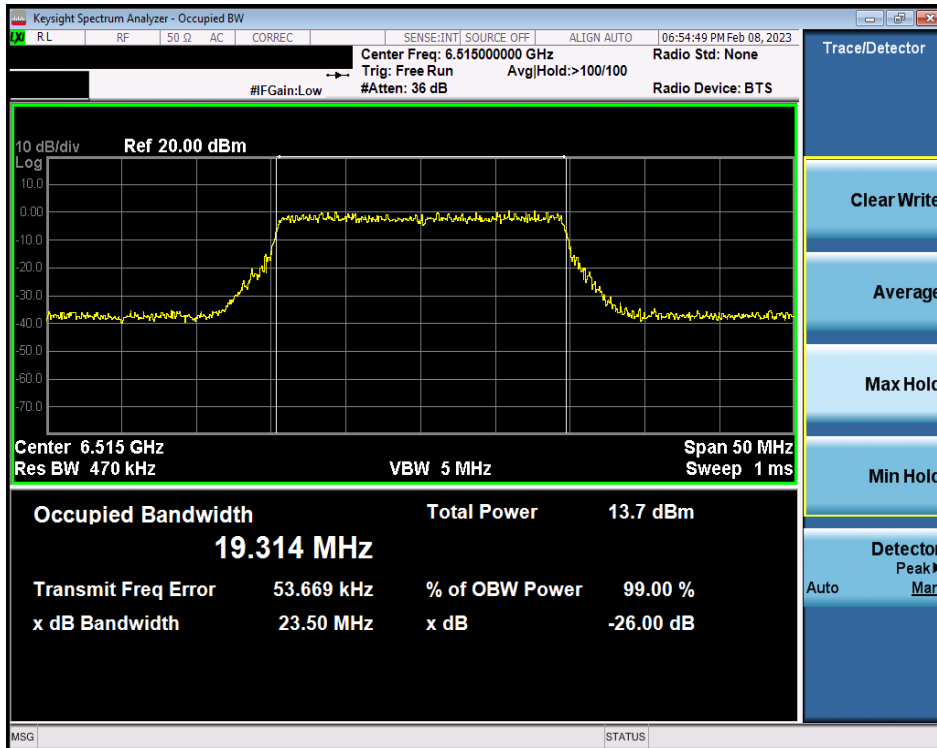


Plot 7-73. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 6) – Ch. 113)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 54 of 237

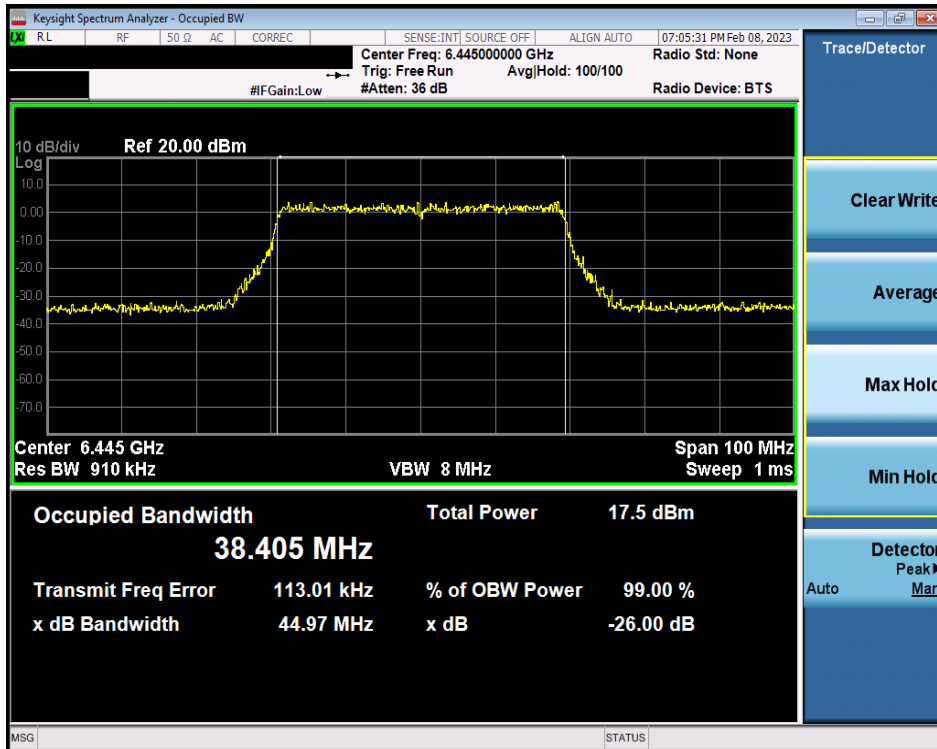


Plot 7-74. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 99)

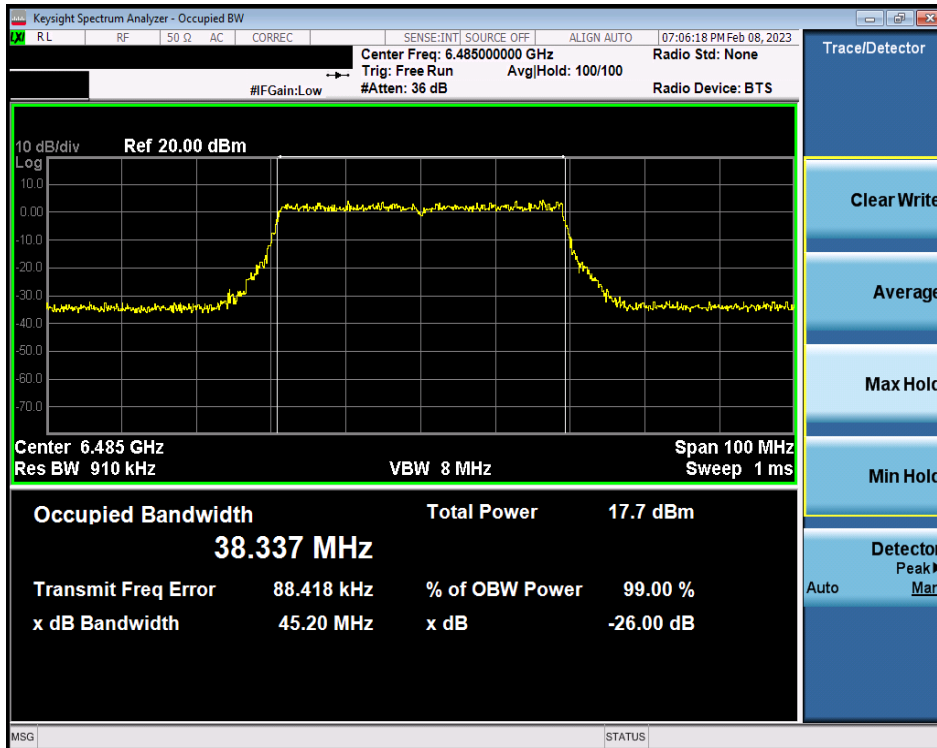


Plot 7-75. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 107)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 55 of 237

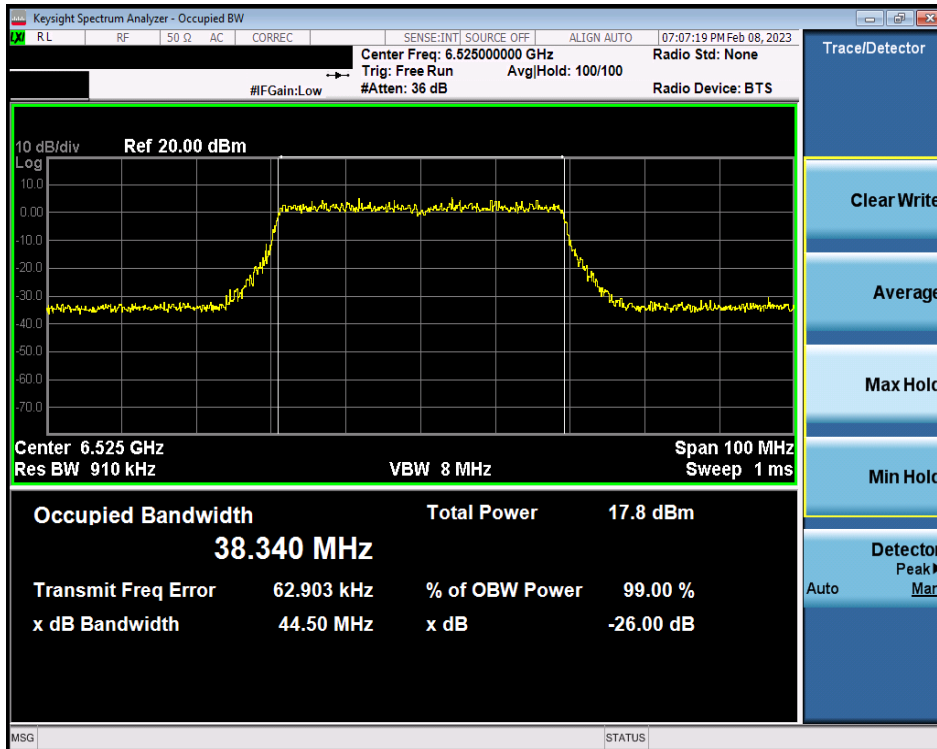


Plot 7-76. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 6) – Ch. 115)

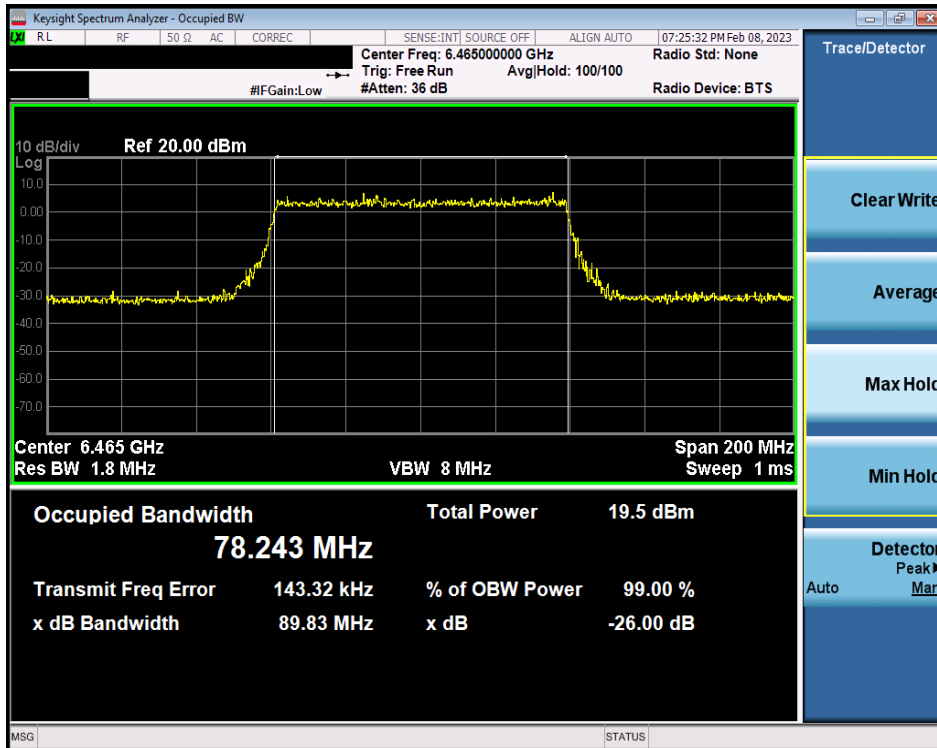

Plot 7-77. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 6) – Ch. 103)


FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 56 of 237

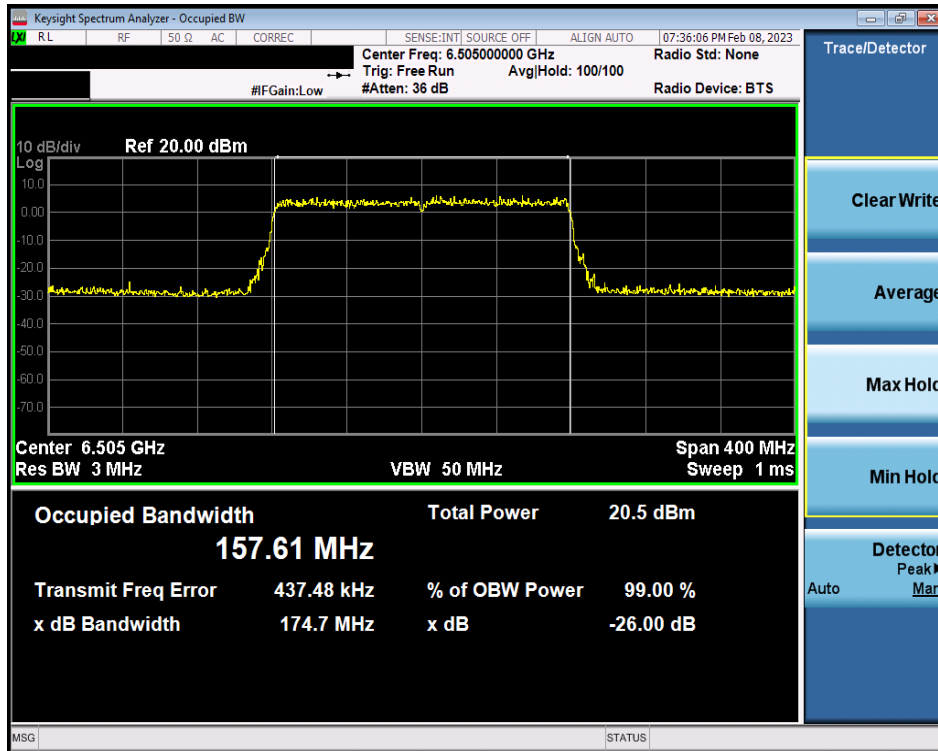


Plot 7-78. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 57 of 237

7.2.7 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 7)

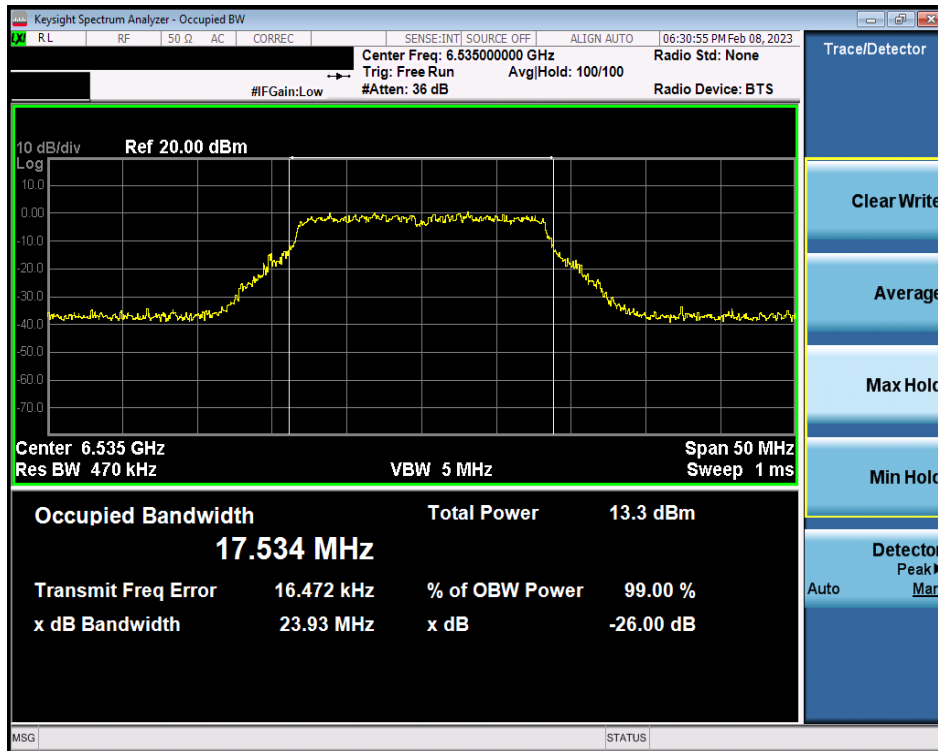


Plot 7-79. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 117)

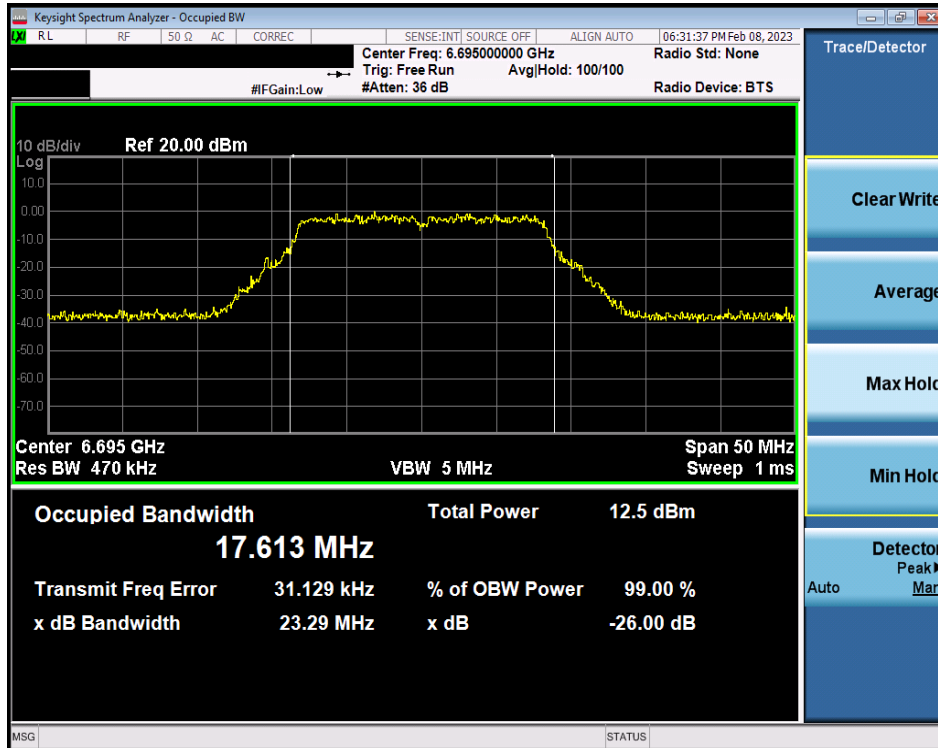


Plot 7-80. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 149)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 58 of 237

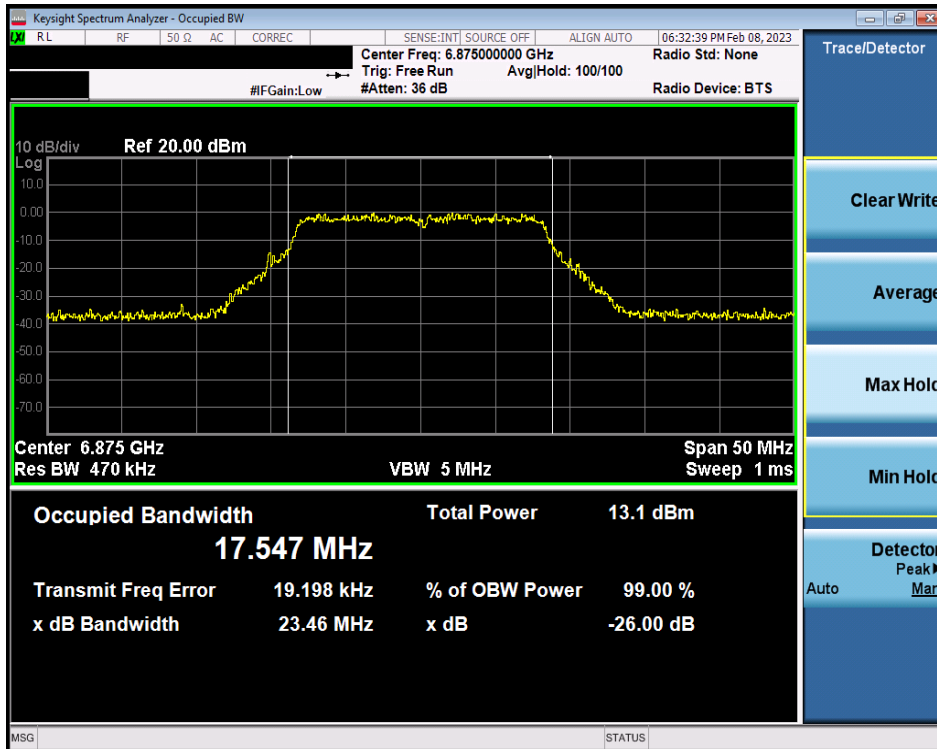


Plot 7-81. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 7) – Ch. 185)

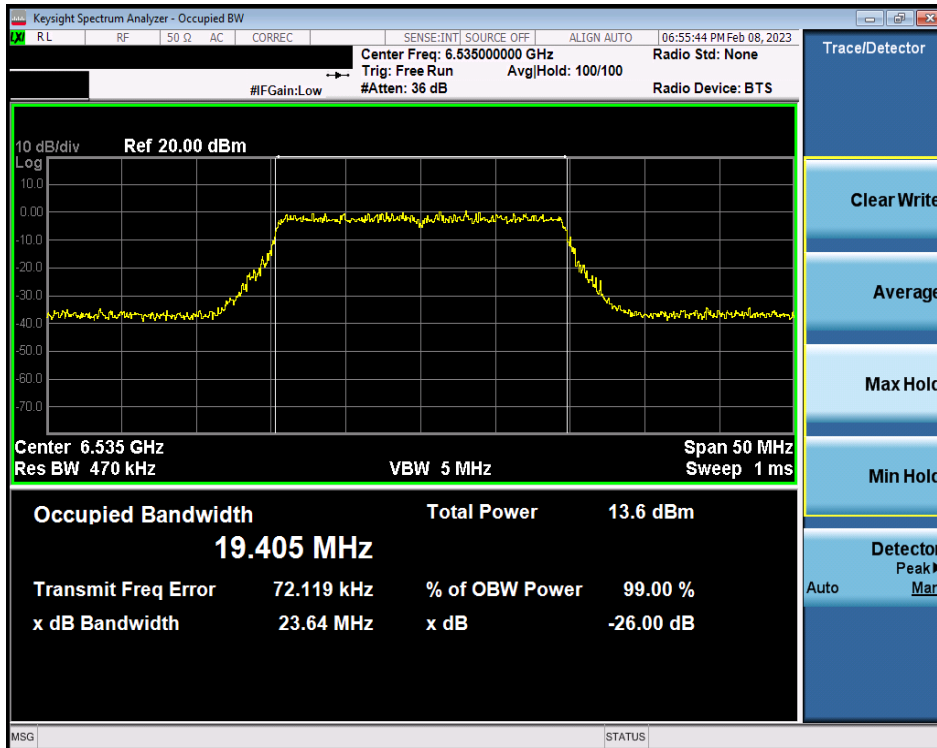


Plot 7-82. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 7) – Ch. 117)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 59 of 237

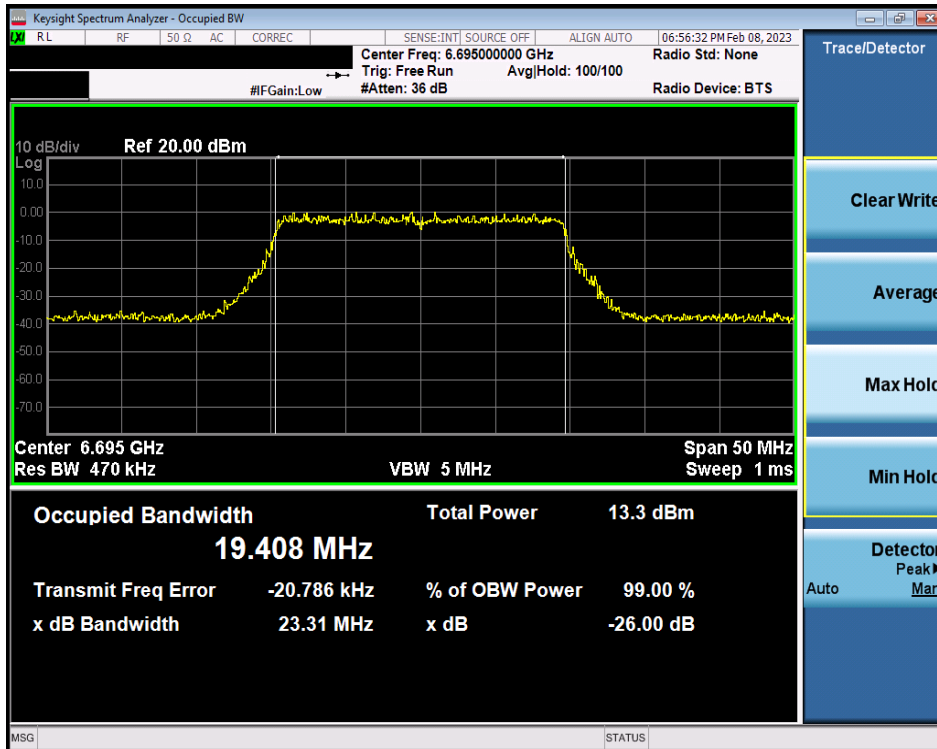


Plot 7-83. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 7) – Ch. 149)

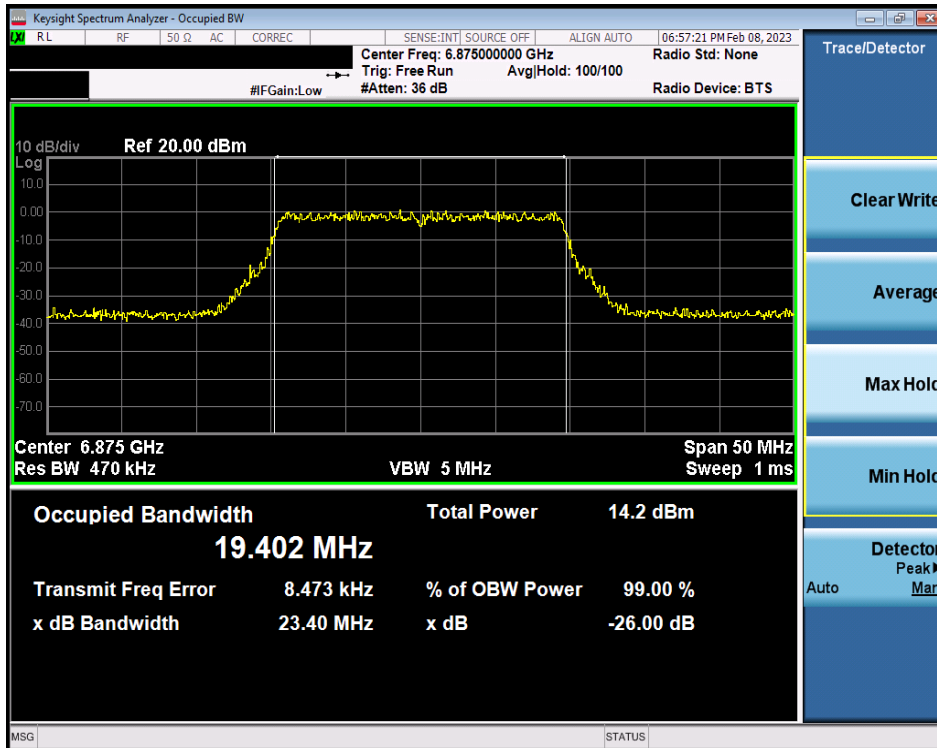


Plot 7-84. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 7) – Ch. 185)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 60 of 237

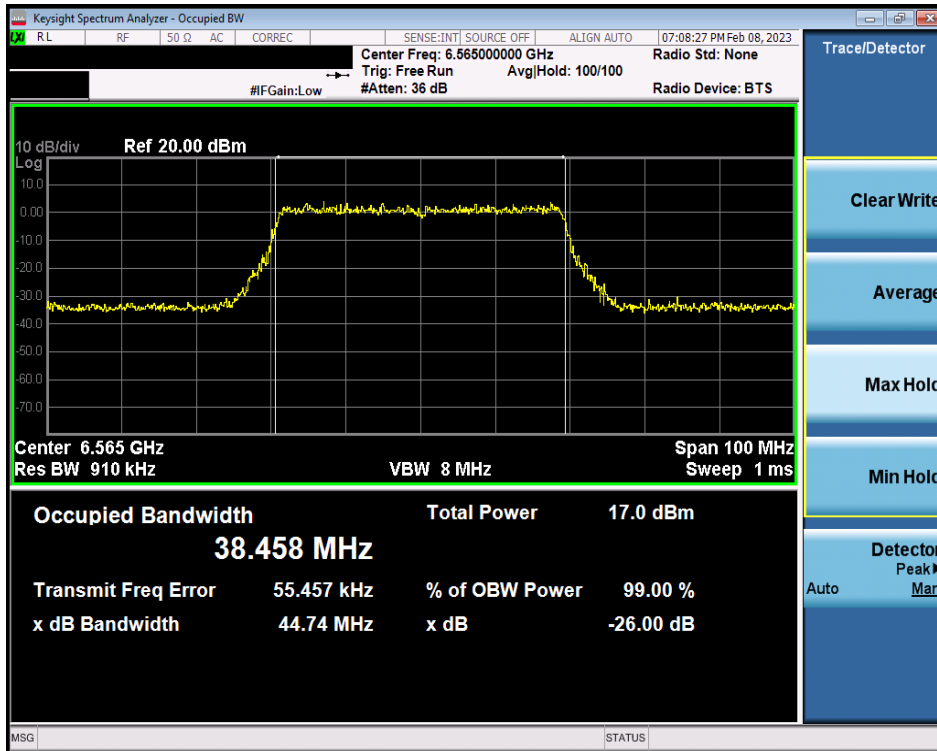


Plot 7-85. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 123)

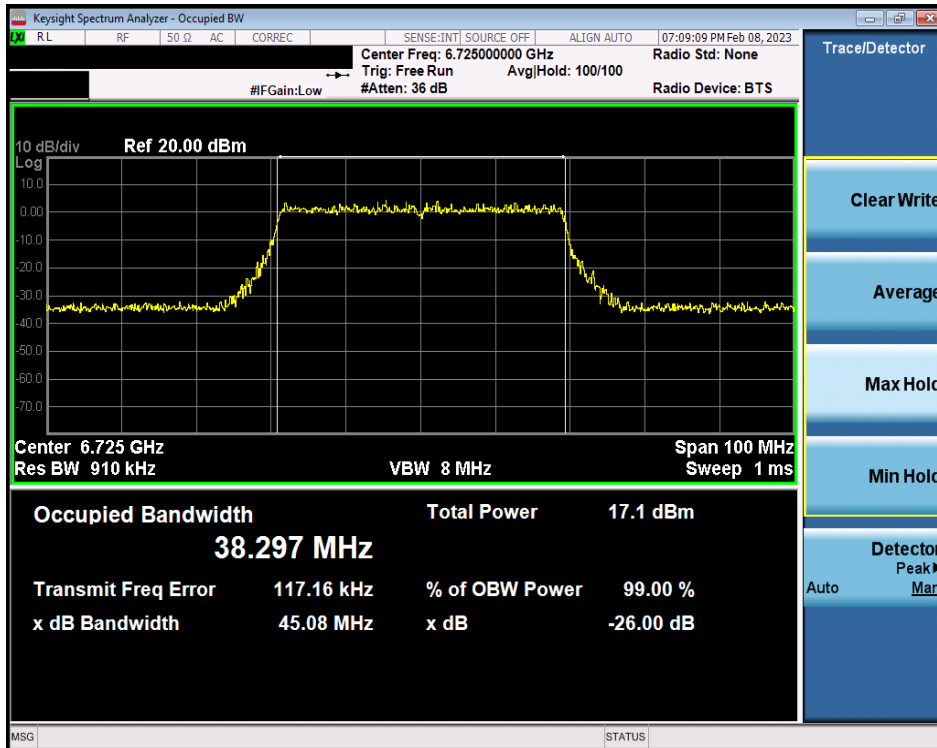


Plot 7-86. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 61 of 237

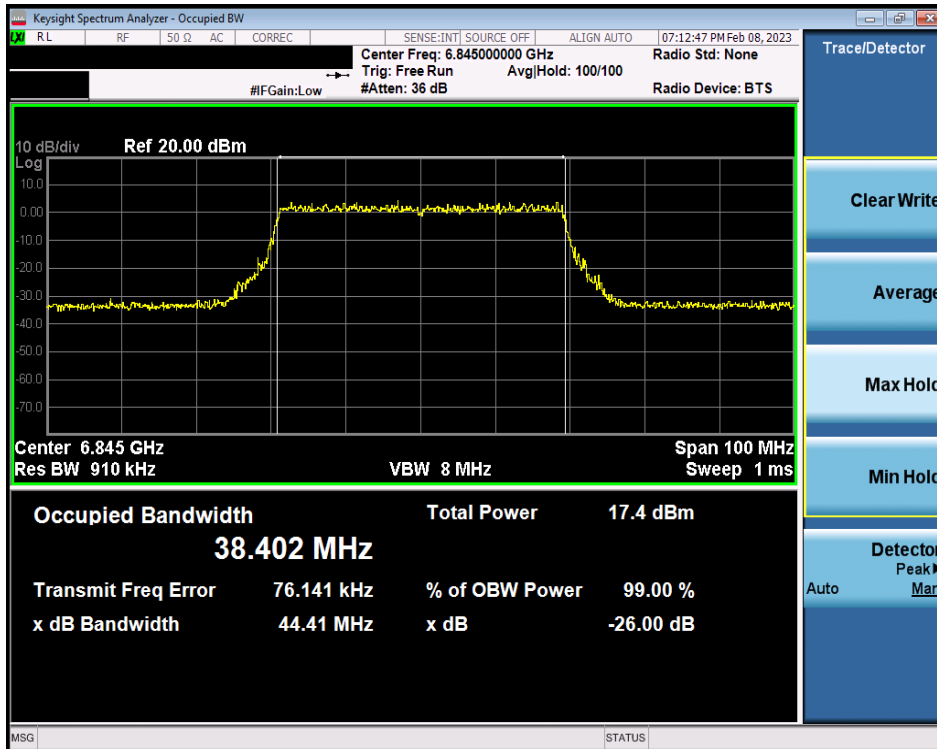


Plot 7-87. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 7) – Ch. 179)

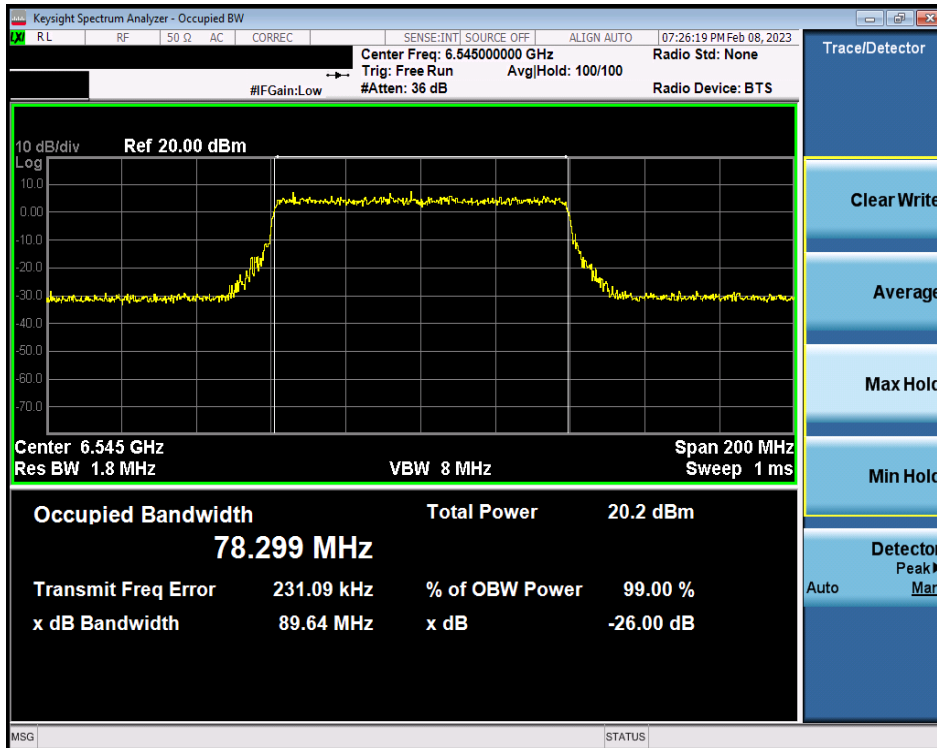


Plot 7-88. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 119)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 62 of 237

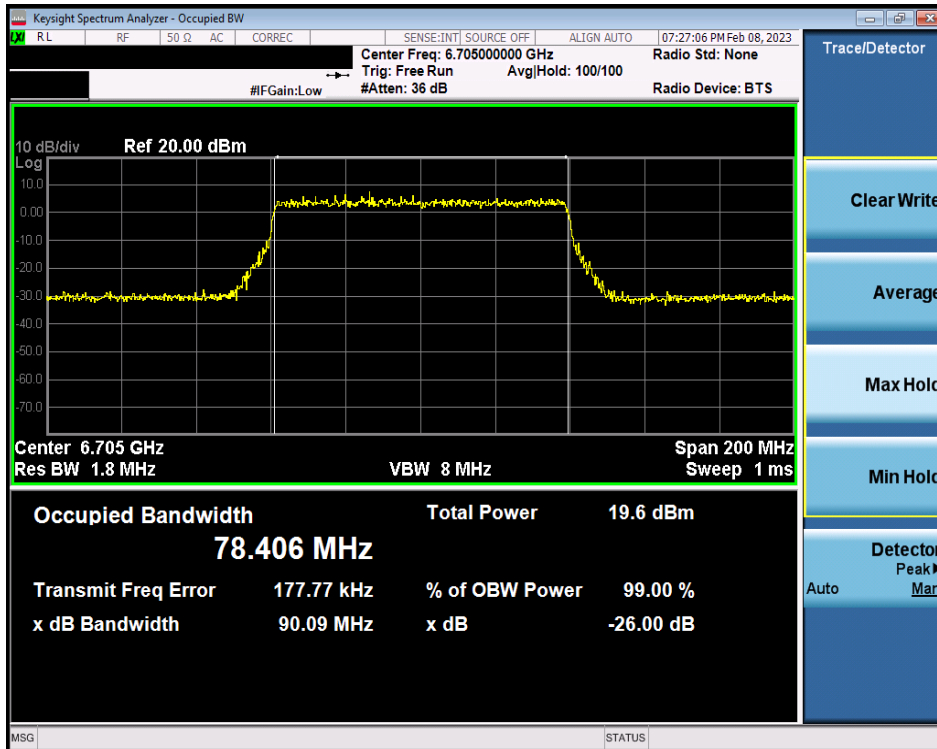


Plot 7-89. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 151)

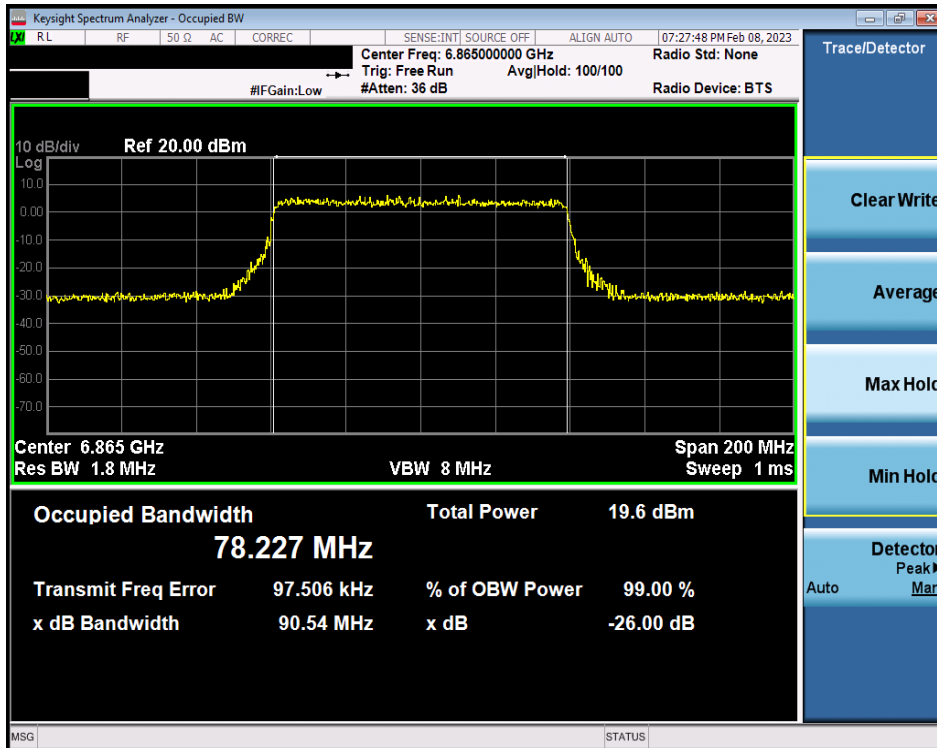


Plot 7-90. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 7) – Ch. 183)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 63 of 237

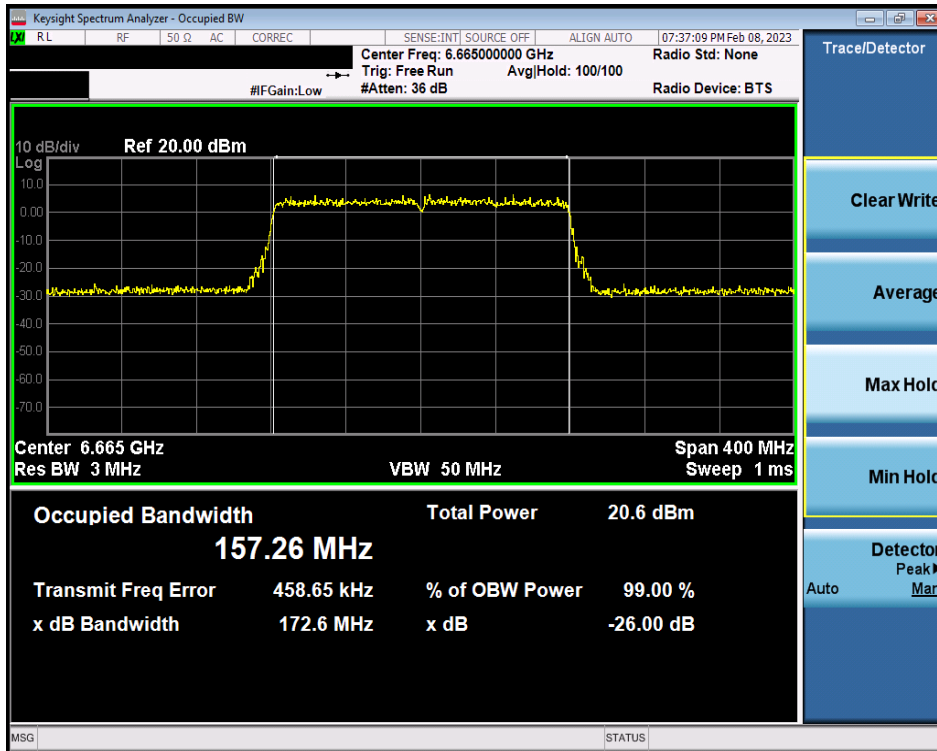


Plot 7-91. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 7) – Ch. 143)

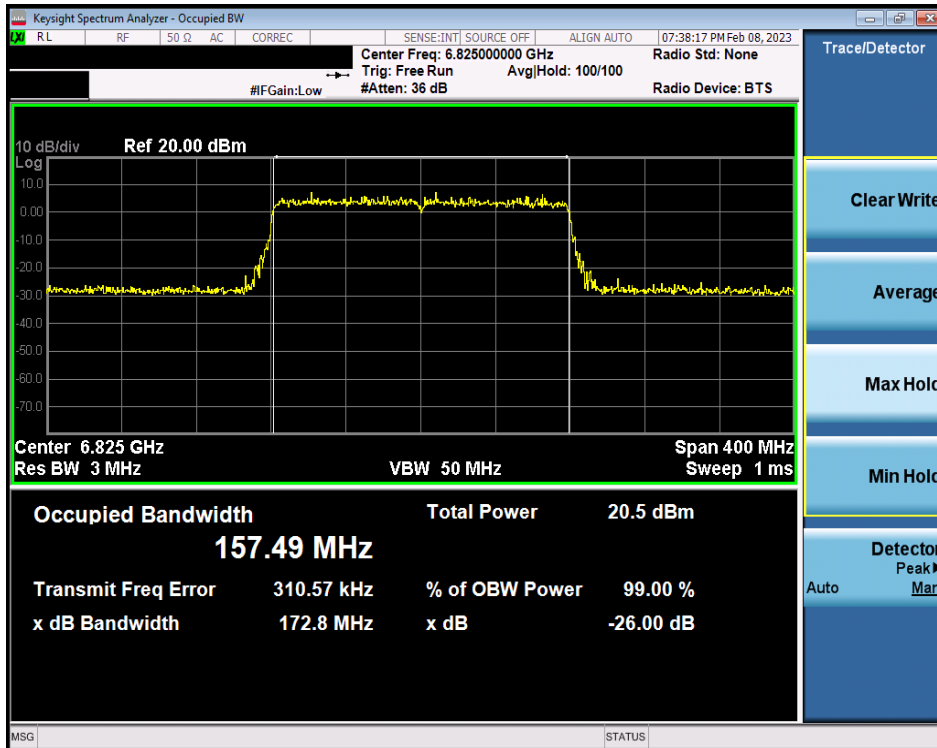


Plot 7-92. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 7) – Ch. 175)

FCC ID: PY7-84558E		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 64 of 237	

7.2.8 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 8)

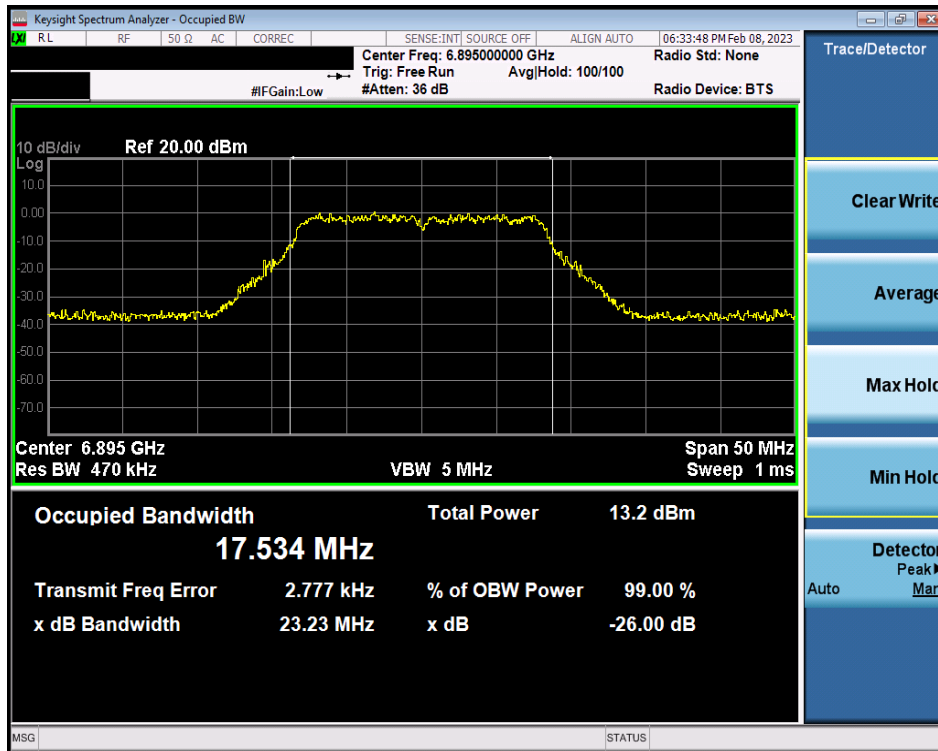


Plot 7-93. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 189)

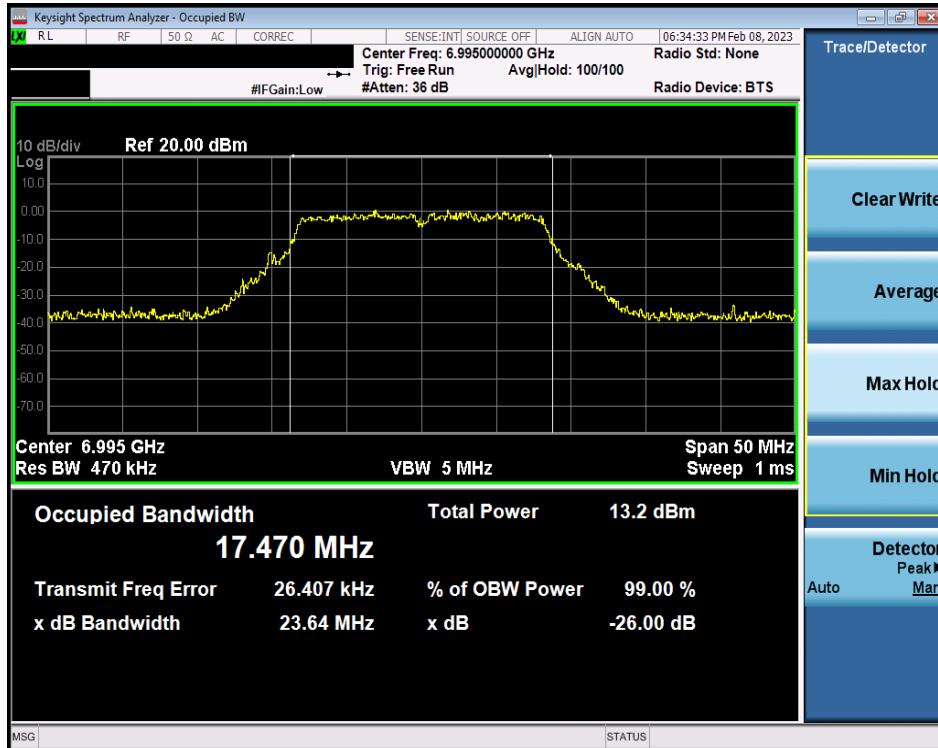


Plot 7-94. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 209)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 65 of 237

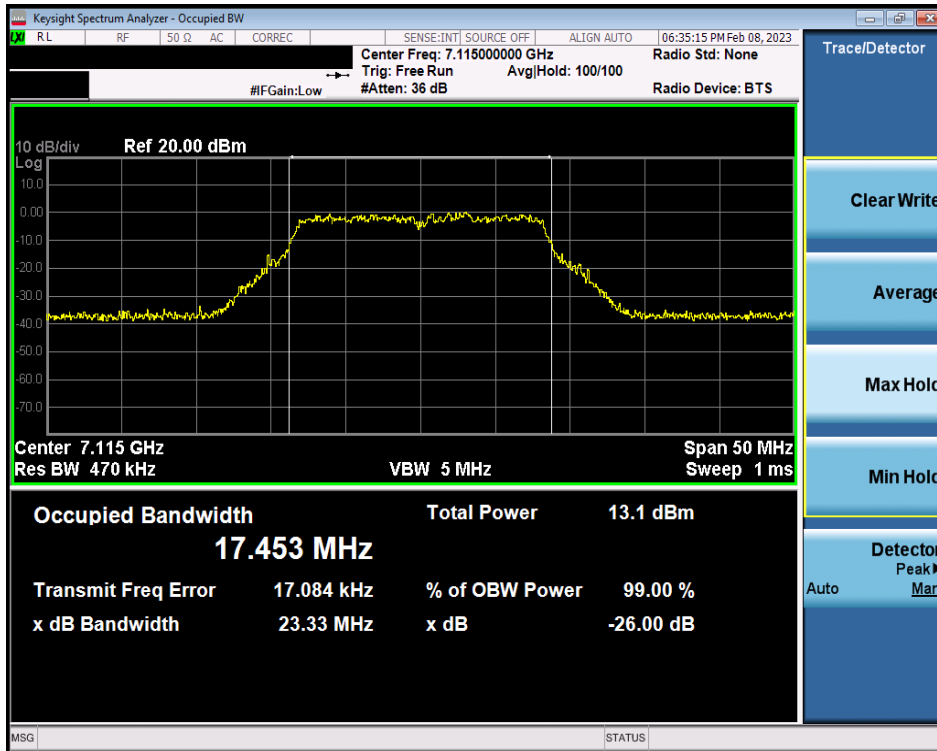


Plot 7-95. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 8) – Ch. 233)

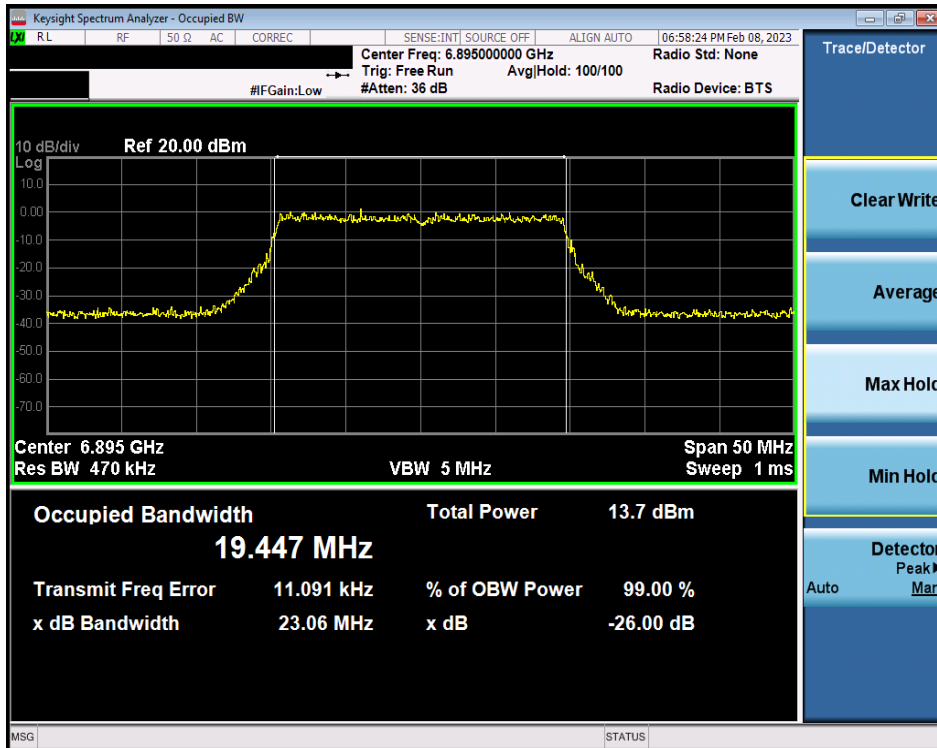


Plot 7-96. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 8) – Ch. 189)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 66 of 237

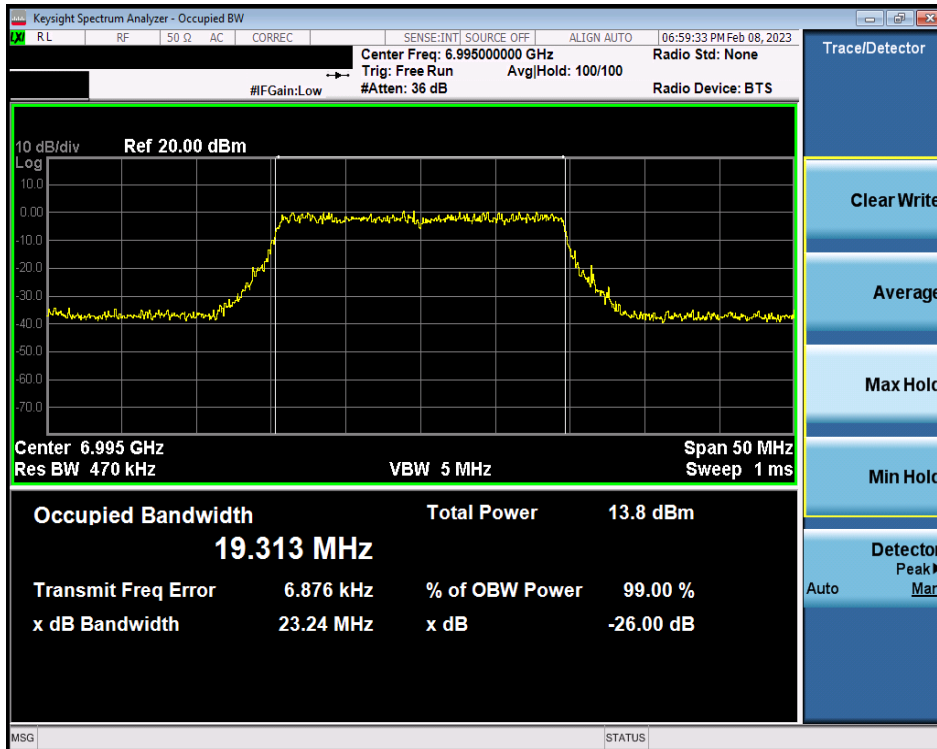


Plot 7-97. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 8) – Ch. 209)

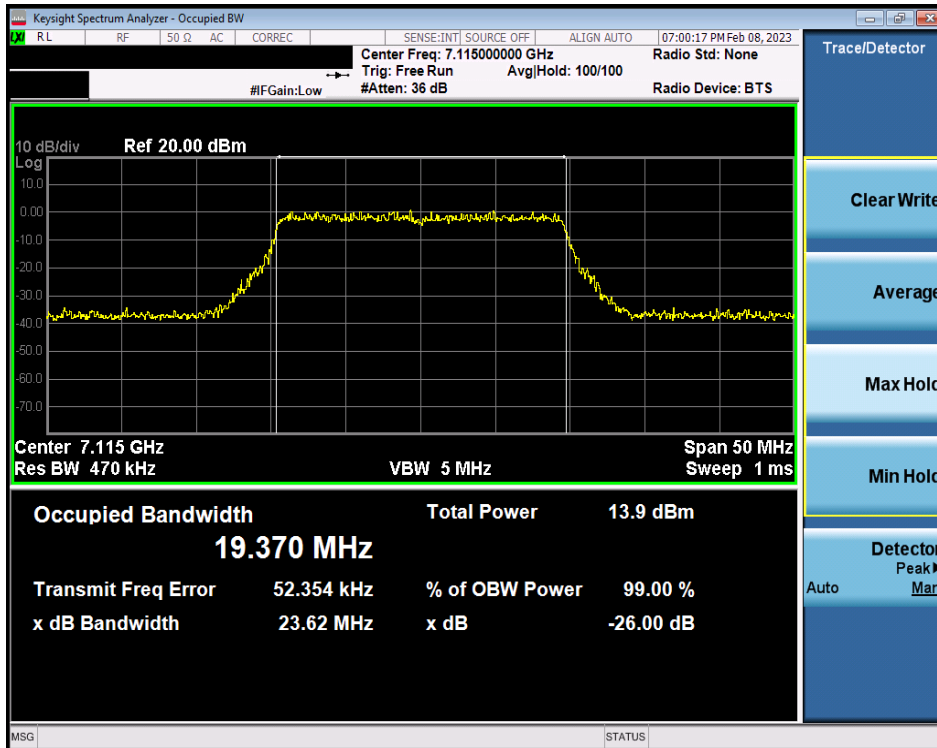


Plot 7-98. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 8) – Ch. 233)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 67 of 237

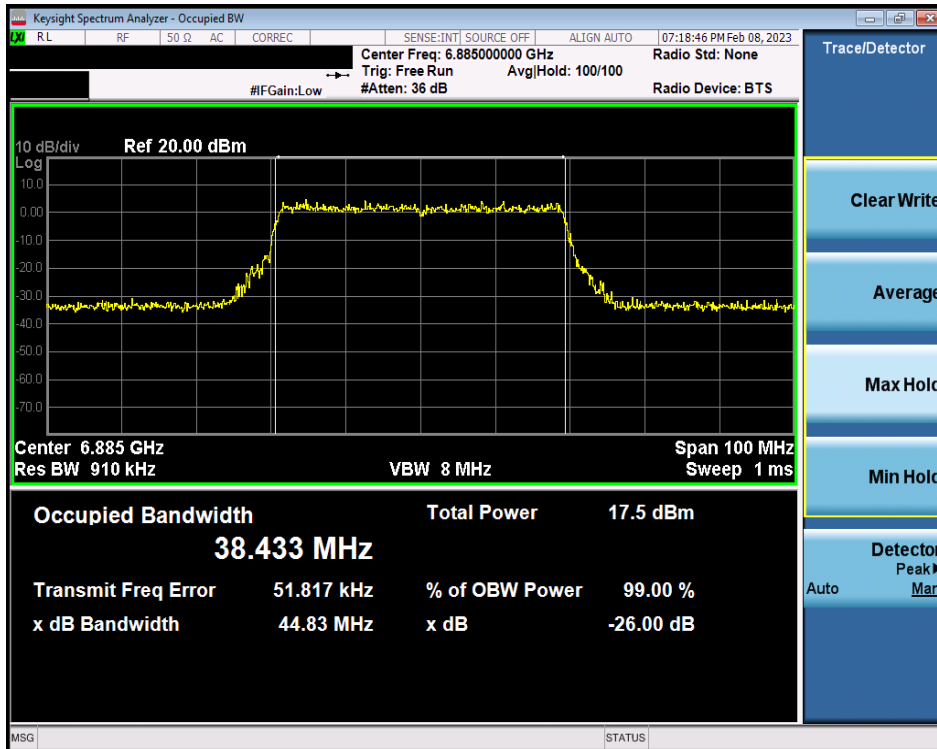


Plot 7-99. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 8) – Ch. 187)

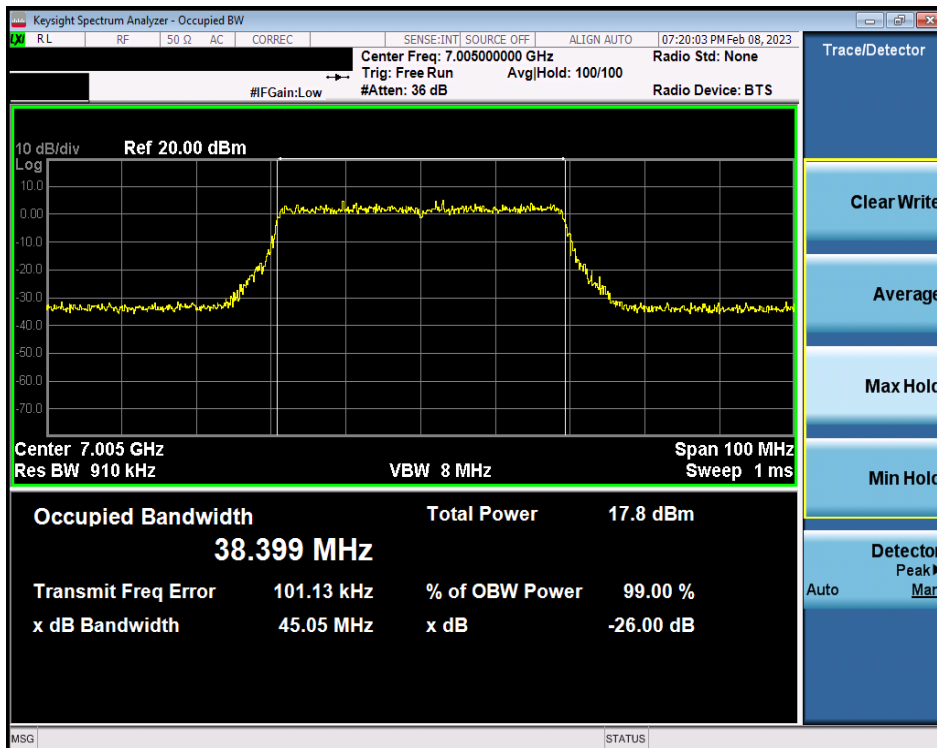


Plot 7-100. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 68 of 237

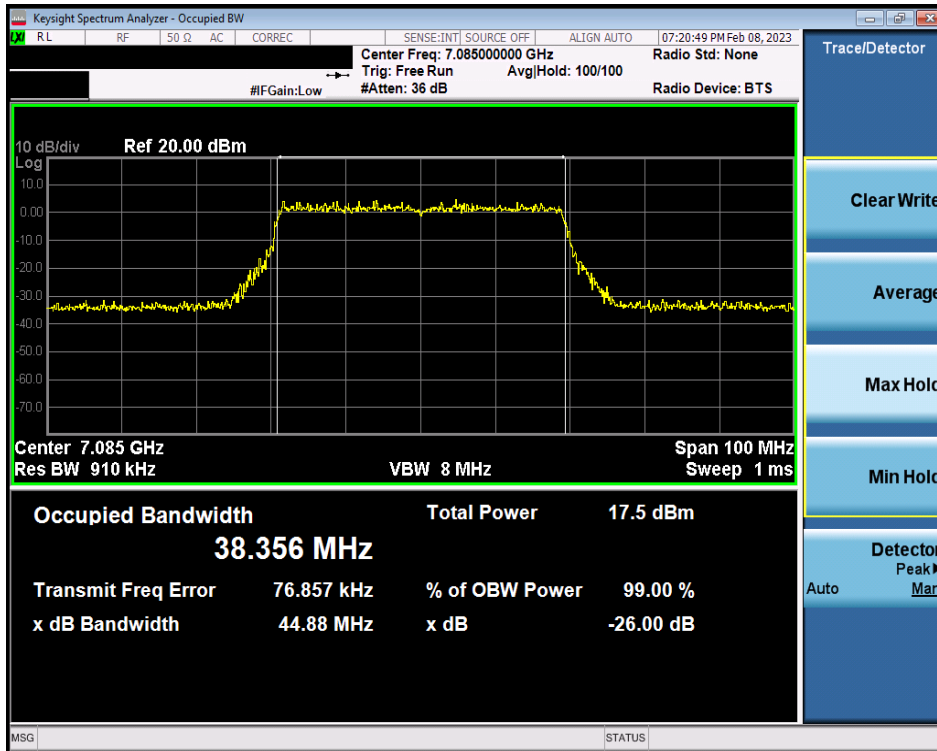


Plot 7-101. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 8) – Ch. 227)

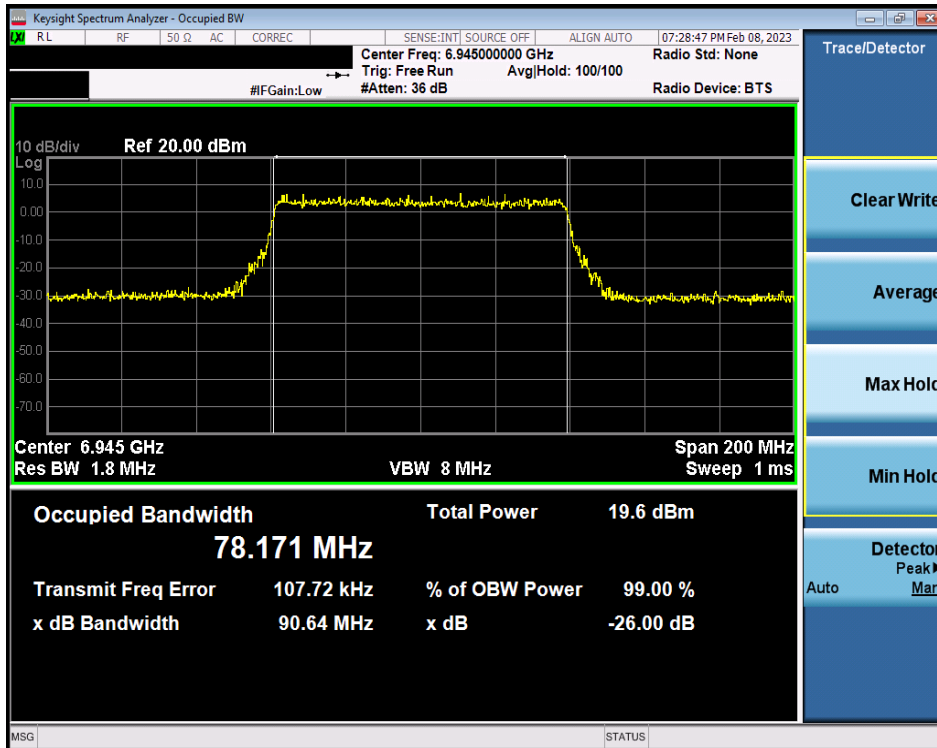


Plot 7-102. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 69 of 237

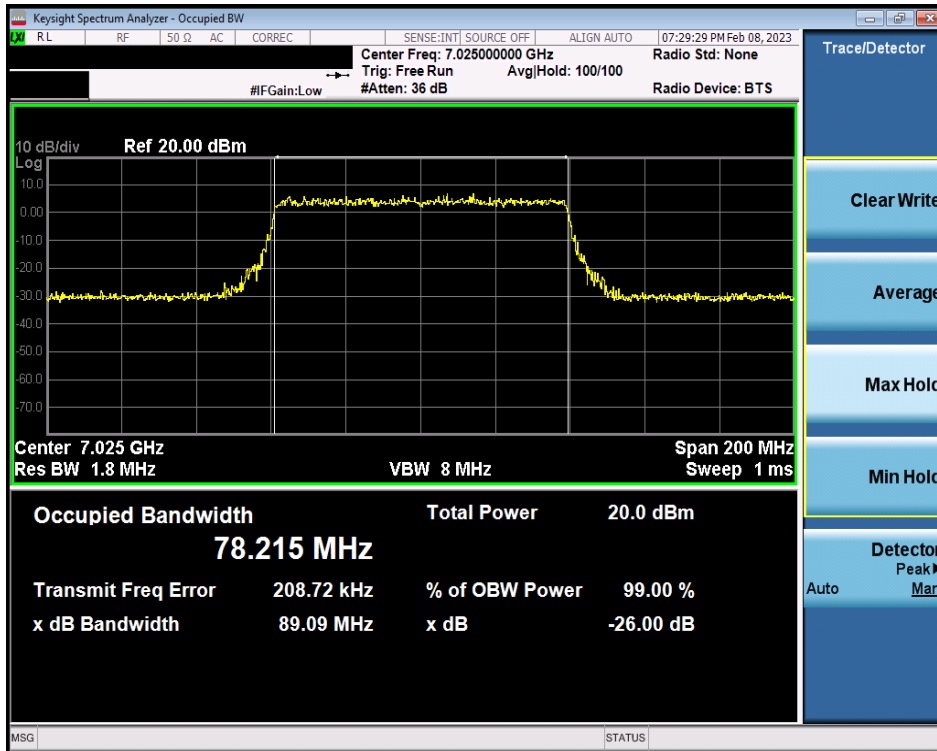

Plot 7-103. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 8) – Ch. 215)

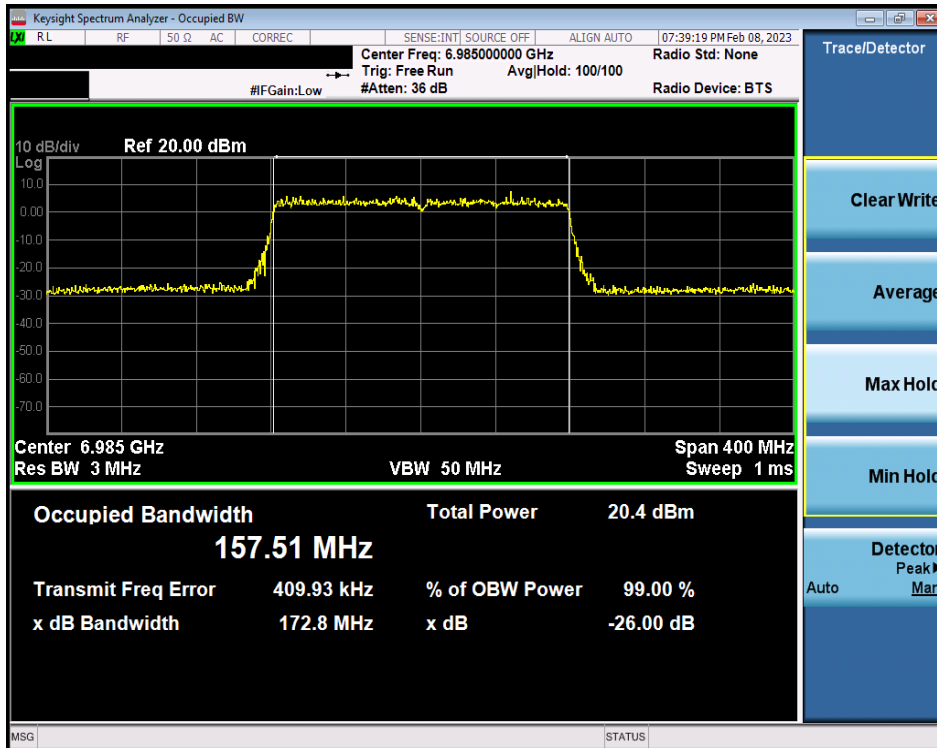

Plot 7-104. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 70 of 237

7.3 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 71 of 237

MIMO Maximum Conducted Output Power Measurements

6GHz (20MHz Bandwidth)	6GHz (20MHz) 802.11a Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dBm]
	5955	1	4.99	4.96	7.99	0.47	8.46	24.0	-15.54
	6075	25	4.99	4.88	7.95	0.47	8.42	24.0	-15.58
	6175	45	4.98	4.93	7.97	0.47	8.44	24.0	-15.56
	6275	65	4.89	4.88	7.90	0.47	8.37	24.0	-15.63
	6415	93	4.73	4.72	7.73	0.47	8.20	24.0	-15.80
	6435	97	4.99	4.60	7.81	0.80	8.61	24.0	-15.39
	6475	105	4.72	4.23	7.49	0.80	8.29	24.0	-15.71
	6515	113	4.56	4.43	7.51	0.80	8.31	24.0	-15.69
6535	117	4.59	4.66	7.64	0.69	8.33	24.0	-15.67	
6675	145	4.69	4.46	7.59	0.69	8.28	24.0	-15.72	
6695	149	4.65	4.33	7.50	0.69	8.19	24.0	-15.81	
6875	185	4.62	4.36	7.50	0.69	8.19	24.0	-15.81	
6895	189	5.32	5.20	8.27	-0.15	8.12	24.0	-15.88	
6995	209	5.42	5.26	8.35	-0.15	8.20	24.0	-15.80	
7115	233	5.45	5.14	8.31	-0.15	8.16	24.0	-15.84	

Table 7-2. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	6GHz (20MHz) 802.11ax Conducted Power [dBm]								
	Freq [MHz]	Channel	ANT1	ANT2	MIMO	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dBm]
	5955	1	4.63	4.68	7.67	0.47	8.14	24.0	-15.86
	6075	25	4.65	4.73	7.70	0.47	8.17	24.0	-15.83
	6175	45	4.53	4.62	7.59	0.47	8.06	24.0	-15.94
	6275	65	4.98	4.96	7.98	0.47	8.45	24.0	-15.55
	6415	93	4.86	4.79	7.84	0.47	8.31	24.0	-15.69
	6435	97	4.72	4.20	7.48	0.80	8.28	24.0	-15.72
	6475	105	4.87	4.35	7.63	0.80	8.43	24.0	-15.57
	6515	113	4.75	4.58	7.68	0.80	8.48	24.0	-15.52
6535	117	4.72	4.80	7.77	0.69	8.46	24.0	-15.54	
6675	145	4.84	4.62	7.74	0.69	8.43	24.0	-15.57	
6695	149	4.71	4.55	7.64	0.69	8.33	24.0	-15.67	
6875	185	4.74	4.53	7.65	0.69	8.34	24.0	-15.66	
6895	189	5.73	6.27	9.02	-0.15	8.87	24.0	-15.13	
6995	209	5.66	6.34	9.02	-0.15	8.87	24.0	-15.13	
7115	233	6.13	6.47	9.31	-0.15	9.16	24.0	-14.84	

Table 7-3. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power

FCC ID: PY7-84558E	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2302060006-08-R3.PY7	Test Dates: 01/30/2023 - 04/18/2023	EUT Type: Portable Handset	Page 72 of 237