

Page No.: 1 of 27

Antenna Test Report

Report No.: TEOT2303000211E4

Applicant Name: Sony Corporation Manufacturer Name: Sony Corporation

Product Name: GSM/WCDMA/LTE/FR1 Phone with BT, DTS/UNII A/B/G/N/AC/AX, GPS, WPT & NFC FCC ID: PY7-84558E

> Measurements performed at SGS Taiwan Ltd. Hwaya District, Taiwan

> **Issued Date: March 31, 2023**

	Name Date & Signatu	
Prepared by:	Nandi Chen Sr. Engineer	Nandi Chen March 31, 2023
Approved by:	Shawn Yen Supervisor	Shawn Yen March 31, 2023

Distribution

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot

be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page No.: 2 of 27

Measurement System Information

General Information

Testing Condition:


• Temperature: 22±3°C

• Humidity: <80%

Measurement Facility:

 Measurement Chamber: MVG 3D fully anechoic chamber and its measuring system (Stargate-24-L)

Network Analyzer: Agilent E5071C

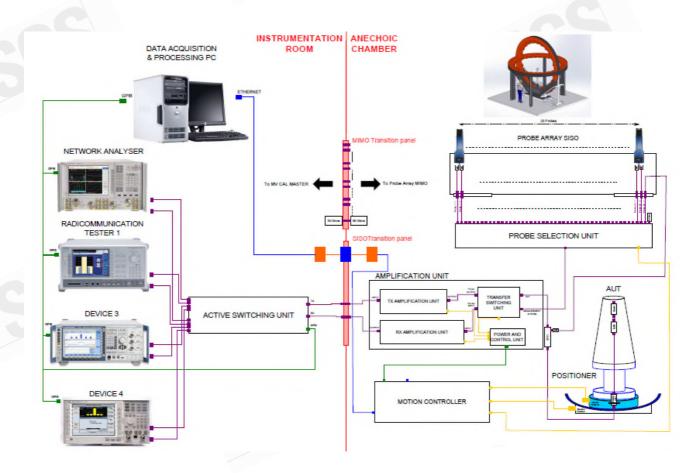




Page No.: 3 of 27

Measurements are performed in a MVG **Stargate-24-L** with the StarAct interface for a base station simulator. The **Stargate-24-L** has 23 probe antennas mounted with equal spacing on a circular arch. Electronic switching of the probe antennas provides outstanding measurement speed. The geometry of the setup, with only a Styrofoam column within 1.6 meters of the EUT, ensures minimum interference and low ripple on the measured radiation patterns. The EUT is placed on top of the pedestal, in the center of the system.

MVG **Stargate-24-L** uses analog RF signal generators to emit EM waves from the probe array to the EUT. It uses the NPAC as an RF receiver for antenna measurements.

We test gain by illuminating the EUT with a frequency swept RF signal from anechoic chamber "source antennas". Then measure the EUT's gain (dBi) via the substitution method. The substitution method involves setting up the calibrated standard antenna over a radiated path accross the chamber, then normalizing (or "zeroing") that path loss to 0 dB. Then substitute EUT in place of standard antenna, and re-measure the change in path loss. By simply adding standard antenna's calibrated gain (dBi) to the change in path loss, it can determine EUT gain in dBi. In other words, the EUT's gain is measured relative to the standard antenna.

Typical Setup for MVG Stargate-24-L:

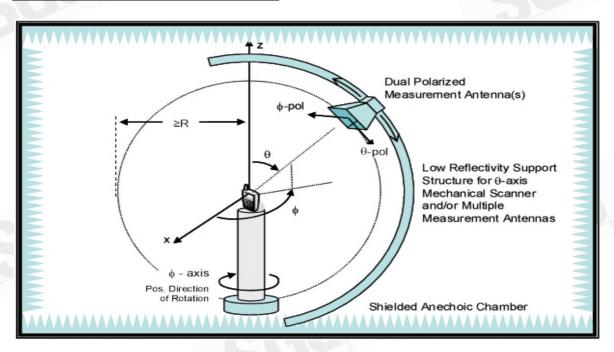



Page No.: 4 of 27

Instruments View



Inside View



Testing Laboratory: Identification of the Responsible Test Laboratory.

OTA Laboratory:

SGS Taiwan Ltd. Wireless Laboratory

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City,

Taiwan 24803.

Telephone: +886 2 2299 3279
Fax: +886 2 2298 0488
Internet: http://www.tw.sgs.com

Testing Location:

No. 2, Keji 1st Rd., Hwaya Technology Park, Guishan District, Taoyuan City, Taiwan 33383.

Details of Applicant:

Applicant's name:	Sony Corporation
Applicant's address:	1-7-1 Konan Minato-ku, Tokyo, 108-0075, Japan

Details of Manufacturer:

Applicant's name:	Sony Corporation
Applicant's address:	1-7-1 Konan Minato-ku, Tokyo, 108-0075, Japan

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd

prosecuted to the fullest extent of the law.



Page No.: 5 of 27

Details of EUT:

Device Description:	GSM/WCDMA/LTE/FR1 Phone with BT, DTS/UNII	
	A/B/G/N/AC/AX, GPS, WPT & NFC	
Device Manufacturer:	Sony Corporation	
Device Model:	PY7-84558E	
Frequency Range:	2402MHz ~ 7115MHz	
Antenna Type:	Internal	
Antenna Size:	WiFi Main: 27.00 (L) x 4.66 (W) x 8.3 (H) mm	
	WiFi Sub: 16.58 (L) x 31.57 (W) x 2.32 (H) mm	

Duration of Tests:

Sample Receive Date:	2022-12-30
Test Starting Date:	2022-12-30
Test Ending Date:	2023-02-18
Report Issued Date:	2023-03-31

List of Equipment

Equipment Summary Sheet

Equipment Description	Manufacturer	Identification no.	S/N	Current calibration date	Next calibration date
Network Analyzer	Agilont	E5071C	MY46100433	2022/01/12	2023/01/11
Network Analyzer	Agilent	E5071C	W1146100433	2023/01/16	2024/01/15
Sleeve Dipole	MVG	SD740	SD740-07	2022/01/07	2025/01/06
Dual Ridge Horn	MVG	SH800	S0051	2022/11/25	2023/11/24
Stargate-24-L probe array	MVG	Stargate-24-L	MVG	2022/08/26	2023/08/25
Measurement software	MVG	SPM V1.9	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**SCENTIAL PROBLEM AND ALAS WINE Propriet And ALAS



Page No.: 6 of 27

Test Results

WiFi Main Antenna Antenna Gain and Efficiency

Antenna Gam and Emclency		
Freq(MHz)	Peak Gain (dBi)	Efficiency
2402	-1.86	18.91%
2441	-0.43	24.57%
2480	-0.77	23.48%
5180	-1.62	11.15%
5240	-0.45	13.32%
5260	-0.29	13.35%
5320	-0.45	14.99%
5500	-0.51	19.50%
5540	-0.26	22.04%
5600	0.37	22.09%
5660	0.53	23.98%
5700	0.35	24.15%
5720	0.38	23.86%
5725	0.27	23.13%
5745	0.38	23.96%
5800	0.00	24.19%
5825	-0.22	23.73%
5850	-0.27	24.29%
5925	-0.36	22.23%

Freq(MHz)	Peak Gain (dBi)	Efficiency
5945	-1.01	21.27%
5955	-1.43	21.97%
6050	-1.68	19.45%
6175	-2.12	15.83%
6300	-1.40	15.56%
6415	-1.30	15.05%
6425	-1.47	15.03%
6435	-1.60	14.87%
6475	-1.68	14.56%
6515	-1.94	14.85%
6525	-2.34	14.21%
6535	-2.33	14.22%
6640	-2.32	15.91%
6760	-2.86	17.04%
6875	-2.61	15.27%
6895	-2.54	15.86%
7000	-3.10	14.14%
7115	-2.82	13.09%
7125	-2.62	13.47%

Maximum Gain

- 2402 MHz – 2480 MHz: -0.43 dBi

- 5180 MHz – 5320 MHz: -0.29 dBi

- 5500 MHz - 5720 MHz: 0.53 dBi

- 5725 MHz – 5850 MHz: 0.38 dBi

- 5955 MHz – 6415 MHz: -1.30 dBi

- 6435 MHz – 6515 MHz: -1.60 dBi

- 6535 MHz – 6875 MHz: -2.32 dBi

- 6895 MHz – 7115 MHz: -2.54 dBi



Page No.: 7 of 27

WiFi Sub Antenna Gain and Efficiency

Gain and Emclency			
Freq(MHz)	Peak Gain (dBi)	Efficiency	
2402	-4.55	10.26%	
2441	-4.44	10.45%	
2480	-5.15	9.11%	
5180	-1.82	12.29%	
5240	-0.57	16.58%	
5260	-0.36	17.70%	
5320	0.61	17.73%	
5500	-0.43	11.61%	
5540	-0.91	11.19%	
5600	-2.42	10.00%	
5660	-3.15	8.80%	
5700	-3.40	8.11%	
5720	-3.56	7.67%	
5725	-3.78	7.19%	
5745	-3.72	7.23%	
5800	-3.92	7.14%	
5825	-4.33	6.51%	
5850	-3.93	6.86%	
5925	-3.88	6.03%	

Freq(MHz)	Peak Gain (dBi)	Efficiency
5945	-4.02	5.75%
5955	-3.98	5.87%
6050	-4.79	5.14%
6175	-4.32	4.83%
6300	-4.27	5.73%
6415	-4.02	6.36%
6425	-4.00	6.31%
6435	-3.83	6.40%
6475	-3.42	6.41%
6515	-2.87	6.69%
6525	-2.90	6.54%
6535	-2.55	6.97%
6640	-2.33	7.67%
6760	-4.32	5.67%
6875	-4.22	5.01%
6895	-4.19	4.36%
7000	-4.33	4.65%
7115	-3.82	4.45%
7125	-3.56	4.66%

Maximum Gain

- 2402 MHz – 2480 MHz: -4.44 dBi

- 5180 MHz - 5320 MHz: 0.61 dBi

- 5500 MHz – 5720 MHz: -0.43 dBi

- 5725 MHz – 5850 MHz: -3.72 dBi

- 5955 MHz – 6415 MHz: -3.98 dBi

- 6435 MHz – 6515 MHz: -2.87 dBi

- 6535 MHz – 6875 MHz: -2.33 dBi

- 6895 MHz – 7115 MHz: -3.82 dBi




Page No.: 8 of 27

Antenna 3D Plot Matrix


All plots in this section show the Gain Total ($Gain\theta + Gain\phi$) with the +x-axis pointing right, +yaxis pointing up, and +z-axis pointing out of the page.

WiFi Main Antenna

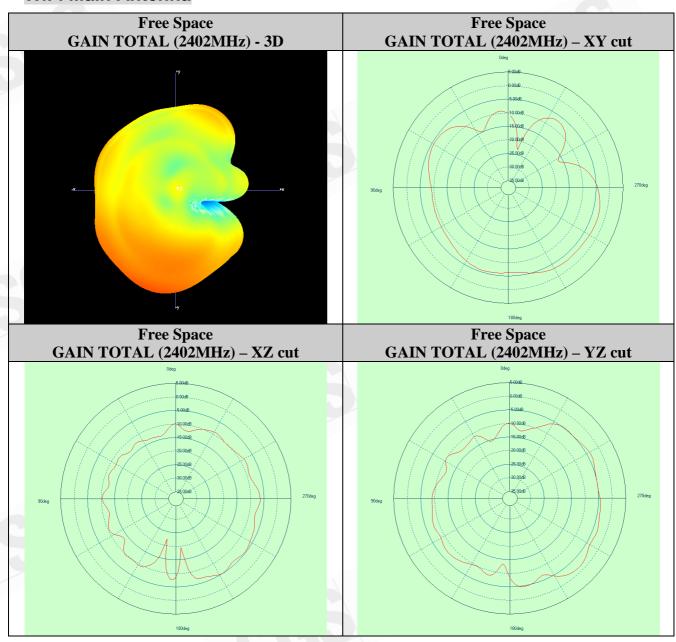




Page No.: 9 of 27

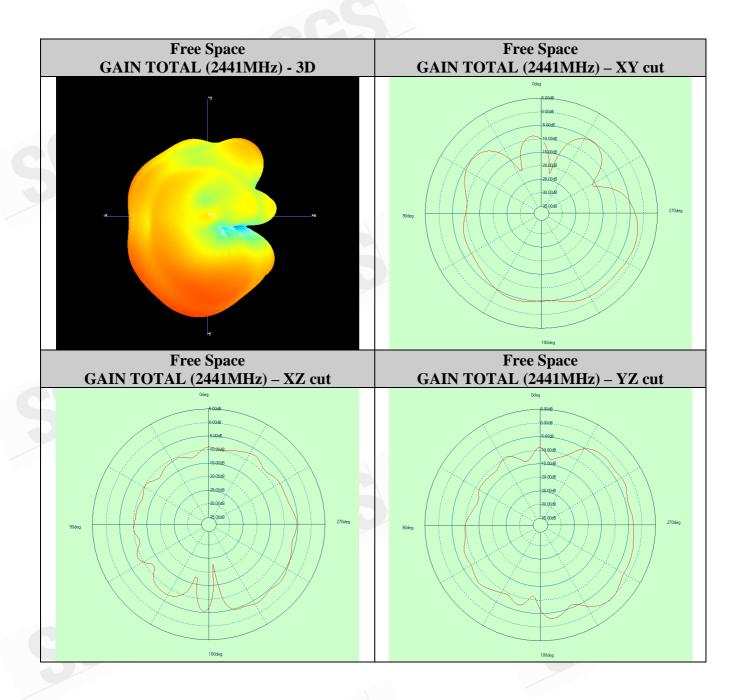




Page No.: 10 of 27

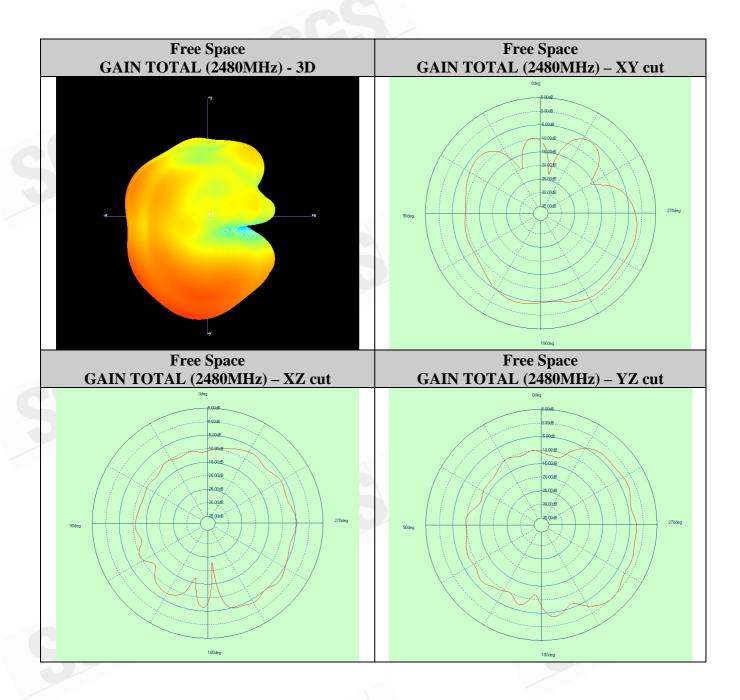




Page No.: 11 of 27

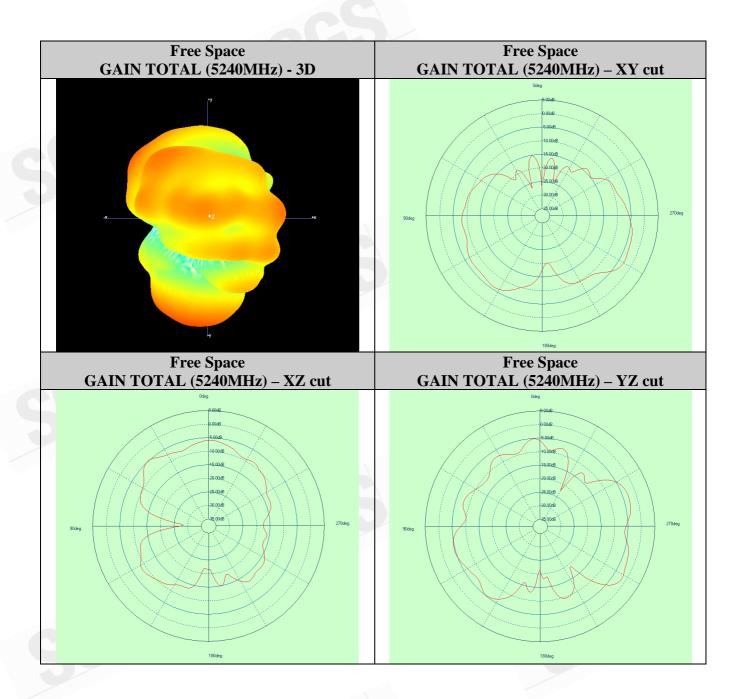




Page No.: 12 of 27

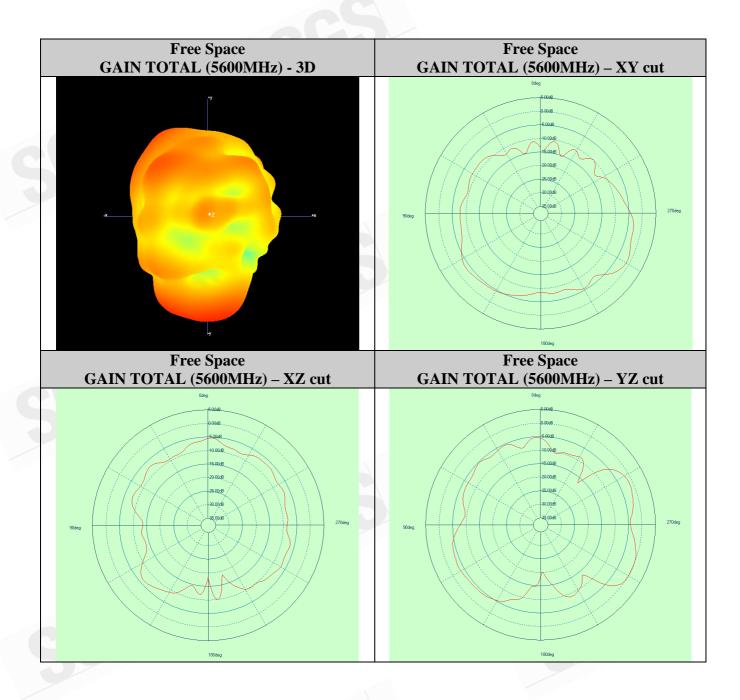




Page No.: 13 of 27

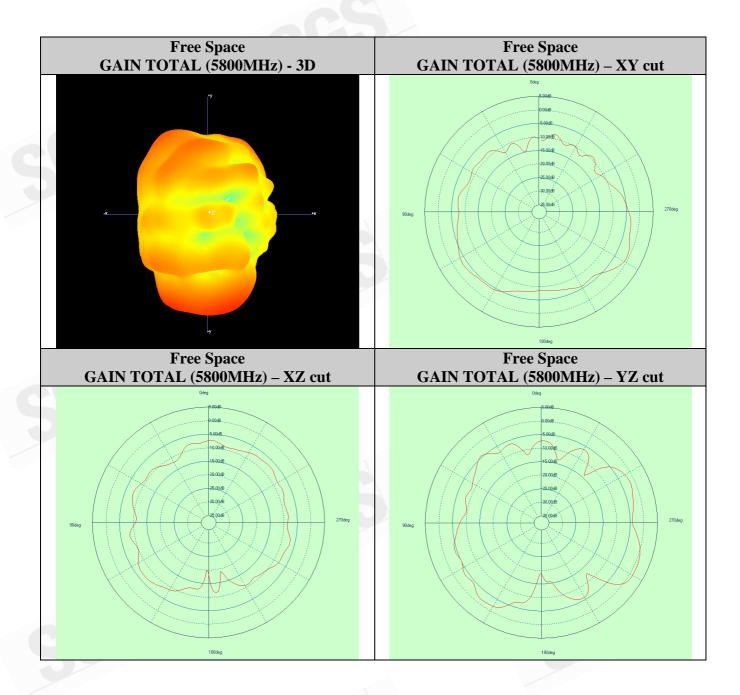




Page No.: 14 of 27

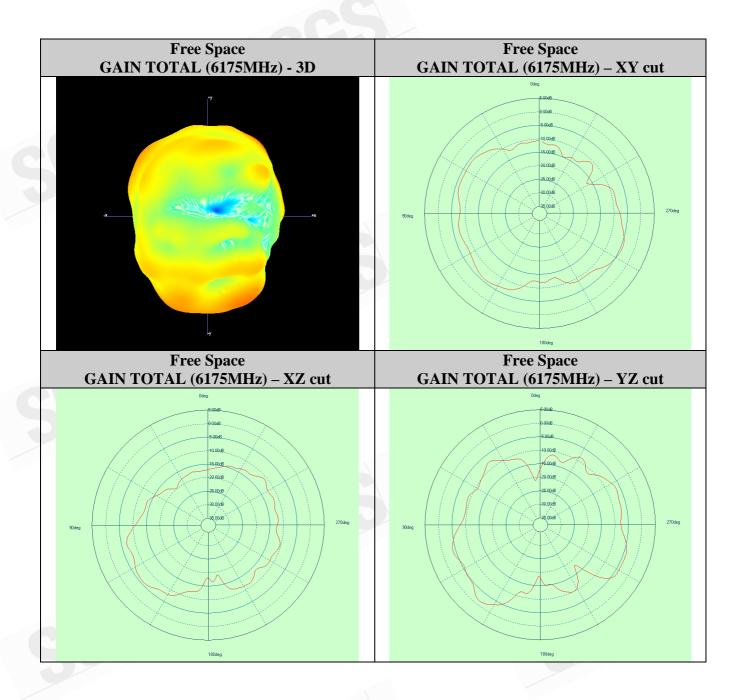




Page No.: 15 of 27

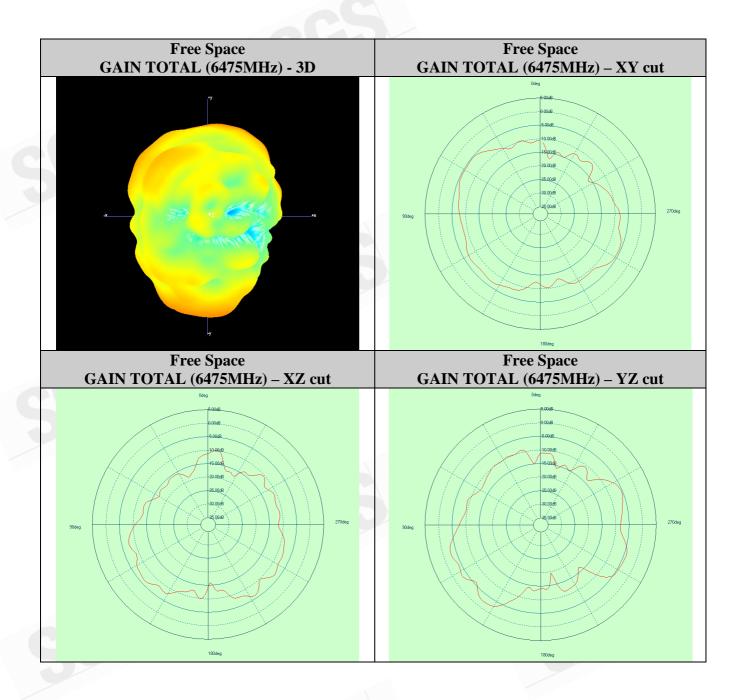




Page No.: 16 of 27

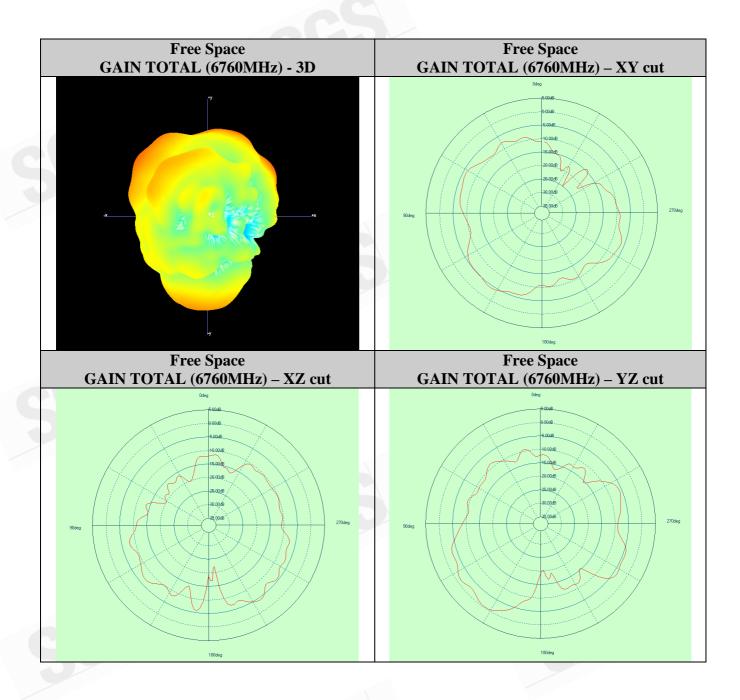




Page No.: 17 of 27

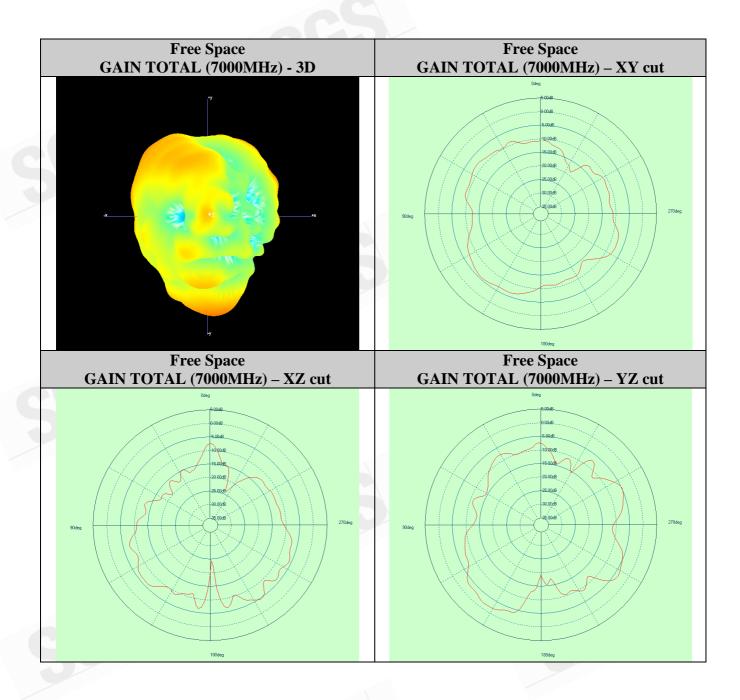




Page No.: 18 of 27

WiFi Sub Antenna

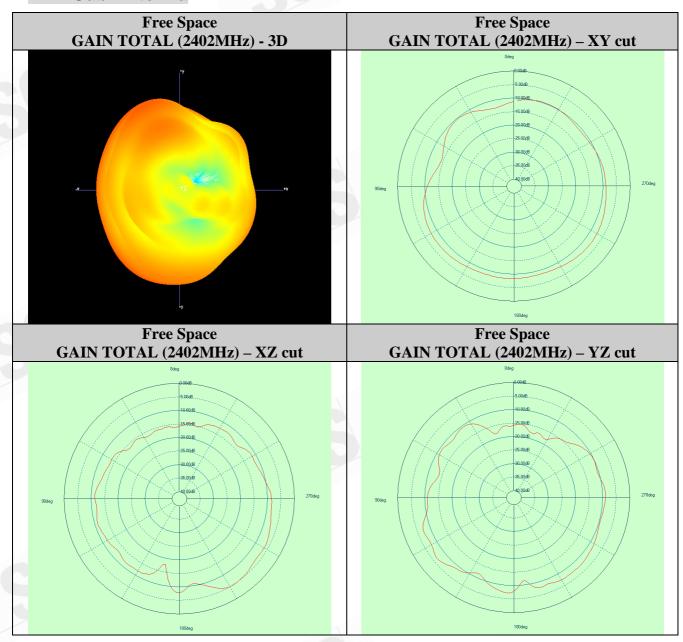




Page No.: 19 of 27

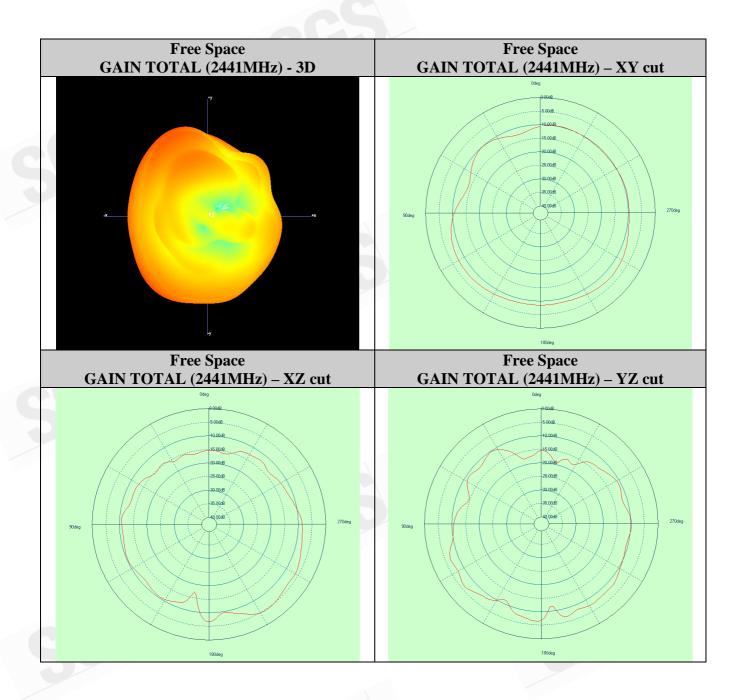




Page No.: 20 of 27

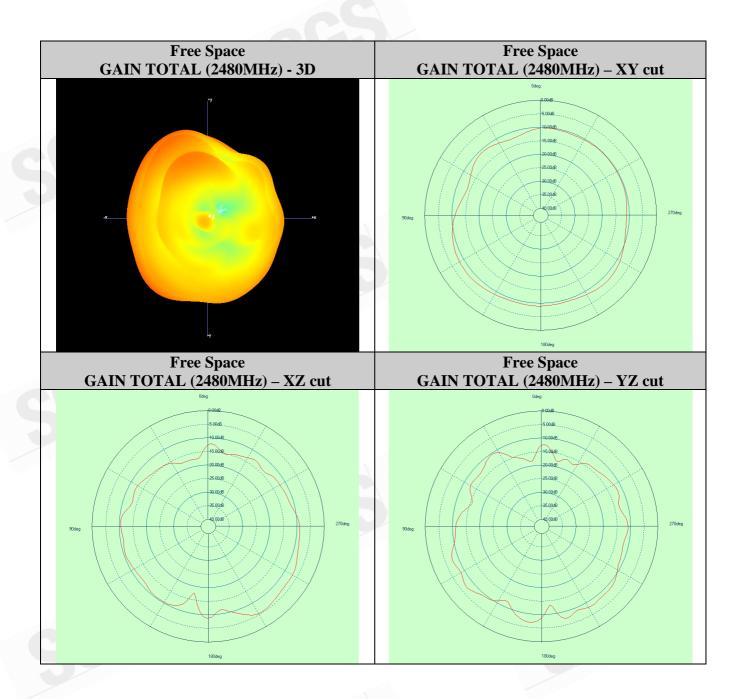




Page No.: 21 of 27

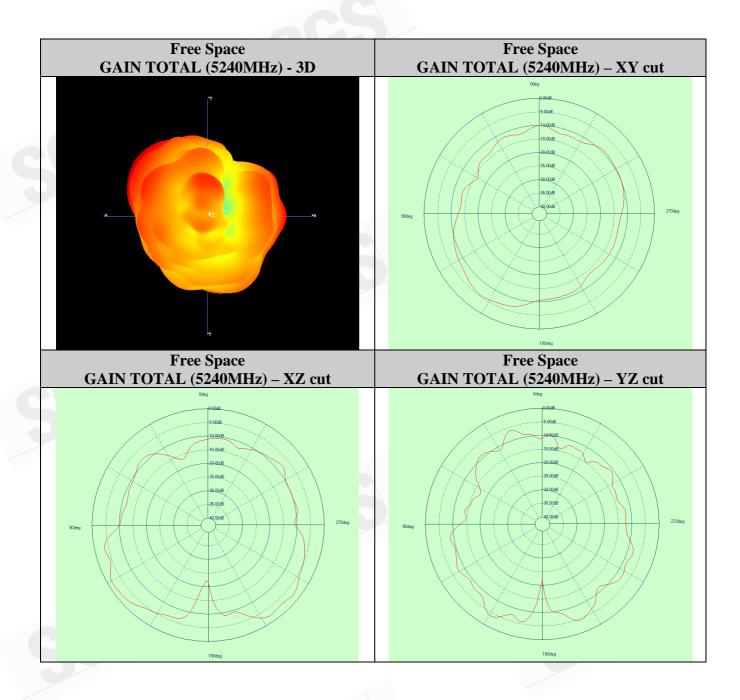




Page No.: 22 of 27

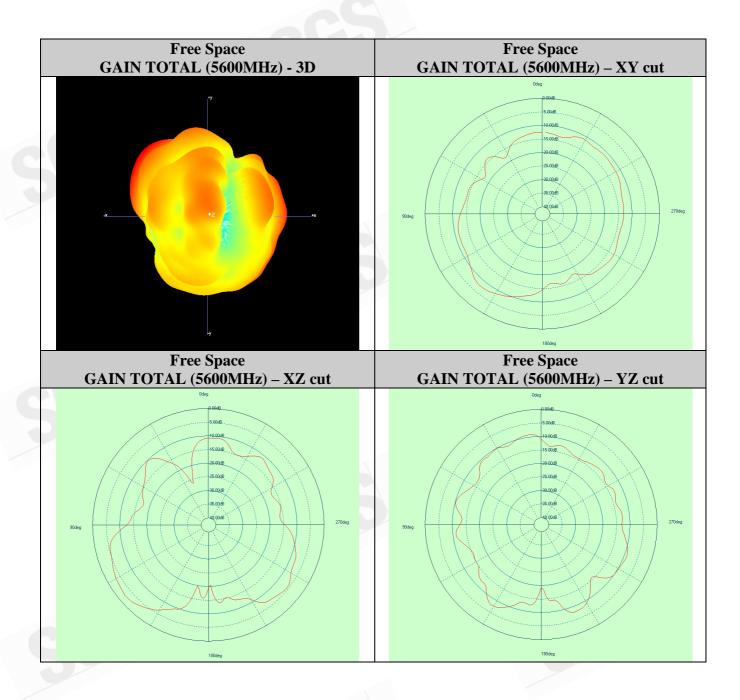




Page No.: 23 of 27

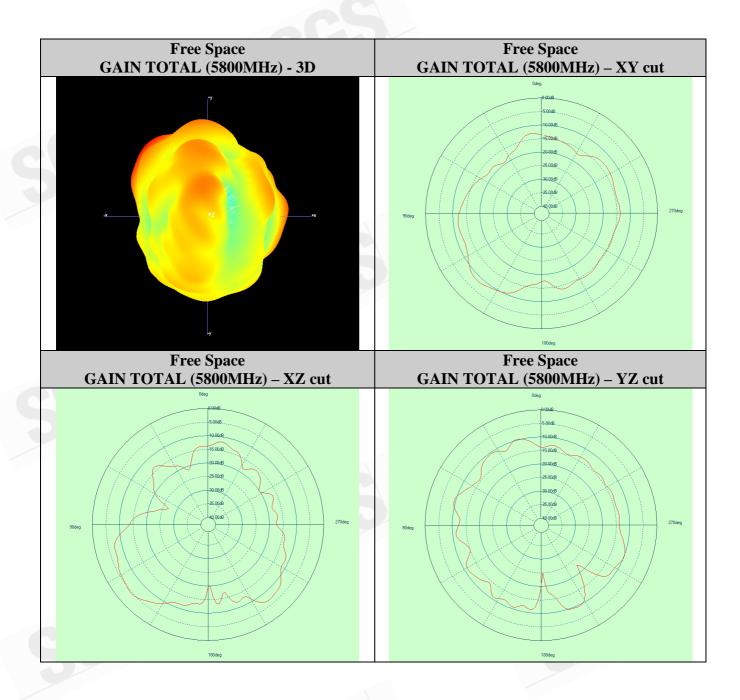




Page No.: 24 of 27

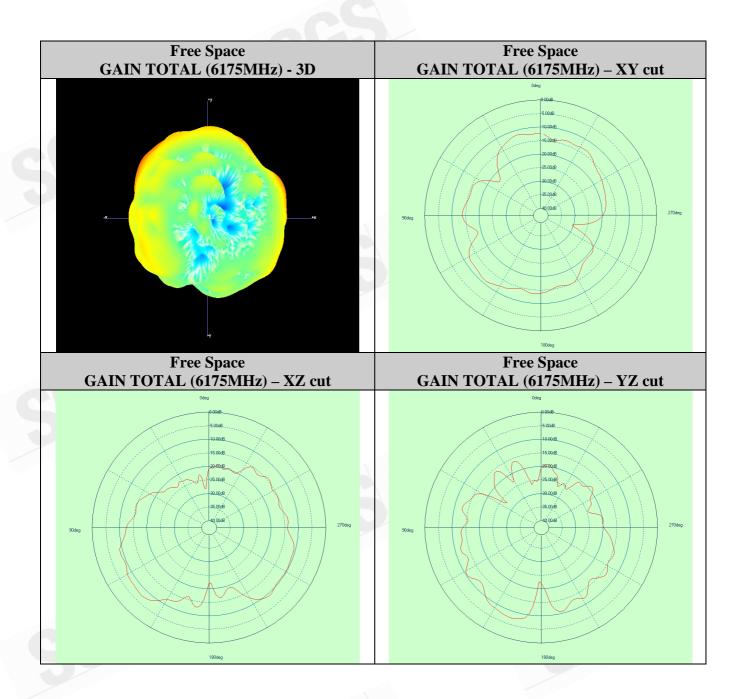




Page No.: 25 of 27

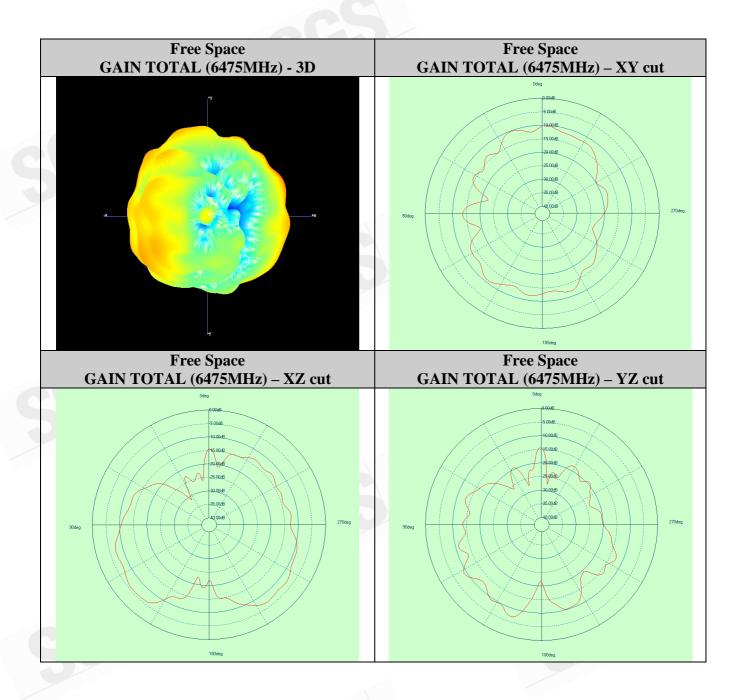




Page No.: 26 of 27

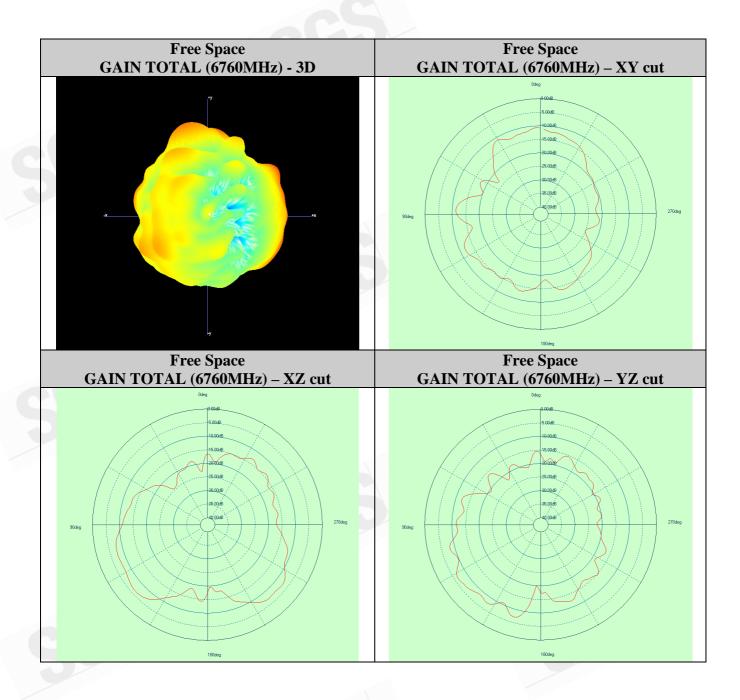



Page No.: 27 of 27

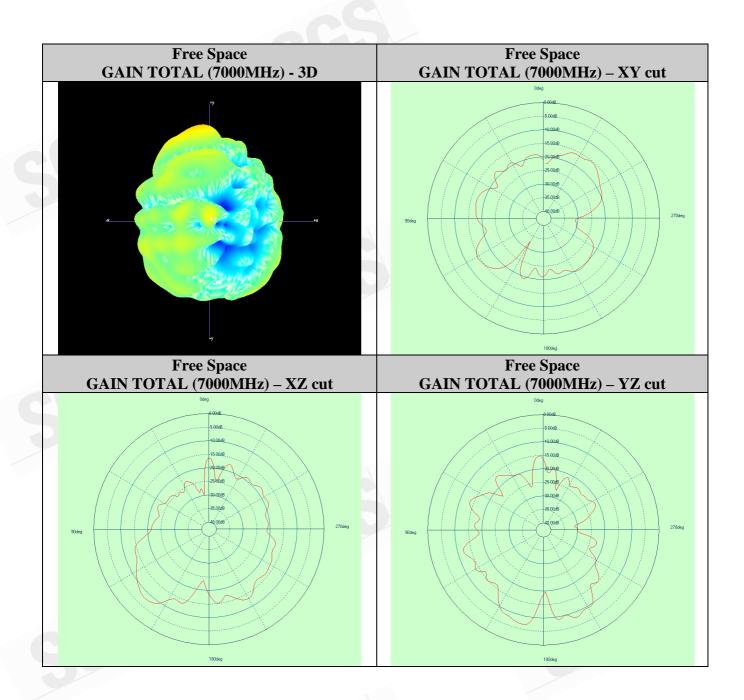

End of Report