



FCC RADIO TEST REPORT

FCC ID : PY7-88421C
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac, GPS and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : 47 CFR Part 2, 22(H), 27

The product was received on Nov. 13, 2019 and testing was started from Dec. 19, 2019 and completed on Jan. 21, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report3

Summary of Test Result4

1 General Description.....5

 1.1 Product Feature of Equipment Under Test5

 1.2 Modification of EUT5

 1.3 Emission Designator6

 1.4 Testing Location7

 1.5 Applicable Standards7

2 Test Configuration of Equipment Under Test.....8

 2.1 Test Mode.....8

 2.2 Connection Diagram of Test System9

 2.3 Support Unit used in test configuration and system.....9

 2.4 Measurement Results Explanation Example9

 2.5 Frequency List of Low/Middle/High Channels.....10

3 Conducted Test Items11

 3.1 Measuring Instruments11

 3.2 Conducted Output Power and EIRP12

 3.3 Peak-to-Average Ratio13

 3.4 Occupied Bandwidth14

 3.5 Conducted Band Edge15

 3.6 Conducted Spurious Emission16

 3.7 Frequency Stability17

4 Radiated Test Items18

 4.1 Measuring Instruments18

 4.2 Radiated Spurious Emission Measurement19

5 List of Measuring Equipment20

6 Uncertainty of Evaluation.....22

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of ERP/EIRP and Radiated Test



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (Band 5)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (Band 12)		
	§27.50 (h)(2)	Equivalent Isotropic Radiated Power (Band 41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4)		
3.3	§27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (Band 4) (Band 5) (Band 12)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (Band 41)		
3.6	§2.1051 §22.917 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (Band 4) (Band 5) (Band 12)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (Band 41)		
3.7	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (Band 4) (Band 5) (Band 12)	Pass	Under limit 14.47 dB at 10620.000 MHz
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (Band 41)		

Remark: The FCC ID: PY7-45077R and FCC ID: PY7-88421C are HW identical, the difference is only SW, and each supported bands are handled by only SW. Only LTE Band 4 and Band 41 are added in this report. The other test results are referenced from FCC ID: PY7-45077R, Sporton Report No: FG901524-02B.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ann Lee



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	Inverted-F Type Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.89	BH95003GJB	Conducted Measurement
	2.2	BH950060JL	Radiated Spurious Emission
	0.89	BH95004WJB	ERP/EIRP Test

Accessory List	
AC Adapter	Model Name : UCH20
	S/N: 3515W45302495
Earphone	Model Name : STH40D
	S/N : N/A
USB Cable	Model Name : UCB20
	S/N : N/A

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Emission Designator

LTE Band 4		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7~1754.3	1M09G7D	-	0.1002	1M09W7D	-	0.0973	1M09W7D	-	0.0762
3	1711.5~1753.5	2M72G7D	-	0.0995	2M73W7D	-	0.0971	2M73W7D	-	0.0757
5	1712.5~1752.5	4M51G7D	-	0.0991	4M50W7D	-	0.0973	4M50W7D	-	0.0759
10	1715.0~1750.0	9M05G7D	0.0043	0.1007	9M03W7D	-	0.0973	9M09W7D	-	0.0764
15	1717.5~1747.5	13M5G7D	-	0.1009	13M5W7D	-	0.0975	13M5W7D	-	0.0771
20	1720.0~1745.0	17M9G7D	-	0.1012	17M9W7D	-	0.0979	17M9W7D	-	0.0766
LTE Band 41		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2547.5~2652.5	4M55G7D	-	0.1637	4M51W7D	-	0.1324	4M52W7D	-	0.1007
10	2550.0~2650.0	9M03G7D	0.0043	0.1585	9M05W7D	-	0.1355	9M05W7D	-	0.1054
15	2552.5~2647.5	13M5G7D	-	0.1690	13M5W7D	-	0.1358	13M5W7D	-	0.1014
20	2555.0~2645.0	17M8G7D	-	0.1629	17M9W7D	-	0.1337	17M9W7D	-	0.0998



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY
Test Engineer	Chester Chen
Temperature	23~24 °C
Relative Humidity	55~58 %

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang, and Chuan Chu
Temperature	22.3~25.3 °C
Relative Humidity	55.7~61.9 %

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	4						v	v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	4	v	v	v	v	v	v	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	4	v	v	v	v	v	v	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	4				v			v					v		v	
	41	-	-		v			v					v		v	
E.I.R.P	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v		v	v	v
Radiated Spurious Emission	4	Worst Case											v	v	v	
	41	Worst Case											v	v	v	
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

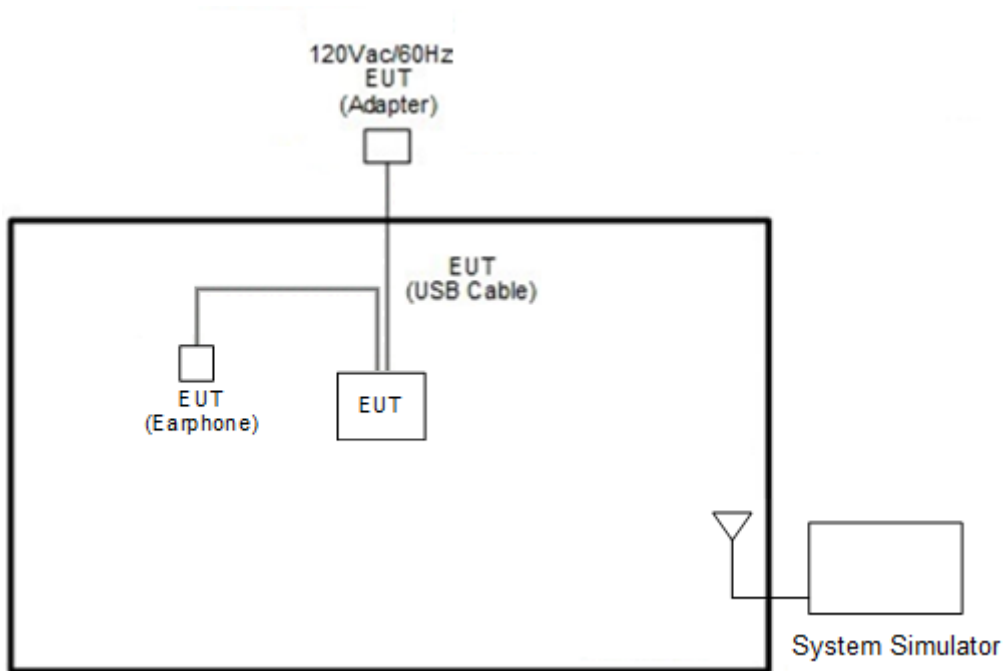

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 41 2545MHz ~ 2655MHz Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40240	40690	41140
	Frequency	2555.0	2600.0	2645.0
15	Channel	40215	40690	41165
	Frequency	2552.5	2600.0	2647.5
10	Channel	40190	40690	41190
	Frequency	2550.0	2600.0	2650.0
5	Channel	40165	40690	41215
	Frequency	2547.5	2600.0	2652.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

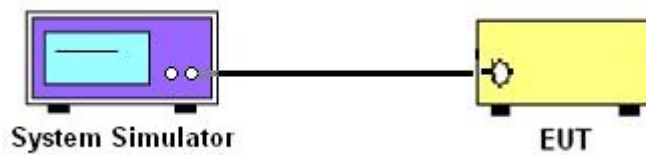

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

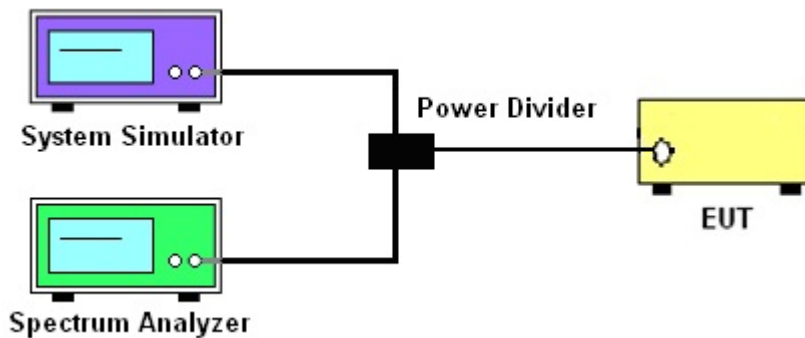

3.1.4 Frequency Stability

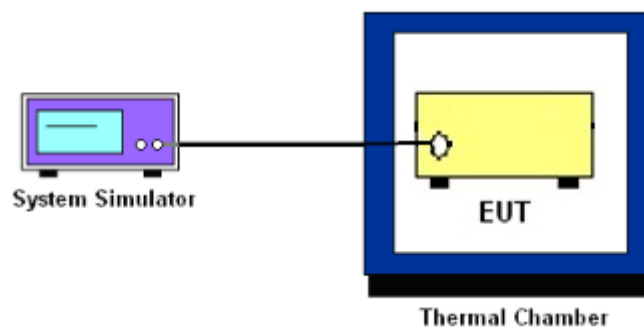

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and EIRP

3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 41

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power $P(\text{Watts})$

For LTE Band 41

The other 40 dB, and 55 dB have additionally applied same calculation above.



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For LTE Band 41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

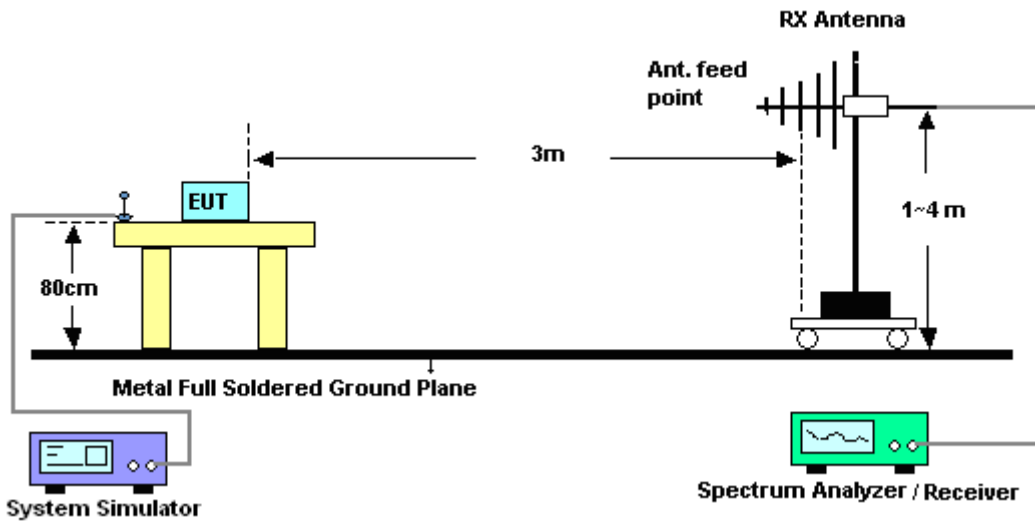

For radiated test above 1GHz

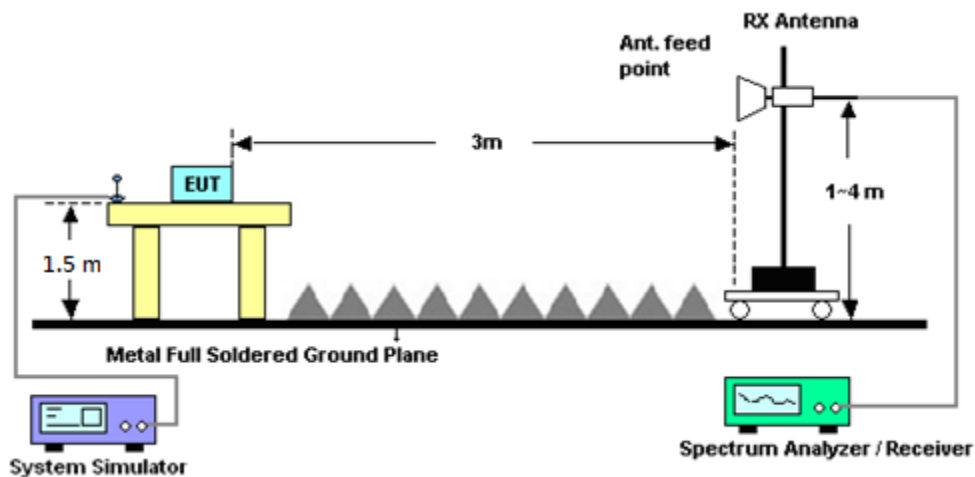

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For LTE Band 41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Jan. 01, 2020~ Jan. 21, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	41912 & 05	30MHz~1GHz	Feb. 12, 2019	Jan. 01, 2020~ Jan. 21, 2020	Feb 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 14, 2019	Jan. 01, 2020~ Jan. 21, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1522	1GHz ~ 18GHz	Sep. 19, 2019	Jan. 01, 2020~ Jan. 21, 2020	Sep. 18, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz ~ 40GHz	Dec. 10, 2019	Jan. 01, 2020~ Jan. 21, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917025 1	18GHz- 40GHz	Nov. 26, 2019	Jan. 01, 2020~ Jan. 21, 2020	Nov. 25, 2020	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2019	Jan. 01, 2020~ Jan. 21, 2020	Mar. 24, 2020	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA00101800- 30-10P	1601180002	1GHz~18GHz	Aug. 01, 2019	Jan. 01, 2020~ Jan. 21, 2020	Jul. 01, 2020	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Jan. 01, 2020~ Jan. 21, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 27, 2019	Jan. 01, 2020~ Jan. 21, 2020	May 26, 2020	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Jan. 19, 2019	Jan. 01, 2020~ Jan. 17, 2020	Jan. 18, 2020	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Jan. 18, 2020	Jan. 18, 2020~ Jan. 21, 2020	Jan. 17, 2021	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 19, 2019	Jan. 01, 2020~ Jan. 21, 2020	Mar. 18, 2020	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Jan. 01, 2020~ Jan. 21, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP161243	N/A	May 11, 2019	Jan. 01, 2020~ Jan. 21, 2020	May 10, 2020	Radiation (03CH12-HY)
Notch Filter	Wainwright	WRCG1710/1 755-1690/1775 -45/7SS	SN2	AWS Band	Nov. 05, 2019	Jan. 01, 2020~ Jan. 21, 2020	Nov. 04, 2020	Radiation (03CH12-HY)
Notch Filter	Wainwright	WRCT2500/25 70-10/40-10SS K	SN1 R	LTE Band 7	Aug. 22, 2019	Jan. 01, 2020~ Jan. 21, 2020	Aug. 21, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Mar. 13, 2019	Jan. 01, 2020~ Jan. 21, 2020	Mar. 12, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 26, 2019	Jan. 01, 2020~ Jan. 21, 2020	Feb. 25, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 26, 2019	Jan. 01, 2020~ Jan. 21, 2020	Feb. 25, 2020	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 01, 2020~ Jan. 21, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jan. 01, 2020~ Jan. 21, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jan. 01, 2020~ Jan. 21, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Jan. 01, 2020~ Jan. 21, 2020	N/A	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station (Measure)	Anritsu	MT8821C	6201664755	GSM / GPRS /WCDMA / LTE FDD/TDD with 44) /LTE-3CC DLCA,2CC ULCA	Mar. 03, 2019	Dec. 19, 2019~Jan. 21, 2020	Mar. 02, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	Dec. 19, 2019~Jan. 21, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 02, 2019	Dec. 19, 2019~Jan. 21, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890089	1V~20V 0.5A~5A	Feb. 21, 2019	Dec. 19, 2019~Jan. 21, 2020	Feb. 20, 2020	Conducted (TH05-HY)
Coupler	Woken	20dB 20W SMA Coupler	WRTA4WAM 2B2	0.4-26.5GHz	Jan. 14, 2019	Dec. 19, 2019	Jan. 13, 2020	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 13, 2020	Jan. 21, 2020	Jan. 12, 2021	Conducted (TH05-HY)
Hygrometer	TECPEL	HTC-1	2	N/A	Mar. 05, 2019	Dec. 19, 2019~Jan. 21, 2020	Mar. 04, 2020	Conducted (TH05-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.24
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.62
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.06
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.76	21.73	21.79
20	1	49		21.82	21.74	21.97
20	1	99		21.65	21.70	21.87
20	50	0		21.31	21.27	21.34
20	50	24		21.24	21.33	21.35
20	50	50		21.21	21.27	21.47
20	100	0		21.24	21.27	21.37
20	1	0	16-QAM	21.63	21.62	21.67
20	1	49		21.70	21.67	21.83
20	1	99		21.54	21.60	21.76
20	50	0		20.45	20.36	20.43
20	50	24		20.34	20.42	20.50
20	50	50		20.31	20.37	20.58
20	100	0		20.32	20.35	20.44
20	1	0	64-QAM	20.54	20.51	20.60
20	1	49		20.64	20.53	20.76
20	1	99		20.46	20.47	20.69
20	50	0		19.45	19.36	19.44
20	50	24		19.35	19.44	19.49
20	50	50		19.30	19.37	19.58
20	100	0		19.34	19.35	19.46
15	1	0	QPSK	21.79	21.80	21.85
15	1	37		21.83	21.80	21.96
15	1	74		21.69	21.76	21.92
15	36	0		21.37	21.29	21.41
15	36	20		21.38	21.32	21.53
15	36	39		21.27	21.29	21.51
15	75	0		21.25	21.31	21.36
15	1	0	16-QAM	21.66	21.63	21.61
15	1	37		21.73	21.66	21.81
15	1	74		21.57	21.59	21.68
15	36	0		20.45	20.41	20.38
15	36	20		20.50	20.42	20.50
15	36	39		20.37	20.38	20.61
15	75	0		20.34	20.41	20.47
15	1	0	64-QAM	20.59	20.57	20.56
15	1	37		20.65	20.60	20.79
15	1	74		20.46	20.52	20.70
15	36	0		19.48	19.42	19.51
15	36	20		19.54	19.45	19.65
15	36	39		19.39	19.42	19.64
15	75	0		19.34	19.41	19.48



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.81	21.82	21.95
10	1	25		21.86	21.84	21.91
10	1	49		21.81	21.79	21.86
10	25	0		21.36	21.36	21.44
10	25	12		21.39	21.36	21.46
10	25	25		21.38	21.33	21.39
10	50	0		21.38	21.33	21.41
10	1	0	16-QAM	21.69	21.72	21.80
10	1	25		21.72	21.68	21.80
10	1	49		21.71	21.66	21.74
10	25	0		20.46	20.41	20.54
10	25	12		20.49	20.47	20.56
10	25	25		20.47	20.43	20.50
10	50	0		20.48	20.43	20.51
10	1	0	64-QAM	20.60	20.63	20.75
10	1	25		20.65	20.61	20.73
10	1	49		20.64	20.60	20.69
10	25	0		19.47	19.42	19.55
10	25	12		19.51	19.48	19.58
10	25	25		19.49	19.43	19.52
10	50	0		19.49	19.46	19.53
5	1	0	QPSK	21.79	21.81	21.87
5	1	12		21.84	21.82	21.88
5	1	24		21.78	21.76	21.84
5	12	0		21.37	21.33	21.44
5	12	7		21.39	21.40	21.45
5	12	13		21.34	21.33	21.40
5	25	0		21.34	21.35	21.38
5	1	0	16-QAM	21.65	21.63	21.76
5	1	12		21.70	21.67	21.80
5	1	24		21.66	21.64	21.75
5	12	0		20.46	20.43	20.52
5	12	7		20.49	20.48	20.56
5	12	13		20.44	20.45	20.54
5	25	0		20.44	20.40	20.49
5	1	0	64-QAM	20.62	20.61	20.72
5	1	12		20.64	20.60	20.71
5	1	24		20.60	20.56	20.68
5	12	0		19.51	19.49	19.60
5	12	7		19.54	19.50	19.63
5	12	13		19.49	19.49	19.59
5	25	0		19.45	19.42	19.53



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	21.78	21.79	21.88
3	1	8		21.82	21.80	21.90
3	1	14		21.79	21.76	21.86
3	8	0		21.31	21.33	21.43
3	8	4		21.34	21.33	21.43
3	8	7		21.34	21.32	21.39
3	15	0		21.33	21.35	21.40
3	1	0	16-QAM	21.63	21.61	21.75
3	1	8		21.68	21.65	21.79
3	1	14		21.65	21.58	21.71
3	8	0		20.46	20.45	20.55
3	8	4		20.50	20.49	20.62
3	8	7		20.49	20.45	20.55
3	15	0		20.45	20.41	20.51
3	1	0	64-QAM	20.57	20.56	20.70
3	1	8		20.63	20.60	20.71
3	1	14		20.59	20.56	20.67
3	8	0		19.47	19.46	19.56
3	8	4		19.50	19.51	19.62
3	8	7		19.51	19.45	19.55
3	15	0		19.45	19.41	19.51
1.4	1	0	QPSK	21.60	21.74	21.83
1.4	1	3		21.70	21.82	21.91
1.4	1	5		21.59	21.73	21.84
1.4	3	0		21.64	21.74	21.86
1.4	3	1		21.68	21.82	21.93
1.4	3	3		21.65	21.77	21.87
1.4	6	0		21.13	21.28	21.38
1.4	1	0	16-QAM	21.48	21.60	21.71
1.4	1	3		21.57	21.70	21.80
1.4	1	5		21.47	21.61	21.70
1.4	3	0		21.27	21.35	21.54
1.4	3	1		21.32	21.45	21.56
1.4	3	3		21.29	21.39	21.53
1.4	6	0		20.30	20.41	20.54
1.4	1	0	64-QAM	20.42	20.55	20.66
1.4	1	3		20.50	20.59	20.74
1.4	1	5		20.40	20.53	20.64
1.4	3	0		20.42	20.52	20.65
1.4	3	1		20.46	20.57	20.68
1.4	3	3		20.39	20.53	20.63
1.4	6	0		19.24	19.38	19.47



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	24.18	24.19	24.25
20	1	49		24.16	24.21	24.29
20	1	99		24.24	24.17	24.31
20	50	0		22.32	22.44	22.26
20	50	24		22.31	22.33	22.26
20	50	50		22.29	22.30	22.24
20	100	0		22.31	22.25	22.20
20	1	0	16-QAM	23.26	23.39	23.38
20	1	49		23.24	23.32	23.45
20	1	99		23.33	23.30	23.37
20	50	0		21.32	21.46	21.38
20	50	24		21.41	21.44	21.35
20	50	50		21.41	21.45	21.42
20	100	0		21.39	21.23	21.33
20	1	0	64-QAM	22.00	22.05	22.16
20	1	49		22.00	21.99	22.18
20	1	99		22.10	22.15	22.11
20	50	0		20.30	20.37	20.38
20	50	24		20.40	20.46	20.35
20	50	50		20.39	20.38	20.41
20	100	0		20.39	20.24	20.33
15	1	0	QPSK	24.21	24.32	24.47
15	1	37		24.18	24.35	24.41
15	1	74		24.38	24.44	24.42
15	36	0		22.21	22.31	22.34
15	36	20		22.21	22.41	22.31
15	36	39		22.27	22.27	22.26
15	75	0		22.30	22.25	22.32
15	1	0	16-QAM	23.27	23.29	23.52
15	1	37		23.24	23.28	23.44
15	1	74		23.44	23.42	23.44
15	36	0		21.27	21.29	21.39
15	36	20		21.30	21.47	21.41
15	36	39		21.32	21.39	21.37
15	75	0		21.41	21.36	21.44
15	1	0	64-QAM	22.02	22.10	22.25
15	1	37		21.99	22.06	22.16
15	1	74		22.15	22.11	22.17
15	36	0		20.28	20.51	20.44
15	36	20		20.32	20.52	20.46
15	36	39		20.38	20.35	20.41
15	75	0		20.40	20.33	20.50



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	24.19	24.05	24.15
10	1	25		23.99	24.10	24.13
10	1	49		24.01	24.18	24.14
10	25	0		22.08	22.25	22.23
10	25	12		22.13	22.12	22.24
10	25	25		22.08	22.17	22.23
10	50	0		22.12	22.28	22.27
10	1	0	16-QAM	23.28	23.34	23.51
10	1	25		23.24	23.45	23.49
10	1	49		23.26	23.37	23.47
10	25	0		21.24	21.35	21.44
10	25	12		21.24	21.40	21.45
10	25	25		21.22	21.38	21.41
10	50	0		21.19	21.32	21.41
10	1	0	64-QAM	22.15	22.27	22.42
10	1	25		22.17	22.24	22.39
10	1	49		22.16	22.15	22.35
10	25	0		20.25	20.44	20.49
10	25	12		20.28	20.46	20.52
10	25	25		20.26	20.31	20.43
10	50	0		20.21	20.24	20.41
5	1	0	QPSK	24.29	24.24	24.33
5	1	12		24.28	24.28	24.33
5	1	24		24.24	24.15	24.25
5	12	0		22.28	22.38	22.30
5	12	7		22.33	22.24	22.39
5	12	13		22.29	22.36	22.35
5	25	0		22.26	22.38	22.28
5	1	0	16-QAM	23.33	23.37	23.40
5	1	12		23.37	23.41	23.38
5	1	24		23.37	23.29	23.36
5	12	0		21.33	21.35	21.44
5	12	7		21.37	21.34	21.45
5	12	13		21.35	21.28	21.37
5	25	0		21.37	21.24	21.46
5	1	0	64-QAM	22.10	22.09	22.22
5	1	12		22.14	22.17	22.20
5	1	24		22.13	22.02	22.19
5	12	0		20.39	20.30	20.42
5	12	7		20.40	20.48	20.50
5	12	13		20.39	20.33	20.49
5	25	0		20.39	20.51	20.54



LTE Band 4


Peak-to-Average Ratio

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.74	4.55	5.22	5.83	PASS
Middle CH	3.68	4.43	5.25	5.71	
Highest CH	3.54	4.55	5.19	5.86	
Mode	LTE Band 4 / 20MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	6.70	6.46	-	-	PASS
Middle CH	6.26	6.38	-	-	
Highest CH	6.26	6.43	-	-	




LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

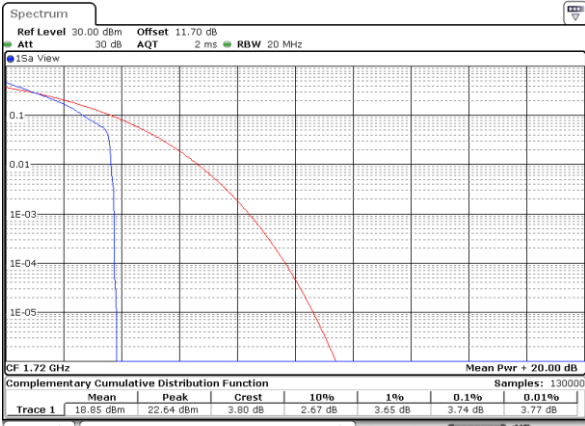


Date: 19_DEC.2019 14:52:37

Lowest Channel / Full RB

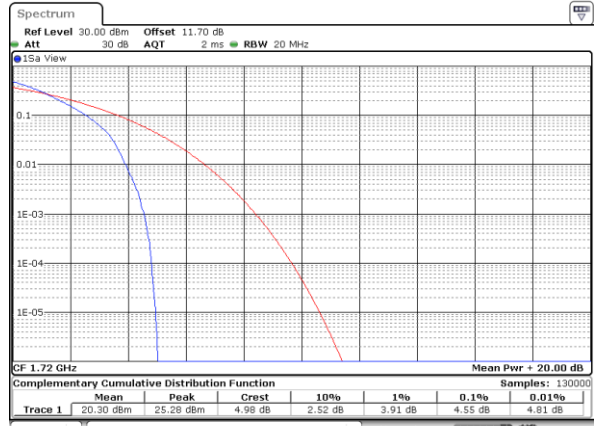


Date: 19_DEC.2019 14:52:52

Middle Channel / 1RB

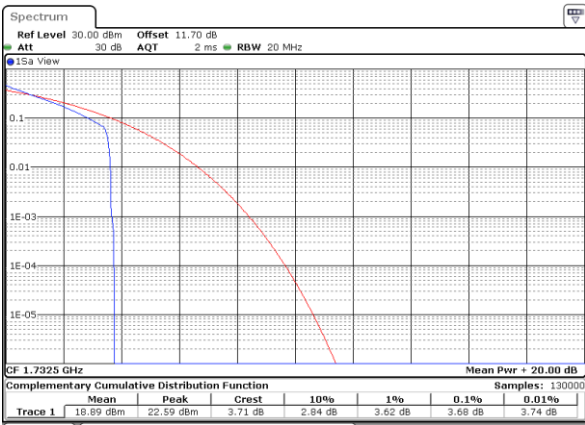


Date: 19_DEC.2019 14:53:07

Middle Channel / Full RB

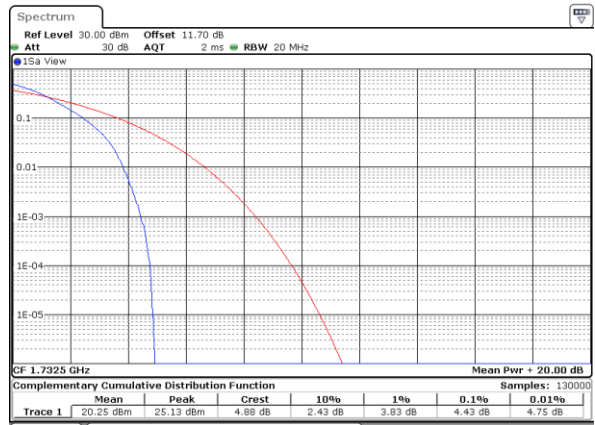


Date: 19_DEC.2019 14:55:48

Highest Channel / 1RB

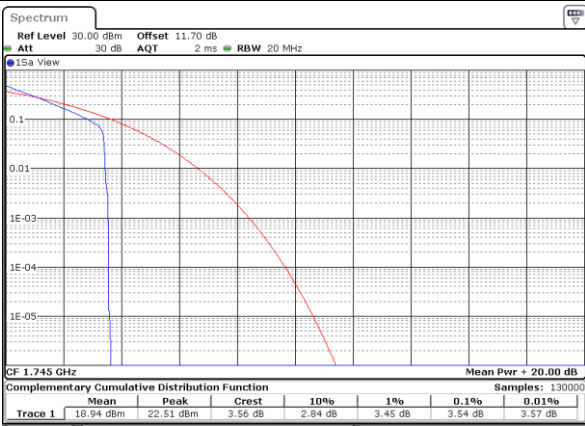

Date: 19_DEC.2019 14:56:01

Highest Channel / Full RB

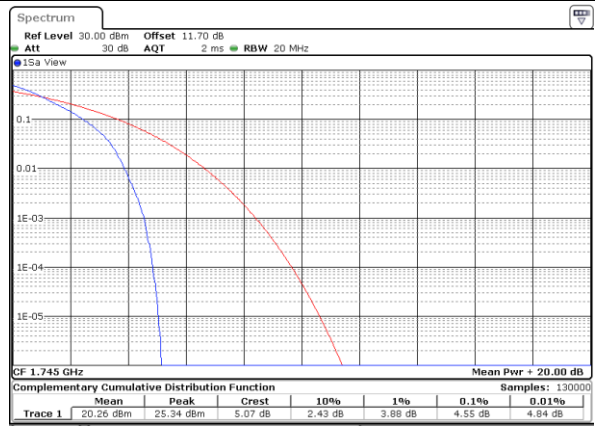


Date: 19_DEC.2019 14:56:14




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

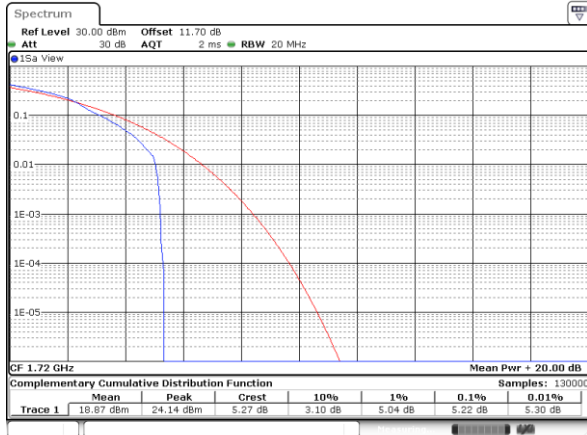


Date: 19_DEC.2019 14:51:14

Lowest Channel / Full RB

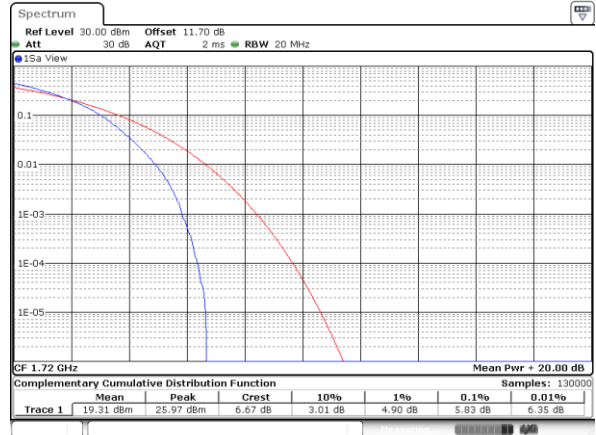


Date: 19_DEC.2019 14:51:28

Middle Channel / 1RB

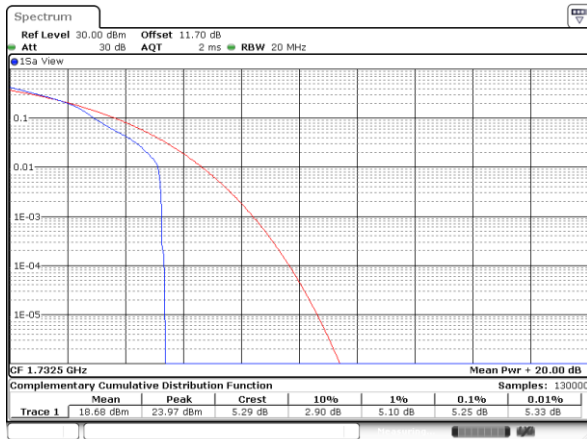


Date: 19_DEC.2019 14:51:41

Middle Channel / Full RB

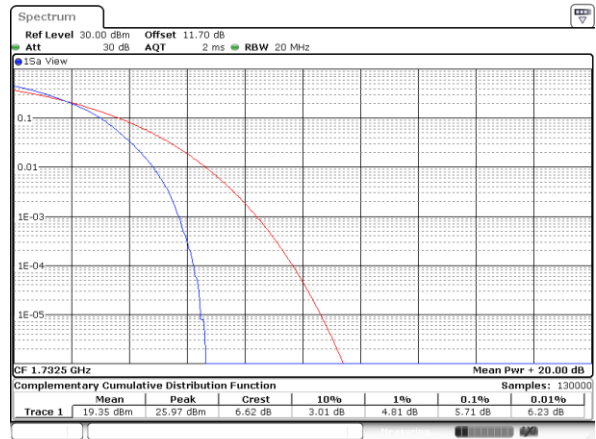


Date: 19_DEC.2019 14:51:55

Highest Channel / 1RB

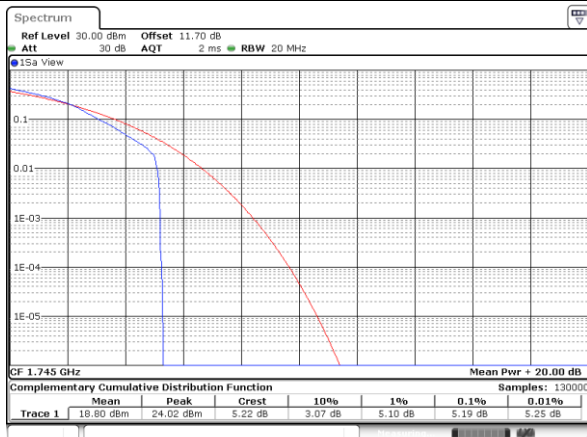

Date: 19_DEC.2019 14:52:08

Highest Channel / Full RB

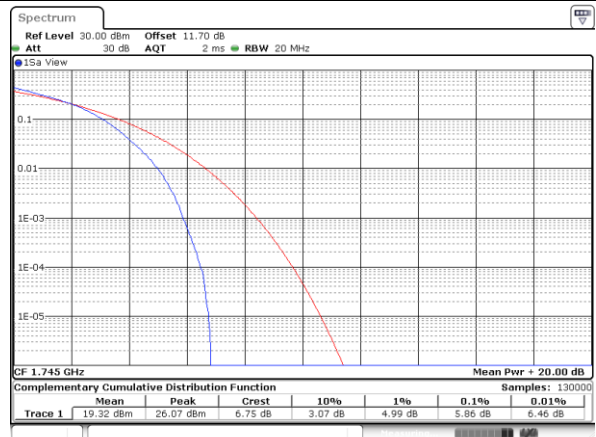


Date: 19_DEC.2019 14:52:24




LTE Band 4 / 20MHz / 64QAM

Lowest Channel / 1RB

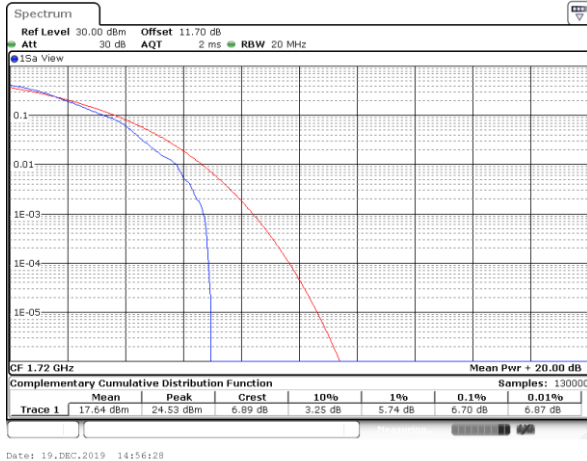


Date: 19_DEC.2019 14:56:20

Lowest Channel / Full RB

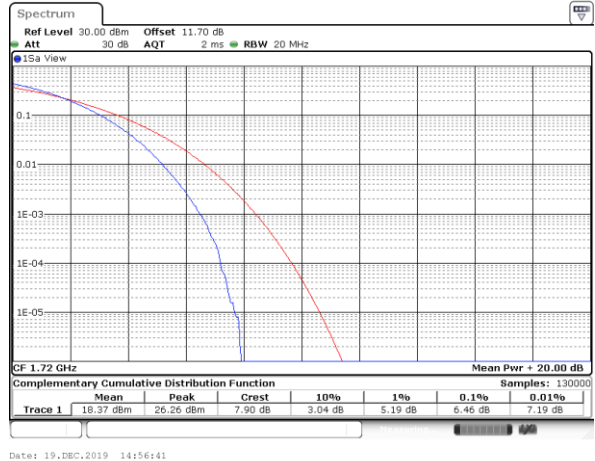


Date: 19_DEC.2019 14:56:41

Middle Channel / 1RB

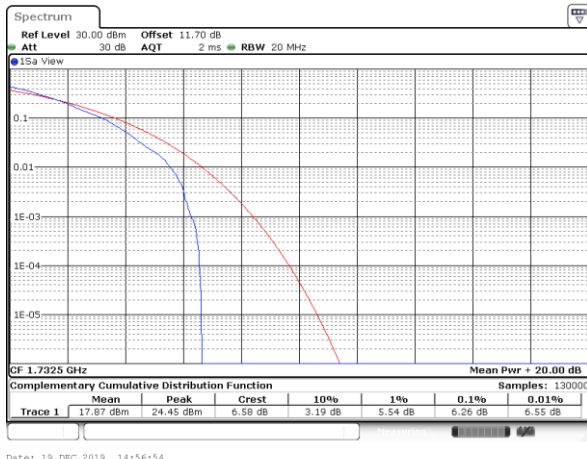


Date: 19_DEC.2019 14:56:54

Middle Channel / Full RB

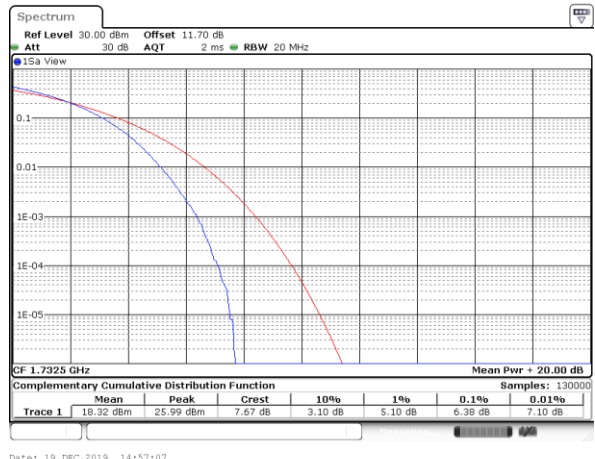


Date: 19_DEC.2019 14:57:07

Highest Channel / 1RB

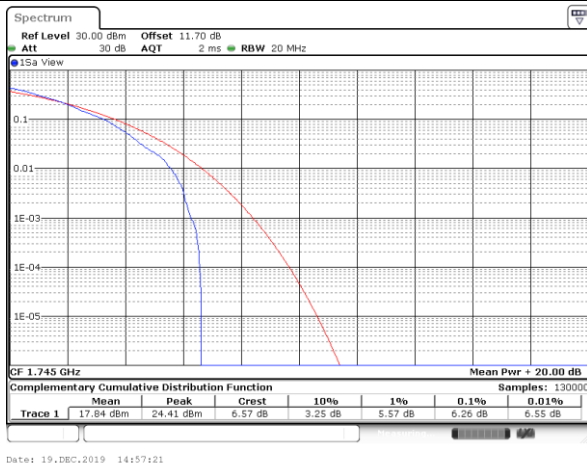

Date: 19_DEC.2019 14:57:21

Highest Channel / Full RB

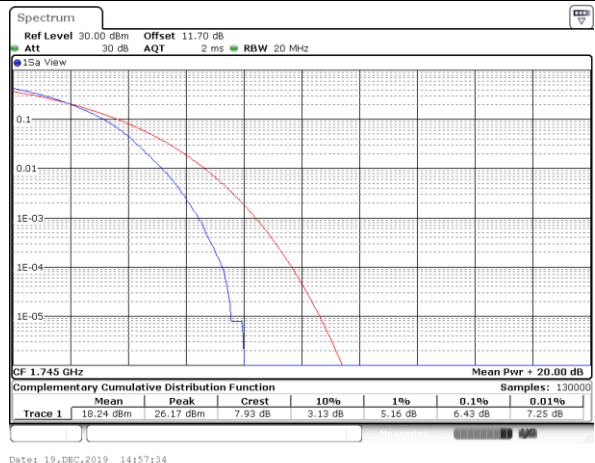

Date: 19_DEC.2019 14:57:34




26dB Bandwidth

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.23	3.00	3.05	4.96	4.88	9.87	9.75	14.30	14.33	18.66	19.06
Middle CH	1.23	1.22	3.02	3.05	4.84	4.92	9.97	9.79	14.27	14.21	18.90	18.86
Highest CH	1.23	1.23	2.99	3.03	4.88	4.90	9.71	9.83	14.33	14.27	18.82	18.70
Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.23	-	2.99	-	4.86	-	9.97	-	14.18	-	19.18	-
Middle CH	1.23	-	3.02	-	4.91	-	9.79	-	14.45	-	18.90	-
Highest CH	1.22	-	3.02	-	4.87	-	9.89	-	14.15	-	19.10	-




LTE Band 4

Lowest Channel / 1.4MHz / QPSK

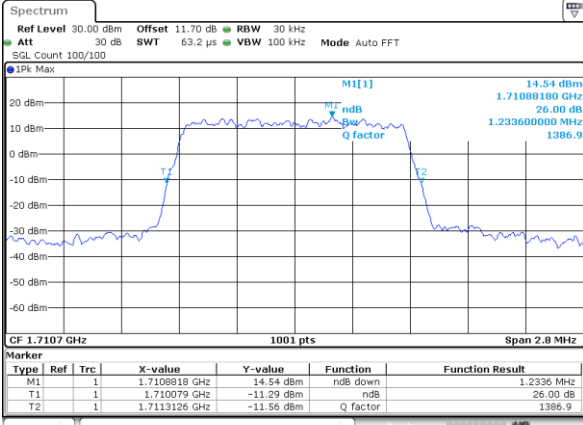


Date: 19_DEC.2019 11:50:13

Lowest Channel / 1.4MHz / 16QAM

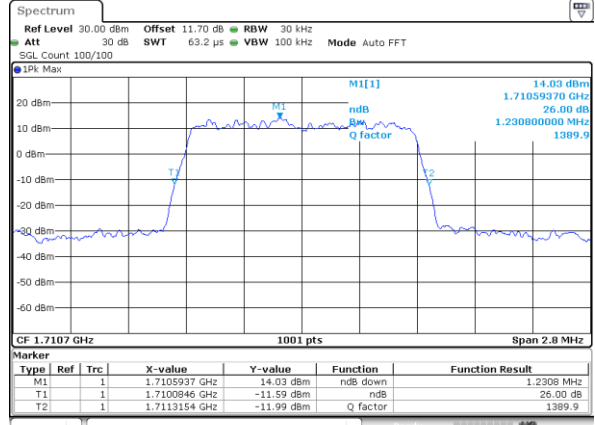


Date: 19_DEC.2019 11:50:27

Middle Channel / 1.4MHz / QPSK

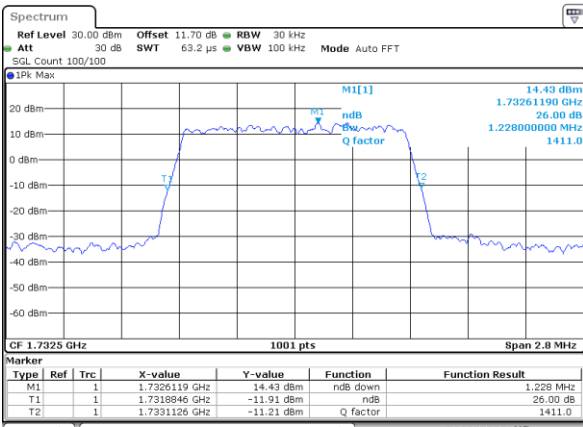


Date: 19_DEC.2019 11:58:45

Middle Channel / 1.4MHz / 16QAM

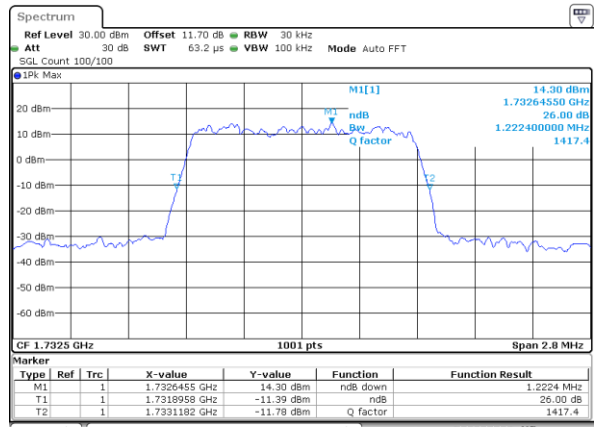


Date: 19_DEC.2019 11:58:58

Highest Channel / 1.4MHz / QPSK

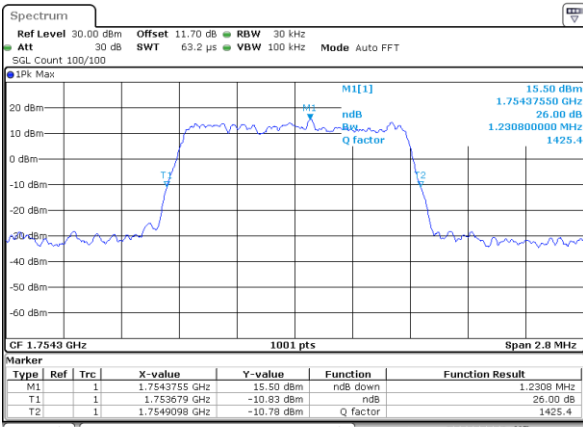

Date: 19_DEC.2019 12:01:49

Highest Channel / 1.4MHz / 16QAM

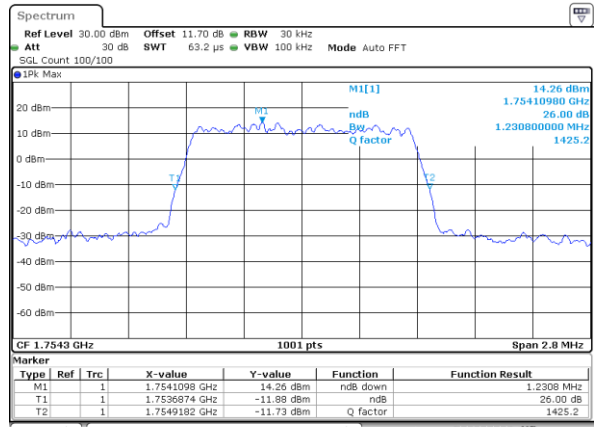


Date: 19_DEC.2019 12:02:03




LTE Band 4

Lowest Channel / 3MHz / QPSK

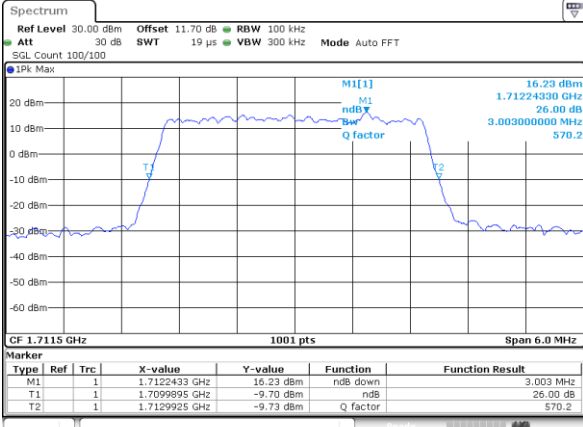


Date: 19, DEC, 2019 12:20:22

Lowest Channel / 3MHz / 16QAM

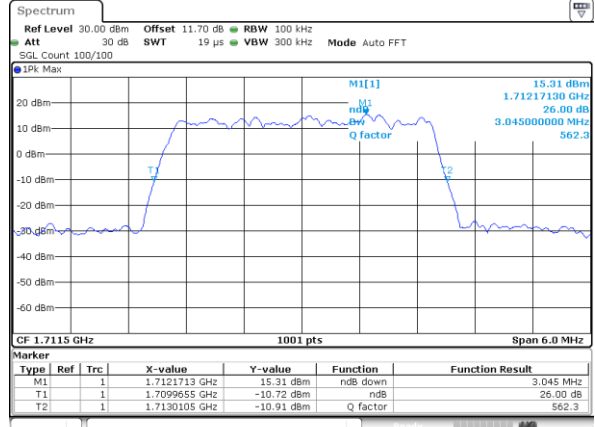


Date: 19, DEC, 2019 12:20:36

Middle Channel / 3MHz / QPSK

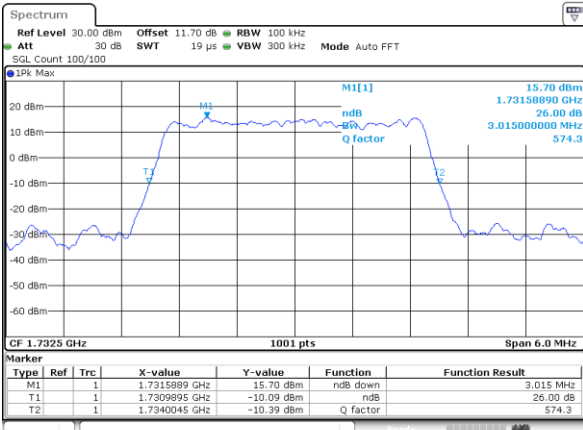


Date: 19, DEC, 2019 12:28:52

Middle Channel / 3MHz / 16QAM

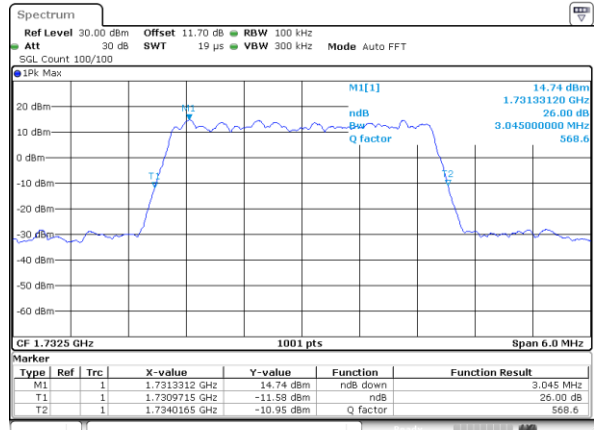


Date: 19, DEC, 2019 12:29:05

Highest Channel / 3MHz / QPSK

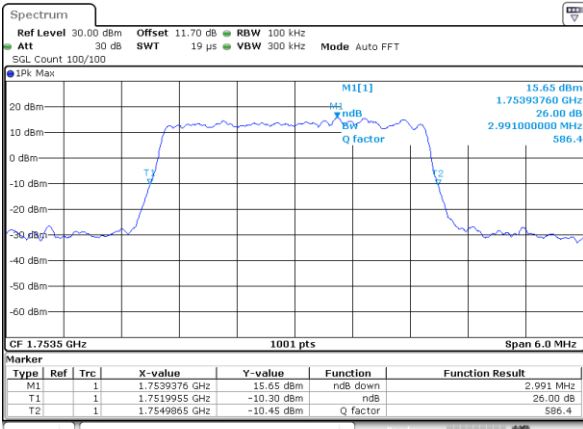

Date: 19, DEC, 2019 12:31:55

Highest Channel / 3MHz / 16QAM

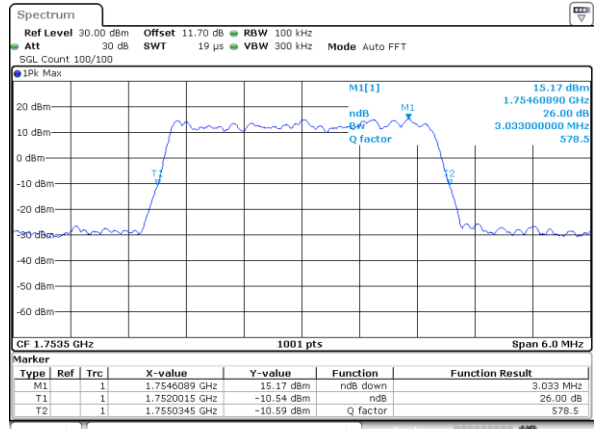


Date: 19, DEC, 2019 12:32:09




LTE Band 4

Lowest Channel / 5MHz / QPSK

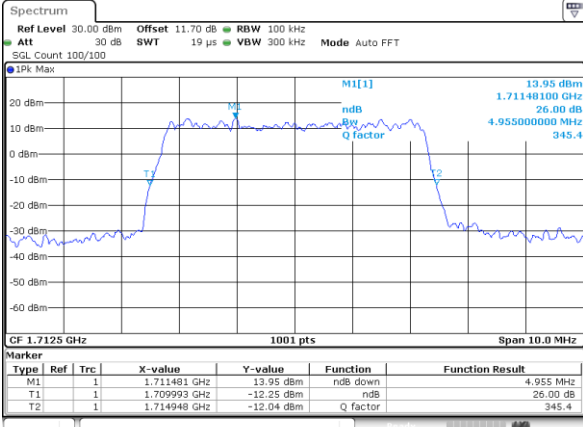


Date: 19_DEC.2019 13:00:20

Lowest Channel / 5MHz / 16QAM

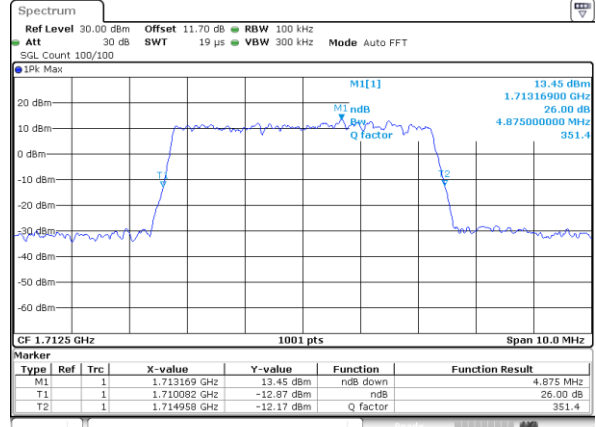


Date: 19_DEC.2019 13:00:42

Middle Channel / 5MHz / QPSK

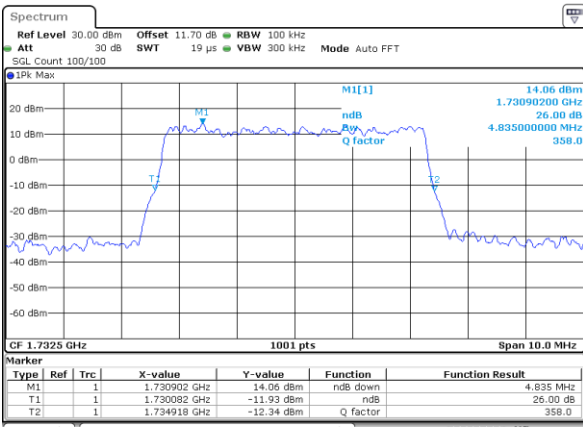


Date: 19_DEC.2019 13:08:57

Middle Channel / 5MHz / 16QAM

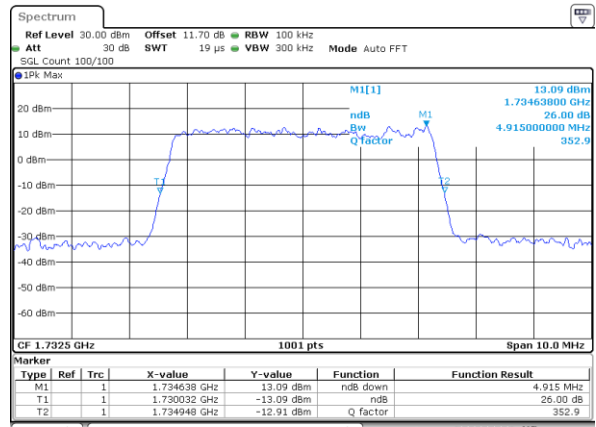


Date: 19_DEC.2019 13:09:10

Highest Channel / 5MHz / QPSK

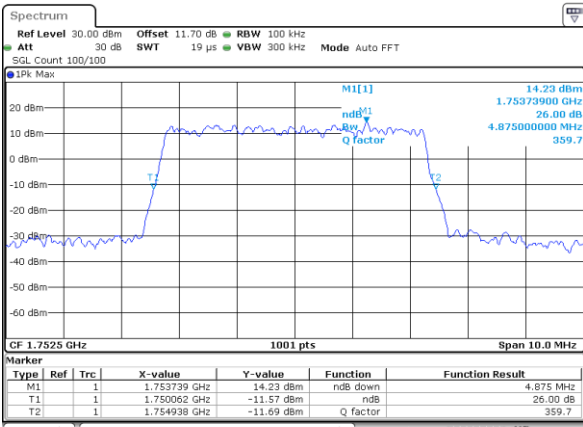

Date: 19_DEC.2019 13:12:01

Highest Channel / 5MHz / 16QAM

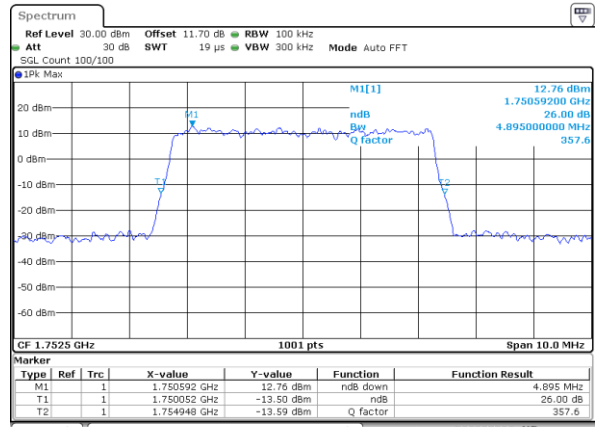


Date: 19_DEC.2019 13:12:15




LTE Band 4

Lowest Channel / 10MHz / QPSK

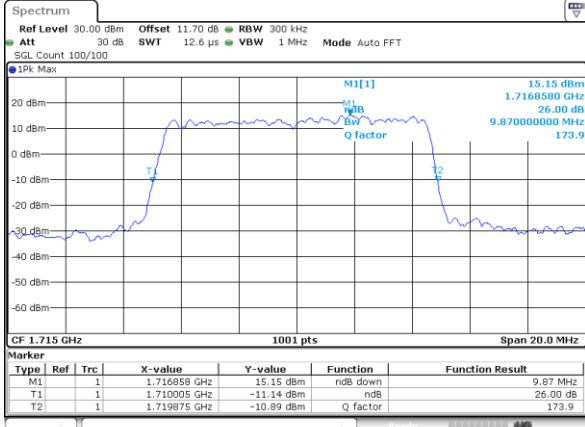


Date: 19, DEC, 2019 13:20:13

Lowest Channel / 10MHz / 16QAM

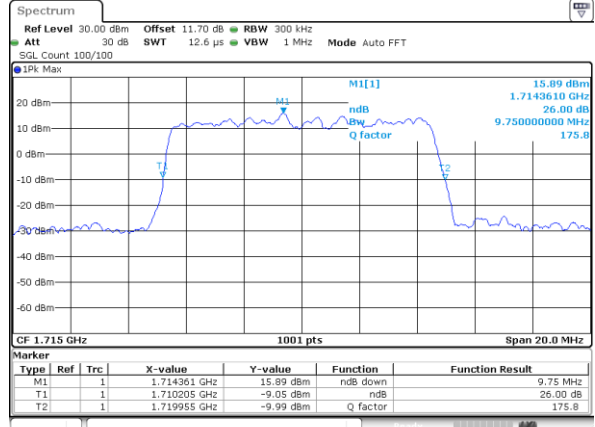


Date: 19, DEC, 2019 13:20:45

Middle Channel / 10MHz / QPSK

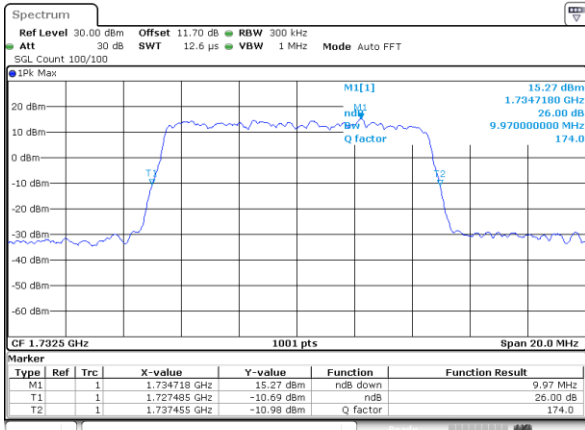


Date: 19, DEC, 2019 13:29:00

Middle Channel / 10MHz / 16QAM

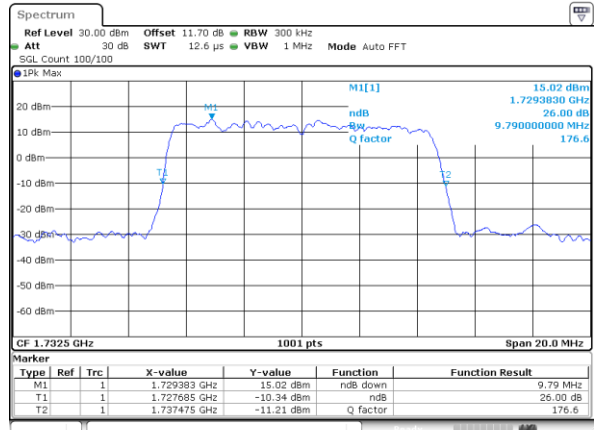


Date: 19, DEC, 2019 13:29:13

Highest Channel / 10MHz / QPSK

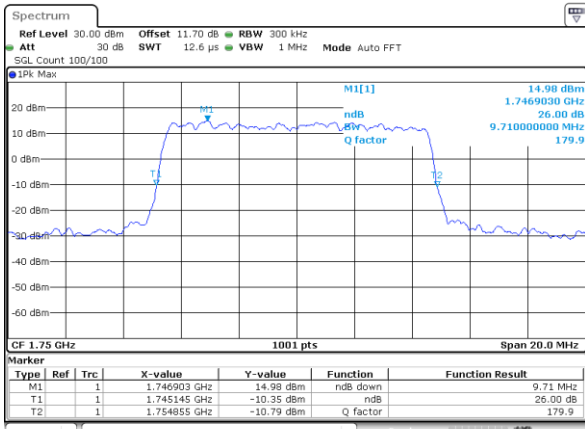

Date: 19, DEC, 2019 13:32:03

Highest Channel / 10MHz / 16QAM

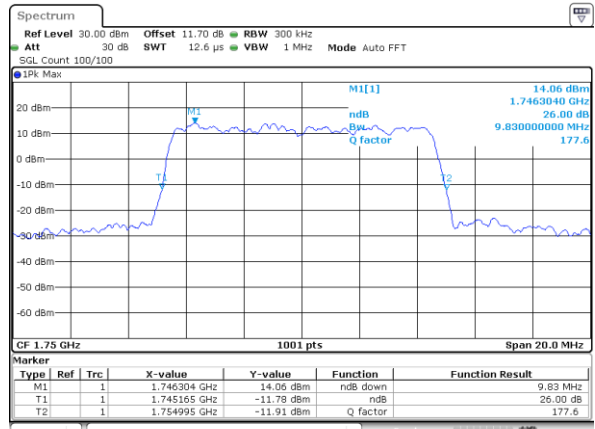


Date: 19, DEC, 2019 13:32:17




LTE Band 4

Lowest Channel / 15MHz / QPSK

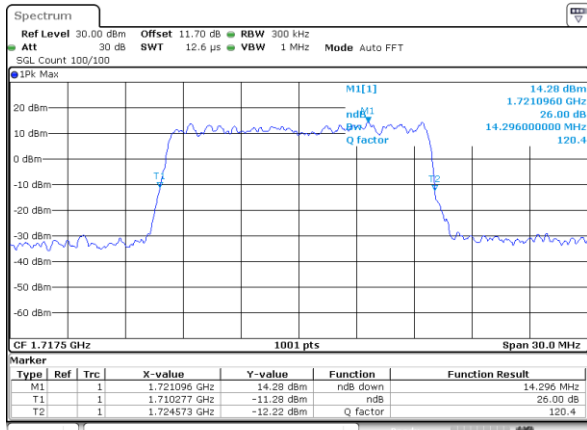


Date: 19_DEC.2019 13:50:34

Lowest Channel / 15MHz / 16QAM

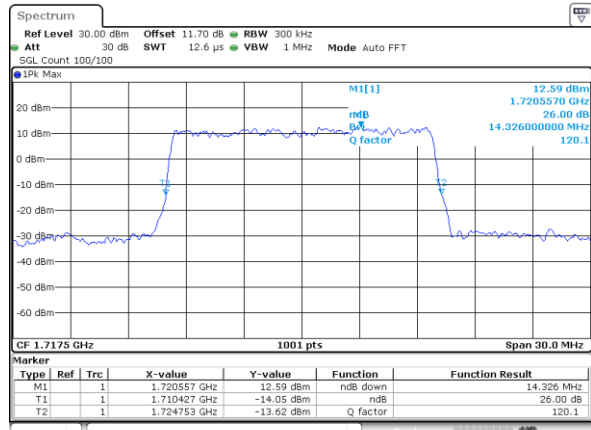


Date: 19_DEC.2019 13:50:47

Middle Channel / 15MHz / QPSK

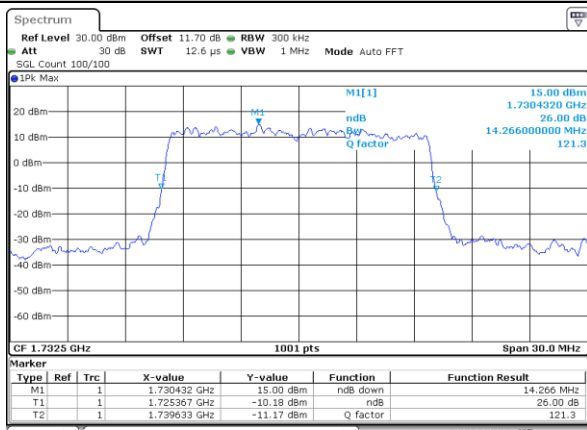


Date: 19_DEC.2019 13:59:02

Middle Channel / 15MHz / 16QAM

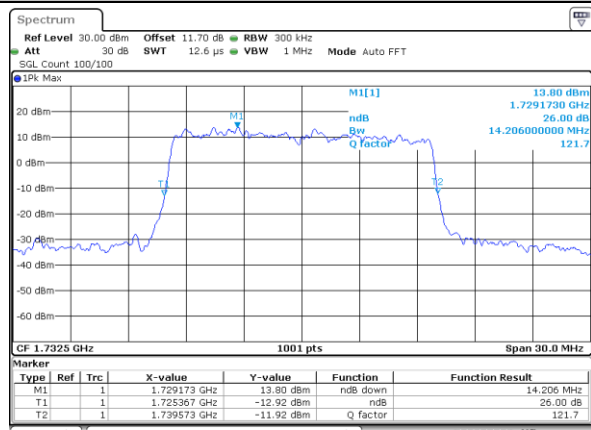


Date: 19_DEC.2019 13:59:15

Highest Channel / 15MHz / QPSK

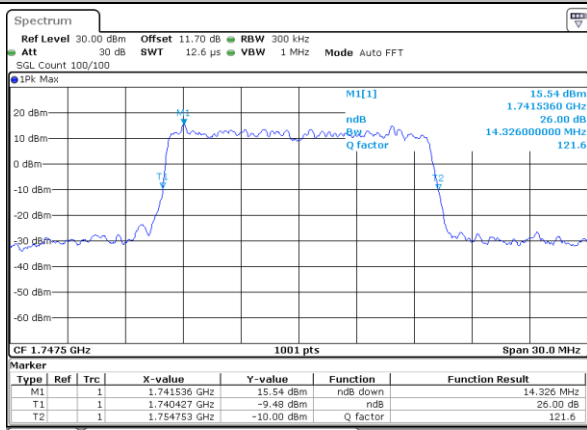

Date: 19_DEC.2019 14:02:06

Highest Channel / 15MHz / 16QAM

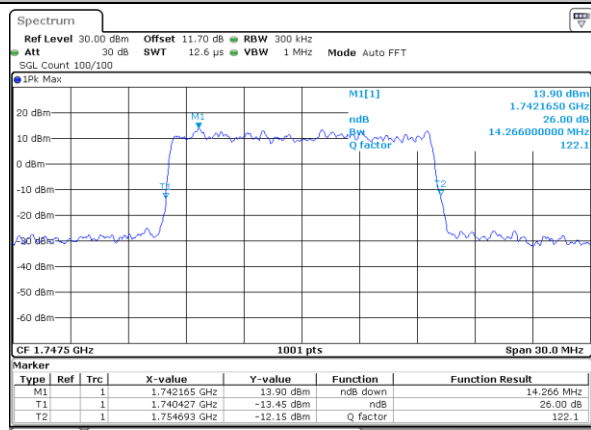


Date: 19_DEC.2019 14:02:19




LTE Band 4

Lowest Channel / 20MHz / QPSK

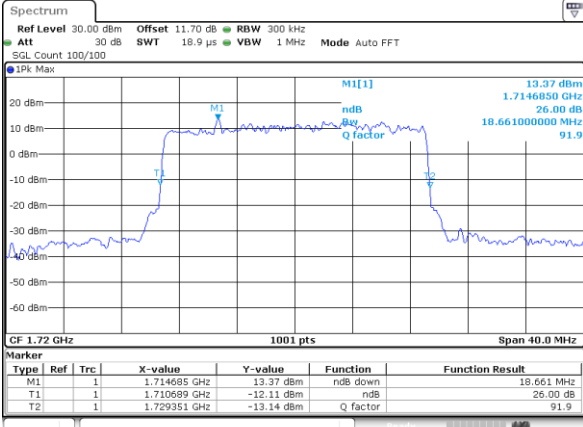


Date: 19_DEC.2019 14:20:37

Lowest Channel / 20MHz / 16QAM

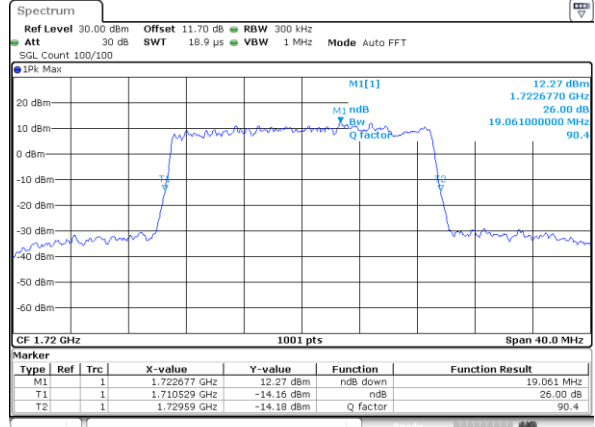


Date: 19_DEC.2019 14:20:51

Middle Channel / 20MHz / QPSK

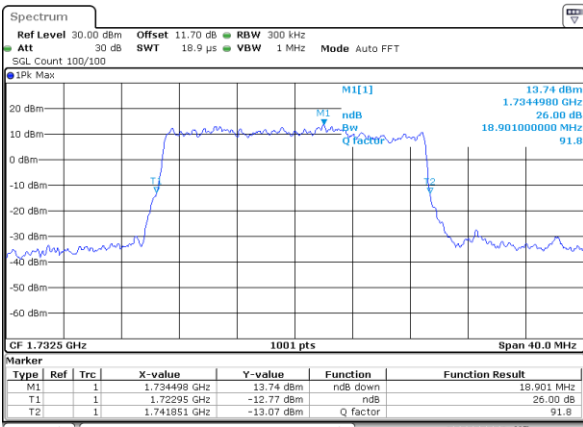


Date: 19_DEC.2019 14:29:06

Middle Channel / 20MHz / 16QAM

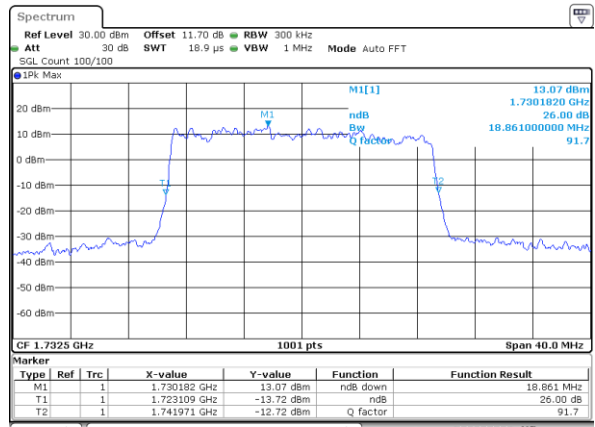


Date: 19_DEC.2019 14:29:19

Highest Channel / 20MHz / QPSK

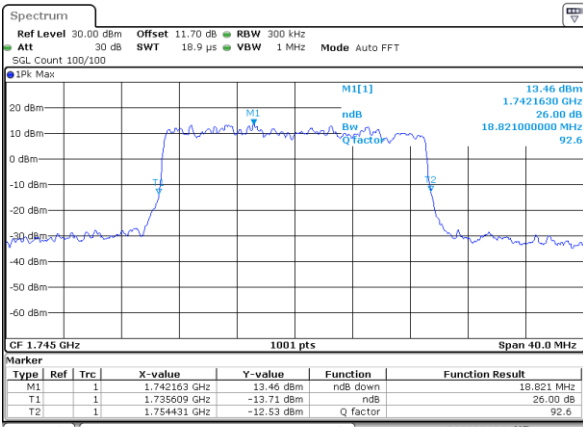

Date: 19_DEC.2019 14:32:10

Highest Channel / 20MHz / 16QAM

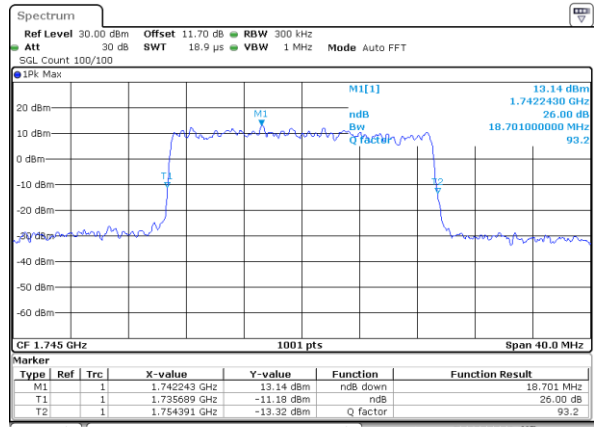


Date: 19_DEC.2019 14:32:23




LTE Band 4

Lowest Channel / 1.4MHz / 64QAM

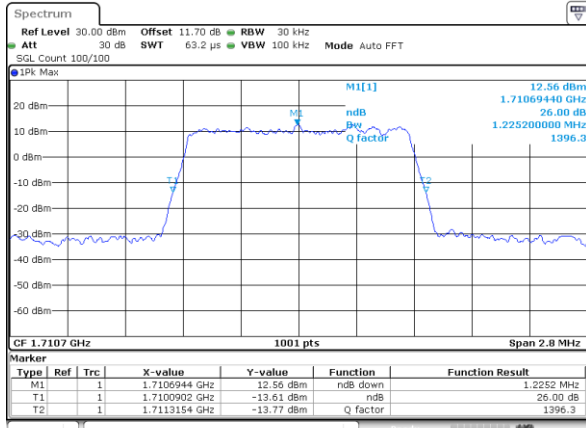


Date: 19_DEC.2019 12:10:06

Lowest Channel / 3MHz / 64QAM

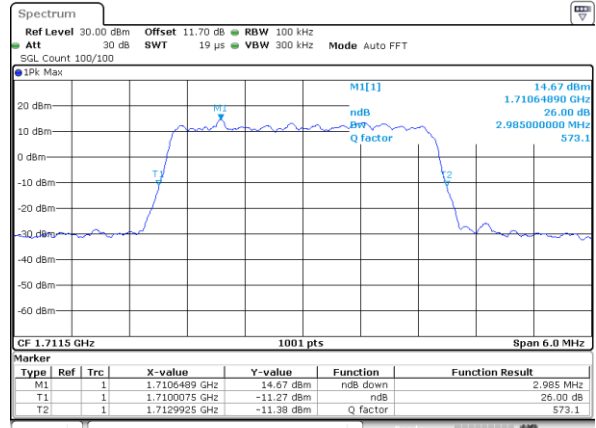


Date: 19_DEC.2019 12:14:12

Middle Channel / 1.4MHz / 64QAM

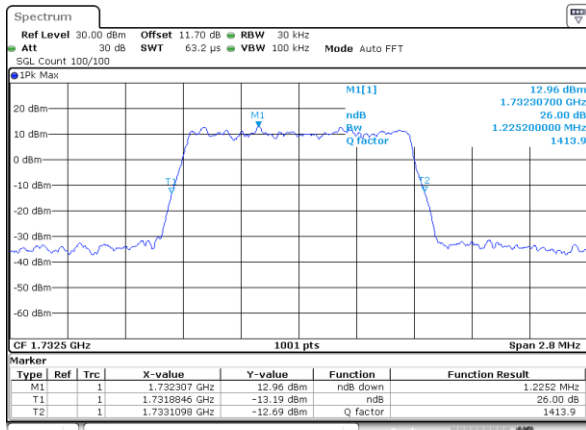


Date: 19_DEC.2019 12:14:21

Middle Channel / 3MHz / 64QAM

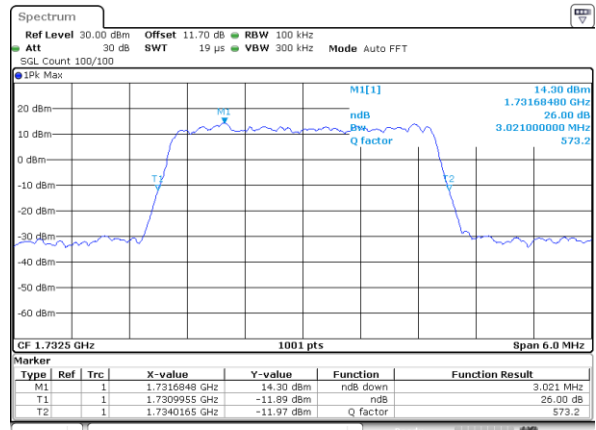


Date: 19_DEC.2019 12:14:26

Highest Channel / 1.4MHz / 64QAM

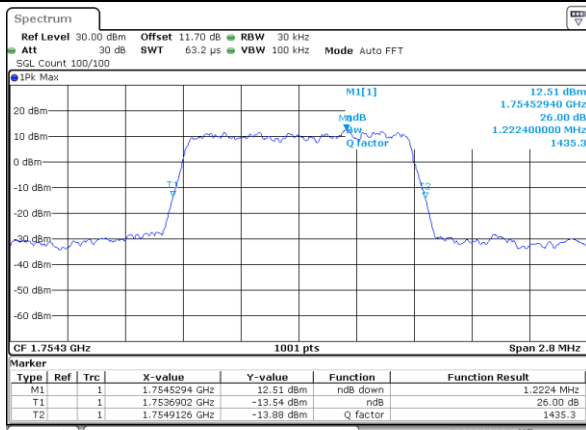

Date: 19_DEC.2019 12:15:52

Highest Channel / 3MHz / 64QAM

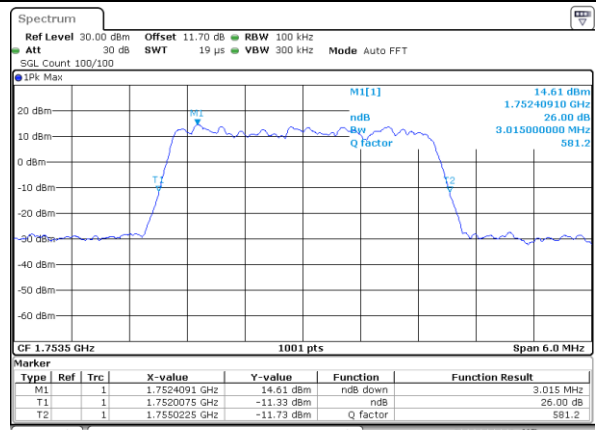


Date: 19_DEC.2019 12:14:58




LTE Band 4

Lowest Channel / 5MHz / 64QAM

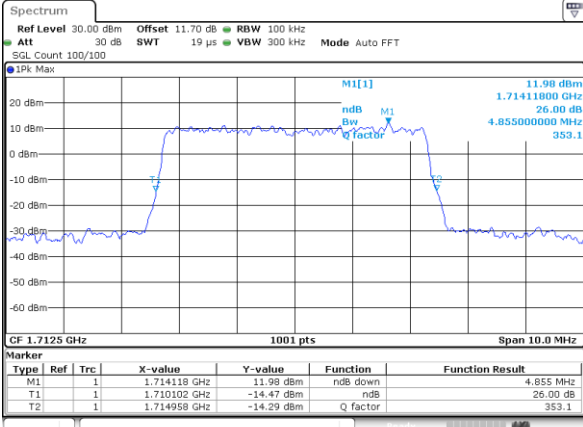


Date: 19_DEC.2019 12:50:13

Lowest Channel / 10MHz / 64QAM

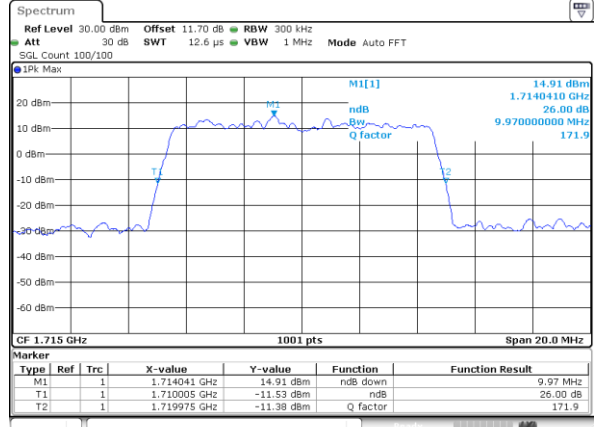


Date: 19_DEC.2019 13:40:19

Middle Channel / 5MHz / 64QAM

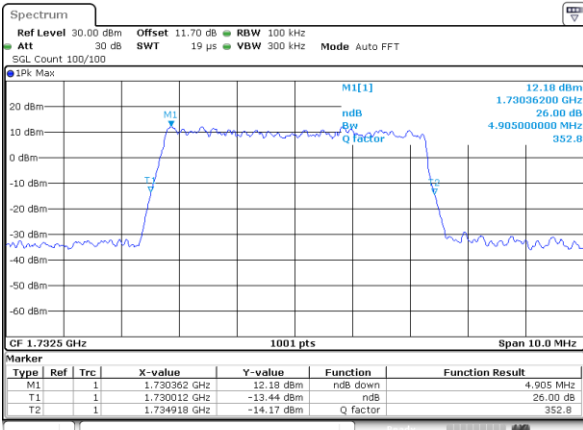


Date: 19_DEC.2019 12:54:27

Middle Channel / 10MHz / 64QAM

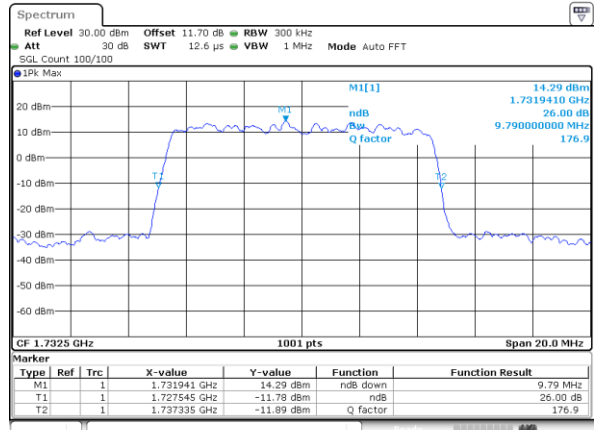


Date: 19_DEC.2019 13:44:33

Highest Channel / 5MHz / 64QAM

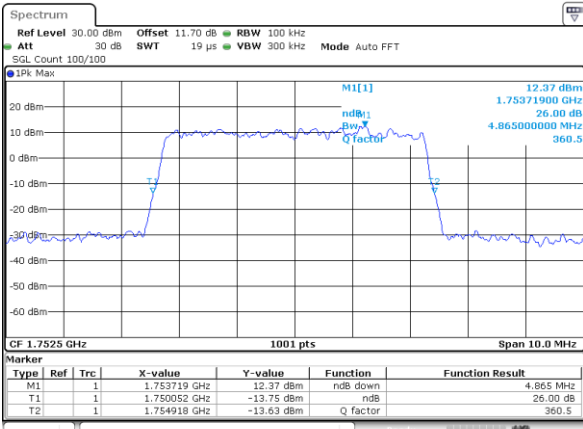

Date: 19_DEC.2019 12:55:59

Highest Channel / 10MHz / 64QAM

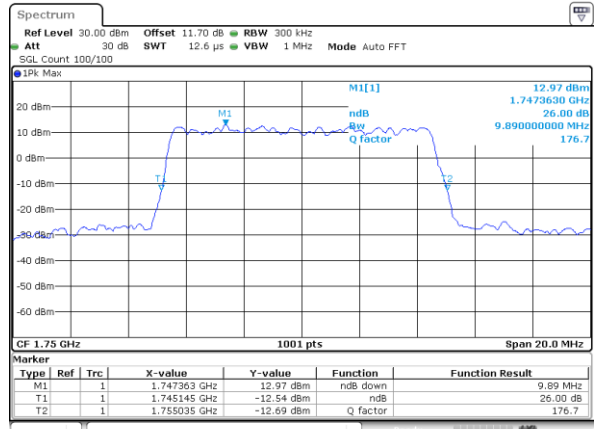


Date: 19_DEC.2019 13:46:05




LTE Band 4

Lowest Channel / 15MHz / 64QAM

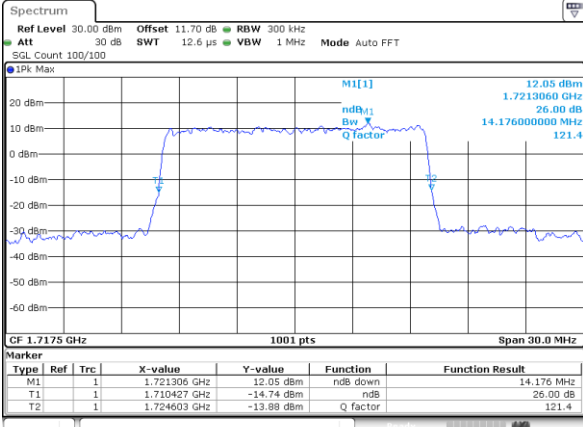


Date: 19_DEC.2019 14:10:21

Lowest Channel / 20MHz / 64QAM

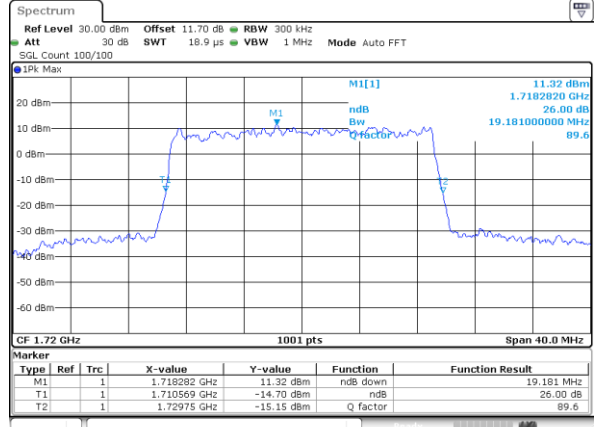


Date: 19_DEC.2019 14:14:126

Middle Channel / 15MHz / 64QAM

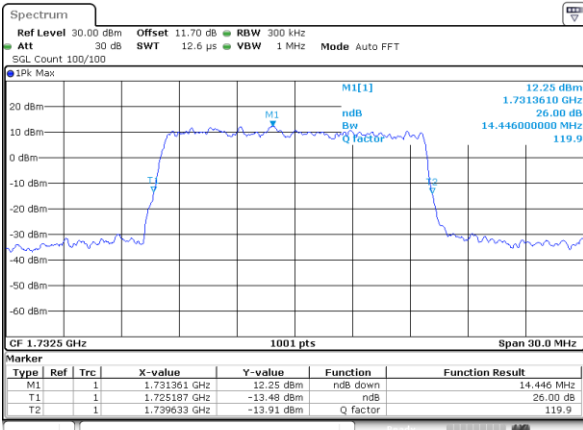


Date: 19_DEC.2019 14:14:06

Middle Channel / 20MHz / 64QAM

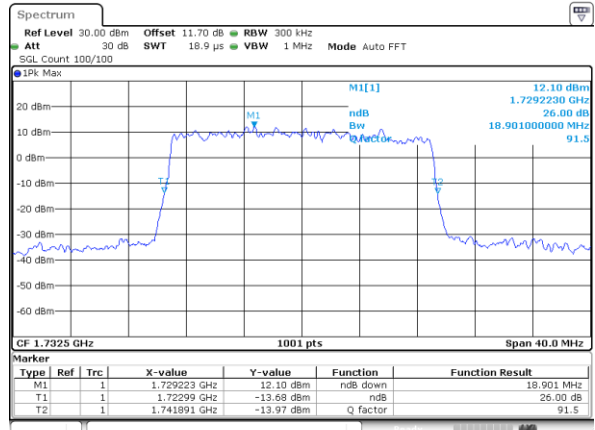


Date: 19_DEC.2019 14:14:410

Highest Channel / 15MHz / 64QAM

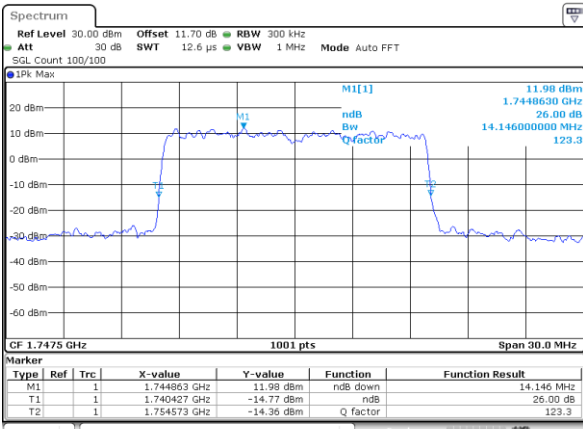

Date: 19_DEC.2019 14:16:09

Highest Channel / 20MHz / 64QAM

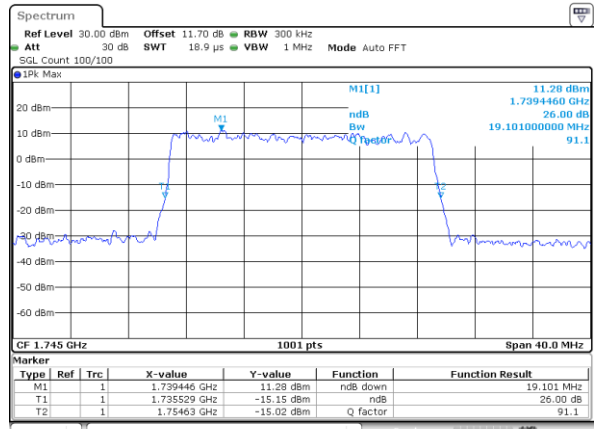

Date: 19_DEC.2019 14:14:612




Occupied Bandwidth

Mode	LTE Band 4 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.08	2.71	2.73	4.47	4.50	9.03	9.03	13.46	13.49	17.90	17.94
Middle CH	1.08	1.09	2.70	2.72	4.49	4.50	9.05	8.99	13.43	13.46	17.94	17.78
Highest CH	1.09	1.09	2.72	2.70	4.51	4.48	9.03	9.01	13.52	13.46	17.90	17.90
Mode	LTE Band 4 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.73	-	4.50	-	9.03	-	13.46	-	17.82	-
Middle CH	1.09	-	2.72	-	4.50	-	8.97	-	13.37	-	17.86	-
Highest CH	1.09	-	2.73	-	4.47	-	9.09	-	13.43	-	17.90	-




LTE Band 4

Lowest Channel / 1.4MHz / QPSK

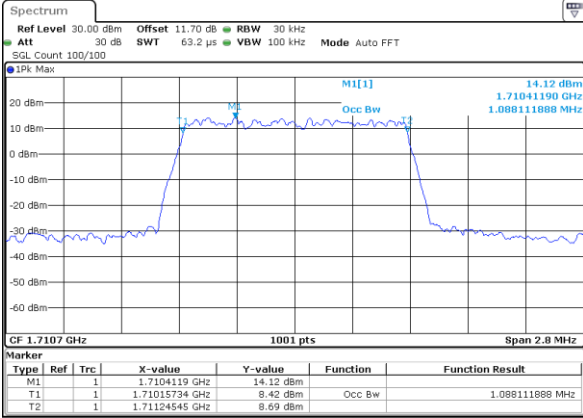


Date: 19_DEC.2019 11:49:45

Lowest Channel / 1.4MHz / 16QAM

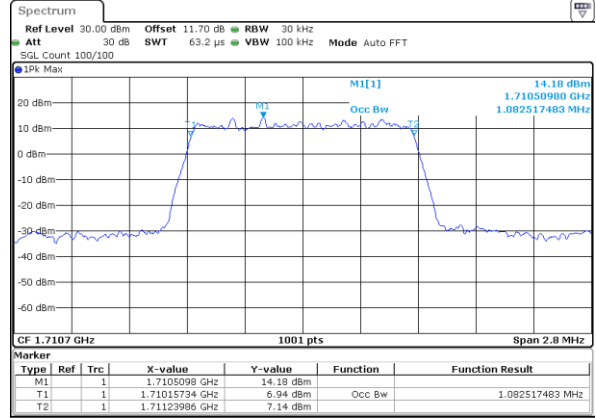


Date: 19_DEC.2019 11:49:59

Middle Channel / 1.4MHz / QPSK

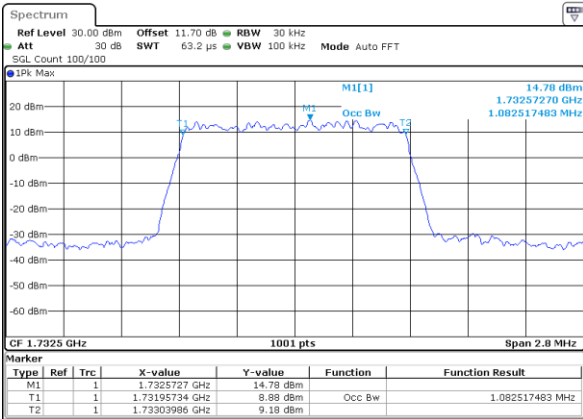


Date: 19_DEC.2019 11:58:19

Middle Channel / 1.4MHz / 16QAM

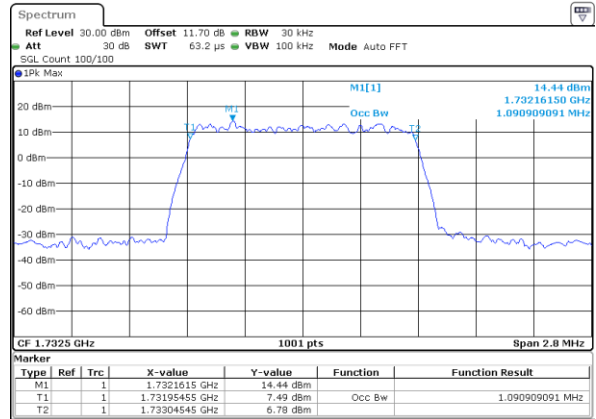


Date: 19_DEC.2019 11:58:32

Highest Channel / 1.4MHz / QPSK

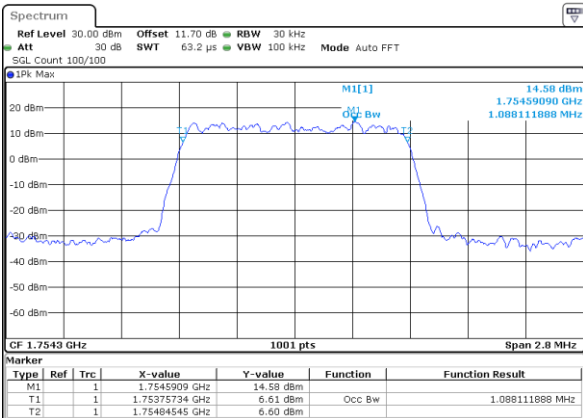

Date: 19_DEC.2019 12:01:22

Highest Channel / 1.4MHz / 16QAM

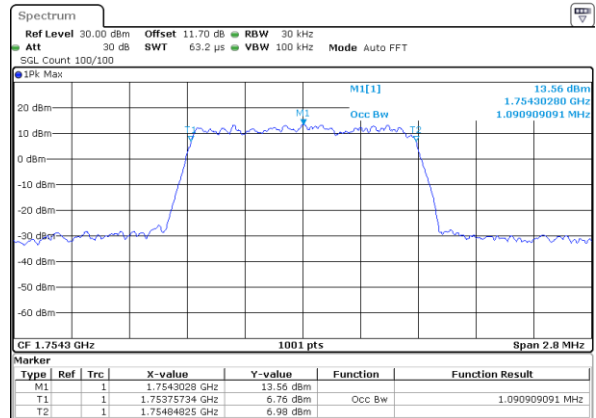


Date: 19_DEC.2019 12:01:35




LTE Band 4

Lowest Channel / 3MHz / QPSK

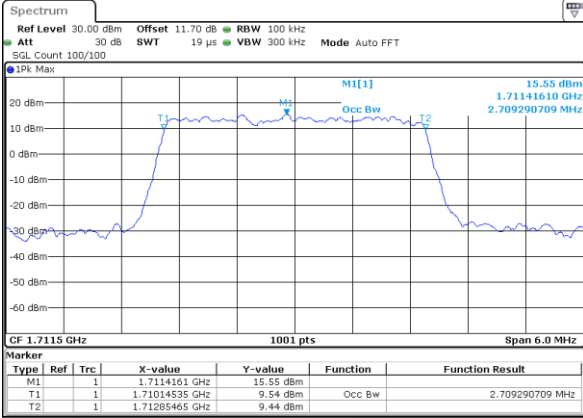


Date: 19_DEC.2019 12:19:54

Lowest Channel / 3MHz / 16QAM

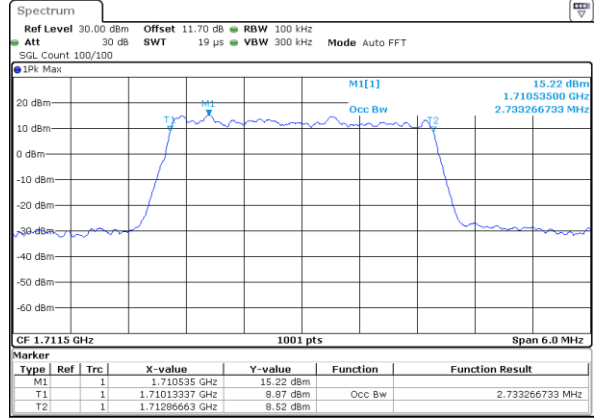


Date: 19_DEC.2019 12:20:08

Middle Channel / 3MHz / QPSK

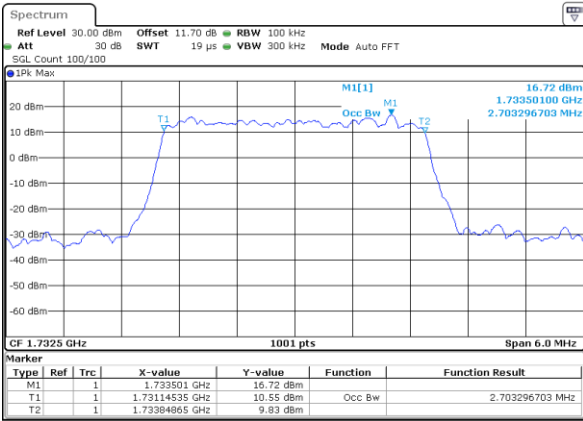


Date: 19_DEC.2019 12:28:25

Middle Channel / 3MHz / 16QAM

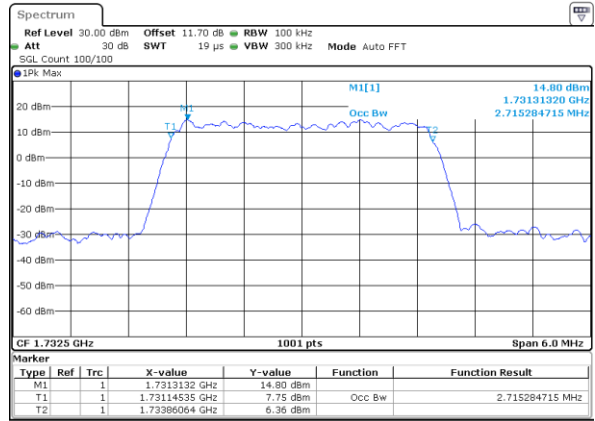


Date: 19_DEC.2019 12:28:38

Highest Channel / 3MHz / QPSK

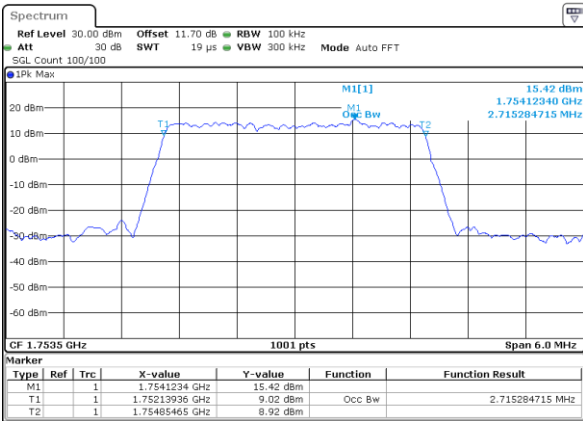

Date: 19_DEC.2019 12:31:29

Highest Channel / 3MHz / 16QAM

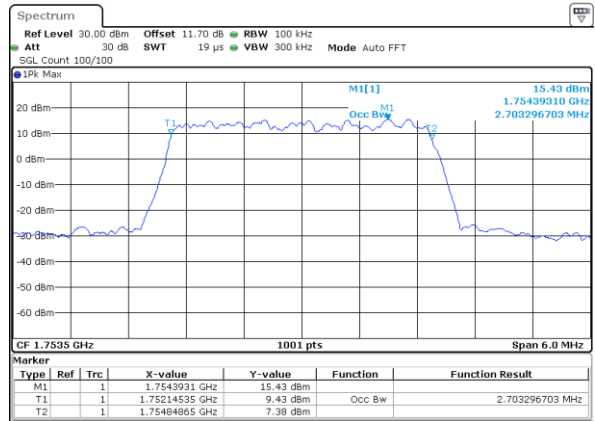


Date: 19_DEC.2019 12:31:42




LTE Band 4

Lowest Channel / 5MHz / QPSK

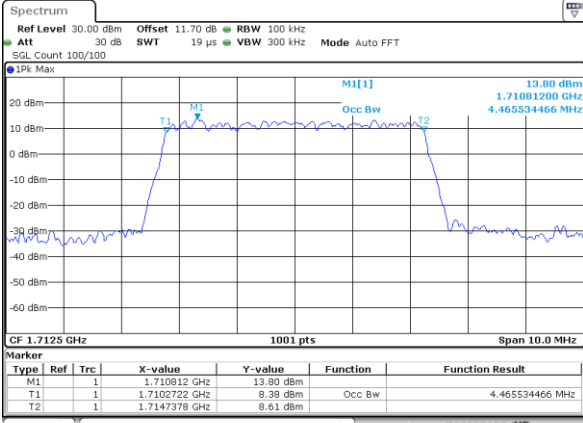


Date: 19_DEC.2019 13:00:01

Lowest Channel / 5MHz / 16QAM

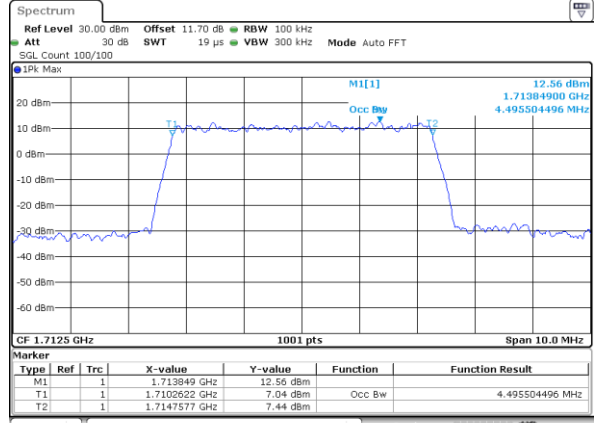


Date: 19_DEC.2019 13:00:15

Middle Channel / 5MHz / QPSK

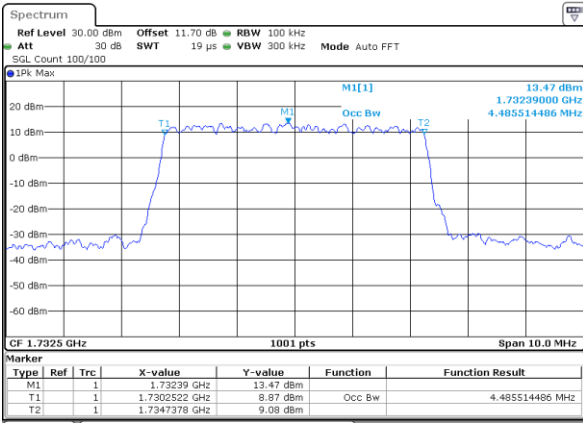


Date: 19_DEC.2019 13:08:30

Middle Channel / 5MHz / 16QAM

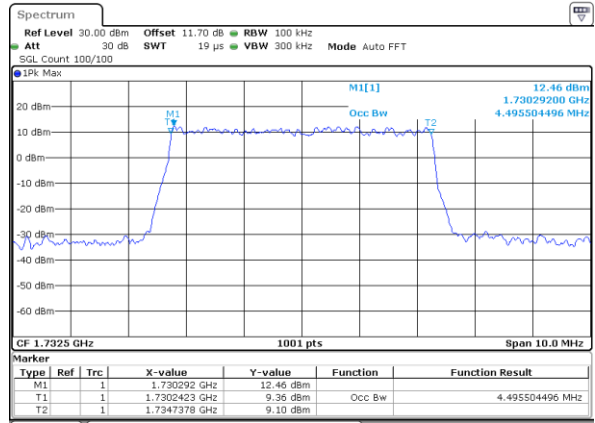


Date: 19_DEC.2019 13:08:44

Highest Channel / 5MHz / QPSK

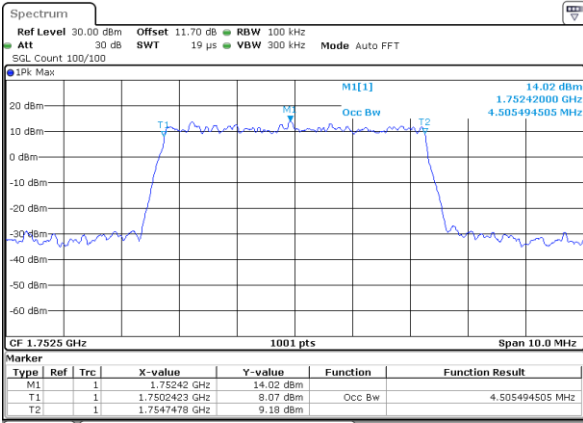

Date: 19_DEC.2019 13:11:33

Highest Channel / 5MHz / 16QAM

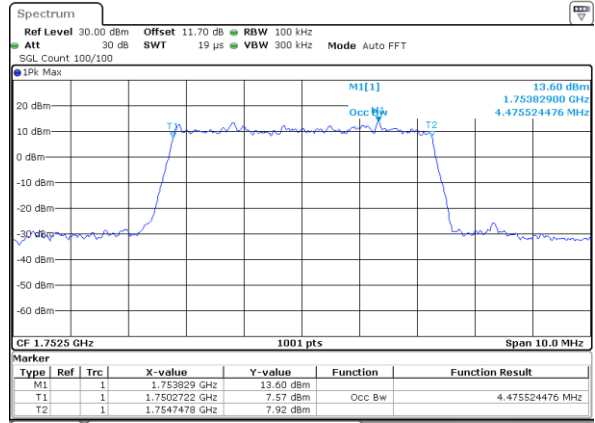


Date: 19_DEC.2019 13:11:47




LTE Band 4

Lowest Channel / 10MHz / QPSK

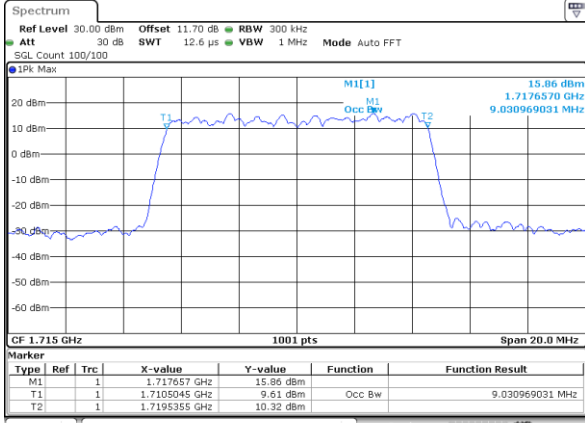


Date: 19_DEC.2019 13:20:04

Lowest Channel / 10MHz / 16QAM

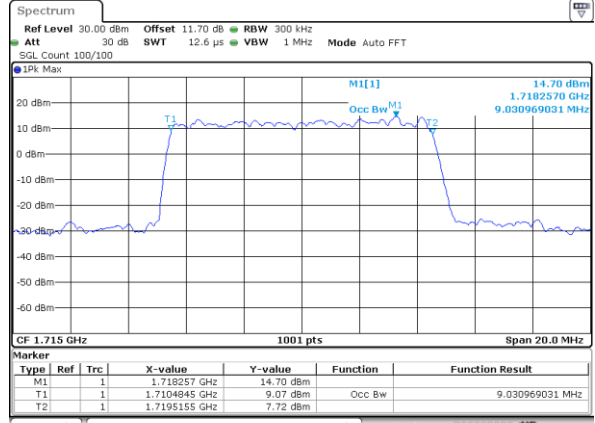


Date: 19_DEC.2019 13:20:17

Middle Channel / 10MHz / QPSK

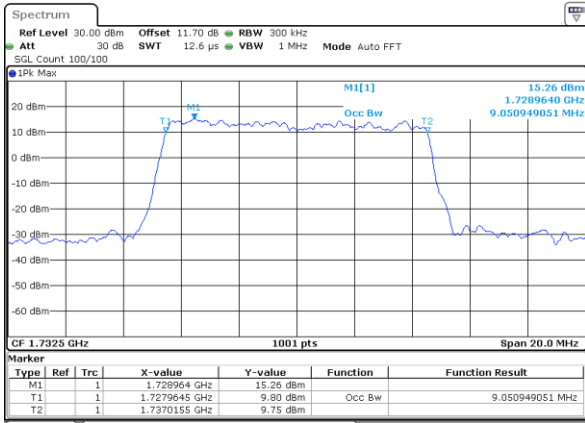


Date: 19_DEC.2019 13:28:03

Middle Channel / 10MHz / 16QAM

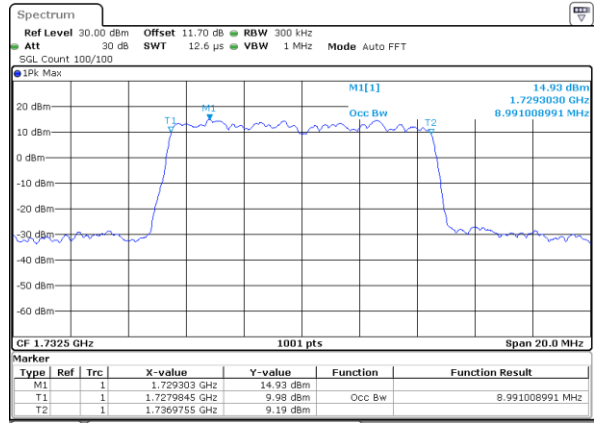


Date: 19_DEC.2019 13:28:46

Highest Channel / 10MHz / QPSK

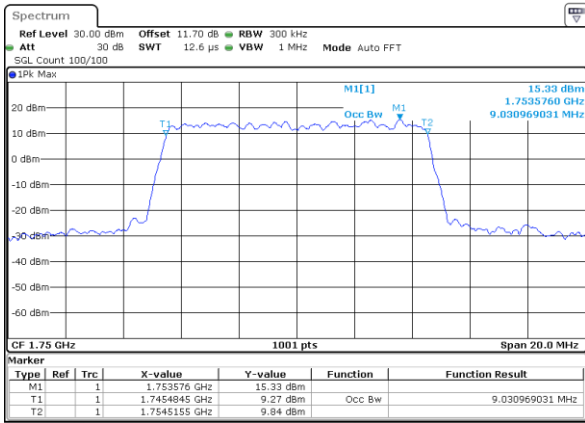

Date: 19_DEC.2019 13:31:36

Highest Channel / 10MHz / 16QAM

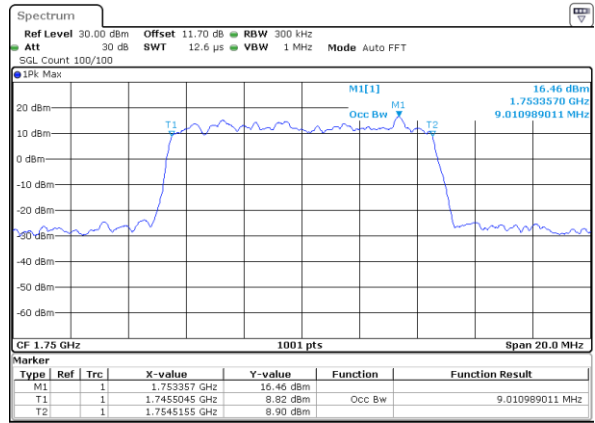


Date: 19_DEC.2019 13:31:50




LTE Band 4

Lowest Channel / 15MHz / QPSK

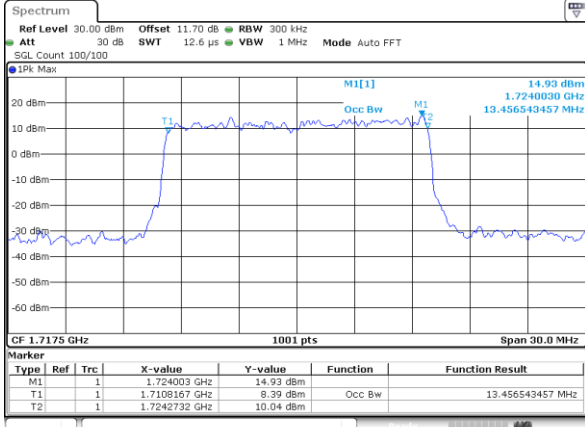


Date: 19_DEC.2019 13:50:06

Lowest Channel / 15MHz / 16QAM

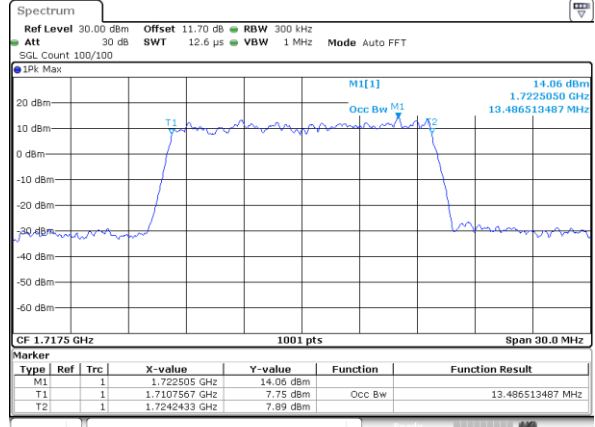


Date: 19_DEC.2019 13:50:120

Middle Channel / 15MHz / QPSK

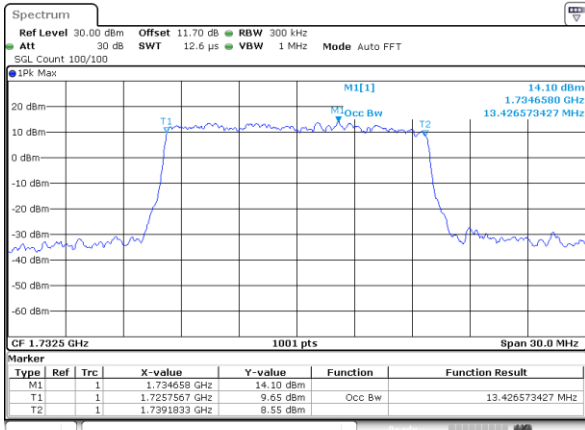


Date: 19_DEC.2019 13:58:06

Middle Channel / 15MHz / 16QAM

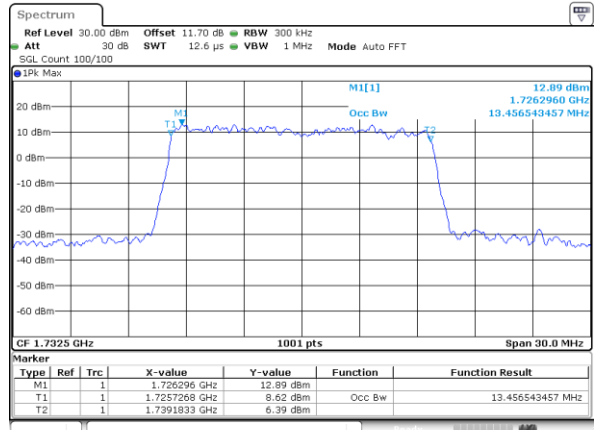


Date: 19_DEC.2019 13:58:149

Highest Channel / 15MHz / QPSK

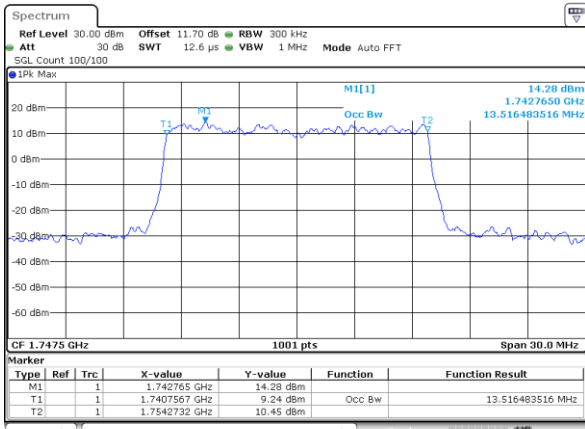

Date: 19_DEC.2019 14:01:39

Highest Channel / 15MHz / 16QAM

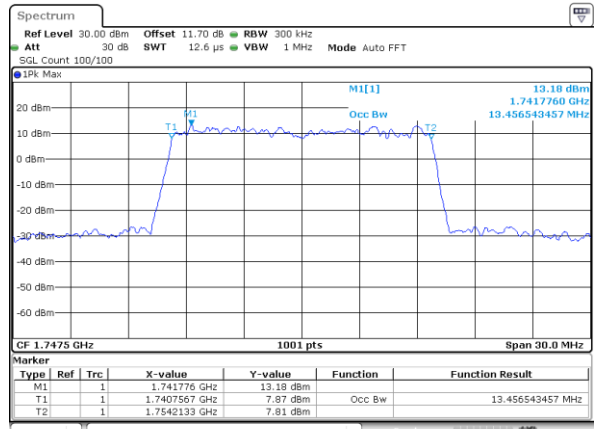


Date: 19_DEC.2019 14:01:52




LTE Band 4

Lowest Channel / 20MHz / QPSK

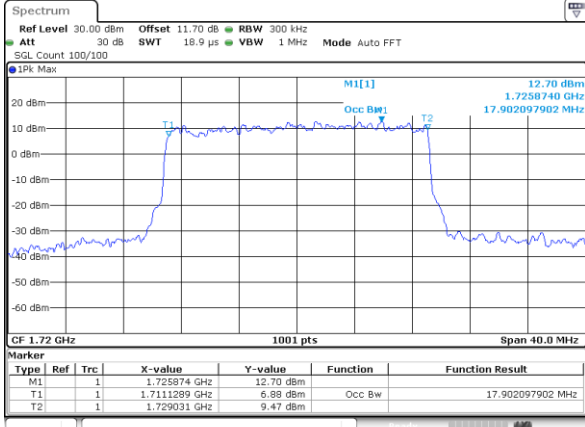


Date: 19_DEC.2019 14:20:09

Lowest Channel / 20MHz / 16QAM

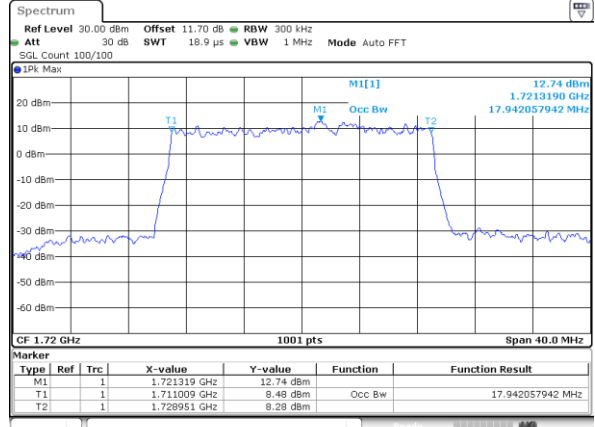


Date: 19_DEC.2019 14:20:23

Middle Channel / 20MHz / QPSK

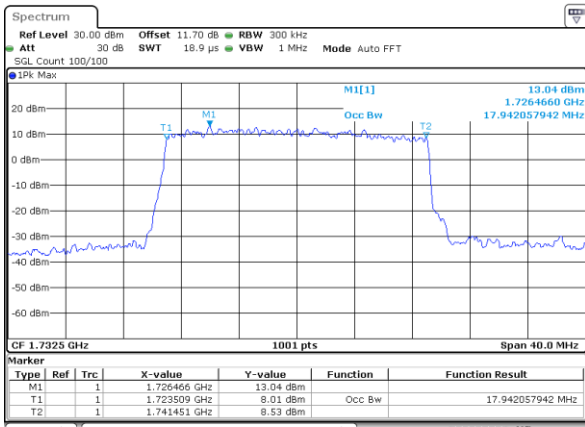


Date: 19_DEC.2019 14:28:40

Middle Channel / 20MHz / 16QAM

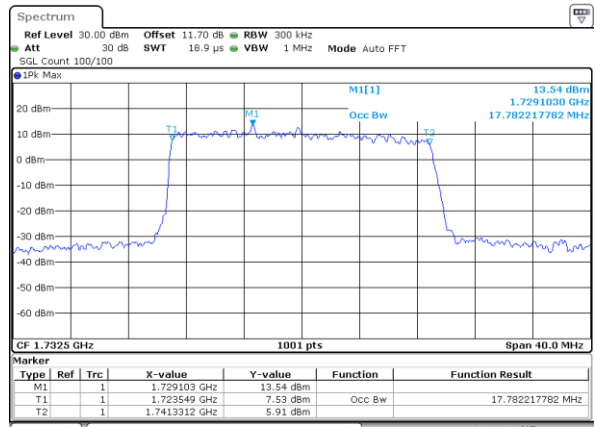


Date: 19_DEC.2019 14:28:53

Highest Channel / 20MHz / QPSK

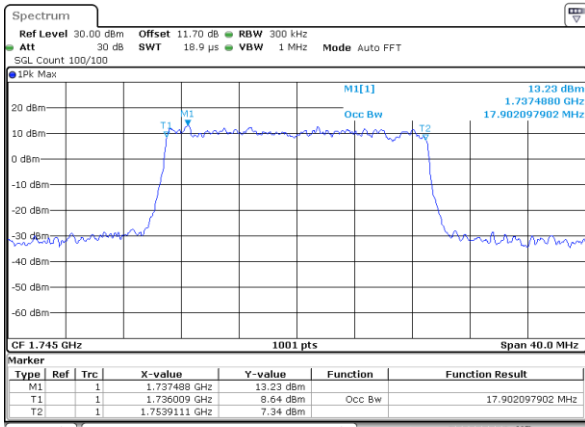

Date: 19_DEC.2019 14:31:42

Highest Channel / 20MHz / 16QAM

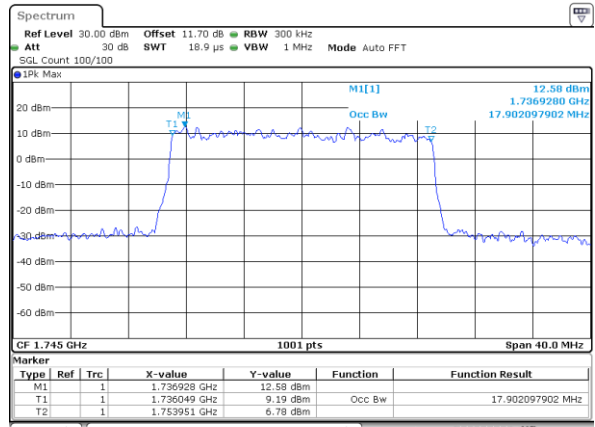


Date: 19_DEC.2019 14:31:56




LTE Band 4


Lowest Channel / 1.4MHz / 64QAM

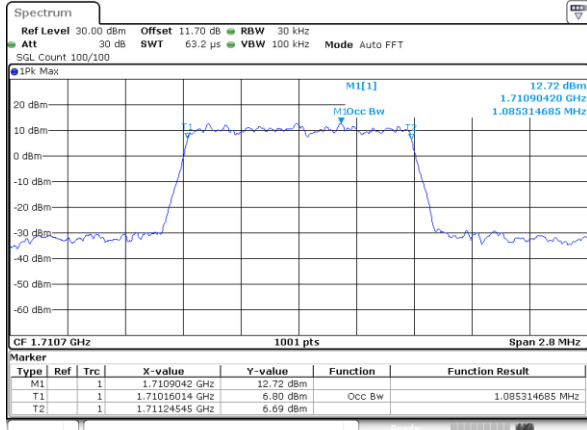


Lowest Channel / 3MHz / 64QAM

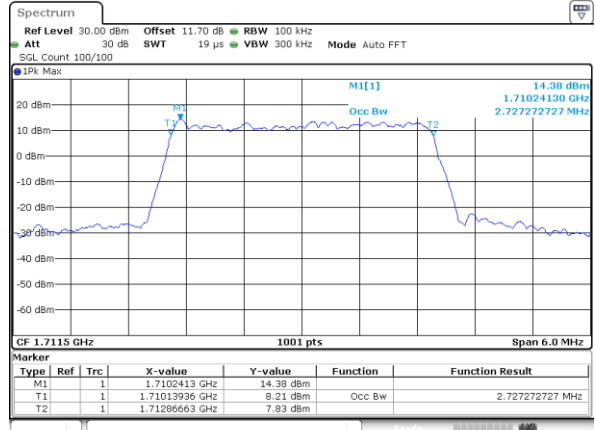


Middle Channel / 1.4MHz / 64QAM

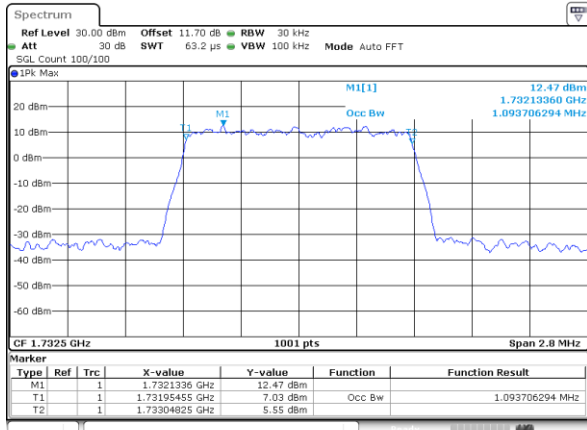


Middle Channel / 3MHz / 64QAM

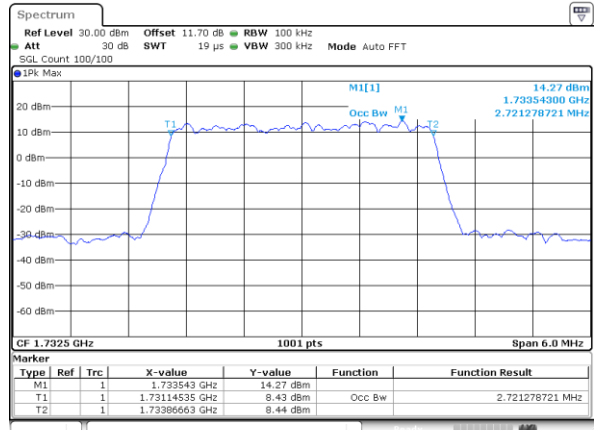

Highest Channel / 1.4MHz / 64QAM

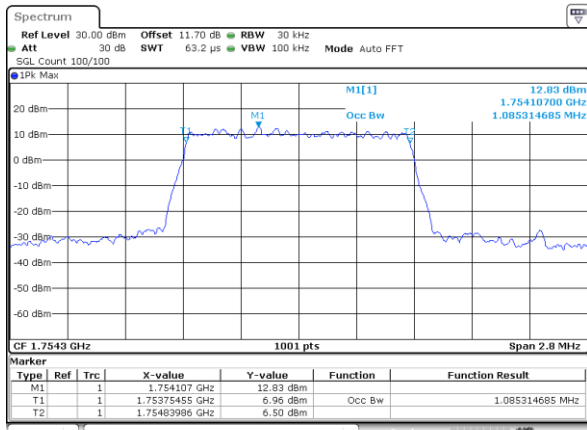


Highest Channel / 3MHz / 64QAM

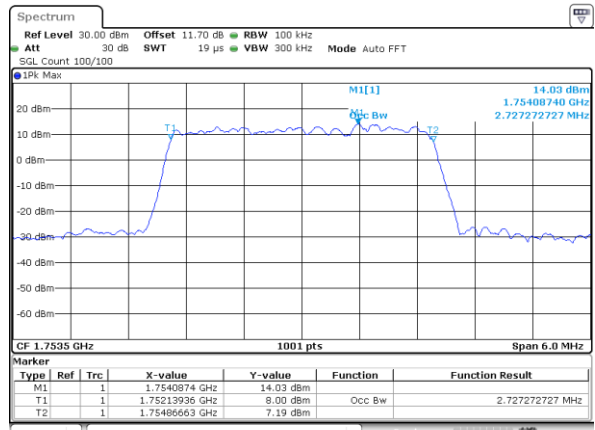




LTE Band 4

Lowest Channel / 5MHz / 64QAM

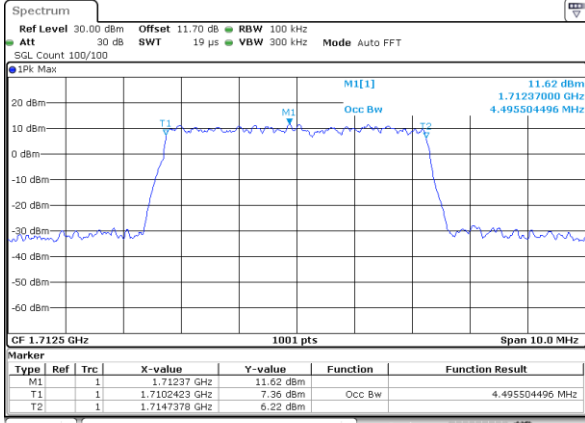


Date: 19_DEC.2019 12:50:00

Lowest Channel / 10MHz / 64QAM

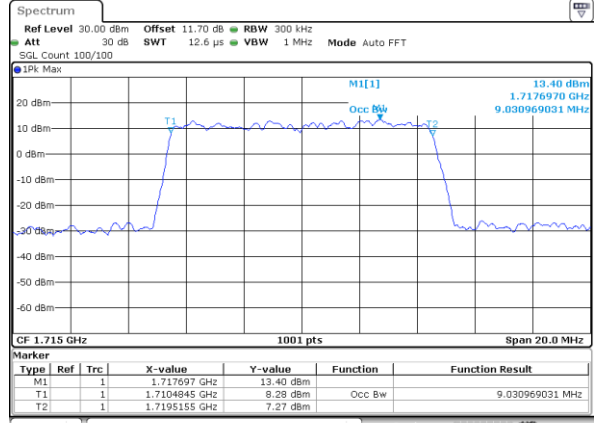


Date: 19_DEC.2019 13:40:05

Middle Channel / 5MHz / 64QAM

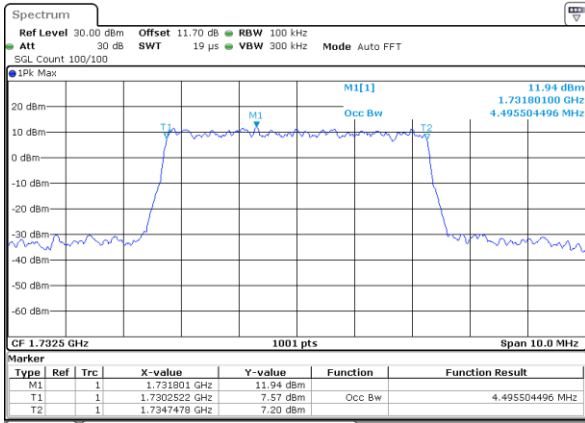


Date: 19_DEC.2019 12:54:14

Middle Channel / 10MHz / 64QAM

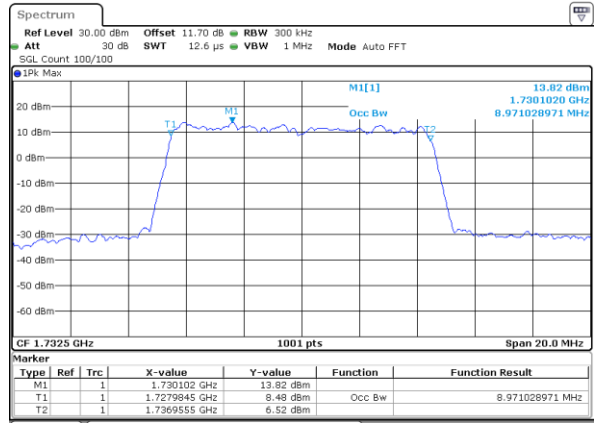


Date: 19_DEC.2019 13:44:20

Highest Channel / 5MHz / 64QAM

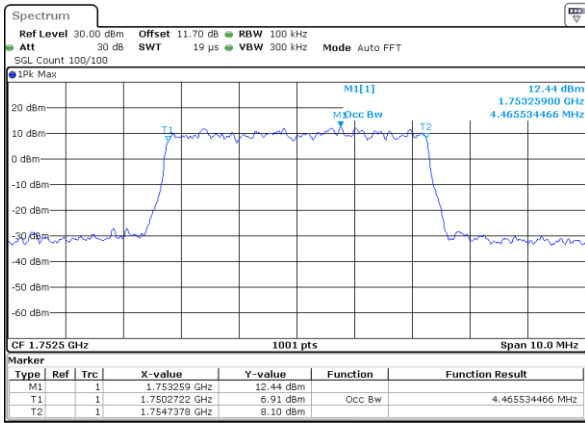

Date: 19_DEC.2019 12:55:46

Highest Channel / 10MHz / 64QAM

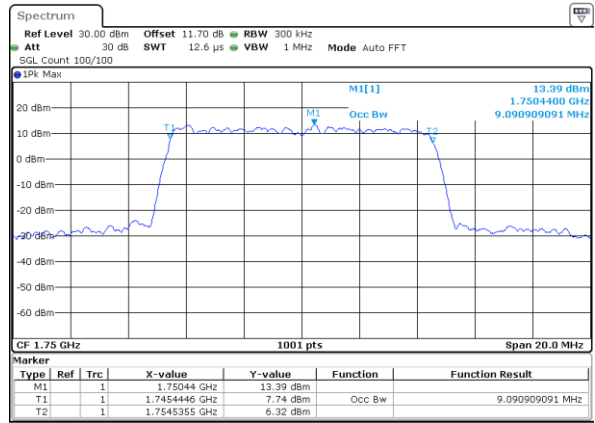

Date: 19_DEC.2019 13:45:51