


FCC SAR Test Report

APPLICANT : Sony Mobile Communications Inc.
BRAND NAME : Sony
FCC ID : PY7-98591H
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information..... 6
4.1 General Information 6
4.2 Device Serial Number 6
5. RF Exposure Limits..... 7
5.1 Uncontrolled Environment..... 7
5.2 Controlled Environment..... 7
6. Specific Absorption Rate (SAR)..... 8
6.1 Introduction 8
6.2 SAR Definition..... 8
7. System Description and Setup 9
7.1 E-Field Probe 10
7.2 Data Acquisition Electronics (DAE) 10
7.3 Phantom..... 11
7.4 Device Holder..... 12
8. Measurement Procedures 13
8.1 Spatial Peak SAR Evaluation 13
8.2 Power Reference Measurement..... 14
8.3 Area Scan 14
8.4 Zoom Scan..... 15
8.5 Volume Scan Procedures..... 15
8.6 Power Drift Monitoring..... 15
9. Test Equipment List..... 16
10. System Verification 17
10.1 Tissue Simulating Liquids..... 17
10.2 Tissue Verification 18
10.3 System Performance Check Results..... 19
11. RF Exposure Positions 21
11.1 Ear and handset reference point 21
11.2 Definition of the cheek position..... 22
11.3 Definition of the tilt position..... 23
11.4 Body Worn Accessory 24
11.5 Wireless Router..... 24
12. Conducted RF Output Power (Unit: dBm)..... 25
13. RF Exposure Conditions 58
14. SAR Test Results 59
14.1 Head SAR 61
14.2 Hotspot SAR 64
14.3 Body Worn Accessory SAR..... 68
14.4 Repeated SAR Measurement 70
15. Simultaneous Transmission Analysis..... 71
15.1 Head Exposure Conditions 72
15.2 Hotspot Exposure Conditions..... 74
15.3 Body-Worn Accessory Exposure Conditions 78
15.4 SPLSR Evaluation and Analysis..... 80
16. Uncertainty Assessment 82
17. References..... 85
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Reference Report
Appendix E. Spot Check Evaluation
Appendix F. Antenna Location & Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA692213-01	Rev. 01	Initial issue of report	Feb. 07, 2017
FA692213-01	Rev. 02	1. Added accessories information in section 4.1 2. Updated WCDMA V Tune-up Limit on page 29. 3. Added note 7 of page 59, note 1 of page 71 and note 1 of page 82.	Feb. 13, 2017
FA692213-01	Rev. 03	1. Updated Appendix D. 2. Added overall and display dimensions of this device in appendix F.	Feb. 15, 2017



1. Statement of Compliance

Applicant Name	Sony Mobile Communications INC.		
EUT Description	GSM/WCDMA/LTE Phone+Bluetooth, DTS/UNII a/b/g/n and NFC		
Brand Name	Sony		
FCC ID	PY7-98591H		
HW Version	A		
SW Version	.0.85		
RF Exposure Conditions	Equipment Class		
	Licensed	DTS	U-NII
Head (1g SAR W/kg)	0.55	1.28	1.19
Body-Worn (1g SAR W/kg)	1.10	0.18	0.28
Wireless Router (1g SAR W/kg)	1.39	0.41	
Highest Simultaneous Transmission (1g SAR W/kg)	Head:1.56 Body-worn:1.38 Hotspot:1.59	Head:1.56 Body-worn:1.27 Hotspot:1.59	Head:1.53 Body-worn:1.38 Hotspot:N/A
Date Tested	2016/10/25~2016/12/26		
Test Result	Pass		
Remark:			
<ol style="list-style-type: none"> This device 2.4GHz WLAN supports Hotspot operation. WCDMA B2 / B4, and LTE B2 / B4 / B7 / B66 power reduction is activated in hotspot mode. LTE Band 17 SAR test was covered by LTE Band 12, due to the output power level and have duplicate frequency range. In this report, WLAN / BT SAR test results are referred to PY7-84773W, Sporton Report No: FA692208-01 or Appendix D and spot checks were performed on PY7-98591H to ensure that the SAR measurements for both devices are the same, the spot checks detail information please refer to Appendix E. 			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Sony Mobile Communications Inc.
Address	4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

Manufacturer	
Company Name	Sony Mobile Communications Inc.
Address	4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 12
	Does device support dual transfer mode? (No)		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	· AMR / RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA	
LTE (FDD)	Band 2 Band 4 Band 5 Band 7 Band 12 Band 13 Band 17 Band 66	· QPSK · 16QAM · Rel 10 Carrier Aggregation Downlink only (Inter-Band and Intra-Band possible combinations please referred to section 12.)	
WiFi	2.4GHz: 2412 MHz ~ 2462 MHz	· 11b · 11g · 11n (HT20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	· 11a · 11n (HT20) · 11n (HT40) · WLAN operation in 5600MHz ~ 5650MHz is notched	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

Accessories Information		
Battery 1	Brand Name	Sony
	Model Name	LIP1635ERPCS
	Power Rating	4.35 Vdc, 2300 mAh
	Type	Li-Polymer
Earphone 1	Brand Name	Sony
	Model Name	MH410c
	Vendor	Foster
Earphone 2	Brand Name	Sony
	Model Name	MH410c
	Vendor	Merry

4.2 Device Serial Number

Band	SN
WWAN	RQ3003CQ1F
WLAN (Spot check)	RQ3003CQ1F

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

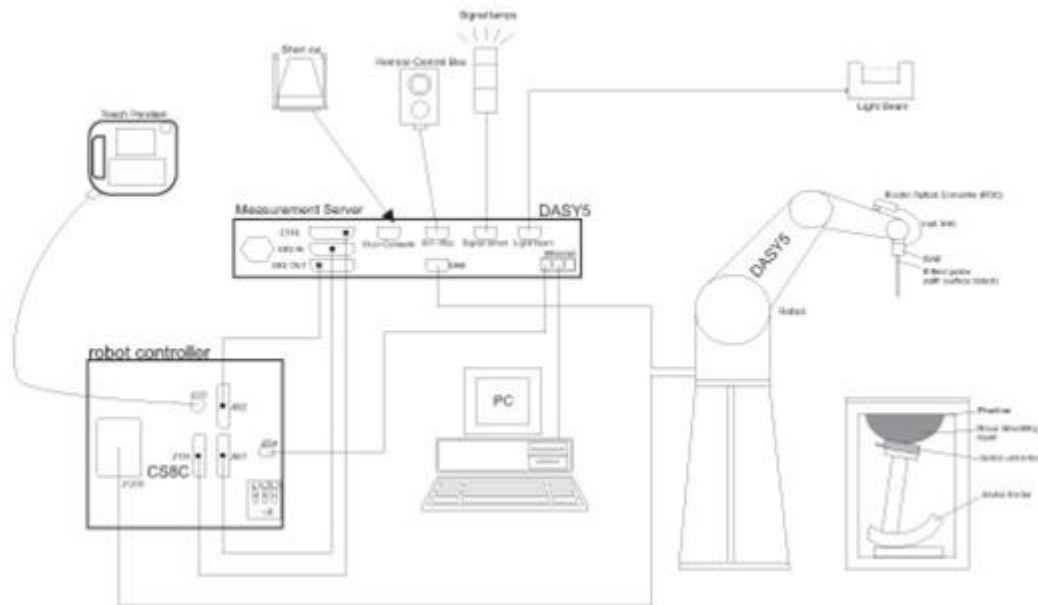


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

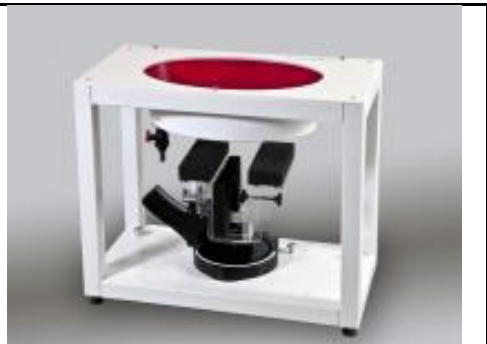Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 18, 2016	May. 17, 2017
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2016	Mar. 20, 2017
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 23, 2015	Nov. 22, 2016
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 30, 2016	Sep. 29, 2017
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 30, 2016	Aug. 29, 2017
SPEAG	Data Acquisition Electronics	DAE3	393	Jan. 12, 2016	Jan. 11, 2017
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 23, 2015	Nov. 22, 2016
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 17, 2016	Nov. 16, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3753	May. 11, 2016	May. 10, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 24, 2015	Nov. 23, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 24, 2016	Nov. 23, 2017
WonDer	Thermometer	WD-5015	TM642	Oct. 12, 2016	Oct. 11, 2017
WonDer	Thermometer	WD-5015	TM281	Oct. 12, 2016	Oct. 11, 2017
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 10, 2016	May. 09, 2017
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 17, 2016	May. 16, 2017
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	MG3710A	6201502524	Dec. 18, 2015	Dec. 17, 2016
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 09, 2016	Dec. 08, 2017
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 12, 2016	Jan. 11, 2017
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 05, 2016	Sep. 04, 2017
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 21, 2016	Jun. 20, 2017
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 16, 2016	Mar. 15, 2017
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 16, 2016	Mar. 15, 2017
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

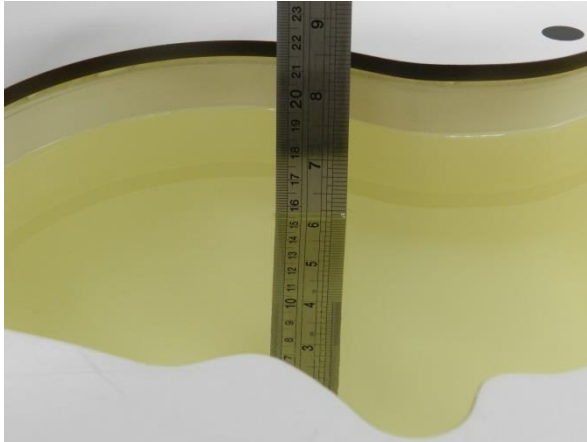


Fig 10.1 Photo of Liquid Height for Head SAR

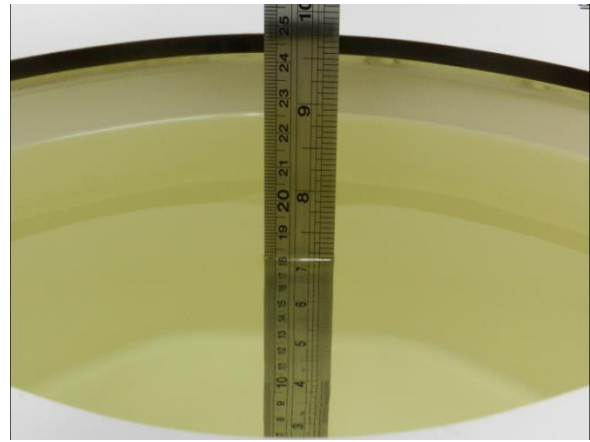


Fig 10.2 Photo of Liquid Height for Body SAR



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	HSL	22.6	0.899	43.505	0.89	41.90	1.01	3.83	±5	2016/10/26
750	MSL	22.1	0.957	56.254	0.96	55.50	-0.31	1.36	±5	2016/10/29
835	HSL	22.6	0.882	42.581	0.90	41.50	-2.00	2.60	±5	2016/10/26
835	HSL	22.5	0.872	41.443	0.90	41.50	-3.11	-0.14	±5	2016/12/26
835	MSL	22.1	0.996	56.807	0.97	55.20	2.68	2.91	±5	2016/10/29
835	MSL	22.5	0.961	55.050	0.97	55.20	-0.93	-0.27	±5	2016/12/26
1750	HSL	22.2	1.367	41.607	1.37	40.10	-0.22	3.76	±5	2016/10/27
1750	HSL	22.5	1.343	38.739	1.37	40.10	-1.97	-3.39	±5	2016/11/12
1750	MSL	22.2	1.500	55.834	1.49	53.40	0.67	4.56	±5	2016/10/25
1750	MSL	22.1	1.497	55.792	1.49	53.40	0.47	4.48	±5	2016/11/2
1750	MSL	22.3	1.500	55.700	1.49	53.40	0.67	4.31	±5	2016/11/4
1750	MSL	22.5	1.440	52.743	1.49	53.40	-3.36	-1.23	±5	2016/11/12
1900	HSL	22.2	1.411	40.419	1.40	40.00	0.79	1.05	±5	2016/10/28
1900	MSL	22.4	1.519	54.136	1.52	53.30	-0.07	1.57	±5	2016/10/25
2600	HSL	22.3	1.967	40.171	1.96	39.00	0.36	3.00	±5	2016/10/27
2600	MSL	22.3	2.196	52.487	2.16	52.50	1.67	-0.02	±5	2016/10/27



10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 11 columns: Date, Frequency (MHz), Tissue Type, Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). It contains 20 rows of test data.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2016/10/26	750	HSL	250	D750V3-1012	EX3DV4 - SN3955	DAE4 Sn1399	1.44	5.40	5.76	6.67
2016/10/29	750	MSL	250	D750V3-1012	EX3DV4 - SN3955	DAE4 Sn1399	1.50	5.73	6.00	4.71
2016/10/26	835	HSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	1.41	5.97	5.64	-5.53
2016/12/26	835	HSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	1.50	5.97	6.00	0.50
2016/10/29	835	MSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	1.68	6.28	6.72	7.01
2016/12/26	835	MSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	1.63	6.28	6.52	3.82
2016/10/27	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3955	DAE4 Sn1399	4.83	19.30	19.32	0.10
2016/11/12	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3955	DAE4 Sn1399	4.50	19.30	18.00	-6.74
2016/10/25	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3955	DAE4 Sn1399	5.05	19.00	20.20	6.32
2016/11/2	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3955	DAE4 Sn1399	5.04	19.00	20.16	6.11
2016/11/4	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3753	DAE3 Sn393	5.04	19.00	20.16	6.11
2016/11/12	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3955	DAE4 Sn1399	4.84	19.00	19.36	1.89
2016/10/28	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3955	DAE4 Sn1399	5.04	21.40	20.16	-5.79
2016/10/25	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3955	DAE4 Sn1399	5.29	20.60	21.16	2.72
2016/10/27	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3955	DAE4 Sn1399	6.14	25.60	24.56	-4.06
2016/10/27	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3955	DAE4 Sn1399	6.72	25.00	26.88	7.52

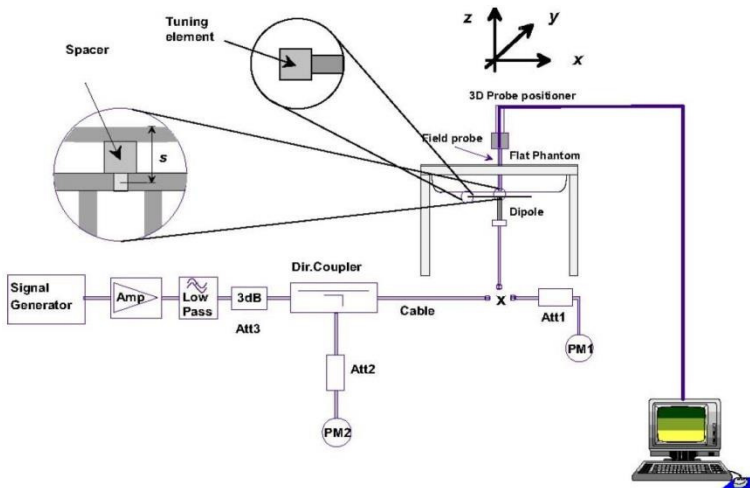


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

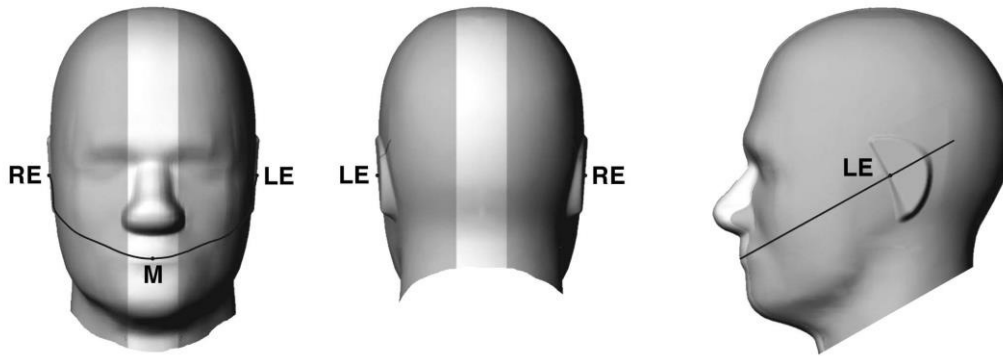


Fig 9.1.1 Front, back, and side views of SAM twin phantom

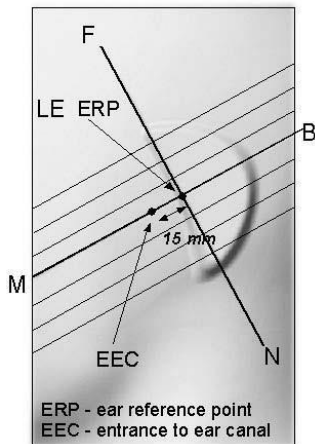


Fig 9.1.2 Close-up side view of phantom showing the ear region.

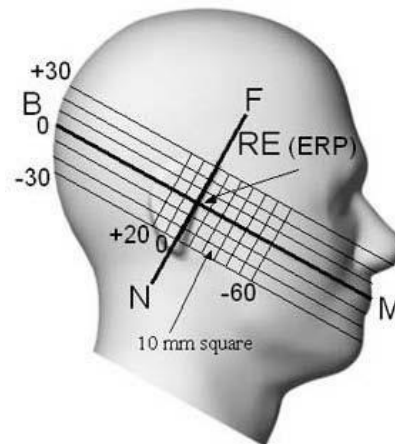


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

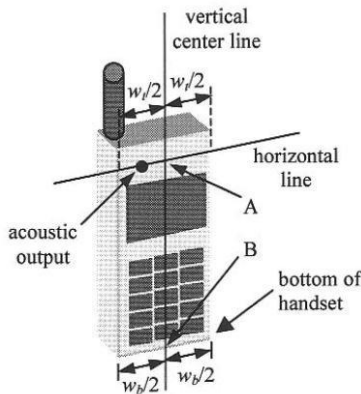


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

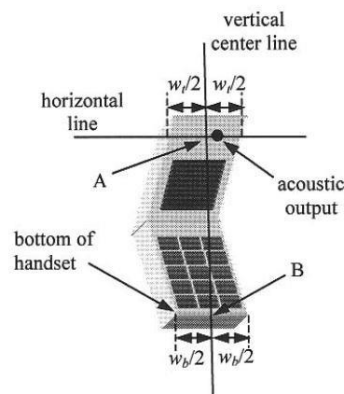


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

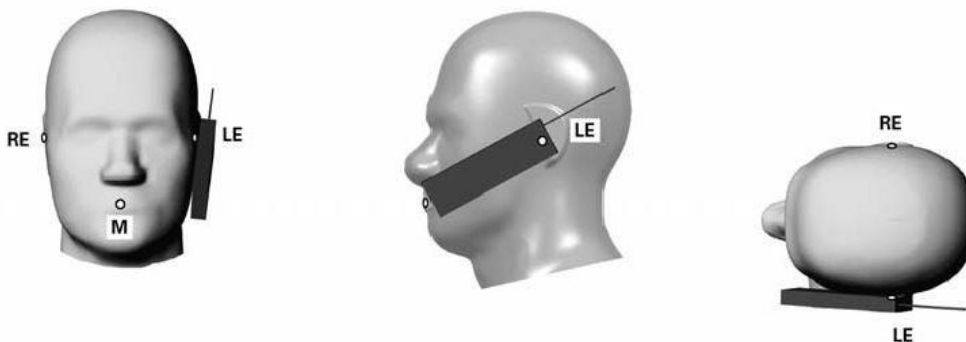


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

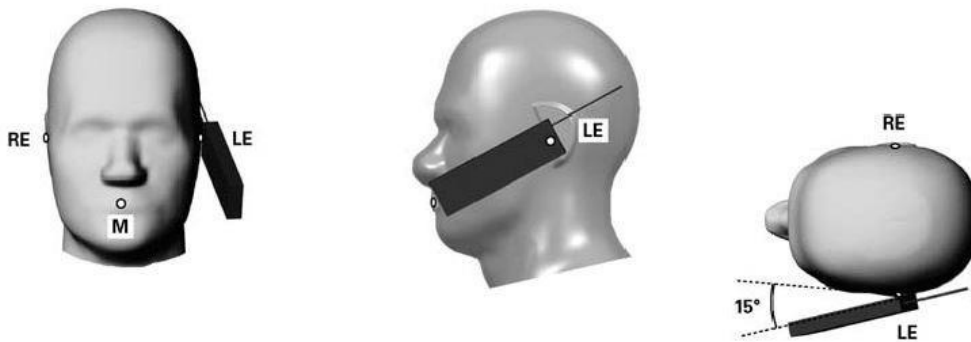


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

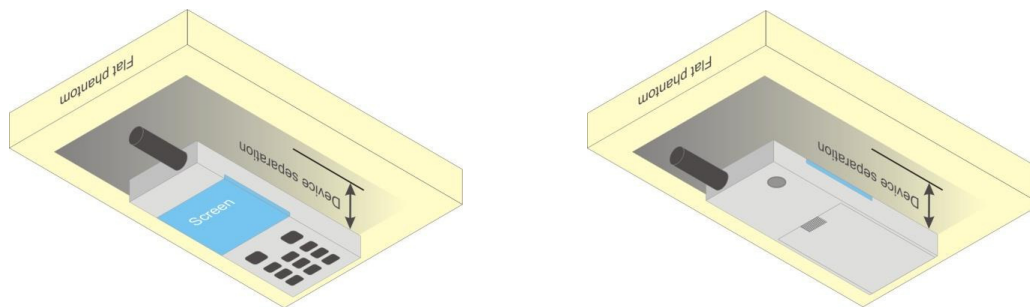


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm \times 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.38	33.25	33.27	33.50	24.38	24.25	24.27	24.50
GPRS 1 Tx slot	33.40	33.32	33.32	33.50	24.40	24.32	24.32	24.50
GPRS 2 Tx slots	29.96	29.85	29.90	31.00	23.96	23.85	23.90	25.00
GPRS 3 Tx slots	28.83	28.69	28.73	29.20	24.57	24.43	24.47	24.94
GPRS 4 Tx slots	27.48	27.40	27.40	28.00	24.48	24.40	24.40	25.00
EDGE 1 Tx slot	26.96	27.01	27.00	27.50	17.96	18.01	18.00	18.50
EDGE 2 Tx slots	26.75	26.78	26.79	27.30	20.75	20.78	20.79	21.30
EDGE 3 Tx slots	26.59	26.59	26.59	27.10	22.33	22.33	22.33	22.84
EDGE 4 Tx slots	26.36	26.42	26.39	26.90	23.36	23.42	23.39	23.90

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	30.24	30.29	30.41	30.50	21.24	21.29	21.41	21.50
GPRS 1 Tx slot	30.24	30.31	30.41	30.50	21.24	21.31	21.41	21.50
GPRS 2 Tx slots	26.92	27.02	27.20	28.00	20.92	21.02	21.20	22.00
GPRS 3 Tx slots	25.16	25.26	25.42	26.50	20.90	21.00	21.16	22.24
GPRS 4 Tx slots	24.46	24.40	24.60	25.00	21.46	21.40	21.60	22.00
EDGE 1 Tx slot	25.66	25.66	25.54	26.00	16.66	16.66	16.54	17.00
EDGE 2 Tx slots	25.48	25.50	25.31	26.00	19.48	19.50	19.31	20.00
EDGE 3 Tx slots	25.06	25.01	24.91	25.50	20.80	20.75	20.65	21.24
EDGE 4 Tx slots	24.60	24.62	24.43	25.00	21.60	21.62	21.43	22.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

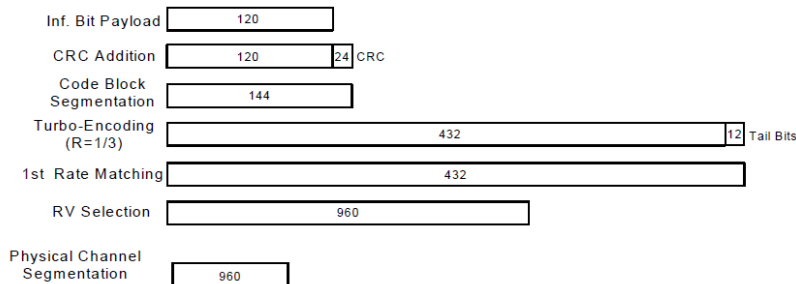


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	23.43	23.43	23.52	24.00	23.13	23.11	23.08	23.50	24.13	24.19	24.26	24.50
3GPP Rel 99	RMC 12.2Kbps	23.50	23.51	23.57	24.00	23.18	23.22	23.17	23.50	24.15	24.20	24.28	24.50
3GPP Rel 6	HSDPA Subtest-1	22.50	22.57	22.68	24.00	22.12	22.23	22.21	23.50	23.17	23.14	23.23	24.50
3GPP Rel 6	HSDPA Subtest-2	22.48	22.53	22.56	24.00	22.13	22.17	22.10	23.50	23.09	23.10	23.16	24.50
3GPP Rel 6	HSDPA Subtest-3	22.00	22.03	22.10	23.50	21.65	21.69	21.64	23.00	22.72	22.69	22.78	24.00
3GPP Rel 6	HSDPA Subtest-4	22.02	22.06	22.12	23.50	21.73	21.64	21.68	23.00	22.61	22.58	22.68	24.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.50	22.45	22.60	24.00	22.12	22.21	22.13	23.50	23.14	23.20	23.26	24.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.43	22.50	22.61	24.00	22.10	22.18	22.12	23.50	23.12	23.17	23.21	24.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.93	21.97	22.10	23.50	21.56	21.63	21.58	23.00	22.57	22.63	22.69	24.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.95	21.92	22.05	23.50	21.59	21.64	21.61	23.00	22.60	22.65	22.71	24.00
3GPP Rel 6	HSUPA Subtest-1	20.51	20.52	20.60	22.50	20.50	20.66	20.66	22.50	21.16	21.16	21.22	23.50
3GPP Rel 6	HSUPA Subtest-2	20.45	20.51	20.57	21.00	20.14	20.14	20.07	20.50	21.12	21.14	21.17	21.50
3GPP Rel 6	HSUPA Subtest-3	21.52	21.49	21.64	22.00	21.17	21.15	21.16	21.50	22.20	22.18	22.26	22.50
3GPP Rel 6	HSUPA Subtest-4	20.04	20.07	20.10	20.50	19.67	19.68	19.59	20.50	20.71	20.63	20.67	21.50
3GPP Rel 6	HSUPA Subtest-5	21.50	21.49	21.50	22.50	21.21	21.13	21.06	22.50	22.13	22.22	22.26	23.50

<Reduced Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938	1537	1638	1738		
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6		
3GPP Rel 99	AMR 12.2Kbps	23.00	22.98	23.02	23.50	21.65	21.66	21.58	22.00
3GPP Rel 99	RMC 12.2Kbps	23.01	23.00	23.06	23.50	21.67	21.71	21.63	22.00
3GPP Rel 6	HSDPA Subtest-1	22.42	22.37	22.47	23.50	21.60	21.64	21.46	22.00
3GPP Rel 6	HSDPA Subtest-2	22.44	22.38	22.46	23.50	21.54	21.67	21.52	22.00
3GPP Rel 6	HSDPA Subtest-3	21.88	21.96	21.99	23.50	21.07	21.12	21.04	22.00
3GPP Rel 6	HSDPA Subtest-4	21.86	21.88	21.92	23.50	21.05	21.09	21.02	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.23	22.21	22.31	23.50	21.47	21.59	21.26	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.30	22.19	22.40	23.50	21.54	21.66	21.39	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.79	21.96	21.85	23.50	21.00	21.04	20.98	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.86	21.70	21.80	23.50	20.86	20.97	20.93	22.00
3GPP Rel 6	HSUPA Subtest-1	20.51	20.51	20.50	22.50	20.06	20.06	20.05	22.00
3GPP Rel 6	HSUPA Subtest-2	20.40	20.39	20.49	21.00	19.63	19.55	19.57	20.50
3GPP Rel 6	HSUPA Subtest-3	21.39	21.41	21.46	22.00	20.53	20.66	20.55	21.50
3GPP Rel 6	HSUPA Subtest-4	19.88	19.87	19.93	20.50	19.02	19.06	19.04	20.50
3GPP Rel 6	HSUPA Subtest-5	21.36	21.33	21.39	22.50	20.52	20.61	20.49	22.00

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.78	23.75	23.74	24	0
20	QPSK	1	49	23.46	23.47	23.45		
20	QPSK	1	99	23.54	23.64	23.63		
20	QPSK	50	0	22.32	21.88	21.96	23	1
20	QPSK	50	24	22.21	21.83	21.92		
20	QPSK	50	50	22.19	21.87	22.01		
20	QPSK	100	0	22.03	21.96	22.21		
20	16QAM	1	0	21.98	21.91	22.26	23	1
20	16QAM	1	49	21.66	21.58	21.88		
20	16QAM	1	99	22.01	21.83	22.01		
20	16QAM	50	0	20.65	20.91	21.12	22	2
20	16QAM	50	24	20.85	20.93	21.05		
20	16QAM	50	50	21.31	21.05	21.16		
20	16QAM	100	0	21.20	20.99	21.31		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.59	23.59	23.55	24	0
15	QPSK	1	37	23.39	23.40	23.38		
15	QPSK	1	74	23.48	23.47	23.49		
15	QPSK	36	0	22.51	22.52	22.46	23	1
15	QPSK	36	20	22.45	22.44	22.42		
15	QPSK	36	39	22.48	22.45	22.43		
15	QPSK	75	0	22.50	22.47	22.43		
15	16QAM	1	0	22.75	22.78	22.79	23	1
15	16QAM	1	37	22.58	22.60	22.60		
15	16QAM	1	74	22.68	22.69	22.68		
15	16QAM	36	0	21.47	21.49	21.45	22	2
15	16QAM	36	20	21.41	21.42	21.42		
15	16QAM	36	39	21.45	21.42	21.41		
15	16QAM	75	0	21.47	21.46	21.43		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.51	23.50	23.46	24	0
10	QPSK	1	25	23.39	23.41	23.39		
10	QPSK	1	49	23.45	23.43	23.45		
10	QPSK	25	0	22.49	22.48	22.45	23	1
10	QPSK	25	12	22.46	22.45	22.42		
10	QPSK	25	25	22.47	22.44	22.41		
10	QPSK	50	0	22.50	22.47	22.45		
10	16QAM	1	0	22.66	22.68	22.64	23	1
10	16QAM	1	25	22.56	22.57	22.56		
10	16QAM	1	49	22.63	22.61	22.63		
10	16QAM	25	0	21.45	21.47	21.46	22	2
10	16QAM	25	12	21.42	21.43	21.43		
10	16QAM	25	25	21.45	21.42	21.42		
10	16QAM	50	0	21.44	21.44	21.44		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.45	23.44	23.39	24	0
5	QPSK	1	12	23.48	23.48	23.45		
5	QPSK	1	24	23.39	23.40	23.39		
5	QPSK	12	0	22.43	22.41	22.40	23	1
5	QPSK	12	7	22.46	22.46	22.43		
5	QPSK	12	13	22.44	22.42	22.41		
5	QPSK	25	0	22.45	22.44	22.42	23	1
5	16QAM	1	0	22.60	22.61	22.60		
5	16QAM	1	12	22.62	22.66	22.65		
5	16QAM	1	24	22.53	22.58	22.58	22	2
5	16QAM	12	0	21.41	21.41	21.42		
5	16QAM	12	7	21.43	21.45	21.44		
5	16QAM	12	13	21.41	21.43	21.43	22	2
5	16QAM	12	13	21.41	21.43	21.43		
5	16QAM	25	0	21.41	21.42	21.42		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.49	23.49	23.45	24	0
3	QPSK	1	8	23.41	23.42	23.38		
3	QPSK	1	14	23.46	23.47	23.44		
3	QPSK	8	0	22.51	22.51	22.47	23	1
3	QPSK	8	4	22.49	22.50	22.46		
3	QPSK	8	7	22.48	22.49	22.45		
3	QPSK	15	0	22.52	22.52	22.49	23	1
3	16QAM	1	0	22.63	22.66	22.63		
3	16QAM	1	8	22.56	22.61	22.57		
3	16QAM	1	14	22.59	22.65	22.62	22	2
3	16QAM	8	0	21.49	21.50	21.48		
3	16QAM	8	4	21.48	21.50	21.48		
3	16QAM	8	7	21.46	21.49	21.47	22	2
3	16QAM	8	7	21.46	21.49	21.47		
3	16QAM	15	0	21.49	21.51	21.49		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.30	23.30	23.26	24	0
1.4	QPSK	1	3	23.27	23.28	23.24		
1.4	QPSK	1	5	23.32	23.33	23.29		
1.4	QPSK	3	0	23.44	23.42	23.38	24	0
1.4	QPSK	3	1	23.43	23.43	23.40		
1.4	QPSK	3	3	23.47	23.46	23.42		
1.4	QPSK	6	0	22.46	22.45	22.41	23	1
1.4	16QAM	1	0	22.56	22.57	22.54	23	1
1.4	16QAM	1	3	22.47	22.52	22.49		
1.4	16QAM	1	5	22.54	22.55	22.53		
1.4	16QAM	3	0	22.47	22.48	22.46	23	1
1.4	16QAM	3	1	22.49	22.51	22.49		
1.4	16QAM	3	3	22.44	22.48	22.45		
1.4	16QAM	6	0	21.46	21.47	21.46	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.83	24.00	23.94	24	0
20	QPSK	1	49	23.51	23.61	23.68		
20	QPSK	1	99	23.91	23.75	23.81		
20	QPSK	50	0	22.64	22.91	22.81	23	1
20	QPSK	50	24	22.62	22.77	22.70		
20	QPSK	50	50	22.90	22.88	22.81		
20	QPSK	100	0	22.68	22.86	22.83		
20	16QAM	1	0	22.98	22.94	22.98	23	1
20	16QAM	1	49	22.66	22.73	22.76		
20	16QAM	1	99	22.89	22.86	22.90		
20	16QAM	50	0	21.55	21.79	21.78	22	2
20	16QAM	50	24	21.64	21.65	21.69		
20	16QAM	50	50	21.79	21.76	21.71		
20	16QAM	100	0	21.68	21.78	21.69		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.61	23.69	23.69	24	0
15	QPSK	1	37	23.42	23.57	23.55		
15	QPSK	1	74	23.68	23.64	23.61		
15	QPSK	36	0	22.44	22.67	22.58	23	1
15	QPSK	36	20	22.44	22.62	22.60		
15	QPSK	36	39	22.64	22.58	22.58		
15	QPSK	75	0	22.51	22.70	22.62		
15	16QAM	1	0	22.71	22.88	22.88	23	1
15	16QAM	1	37	22.57	22.59	22.63		
15	16QAM	1	74	22.77	22.67	22.62		
15	16QAM	36	0	21.47	21.52	21.50	22	2
15	16QAM	36	20	21.46	21.53	21.50		
15	16QAM	36	39	21.54	21.51	21.47		
15	16QAM	75	0	21.53	21.58	21.58		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.79	23.70	23.79	24	0
10	QPSK	1	25	23.67	23.53	23.65		
10	QPSK	1	49	23.56	23.57	23.57		
10	QPSK	25	0	22.40	22.66	22.75	23	1
10	QPSK	25	12	22.47	22.62	22.85		
10	QPSK	25	25	22.53	22.64	22.87		
10	QPSK	50	0	22.50	22.66	22.84		
10	16QAM	1	0	22.59	22.75	22.92	23	1
10	16QAM	1	25	22.54	22.73	22.70		
10	16QAM	1	49	22.57	22.74	22.76		
10	16QAM	25	0	21.53	21.76	21.79	22	2
10	16QAM	25	12	21.65	21.76	21.86		
10	16QAM	25	25	21.56	21.98	21.94		
10	16QAM	50	0	21.72	21.95	21.96		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.87	23.84	23.87	24	0
5	QPSK	1	12	23.86	23.80	23.95		
5	QPSK	1	24	23.55	23.64	23.80		
5	QPSK	12	0	22.49	22.82	22.80	23	1
5	QPSK	12	7	22.49	22.96	22.92		
5	QPSK	12	13	22.55	22.87	22.85		
5	QPSK	25	0	22.41	22.96	22.93	23	1
5	16QAM	1	0	22.56	22.80	22.89		
5	16QAM	1	12	22.58	22.90	22.91		
5	16QAM	1	24	22.58	22.99	22.72	22	2
5	16QAM	12	0	21.32	22.00	21.82		
5	16QAM	12	7	21.43	21.97	21.93		
5	16QAM	12	13	21.51	21.93	21.91	22	2
5	16QAM	12	13	21.51	21.93	21.91		
5	16QAM	25	0	21.59	21.92	21.94		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.66	23.87	23.61	24	0
3	QPSK	1	8	23.89	23.76	23.80		
3	QPSK	1	14	23.92	23.73	23.85		
3	QPSK	8	0	22.79	22.99	22.94	23	1
3	QPSK	8	4	22.66	22.93	22.96		
3	QPSK	8	7	22.48	22.88	22.90		
3	QPSK	15	0	22.61	22.86	22.88	23	1
3	16QAM	1	0	22.41	22.79	22.94		
3	16QAM	1	8	22.27	22.78	22.80		
3	16QAM	1	14	22.34	22.91	22.88	22	2
3	16QAM	8	0	21.23	21.97	21.90		
3	16QAM	8	4	21.49	21.95	21.85		
3	16QAM	8	7	21.59	22.00	21.85	22	2
3	16QAM	8	7	21.59	22.00	21.85		
3	16QAM	15	0	21.64	22.00	21.85		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.74	23.73	23.56	24	0
1.4	QPSK	1	3	23.75	23.67	23.48		
1.4	QPSK	1	5	23.73	23.75	23.52		
1.4	QPSK	3	0	23.84	23.89	23.67	24	0
1.4	QPSK	3	1	23.91	23.86	23.74		
1.4	QPSK	3	3	23.92	23.74	23.72		
1.4	QPSK	6	0	22.88	22.84	22.75	23	1
1.4	16QAM	1	0	22.84	22.86	22.62	23	1
1.4	16QAM	1	3	22.85	22.80	22.61		
1.4	16QAM	1	5	22.88	22.88	22.64		
1.4	16QAM	3	0	22.85	22.82	22.67	23	1
1.4	16QAM	3	1	22.69	22.91	22.67		
1.4	16QAM	3	3	22.75	22.85	22.64		
1.4	16QAM	6	0	21.84	21.83	21.61	22	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.97	24.00	23.88	24	0
10	QPSK	1	25	23.87	23.90	23.86		
10	QPSK	1	49	23.95	23.81	23.77		
10	QPSK	25	0	22.73	22.91	22.95	23	1
10	QPSK	25	12	22.88	22.89	22.80		
10	QPSK	25	25	22.79	22.84	22.94		
10	QPSK	50	0	22.89	22.70	22.96		
10	16QAM	1	0	22.97	22.80	22.92	23	1
10	16QAM	1	25	22.92	22.91	22.93		
10	16QAM	1	49	22.85	22.92	22.83		
10	16QAM	25	0	21.97	21.82	21.92	22	2
10	16QAM	25	12	21.92	21.93	21.95		
10	16QAM	25	25	21.92	21.90	21.81		
10	16QAM	50	0	21.81	21.83	21.93		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.92	23.87	23.83	24	0
5	QPSK	1	12	23.78	23.86	23.91		
5	QPSK	1	24	23.91	23.81	23.96		
5	QPSK	12	0	22.86	22.90	22.97	23	1
5	QPSK	12	7	22.78	22.98	22.99		
5	QPSK	12	13	22.69	22.93	22.98		
5	QPSK	25	0	22.87	22.81	22.99		
5	16QAM	1	0	22.76	22.83	22.84	23	1
5	16QAM	1	12	22.74	22.82	22.83		
5	16QAM	1	24	22.73	22.91	22.79		
5	16QAM	12	0	21.87	21.82	21.85	22	2
5	16QAM	12	7	21.83	21.80	21.90		
5	16QAM	12	13	21.98	21.87	21.85		
5	16QAM	25	0	21.97	21.86	21.87		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.80	23.71	23.74	24	0
3	QPSK	1	8	23.95	23.89	23.81		
3	QPSK	1	14	23.76	23.67	23.78		
3	QPSK	8	0	22.93	22.92	22.98	23	1
3	QPSK	8	4	23.00	22.86	22.98		
3	QPSK	8	7	22.94	22.88	22.97		
3	QPSK	15	0	22.99	22.97	23.00		
3	16QAM	1	0	22.98	22.92	22.98	23	1
3	16QAM	1	8	22.89	22.97	22.91		
3	16QAM	1	14	22.94	22.97	22.93		
3	16QAM	8	0	21.94	21.95	21.92	22	2
3	16QAM	8	4	21.92	21.93	21.92		
3	16QAM	8	7	21.98	21.91	21.88		
3	16QAM	15	0	21.91	21.96	21.95		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.66	23.56	23.60	24	0
1.4	QPSK	1	3	23.92	23.85	23.80		
1.4	QPSK	1	5	23.67	23.57	23.64		
1.4	QPSK	3	0	23.98	23.90	23.93		
1.4	QPSK	3	1	23.99	23.96	23.90		
1.4	QPSK	3	3	23.99	23.83	23.83		
1.4	QPSK	6	0	22.92	22.95	22.95	23	1
1.4	16QAM	1	0	22.80	22.80	22.83	23	1
1.4	16QAM	1	3	22.82	22.69	22.90		
1.4	16QAM	1	5	22.85	22.75	22.83		
1.4	16QAM	3	0	22.73	22.73	22.86		
1.4	16QAM	3	1	22.86	22.78	22.94		
1.4	16QAM	3	3	22.85	22.70	22.87		
1.4	16QAM	6	0	21.86	21.88	21.92	22	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.91	23.13	22.95		
20	QPSK	1	49	22.72	22.89	22.64	23.5	0
20	QPSK	1	99	23.10	23.05	22.80		
20	QPSK	50	0	21.81	21.90	21.73		
20	QPSK	50	24	21.75	21.89	21.49	22.5	1
20	QPSK	50	50	21.76	21.80	21.53		
20	QPSK	100	0	21.81	21.86	21.65		
20	16QAM	1	0	22.25	22.37	22.22	22.5	1
20	16QAM	1	49	22.02	22.18	22.04		
20	16QAM	1	99	22.45	22.32	22.07		
20	16QAM	50	0	20.90	20.96	20.76	21.5	2
20	16QAM	50	24	20.80	20.86	20.51		
20	16QAM	50	50	20.75	20.87	20.55		
20	16QAM	100	0	20.50	20.92	20.67		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.83	22.98	22.72	23.5	0
15	QPSK	1	37	23.10	22.93	22.69		
15	QPSK	1	74	23.02	22.98	22.62		
15	QPSK	36	0	21.78	21.92	21.55	22.5	1
15	QPSK	36	20	21.71	21.91	21.49		
15	QPSK	36	39	21.81	21.88	21.53		
15	QPSK	75	0	21.83	21.90	21.52	22.5	1
15	16QAM	1	0	22.22	22.28	21.89		
15	16QAM	1	37	22.06	22.22	21.79		
15	16QAM	1	74	22.26	22.26	21.96	21.5	2
15	16QAM	36	0	20.85	20.93	20.57		
15	16QAM	36	20	20.82	20.93	20.51		
15	16QAM	36	39	20.82	20.89	20.55		
15	16QAM	75	0	20.86	20.93	20.57		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.82	22.87	22.59	23.5	0
10	QPSK	1	25	22.82	22.91	22.47		
10	QPSK	1	49	22.93	22.96	22.61		
10	QPSK	25	0	21.79	21.85	21.46	22.5	1
10	QPSK	25	12	21.79	21.89	21.45		
10	QPSK	25	25	21.80	21.86	21.45		
10	QPSK	50	0	21.81	21.88	21.48	22.5	1
10	16QAM	1	0	22.07	22.15	21.73		
10	16QAM	1	25	22.06	22.18	21.75		
10	16QAM	1	49	22.19	22.23	21.89	21.5	2
10	16QAM	25	0	20.81	20.88	20.51		
10	16QAM	25	12	20.81	20.92	20.51		
10	16QAM	25	25	20.83	20.89	20.50		
10	16QAM	50	0	20.81	20.89	20.51		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.81	22.88	22.62	23.5	0
5	QPSK	1	12	22.88	22.96	22.50		
5	QPSK	1	24	22.82	22.87	22.48		
5	QPSK	12	0	21.79	21.86	21.44	22.5	1
5	QPSK	12	7	21.82	21.91	21.47		
5	QPSK	12	13	21.79	21.85	21.43		
5	QPSK	25	0	21.79	21.87	21.45		
5	16QAM	1	0	22.05	22.15	21.83	22.5	1
5	16QAM	1	12	22.09	22.23	21.78		
5	16QAM	1	24	22.04	22.13	21.73		
5	16QAM	12	0	20.81	20.90	20.50	21.5	2
5	16QAM	12	7	20.84	20.94	20.53		
5	16QAM	12	13	20.81	20.90	20.48		
5	16QAM	25	0	20.80	20.89	20.47		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	24.30	24.40	24.35	24.5	0
10	QPSK	1	25	24.15	24.32	24.22		
10	QPSK	1	49	24.24	24.31	24.28		
10	QPSK	25	0	23.19	23.42	23.31	23.5	1
10	QPSK	25	12	23.39	23.38	23.25		
10	QPSK	25	25	23.30	23.28	23.14		
10	QPSK	50	0	23.37	23.32	23.25		
10	16QAM	1	0	23.38	23.41	23.36	23.5	1
10	16QAM	1	25	23.47	23.40	23.33		
10	16QAM	1	49	23.47	23.47	23.32		
10	16QAM	25	0	22.34	22.36	22.34	22.5	2
10	16QAM	25	12	22.37	22.32	22.16		
10	16QAM	25	25	22.33	22.24	22.10		
10	16QAM	50	0	22.33	22.30	22.22		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	24.17	24.17	24.04	24.5	0
5	QPSK	1	12	24.28	24.22	24.09		
5	QPSK	1	24	24.24	24.09	24.04		
5	QPSK	12	0	23.20	23.20	23.05	23.5	1
5	QPSK	12	7	23.27	23.20	23.09		
5	QPSK	12	13	23.30	23.16	23.05		
5	QPSK	25	0	23.28	23.20	23.07		
5	16QAM	1	0	23.25	23.28	23.18	23.5	1
5	16QAM	1	12	23.29	23.22	23.17		
5	16QAM	1	24	23.28	23.10	23.11		
5	16QAM	12	0	22.18	22.16	22.06	22.5	2
5	16QAM	12	7	22.26	22.18	22.12		
5	16QAM	12	13	22.29	22.13	22.07		
5	16QAM	25	0	22.25	22.14	22.05		
Channel				23025	23095	23165		
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	24.17	24.12	23.97	24.5	0
3	QPSK	1	8	24.13	24.04	23.92		
3	QPSK	1	14	24.21	24.13	23.99		
3	QPSK	8	0	23.21	23.13	23.02	23.5	1
3	QPSK	8	4	23.21	23.13	23.02		
3	QPSK	8	7	23.21	23.12	23.00		
3	QPSK	15	0	23.25	23.18	23.06		
3	16QAM	1	0	23.21	23.19	23.14	23.5	1
3	16QAM	1	8	23.24	23.14	23.11		
3	16QAM	1	14	23.32	23.22	23.16		
3	16QAM	8	0	22.17	22.10	22.06	22.5	2
3	16QAM	8	4	22.20	22.10	22.07		
3	16QAM	8	7	22.20	22.10	22.04		
3	16QAM	15	0	22.20	22.14	22.07		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	24.07	24.03	23.89	24.5	0
1.4	QPSK	1	3	24.06	23.99	23.86		
1.4	QPSK	1	5	24.12	24.06	23.90		
1.4	QPSK	3	0	24.21	24.16	24.01		
1.4	QPSK	3	1	24.24	24.18	24.03		
1.4	QPSK	3	3	24.26	24.20	24.06		
1.4	QPSK	6	0	23.25	23.18	23.05	23.5	1
1.4	16QAM	1	0	23.20	23.18	23.12	23.5	1
1.4	16QAM	1	3	23.19	23.14	23.07		
1.4	16QAM	1	5	23.25	23.19	23.10		
1.4	16QAM	3	0	23.19	23.15	23.08		
1.4	16QAM	3	1	23.23	23.19	23.11		
1.4	16QAM	3	3	23.20	23.15	23.07		
1.4	16QAM	6	0	22.24	22.19	22.11	22.5	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	23.79			24.5	0
10	QPSK	1	25	23.71				
10	QPSK	1	49	23.72				
10	QPSK	25	0	22.80			23.5	1
10	QPSK	25	12	22.76				
10	QPSK	25	25	22.79				
10	QPSK	50	0	22.72				
10	16QAM	1	0	22.87			23.5	1
10	16QAM	1	25	22.94				
10	16QAM	1	49	22.92				
10	16QAM	25	0	21.67			22.5	2
10	16QAM	25	12	21.72				
10	16QAM	25	25	21.81				
10	16QAM	50	0	21.74				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.77	23.65	23.66	24.5	0
5	QPSK	1	12	23.71	23.72	23.72		
5	QPSK	1	24	23.68	23.67	23.73		
5	QPSK	12	0	22.62	22.64	22.62	23.5	1
5	QPSK	12	7	22.71	22.73	22.74		
5	QPSK	12	13	22.75	22.78	22.75		
5	QPSK	25	0	22.69	22.71	22.69		
5	16QAM	1	0	22.86	22.95	22.98	23.5	1
5	16QAM	1	12	22.99	23.04	23.00		
5	16QAM	1	24	22.99	22.95	22.91		
5	16QAM	12	0	21.74	21.77	21.72	22.5	2
5	16QAM	12	7	21.83	21.85	21.82		
5	16QAM	12	13	21.87	21.88	21.82		
5	16QAM	12	13	21.87	21.88	21.82		
5	16QAM	25	0	21.78	21.79	21.75		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	24.28	24.33	24.29		
10	QPSK	1	25	24.28	24.24	24.10	24.5	0
10	QPSK	1	49	24.24	24.21	24.21		
10	QPSK	25	0	23.39	23.40	23.36		
10	QPSK	25	12	23.31	23.26	23.22	23.5	1
10	QPSK	25	25	23.21	23.15	23.10		
10	QPSK	50	0	23.32	23.35	23.26		
10	16QAM	1	0	23.43	23.34	23.34	23.5	1
10	16QAM	1	25	23.35	23.33	23.22		
10	16QAM	1	49	23.38	23.36	23.35		
10	16QAM	25	0	22.34	22.32	22.32	22.5	2
10	16QAM	25	12	22.28	22.23	22.20		
10	16QAM	25	25	22.19	22.14	22.10		
10	16QAM	50	0	22.26	22.24	22.22		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	24.19	24.22	24.02	24.5	0
5	QPSK	1	12	24.12	24.25	24.11		
5	QPSK	1	24	24.18	24.06	24.06		
5	QPSK	12	0	23.28	23.23	23.05	23.5	1
5	QPSK	12	7	23.16	23.19	23.10		
5	QPSK	12	13	23.12	23.09	23.04		
5	QPSK	25	0	23.18	23.18	23.07	23.5	1
5	16QAM	1	0	23.13	23.26	23.18		
5	16QAM	1	12	23.28	23.22	23.29		
5	16QAM	1	24	23.22	23.22	23.24	22.5	2
5	16QAM	12	0	22.21	22.21	22.06		
5	16QAM	12	7	22.14	22.18	22.13		
5	16QAM	12	13	22.10	22.09	22.07		
5	16QAM	25	0	22.09	22.14	22.07		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.21	23.26	23.22	23.5	0
20	QPSK	1	49	22.86	22.95	23.16		
20	QPSK	1	99	22.81	22.91	23.12		
20	QPSK	50	0	21.85	21.97	22.11	22.5	1
20	QPSK	50	24	21.83	21.86	21.94		
20	QPSK	50	50	21.89	21.95	21.79		
20	QPSK	100	0	21.85	21.91	21.87		
20	16QAM	1	0	22.17	22.19	21.74	22.5	1
20	16QAM	1	49	21.95	21.86	21.74		
20	16QAM	1	99	21.89	21.90	21.72		
20	16QAM	50	0	20.80	20.85	20.61	21.5	2
20	16QAM	50	24	20.78	20.79	20.75		
20	16QAM	50	50	20.80	20.87	20.93		
20	16QAM	100	0	20.80	20.88	20.78		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.20	22.71	23.18	23.5	0
15	QPSK	1	37	22.90	22.50	23.13		
15	QPSK	1	74	22.93	22.54	23.07		
15	QPSK	36	0	21.96	21.56	22.36	22.5	1
15	QPSK	36	20	21.92	21.55	22.32		
15	QPSK	36	39	21.96	21.60	22.36		
15	QPSK	75	0	21.96	21.65	22.38		
15	16QAM	1	0	22.36	21.85	22.39	22.5	1
15	16QAM	1	37	22.06	21.65	22.45		
15	16QAM	1	74	22.07	21.68	22.46		
15	16QAM	36	0	20.90	20.66	21.30	21.5	2
15	16QAM	36	20	20.87	20.63	21.27		
15	16QAM	36	39	20.90	20.89	21.29		
15	16QAM	75	0	20.91	20.85	21.32		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	23.05	22.51	22.84	23.5	0
10	QPSK	1	25	22.80	22.41	22.66		
10	QPSK	1	49	22.82	22.44	22.43		
10	QPSK	25	0	21.83	21.41	21.73	22.5	1
10	QPSK	25	12	21.83	21.55	21.79		
10	QPSK	25	25	21.86	21.62	21.73		
10	QPSK	50	0	21.87	21.78	21.72		
10	16QAM	1	0	22.20	21.76	21.58	22.5	1
10	16QAM	1	25	21.97	21.59	21.50		
10	16QAM	1	49	21.99	21.73	21.58		
10	16QAM	25	0	20.80	20.78	20.79	21.5	2
10	16QAM	25	12	20.80	21.08	20.97		
10	16QAM	25	25	20.84	21.26	21.01		
10	16QAM	50	0	20.83	21.18	20.99		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	23.01	22.49	23.21	23.5	0
5	QPSK	1	12	22.93	22.55	22.98		
5	QPSK	1	24	22.87	22.54	22.74		
5	QPSK	12	0	21.87	21.86	22.02	22.5	1
5	QPSK	12	7	21.87	22.05	22.12		
5	QPSK	12	13	21.86	22.05	22.10		
5	QPSK	25	0	21.87	22.03	22.08		
5	16QAM	1	0	22.14	22.01	21.95	22.5	1
5	16QAM	1	12	22.02	21.96	22.12		
5	16QAM	1	24	21.95	22.12	21.90		
5	16QAM	12	0	20.88	21.09	21.05	21.5	2
5	16QAM	12	7	20.83	21.19	21.18		
5	16QAM	12	13	20.89	21.31	21.09		
5	16QAM	25	0	20.96	21.22	21.14		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	23.05	22.56	23.18	23.5	0
3	QPSK	1	8	23.04	22.55	22.88		
3	QPSK	1	14	22.74	22.56	22.64		
3	QPSK	8	0	21.97	22.06	21.90	22.5	1
3	QPSK	8	4	21.92	22.00	22.17		
3	QPSK	8	7	21.87	22.27	22.01		
3	QPSK	15	0	21.85	22.05	22.13		
3	16QAM	1	0	21.98	22.18	22.01	22.5	1
3	16QAM	1	8	21.81	22.16	21.95		
3	16QAM	1	14	21.82	22.20	21.93		
3	16QAM	8	0	20.84	21.27	21.15	21.5	2
3	16QAM	8	4	20.77	21.28	21.17		
3	16QAM	8	7	20.69	21.35	21.18		
3	16QAM	15	0	20.79	21.35	21.17		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	23.02	22.28	22.77	23.5	0
1.4	QPSK	1	3	22.80	22.25	22.64		
1.4	QPSK	1	5	22.81	22.29	22.49		
1.4	QPSK	3	0	22.95	22.39	22.60		
1.4	QPSK	3	1	22.95	22.39	22.51		
1.4	QPSK	3	3	22.95	22.43	22.53		
1.4	QPSK	6	0	21.96	21.58	21.92	22.5	1
1.4	16QAM	1	0	22.09	21.56	21.75	22.5	1
1.4	16QAM	1	3	21.98	21.49	21.83		
1.4	16QAM	1	5	22.01	21.62	21.69		
1.4	16QAM	3	0	21.99	21.60	21.82		
1.4	16QAM	3	1	22.00	21.63	21.80		
1.4	16QAM	3	3	21.93	21.84	21.82		
1.4	16QAM	6	0	20.96	21.16	21.05	21.5	2



<Reduced Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.95	22.90	22.83	23	0
20	QPSK	1	49	22.48	22.56	22.67		
20	QPSK	1	99	22.56	22.57	22.62		
20	QPSK	50	0	22.07	21.95	21.99	23	0
20	QPSK	50	24	21.86	21.90	21.84		
20	QPSK	50	50	21.97	21.93	21.98		
20	QPSK	100	0	22.02	21.94	21.86		
20	16QAM	1	0	22.24	22.32	22.33	23	0
20	16QAM	1	49	21.98	22.03	22.08		
20	16QAM	1	99	22.27	22.29	22.33		
20	16QAM	50	0	21.99	21.92	21.78	22	1
20	16QAM	50	24	21.86	21.89	21.78		
20	16QAM	50	50	21.88	21.93	21.88		
20	16QAM	100	0	21.89	21.98	21.79		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.53	22.48	22.51	23	0
15	QPSK	1	37	22.30	22.33	22.36		
15	QPSK	1	74	22.46	22.43	22.51		
15	QPSK	36	0	21.89	21.90	21.88	23	0
15	QPSK	36	20	21.84	21.84	21.87		
15	QPSK	36	39	21.86	21.86	21.87		
15	QPSK	75	0	21.86	21.87	21.86		
15	16QAM	1	0	22.13	22.22	22.25	23	0
15	16QAM	1	37	21.98	22.05	22.09		
15	16QAM	1	74	22.15	22.16	22.24		
15	16QAM	36	0	21.84	21.87	21.89	22	1
15	16QAM	36	20	21.78	21.85	21.89		
15	16QAM	36	39	21.86	21.84	21.84		
15	16QAM	75	0	21.84	21.86	21.91		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.34	22.38	22.41	23	0
10	QPSK	1	25	22.26	22.32	22.35		
10	QPSK	1	49	22.32	22.36	22.44		
10	QPSK	25	0	21.82	21.86	21.88	23	0
10	QPSK	25	12	21.78	21.83	21.87		
10	QPSK	25	25	21.78	21.80	21.85		
10	QPSK	50	0	21.82	21.84	21.87		
10	16QAM	1	0	22.03	22.10	22.13	23	0
10	16QAM	1	25	21.94	22.04	22.08		
10	16QAM	1	49	22.02	22.08	22.17		
10	16QAM	25	0	21.81	21.85	21.91	22	1
10	16QAM	25	12	21.77	21.84	21.59		
10	16QAM	25	25	21.79	21.82	21.84		
10	16QAM	50	0	21.79	21.84	21.88		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.88	22.57	22.77	23	0
5	QPSK	1	12	22.78	22.68	22.63		
5	QPSK	1	24	22.79	22.67	22.54		
5	QPSK	12	0	21.74	21.83	21.90	23	0
5	QPSK	12	7	21.77	21.87	21.89		
5	QPSK	12	13	21.75	21.84	21.86		
5	QPSK	25	0	21.75	21.90	21.89	23	0
5	16QAM	1	0	21.96	22.11	22.06		
5	16QAM	1	12	21.98	22.18	22.13		
5	16QAM	1	24	21.92	22.07	22.10	22	1
5	16QAM	12	0	21.73	21.78	21.92		
5	16QAM	12	7	21.78	21.82	21.91		
5	16QAM	12	13	21.75	21.85	21.91	22	1
5	16QAM	12	13	21.75	21.85	21.91		
5	16QAM	25	0	21.74	21.78	21.89		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.55	22.33	22.47	23	0
3	QPSK	1	8	22.41	22.16	22.26		
3	QPSK	1	14	22.39	22.14	22.22		
3	QPSK	8	0	21.98	22.70	22.71	23	0
3	QPSK	8	4	22.07	22.70	22.47		
3	QPSK	8	7	22.02	22.69	22.36		
3	QPSK	15	0	22.21	22.64	22.45	23	0
3	16QAM	1	0	22.22	22.75	22.33		
3	16QAM	1	8	22.24	22.68	22.30		
3	16QAM	1	14	22.34	22.63	22.45	22	1
3	16QAM	8	0	21.39	21.79	21.29		
3	16QAM	8	4	21.49	21.80	21.41		
3	16QAM	8	7	21.61	21.81	21.51	22	1
3	16QAM	8	7	21.61	21.81	21.51		
3	16QAM	15	0	21.68	21.85	21.65		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.20	22.56	22.64	23	0
1.4	QPSK	1	3	22.16	22.51	22.48		
1.4	QPSK	1	5	22.16	22.43	22.30		
1.4	QPSK	3	0	22.32	22.54	22.38	23	0
1.4	QPSK	3	1	22.30	22.60	22.34		
1.4	QPSK	3	3	22.29	22.45	22.36		
1.4	QPSK	6	0	21.79	22.46	21.83	23	0
1.4	16QAM	1	0	21.92	22.10	22.02	23	0
1.4	16QAM	1	3	21.98	22.18	21.97		
1.4	16QAM	1	5	21.98	22.26	22.03		
1.4	16QAM	3	0	21.94	22.27	21.92	23	0
1.4	16QAM	3	1	22.01	22.16	21.96		
1.4	16QAM	3	3	21.99	22.21	21.92		
1.4	16QAM	6	0	21.03	21.61	21.05	22	1



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.21	21.40	21.37	21.5	0
20	QPSK	1	49	21.11	21.21	21.14		
20	QPSK	1	99	21.12	21.04	20.99		
20	QPSK	50	0	21.02	21.04	21.03	21.5	0
20	QPSK	50	24	20.86	20.95	20.91		
20	QPSK	50	50	20.89	21.02	20.89		
20	QPSK	100	0	20.86	21.02	20.99	21.5	0
20	16QAM	1	0	21.17	21.38	21.39		
20	16QAM	1	49	20.94	21.12	21.14		
20	16QAM	1	99	21.23	21.27	21.19	21.5	0
20	16QAM	50	0	20.67	20.97	20.92		
20	16QAM	50	24	20.76	20.88	20.88		
20	16QAM	50	50	20.95	20.99	20.99	21.5	0
20	16QAM	100	0	20.84	20.98	20.96		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.72	20.93	20.84	21.5	0
15	QPSK	1	37	20.73	20.76	20.86		
15	QPSK	1	74	20.92	20.90	20.85		
15	QPSK	36	0	20.54	20.93	20.90	21.5	0
15	QPSK	36	20	20.73	20.99	20.88		
15	QPSK	36	39	20.85	20.97	20.54		
15	QPSK	75	0	20.69	20.79	20.58	21.5	0
15	16QAM	1	0	20.88	20.87	20.98		
15	16QAM	1	37	20.73	20.98	20.94		
15	16QAM	1	74	21.00	21.00	20.87	21.5	0
15	16QAM	36	0	20.41	20.69	20.64		
15	16QAM	36	20	20.51	20.86	20.64		
15	16QAM	36	39	20.75	20.77	20.63	21.5	0
15	16QAM	75	0	20.63	20.95	20.65		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.50	20.88	20.87	21.5	0
10	QPSK	1	25	20.45	20.50	20.58		
10	QPSK	1	49	20.54	20.58	20.64		
10	QPSK	25	0	20.31	20.63	20.64	21.5	0
10	QPSK	25	12	20.29	20.64	20.66		
10	QPSK	25	25	20.32	20.63	20.67		
10	QPSK	50	0	20.50	20.58	20.68	21.5	0
10	16QAM	1	0	20.45	20.84	20.93		
10	16QAM	1	25	20.55	20.88	20.88		
10	16QAM	1	49	20.47	20.93	20.84	21.5	0
10	16QAM	25	0	20.73	20.63	20.58		
10	16QAM	25	12	20.68	20.40	20.60		
10	16QAM	25	25	20.38	20.36	20.54	21.5	0
10	16QAM	50	0	20.93	20.47	20.62		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.62	20.85	20.65	21.5	0
5	QPSK	1	12	20.48	20.66	20.47		
5	QPSK	1	24	20.36	20.56	20.41		
5	QPSK	12	0	20.58	20.58	20.87	21.5	0
5	QPSK	12	7	20.69	20.76	20.93		
5	QPSK	12	13	20.73	20.83	20.92		
5	QPSK	25	0	20.50	20.82	20.92	21.5	0
5	16QAM	1	0	20.72	20.87	20.84		
5	16QAM	1	12	21.02	20.99	20.98		
5	16QAM	1	24	20.90	20.91	20.88	21.5	0
5	16QAM	12	0	20.53	20.72	20.87		
5	16QAM	12	7	20.54	20.70	20.96		
5	16QAM	12	13	20.59	20.74	20.93	21.5	0
5	16QAM	25	0	20.54	20.60	20.90		
Channel				19965	20175	20385		
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.93	20.90	21.06	21.5	0
3	QPSK	1	8	20.87	20.99	20.98		
3	QPSK	1	14	20.92	20.78	21.03		
3	QPSK	8	0	20.85	21.09	21.05	21.5	0
3	QPSK	8	4	20.77	21.09	21.03		
3	QPSK	8	7	20.82	21.08	21.03		
3	QPSK	15	0	20.66	21.13	21.07	21.5	0
3	16QAM	1	0	20.69	21.04	21.06		
3	16QAM	1	8	20.75	21.10	21.06		
3	16QAM	1	14	20.67	21.03	21.09	21.5	0
3	16QAM	8	0	20.77	20.99	21.00		
3	16QAM	8	4	20.68	21.04	21.02		
3	16QAM	8	7	20.58	21.02	20.99	21.5	0
3	16QAM	15	0	20.58	20.98	21.02		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.03	21.17	21.18	21.5	0
1.4	QPSK	1	3	21.01	21.19	21.15		
1.4	QPSK	1	5	21.07	21.14	21.19		
1.4	QPSK	3	0	21.04	20.84	20.89	21.5	0
1.4	QPSK	3	1	21.05	20.85	20.89		
1.4	QPSK	3	3	21.07	20.88	20.93		
1.4	QPSK	6	0	21.16	20.85	20.89	21.5	0
1.4	16QAM	1	0	21.21	20.96	21.05	21.5	0
1.4	16QAM	1	3	20.97	20.92	20.98		
1.4	16QAM	1	5	21.04	20.95	21.04		
1.4	16QAM	3	0	20.80	20.90	20.96	21.5	0
1.4	16QAM	3	1	20.81	20.94	20.96		
1.4	16QAM	3	3	20.73	20.83	20.96		
1.4	16QAM	6	0	20.66	21.02	20.96	21.5	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	21.5	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.17	21.36	21.31	21.5	0
20	QPSK	1	49	21.15	21.32	21.31		
20	QPSK	1	99	21.11	21.35	21.24		
20	QPSK	50	0	21.30	21.31	21.11	21.5	0
20	QPSK	50	24	21.17	21.27	20.85		
20	QPSK	50	50	21.27	21.27	20.92		
20	QPSK	100	0	21.29	21.30	21.01	21.5	0
20	16QAM	1	0	21.27	21.27	21.22		
20	16QAM	1	49	21.05	21.19	20.76		
20	16QAM	1	99	21.30	21.37	21.13	21.5	0
20	16QAM	50	0	20.90	20.93	20.73		
20	16QAM	50	24	20.80	20.90	20.48		
20	16QAM	50	50	20.89	20.89	20.56	21.5	0
20	16QAM	100	0	20.91	20.93	20.66		
Channel				20825	21100	21375	21.5	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.31	21.37	20.95	21.5	0
15	QPSK	1	37	21.18	21.33	20.86		
15	QPSK	1	74	21.39	21.39	21.10		
15	QPSK	36	0	21.19	21.03	20.82	21.5	0
15	QPSK	36	20	21.16	21.30	20.78		
15	QPSK	36	39	21.09	21.22	20.86		
15	QPSK	75	0	20.84	21.42	20.87	21.5	0
15	16QAM	1	0	21.17	21.25	20.85		
15	16QAM	1	37	21.07	21.22	20.77		
15	16QAM	1	74	21.28	21.27	20.98	21.5	0
15	16QAM	36	0	20.80	20.88	20.50		
15	16QAM	36	20	20.77	20.82	20.45		
15	16QAM	36	39	20.79	20.62	20.51	21.5	0
15	16QAM	75	0	20.80	20.44	20.49		
Channel				20800	21100	21400	21.5	0
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.16	21.22	20.56	21.5	0
10	QPSK	1	25	21.17	21.12	20.85		
10	QPSK	1	49	21.29	20.79	21.03		
10	QPSK	25	0	20.79	21.03	20.60	21.5	0
10	QPSK	25	12	20.67	20.97	20.56		
10	QPSK	25	25	20.62	21.06	20.67		
10	QPSK	50	0	21.45	20.96	20.81	21.5	0
10	16QAM	1	0	20.94	21.45	20.71		
10	16QAM	1	25	20.99	20.68	20.75		
10	16QAM	1	49	21.19	20.66	20.92	21.5	0
10	16QAM	25	0	20.46	21.07	20.54		
10	16QAM	25	12	21.01	21.32	20.57		
10	16QAM	25	25	20.89	21.35	20.52	21.5	0
10	16QAM	50	0	21.43	21.15	20.46		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.08	21.34	20.93	21.5	0
5	QPSK	1	12	21.15	21.41	21.03		
5	QPSK	1	24	21.18	21.29	21.11		
5	QPSK	12	0	21.31	20.93	21.02	21.5	0
5	QPSK	12	7	21.35	20.99	21.31		
5	QPSK	12	13	21.18	20.95	21.44		
5	QPSK	25	0	21.08	20.94	20.83		
5	16QAM	1	0	21.18	21.00	20.72	21.5	0
5	16QAM	1	12	20.95	21.42	20.80		
5	16QAM	1	24	20.97	21.41	20.78		
5	16QAM	12	0	21.25	20.77	20.45	21.5	0
5	16QAM	12	7	21.06	20.62	20.48		
5	16QAM	12	13	20.92	20.59	20.45		
5	16QAM	25	0	20.92	20.56	20.43		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	21.40	20.85	20.82	21.5	0
20	QPSK	1	49	20.92	20.80	20.82		
20	QPSK	1	99	20.88	20.83	20.80		
20	QPSK	50	0	20.95	20.62	20.48	21.5	0
20	QPSK	50	24	20.95	20.56	20.41		
20	QPSK	50	50	21.11	20.65	20.54		
20	QPSK	100	0	21.08	20.62	20.49		
20	16QAM	1	0	21.29	21.01	20.53	21.5	0
20	16QAM	1	49	21.09	20.72	20.54		
20	16QAM	1	99	21.03	20.73	20.66		
20	16QAM	50	0	20.91	20.58	20.43	21.5	0
20	16QAM	50	24	20.91	20.52	20.37		
20	16QAM	50	50	20.95	20.61	20.50		
20	16QAM	100	0	20.93	20.60	20.46		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	21.26	20.88	20.97	21.5	0
15	QPSK	1	37	21.01	20.81	20.79		
15	QPSK	1	74	21.03	20.92	20.87		
15	QPSK	36	0	21.02	20.81	20.69	21.5	0
15	QPSK	36	20	21.00	20.73	20.83		
15	QPSK	36	39	21.07	20.84	20.70		
15	QPSK	75	0	21.06	20.80	20.69		
15	16QAM	1	0	21.26	20.99	21.00	21.5	0
15	16QAM	1	37	21.22	20.87	20.80		
15	16QAM	1	74	21.20	21.00	20.83		
15	16QAM	36	0	20.49	20.26	20.03	21.5	0
15	16QAM	36	20	20.46	20.26	20.17		
15	16QAM	36	39	20.60	20.33	20.43		
15	16QAM	75	0	20.55	20.46	20.50		
Channel				132022	132322	132622		
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	21.26	20.73	20.50	21.5	0
10	QPSK	1	25	21.06	20.72	20.47		
10	QPSK	1	49	21.06	20.73	21.29		
10	QPSK	25	0	21.07	20.82	21.28	21.5	0
10	QPSK	25	12	21.00	20.69	21.29		
10	QPSK	25	25	21.07	21.04	21.21		
10	QPSK	50	0	21.04	20.79	21.21		
10	16QAM	1	0	21.23	21.01	21.23	21.5	0
10	16QAM	1	25	21.21	20.90	21.28		
10	16QAM	1	49	21.22	21.02	21.26		
10	16QAM	25	0	20.49	20.24	20.85	21.5	0
10	16QAM	25	12	20.48	20.44	20.89		
10	16QAM	25	25	20.53	20.58	20.89		
10	16QAM	50	0	20.51	20.39	20.87		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	21.20	20.61	20.89	21.5	0
5	QPSK	1	12	21.07	20.64	20.85		
5	QPSK	1	24	21.00	20.59	20.74		
5	QPSK	12	0	21.03	20.54	20.70	21.5	0
5	QPSK	12	7	21.03	20.63	20.75		
5	QPSK	12	13	21.03	20.60	20.68		
5	QPSK	25	0	21.04	20.65	20.71	21.5	0
5	16QAM	1	0	21.29	20.82	20.87		
5	16QAM	1	12	21.27	20.88	20.95		
5	16QAM	1	24	21.19	20.79	20.77	21.5	0
5	16QAM	12	0	20.51	20.03	20.16		
5	16QAM	12	7	20.51	20.26	20.29		
5	16QAM	12	13	20.51	20.20	20.42	21.5	0
5	16QAM	25	0	20.51	20.25	20.60		
Channel				131987	132322	132657		
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	21.29	20.65	20.74	21.5	0
3	QPSK	1	8	21.09	20.58	20.56		
3	QPSK	1	14	21.05	20.63	20.54		
3	QPSK	8	0	21.19	20.65	20.56	21.5	0
3	QPSK	8	4	21.11	20.63	20.66		
3	QPSK	8	7	21.07	20.63	20.57		
3	QPSK	15	0	21.14	20.64	20.57	21.5	0
3	16QAM	1	0	21.21	20.86	20.76		
3	16QAM	1	8	21.26	20.81	20.70		
3	16QAM	1	14	21.23	20.84	20.70	21.5	0
3	16QAM	8	0	20.69	20.15	20.05		
3	16QAM	8	4	20.61	20.21	20.03		
3	16QAM	8	7	20.56	20.21	20.04	21.5	0
3	16QAM	15	0	20.63	20.28	20.05		
Channel				131979	132322	132665		
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	21.18	20.46	20.34	21.5	0
1.4	QPSK	1	3	21.01	20.44	20.29		
1.4	QPSK	1	5	21.00	20.47	20.34		
1.4	QPSK	3	0	21.14	20.56	20.43	21.5	0
1.4	QPSK	3	1	21.14	20.56	20.43		
1.4	QPSK	3	3	21.14	20.60	20.50		
1.4	QPSK	6	0	21.14	20.57	20.43	21.5	0
1.4	16QAM	1	0	21.27	20.75	20.57	21.5	0
1.4	16QAM	1	3	21.23	20.69	20.52		
1.4	16QAM	1	5	21.25	20.73	20.54		
1.4	16QAM	3	0	21.23	20.66	20.49	21.5	0
1.4	16QAM	3	1	21.24	20.69	20.53		
1.4	16QAM	3	3	21.18	20.65	20.49		
1.4	16QAM	6	0	20.66	20.09	20.04	21.5	0



<LTE Carrier Aggregation>

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29A is limited to Scell.

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-4A	2	Yes	Yes	Yes	Yes	Yes	Yes	40	0
	4			Yes	Yes	Yes	Yes		
CA_2A-4A	2			Yes	Yes			20	1
	4			Yes	Yes				
CA_2A-4A	2			Yes	Yes	Yes	Yes	40	2
	4			Yes	Yes	Yes	Yes		
CA_2A-5A	2			Yes	Yes	Yes	Yes	30	0
	5			Yes	Yes				
CA_2A-5A	2			Yes	Yes			20	1
	5			Yes	Yes				
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	0
	12			Yes	Yes				
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	1
	12		Yes	Yes	Yes				
CA_2A-12A	2			Yes	Yes			20	2
	12			Yes	Yes				
CA_2A-13A	2			Yes	Yes	Yes	Yes	30	0
	13				Yes				
CA_2A-13A	2			Yes	Yes			20	1
	13				Yes				
CA_2A-17A	2			Yes	Yes			20	0
	17			Yes	Yes				
CA_2A-29A	2			Yes	Yes			20	0
	29		Yes	Yes	Yes				
CA_2A-29A	2			Yes	Yes			20	1
	29			Yes	Yes				
CA_2A-29A	2			Yes	Yes	Yes	Yes	30	2
	29			Yes	Yes				



E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_4A-5A	4			Yes	Yes			20	0
	5			Yes	Yes				
CA_4A-5A	4			Yes	Yes	Yes	Yes	30	1
	5			Yes	Yes				
CA_4A-7A	4			Yes	Yes			30	0
	7			Yes	Yes	Yes	Yes		
CA_4A-12A	4	Yes	Yes	Yes	Yes			20	0
	12			Yes	Yes				
CA_4A-12A	4	Yes	Yes	Yes	Yes	Yes	Yes	30	1
	12			Yes	Yes				
CA_4A-12A	4			Yes	Yes	Yes	Yes	30	2
	12		Yes	Yes	Yes				
CA_4A-12A	4			Yes	Yes			20	3
	12			Yes	Yes				
CA_4A-12A	4			Yes	Yes	Yes	Yes	30	4
	12			Yes	Yes				
CA_4A-12A	4			Yes	Yes	Yes		20	5
	12			Yes					
CA_4A-13A	4			Yes	Yes	Yes	Yes	30	0
	13				Yes				
CA_4A-13A	4			Yes	Yes			20	1
	13				Yes				
CA_4A-17A	4			Yes	Yes			30	0
	17			Yes	Yes				
CA_4A-29A	4			Yes	Yes			20	0
	29		Yes	Yes	Yes				
CA_4A-29A	4			Yes	Yes			20	1
	29			Yes	Yes				
CA_4A-29A	4			Yes	Yes	Yes	Yes	30	2
	29			Yes	Yes				
CA_12A-66A	12			Yes	Yes			20	0
	66	Yes	Yes	Yes	Yes				
CA_12A-66A	12			Yes	Yes			30	1
	66	Yes	Yes	Yes	Yes	Yes	Yes		
CA_12A-66A	12		Yes	Yes	Yes			30	2
	66			Yes	Yes	Yes	Yes		
CA_12A-66A	12			Yes	Yes			20	3
	66			Yes	Yes				
CA_12A-66A	12			Yes	Yes			30	4
	66			Yes	Yes	Yes	Yes		
CA_12A-66A	12			Yes				20	5
	66			Yes	Yes	Yes			



E-UTRA CA Configuration	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_7C	15	15	40	0
	20	20		
	10	20	40	1
	15	15,20		
	20	10,15,20		
		15	10,15	40
20		15,20		
CA_66C	10	15,20	40	0
	15	10,15,20		
	20	5,10,15,20		
4A-4A	5,10,15,20	5,10,15,20	40	0
CA_7A-7A	5	15	40	0
	10	10,15		
	15	15,20		
	20	20		
		5,10,15,20	5,10,15,20	40
CA_66A-66A	5,10,15,20	5,10,15,20	40	1



LTE Carrier Aggregation Conducted Power

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$



Configure	PCC							SCC				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band Contiguous	Band 2	20	1860	18700	QPSK	1	0	Band 4	20	2132.5	2175	23.77	23.78
	Band 4	20	1732.5	20175	QPSK	1	0	Band 2	20	1960	900	24.20	24.23
	Band 2	20	1860	18700	QPSK	1	0	Band 5	10	881.5	2525	23.75	23.78
	Band 5	10	836.5	20525	QPSK	1	0	Band 2	20	1960	900	24.28	24.30
	Band 2	20	1860	18700	QPSK	1	0	Band 12	10	737.5	5095	23.73	23.78
	Band 12	10	707.5	23095	QPSK	1	0	Band 2	20	1960	900	24.38	24.50
	Band 2	20	1860	18700	QPSK	1	0	Band 13	10	751	5230	23.75	23.78
	Band 13	10	782	23230	QPSK	1	0	Band 2	20	1960	900	23.75	23.79
	Band 2	10	1855	18650	QPSK	1	0	Band 17	10	740	5790	23.50	23.51
	Band 17	10	710	23790	QPSK	1	0	Band 2	10	1960	900	24.30	24.33
	Band 2	20	1860	18700	QPSK	1	0	Band 29	10	722.5	9715	23.74	23.78
	Band 4	20	1732.5	20175	QPSK	1	0	Band 5	10	881.5	2525	24.21	24.23
	Band 5	10	836.5	20525	QPSK	1	0	Band 4	20	2132.5	2175	24.29	24.30
	Band 4	5	1752.5	20375	QPSK	1	0	Band 7	20	2655	3100	24.15	24.16
	Band 7	20	2535	21100	QPSK	1	0	Band 4	10	2132.5	2175	23.10	23.13
	Band 4	20	1732.5	20175	QPSK	1	0	Band 12	10	737.5	5095	24.23	24.23
	Band 12	10	707.5	23095	QPSK	1	0	Band 4	20	2132.5	2175	24.39	24.40
	Band 4	20	1732.5	20175	QPSK	1	0	Band 13	10	751	5230	24.22	24.23
	Band 13	10	782	23230	QPSK	1	0	Band 4	20	2132.5	2175	23.78	23.79
	Band 4	5	1752.5	20375	QPSK	1	0	Band 17	10	740	5790	24.14	24.16
Band 17	10	710	23790	QPSK	1	0	Band 4	10	2132.5	2175	24.32	24.33	
Band 4	20	1732.5	20175	QPSK	1	0	Band 29	10	722.5	9715	24.20	24.23	
Band 12	10	707.5	23095	QPSK	1	0	Band 66	20	2145	66786	24.38	24.40	
Band 66	20	1745	132322	QPSK	1	0	Band 12	10	737.5	5095	23.25	23.26	

Configure	PCC							SCC				Power		
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Intra-Band	Non-Contiguous	Band 4	20	1732.5	20175	QPSK	1	0	Band 4	5	2152.5	2375	24.21	24.23
		Band 7	20	2535	21100	QPSK	1	0	Band 7	5	2687.5	3425	23.11	23.13
		Band 66	20	1745	132322	QPSK	1	0	Band 66	5	2177.5	67111	23.24	23.26
	Contiguous	Band 7	20	2535	21100	QPSK	1	0	Band 7	20	2674.8	3298	23.12	23.13
		Band 66	20	1745	132322	QPSK	1	0	Band 66	20	2164.8	66984	23.25	23.26

13. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
- The detail antenna location please refers to Appendix F.



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of UMTS band 2 / 4, LTE band 2 / 4 / 7 / 66.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
6. According to TCB workshop October 2016, when the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands, however for the Body SAR measurement was used a low-loss foam block performed testing, the relative permittivity and loss tangent of the foam material is 1.0 and 10^{-5} , respectively, therefore holder perturbation verification is not required even highest reported SAR is >1.2 W/kg.
7. In this report, the 10g SAR results which is submitted voluntarily.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.



LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	27.48	28.00	1.127	0.01	0.251	0.283	0.192	0.216
	GSM850	GMSK	GPRS (4 Tx slots)	Right Tilted	0mm	128	824.2	27.48	28.00	1.127	0.08	0.138	0.156	0.108	0.122
	GSM850	GMSK	GPRS (4 Tx slots)	Left Cheek	0mm	128	824.2	27.48	28.00	1.127	0.07	0.273	0.308	0.213	0.240
01	GSM850	GMSK	GPRS (4 Tx slots)	Left Cheek	0mm	189	836.4	27.40	28.00	1.148	0.01	0.303	0.348	0.236	0.271
	GSM850	GMSK	GPRS (4 Tx slots)	Left Cheek	0mm	251	848.8	27.40	28.00	1.148	-0.14	0.268	0.308	0.213	0.245
	GSM850	GMSK	GPRS (4 Tx slots)	Left Tilted	0mm	128	824.2	27.48	28.00	1.127	0.02	0.165	0.186	0.128	0.144
	GSM1900	GMSK	GPRS (3 Tx slots)	Right Cheek	0mm	810	1909.8	25.42	26.50	1.282	0.02	0.080	0.103	0.051	0.065
	GSM1900	GMSK	GPRS (3 Tx slots)	Right Tilted	0mm	810	1909.8	25.42	26.50	1.282	0.07	0.048	0.062	0.030	0.038
	GSM1900	GMSK	GPRS (3 Tx slots)	Left Cheek	0mm	810	1909.8	25.42	26.50	1.282	0.03	0.086	0.110	0.056	0.072
02	GSM1900	GMSK	GPRS (3 Tx slots)	Left Cheek	0mm	512	1850.2	25.16	26.50	1.361	0.17	0.097	0.132	0.064	0.087
	GSM1900	GMSK	GPRS (3 Tx slots)	Left Cheek	0mm	661	1880	25.26	26.50	1.330	0.09	0.088	0.117	0.058	0.077
	GSM1900	GMSK	GPRS (3 Tx slots)	Left Tilted	0mm	810	1909.8	25.42	26.50	1.282	0.09	0.044	0.056	0.025	0.032

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	QPSK	RMC 12.2Kbps	Right Cheek	0mm	9538	1907.6	23.57	24.00	1.104	0.12	0.176	0.194	0.112	0.124
	WCDMA II	QPSK	RMC 12.2Kbps	Right Tilted	0mm	9538	1907.6	23.57	24.00	1.104	0.12	0.100	0.110	0.064	0.071
	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	23.57	24.00	1.104	0.12	0.216	0.238	0.136	0.150
03	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	23.50	24.00	1.122	0.15	0.240	0.269	0.153	0.172
	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	23.51	24.00	1.119	0.15	0.220	0.246	0.140	0.157
	WCDMA II	QPSK	RMC 12.2Kbps	Left Tilted	0mm	9538	1907.6	23.57	24.00	1.104	0.09	0.096	0.106	0.056	0.062
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	23.22	23.50	1.067	0.07	0.162	0.173	0.110	0.117
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	23.22	23.50	1.067	0.18	0.104	0.111	0.069	0.074
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	23.22	23.50	1.067	0.18	0.191	0.204	0.129	0.138
04	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	0mm	1312	1712.4	23.18	23.50	1.076	0.17	0.224	0.241	0.149	0.160
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	0mm	1513	1752.6	23.17	23.50	1.079	0.08	0.198	0.214	0.133	0.143
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	23.22	23.50	1.067	0.18	0.077	0.082	0.051	0.054
	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	24.28	24.50	1.052	0.14	0.252	0.265	0.191	0.201
	WCDMA V	QPSK	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	24.28	24.50	1.052	0.17	0.133	0.140	0.103	0.108
05	WCDMA V	QPSK	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	24.28	24.50	1.052	0.08	0.256	0.269	0.200	0.210
	WCDMA V	QPSK	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	24.15	24.50	1.084	-0.01	0.226	0.245	0.178	0.193
	WCDMA V	QPSK	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	24.20	24.50	1.072	0.06	0.240	0.257	0.187	0.200
	WCDMA V	QPSK	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	24.28	24.50	1.052	0.12	0.154	0.162	0.116	0.122



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
06	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	18700	1860	23.78	24.00	1.052	-0.13	0.192	0.202	0.122	0.128
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	18900	1880	23.75	24.00	1.059	0.04	0.166	0.176	0.107	0.113
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	19100	1900	23.74	24.00	1.062	-0.12	0.165	0.175	0.107	0.114
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	18700	1860	22.32	23.00	1.169	-0.04	0.145	0.170	0.091	0.106
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	18700	1860	23.78	24.00	1.052	0.13	0.067	0.070	0.043	0.045
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	18700	1860	22.32	23.00	1.169	0.05	0.048	0.056	0.031	0.036
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18700	1860	23.78	24.00	1.052	0.03	0.147	0.155	0.095	0.100
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	18700	1860	22.32	23.00	1.169	0.06	0.124	0.145	0.079	0.092
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	18700	1860	23.78	24.00	1.052	0.14	0.064	0.067	0.035	0.037
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	18700	1860	22.32	23.00	1.169	0.05	0.051	0.060	0.030	0.035
07	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	24.00	24.00	1.000	0	0.307	0.307	0.204	0.204
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	22.91	23.00	1.021	0.07	0.250	0.255	0.166	0.169
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	24.00	24.00	1.000	-0.07	0.140	0.140	0.092	0.092
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	22.91	23.00	1.021	0.11	0.128	0.131	0.085	0.087
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	24.00	24.00	1.000	-0.04	0.272	0.272	0.187	0.187
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	22.91	23.00	1.021	0.07	0.207	0.211	0.142	0.145
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	24.00	24.00	1.000	-0.18	0.111	0.111	0.074	0.074
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	22.91	23.00	1.021	-0.03	0.089	0.091	0.060	0.061
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	24.00	24.00	1.000	0.08	0.204	0.204	0.161	0.161
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	20525	836.5	22.91	23.00	1.021	0.01	0.174	0.178	0.112	0.114
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	24.00	24.00	1.000	0.01	0.109	0.109	0.086	0.086
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	20525	836.5	22.91	23.00	1.021	0.01	0.086	0.088	0.071	0.072
08	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	24.00	24.00	1.000	-0.06	0.231	0.231	0.182	0.182
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	20525	836.5	22.91	23.00	1.021	0.01	0.186	0.190	0.146	0.149
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	24.00	24.00	1.000	0.06	0.126	0.126	0.101	0.101
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	20525	836.5	22.91	23.00	1.021	0.01	0.111	0.113	0.081	0.083
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	21100	2535	23.13	23.50	1.089	-0.04	0.290	0.316	0.158	0.172
09	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	20850	2510	22.91	23.50	1.146	0.09	0.478	0.548	0.258	0.296
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	21350	2560	22.95	23.50	1.135	0.11	0.409	0.464	0.216	0.245
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	21100	2535	21.90	22.50	1.148	0.05	0.269	0.309	0.146	0.168
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	21100	2535	23.13	23.50	1.089	0.18	0.073	0.079	0.039	0.042
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	21100	2535	21.90	22.50	1.148	0.03	0.064	0.073	0.035	0.040
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	21100	2535	23.13	23.50	1.089	0.14	0.187	0.204	0.101	0.110
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	21100	2535	21.90	22.50	1.148	0.15	0.156	0.179	0.089	0.102
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	21100	2535	23.13	23.50	1.089	0.19	0.205	0.223	0.103	0.112
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	21100	2535	21.90	22.50	1.148	0.1	0.170	0.195	0.085	0.098
	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	24.40	24.50	1.023	0.05	0.219	0.224	0.174	0.178
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	23.42	23.50	1.019	-0.02	0.164	0.167	0.130	0.132
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	24.40	24.50	1.023	0.11	0.114	0.117	0.093	0.095
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	23.42	23.50	1.019	0.18	0.075	0.076	0.061	0.062
10	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	24.40	24.50	1.023	-0.01	0.263	0.269	0.201	0.206
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	23.42	23.50	1.019	0.02	0.188	0.191	0.146	0.149
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	24.40	24.50	1.023	0.1	0.099	0.101	0.081	0.083
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	23.42	23.50	1.019	-0.04	0.083	0.085	0.069	0.070



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	23.79	24.50	1.178	0.16	0.203	0.239	0.161	0.190
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	22.80	23.50	1.175	0.16	0.127	0.149	0.100	0.117
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	23.79	24.50	1.178	0.13	0.107	0.126	0.087	0.102
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	22.80	23.50	1.175	-0.12	0.057	0.067	0.046	0.054
11	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	23.79	24.50	1.178	0.07	0.235	0.277	0.187	0.220
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	22.80	23.50	1.175	0.14	0.148	0.174	0.118	0.139
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	23.79	24.50	1.178	-0.14	0.143	0.168	0.077	0.091
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	22.80	23.50	1.175	-0.04	0.083	0.098	0.067	0.079
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132322	1745	23.26	23.50	1.057	0.16	0.204	0.216	0.135	0.143
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132072	1720	23.21	23.50	1.069	0.17	0.217	0.232	0.146	0.156
12	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132572	1770	23.22	23.50	1.067	0.12	0.223	0.238	0.148	0.158
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	132572	1770	22.11	22.50	1.094	0.14	0.187	0.205	0.124	0.136
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	132322	1745	23.26	23.50	1.057	0.18	0.099	0.105	0.066	0.070
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	132572	1770	22.11	22.50	1.094	0.17	0.090	0.098	0.057	0.062
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132322	1745	23.26	23.50	1.057	0.17	0.163	0.172	0.110	0.116
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132572	1770	22.11	22.50	1.094	0.12	0.158	0.173	0.105	0.115
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	132322	1745	23.26	23.50	1.057	0.18	0.067	0.071	0.045	0.048
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132572	1770	22.11	22.50	1.094	-0.01	0.047	0.051	0.028	0.031



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GPRS (4 Tx slots)	Front	10mm	OFF	128	824.2	27.48	28.00	1.127	-0.08	0.369	0.416	0.290	0.327
	GSM850	GMSK	GPRS (4 Tx slots)	Back	10mm	OFF	128	824.2	27.48	28.00	1.127	0.03	0.479	0.540	0.355	0.400
	GSM850	GMSK	GPRS (4 Tx slots)	Left Side	10mm	OFF	128	824.2	27.48	28.00	1.127	-0.09	0.484	0.546	0.340	0.383
13	GSM850	GMSK	GPRS (4 Tx slots)	Left Side	10mm	OFF	189	836.4	27.40	28.00	1.148	-0.03	0.506	0.581	0.375	0.431
	GSM850	GMSK	GPRS (4 Tx slots)	Left Side	10mm	OFF	251	848.8	27.40	28.00	1.148	-0.09	0.450	0.517	0.316	0.363
	GSM850	GMSK	GPRS (4 Tx slots)	Right Side	10mm	OFF	128	824.2	27.48	28.00	1.127	-0.15	0.289	0.326	0.201	0.227
	GSM850	GMSK	GPRS (4 Tx slots)	Bottom Side	10mm	OFF	128	824.2	27.48	28.00	1.127	-0.01	0.253	0.285	0.150	0.169
	GSM1900	GMSK	GPRS (3 Tx slots)	Front	10mm	OFF	810	1909.8	25.42	26.50	1.282	-0.07	0.441	0.566	0.261	0.335
	GSM1900	GMSK	GPRS (3 Tx slots)	Back	10mm	OFF	810	1909.8	25.42	26.50	1.282	0.07	0.639	0.819	0.356	0.457
14	GSM1900	GMSK	GPRS (3 Tx slots)	Back	10mm	OFF	512	1850.2	25.16	26.50	1.361	-0.03	0.698	0.950	0.401	0.546
	GSM1900	GMSK	GPRS (3 Tx slots)	Back	10mm	OFF	661	1880	25.26	26.50	1.330	-0.03	0.681	0.906	0.389	0.518
	GSM1900	GMSK	GPRS (3 Tx slots)	Left Side	10mm	OFF	810	1909.8	25.42	26.50	1.282	-0.18	0.196	0.251	0.110	0.141
	GSM1900	GMSK	GPRS (3 Tx slots)	Right Side	10mm	OFF	810	1909.8	25.42	26.50	1.282	-0.03	0.097	0.124	0.058	0.074
	GSM1900	GMSK	GPRS (3 Tx slots)	Bottom Side	10mm	OFF	810	1909.8	25.42	26.50	1.282	-0.11	0.556	0.713	0.299	0.383

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	QPSK	RMC 12.2Kbps	Front	10mm	ON	9538	1907.6	23.06	23.50	1.107	-0.09	0.777	0.860	0.458	0.507
	WCDMA II	QPSK	RMC 12.2Kbps	Front	10mm	ON	9262	1852.4	23.01	23.50	1.119	0.03	0.938	1.050	0.557	0.624
	WCDMA II	QPSK	RMC 12.2Kbps	Front	10mm	ON	9400	1880	23.00	23.50	1.122	0.02	0.969	1.087	0.574	0.644
	WCDMA II	QPSK	RMC 12.2Kbps	Back	10mm	ON	9538	1907.6	23.06	23.50	1.107	-0.1	1.130	1.250	0.633	0.700
	WCDMA II	QPSK	RMC 12.2Kbps	Back	10mm	ON	9262	1852.4	23.01	23.50	1.119	0.09	1.180	1.321	0.659	0.738
15	WCDMA II	QPSK	RMC 12.2Kbps	Back	10mm	ON	9400	1880	23.00	23.50	1.122	0.09	1.180	1.324	0.660	0.741
	WCDMA II	QPSK	RMC 12.2Kbps	Left Side	10mm	ON	9538	1907.6	23.01	23.50	1.119	-0.07	0.353	0.395	0.199	0.223
	WCDMA II	QPSK	RMC 12.2Kbps	Right Side	10mm	ON	9538	1907.6	23.00	23.50	1.122	-0.04	0.212	0.238	0.126	0.141
	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	10mm	ON	9538	1907.6	23.06	23.50	1.107	-0.16	1.060	1.173	0.574	0.635
	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	10mm	ON	9612	1852.4	23.01	23.50	1.119	-0.17	1.160	1.299	0.658	0.737
	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	10mm	ON	9400	1880	23.00	23.50	1.122	-0.14	1.140	1.279	0.611	0.686
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	10mm	ON	1413	1732.6	21.71	22.00	1.069	-0.14	0.936	1.001	0.499	0.533
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	10mm	ON	1312	1712.4	21.67	22.00	1.079	0.09	0.937	1.011	0.496	0.535
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	10mm	ON	1513	1752.6	21.63	22.00	1.089	0.07	0.921	1.003	0.496	0.540
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6	21.71	22.00	1.069	-0.06	0.898	0.960	0.488	0.522
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	10mm	ON	1312	1712.4	21.67	22.00	1.079	-0.13	0.876	0.945	0.475	0.512
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	10mm	ON	1513	1752.6	21.63	22.00	1.089	0.05	0.889	0.968	0.490	0.534
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Side	10mm	ON	1413	1732.6	21.71	22.00	1.069	-0.1	0.138	0.148	0.081	0.087
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Side	10mm	ON	1413	1732.6	21.71	22.00	1.069	-0.1	0.086	0.092	0.053	0.057
	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6	21.71	22.00	1.069	-0.18	1.230	1.315	0.610	0.652
16	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4	21.67	22.00	1.079	-0.1	1.250	1.349	0.616	0.665
	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6	21.63	22.00	1.089	-0.1	1.180	1.285	0.593	0.646
	WCDMA V	QPSK	RMC 12.2Kbps	Front	10mm	OFF	4233	846.6	24.28	24.50	1.052	-0.05	0.330	0.347	0.259	0.272
	WCDMA V	QPSK	RMC 12.2Kbps	Back	10mm	OFF	4233	846.6	24.28	24.50	1.052	-0.13	0.369	0.388	0.241	0.254
17	WCDMA V	QPSK	RMC 12.2Kbps	Back	10mm	OFF	4132	826.4	24.15	24.50	1.084	-0.15	0.411	0.445	0.322	0.349
	WCDMA V	QPSK	RMC 12.2Kbps	Back	10mm	OFF	4182	836.4	24.20	24.50	1.072	-0.17	0.414	0.444	0.322	0.345
	WCDMA V	QPSK	RMC 12.2Kbps	Left Side	10mm	OFF	4233	846.6	24.28	24.50	1.052	-0.05	0.342	0.360	0.240	0.252
	WCDMA V	QPSK	RMC 12.2Kbps	Right Side	10mm	OFF	4233	846.6	24.28	24.50	1.052	-0.04	0.239	0.251	0.165	0.174
	WCDMA V	QPSK	RMC 12.2Kbps	Bottom Side	10mm	OFF	4233	846.6	24.28	24.50	1.052	0.1	0.015	0.016	0.011	0.012



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	ON	18700	1860	22.95	23.00	1.012	0.02	0.867	0.877	0.516	0.522
	LTE Band 2	20M	QPSK	1	0	Front	10mm	ON	18900	1880	22.90	23.00	1.023	-0.07	0.755	0.773	0.449	0.459
	LTE Band 2	20M	QPSK	1	0	Front	10mm	ON	19100	1900	22.83	23.00	1.040	-0.09	0.705	0.733	0.418	0.435
	LTE Band 2	20M	QPSK	50	0	Front	10mm	ON	18700	1860	22.07	23.00	1.239	-0.04	0.737	0.913	0.439	0.544
	LTE Band 2	20M	QPSK	50	0	Front	10mm	ON	18900	1880	21.95	23.00	1.274	-0.17	0.763	0.972	0.442	0.563
	LTE Band 2	20M	QPSK	50	0	Front	10mm	ON	19100	1900	21.99	23.00	1.262	-0.08	0.678	0.856	0.398	0.502
	LTE Band 2	20M	QPSK	100	0	Front	10mm	ON	18700	1860	22.02	23.00	1.253	-0.04	0.749	0.939	0.446	0.559
	LTE Band 2	20M	QPSK	1	0	Back	10mm	ON	18700	1860	22.95	23.00	1.012	-0.07	1.140	1.153	0.658	0.666
	LTE Band 2	20M	QPSK	1	0	Back	10mm	ON	18900	1880	22.90	23.00	1.023	0.01	1.130	1.156	0.647	0.662
	LTE Band 2	20M	QPSK	1	0	Back	10mm	ON	19100	1900	22.83	23.00	1.040	0.08	1.220	1.269	0.691	0.719
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	18700	1860	22.07	23.00	1.239	0.06	0.957	1.186	0.550	0.681
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	18900	1880	21.95	23.00	1.274	0	0.978	1.245	0.559	0.712
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	19100	1900	21.99	23.00	1.262	-0.15	0.838	1.057	0.476	0.601
	LTE Band 2	20M	QPSK	100	0	Back	10mm	ON	18700	1860	22.02	23.00	1.253	0.1	0.979	1.227	0.562	0.704
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	ON	18700	1860	22.95	23.00	1.012	-0.14	0.321	0.325	0.181	0.183
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	ON	18700	1860	22.07	23.00	1.239	-0.12	0.254	0.315	0.143	0.177
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	ON	18700	1860	22.95	23.00	1.012	-0.11	0.206	0.208	0.123	0.124
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	ON	18700	1860	22.07	23.00	1.239	-0.01	0.176	0.218	0.106	0.131
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18700	1860	22.95	23.00	1.012	0.09	1.150	1.163	0.606	0.613
18	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18900	1880	22.90	23.00	1.023	0.11	1.310	1.341	0.720	0.737
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	19100	1900	22.83	23.00	1.040	-0.18	1.110	1.154	0.593	0.617
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	18700	1860	22.07	23.00	1.239	0.04	0.971	1.203	0.512	0.634
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	18900	1880	21.95	23.00	1.274	0.18	1.040	1.324	0.567	0.722
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	19100	1900	21.99	23.00	1.262	0	1.020	1.287	0.545	0.688
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	ON	18700	1860	22.02	23.00	1.253	-0.12	1.050	1.316	0.553	0.693
	LTE Band 4	20M	QPSK	1	0	Front	10mm	ON	20175	1732.5	21.40	21.50	1.023	0.12	0.990	1.013	0.530	0.542
	LTE Band 4	20M	QPSK	50	0	Front	10mm	ON	20175	1732.5	21.04	21.50	1.112	-0.08	0.876	0.974	0.476	0.529
	LTE Band 4	20M	QPSK	100	0	Front	10mm	ON	20175	1732.5	21.02	21.50	1.117	0.09	0.872	0.974	0.475	0.531
	LTE Band 4	20M	QPSK	1	0	Back	10mm	ON	20175	1732.5	21.40	21.50	1.023	-0.15	0.948	0.970	0.515	0.527
	LTE Band 4	20M	QPSK	50	0	Back	10mm	ON	20175	1732.5	21.04	21.50	1.112	-0.05	0.843	0.937	0.460	0.511
	LTE Band 4	20M	QPSK	100	0	Back	10mm	ON	20175	1732.5	21.02	21.50	1.117	-0.04	0.831	0.928	0.454	0.507
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	ON	20175	1732.5	21.40	21.50	1.023	0.1	0.133	0.136	0.079	0.081
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	ON	20175	1732.5	21.04	21.50	1.112	-0.06	0.139	0.155	0.083	0.092
	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	ON	20175	1732.5	21.40	21.50	1.023	0.08	0.081	0.083	0.051	0.052
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	ON	20175	1732.5	21.04	21.50	1.112	0.07	0.082	0.091	0.051	0.057
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	ON	20175	1732.5	21.40	21.50	1.023	0.01	1.300	1.330	0.641	0.656
19	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	ON	20175	1732.5	21.04	21.50	1.112	-0.17	1.240	1.379	0.623	0.693
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10mm	ON	20175	1732.5	21.02	21.50	1.117	-0.12	1.220	1.363	0.613	0.685
	LTE Band 5	10M	QPSK	1	0	Front	10mm	OFF	20525	836.5	24.00	24.00	1.000	-0.11	0.289	0.289	0.226	0.226
	LTE Band 5	10M	QPSK	25	0	Front	10mm	OFF	20525	836.5	22.91	23.00	1.021	0.01	0.248	0.253	0.193	0.197
	LTE Band 5	10M	QPSK	1	0	Back	10mm	OFF	20525	836.5	24.00	24.00	1.000	-0.06	0.405	0.405	0.297	0.297
	LTE Band 5	10M	QPSK	25	0	Back	10mm	OFF	20525	836.5	22.91	23.00	1.021	0.11	0.348	0.355	0.272	0.278
20	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	OFF	20525	836.5	24.00	24.00	1.000	-0.07	0.435	0.435	0.305	0.305
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	OFF	20525	836.5	22.91	23.00	1.021	-0.07	0.349	0.356	0.245	0.250
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	OFF	20525	836.5	24.00	24.00	1.000	-0.07	0.270	0.270	0.189	0.189
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	OFF	20525	836.5	22.91	23.00	1.021	-0.03	0.217	0.222	0.152	0.155
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	OFF	20525	836.5	24.00	24.00	1.000	-0.04	0.263	0.263	0.145	0.145
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	OFF	20525	836.5	22.91	23.00	1.021	-0.06	0.219	0.224	0.121	0.124



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	10mm	ON	21100	2535	21.36	21.50	1.033	0.16	0.564	0.582	0.302	0.312
	LTE Band 7	20M	QPSK	50	0	Front	10mm	ON	21100	2535	21.31	21.50	1.045	-0.11	0.488	0.510	0.260	0.272
	LTE Band 7	20M	QPSK	1	0	Back	10mm	ON	21100	2535	21.36	21.50	1.033	-0.1	0.899	0.928	0.465	0.480
	LTE Band 7	20M	QPSK	1	0	Back	10mm	ON	20850	2510	21.17	21.50	1.079	-0.11	0.795	0.858	0.421	0.454
21	LTE Band 7	20M	QPSK	1	0	Back	10mm	ON	21350	2560	21.31	21.50	1.045	-0.11	1.230	1.285	0.619	0.647
	LTE Band 7	20M	QPSK	50	0	Back	10mm	ON	21100	2535	21.31	21.50	1.045	-0.1	0.853	0.891	0.442	0.462
	LTE Band 7	20M	QPSK	50	0	Back	10mm	ON	20850	2510	21.30	21.50	1.047	-0.09	0.751	0.786	0.402	0.421
	LTE Band 7	20M	QPSK	50	0	Back	10mm	ON	21350	2560	21.11	21.50	1.094	-0.14	1.100	1.203	0.556	0.608
	LTE Band 7	20M	QPSK	100	0	Back	10mm	ON	21100	2535	21.30	21.50	1.047	-0.11	0.864	0.905	0.448	0.469
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	ON	21100	2535	21.36	21.50	1.033	-0.13	0.140	0.145	0.079	0.082
	LTE Band 7	20M	QPSK	50	0	Left Side	10mm	ON	21100	2535	21.31	21.50	1.045	-0.16	0.142	0.148	0.080	0.084
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	ON	21100	2535	21.36	21.50	1.033	-0.15	0.302	0.312	0.167	0.172
	LTE Band 7	20M	QPSK	50	0	Right Side	10mm	ON	21100	2535	21.31	21.50	1.045	-0.1	0.289	0.302	0.159	0.166
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	ON	21100	2535	21.36	21.50	1.033	0	0.899	0.928	0.434	0.448
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	ON	20850	2510	21.17	21.50	1.079	-0.09	0.683	0.737	0.335	0.361
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	ON	21350	2560	21.31	21.50	1.045	-0.05	1.110	1.160	0.534	0.558
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	ON	21100	2535	21.31	21.50	1.045	-0.09	0.966	1.009	0.468	0.489
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	ON	20850	2510	21.30	21.50	1.047	-0.03	0.668	0.699	0.327	0.342
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	ON	21350	2560	21.11	21.50	1.094	-0.1	1.110	1.214	0.540	0.591
	LTE Band 7	20M	QPSK	100	0	Bottom Side	10mm	ON	21100	2535	21.30	21.50	1.047	-0.04	0.878	0.919	0.439	0.460
	LTE Band 12	10M	QPSK	1	0	Front	10mm	OFF	23095	707.5	24.40	24.50	1.023	0.1	0.219	0.224	0.171	0.175
	LTE Band 12	10M	QPSK	25	0	Front	10mm	OFF	23095	707.5	23.42	23.50	1.019	0.06	0.205	0.209	0.161	0.164
22	LTE Band 12	10M	QPSK	1	0	Back	10mm	OFF	23095	707.5	24.40	24.50	1.023	-0.14	0.305	0.312	0.239	0.245
	LTE Band 12	10M	QPSK	25	0	Back	10mm	OFF	23095	707.5	23.42	23.50	1.019	0.15	0.293	0.298	0.231	0.235
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	OFF	23095	707.5	24.40	24.50	1.023	-0.09	0.128	0.131	0.096	0.098
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	OFF	23095	707.5	23.42	23.50	1.019	-0.08	0.109	0.111	0.080	0.081
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	OFF	23095	707.5	24.40	24.50	1.023	0.13	0.133	0.136	0.094	0.096
	LTE Band 12	10M	QPSK	25	0	Right Side	10mm	OFF	23095	707.5	23.42	23.50	1.019	-0.02	0.111	0.113	0.079	0.080
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	OFF	23095	707.5	24.40	24.50	1.023	-0.1	0.146	0.149	0.081	0.083
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	OFF	23095	707.5	23.42	23.50	1.019	-0.06	0.122	0.124	0.067	0.068
	LTE Band 13	10M	QPSK	1	0	Front	10mm	OFF	23230	782	23.79	24.50	1.178	0.12	0.297	0.350	0.238	0.280
	LTE Band 13	10M	QPSK	25	0	Front	10mm	OFF	23230	782	22.80	23.50	1.175	-0.03	0.232	0.273	0.185	0.217
23	LTE Band 13	10M	QPSK	1	0	Back	10mm	OFF	23230	782	23.79	24.50	1.178	-0.04	0.376	0.443	0.266	0.313
	LTE Band 13	10M	QPSK	25	0	Back	10mm	OFF	23230	782	22.80	23.50	1.175	-0.15	0.293	0.344	0.211	0.248
	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	OFF	23230	782	23.79	24.50	1.178	-0.19	0.296	0.349	0.210	0.247
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	OFF	23230	782	22.80	23.50	1.175	-0.17	0.214	0.251	0.152	0.179
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	OFF	23230	782	23.79	24.50	1.178	0.18	0.220	0.259	0.155	0.183
	LTE Band 13	10M	QPSK	25	0	Right Side	10mm	OFF	23230	782	22.80	23.50	1.175	-0.14	0.172	0.202	0.121	0.142
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	OFF	23230	782	23.79	24.50	1.178	-0.06	0.193	0.227	0.102	0.120
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	OFF	23230	782	22.80	23.50	1.175	-0.11	0.148	0.174	0.080	0.094



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Front	10mm	ON	132072	1720	21.40	21.50	1.023	-0.156	0.984	1.007	0.531	0.543
	LTE Band 66	20M	QPSK	1	0	Front	10mm	ON	132322	1745	20.85	21.50	1.161	0.033	0.984	1.143	0.527	0.612
	LTE Band 66	20M	QPSK	1	0	Front	10mm	ON	132572	1770	20.82	21.50	1.169	-0.039	0.895	1.047	0.484	0.566
	LTE Band 66	20M	QPSK	50	50	Front	10mm	ON	132072	1720	21.11	21.50	1.094	-0.078	0.742	0.812	0.403	0.441
	LTE Band 66	20M	QPSK	50	50	Front	10mm	ON	132322	1745	20.65	21.50	1.216	0.037	0.915	1.113	0.486	0.591
	LTE Band 66	20M	QPSK	50	50	Front	10mm	ON	132572	1770	20.54	21.50	1.247	-0.064	0.804	1.003	0.435	0.543
	LTE Band 66	20M	QPSK	100	0	Front	10mm	ON	132072	1720	21.08	21.50	1.102	0.076	0.777	0.856	0.419	0.462
	LTE Band 66	20M	QPSK	1	0	Back	10mm	ON	132072	1720	21.40	21.50	1.023	-0.174	0.841	0.861	0.466	0.477
	LTE Band 66	20M	QPSK	1	0	Back	10mm	ON	132322	1745	20.85	21.50	1.161	-0.01	0.838	0.973	0.456	0.530
	LTE Band 66	20M	QPSK	1	0	Back	10mm	ON	132572	1770	20.82	21.50	1.169	0.041	0.768	0.898	0.426	0.498
	LTE Band 66	20M	QPSK	50	50	Back	10mm	ON	132072	1720	21.11	21.50	1.094	0.047	0.821	0.898	0.449	0.491
	LTE Band 66	20M	QPSK	50	50	Back	10mm	ON	132322	1745	20.65	21.50	1.216	-0.099	0.825	1.003	0.451	0.548
	LTE Band 66	20M	QPSK	50	50	Back	10mm	ON	132572	1770	20.54	21.50	1.247	0.003	0.720	0.898	0.404	0.504
	LTE Band 66	20M	QPSK	100	0	Back	10mm	ON	132072	1720	21.08	21.50	1.102	0.151	0.677	0.746	0.372	0.410
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	ON	132072	1720	21.40	21.50	1.023	0.001	0.150	0.153	0.089	0.091
	LTE Band 66	20M	QPSK	50	50	Left Side	10mm	ON	132072	1720	21.11	21.50	1.094	0.003	0.139	0.152	0.082	0.090
	LTE Band 66	20M	QPSK	1	0	Right Side	10mm	ON	132072	1720	21.40	21.50	1.023	0.051	0.111	0.114	0.068	0.070
	LTE Band 66	20M	QPSK	50	50	Right Side	10mm	ON	132072	1720	21.11	21.50	1.094	0.058	0.104	0.114	0.063	0.069
24	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132072	1720	21.40	21.50	1.023	-0.059	1.360	1.392	0.678	0.694
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132322	1745	20.85	21.50	1.161	0.021	1.180	1.371	0.591	0.686
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132572	1770	20.82	21.50	1.169	0.004	1.000	1.169	0.510	0.596
	LTE Band 66	20M	QPSK	50	50	Bottom Side	10mm	ON	132072	1720	21.11	21.50	1.094	-0.007	1.260	1.378	0.630	0.689
	LTE Band 66	20M	QPSK	50	50	Bottom Side	10mm	ON	132322	1745	20.65	21.50	1.216	0.003	1.120	1.362	0.565	0.687
	LTE Band 66	20M	QPSK	50	50	Bottom Side	10mm	ON	132572	1770	20.54	21.50	1.247	0.016	1.060	1.322	0.543	0.677
	LTE Band 66	20M	QPSK	100	0	Bottom Side	10mm	ON	132072	1720	21.08	21.50	1.102	0.001	1.250	1.377	0.622	0.685



14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GPRS (4 Tx slots)	Front	15mm	128	824.2	27.48	28.00	1.127	-0.13	0.345	0.389	0.270	0.304
	GSM850	GMSK	GPRS (4 Tx slots)	Back	15mm	128	824.2	27.48	28.00	1.127	0.18	0.392	0.442	0.305	0.344
	GSM850	GMSK	GPRS (4 Tx slots)	Back	15mm	189	836.4	27.40	28.00	1.148	-0.16	0.393	0.451	0.304	0.349
25	GSM850	GMSK	GPRS (4 Tx slots)	Back	15mm	251	848.8	27.40	28.00	1.148	0.04	0.399	0.458	0.308	0.354
	GSM1900	GMSK	GPRS (3 Tx slots)	Front	15mm	810	1909.8	25.42	26.50	1.282	-0.14	0.233	0.299	0.146	0.187
	GSM1900	GMSK	GPRS (3 Tx slots)	Back	15mm	810	1909.8	25.42	26.50	1.282	0.02	0.313	0.401	0.189	0.242
26	GSM1900	GMSK	GPRS (3 Tx slots)	Back	15mm	512	1850.2	25.16	26.50	1.361	-0.17	0.359	0.489	0.223	0.304
	GSM1900	GMSK	GPRS (3 Tx slots)	Back	15mm	661	1880	25.26	26.50	1.330	-0.01	0.346	0.460	0.213	0.283

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	QPSK	RMC 12.2Kbps	Front	15mm	9538	1907.6	23.57	24.00	1.104	-0.14	0.431	0.476	0.267	0.295
	WCDMA II	QPSK	RMC 12.2Kbps	Back	15mm	9538	1907.6	23.57	24.00	1.104	0.07	0.579	0.639	0.350	0.386
27	WCDMA II	QPSK	RMC 12.2Kbps	Back	15mm	9262	1852.4	23.50	24.00	1.122	0.06	0.698	0.783	0.428	0.480
	WCDMA II	QPSK	RMC 12.2Kbps	Back	15mm	9400	1880	23.51	24.00	1.119	-0.03	0.683	0.765	0.415	0.465
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	15mm	1413	1732.6	23.22	23.50	1.067	-0.04	0.575	0.613	0.345	0.368
28	WCDMA IV	QPSK	RMC 12.2Kbps	Front	15mm	1312	1712.4	23.18	23.50	1.076	0.05	0.584	0.629	0.349	0.376
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	15mm	1513	1752.6	23.17	23.50	1.079	0.05	0.562	0.606	0.339	0.366
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	15mm	1413	1732.6	23.22	23.50	1.067	-0.03	0.570	0.608	0.340	0.363
	WCDMA V	QPSK	RMC 12.2Kbps	Front	15mm	4233	846.6	24.28	24.50	1.052	-0.04	0.327	0.344	0.254	0.267
	WCDMA V	QPSK	RMC 12.2Kbps	Back	15mm	4233	846.6	24.28	24.50	1.052	0.02	0.348	0.366	0.268	0.282
29	WCDMA V	QPSK	RMC 12.2Kbps	Back	15mm	4132	826.4	24.15	24.50	1.084	0.05	0.378	0.410	0.294	0.319
	WCDMA V	QPSK	RMC 12.2Kbps	Back	15mm	4182	836.4	24.20	24.50	1.072	0.01	0.370	0.396	0.286	0.306



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	15mm	18700	1860	23.78	24.00	1.052	0.01	0.548	0.576	0.344	0.362
	LTE Band 2	20M	QPSK	50	0	Front	15mm	18700	1860	22.32	23.00	1.169	-0.12	0.410	0.479	0.258	0.302
	LTE Band 2	20M	QPSK	1	0	Back	15mm	18700	1860	23.78	24.00	1.052	-0.17	0.631	0.664	0.384	0.404
	LTE Band 2	20M	QPSK	1	0	Back	15mm	18900	1880	23.75	24.00	1.059	-0.18	0.622	0.659	0.380	0.403
30	LTE Band 2	20M	QPSK	1	0	Back	15mm	19100	1900	23.74	24.00	1.062	0.19	0.673	0.715	0.408	0.433
	LTE Band 2	20M	QPSK	50	0	Back	15mm	18900	1880	22.32	23.00	1.169	-0.11	0.523	0.612	0.321	0.375
31	LTE Band 4	20M	QPSK	1	0	Front	15mm	20175	1732.5	24.00	24.00	1.000	-0.13	0.737	0.737	0.444	0.444
	LTE Band 4	20M	QPSK	50	0	Front	15mm	20175	1732.5	22.91	23.00	1.021	0.05	0.583	0.595	0.352	0.359
	LTE Band 4	20M	QPSK	1	0	Back	15mm	20175	1732.5	24.00	24.00	1.000	-0.15	0.698	0.698	0.416	0.416
	LTE Band 4	20M	QPSK	50	0	Back	15mm	20175	1732.5	22.91	23.00	1.021	-0.03	0.556	0.568	0.332	0.339
	LTE Band 5	10M	QPSK	1	0	Front	15mm	20525	836.5	24.00	24.00	1.000	-0.03	0.374	0.374	0.293	0.293
	LTE Band 5	10M	QPSK	25	0	Front	15mm	20525	836.5	22.91	23.00	1.021	-0.01	0.306	0.312	0.239	0.244
32	LTE Band 5	10M	QPSK	1	0	Back	15mm	20525	836.5	24.00	24.00	1.000	0.11	0.398	0.398	0.308	0.308
	LTE Band 5	10M	QPSK	25	0	Back	15mm	20525	836.5	22.91	23.00	1.021	0.01	0.335	0.342	0.260	0.265
	LTE Band 7	20M	QPSK	1	0	Front	15mm	21100	2535	23.13	23.50	1.089	-0.01	0.407	0.443	0.227	0.247
	LTE Band 7	20M	QPSK	50	0	Front	15mm	21100	2535	21.90	22.50	1.148	0.09	0.329	0.378	0.188	0.216
	LTE Band 7	20M	QPSK	1	0	Back	15mm	21100	2535	23.13	23.50	1.089	-0.15	0.767	0.835	0.421	0.458
	LTE Band 7	20M	QPSK	1	0	Back	15mm	20850	2510	22.91	23.50	1.146	-0.11	0.644	0.738	0.361	0.414
33	LTE Band 7	20M	QPSK	1	0	Back	15mm	21350	2560	22.95	23.50	1.135	-0.09	0.965	1.095	0.515	0.585
	LTE Band 7	20M	QPSK	50	0	Back	15mm	21100	2535	21.90	22.50	1.148	-0.18	0.564	0.648	0.309	0.355
	LTE Band 7	20M	QPSK	100	0	Back	15mm	21100	2535	21.86	22.50	1.159	-0.02	0.531	0.615	0.297	0.344
	LTE Band 12	10M	QPSK	1	0	Front	15mm	23095	707.5	24.40	24.50	1.023	0.03	0.194	0.199	0.153	0.157
	LTE Band 12	10M	QPSK	25	0	Front	15mm	23095	707.5	23.42	23.50	1.019	0.1	0.158	0.161	0.125	0.127
34	LTE Band 12	10M	QPSK	1	0	Back	15mm	23095	707.5	24.40	24.50	1.023	0	0.220	0.225	0.174	0.178
	LTE Band 12	10M	QPSK	25	0	Back	15mm	23095	707.5	23.42	23.50	1.019	0.11	0.211	0.215	0.167	0.170
	LTE Band 13	10M	QPSK	1	0	Front	15mm	23230	782	23.79	24.50	1.178	0.14	0.256	0.301	0.202	0.238
	LTE Band 13	10M	QPSK	25	0	Front	15mm	23230	782	22.80	23.50	1.175	-0.06	0.200	0.235	0.159	0.187
35	LTE Band 13	10M	QPSK	1	0	Back	15mm	23230	782	23.79	24.50	1.178	0.07	0.309	0.364	0.243	0.286
	LTE Band 13	10M	QPSK	25	0	Back	15mm	23230	782	22.80	23.50	1.175	-0.1	0.248	0.291	0.195	0.229
	LTE Band 66	20M	QPSK	1	0	Front	15mm	132322	1745	23.26	23.50	1.057	-0.06	0.556	0.588	0.323	0.341
36	LTE Band 66	20M	QPSK	1	0	Front	15mm	132072	1720	23.21	23.50	1.069	-0.08	0.566	0.605	0.329	0.352
	LTE Band 66	20M	QPSK	1	0	Front	15mm	132572	1770	23.22	23.50	1.067	-0.03	0.549	0.586	0.319	0.340
	LTE Band 66	20M	QPSK	50	0	Front	15mm	132572	1770	22.11	22.50	1.094	-0.04	0.429	0.469	0.251	0.275
	LTE Band 66	20M	QPSK	1	0	Back	15mm	132322	1745	23.26	23.50	1.057	-0.14	0.517	0.546	0.298	0.315
	LTE Band 66	20M	QPSK	50	0	Back	15mm	132572	1770	22.11	22.50	1.094	-0.13	0.425	0.465	0.248	0.271



14.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18900	1880	22.90	23.00	1.023	0.11	1.310		1.341
2nd	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18900	1880	22.90	23.00	1.023	0.15	1.210	1.08	1.238
1st	LTE Band 7	20M	QPSK	1	0	Back	10mm	ON	21350	2560	21.31	21.50	1.045	-0.11	1.230		1.285
2nd	LTE Band 7	20M	QPSK	1	0	Back	10mm	ON	21350	2535	21.31	21.50	1.045	-0.01	1.200	1.02	1.254
1st	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132072	1720	21.40	21.50	1.023	-0.059	1.360		1.392
2nd	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132072	1720	21.40	21.50	1.023	-0.024	1.350	1.01	1.381

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes
5.	GSM Voice + Bluetooth		Yes	
6.	GPRS/EDGE + Bluetooth		Yes	
7.	WCDMA+ Bluetooth		Yes	
8.	LTE + Bluetooth		Yes	
9.	GSM Voice + WLAN5GHz	Yes	Yes	
10.	GPRS/EDGE + WLAN5GHz	Yes	Yes	
11.	WCDMA + WLAN5GHz	Yes	Yes	
12.	LTE + WLAN5GHz	Yes	Yes	

General Note:

1. In this report, the 10g SAR transmission simultaneous analysis results which is submitted voluntarily.
2. In this report, WLAN / BT SAR test results are referred to PY7-84773W, Sporton Report No: FA692208-01 or Appendix D and used to perform transmission simultaneous analysis
3. This device 2.4GHz WLAN supports Hotspot operation.
4. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
5. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
6. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
7. The Scaled SAR summation is calculated based on the same configuration and test position.
8. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.4.
9. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	15 mm
6.75dBm	Estimated SAR (W/kg)	0.07 W/kg



15.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No	
		WWAN	2.4GHz WLAN	5GHz WLAN							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM	GSM850	Right Cheek	0.283	1.053	1.070	1.34	1.35				
		Right Tilted	0.156	0.994	0.907	1.15	1.06				
		Left Cheek	0.348	1.281	1.186	1.63	1.53	0.040	Case 1		
		Left Tilted	0.186	1.095	0.937	1.28	1.12				
	GSM1900	Right Cheek	0.103	1.053	1.070	1.16	1.17				
		Right Tilted	0.062	0.994	0.907	1.06	0.97				
		Left Cheek	0.132	1.281	1.186	1.41	1.32				
		Left Tilted	0.056	1.095	0.937	1.15	0.99				
WCDMA	WCDMA II	Right Cheek	0.194	1.053	1.070	1.25	1.26				
		Right Tilted	0.110	0.994	0.907	1.10	1.02				
		Left Cheek	0.269	1.281	1.186	1.55	1.46				
		Left Tilted	0.106	1.095	0.937	1.20	1.04				
	WCDMA IV	Right Cheek	0.173	1.053	1.070	1.23	1.24				
		Right Tilted	0.111	0.994	0.907	1.11	1.02				
		Left Cheek	0.241	1.281	1.186	1.52	1.43				
		Left Tilted	0.082	1.095	0.937	1.18	1.02				
	WCDMA V	Right Cheek	0.265	1.053	1.070	1.32	1.34				
		Right Tilted	0.140	0.994	0.907	1.13	1.05				
		Left Cheek	0.269	1.281	1.186	1.55	1.46				
		Left Tilted	0.162	1.095	0.937	1.26	1.10				
LTE	LTE Band 2	Right Cheek	0.202	1.053	1.070	1.26	1.27				
		Right Tilted	0.070	0.994	0.907	1.06	0.98				
		Left Cheek	0.155	1.281	1.186	1.44	1.34				
		Left Tilted	0.067	1.095	0.937	1.16	1.00				
	LTE Band 4	Right Cheek	0.307	1.053	1.070	1.36	1.38				
		Right Tilted	0.140	0.994	0.907	1.13	1.05				
		Left Cheek	0.272	1.281	1.186	1.55	1.46				
		Left Tilted	0.111	1.095	0.937	1.21	1.05				
	LTE Band 5	Right Cheek	0.204	1.053	1.070	1.26	1.27				
		Right Tilted	0.109	0.994	0.907	1.10	1.02				
		Left Cheek	0.231	1.281	1.186	1.51	1.42				
		Left Tilted	0.126	1.095	0.937	1.22	1.06				
	LTE Band 7	Right Cheek	0.548	1.053	1.070	1.60	1.62	0.030	Case 2	0.030	Case 3
		Right Tilted	0.079	0.994	0.907	1.07	0.99				
		Left Cheek	0.204	1.281	1.186	1.49	1.39				
		Left Tilted	0.223	1.095	0.937	1.32	1.16				
	LTE Band 12	Right Cheek	0.224	1.053	1.070	1.28	1.29				
		Right Tilted	0.117	0.994	0.907	1.11	1.02				
		Left Cheek	0.269	1.281	1.186	1.55	1.46				
		Left Tilted	0.101	1.095	0.937	1.20	1.04				
	LTE Band 13	Right Cheek	0.239	1.053	1.070	1.29	1.31				
		Right Tilted	0.126	0.994	0.907	1.12	1.03				
		Left Cheek	0.277	1.281	1.186	1.56	1.46				
		Left Tilted	0.168	1.095	0.937	1.26	1.11				
LTE Band 66	Right Cheek	0.238	1.053	1.070	1.29	1.31					
	Right Tilted	0.105	0.994	0.907	1.10	1.01					
	Left Cheek	0.173	1.281	1.186	1.45	1.36					
	Left Tilted	0.071	1.095	0.937	1.17	1.01					



WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.216	0.499	0.330	0.72	0.55
		Right Tilted	0.122	0.481	0.292	0.60	0.41
		Left Cheek	0.271	0.543	0.353	0.81	0.62
		Left Tilted	0.144	0.493	0.284	0.64	0.43
	GSM1900	Right Cheek	0.065	0.499	0.330	0.56	0.40
		Right Tilted	0.038	0.481	0.292	0.52	0.33
		Left Cheek	0.087	0.543	0.353	0.63	0.44
		Left Tilted	0.032	0.493	0.284	0.53	0.32
WCDMA	WCDMA II	Right Cheek	0.124	0.499	0.330	0.62	0.45
		Right Tilted	0.071	0.481	0.292	0.55	0.36
		Left Cheek	0.172	0.543	0.353	0.72	0.53
		Left Tilted	0.062	0.493	0.284	0.56	0.35
	WCDMA IV	Right Cheek	0.117	0.499	0.330	0.62	0.45
		Right Tilted	0.074	0.481	0.292	0.56	0.37
		Left Cheek	0.160	0.543	0.353	0.70	0.51
		Left Tilted	0.054	0.493	0.284	0.55	0.34
	WCDMA V	Right Cheek	0.201	0.499	0.330	0.70	0.53
		Right Tilted	0.108	0.481	0.292	0.59	0.40
		Left Cheek	0.210	0.543	0.353	0.75	0.56
		Left Tilted	0.122	0.493	0.284	0.62	0.41
LTE	LTE Band 2	Right Cheek	0.128	0.499	0.330	0.63	0.46
		Right Tilted	0.045	0.481	0.292	0.53	0.34
		Left Cheek	0.100	0.543	0.353	0.64	0.45
		Left Tilted	0.037	0.493	0.284	0.53	0.32
	LTE Band 4	Right Cheek	0.204	0.499	0.330	0.70	0.53
		Right Tilted	0.092	0.481	0.292	0.57	0.38
		Left Cheek	0.187	0.543	0.353	0.73	0.54
		Left Tilted	0.074	0.493	0.284	0.57	0.36
	LTE Band 5	Right Cheek	0.161	0.499	0.330	0.66	0.49
		Right Tilted	0.086	0.481	0.292	0.57	0.38
		Left Cheek	0.182	0.543	0.353	0.73	0.54
		Left Tilted	0.101	0.493	0.284	0.59	0.39
	LTE Band 7	Right Cheek	0.296	0.499	0.330	0.80	0.63
		Right Tilted	0.042	0.481	0.292	0.52	0.33
		Left Cheek	0.110	0.543	0.353	0.65	0.46
		Left Tilted	0.112	0.493	0.284	0.61	0.40
	LTE Band 12	Right Cheek	0.178	0.499	0.330	0.68	0.51
		Right Tilted	0.095	0.481	0.292	0.58	0.39
		Left Cheek	0.206	0.543	0.353	0.75	0.56
		Left Tilted	0.083	0.493	0.284	0.58	0.37
	LTE Band 13	Right Cheek	0.190	0.499	0.330	0.69	0.52
		Right Tilted	0.102	0.481	0.292	0.58	0.39
		Left Cheek	0.220	0.543	0.353	0.76	0.57
		Left Tilted	0.091	0.493	0.284	0.58	0.38
LTE Band 66	Right Cheek	0.158	0.499	0.330	0.66	0.49	
	Right Tilted	0.070	0.481	0.292	0.55	0.36	
	Left Cheek	0.116	0.543	0.353	0.66	0.47	
	Left Tilted	0.048	0.493	0.284	0.54	0.33	



15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN			
			1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.416	0.274	0.69		
		Back	0.540	0.302	0.84		
		Left side	0.581		0.58		
		Right side	0.326	0.022	0.35		
		Top side		0.407	0.41		
	Bottom side	0.285		0.29			
	GSM1900	Front	0.566	0.274	0.84		
		Back	0.950	0.302	1.25		
		Left side	0.251		0.25		
		Right side	0.124	0.022	0.15		
Top side			0.407	0.41			
Bottom side	0.713		0.71				
WCDMA	WCDMA II	Front	1.087	0.274	1.36		
		Back	1.324	0.302	1.63	0.010	Case 4
		Left side	0.395		0.40		
		Right side	0.238	0.022	0.26		
		Top side		0.407	0.41		
	Bottom side	1.299		1.30			
	WCDMA IV	Front	1.011	0.274	1.29		
		Back	0.968	0.302	1.27		
		Left side	0.148		0.15		
		Right side	0.092	0.022	0.11		
		Top side		0.407	0.41		
	Bottom side	1.349		1.35			
	WCDMA V	Front	0.347	0.274	0.62		
		Back	0.445	0.302	0.75		
		Left side	0.360		0.36		
Right side		0.251	0.022	0.27			
Top side			0.407	0.41			
Bottom side	0.016		0.02				



WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN			
			1g SAR (W/kg)	1g SAR (W/kg)			
LTE	LTE Band 2	Front	0.972	0.274	1.25		
		Back	1.269	0.302	1.57		
		Left side	0.325		0.33		
		Right side	0.218	0.022	0.24		
		Top side		0.407	0.41		
		Bottom side	1.341		1.34		
	LTE Band 4	Front	1.013	0.274	1.29		
		Back	0.970	0.302	1.27		
		Left side	0.155		0.16		
		Right side	0.091	0.022	0.11		
		Top side		0.407	0.41		
		Bottom side	1.379		1.38		
	LTE Band 5	Front	0.289	0.274	0.56		
		Back	0.405	0.302	0.71		
		Left side	0.435		0.44		
		Right side	0.270	0.022	0.29		
		Top side		0.407	0.41		
		Bottom side	0.263		0.26		
	LTE Band 7	Front	0.582	0.274	0.86		
		Back	1.285	0.302	1.59		
		Left side	0.148		0.15		
		Right side	0.312	0.022	0.33		
		Top side		0.407	0.41		
		Bottom side	1.214		1.21		
	LTE Band 12	Front	0.224	0.274	0.50		
		Back	0.312	0.302	0.61		
		Left side	0.131		0.13		
		Right side	0.136	0.022	0.16		
		Top side		0.407	0.41		
		Bottom side	0.149		0.15		
	LTE Band 13	Front	0.350	0.274	0.62		
		Back	0.443	0.302	0.75		
		Left side	0.349		0.35		
		Right side	0.259	0.022	0.28		
		Top side		0.407	0.41		
		Bottom side	0.227		0.23		
LTE Band 66	Front	1.143	0.274	1.42			
	Back	1.003	0.302	1.31			
	Left side	0.153		0.15			
	Right side	0.114	0.022	0.14			
	Top side		0.407	0.41			
	Bottom side	1.392		1.39			

WWAN Band		Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	
GSM	GSM850	Front	0.327	0.147	0.47
		Back	0.400	0.146	0.55
		Left side	0.431		0.43
		Right side	0.227	0.011	0.24
		Top side		0.206	0.21
		Bottom side	0.169		0.17
	GSM1900	Front	0.335	0.147	0.48
		Back	0.546	0.146	0.69
		Left side	0.141		0.14
		Right side	0.074	0.011	0.09
		Top side		0.206	0.21
		Bottom side	0.383		0.38
WCDMA	WCDMA II	Front	0.644	0.147	0.79
		Back	0.741	0.146	0.89
		Left side	0.223		0.22
		Right side	0.141	0.011	0.15
		Top side		0.206	0.21
		Bottom side	0.737		0.74
	WCDMA IV	Front	0.540	0.147	0.69
		Back	0.534	0.146	0.68
		Left side	0.087		0.09
		Right side	0.057	0.011	0.07
		Top side		0.206	0.21
		Bottom side	0.665		0.67
	WCDMA V	Front	0.272	0.147	0.42
		Back	0.349	0.146	0.50
		Left side	0.252		0.25
		Right side	0.174	0.011	0.19
		Top side		0.206	0.21
		Bottom side	0.012		0.01



WWAN Band		Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	
LTE	LTE Band 2	Front	0.563	0.147	0.71
		Back	0.719	0.146	0.87
		Left side	0.183		0.18
		Right side	0.131	0.011	0.14
		Top side		0.206	0.21
		Bottom side	0.737		0.74
	LTE Band 4	Front	0.542	0.147	0.69
		Back	0.527	0.146	0.67
		Left side	0.092		0.09
		Right side	0.057	0.011	0.07
		Top side		0.206	0.21
		Bottom side	0.693		0.69
	LTE Band 5	Front	0.226	0.147	0.37
		Back	0.297	0.146	0.44
		Left side	0.305		0.31
		Right side	0.189	0.011	0.20
		Top side		0.206	0.21
		Bottom side	0.145		0.15
	LTE Band 7	Front	0.312	0.147	0.46
		Back	0.647	0.146	0.79
		Left side	0.084		0.08
		Right side	0.172	0.011	0.18
		Top side		0.206	0.21
		Bottom side	0.591		0.59
	LTE Band 12	Front	0.175	0.147	0.32
		Back	0.245	0.146	0.39
		Left side	0.098		0.10
		Right side	0.096	0.011	0.11
		Top side		0.206	0.21
		Bottom side	0.083		0.08
	LTE Band 13	Front	0.280	0.147	0.43
		Back	0.313	0.146	0.46
		Left side	0.247		0.25
		Right side	0.183	0.011	0.19
		Top side		0.206	0.21
		Bottom side	0.120		0.12
	LTE Band 66	Front	0.612	0.147	0.76
		Back	0.548	0.146	0.69
		Left side	0.091		0.09
		Right side	0.070	0.011	0.08
		Top side		0.206	0.21
		Bottom side	0.694		0.69



15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.389	0.184	0.125	0.070	0.57	0.51	0.46
		Back	0.458	0.170	0.282	0.070	0.63	0.74	0.53
	GSM1900	Front	0.299	0.184	0.125	0.070	0.48	0.42	0.37
		Back	0.489	0.170	0.282	0.070	0.66	0.77	0.56
WCDMA	WCDMA II	Front	0.476	0.184	0.125	0.070	0.66	0.60	0.55
		Back	0.783	0.170	0.282	0.070	0.95	1.07	0.85
	WCDMA IV	Front	0.629	0.184	0.125	0.070	0.81	0.75	0.70
		Back	0.608	0.170	0.282	0.070	0.78	0.89	0.68
	WCDMA V	Front	0.344	0.184	0.125	0.070	0.53	0.47	0.41
		Back	0.410	0.170	0.282	0.070	0.58	0.69	0.48
LTE	LTE Band 2	Front	0.576	0.184	0.125	0.070	0.76	0.70	0.65
		Back	0.715	0.170	0.282	0.070	0.89	1.00	0.79
	LTE Band 4	Front	0.737	0.184	0.125	0.070	0.92	0.86	0.81
		Back	0.698	0.170	0.282	0.070	0.87	0.98	0.77
	LTE Band 5	Front	0.374	0.184	0.125	0.070	0.56	0.50	0.44
		Back	0.398	0.170	0.282	0.070	0.57	0.68	0.47
	LTE Band 7	Front	0.443	0.184	0.125	0.070	0.63	0.57	0.51
		Back	1.095	0.170	0.282	0.070	1.27	1.38	1.17
	LTE Band 12	Front	0.199	0.184	0.125	0.070	0.38	0.32	0.27
		Back	0.225	0.170	0.282	0.070	0.40	0.51	0.30
	LTE Band 13	Front	0.301	0.184	0.125	0.070	0.49	0.43	0.37
		Back	0.364	0.170	0.282	0.070	0.53	0.65	0.43
	LTE Band 66	Front	0.605	0.184	0.125	0.070	0.79	0.73	0.68
		Back	0.546	0.170	0.282	0.070	0.72	0.83	0.62




WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)		
GSM	GSM850	Front	0.304	0.105	0.044	0.41	0.35
		Back	0.354	0.099	0.099	0.45	0.45
	GSM1900	Front	0.187	0.105	0.044	0.29	0.23
		Back	0.304	0.099	0.099	0.40	0.40
WCDMA	WCDMA II	Front	0.295	0.105	0.044	0.40	0.34
		Back	0.480	0.099	0.099	0.58	0.58
	WCDMA IV	Front	0.376	0.105	0.044	0.48	0.42
		Back	0.363	0.099	0.099	0.46	0.46
	WCDMA V	Front	0.267	0.105	0.044	0.37	0.31
		Back	0.319	0.099	0.099	0.42	0.42
LTE	LTE Band 2	Front	0.362	0.105	0.044	0.47	0.41
		Back	0.433	0.099	0.099	0.53	0.53
	LTE Band 4	Front	0.444	0.105	0.044	0.55	0.49
		Back	0.416	0.099	0.099	0.52	0.52
	LTE Band 5	Front	0.293	0.105	0.044	0.40	0.34
		Back	0.308	0.099	0.099	0.41	0.41
	LTE Band 7	Front	0.247	0.105	0.044	0.35	0.29
		Back	0.585	0.099	0.099	0.68	0.68
	LTE Band 12	Front	0.157	0.105	0.044	0.26	0.20
		Back	0.178	0.099	0.099	0.28	0.28
	LTE Band 13	Front	0.238	0.105	0.044	0.34	0.28
		Back	0.286	0.099	0.099	0.39	0.39
	LTE Band 66	Front	0.352	0.105	0.044	0.46	0.40
		Back	0.315	0.099	0.099	0.41	0.41

15.4 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850			(cm)	X	Y	Z				
	WLAN2.4GHz	Left Cheek	0.348	0mm	4.83	-2.37	-0.25	57.1	1.63	0.04	Not required
			1.281	0mm	0.03	0.73	-0.15				

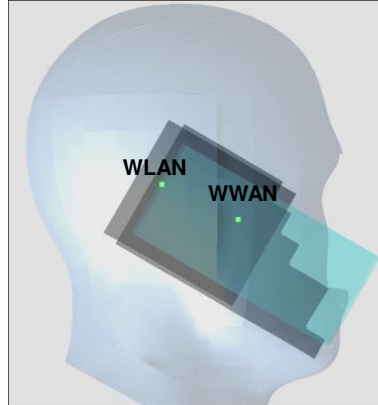


Case 2	Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7			(cm)	X	Y	Z				
	WLAN2.4GHz	Right Cheek	0.548	0mm	5.02	6.15	0.01	78.8	1.60	0.03	Not required
			1.053	0mm	-0.29	0.33	0				

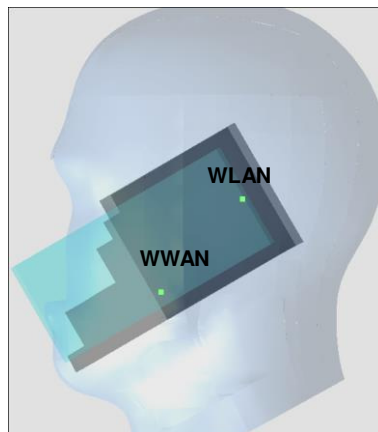

Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Right Cheek	0.548	0mm	5.02	6.15	0.01	75.8	1.62	0.03	Not required
	WLAN5GHz		1.07	0mm	0.05	0.43	-0.02				

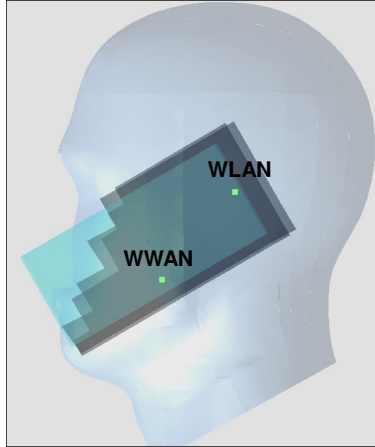

Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA II	Back	1.324	10mm	1.17	-6.72	0	143.7	1.63	0.01	Not required
	WLAN2.4GHz		0.302	10mm	-0.04	7.6	-0.01				

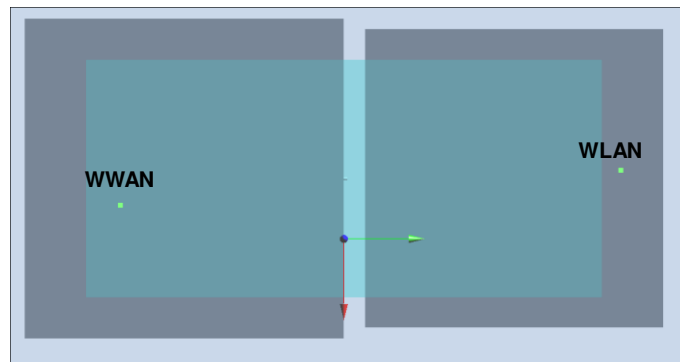

Test Engineer : Iver Zhan Poa Pan Jeff Lee Steven Chang Kurt Liu Galen Chang Thomas Wang Nick Yu and Ken Li

16. Uncertainty Assessment

Note:

1. The uncertainty assessment of below which is submitted voluntarily.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) k is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASy uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.00	N	1	1	1	6.0	6.0
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.00	R	1.732	1	1	0.6	0.6
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	2.90	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.00	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.10	R	1.732	1	1	3.5	3.5
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.6%	11.6%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						23.2%	23.1%

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	7.00	N	1	1	1	7.0	7.0
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.60	R	1.732	1	1	3.8	3.8
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.9%	12.9%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.9%	25.8%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.