



# FCC RF Test Report

**APPLICANT** : Sony Mobile Communications Inc  
**EQUIPMENT** : PDA Phone  
**BRAND NAME** : Sony  
**TYPE NAME** : PM-0787-BV  
**FCC ID** : PY7-PM0787  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

This is a partial report which is included the conducted power and radiated test items. The product was received on Dec. 04, 2014 and testing was completed on Mar. 23, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 7

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 8

    1.7 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 11

    2.3 Support Unit used in test configuration ..... 11

**3 TEST RESULT ..... 12**

    3.1 Conducted Output Power Measurement..... 12

    3.2 Field Strength of Spurious Radiation Measurement ..... 14

**4 LIST OF MEASURING EQUIPMENT ..... 22**

**5 UNCERTAINTY OF EVALUATION ..... 24**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 14.97 dB at 5730.000 MHz



# 1 General Description

## 1.1 Applicant

**Sony Mobile Communications Inc**  
Nya Vattentorget 22188 Lund/Sweden

## 1.2 Manufacturer

**Sony Mobile Communications Inc**  
Nya Vattentorget 22188 Lund/Sweden

## 1.3 Product Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is PDA Phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, ANT+, and NFC features, and below is details of information.

Product Feature	
<b>Equipment</b>	PDA Phone
<b>Brand Name</b>	Sony
<b>Type Name</b>	PM-0787-BV
<b>FCC ID</b>	PY7-PM0787
<b>GSM Operating Band(s)</b>	GSM 850/900/1800/1900MHz
<b>GPRS / EGPRS Multi Slot Class</b>	GPRS Class 33, EGPRS Class 33
<b>WCDMA Operating Band(s)</b>	FDD Band I / II / V / VIII
<b>WCDMA Rel. Version</b>	Rel. 8
<b>LTE Operating Band(s)</b>	FDD Band I / III / V / VII / VIII / XXVIII TDD Band XL
<b>LTE Rel. Version</b>	Rel. 10
<b>Wi-Fi Specification</b>	802.11b/g/n HT20 802.11a/n HT20 / HT40
<b>Bluetooth Version</b>	v3.0 + EDR / v4.0-LE
<b>NFC Specification</b>	ISO14443A / ISO14443B / Felica / ISO15693
<b>ANT+</b>	ANT+
<b>Power Supply</b>	Battery / AC Adapter / Car Charger

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI 1: 004402454036975 IMEI 2: 004402454036967	AP	26.1.B.1.23	YT9111CG76	RF conducted measurement Radiated Spurious Emission

Accessory List	
<b>AC Adapter</b>	Model No. : EP800
	Type No. : AC-0030-US
	S/N : 3114W44203131
<b>Battery</b>	Model No. : Bellis
<b>Earphone</b>	Model No. : MH410c
	Type No. : AG-1100
	S/N : 12431A1A00118E8
<b>USB Cable 1</b>	Model No. : EC450
	Type No. : AI-0700
	S/N : 142412DF3337518
<b>USB Cable 2</b>	Model No. : AA9
	Type No. : N/A

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.



### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	GSM1900 : 30.62 dBm WCDMA Band V : 24.33 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH02-HY

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Kwei-Shan District, Tao Yuan City, Taiwan (R.O.C.) TEL: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH10-HY

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
GSM 1900	■ GPRS class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

GPRS multi-slot class 8 mode for GMSK modulation, and RMC 12.2Kbps mode for WCDMA band V, only these modes were used for all tests.




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	33.07	33.09	33.10	30.57	30.58	30.57
GPRS class 8	33.01	33.16	33.10	30.62	30.62	30.59
GPRS class 10	29.43	29.40	29.40	29.33	29.30	29.38
GPRS class 11	28.16	28.13	28.22	28.20	28.27	28.31
GPRS class 12	27.32	27.34	27.24	27.24	27.25	27.21
EGPRS class 8	26.58	26.48	26.55	25.65	25.68	25.59
EGPRS class 10	25.29	25.26	25.21	25.62	25.60	25.64
EGPRS class 11	25.40	25.42	25.35	25.73	25.70	25.73
EGPRS class 12	24.47	24.49	24.44	24.64	24.58	24.59

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	24.27	24.33	24.23	23.37	23.44	23.46
HSDPA Subtest-1	24.08	24.01	23.99	23.03	22.98	22.91
HSDPA Subtest-2	23.74	23.82	23.84	22.97	22.89	22.88
HSDPA Subtest-3	23.63	23.57	23.60	22.43	22.45	22.49
HSDPA Subtest-4	23.48	23.54	23.58	22.30	22.39	22.43
HSUPA Subtest-1	23.29	23.32	23.27	22.40	22.44	22.38
HSUPA Subtest-2	22.48	22.42	22.34	21.57	21.58	21.48
HSUPA Subtest-3	22.40	22.38	22.35	21.38	21.45	21.46
HSUPA Subtest-4	22.65	22.68	22.62	22.65	22.57	22.58
HSUPA Subtest-5	23.40	23.43	23.34	22.53	22.61	22.69

## 2.2 Connection Diagram of Test System

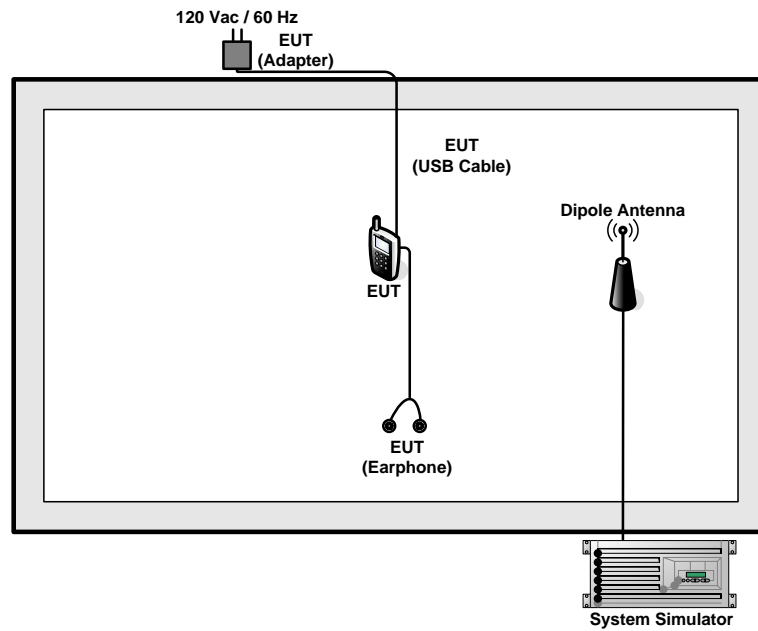

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

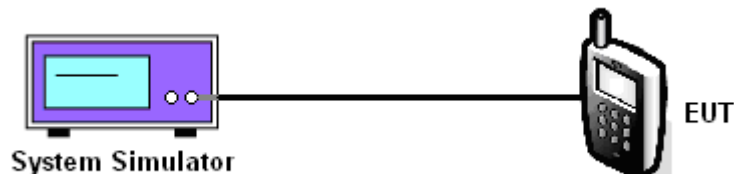



3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	33.01	33.16	33.10	26.58	26.48	26.55	24.27	24.33	24.23

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	30.62	30.62	30.59	25.65	25.68	25.59	23.37	23.44	23.46

Note: maximum burst average power for GSM, and maximum average power for WCDMA.



## 3.2 Field Strength of Spurious Radiation Measurement

### 3.2.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.2.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
12.  $ERP (dBm) = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] (dB)$   
=  $[30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
= -13dBm.

### 3.2.4 Test Setup

For radiated emissions from 30MHz to 1GHz

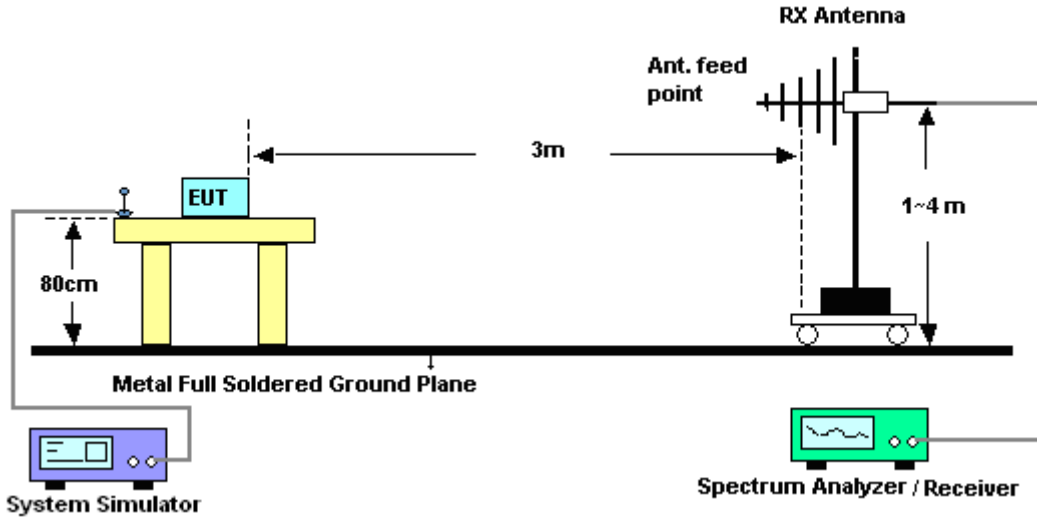

For radiated emissions above 1GHz

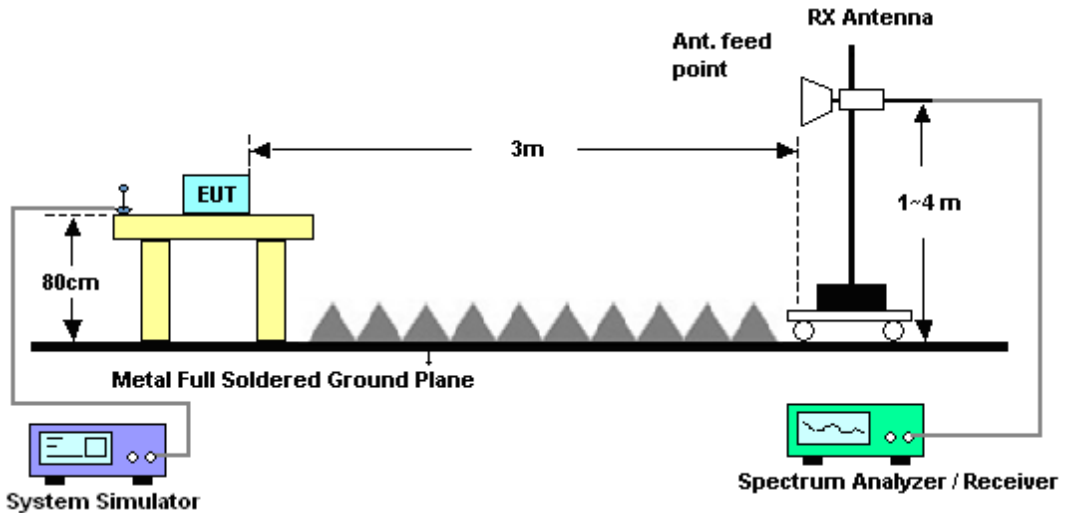



### 3.2.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

<b>Band :</b>	GSM1900		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)		<b>Relative Humidity :</b>	48~51%					
<b>Test Engineer :</b>	Stan Hsieh and Lewis He		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700	-34.86	-13	-21.86	-53.42	-41.43	1.67	8.24	H	Pass
5548	-42.77	-13	-29.77	-66.43	-49.84	2.65	9.72	H	Pass
7403	-37.88	-13	-24.88	-66.69	-47.03	2.46	11.61	H	Pass
9251	-44.33	-13	-31.33	-75.17	-54.39	2.54	12.60	H	Pass

<b>Band :</b>	GSM1900		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)		<b>Relative Humidity :</b>	48~51%					
<b>Test Engineer :</b>	Stan Hsieh and Lewis He		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700	-35.91	-13	-22.91	-54.48	-42.48	1.67	8.24	V	Pass
5548	-32.42	-13	-19.42	-54.62	-39.49	2.65	9.72	V	Pass
7403	-35.83	-13	-22.83	-63.81	-44.98	2.46	11.61	V	Pass
9251	-45.16	-13	-32.16	-75.54	-55.22	2.54	12.60	V	Pass





<Middle Channel>

<b>Band :</b>	GSM1900		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)		<b>Relative Humidity :</b>	48~51%					
<b>Test Engineer :</b>	Stan Hsieh and Lewis He		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3763	-40.37	-13	-27.37	-59.47	-47	1.69	8.32	H	Pass
5639	-29.53	-13	-16.53	-53.24	-36.58	2.71	9.76	H	Pass
7522	-37.71	-13	-24.71	-66.35	-47.1	2.42	11.81	H	Pass
9398	-43.60	-13	-30.60	-74.94	-53.57	2.57	12.54	H	Pass
15044.5	-35.40	-13	-22.40	-72.45	-45.45	3.62	13.66	H	Pass

<b>Band :</b>	GSM1900		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)		<b>Relative Humidity :</b>	48~51%					
<b>Test Engineer :</b>	Stan Hsieh and Lewis He		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3763	-39.14	-13	-26.14	-57.74	-45.77	1.69	8.32	V	Pass
5639	-29.08	-13	-16.08	-51.3	-36.13	2.71	9.76	V	Pass
7522	-35.76	-13	-22.76	-63.99	-45.15	2.42	11.81	V	Pass
9398	-44.33	-13	-31.33	-73.58	-54.3	2.57	12.54	V	Pass
15044.5	-36.33	-13	-23.33	-75.58	-46.38	3.62	13.66	V	Pass



<High Channel>

<b>Band :</b>	GSM1900	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819	-33.65	-13	-20.65	-53.25	-40.33	1.70	8.38	H	Pass
5730	-28.14	-13	-15.14	-52.23	-35.17	2.76	9.79	H	Pass
7641	-38.75	-13	-25.75	-67.17	-48.25	2.38	11.88	H	Pass
9552	-42.80	-13	-29.80	-74.26	-52.67	2.60	12.47	H	Pass
11463	-41.37	-13	-28.37	-74.25	-51	2.68	12.31	H	Pass
15282	-33.46	-13	-20.46	-70.83	-43.74	3.72	13.99	H	Pass

<b>Band :</b>	GSM1900	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819	-35.66	-13	-22.66	-54.37	-42.34	1.70	8.38	V	Pass
5730	-27.97	-13	-14.97	-51.01	-35	2.76	9.79	V	Pass
7641	-33.62	-13	-20.62	-61.56	-43.12	2.38	11.88	V	Pass
9552	-45.37	-13	-32.37	-75	-55.24	2.60	12.47	V	Pass
11463	-42.25	-13	-29.25	-75.12	-51.88	2.68	12.31	V	Pass
13372.5	-36.90	-13	-23.90	-75	-47.4	3.02	13.52	V	Pass
15282	-32.18	-13	-19.18	-72.07	-42.46	3.72	13.99	V	Pass



<Low Channel>

<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1656	-49.91	-13	-36.91	-59.48	-51.64	0.98	4.86	H	Pass
2480	-43.85	-13	-30.85	-56.82	-45.76	1.28	5.34	H	Pass
3304	-56.70	-13	-43.70	-73.24	-60.14	1.54	7.14	H	Pass

<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1656	-51.01	-13	-38.01	-58.31	-52.74	0.98	4.86	V	Pass
2480	-41.94	-13	-28.94	-56.13	-43.85	1.28	5.34	V	Pass
3312	-58.52	-13	-45.52	-73.88	-62	1.55	7.17	V	Pass



<Middle Channel>

<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-49.15	-13	-36.15	-58.43	-50.83	0.99	4.82	H	Pass
2512	-41.71	-13	-28.71	-55.06	-43.68	1.29	5.41	H	Pass
3344	-56.33	-13	-43.33	-72.49	-59.94	1.56	7.31	H	Pass

<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-47.76	-13	-34.76	-55	-49.44	0.99	4.82	V	Pass
2512	-39.46	-13	-26.46	-54.8	-41.43	1.29	5.41	V	Pass
3344	-57.70	-13	-44.70	-73.03	-61.31	1.56	7.31	V	Pass



<High Channel>

<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1688	-48.47	-13	-35.47	-57.82	-50.1	1.00	4.77	H	Pass
2536	-40.83	-13	-27.83	-54.37	-42.81	1.30	5.43	H	Pass
3384	-55.29	-13	-42.29	-71.65	-59.06	1.57	7.49	H	Pass

<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	48~51%						
<b>Test Engineer :</b>	Stan Hsieh and Lewis He	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1696	-46.80	-13	-33.80	-54.55	-48.4	1.00	4.75	V	Pass
2536	-39.04	-13	-26.04	-54.39	-41.02	1.30	5.43	V	Pass
3384	-57.46	-13	-44.46	-73.11	-61.23	1.57	7.49	V	Pass



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Jul. 29, 2014	Mar. 07, 2015 ~ Mar. 18, 2015	Jul. 28, 2015	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34893241	N/A	May 06, 2014	Mar. 07, 2015 ~ Mar. 18, 2015	May 05, 2015	Conducted (TH02-HY)
RF cable	WOKEN	S05	S05-130708-22	N/A	Jan. 21, 2015	Mar. 07, 2015 ~ Mar. 18, 2015	Jan. 20, 2016	Conducted (TH02-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 20, 2014	Mar. 23, 2015	Nov. 19, 2015	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	0.1MHz~1000MHz	Nov. 24, 2014	Mar. 23, 2015	Nov. 23, 2015	Radiation (03CH10-HY)
Preamplifier	MITEQ	JS44-18004000-33-8P	1840917	18GHz ~ 40GHz	Jun. 09, 2014	Mar. 23, 2015	Jun. 08, 2015	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35413	30MHz~1GHz	Oct. 24, 2014	Mar. 23, 2015	Oct. 23, 2015	Radiation (03CH10-HY)
Double Ridged Guide Horn	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Oct. 03, 2014	Mar. 23, 2015	Oct. 02, 2015	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	Mar. 23, 2015	Nov. 02, 2015	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHZ	Oct. 14, 2014	Mar. 23, 2015	Oct. 13, 2015	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 26.5GHz	Nov. 05, 2014	Mar. 23, 2015	Nov. 04, 2015	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 23, 2015	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0-360 degree	N/A	Mar. 23, 2015	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 23, 2015	N/A	Radiation (03CH10-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 17, 2014	Mar. 23, 2015	Nov. 16, 2015	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24956/4 MY24952/4MY2	30MHz~1GHz	Nov. 06, 2014	Mar. 23, 2015	Nov. 05, 2015	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY249564 MY249524MY2	1GHz~25GHz	Nov. 06, 2014	Mar. 23, 2015	Nov. 05, 2015	Radiation (03CH10-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Notch Filter	Wainwright	WRCG 824/849/814/	SN35	GSM850 / WCDMA 850	Oct. 01, 2014	Mar. 23, 2015	Sep. 30, 2015	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT1850/1 910-40/8SS	SN21	1900	Oct. 01, 2014	Mar. 23, 2015	Sep. 30, 2015	Radiation (03CH10-HY)
Filter	Microwave Circuits	H1G013G1	SN477215	1GHz HPF	Oct. 01, 2014	Mar. 23, 2015	Sep. 30, 2015	Radiation (03CH10-HY)
Filter	Wainwright Instruments	WLKS1200-8 SS	SN3	1.2GHz LPF	Oct. 01, 2014	Mar. 23, 2015	Sep. 30, 2015	Radiation (03CH10-HY)
Filter	Microwave Circuits	H3G018G1	SN477220	3GHz HPF	Oct. 01, 2014	Mar. 23, 2015	Sep. 30, 2015	Radiation (03CH10-HY)
Test Software	Audix	E3	Version 6.2009-8-24	N/A	N/A	Mar. 23, 2015	N/A	Radiation (03CH10-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9
---	-----