



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac

FCC ID: PY7-PM0816

**Report Number: 15U19770-S1
Issue Date: 3/30/2015**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
NYA VATTENTORNET MOBILVAGEN 10
LUND 22188
SWEDEN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History



Rev.	Date	Revisions	Revised By
--	3/30/2015	Initial Issue	--

Table of Contents

1. Attestation of Test Results	5
2. Test Specification, Methods and Procedures.....	6
3. Facilities and Accreditation	6
4. SAR Measurement System & Test Equipment	7
4.1. SAR Measurement System.....	7
4.2. SAR Scan Procedures.....	8
4.3. Test Equipment.....	10
5. Measurement Uncertainty.....	10
6. Device Under Test (DUT) Information	11
6.1. DUT Description	11
6.2. Wireless Technologies.....	11
6.3. Nominal and Maximum Output Power.....	12
7. RF Exposure Conditions (Test Configurations).....	14
8. Dielectric Property Measurements & System Check	15
8.1. Dielectric Property Measurements	15
8.2. System Check.....	19
9. Conducted Output Power Measurements.....	22
9.1. GSM	22
9.2. W-CDMA	25
9.3. Wi-Fi 2.4GHz (DTS Band)	29
9.4. Wi-Fi 5GHz (U-NII Bands).....	30
9.5. Bluetooth	32
10. Measured and Reported (Scaled) SAR Results.....	33
10.1. GSM850.....	35
10.2. GSM1900.....	35
10.3. W-CDMA Band V	36
10.4. Wi-Fi (DTS Band).....	36
10.5. Wi-Fi (U-NII Band).....	37
10.6. Bluetooth.....	38
11. SAR Measurement Variability.....	39
12. Simultaneous Transmission SAR Analysis.....	40
12.1. Sum of the SAR for WWAN, Wi-Fi, & BT.....	41

Appendixes	42
<i>A_15U19770v0 SAR Photos & Ant. Locations.....</i>	<i>42</i>
<i>B_15U19770v0 SAR System Check Plots.....</i>	<i>42</i>
<i>C_15U19770v0 SAR Highest Test Plots.....</i>	<i>42</i>
<i>D_15U19770v0 SAR Tissue Ingredients</i>	<i>42</i>
<i>E_15U19770v0 SAR Probe Cal. Certificates</i>	<i>42</i>
<i>F_15U19770v0 SAR Dipole Cal. Certificates.....</i>	<i>42</i>

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS, INC.			
FCC ID	PY7-PM0816			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS (BT)
Head	0.695	0.501	0.660	N/A
Body-worn	0.491	0.322	0.320	
Hotspot/Wi-Fi Direct	0.874		N/A	
Simultaneous TX	1.355	1.196	1.355	
Date Tested	2/23/2015 to 3/20/2015			
Test Results	Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>				
Approved & Released By:		Prepared By:		
				
Devin Chang Senior Engineer UL Verification Services Inc.		Nathan Sousa Laboratory Engineer UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 SAR meas for 802.11 v02
- 447498 D01 General RF Exposure Guidance v05r02
- 447498 D03 Supplement C Cross-Reference
- 648474 D04 Handset SAR v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode v02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

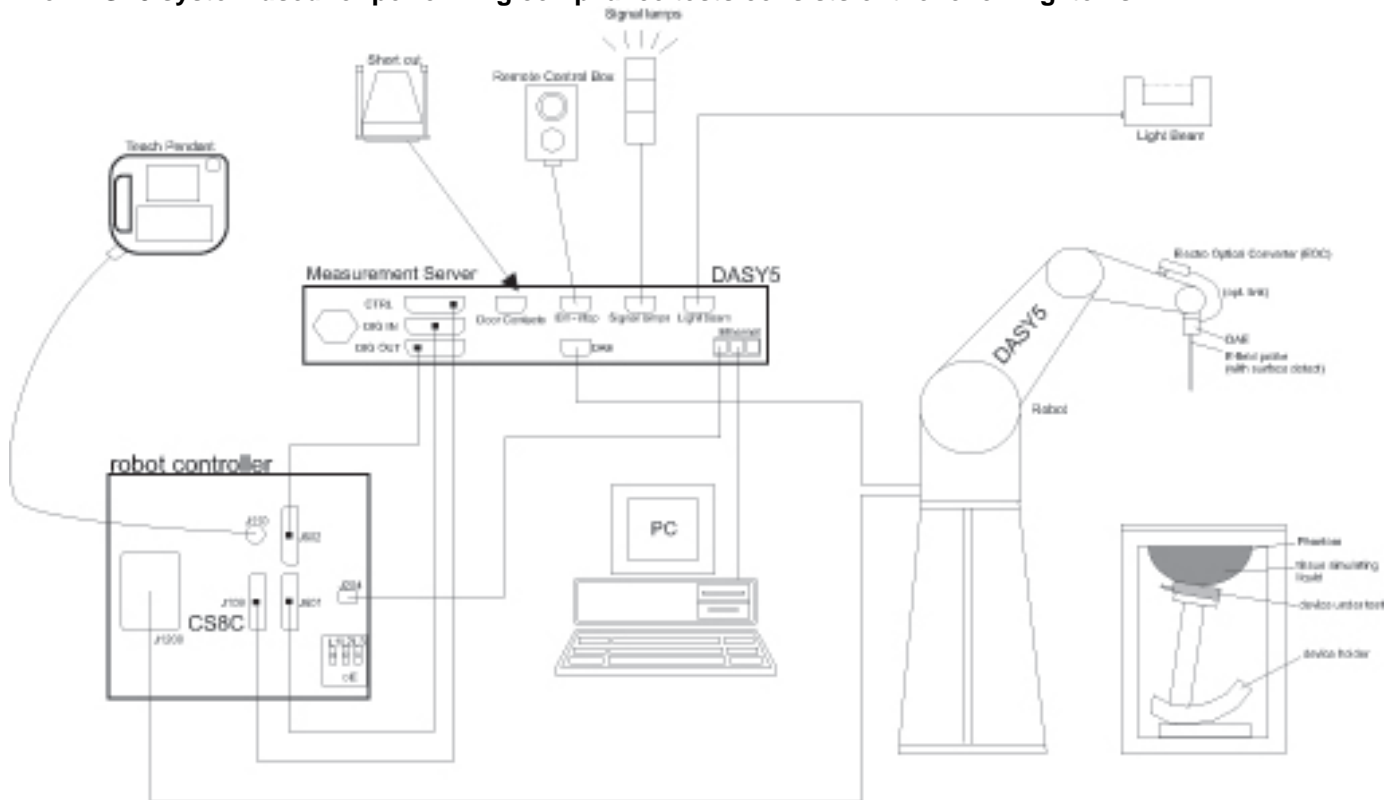

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/7/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U09516	10/6/2015
Power Meter	Agilent	N1911A	MY53060016	8/7/2015
Power Sensor	Agilent	E9323A	MY53070003	5/1/2015
Power Sensor	Agilent	8481A	3318A95392	10/6/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	HP	437B	3125U11347	8/27/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Sensor	HP	8481A	2702A60780	6/16/2015
Power Sensor	HP	8481A	1926A16917	10/10/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3902	5/19/2015
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3929	5/9/2015
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1352	11/7/2015
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1380	7/23/2015
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1377	8/27/2015
System Validation Dipole	SPEAG	D835V2	4d142	9/9/2015
System Validation Dipole	SPEAG	D1900V2	5d163	9/11/2015
System Validation Dipole	SPEAG	D2450V2	748	2/20/2016
System Validation Dipole	SPEAG	D5GHzV2	1138	9/18/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/24/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY52310061	12/6/2015
Power Sensor	Agilent	N1921A	MY52020011	5/6/2015
Power Sensor	Agilent	N1921A	MY53020038	3/6/2016
Base Station Simulator	R & S	CMW500	132910-cp	4/25/2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

<p>This device has two power setting.</p> <p>When hotspot mode is activated, an automatic RF power reduction is activated and reduces the output RF power level.</p> <p>When hotspot mode is deactivated, the RF output power levels return to their maximum RF power level.</p>	
Device Dimension	Overall (Length x Width): 127.6 mm x 65.5 mm
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	<p>Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices.</p> <p><input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)</p> <p><input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)</p>
Wi-Fi Direct	<p>Wi-Fi Direct enabled devices transfer data directly between each other</p> <p><input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz)</p> <p><input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz) (Group Client only)</p>

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input checked="" type="checkbox"/> Class 33 - Four Up	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7)		100%
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
	Does this device support Band gap channel? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 4.0 LE		77.5% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Mode		Full Power			Reduce Power		
			Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
GSM850	GSM	Voice	33.0	-1.4 ~ 0.6	33.6	32.5	-1.5 ~ 0.6	33.1
	GPRS GMSK	Tx Slot 1	33.0	-1.4 ~ 0.6	33.6	32.5	-1.5 ~ 0.6	33.1
		Tx Slot 2	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
		Tx Slot 3	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
		Tx Slot 4	26.5	-1.5 ~ 0.6	27.1	25.6	-1.5 ~ 0.6	26.2
	EGPRS 8PSK	Tx Slot 1	27.0	-1.5 ~ 1.0	28.0	27.0	-1.5 ~ 1.0	28.0
		Tx Slot 2	25.0	-1.5 ~ 1.0	26.0	25.0	-1.5 ~ 1.0	26.0
		Tx Slot 3	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.0	25.0
		Tx Slot 4	22.0	-1.5 ~ 1.0	23.0	22.0	-1.5 ~ 1.0	23.0
GSM1900	GSM	Voice	30.0	-0.7 ~ 0.6	30.6	29.5	-1.5 ~ 0.6	30.1
	GPRS GMSK	Tx Slot 1	30.0	-0.7 ~ 0.6	30.6	29.5	-1.5 ~ 0.6	30.1
		Tx Slot 2	27.0	-1.5 ~ 0.6	27.6	25.4	-1.5 ~ 0.6	26.0
		Tx Slot 3	26.0	-1.5 ~ 0.6	26.6	23.6	-1.5 ~ 0.6	24.2
		Tx Slot 4	25.0	-1.5 ~ 0.6	25.6	22.4	-1.5 ~ 0.6	23.0
	EGPRS 8PSK	Tx Slot 1	26.0	-1.5 ~ 1.0	27.0	26.0	-1.5 ~ 1.0	27.0
		Tx Slot 2	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.0	25.0
		Tx Slot 3	23.0	-1.5 ~ 1.0	24.0	23.0	-1.5 ~ 1.0	24.0
		Tx Slot 4	22.0	-1.5 ~ 1.0	23.0	22.0	-1.5 ~ 1.0	23.0

Dual Transfer Mode

RF Air interface	Mode			Full Power			Reduce Power		
				Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
GSM850	GSM (Voice) + GPRS(Data)	Tx Slot 1	CS	33.0	-1.4 ~ 0.6	33.6	32.5	-1.5 ~ 0.6	33.1
		Tx Slot 2	CS	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
			PS	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
		Tx Slot 3	CS	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
			PS	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
	GSM (Voice) + EGPRS(Data) MCS5-9	Tx Slot 1	CS	33.0	-1.4 ~ 0.6	33.6	32.5	-1.5 ~ 0.6	33.1
		Tx Slot 2	CS	29.5	-1.5 ~ 0.6	30.1	29.1	-1.5 ~ 0.6	29.7
			PS	25.0	-1.5 ~ 1.0	26.0	25.0	-1.5 ~ 1.0	26.0
		Tx Slot 3	CS	27.5	-1.3 ~ 0.6	28.1	27.0	-1.5 ~ 0.6	27.6
			PS	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.0	25.0
GSM1900	GSM (Voice) + GPRS(Data)	Tx Slot 1	CS	30.0	-0.7 ~ 0.6	30.6	29.5	-1.5 ~ 0.6	30.1
		Tx Slot 2	CS	27.0	-1.5 ~ 0.6	27.6	25.4	-1.5 ~ 1.5	26.9
			PS	27.0	-1.5 ~ 0.6	27.6	25.4	-1.5 ~ 1.5	26.9
		Tx Slot 3	CS	26.0	-1.5 ~ 0.6	26.6	23.6	-1.5 ~ 1.5	25.1
			PS	26.0	-1.5 ~ 0.6	26.6	23.6	-1.5 ~ 1.5	25.1
	GSM (Voice) + EGPRS(Data) MCS5-9	Tx Slot 1	CS	30.0	-0.7 ~ 0.6	30.6	29.5	-1.5 ~ 0.6	30.1
		Tx Slot 2	CS	27.0	-1.5 ~ 0.6	27.6	25.4	-1.5 ~ 1.5	26.9
			PS	24.0	-1.5 ~ 1.0	25.0	24.0	-1.5 ~ 1.5	25.5
		Tx Slot 3	CS	26.0	-1.5 ~ 0.6	26.6	23.6	-1.5 ~ 1.5	25.1
			PS	23.0	-1.5 ~ 1.0	24.0	23.0	-1.5 ~ 1.5	24.5

Note: CS : circuit switched PS : packet switched

RF Air interface	Mode		Full Power			Reduce Power		
			Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)	Target (dBm)	Tolerance (dB)	Max. Tune-up Limit (dBm)
WCDMA Band V (5)	R99		24.0	-0.7 ~ 0.5	24.5	Not Supported		
	HSDPA	Subtest 1	23.5	-1.5 ~ 1.0	24.5			
		Subtest 2	23.5	-1.5 ~ 1.0	24.5			
		Subtest 3	23.5	-1.5 ~ 1.0	24.5			
		Subtest 4	23.5	-1.5 ~ 1.0	24.5			
	HSUPA	Subtest 1	23.5	-1.5 ~ 1.0	24.5			
		Subtest 2	22.0	-1.5 ~ 2.0	24.0			
		Subtest 3	23.0	-1.5 ~ 1.5	24.5			
		Subtest 4	22.0	-1.5 ~ 2.0	24.0			
		Subtest 5	23.5	-1.5 ~ 1.0	24.5			

RF Air interface	Mode	Max. Tune-up Limit (dBm)
Wi-Fi 2.4 GHz	802.11b	16.8
	802.11g	16.0
	802.11n HT20	15.0
Wi-Fi 5 GHz	802.11a	16.0
	802.11n HT20	16.0
	802.11n HT40	14.0
	802.11ac VHT20	16.0
	802.11ac VHT40	14.0
	802.11ac VHT80	13.0
Bluetooth	BDR	10.5
	EDR	7.9
	BLE	2.4

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
WLAN (DTS)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
WLAN (U-NII)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	10 mm	Rear	N/A	Yes	
			Front	N/A	Yes	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR Lab 1**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
2/23/2015	Body 5180	e'	47.10	Relative Permittivity (ϵ_r):	47.10	49.05	-3.97	5
		e"	18.86	Conductivity (σ):	5.43	5.27	3.05	5
	Body 5200	e'	47.11	Relative Permittivity (ϵ_r):	47.11	49.02	-3.90	5
		e"	18.64	Conductivity (σ):	5.39	5.29	1.79	5
	Body 5600	e'	46.37	Relative Permittivity (ϵ_r):	46.37	48.48	-4.35	5
		e"	19.15	Conductivity (σ):	5.96	5.76	3.50	5
	Body 5800	e'	46.21	Relative Permittivity (ϵ_r):	46.21	48.20	-4.13	5
		e"	19.25	Conductivity (σ):	6.21	6.00	3.47	5
2/26/2015	Body 5825	e'	46.08	Relative Permittivity (ϵ_r):	46.08	48.20	-4.40	5
		e"	19.42	Conductivity (σ):	6.29	6.00	4.83	5
	Head 5180	e'	37.42	Relative Permittivity (ϵ_r):	37.42	36.01	3.91	5
		e"	15.89	Conductivity (σ):	4.58	4.63	-1.16	5
	Head 5200	e'	37.37	Relative Permittivity (ϵ_r):	37.37	35.99	3.83	5
		e"	15.80	Conductivity (σ):	4.57	4.65	-1.78	5
	Head 5600	e'	36.53	Relative Permittivity (ϵ_r):	36.53	35.53	2.80	5
		e"	16.09	Conductivity (σ):	5.01	5.06	-0.99	5
3/12/2015	Head 5800	e'	36.43	Relative Permittivity (ϵ_r):	36.43	35.30	3.20	5
		e"	16.11	Conductivity (σ):	5.20	5.27	-1.41	5
	Head 5825	e'	36.28	Relative Permittivity (ϵ_r):	36.28	35.30	2.78	5
		e"	16.09	Conductivity (σ):	5.21	5.27	-1.11	5
	Head 2450	e'	39.1200	Relative Permittivity (ϵ_r):	39.12	39.20	-0.20	5
		e"	13.3900	Conductivity (σ):	1.82	1.80	1.34	5
	Head 2410	e'	39.2000	Relative Permittivity (ϵ_r):	39.20	39.28	-0.20	5
		e"	13.2200	Conductivity (σ):	1.77	1.76	0.63	5
3/13/2015	Head 2475	e'	39.1200	Relative Permittivity (ϵ_r):	39.12	39.17	-0.12	5
		e"	13.3400	Conductivity (σ):	1.84	1.83	0.48	5
	Body 2450	e'	50.9600	Relative Permittivity (ϵ_r):	50.96	52.70	-3.30	5
		e"	14.7300	Conductivity (σ):	2.01	1.95	2.90	5
	Body 2410	e'	51.0700	Relative Permittivity (ϵ_r):	51.07	52.76	-3.20	5
		e"	14.5500	Conductivity (σ):	1.95	1.91	2.22	5
	Body 2475	e'	50.9500	Relative Permittivity (ϵ_r):	50.95	52.67	-3.26	5
		e"	14.8600	Conductivity (σ):	2.04	1.99	3.02	5
3/26/2015	Body 2450	e'	48.6200	Relative Permittivity (ϵ_r):	48.62	49.05	-0.87	5
		e"	18.6300	Conductivity (σ):	5.37	5.27	1.79	5
	Body 5200	e'	48.7500	Relative Permittivity (ϵ_r):	48.75	49.02	-0.55	5
		e"	19.0000	Conductivity (σ):	5.49	5.29	3.76	5
	Body 5600	e'	47.9200	Relative Permittivity (ϵ_r):	47.92	48.48	-1.15	5
		e"	19.2400	Conductivity (σ):	5.99	5.76	3.99	5
	Body 5800	e'	47.4600	Relative Permittivity (ϵ_r):	47.46	48.20	-1.54	5
		e"	19.4800	Conductivity (σ):	6.28	6.00	4.70	5
3/26/2015	Body 5825	e'	47.5900	Relative Permittivity (ϵ_r):	47.59	48.20	-1.27	5
		e"	19.4200	Conductivity (σ):	6.29	6.00	4.83	5

SAR Lab 3

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit \pm (%)
2/23/2015	Head 835	e'	42.0600	Relative Permittivity (ϵ_r):	42.06	41.50	1.35	5
		e"	19.5700	Conductivity (σ):	0.91	0.90	0.96	5
	Head 820	e'	42.3800	Relative Permittivity (ϵ_r):	42.38	41.60	1.87	5
		e"	19.5800	Conductivity (σ):	0.89	0.90	-0.64	5
	Head 850	e'	41.9800	Relative Permittivity (ϵ_r):	41.98	41.50	1.16	5
		e"	19.4700	Conductivity (σ):	0.92	0.92	0.57	5
2/23/2015	Body 835	e'	54.8800	Relative Permittivity (ϵ_r):	54.88	55.20	-0.58	5
		e"	21.9200	Conductivity (σ):	1.02	0.97	4.92	5
	Body 820	e'	55.1400	Relative Permittivity (ϵ_r):	55.14	55.28	-0.25	5
		e"	22.0800	Conductivity (σ):	1.01	0.97	3.95	5
	Body 850	e'	54.7300	Relative Permittivity (ϵ_r):	54.73	55.16	-0.77	5
		e"	21.8400	Conductivity (σ):	1.03	0.99	4.57	5
2/27/2015	Body 835	e'	53.0100	Relative Permittivity (ϵ_r):	53.01	55.20	-3.97	5
		e"	21.9200	Conductivity (σ):	1.02	0.97	4.92	5
	Body 820	e'	53.1900	Relative Permittivity (ϵ_r):	53.19	55.28	-3.78	5
		e"	21.8700	Conductivity (σ):	1.00	0.97	2.96	5
	Body 850	e'	52.9300	Relative Permittivity (ϵ_r):	52.93	55.16	-4.04	5
		e"	21.5900	Conductivity (σ):	1.02	0.99	3.37	5
3/2/2015	Head 835	e'	39.7100	Relative Permittivity (ϵ_r):	39.71	41.50	-4.31	5
		e"	19.2300	Conductivity (σ):	0.89	0.90	-0.80	5
	Head 820	e'	40.0700	Relative Permittivity (ϵ_r):	40.07	41.60	-3.68	5
		e"	19.5300	Conductivity (σ):	0.89	0.90	-0.89	5
	Head 850	e'	39.6100	Relative Permittivity (ϵ_r):	39.61	41.50	-4.55	5
		e"	19.2300	Conductivity (σ):	0.91	0.92	-0.67	5
3/2/2015	Body 835	e'	53.5200	Relative Permittivity (ϵ_r):	53.52	55.20	-3.04	5
		e"	21.7100	Conductivity (σ):	1.01	0.97	3.91	5
	Body 820	e'	53.7400	Relative Permittivity (ϵ_r):	53.74	55.28	-2.78	5
		e"	21.8500	Conductivity (σ):	1.00	0.97	2.87	5
	Body 850	e'	53.4500	Relative Permittivity (ϵ_r):	53.45	55.16	-3.10	5
		e"	21.7400	Conductivity (σ):	1.03	0.99	4.09	5

SAR Lab 4

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit \pm (%)
2/23/2015	Head 1900	e'	38.7500	Relative Permittivity (ϵ_r):	38.75	40.00	-3.13	5
		e"	13.7600	Conductivity (σ):	1.45	1.40	3.83	5
	Head 1850	e'	38.9600	Relative Permittivity (ϵ_r):	38.96	40.00	-2.60	5
		e"	13.7000	Conductivity (σ):	1.41	1.40	0.66	5
	Head 1910	e'	38.6300	Relative Permittivity (ϵ_r):	38.63	40.00	-3.42	5
		e"	13.8400	Conductivity (σ):	1.47	1.40	4.99	5
2/23/2015	Body 1900	e'	51.2500	Relative Permittivity (ϵ_r):	51.25	53.30	-3.85	5
		e"	14.9400	Conductivity (σ):	1.58	1.52	3.84	5
	Body 1850	e'	51.4500	Relative Permittivity (ϵ_r):	51.45	53.30	-3.47	5
		e"	14.9100	Conductivity (σ):	1.53	1.52	0.90	5
	Body 1910	e'	51.1600	Relative Permittivity (ϵ_r):	51.16	53.30	-4.02	5
		e"	15.0000	Conductivity (σ):	1.59	1.52	4.80	5
3/2/2015	Body 1900	e'	52.2800	Relative Permittivity (ϵ_r):	52.28	53.30	-1.91	5
		e"	14.6000	Conductivity (σ):	1.54	1.52	1.48	5
	Body 1850	e'	52.3700	Relative Permittivity (ϵ_r):	52.37	53.30	-1.74	5
		e"	14.3800	Conductivity (σ):	1.48	1.52	-2.68	5
	Body 1910	e'	52.1400	Relative Permittivity (ϵ_r):	52.14	53.30	-2.18	5
		e"	14.4600	Conductivity (σ):	1.54	1.52	1.03	5
3/2/2015	Head 1900	e'	39.7800	Relative Permittivity (ϵ_r):	39.78	40.00	-0.55	5
		e"	13.5200	Conductivity (σ):	1.43	1.40	2.02	5
	Head 1850	e'	39.9400	Relative Permittivity (ϵ_r):	39.94	40.00	-0.15	5
		e"	13.3500	Conductivity (σ):	1.37	1.40	-1.91	5
	Head 1910	e'	39.6300	Relative Permittivity (ϵ_r):	39.63	40.00	-0.92	5
		e"	13.4700	Conductivity (σ):	1.43	1.40	2.18	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d142	9/9/2014	835	1g	8.91	9.22
				10g	5.77	6.05
D1900V2	5d163	9/11/2014	1900	1g	40.8	40.6
				10g	21.2	21.4
D2450V2	748	2/20/2015	2450	1g	52.7	50.3
				10g	24.6	23.5
D5GHzV2	1138	9/18/2014	5200	1g	81.4	75.4
				10g	23.3	21.0
			5600	1g	85.1	81.9
				10g	24.2	22.6
			5800	1g	80.6	75.2
				10g	23.0	20.8

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2/23/2015	D5GHzV2 (5.2 GHz)	1138	Body	1g	7.72	77.2	75.4	2.39
				10g	2.20	22.0	21.0	4.76
2/23/2015	D5GHzV2 (5.6 GHz)	1138	Body	1g	8.75	87.5	81.9	6.84
				10g	2.46	24.6	22.6	8.85
2/23/2015	D5GHzV2 (5.8 GHz)	1138	Body	1g	7.06	70.6	75.2	-6.12
				10g	1.98	19.8	20.8	-4.81
2/26/2015	D5GHzV2 (5.2 GHz)	1138	Head	1g	7.89	78.90	81.4	-3.07
				10g	2.26	22.60	23.3	-3.00
2/26/2015	D5GHzV2 (5.6 GHz)	1138	Head	1g	7.80	78.00	85.1	-8.34
				10g	2.20	22.00	24.2	-9.09
2/26/2015	D5GHzV2 (5.8 GHz)	1138	Head	1g	7.57	75.70	80.60	-6.08
				10g	2.14	21.40	23.00	-6.96
3/13/2015	D2450V2	748	Head	1g	5.18	51.80	52.7	-1.71
				10g	2.34	23.40	24.6	-4.88
3/13/2015	D2450V2	748	Body	1g	5.18	51.80	50.3	2.98
				10g	2.37	23.70	23.5	0.85
3/26/2015	D5GHzV2 (5.2 GHz)	1168	Body	1g	8.08	80.8	85.1	-5.05
				10g	2.28	22.8	24.2	-5.79
3/26/2015	D5GHzV2 (5.6 GHz)	1168	Body	1g	8.72	87.2	81.4	7.13
				10g	2.42	24.2	23.3	3.86
3/26/2015	D5GHzV2 (5.8 GHz)	1168	Body	1g	8.27	82.7	85.1	-2.82
				10g	2.27	22.7	24.2	-6.20

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2/23/2015	D835V2	4d142	Head	1g	0.904	9.04	8.91	1.46
				10g	0.592	5.92	5.77	2.60
2/23/2015	D835V2	4d142	Body	1g	0.938	9.38	9.22	1.74
				10g	0.618	6.18	6.05	2.15
2/27/2015	D835V2	4d142	Body	1g	0.989	9.89	9.22	7.27
				10g	0.648	6.48	6.05	7.11
3/2/2015	D835V2	4d142	Head	1g	0.956	9.56	8.91	7.30
				10g	0.626	6.26	5.77	8.49
3/2/2015	D835V2	4d142	Body	1g	0.955	9.55	9.2	3.58
				10g	0.629	6.29	6.1	3.97

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W			
2/23/2015	D1900V2	5d163	Head	1g	3.99	39.9	40.8	-2.21
				10g	2.06	20.6	21.2	-2.83
2/23/2015	D1900V2	5d163	Body	1g	3.76	37.6	40.6	-7.39
				10g	1.95	19.5	21.4	-8.88
3/2/2015	D1900V2	5d163	Body	1g	3.94	39.4	40.6	-2.96
				10g	2.04	20.4	21.4	-4.67
3/2/2015	D1900V2	5d163	Head	1g	4.45	44.5	40.8	9.07
				10g	2.29	22.9	21.2	8.02

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

- SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Power			Reduced Power		
						Burst Pwr (dBm)	Frame Pwr (dBm)	Maximum Frame Pwr	Burst Pwr (dBm)	Frame Pwr (dBm)	Maximum Frame Pwr
850	GSM (Voice)	CS1	1	128	824.2	33.1	24.0	24.6	32.6	23.6	24.1
				190	836.6	33.2	24.2		32.6	23.6	
				251	848.8	33.2	24.2		32.8	23.8	
	GPRS (GMSK)	CS1	1	128	824.2	33.1	24.0	24.6	32.6	23.6	24.1
				190	836.6	33.2	24.2		32.6	23.6	
				251	848.8	33.2	24.2		32.8	23.8	
			2	128	824.2	29.9	23.9	24.1	29.2	23.2	23.7
				190	836.6	29.9	23.9		29.2	23.2	
				251	848.8	30.0	24.0		29.3	23.3	
			3	128	824.2	27.9	23.6	23.8	27.1	22.8	23.3
				190	836.6	27.9	23.6		27.1	22.8	
				251	848.8	28.0	23.7		27.3	23.0	
			4	128	824.2	27.1	24.1	24.1	25.3	22.3	23.2
				190	836.6	27.1	24.1		25.3	22.3	
				251	848.8	27.1	24.1		25.6	22.6	
	EGPRS (8PSK)	MCS5	1	128	824.2	26.6	17.6	19.0	26.6	17.6	19.0
				190	836.6	26.7	17.7		26.6	17.6	
				251	848.8	26.8	17.8		26.8	17.8	
			2	128	824.2	24.7	18.7	20.0	24.7	18.7	20.0
				190	836.6	24.8	18.8		24.7	18.7	
				251	848.8	25.0	19.0		24.9	18.9	
			3	128	824.2	23.6	19.3	20.7	23.6	19.3	20.7
				190	836.6	23.6	19.3		23.6	19.3	
				251	848.8	23.8	19.5		23.8	19.5	
			4	128	824.2	21.5	18.5	20.0	21.6	18.6	20.0
				190	836.6	21.6	18.6		21.6	18.6	
				251	848.8	21.7	18.7		21.7	18.7	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 1 time slot for both Max and Reduced power, based on the output power measurements and maximum frame power, as listed above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Power			Reduced Power		
						Burst Pwr (dBm)	Frame Pwr (dBm)	Maximm Frame Pwr	Burst Pwr (dBm)	Frame Pwr (dBm)	Maximm Frame Pwr
1900	GSM (Voice)	CS1	1	512	1850.2	29.8	20.8	21.6	29.8	20.8	21.1
				661	1880.0	30.0	20.9		29.6	20.6	
				810	1909.8	30.0	20.9		29.6	20.6	
	GPRS (GMSK)	CS1	1	512	1850.2	29.8	20.8	21.6	29.8	20.8	21.1
				661	1880.0	30.0	20.9		29.6	20.6	
				810	1909.8	30.0	20.9		29.6	20.6	
			2	512	1850.2	27.0	21.0	21.6	25.5	19.5	20.0
				661	1880.0	27.0	21.0		25.4	19.4	
				810	1909.8	26.9	20.9		25.4	19.4	
			3	512	1850.2	25.9	21.6	22.3	23.9	19.6	19.9
				661	1880.0	25.7	21.4		23.7	19.4	
				810	1909.8	25.8	21.5		23.7	19.4	
			4	512	1850.2	24.9	21.9	22.6	22.8	19.8	20.0
				661	1880.0	24.8	21.8		22.6	19.6	
				810	1909.8	24.7	21.7		22.6	19.6	
	EGPRS (8PSK)	MCS5	1	512	1850.2	25.4	16.4	18.0	25.5	16.5	18.0
				661	1880.0	25.4	16.4		25.5	16.5	
				810	1909.8	25.3	16.3		25.5	16.5	
			2	512	1850.2	23.6	17.6	19.0	23.6	17.6	19.0
				661	1880.0	23.5	17.5		23.5	17.5	
				810	1909.8	23.5	17.5		23.5	17.5	
			3	512	1850.2	22.5	18.2	19.7	22.5	18.2	19.7
				661	1880.0	22.4	18.1		22.4	18.1	
				810	1909.8	22.4	18.1		22.4	18.1	
			4	512	1850.2	21.4	18.4	20.0	21.4	18.4	20.0
				661	1880.0	21.3	18.3		21.3	18.3	
				810	1909.8	21.3	18.3		21.3	18.3	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 4 time slots for Maximum Power and 1 time slot for Reduced Power, based on the output power measurements and maximum frame power, as listed above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM850 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Pwr					Reduce Pwr				
						CS		PS		Max Frame Pwr	CS		PS		Max Frame Pwr
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)		Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	
850	GSM(Voice) + GPRS(GMSK)	CS1	1	128	824.2	33.1	24.0				32.6	23.6			
				190	836.6	33.2	24.2				32.6	23.6			
				251	848.8	33.2	24.2				32.8	23.8			
			2	128	824.2	29.1	23.1	29.1	23.1	24.1	29.2	23.2	29.2	23.2	23.7
				190	836.6	29.2	23.2	29.1	23.1		29.2	23.2	29.1	23.1	
				251	848.8	29.3	23.3	29.2	23.2		29.3	23.3	29.2	23.2	
			3	128	824.2	27.2	22.9	27.1	22.8	23.8	27.2	22.9	27.1	22.8	23.3
				190	836.6	27.1	22.8	27.0	22.7		27.2	22.9	27.2	22.9	
				251	848.8	27.3	23.0	27.2	22.9		27.4	23.1	27.3	23.0	
	GSM(Voice) + EGPRS(8PSK)	MCS5	1	128	824.2	33.1	24.0				32.6	23.6			
				190	836.6	33.2	24.2				32.6	23.6			
				251	848.8	33.2	24.2				32.8	23.8			
			2	128	824.2	29.2	23.2	24.6	18.6	20.0	28.8	22.8	24.6	18.6	20.0
				190	836.6	29.2	23.2	24.6	18.6		28.8	22.8	24.6	18.6	
				251	848.8	29.4	23.4	24.8	18.8		29.0	23.0	24.8	18.8	
			3	128	824.2	27.3	23.0	23.5	19.2	20.7	26.7	22.4	23.5	19.2	20.7
				190	836.6	27.3	23.0	23.5	19.2		26.8	22.5	23.6	19.3	
				251	848.8	27.4	23.1	23.7	19.4		26.9	22.6	23.7	19.4	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GMSK (GPRS) mode with 2 time slot for both Max and Reduced power, based on the output power measurements and maximum frame power, as listed above
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because its output power is less than that of GSM(Voice) + GMSK (GPRS) mode.

GSM1900 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Pwr					Reduce Pwr				
						CS		PS		Max Frame Pwr	CS		PS		Max Frame Pwr
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)		Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	
1900	GSM(Voice) + GPRS(GMSK)	CS1	1	512	1850.2	29.8	20.8			21.6	29.8	20.8			21.1
				661	1880.0	30.0	20.9				29.6	20.6			
				810	1909.8	30.0	20.9				29.6	20.6			
			2	512	1850.2	27.1	21.1	27.0	21.0	21.6	25.4	19.4	25.3	19.3	20.9
				661	1880.0	27.0	21.0	26.9	20.9		25.3	19.3	25.3	19.3	
				810	1909.8	27.0	21.0	26.9	20.9		25.3	19.3	25.3	19.3	
			3	512	1850.2	25.9	21.6	25.8	21.5	22.3	23.8	19.5	23.7	19.4	20.8
				661	1880.0	25.9	21.6	25.8	21.5		23.8	19.5	23.7	19.4	
				810	1909.8	25.9	21.6	25.8	21.5		23.8	19.5	23.7	19.4	
	GSM(Voice) + EGPRS(8PSK)	MCS5	1	512	1850.2	29.8	20.8			21.6	29.8	20.8			
				661	1880.0	30.0	20.9				29.6	20.6			
				810	1909.8	30.0	20.9				29.6	20.6			
			2	512	1850.2	27.1	21.1	23.5	17.5	19.0	25.5	19.5	23.5	17.5	19.5
				661	1880.0	27.0	21.0	23.4	17.4		25.4	19.4	23.4	17.4	
				810	1909.8	27.0	21.0	23.4	17.4		25.4	19.4	23.5	17.5	
			3	512	1850.2	26.0	21.7	22.4	18.1	19.7	23.8	19.5	22.4	18.1	20.2
				661	1880.0	25.9	21.6	22.4	18.1		23.8	19.5	22.4	18.1	
				810	1909.8	25.9	21.6	22.3	18.0		23.8	19.5	22.4	18.1	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GMSK (GPRS) mode with 3 time slots for Maximum Power and 2 time slot for Reduced Power, based on the output power measurements and maximum frame power, as listed above
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because its output power is less than that of GSM(Voice) + GMSK (GPRS) mode.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

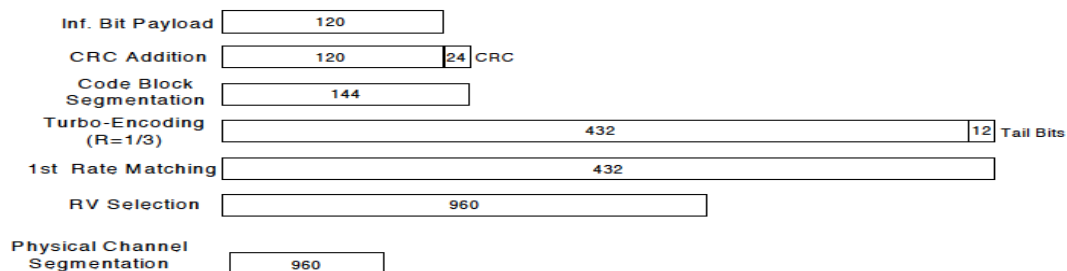**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max Avg Pwr (dBm)
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.3
			4183	836.6	N/A	24.3
			4233	846.6	N/A	24.3
	HSDPA	Subtest 1	4132	826.4	0	24.3
			4183	836.6	0	24.3
			4233	846.6	0	24.3
		Subtest 2	4132	826.4	0	24.3
			4183	836.6	0	24.3
			4233	846.6	0	24.3
		Subtest 3	4132	826.4	0.5	23.9
			4183	836.6	0.5	23.8
			4233	846.6	0.5	23.9
		Subtest 4	4132	826.4	0.5	23.9
			4183	836.6	0.5	23.8
			4233	846.6	0.5	23.9
	HSUPA	Subtest 1	4132	826.4	0	23.8
			4183	836.6	0	23.5
			4233	846.6	0	23.3
		Subtest 2	4132	826.4	2	22.5
			4183	836.6	2	22.7
			4233	846.6	2	22.9
		Subtest 3	4132	826.4	1	23.3
			4183	836.6	1	23.1
			4233	846.6	1	23.2
		Subtest 4	4132	826.4	2	22.5
			4183	836.6	2	22.7
			4233	846.6	2	22.9
		Subtest 5	4132	826.4	0	23.8
			4183	836.6	0	23.5
			4233	846.6	0	23.3
	DC-HSDPA	Subtest 1	4132	826.4	0	24.3
			4183	836.6	0	24.3
			4233	846.6	0	24.3
		Subtest 2	4132	826.4	0	24.3
			4183	836.6	0	24.3
			4233	846.6	0	24.3
		Subtest 3	4132	826.4	0.5	23.9
			4183	836.6	0.5	23.8
			4233	846.6	0.5	23.9
		Subtest 4	4132	826.4	0.5	23.9
			4183	836.6	0.5	23.8
			4233	846.6	0.5	23.9

9.3. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
2.4	802.11b	1 Mbps	1	2412	14.1	16.8	Yes
			6	2437	15.1		
			11	2462	14.8		
	802.11g	6 Mbps	1	2412	Not Required	16.0	No
			6	2437			
			11	2462			
	802.11n (HT20)	MCS0	1	2412		15.0	No
			6	2437			
			11	2462			

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.4. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
5.2 (U-NII 1)	802.11a	6 Mbps	36	5180	15.0	16	No
			40	5200	15.0		
			44	5220	15.0		
			48	5240	15.0		
	802.11n (HT20)	6.5 Mbps	36	5180	14.8	16	No
			40	5200	15.0		
			44	5220	14.9		
			48	5240	14.7		
	802.11n (HT40)	13.5 Mbps	38	5190	Not Required	14	No
			46	5230			
	802.11ac (VHT20)	6.5 Mbps	36	5180	14.8	16	No
			40	5200	14.9		
			44	5220	14.8		
			48	5240	14.9		
	802.11ac (VHT40)	13.5 Mbps	38	5190	Not Required	14	No
			46	5230			
	802.11ac (VHT80)	13.5 Mbps	42	5210	Not Required	13	No
5.3 (U-NII A)	802.11a	6 Mbps	52	5260	14.8	16	Yes
			56	5280	14.7		
			60	5300	14.7		
			64	5320	14.6		
	802.11n (HT20)	6.5 Mbps	52	5260	14.7	16	No
			56	5280	14.7		
			60	5300	14.8		
			64	5320	14.8		
	802.11n (HT40)	13.5 Mbps	54	5270	Not Required	14	No
			62	5310			
	802.11ac (VHT20)	6.5 Mbps	52	5260	15.0	16	No
			56	5280	14.5		
			60	5300	14.8		
			64	5320	14.6		
	802.11ac (VHT40)	13.5 Mbps	54	5270	Not Required	14	No
			62	5310			
	802.11ac (VHT80)	13.5 Mbps	58	5290	Not Required	13	No

Note(s):

- Output Power and SAR measurement is not required for 802.11n HT20/HT40 and 802.11ac VHT20/40/80 channels when the specified tune-up tolerances for 802.11n HT20/HT40 and 802.11ac VHT20/40/80 are lower than 802.11a by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

Measured Results (continued)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
UNII-2C	802.11a	6 Mbps	100	5500	15.1	16.0	Yes
			104	5520	15.5		
			108	5540	15.4		
			112	5560	15.6		
			116	5580	15.4		
			120	5600	Not Supported		
			124	5620	Not Supported		
			128	5640	Not Supported		
			132	5660	15.5		
			136	5680	15.4		
			140	5700	15.3		
	802.11n (HT20)	6.5 Mbps	100	5500	15.1	16.0	Yes
			104	5520	15.2		
			108	5540	15.4		
			112	5560	15.2		
			116	5580	15.4		
			120	5600	Not Supported		
			124	5620	Not Supported		
			128	5640	Not Supported		
			132	5660	15.4		
			136	5680	15.6		
			140	5700	15.2		
	802.11n (HT40)	13.5 Mbps	102	5510	13.3	14.0	No
			110	5550	13.7		
			118	5590	Not Supported		
			126	5630	Not Supported		
			134	5670	13.4		
	802.11ac (VHT20)	6.5 Mbps	100	5500	15.0	16.0	Yes
			104	5520	15.1		
			108	5540	15.3		
			112	5560	15.5		
			116	5580	15.6		
			120	5600	Not Supported		
			124	5620	Not Supported		
			128	5640	Not Supported		
			132	5660	15.4		
			136	5680	15.2		
			140	5700	15.1		
	802.11ac (VHT40)	13.5 Mbps	102	5510	13.2	14.0	No
			110	5550	13.6		
			118	5590	Not Supported		
			126	5630	Not Supported		
			134	5670	13.2		
	802.11ac (VHT80)	29.3 Mbps	106	5530	12.1	13.0	No
			122	5610	Not Supported		

Note(s):

- Output Power and SAR measurement is not required for 802.11n HT20/HT40 and 802.11ac VHT20/40/80 channels when the specified tune-up tolerances for 802.11n HT20/HT40 and 802.11ac VHT20/40/80 are lower than 802.11a by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

Measured Results (continued)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
UNII-3 or §15.247	802.11a	6 Mbps	149	5745	15.0	16.0	Yes
			153	5765	15.0		
			157	5785	14.9		
			161	5805	14.7		
			165	5825	15.0		
	802.11n (HT20)	6.5 Mbps	149	5745	15.0	16.0	Yes
			153	5765	14.8		
			157	5785	14.7		
			161	5805	14.7		
			165	5825	15.0		
	802.11n (HT40)	13.5 Mbps	151	5755	12.8	14.0	No
			159	5795	12.9		
	802.11ac (VHT20)	6.5 Mbps	149	5745	15.0	16.0	Yes
			153	5765	14.8		
			157	5785	15.0		
			161	5805	14.6		
			165	5825	14.8		
	802.11ac (VHT40)	13.5 Mbps	151	5755	12.8	14.0	No
			159	5795	12.9		
	802.11ac (VHT80)	29.3 Mbps	155	5775	11.4	13.0	No

Note(s):

- Output Power and SAR measurement is not required for 802.11n HT20/HT40 and 802.11ac VHT20/40/80 channels when the specified tune-up tolerances for 802.11n HT20/HT40 and 802.11ac VHT20/40/80 are lower than 802.11a by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

9.5. Bluetooth

Maximum tune-up tolerance limit is 10.50 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Voice	OFF	0	Left Touch	190	836.6	33.6	33.2	0.255	0.280	0.190	0.208	1
				Left Tilt	190	836.6	33.6	33.2	0.148	0.162	0.112	0.123	
				Right Touch	190	836.6	33.6	33.2	0.240	0.263	0.179	0.196	
				Right Tilt	190	836.6	33.6	33.2	0.156	0.171	0.119	0.130	
Head VoIP	GPRS 1 Slots	OFF	0	Left Touch	190	836.6	33.6	33.2	0.263	0.288	0.197	0.216	2
				Left Tilt	190	836.6	33.6	33.2	0.138	0.151	0.104	0.114	
				Right Touch	190	836.6	33.6	33.2	0.240	0.263	0.179	0.196	
				Right Tilt	190	836.6	33.6	33.2	0.151	0.166	0.114	0.125	
Body-worn	Voice	OFF	15	Rear	190	836.6	33.6	33.2	0.297	0.326	0.225	0.247	
				Front	190	836.6	33.6	33.2	0.300	0.329	0.227	0.249	3
Hotspot	GPRS 1 Slots	ON	10	Rear	190	836.6	33.1	32.6	0.373	0.419	0.284	0.319	4
				Front	190	836.6	33.1	32.6	0.352	0.395	0.268	0.301	
				Edge 2	190	836.6	33.1	32.6	0.176	0.197	0.123	0.138	
				Edge 3	190	836.6	33.1	32.6	0.015	0.017	0.009	0.011	
				Edge 4	190	836.6	33.1	32.6	0.185	0.208	0.129	0.145	

DTM (Dual Transfer Mode)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Body-worn(VoIP)	DTM 2 slots	OFF	15	Rear	190	836.6	30.1	29.2	0.256	0.315	0.193	0.237	
Hotspot	DTM 2 slots	ON	10	Rear	190	836.6	29.7	29.2	0.296	0.332	0.226	0.254	5

10.2. GSM1900

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Voice	OFF	0	Left Touch	661	1880.0	30.6	30.0	0.457	0.527	0.282	0.325	
				Left Tilt	661	1880.0	30.6	30.0	0.126	0.145	0.074	0.085	
				Right Touch	661	1880.0	30.6	30.0	0.460	0.531	0.275	0.317	6
				Right Tilt	661	1880.0	30.6	30.0	0.124	0.143	0.073	0.084	
Head VoIP	GPRS 4 Slots	OFF	0	Left Touch	661	1880.0	25.6	24.8	0.465	0.559	0.287	0.345	
				Left Tilt	661	1880.0	25.6	24.8	0.143	0.172	0.083	0.100	
				Right Touch	661	1880.0	25.6	24.8	0.578	0.695	0.345	0.415	7
				Right Tilt	661	1880.0	25.6	24.8	0.146	0.176	0.085	0.102	
Body-worn	Voice	OFF	15	Rear	661	1880.0	30.6	30.0	0.426	0.491	0.267	0.308	8
				Front	661	1880.0	30.6	30.0	0.341	0.393	0.213	0.246	
Hotspot	GPRS 1 Slots	ON	10	Rear	661	1880.0	30.1	29.6	0.659	0.739	0.412	0.462	9
				Front	661	1880.0	30.1	29.6	0.511	0.573	0.314	0.352	
				Edge 2	661	1880.0	30.1	29.6	0.064	0.071	0.037	0.042	
				Edge 3	661	1880.0	30.1	29.6	0.190	0.213	0.113	0.127	
				Edge 4	661	1880.0	30.1	29.6	0.061	0.068	0.036	0.041	

DTM (Dual Transfer Mode)

RF Exposure Conditions	Mode	Pwr Back off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	DTM 3 slots	OFF	0	Right Touch	661	1880.0	26.6	25.8	0.230	0.277	0.135	0.162	
Hotspot	DTM 2 slots	ON	10	Rear	512	1850.2	26.9	25.3	0.459	0.663	0.287	0.415	
					661	1880.0	26.9	25.3	0.605	0.874	0.379	0.548	10
					810	1909.8	26.9	25.3	0.549	0.794	0.338	0.489	
				Front	661	1880.0	30.1	29.6	0.361	0.405	0.220	0.247	
				Edge 2	661	1880.0	30.1	29.6	0.046	0.051	0.027	0.031	
				Edge 3	661	1880.0	30.1	29.6	0.153	0.172	0.090	0.101	
				Edge 4	661	1880.0	30.1	29.6	0.042	0.047	0.025	0.028	

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	24.5	24.3	0.384	0.383	0.288	0.302	11
			Left Tilt	4183	836.6	24.5	24.3	0.233	0.233	0.176	0.184	
			Right Touch	4183	836.6	24.5	24.3	0.359	0.358	0.270	0.283	
			Right Tilt	4183	836.6	24.5	24.3	0.261	0.260	0.197	0.206	
Body-worn	Rel 99 RMC	15	Rear	4183	836.6	24.5	24.3	0.439	0.437	0.332	0.348	12
			Front	4183	836.6	24.5	24.3	0.418	0.417	0.316	0.331	
Hotspot	Rel 99 RMC	10	Rear	4183	836.6	24.5	24.3	0.580	0.577	0.442	0.463	13
			Front	4183	836.6	24.5	24.3	0.528	0.526	0.404	0.423	
			Edge 2	4183	836.6	24.5	24.3	0.297	0.296	0.207	0.217	
			Edge 3	4183	836.6	24.5	24.3	0.023	0.023	0.016	0.016	
			Edge 4	4183	836.6	24.5	24.3	0.298	0.297	0.208	0.218	

10.4. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.333	16.8	15.1	0.339	0.501	0.137	0.203	2	14
				Left Tilt	6	2437.0	0.146	16.8	15.1	0.122	0.180	0.061	0.090	3	
				Right Touch	6	2437.0	0.082								
				Right Tilt	6	2437.0	0.067								
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	0.194								
				Front	6	2437.0	0.073								
				Edge 1	6	2437.0	0.016								
				Edge 2	6	2437.0	0.211	16.8	15.1	0.218	0.322	0.099	0.146	1	15

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.

10.5. Wi-Fi (U-NII Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.3 GHz U-NII 2A	802.11a 6 Mbps	Head	0	Left Touch	52	5260.0	0.603	16.0	14.8	0.405	0.534	0.119	0.157	2	16
				Left Tilt	52	5260.0	0.512	16.0	14.8	0.283	0.373	0.081	0.107	3	
				Right Touch			0.336								
				Right Tilt			0.279								
		Body-worn	10	Rear	52	5260.0	0.344	16.0	14.8	0.243	0.320	0.080	0.105	1	17
				Front			0.148								
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	Notes	Plot No.
5.5 GHz U-NII 2C	802.11a 6 Mbps	Head	0	Left Touch	112	5560.0	0.702	16.0	15.6	0.406	0.445	0.113	0.112	2	18
				Left Tilt	112	5560.0	0.590	16.0	15.6	0.390	0.428	0.106	0.105	3	
				Right Touch			0.455								
				Right Tilt			0.430								
		Body-worn	10	Rear	112	5560.0	0.311	16.0	15.6	0.205	0.225	0.205	0.204	1	19
				Front			0.201								
Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	Notes	Plot No.
5.8 GHz U-NII 3	802.11a 6 Mbps	Head	0	Left Touch	165	5825.0	0.770	16.0	15.0	0.524	0.660	0.140	0.136	2	20
				Left Tilt	165	5825.0	0.551	16.0	15.0	0.350	0.441	0.108	0.106	3	
				Right Touch			0.455								
				Right Tilt			0.376								
		Body-worn	10	Rear	165	5825.0	0.359	16.0	15.0	0.222	0.279	0.083	0.082	1	21
				Front			0.156								

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.

10.6. Bluetooth

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
10.5	11	15	2.480	1.2	Rear/Front	0.154

Conclusion:

*: The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
850	GSM 850	Hotspot	Rear	No	0.373	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.580	N/A	N/A
1900	GSM 1900	Hotspot	Rear	No	0.659	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Left Touch	No	0.339	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.405	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.406	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.524	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations				
Head	1	GSM(Voice)	+	DTS		
	2	GSM(Voice)	+	U-NII		
	3	GSM(GPRS/EDGE)	+	DTS		
	4	GSM(GPRS/EDGE)	+	U-NII		
	5	W-CDMA	+	DTS		
	6	W-CDMA	+	U-NII		
Body-worn	7	GSM(Voice)	+	DTS		
	8	GSM(Voice)	+	U-NII		
	9	GSM(Voice)	+	BT		
	10	GSM(Voice)	+	U-NII	+	BT
	11	GSM(GPRS/EDGE)	+	DTS		
	12	GSM(GPRS/EDGE)	+	U-NII		
	13	GSM(GPRS/EDGE)	+	BT		
	14	GSM(GPRS/EDGE)	+	U-NII	+	BT
	15	W-CDMA	+	DTS		
	16	W-CDMA	+	U-NII		
	17	W-CDMA	+	BT		
	18	W-CDMA	+	U-NII	+	BT
	19			U-NII	+	BT
Hotspot & Wi-Fi Direct	20	GSM(GPRS/EDGE)	+	DTS		
	21	W-CDMA	+	DTS		

Notes:

1. Only DTS supports Hotspot and Wi-Fi Direct.
2. GPRS/EDGE, W-CDMA and LTE support Hotspot.
3. VoIP is supported in GPRS/EDGE, W-CDMA and LTE.
4. DTS Radio cannot transmit simultaneously with Bluetooth Radio.
5. U-NII Radio can transmit simultaneously with Bluetooth Radio.

Note(s):

BT and WLAN can have a transmission ongoing at the same time, but it only appear to be that way since it is time switched on board level so you have the packages being interleaved. That means that it will not transmit at the same time.

12.1. Sum of the SAR for WWAN, Wi-Fi, & BT

RF Exposure conditions	① WWAN	② DTS	③ U-NII	④ BT	①+② WWAN + DTS		①+③ WWAN + U-NII		①+④ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	0.695	0.501	0.660		1.196	No	1.355	No		
Body-worn	0.491	0.322	0.320	0.154	0.813	No	0.811	No	0.645	No
Hotspot	0.874	0.322			1.196	No				

Appendixes

Refer to separated files for the following appendixes.

A_15U19770v0 SAR Photos & Ant. Locations

B_15U19770v0 SAR System Check Plots

C_15U19770v0 SAR Highest Test Plots

D_15U19770v0 SAR Tissue Ingredients

E_15U19770v0 SAR Probe Cal. Certificates

F_15U19770v0 SAR Dipole Cal. Certificates

END OF REPORT