



FCC PART 15C TEST REPORT

BLUETOOTH LOW ENERGY (BLE) PART

No. I14Z49094-SRD02

for

Sony Mobile communications Inc

Smart band


FCC ID: PY7-RD0071

with

Hardware Version: A

Software Version: 0.0.134

Issued Date: 2015-01-13

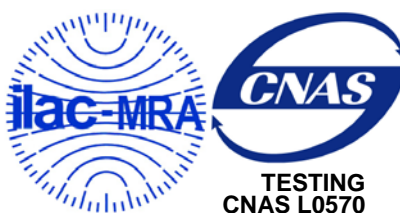

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

[Tel:+86\(0\)10-62304633-2512](tel:+86(0)10-62304633-2512), [Fax:+86\(0\)10-62304633-2504](tel:+86(0)10-62304633-2504)

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I14Z49094-SRD02	Rev.0	1st edition	2015-01-08
I14Z49094-SRD02	Rev.1	2nd edition	2015-01-13

CONTENTS

1. TEST LABORATORY	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA	6
1.4. SIGNATURE.....	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE	8
3.4. NORMAL ACCESSORY SETTING.....	8
3.5. GENERAL DESCRIPTION.....	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
5. LABORATORY ENVIRONMENT.....	10
6. SUMMARY OF TEST RESULTS	11
6.1. SUMMARY OF TEST RESULTS	11
6.2. STATEMENTS.....	11
6.3. TEST CONDITIONS	11
7. TEST FACILITIES UTILIZED	12
ANNEX A: DETAILED TEST RESULTS.....	13
A.1. MEASUREMENT METHOD	13
A.2. PEAK OUTPUT POWER – CONDUCTED	14
A.2.1 Antenna gain.....	14
A.2.2 Conducted Output Power	14
A.2.3 Radiated Output Power	14
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	15
A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED	17
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED	26
A.6. 6dB BANDWIDTH.....	34
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL	37



A.8. 20DB BANDWIDTH.....	40
A.9. AC POWERLINE CONDUCTED EMISSION	42
A.10 RECEIVER RADIATION EMISSION.....	46
ANNEX B: ACCREDITATION CERTIFICATE.....	48



1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191
Telephone: +86-10-62304633-2561
Fax: +86-10-62304633-2063

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Testing Environment

Normal Temperature: 15-35°C
Extreme Temperature: -10/+55°C
Relative Humidity: 20-75%
Air Pressure 990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.


1.3. Project data

Project Leader: Xu Zhongfei
Testing Start Date: 2014-12-19
Testing End Date: 2015-01-08


1.4. Signature



Xu Zhongfei
(Prepared this test report)



Li Zhibin
(Reviewed this test report)



Lv Songdong
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Sony Mobile Communications (China) Co. Ltd
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,
Chaoyang District
City: Beijing
Postal Code: 100102
Country: China
Contact Person: Ma, Gang
Telephone: +86-10-58656312
Fax: +86-10-58659049

2.2. Manufacturer Information

Company Name: Sony Mobile Communications Inc.
Address /Post: 1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan
City: Tokyo
Postal Code: 108-0075
Country: Japan

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart band
FCC ID	PY7-RD0071
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Antenna	Integrated Antenna
MAX Conducted Power	4.94 dBm
MAX Radiated Power	6.57 dBm (EIRP)
Power Supply	3.7V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	A	0.0.134
EUT2	/	A	0.0.134

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description		
AE1	Battery	/	Inbuilt

AE1

Model	/
Manufacturer	/
Capacitance	/
Nominal voltage	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery is used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Bluetooth Wristband with integrated antenna and inbuilt battery.

It has Bluetooth (BLE) and NFC function.

It consists of normal options: mobile phone.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	June,2014
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	June,2013

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Fully-anechoic chamber3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Additional Humidity Requirements for Electrostatic Discharge Test: Min. = 30%, Max. = 60%.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	P
Frequency Band Edges	15.247 (d)	P
Conducted Emission	15.247 (d)	P
Radiated Emission	15.247, 15.205, 15.209	P
6dB Bandwidth	15.247 (a)(2)	P
Maximum Power Spectral Density Level	15.247(e)	P
20dB Bandwidth	15.247 (a)(1)	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

6.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

6.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	25°C
Voltage	V nom	4.2V
Humidity	H nom	38%
Air Pressure	A nom	1010hPa

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2016-01-06

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2015-11-05
2	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	3 years	2015-07-13
3	EMI Antenna	3117	00119021	ETS-Lindgren	3 years	2016-04-19
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2015-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	3 years	2015-06-30
6	Bluetooth Tester	CBT	100153	Rohde & Schwarz	1 year	2015-09-15
7	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	1 year	2016-04-14
8	Pre-amplifier (18GHz)	HFH2-Z2	829324/007	Rohde & Schwarz	/	/
9	Pre-amplifier (26.5GHz)	SCU18	1005277	Rohde & Schwarz	/	/
10	Loop Antenna	SCU26	1006788	Rohde & Schwarz	3 years	2015-12-12
11	Fully-anechoic chamber	S81	CT00008 3-1030	ETS-Lindgren	/	/


ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

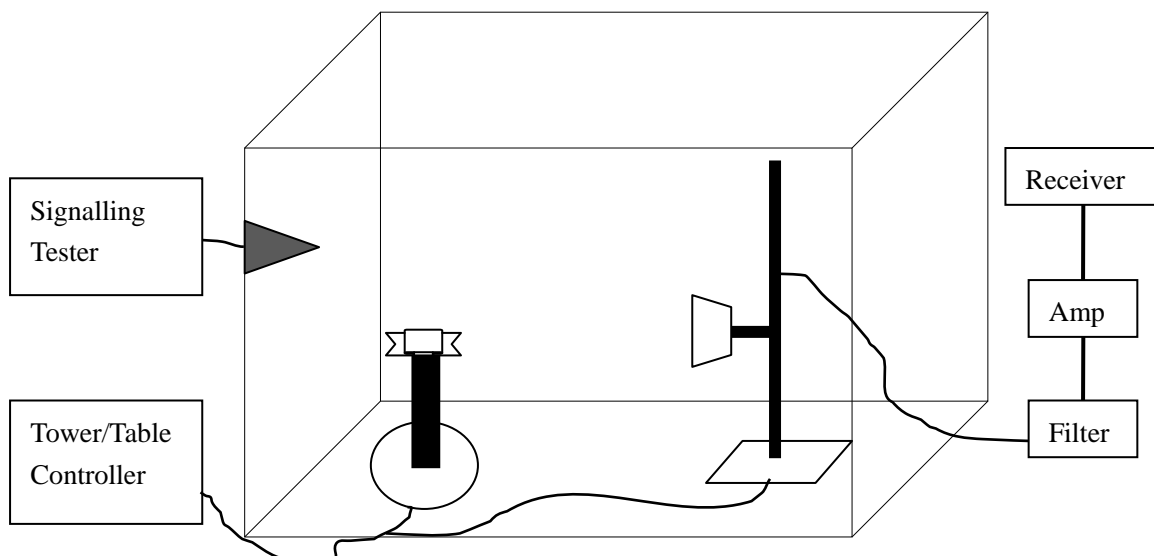



A.2. Peak Output Power – Conducted

A.2.1 Antenna gain

Channel	2402 MHz	2441 MHz	2480 MHz
Gain(dBi)	1.67	1.40	1.18

A.2.2 Conducted Output Power

Method of Measurement: See ANSI C63.10-clause 11.9.1.1

- Set the RBW = 1 MHz.
- Set VBW = 3 MHz.
- Set span = 3 MHz.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
GFSK (dBm)	4.90	4.94	4.83	P

Measurement Uncertainty: ± 1.17 dB

Conclusion: PASS

A.2.3 Radiated Output Power

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
GFSK * (dBm)	6.57	6.34	6.01	P

Note:* These values are calculated with the antenna gain

Measurement Uncertainty: ± 1.98 dB

A.3. Frequency Band Edges - Conducted

Method of Measurement: See ANSI C63.10-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20


Measurement Result:

For GFSK

Channel No.	Frequency (MHz)	Hopping	Band Edge Power (dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-48.69	P
39	2480	Hopping OFF	Fig.2	-58.74	P


Conclusion: PASS

Test graphs as below

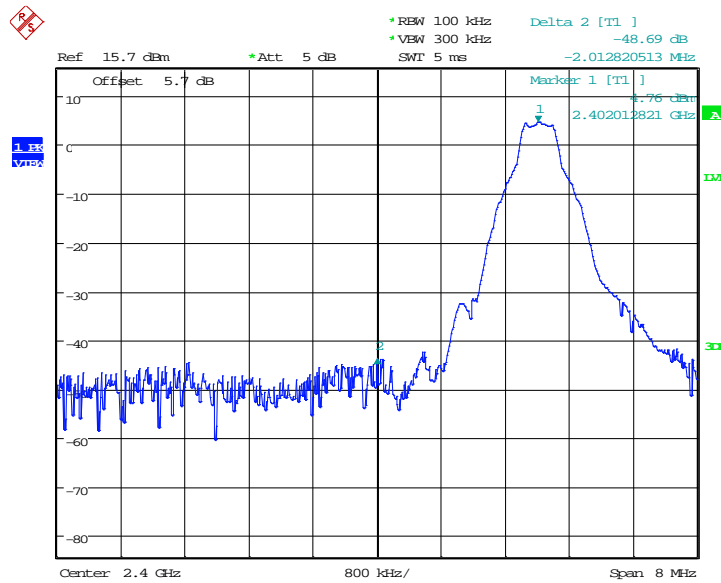

Date: 30.DEC.2014 09:24:29

Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

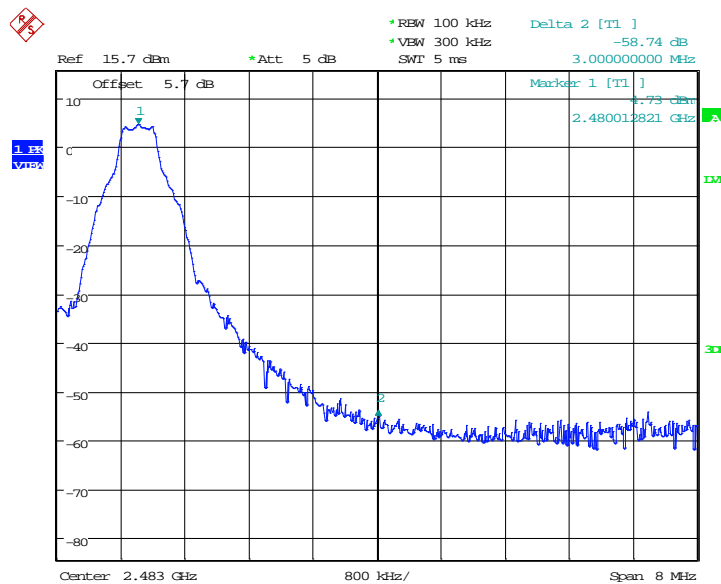

Date: 30.DEC.2014 09:21:11

Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off



A.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to ≥ 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
 2. Set VBW = 300 kHz.
 3. Set span to encompass the spectrum to be examined.
 4. Detector = peak.
 5. Trace Mode = max hold.
 6. Sweep = auto couple.
 7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:
For GFSK

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P


Conclusion: PASS

Test graphs as below

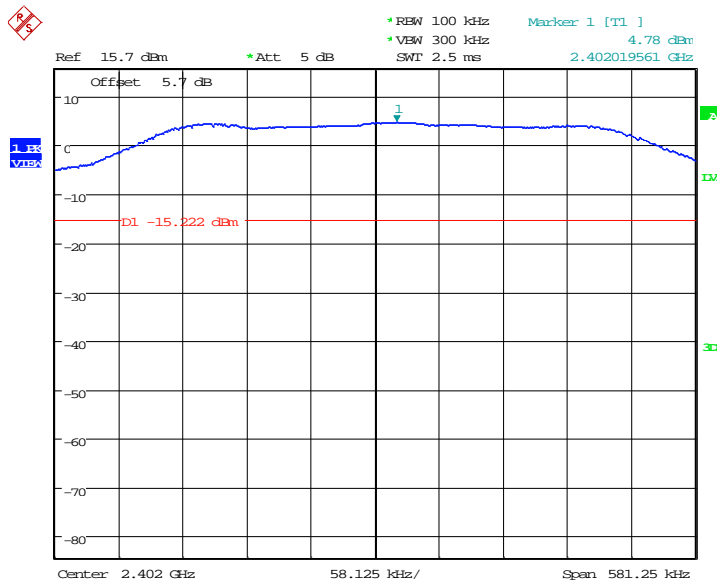


Date: 30.DEC.2014 09:22:48

Fig.3. Transmitter Spurious Emission - Conducted: GFSK,2402MHz

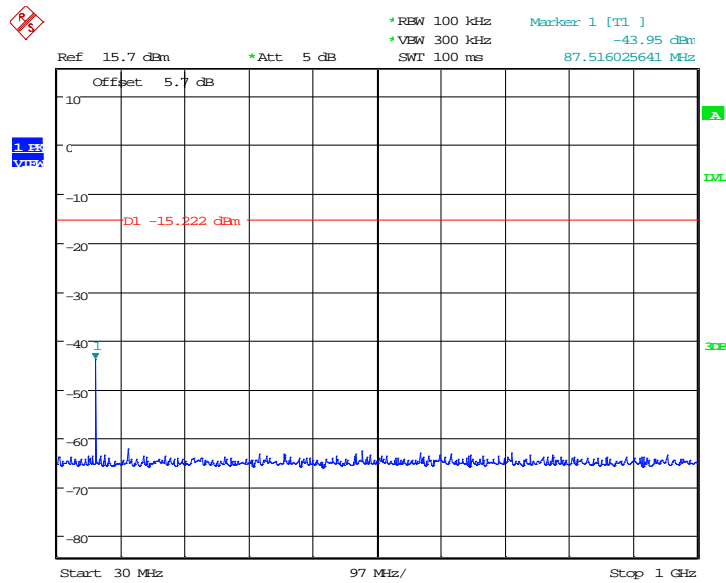


Date: 30.DEC.2014 09:23:05

Fig.4. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

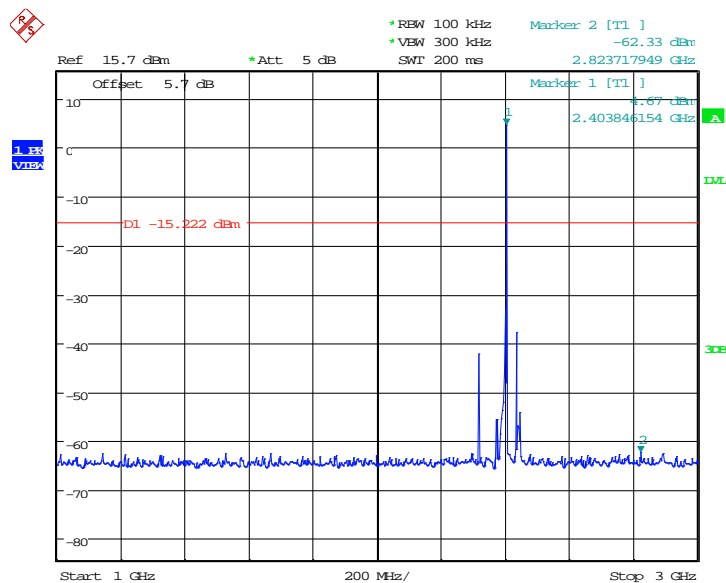


Date: 30.DEC.2014 09:23:36

Fig.5. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

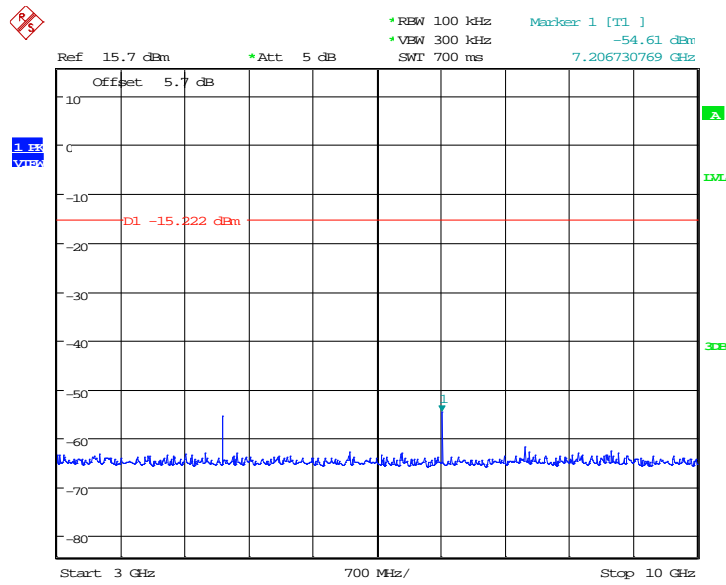


Date: 30.DEC.2014 09:23:53

Fig.6. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz,3GHz - 10GHz

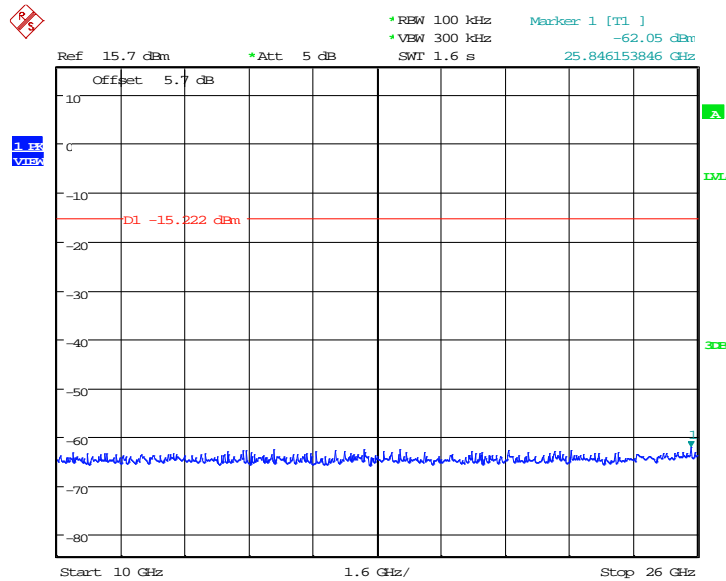


Date: 30.DEC.2014 09:24:10

Fig.7. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz,10GHz - 26GHz

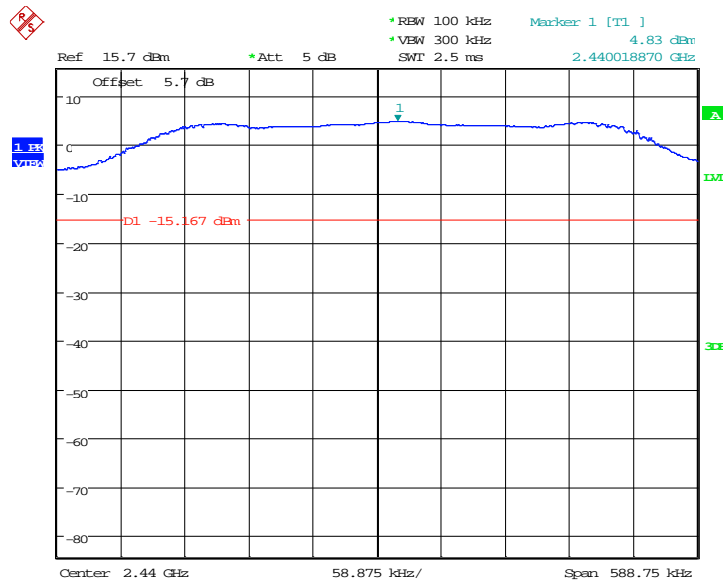


Date: 30.DEC.2014 09:16:19

Fig.8. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

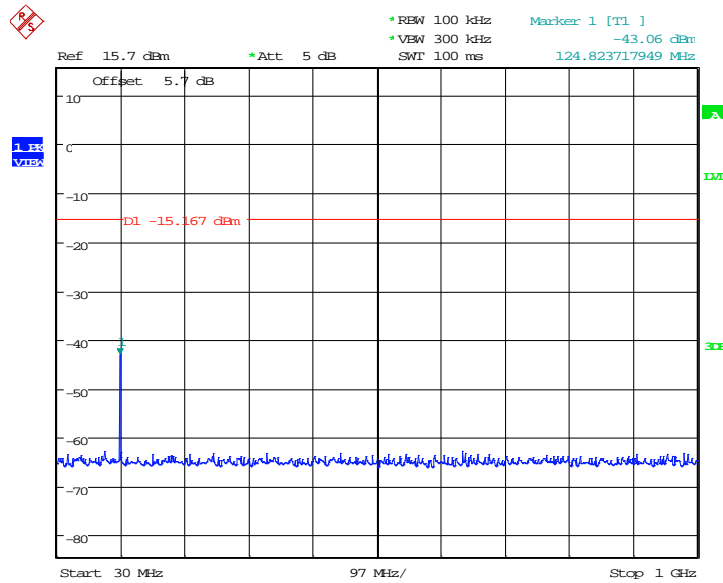


Date: 30.DEC.2014 09:16:36

Fig.9. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

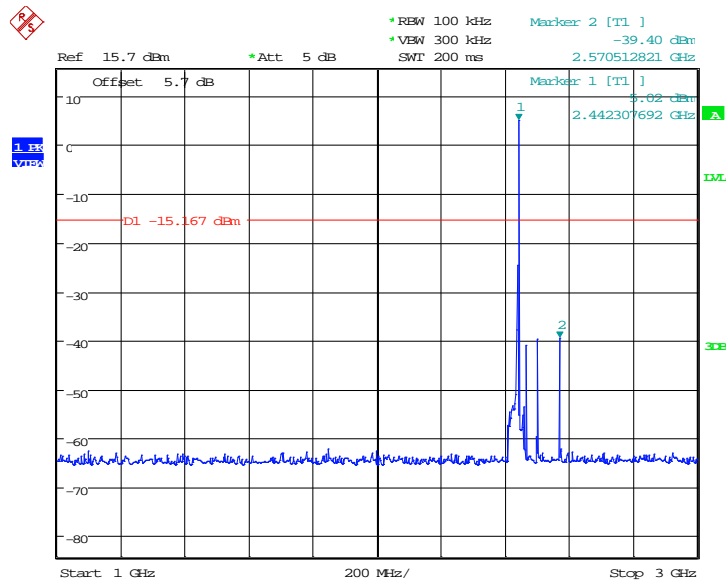


Date: 30.DEC.2014 09:17:07

Fig.10. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

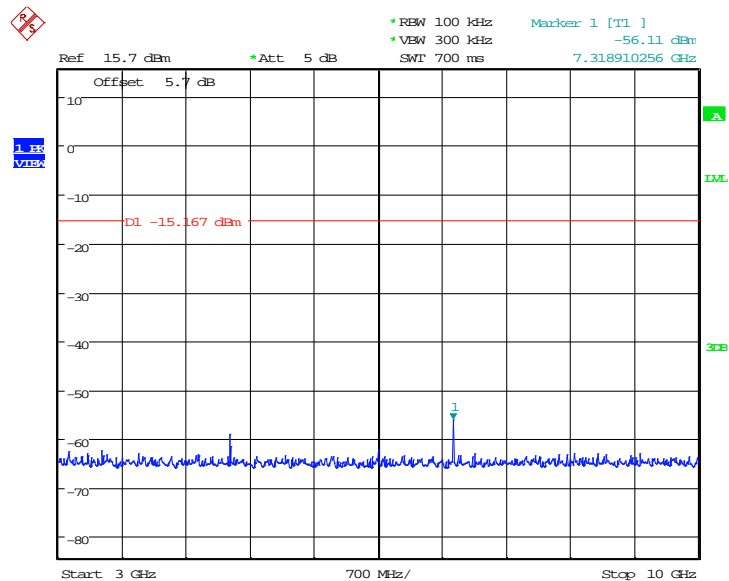


Date: 30.DEC.2014 09:17:24

Fig.11. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

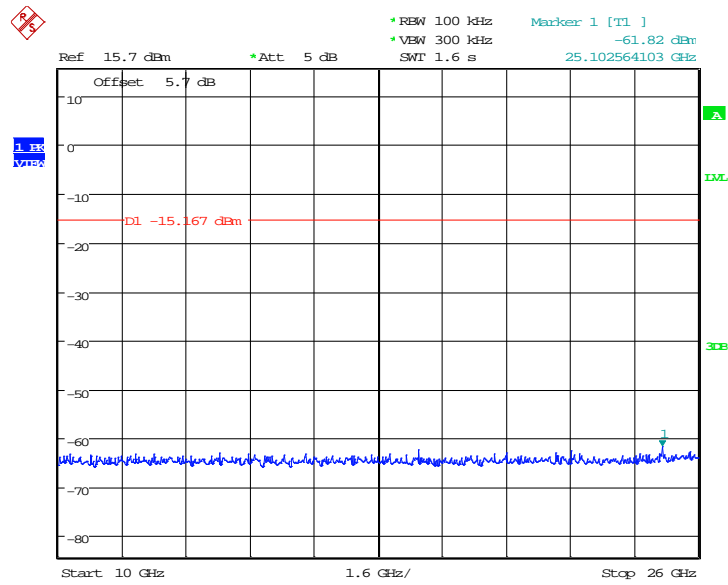


Date: 30.DEC.2014 09:17:41

Fig.12. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

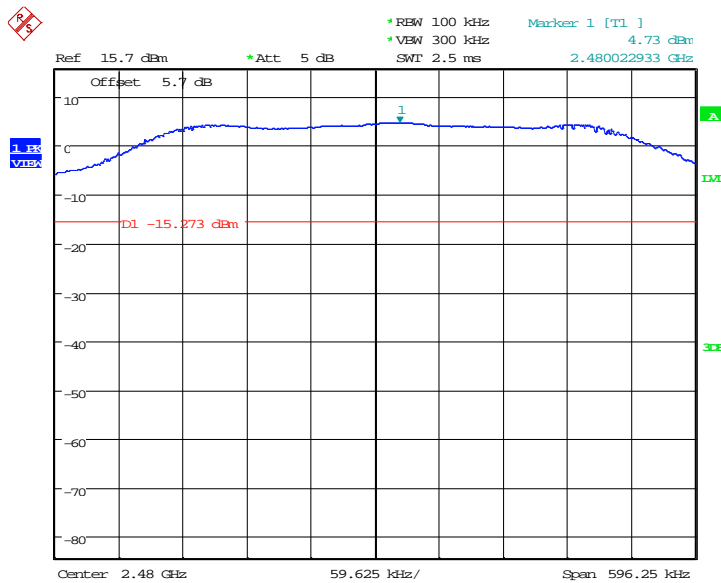


Date: 30.DEC.2014 09:19:30

Fig.13. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

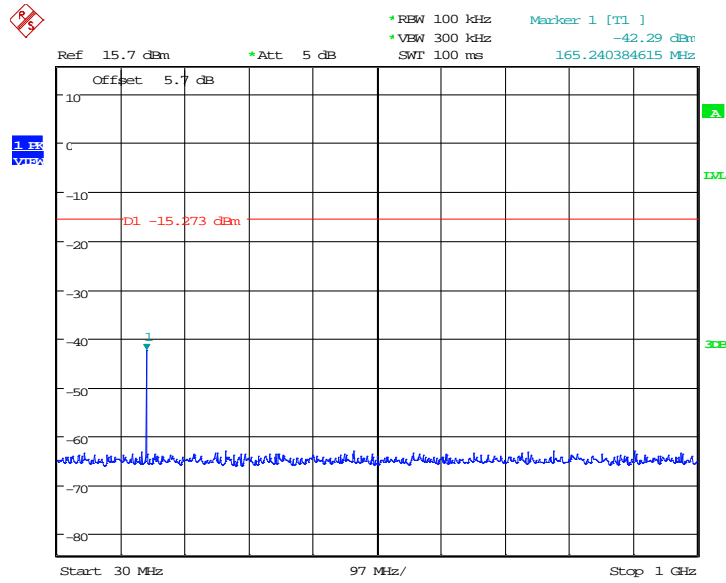


Date: 30.DEC.2014 09:19:47

Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

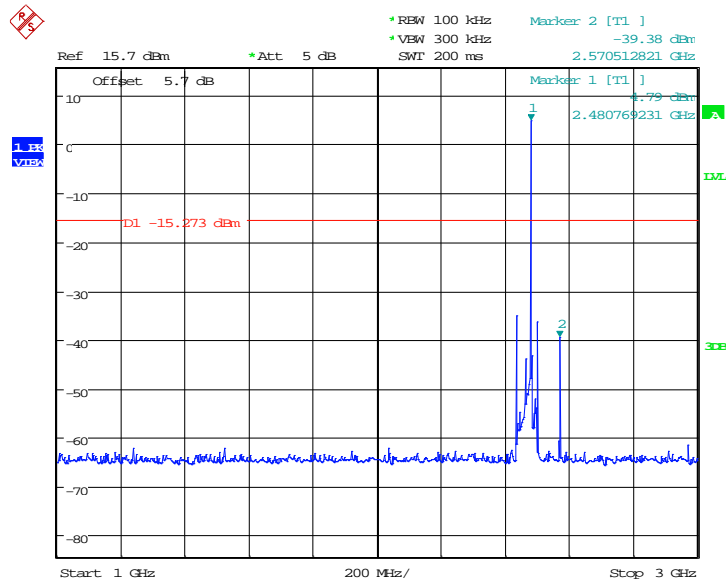


Date: 30.DEC.2014 09:20:18

Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

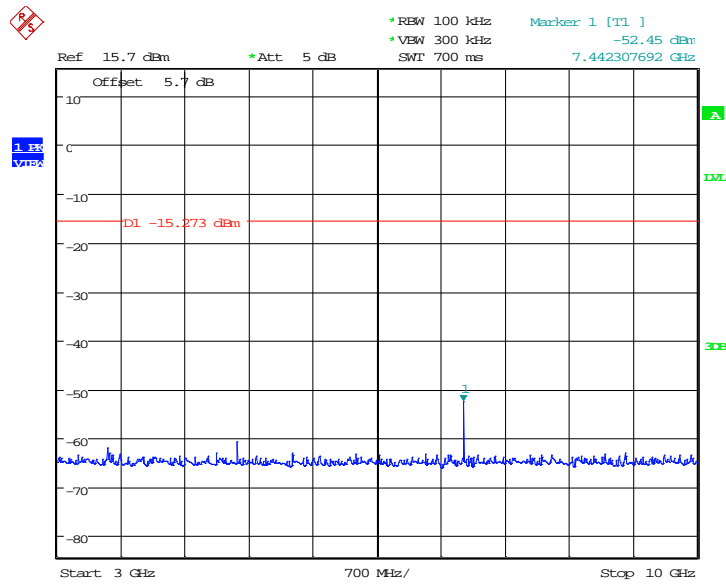

Date: 30.DEC.2014 09:20:35

Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

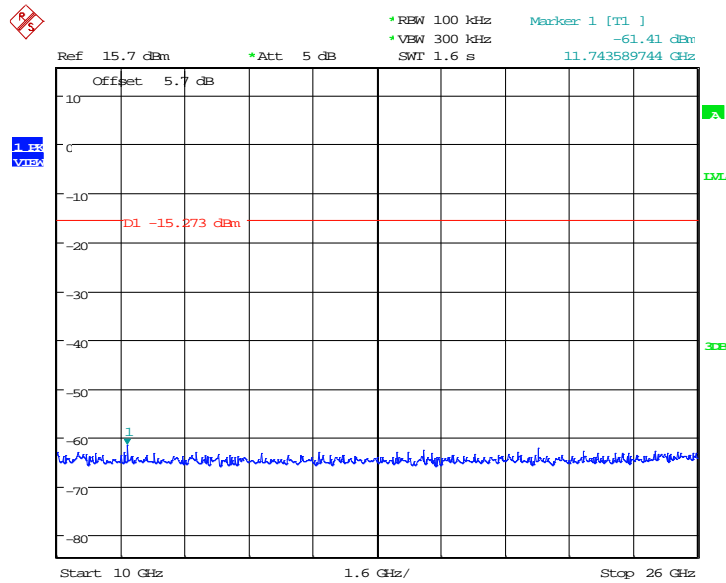

Date: 30.DEC.2014 09:20:52

Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

A.5. Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	1 GHz ~ 3 GHz	Fig.18	P
	3 GHz ~ 18 GHz	Fig.19	P
2441 MHz	9 kHz ~ 30 MHz	Fig.20	P
	30 MHz ~ 1 GHz	Fig.21	P
	1 GHz ~ 3 GHz	Fig.22	P
	3 GHz ~ 18 GHz	Fig.23	P



2480 MHz	1 GHz ~ 3 GHz	Fig.24	P
	3 GHz ~ 18 GHz	Fig.25	P
Power	2.38GHz~2.4GHz---L	Fig.26	P
Power	2.45GHz~2.5GHz---H	Fig.27	P
For all channels	18 GHz ~ 26.5 GHz	Fig.28	P

GFSK 2402MHz–Average

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2390.000	35.0	-11.1	46.100	H
17873.438	49.4	27.1	22.300	V
17875.313	49.3	27.1	22.200	V
17879.063	49.3	27.1	22.200	V
17902.500	49.3	27.1	22.200	H
17895.938	49.3	27.1	22.200	V

GFSK 2440MHz–Average

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
17892.188	49.3	27.1	22.200	H
17873.438	49.3	27.1	22.200	H
17894.063	49.3	27.1	22.200	V
17872.500	49.3	27.1	22.200	H
17890.313	49.3	27.1	22.200	V
17891.250	49.2	27.1	22.100	H

GFSK 2480MHz–Average

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2483.500	34.0	-11.2	45.200	V
17895.000	49.4	27.1	22.300	V
17893.125	49.3	27.1	22.200	H
17904.375	49.3	27.1	22.200	V
17891.250	49.3	27.1	22.200	H
17871.563	49.2	27.1	22.100	H

Conclusion: PASS

Test graphs as below:

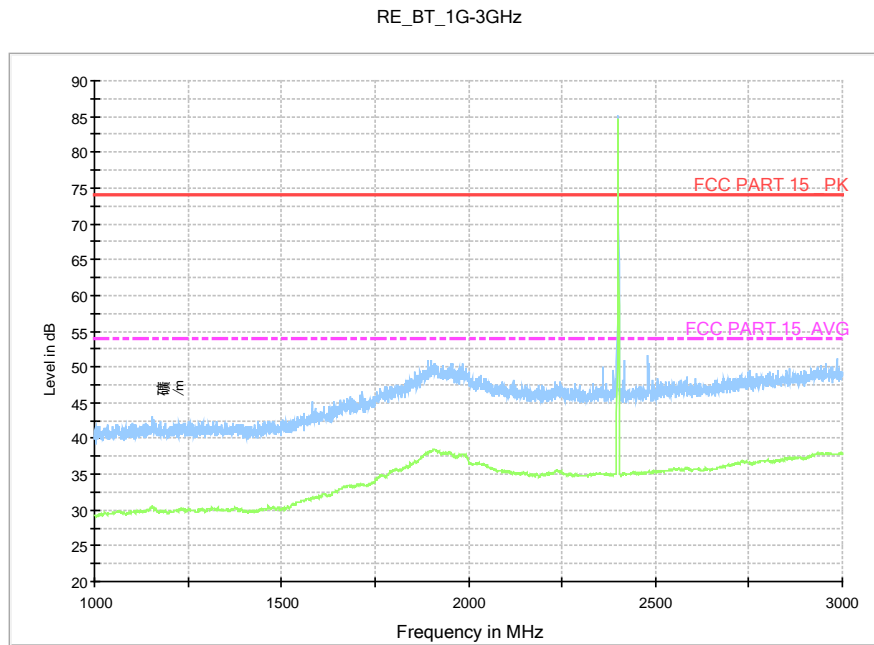


Fig.18. Transmitter Spurious Emission - Radiated: GFSK, 2402MHz, 1 GHz - 3GHz

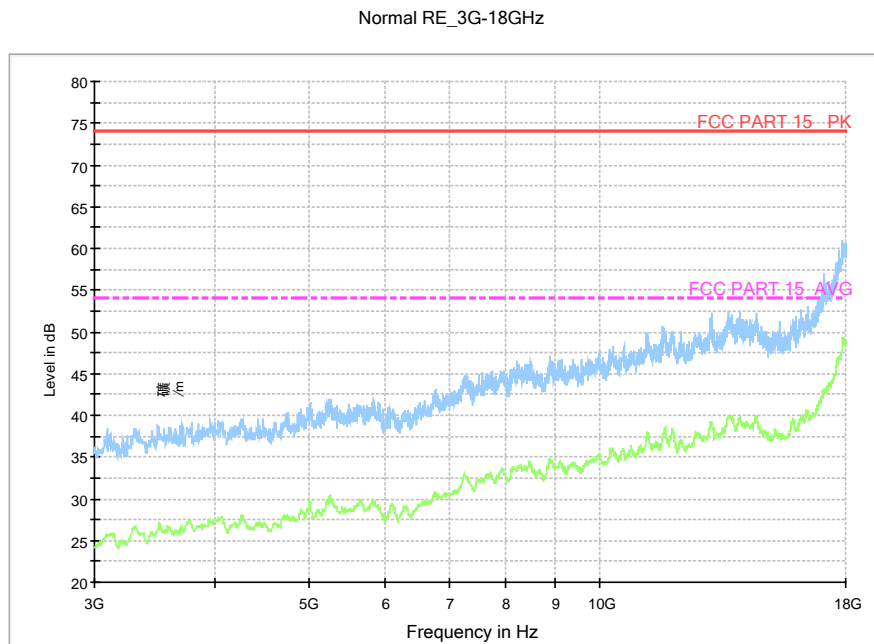


Fig.19. Transmitter Spurious Emission - Radiated: GFSK, 2402MHz, 3 GHz - 18 GHz

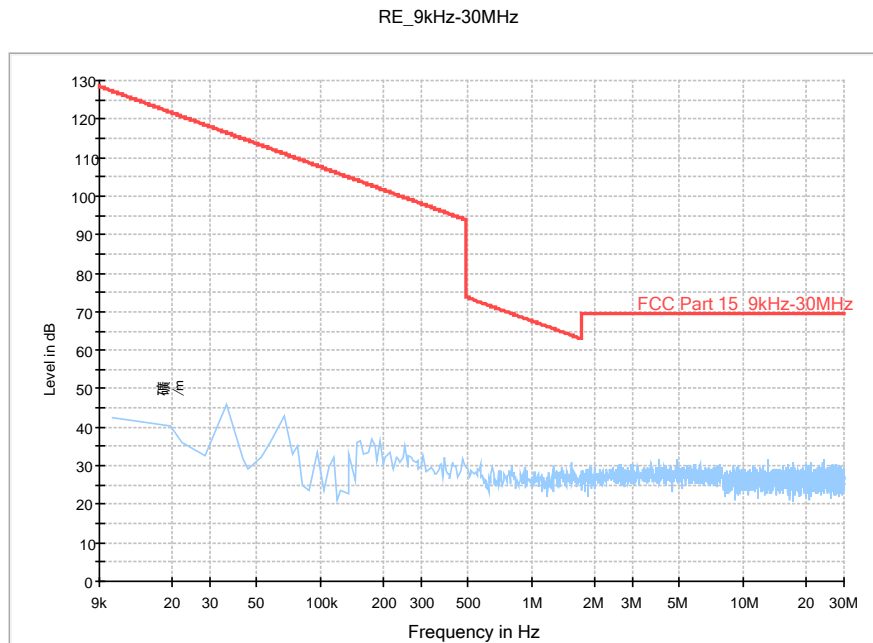


Fig.20. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 9 kHz - 30 MHz

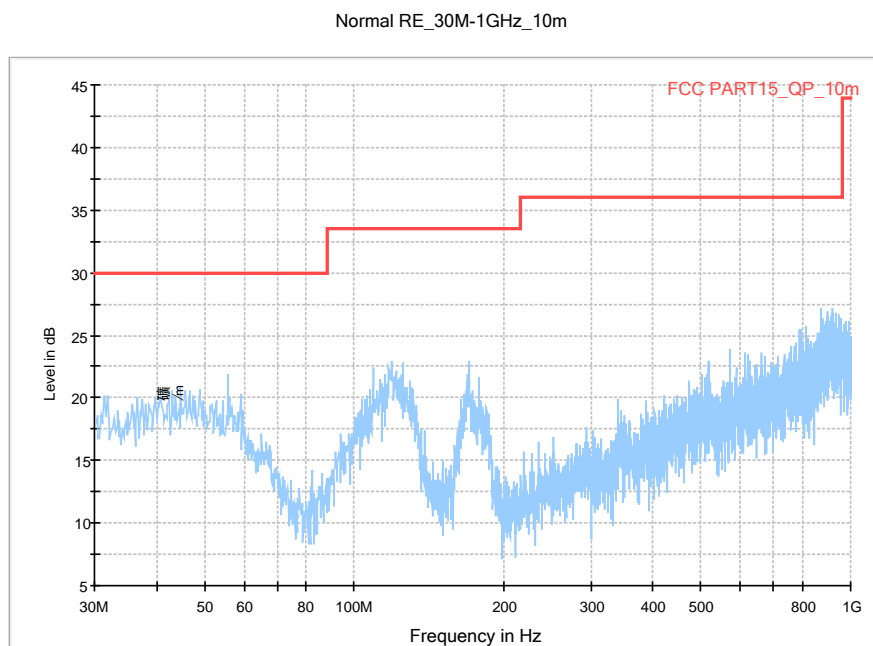


Fig.21. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 30 MHz - 1 GHz

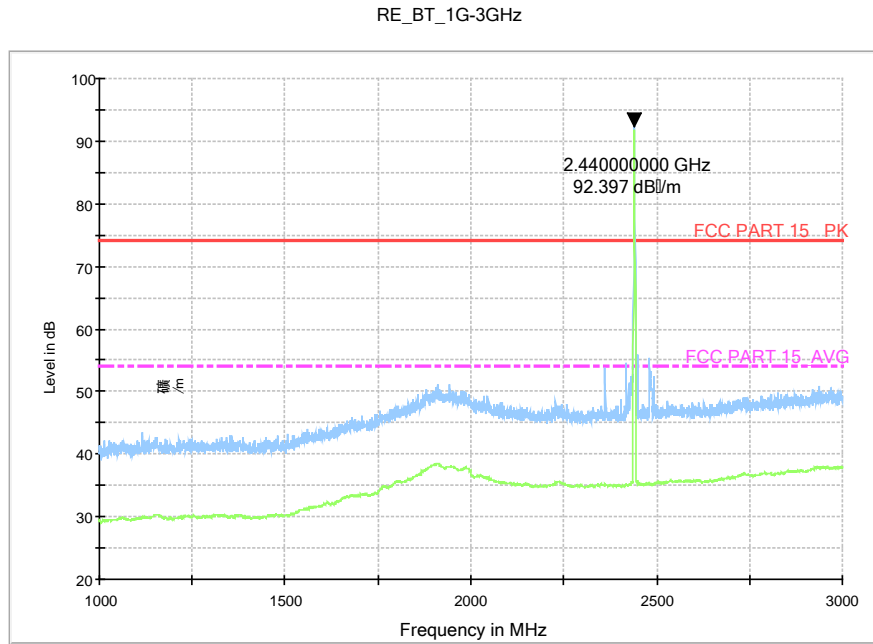


Fig.22. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 1 GHz - 3 GHz

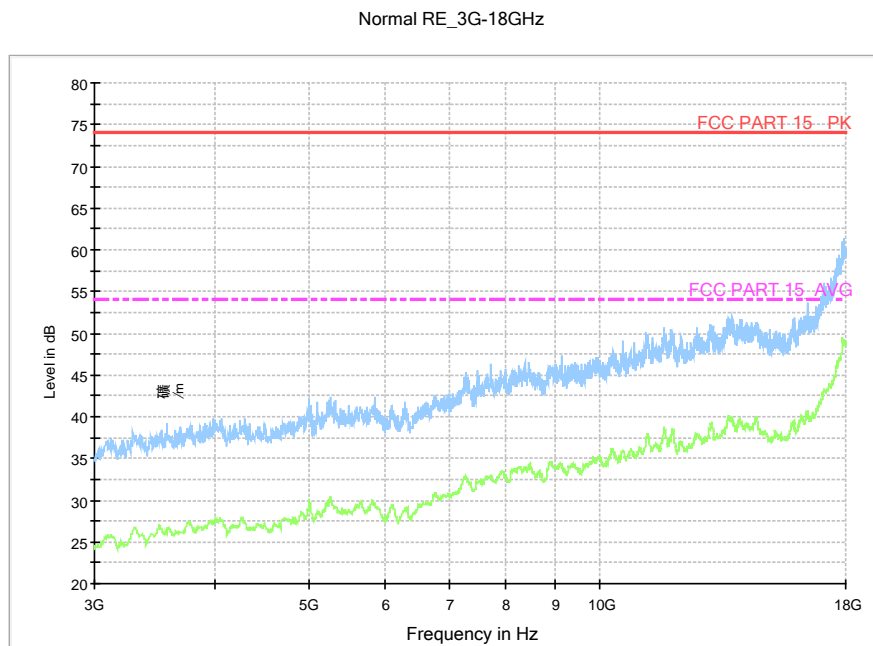


Fig.23. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 3 GHz - 18 GHz

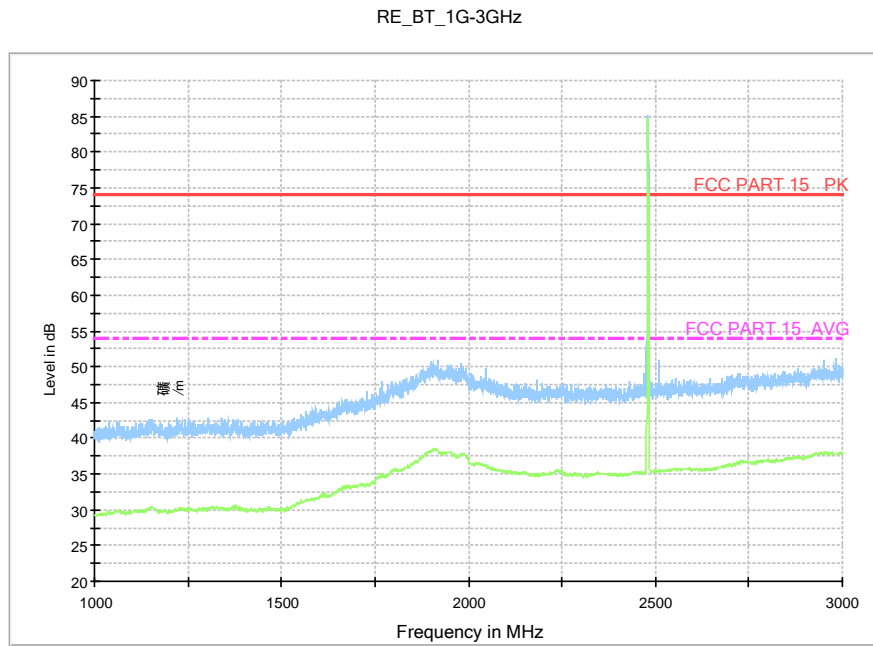


Fig.24. Transmitter Spurious Emission - Radiated: GFSK, 2480MHz, 1 GHz - 3 GHz

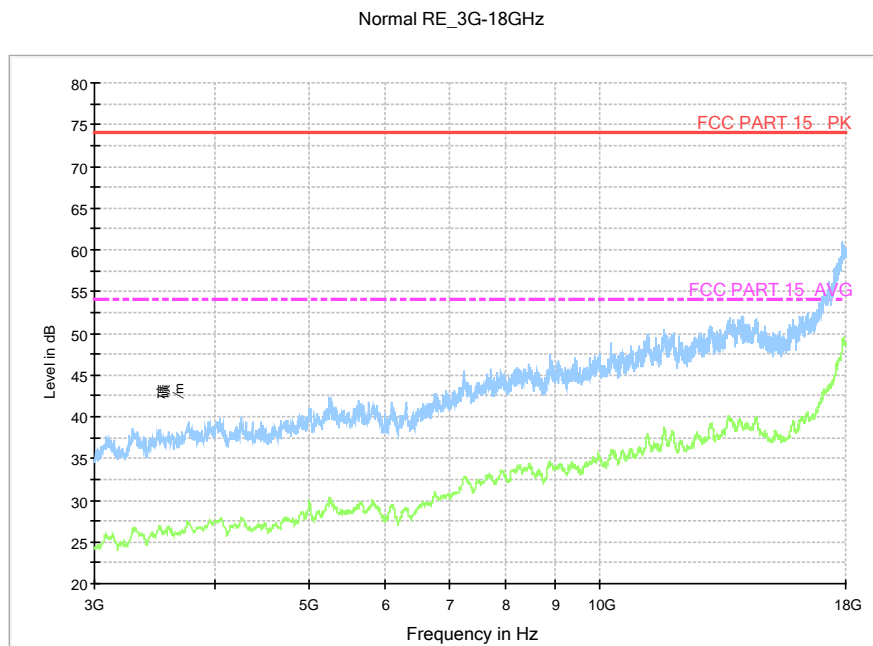


Fig.25. Transmitter Spurious Emission - Radiated: GFSK, 2480MHz, 3 GHz - 18 GHz

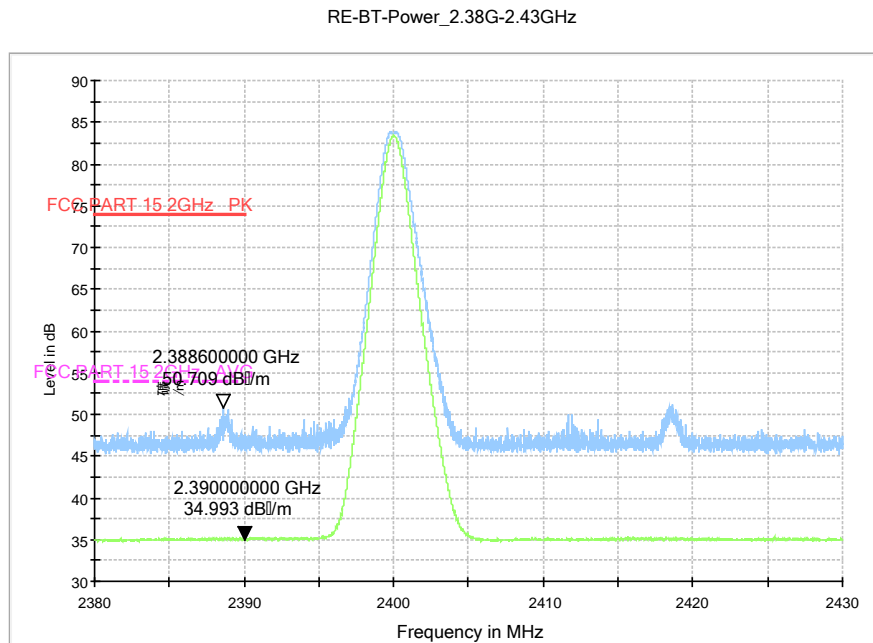


Fig.26. Transmitter Spurious Emission - Radiated (Power): GFSK low channel

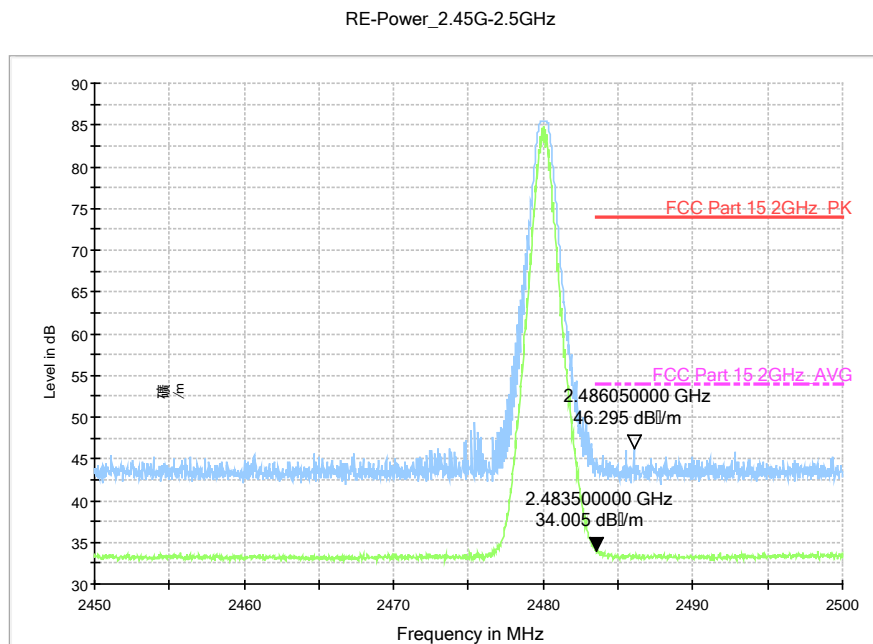


Fig.27. Transmitter Spurious Emission - Radiated (Power): GFSK high channel

Normal RE_18G-26.5GHz

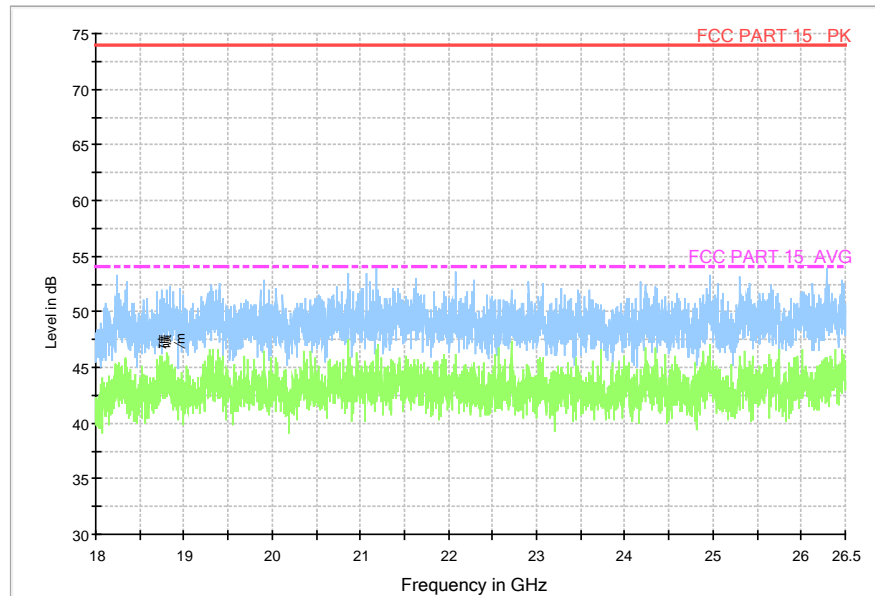


Fig.28. Transmitter Spurious Emission - Radiated: GFSK, 18 GHz - 26 GHz



A.6. 6dB Bandwidth

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$


Measurement Results:

For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.29	503.21	P
19	2440	Fig.30	503.21	P
39	2480	Fig.31	509.62	P


Conclusion: PASS

Test graphs as below:

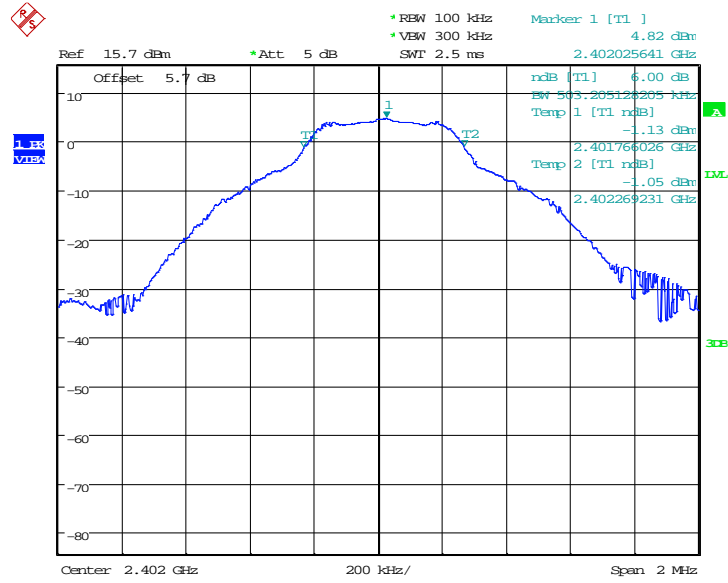


Date: 8.JAN.2015 15:32:17

Fig.29. 6dB Bandwidth: GFSK, 2402 MHz

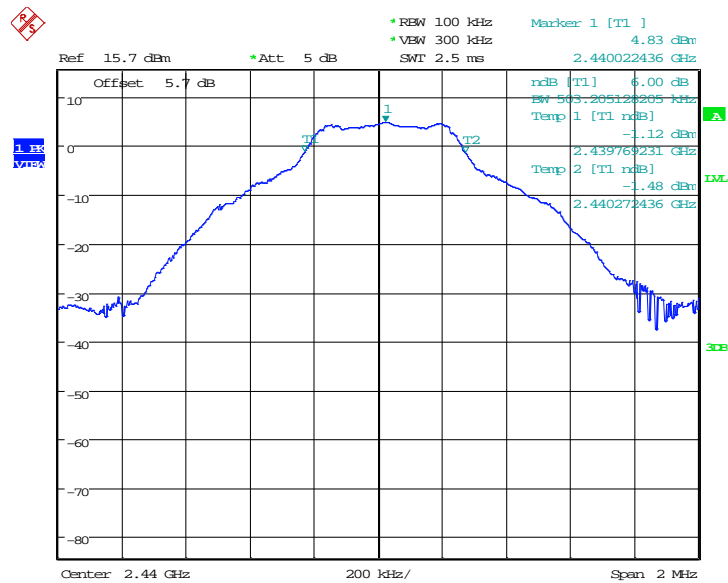

Date: 30.DEC.2014 09:15:33

Fig.30. 6dB Bandwidth: GFSK, 2440 MHz

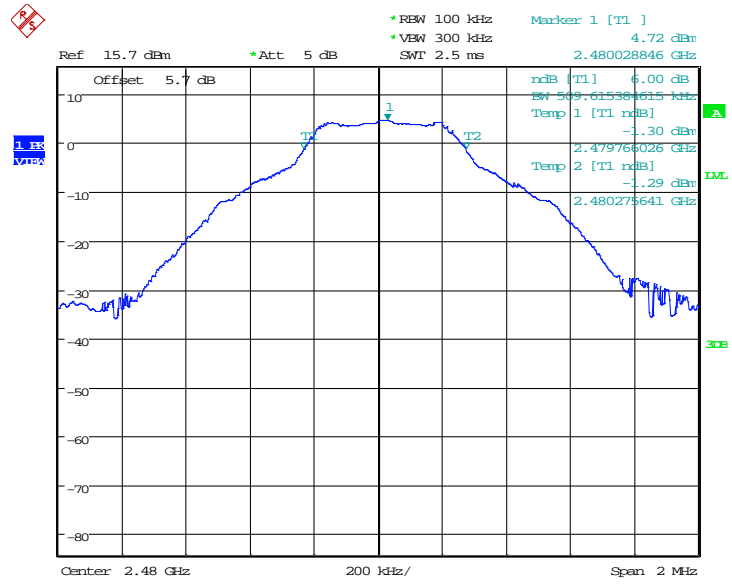

Date: 30.DEC.2014 09:18:44

Fig.31. 6dB Bandwidth: GFSK, 2480 MHz

A.7. Maximum Power Spectral Density Level

Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
9. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{kHz} = -15.2\text{ dB})$.

Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0\text{dBm}/3\text{kHz}$

Measurement Results:

For GFSK


Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm)		Conclusion
		Fig.	Level	
0	2402	Fig.32	-10.42	P
19	2440	Fig.33	-10.37	P
39	2480	Fig.34	-10.47	P

Test graphs as below:

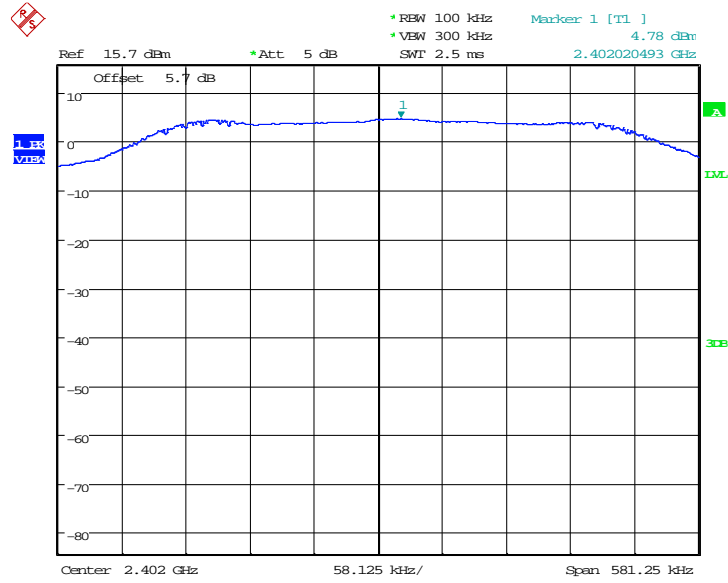


Date: 30.DEC.2014 09:22:30

Fig.32. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

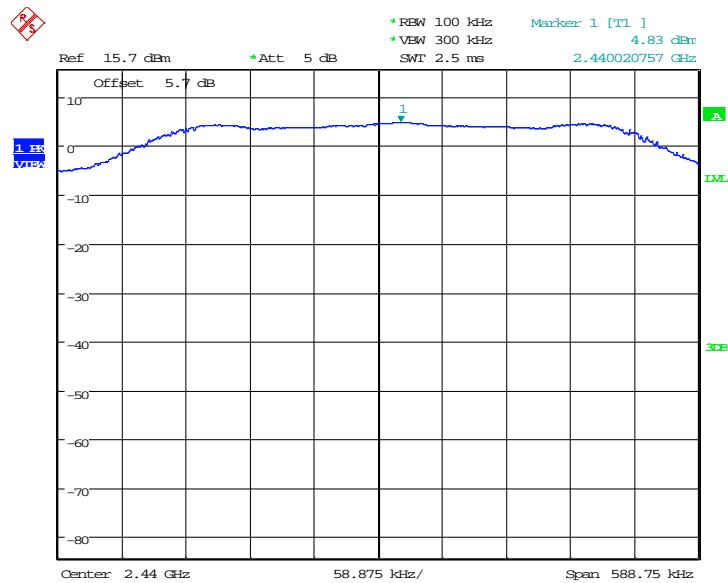

Date: 30.DEC.2014 09:16:01

Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

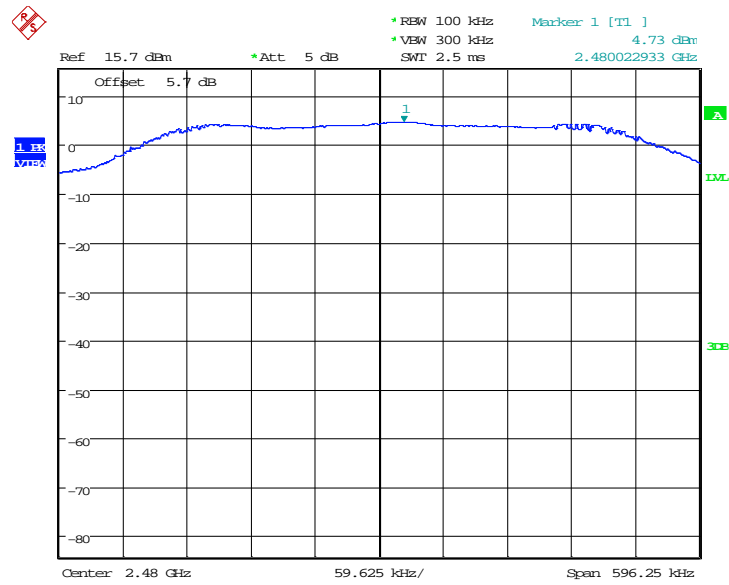

Date: 30.DEC.2014 09:19:12

Fig.34. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

A.8. 20dB Bandwidth

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	Bandwidth < 3/2 * Channel spacing

Measurement Condition:

RBW=100KHz; VBW=300KHz; SPAN = 2MHz; Detector:peak


Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
2402MHz	Fig.35.	1118.59	P
2440MHz	Fig.36.	1112.18	P
2480MHz	Fig.37.	1118.59	P


Conclusion:PASS

Test graphs as below:

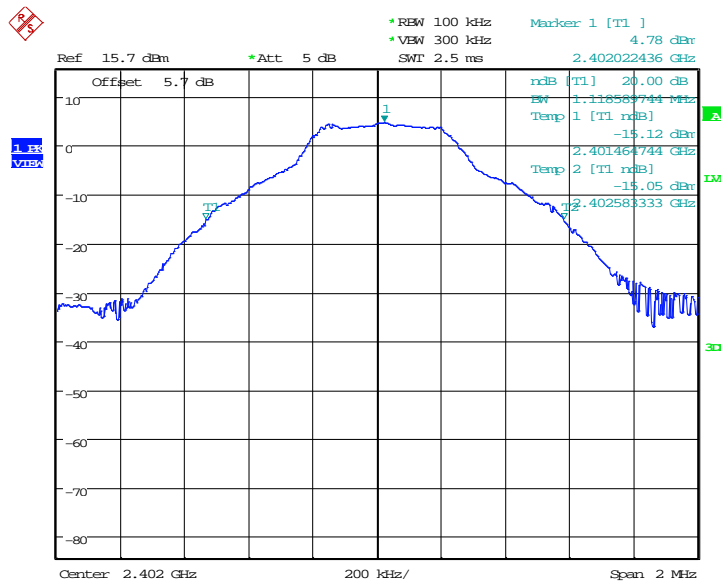


Date: 30.DEC.2014 09:24:42

Fig.35. 20dB Bandwidth: GFSK, 2402 MHz

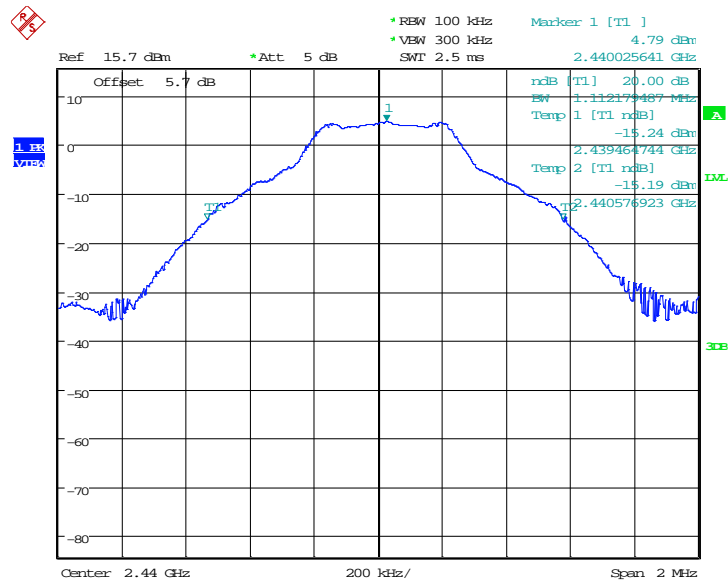

Date: 30.DEC.2014 09:17:56

Fig.36. 20dB Bandwidth: GFSK, 2440 MHz

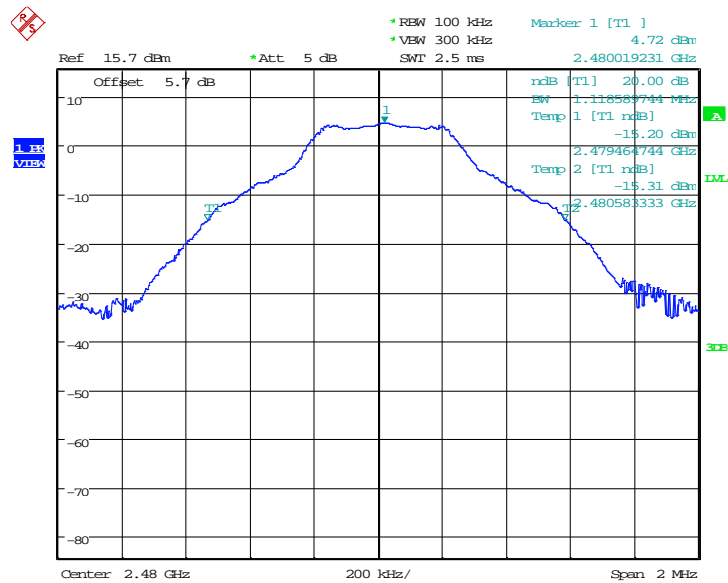

Date: 30.DEC.2014 09:21:24

Fig.37. 20dB Bandwidth: GFSK, 2480 MHz

A.9. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic:

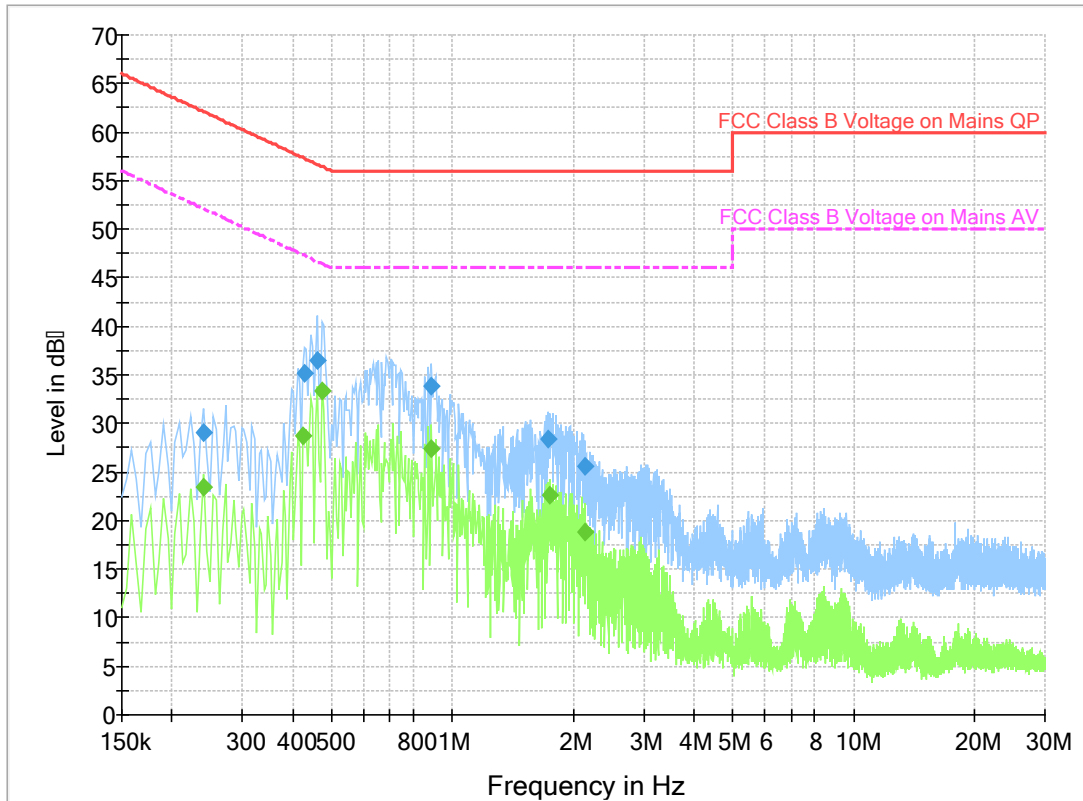


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.240000	29.1	2000.0	9.000	On	L1	19.8	33.0	62.1	
0.429000	35.1	2000.0	9.000	On	N	20.0	22.2	57.3	
0.460500	36.5	2000.0	9.000	On	N	20.0	20.2	56.7	
0.888000	33.8	2000.0	9.000	On	L1	19.8	22.2	56.0	
1.734000	28.3	2000.0	9.000	On	L1	19.7	27.7	56.0	
2.134500	25.7	2000.0	9.000	On	L1	19.7	30.3	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.240000	23.5	2000.0	9.000	On	L1	19.8	28.6	52.1	
0.424500	28.7	2000.0	9.000	On	L1	20.0	18.6	47.4	
0.474000	33.3	2000.0	9.000	On	L1	20.0	13.1	46.4	
0.888000	27.5	2000.0	9.000	On	L1	19.8	18.5	46.0	
1.752000	22.6	2000.0	9.000	On	L1	19.7	23.4	46.0	
2.134500	18.8	2000.0	9.000	On	L1	19.7	27.2	46.0	

Idle:

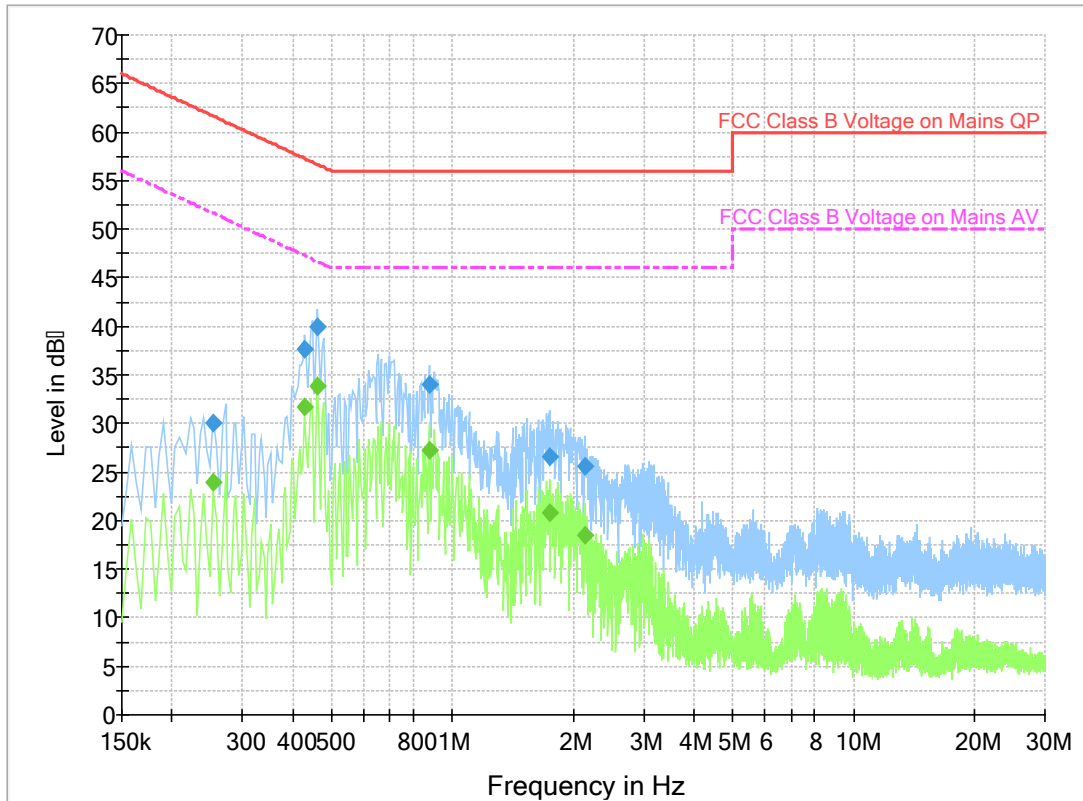

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.253500	30.1	2000.0	9.000	On	L1	19.8	31.6	61.6	
0.429000	37.6	2000.0	9.000	On	L1	20.0	19.6	57.3	
0.460500	39.9	2000.0	9.000	On	L1	20.0	16.8	56.7	
0.874500	34.1	2000.0	9.000	On	L1	19.8	21.9	56.0	
1.747500	26.7	2000.0	9.000	On	L1	19.7	29.3	56.0	
2.139000	25.6	2000.0	9.000	On	L1	19.7	30.4	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.253500	24.0	2000.0	9.000	On	L1	19.8	27.6	51.6	
0.429000	31.8	2000.0	9.000	On	L1	20.0	15.5	47.3	
0.460500	33.8	2000.0	9.000	On	L1	20.0	12.9	46.7	
0.874500	27.2	2000.0	9.000	On	L1	19.8	18.8	46.0	
1.747500	20.8	2000.0	9.000	On	L1	19.7	25.2	46.0	
2.139000	18.5	2000.0	9.000	On	L1	19.7	27.5	46.0	

A.10 Receiver Radiation Emission

Reference

FCC: CFR Part 15.109, 2.1053

A.10.1 Method of Measurement

The measurement procedure in ANSI C63.10-2009 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.10.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

A. 10.3 Measurement results

IF bandwidth: 120 kHz

Idle Mode: 30MHz-1GHz


Normal RE_30M-1GHz_10m

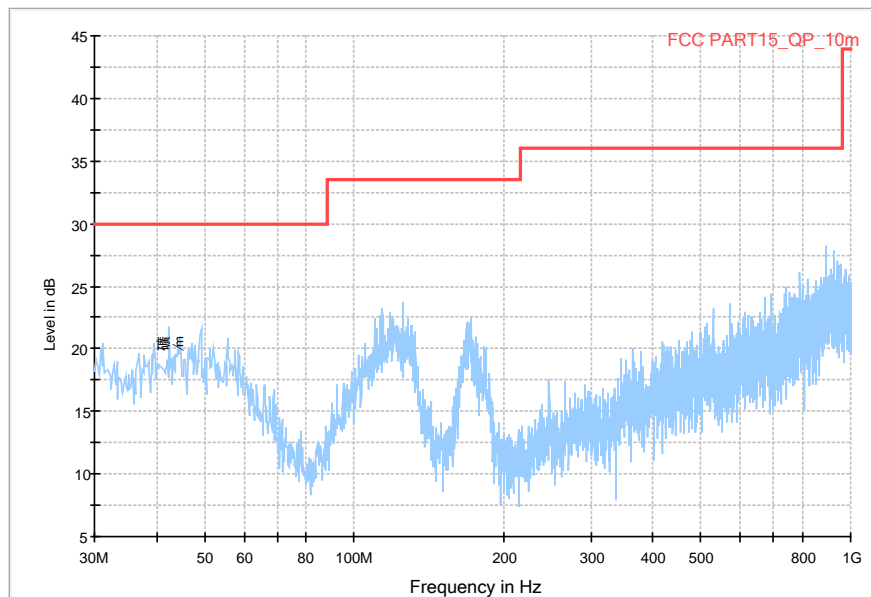

RBW / VBW 1 MHz

Idle Mode: 1GHz-3GHz


RE_BT_1G-3GHz

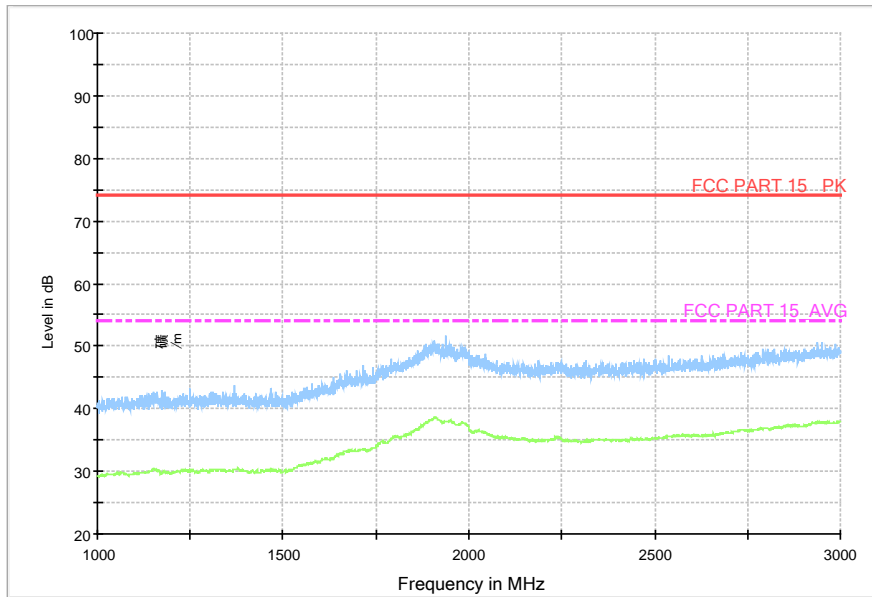

RBW / VBW 1 MHz

Idle Mode: 3GHz-18GHz

Normal RE_3G-18GHz

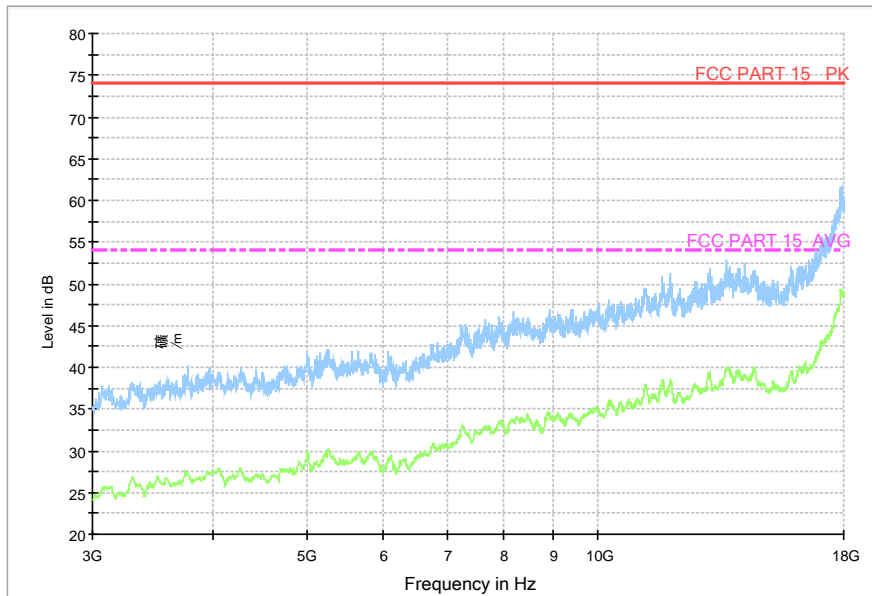

ANNEX B: Accreditation Certificate

 
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(No. CNAS L0570)
Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT <u>No.52, Huayuan North Road, Haidian District, Beijing, China</u> <u>No.51, Xueyuan Road, Haidian District, Beijing, China</u>
<i>to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.</i>
<i>The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.</i>
Date of Issue: 2014-10-29 Date of Expiry: 2017-06-19 Date of Initial Accreditation: 1998-07-03

Signed on behalf of China National Accreditation Service for Conformity Assessment
<small>China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).</small>
No.CNAS AL 2 0011149

END OF REPORT