

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-9100

Telefax: -9075

RSC14

issue test report consist of 57 Pages

Page 1 (57)



TTI-P-G 166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2_2637-01-01/01
FCC Part 15.247 / CANADA RSS-210
Bluetooth Chatpen Type 8404005

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 9075

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telefone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Harro.Ames@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G 166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Sony Ericsson Mobile Communications AB
Street : Nya vattentorget
City : SE-221 88 Lund
Country : Sweden
Telephone : +46 46 193 242
Telefax : +46 46 193 295
Contact : **Mr. Bo Johansson**
Telephone : +46 46 193 242

1.4 Application details

Date of receipt of application : 05.11.01
Date of receipt of test item : 05.11.01
Date of test : 06.-15.11.01

1.5 Test item

Type of equipment : **Bluetooth device**
Type designation : **Bluetooth Chatpen Type 8404005**
Manufacturer : applicant
Street :
City :
Country :
Hardware / Software : IrmaB (BB Controller ROP 101 1112/C with LM FW P11 and P13)
and the PBA 313 ½ and/or ROK 101 002/1 Radio

Additional informations: :

Frequency : 2402 – 2480 MHz
Type of modulation : 1M00FXD / 79M8FXD (FHSS)
Number of channels : 79
Antenna : integral antenna
Power supply : 3,6V accu
Output power : EIRP: 0.537 mW
Type of equipment : Temperature range : -10°C - +55°C

1.6 Test standards: **FCC Part 15 §15.247**
CANADA RSS-210

2 Technical test

2.1 Summary of test results

The radiated measurements were performed vertically and horizontal

The antenna gain measurement was performed by the difference between conducted and radiated output measurement.

All measurement settings are according to FCC 15.35, 15.205, 15.209, 15.247 and the „Measurement guidelines for FHSS systems“.

The product fulfills also the requirements for CANACA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Final verdict : PASS

Technical responsibility for area of testing :

21.11.01 RSC 8411 Berg M.

Date

Section

Name

Signature



Technical responsibility for area of testing :


21.11.01 RSC8412 Hausknecht D.

Date

Section

Name

Signature



2.2 Testreport

TEST REPORT

Testreport no. : 2_2637-01-01/01

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

Paragraph	PARAMETER TO BE MEASURED	PAGE
	Transmitter parameters	
§ 15.204	Antenna gain	7
§ 15.247 (a)	Carrier frequency separation	8
§ 15.247 (a)	Number of hopping channels	9
§ 15.247 (a)	Time of occupancy (dwell time)	11
§ 15.247 (d)	Power spectral density (Inquiry/Page mode)	14
§ 15.247 (a)(1)	Spectrum bandwidth of a FHSS System	15
§ 15.247 (b)(2)	Maximum peak output power	19
§15.247	Band edge compliance	21
§ 15.247 (c)(1)	Emission limitations	29
	Receiver parameters	
§ 15.209	Spurious radiations - Radiated	42
§ 15.207	Conducted EMISSIONS	47
	Test equipment listing	49
	Photographs of the equipment	51

Test report nr.: 2_2637-01-01/01 Issue Date: 19.11.2001 Page 7 (57)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Antenna Gain

SUBCLAUSE § 15.204

The gain is -2.0 dBi

Manufacturer declaration

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

-


Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Carrier frequency separation

§15.247(a)

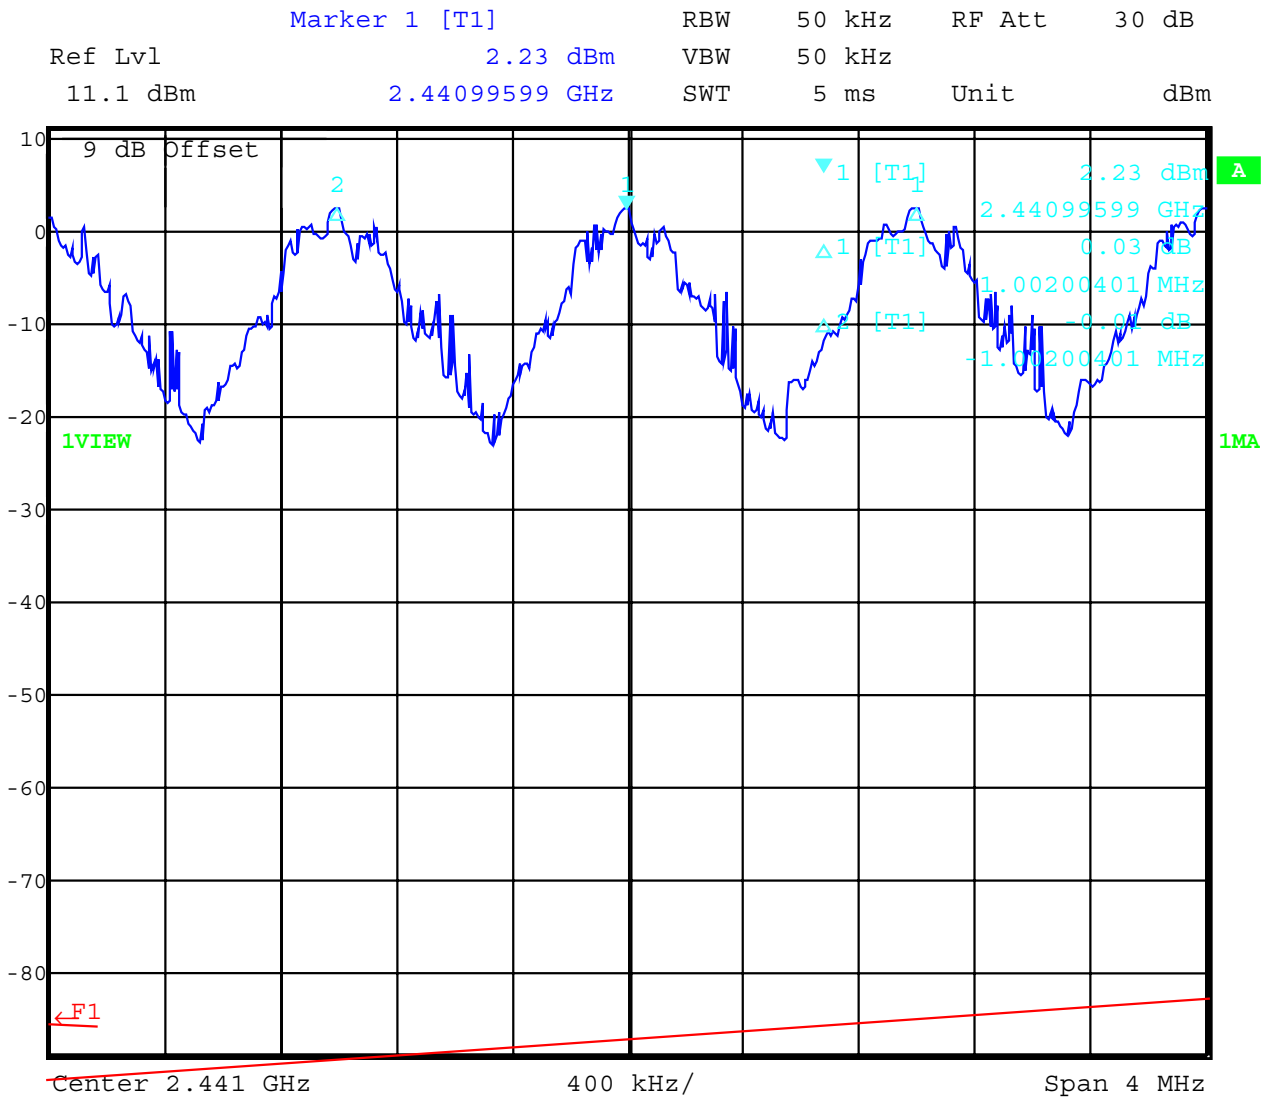

Date: 13.NOV.2001 08:55:19

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C


Relative humidity : 27%

Number of hopping channels

§15.247(a)

Channel 1 - 40

Ref Lvl	11.1 dBm	Marker 2 [T1]	2.10 dBm	RBW	50 kHz	RF Att	30 dB
			2.44100000 GHz	VBW	50 kHz		
				SWT	50 ms	Unit	dBm

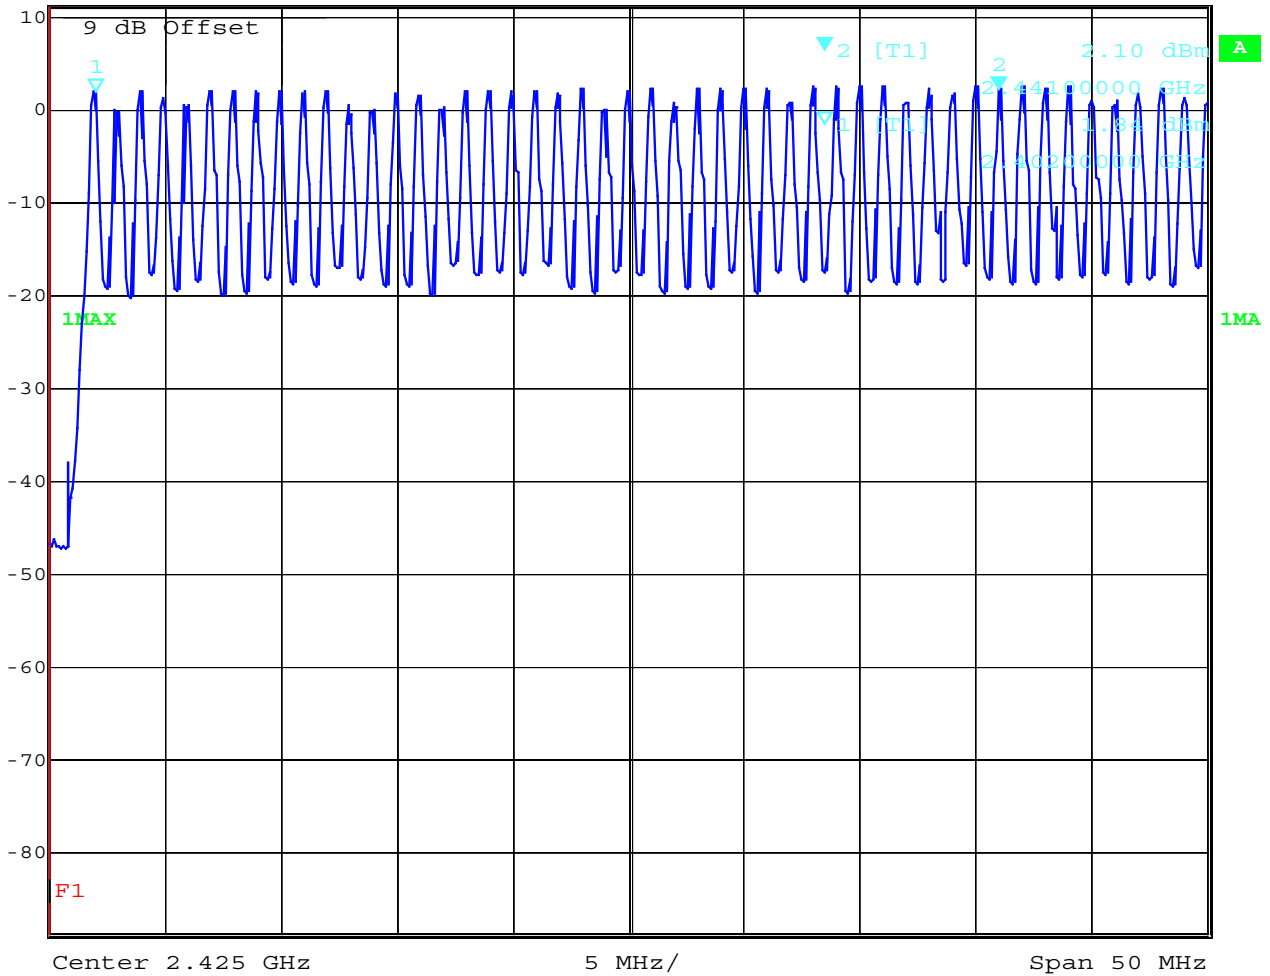

Date: 13.NOV.2001 08:58:47

The number of hopping channels is 79.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005


Ambient temperature : 23,6°C

Relative humidity : 27%

Number of hopping channels

Channel 41 - 79

§15.247(a)

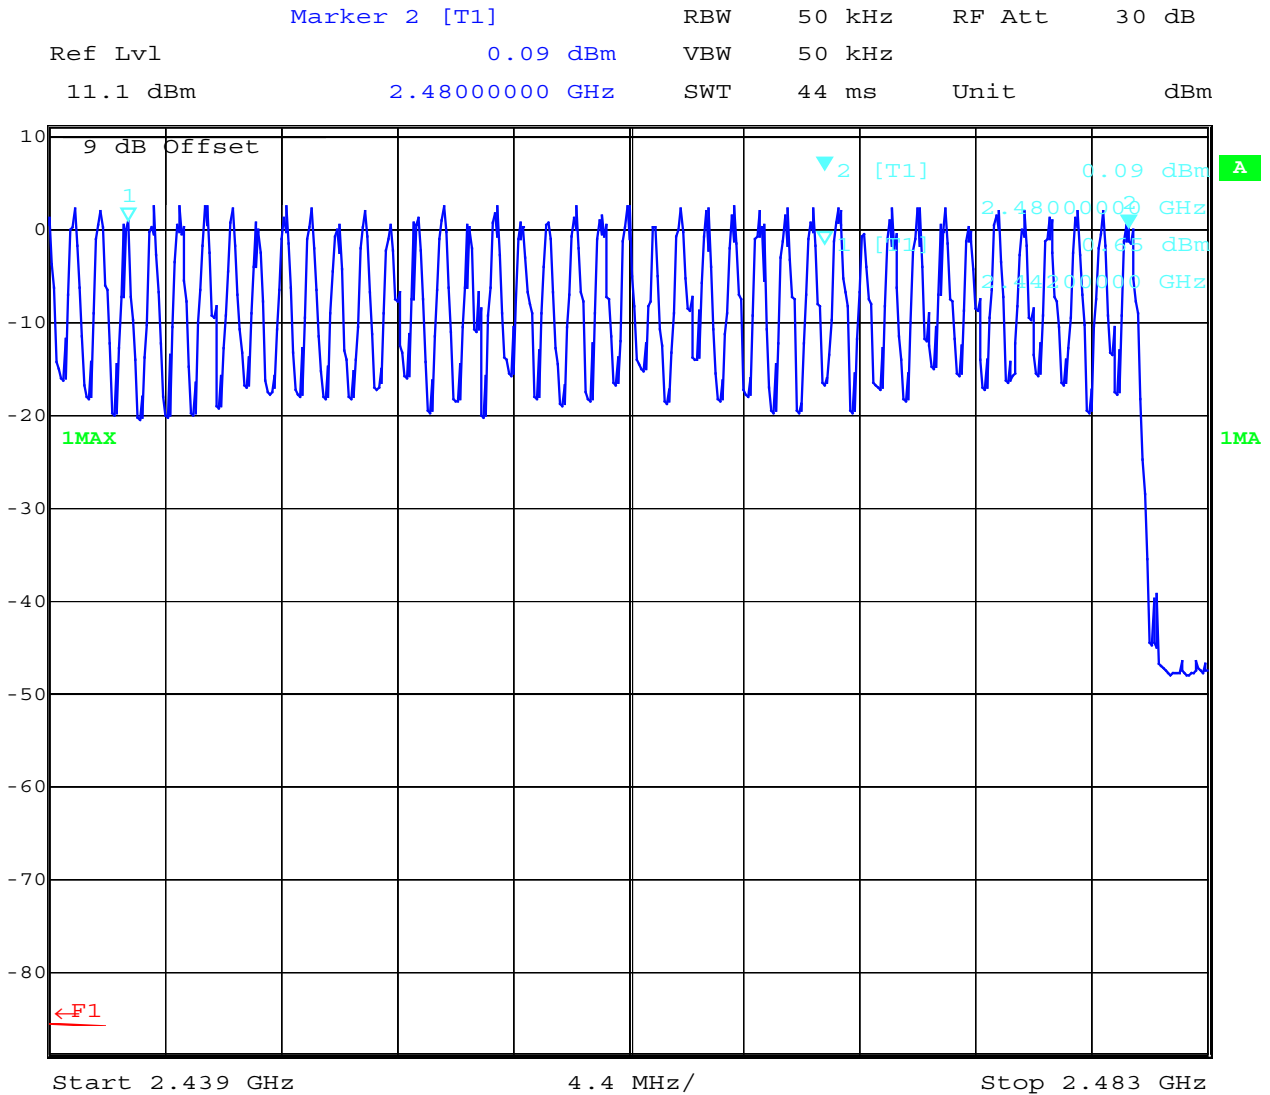

Date: 13.NOV.2001 09:01:13

The number of hopping channels is 79.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%


Time of occupancy (dwell time) for DH1 §15.247(a)

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and for 30 seconds you have 303.9 times of appearance .

Each tx-time per appearance is 472.224 µs.

So we have 303.9 * 472.224 µs = 143.509 ms per 30 seconds.

	Marker 3 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	1.10 dBm	VBW	1 MHz		
9 dBm	1.250902 ms	SWT	2 ms	Unit	dBm

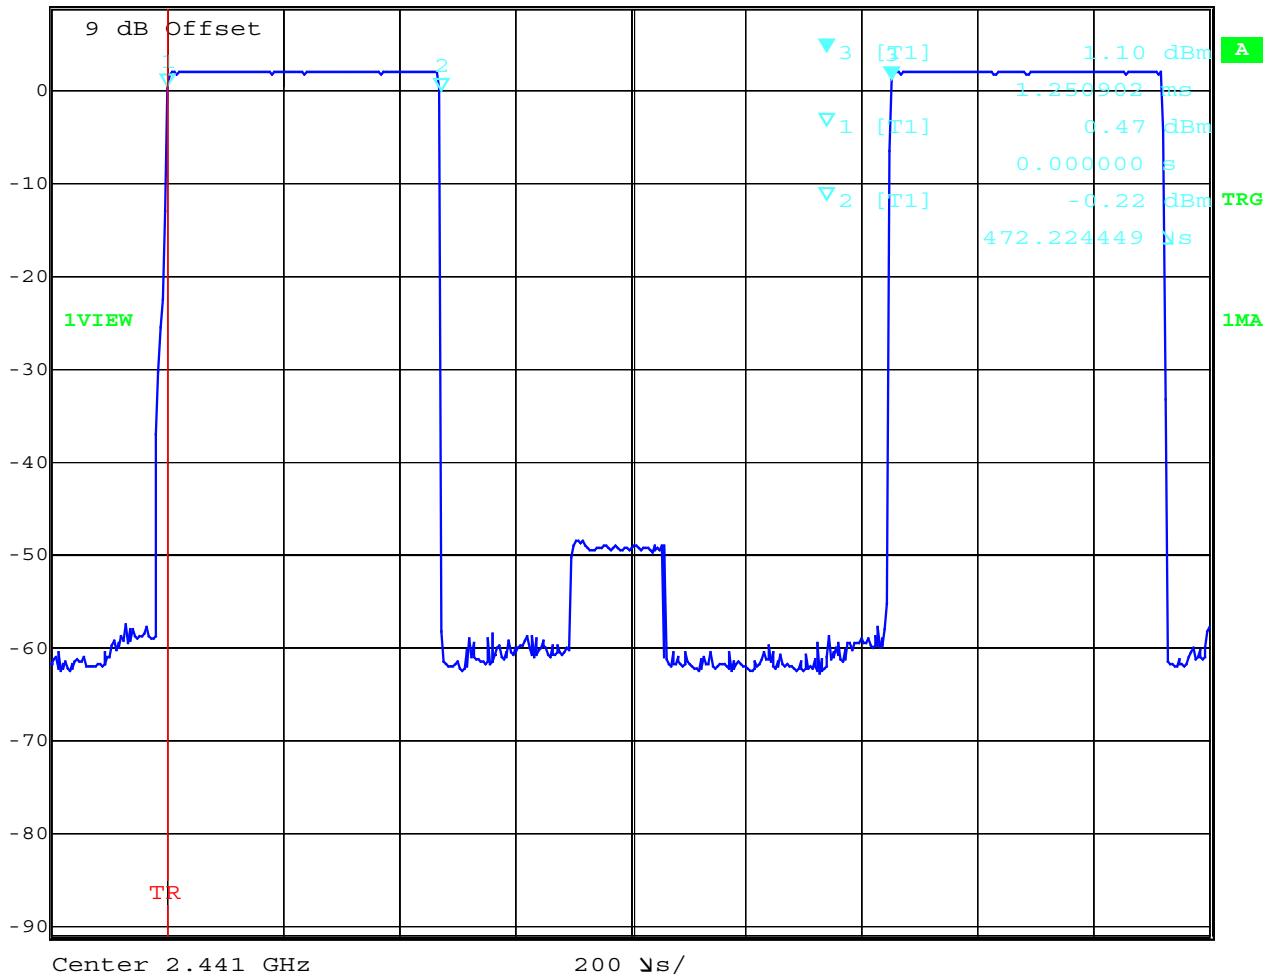

Date: 13.NOV.2001 09:09:09


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

Time of occupancy (dwell time) for page mode /Inquiry mode (TX-on time) §15.247(a)
 At paging mode the system makes first hopping with 16 channels. One sequence(called train A) lasts 10 ms. Every 1.28s frequencies change and a second train A starts with different frequencies. After max 7*1.28 s 16 new more distance frequencies (Train B) are used. So we have in the worst case (same frequency is in every train) the following time scedule. First: 7*128*10ms. For the next 7 seconds train B with other frequencies. Then train A and B changes frequently.
 ⇒ so we have 7*128*176.784µs, then 8.96 s other frequencies, then again 7*128*176.784µs
 ⇒ together in 30 s maximal 2 sequences =>maximal 0.317 s per 30 second period.

Page mode (TX-on time) / Inquiry mode (TX-on time)

	Delta 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	0.00 dB	VBW	1 MHz	
	5 dBm	176.783567 µs	SWT	1 ms	Unit dBm

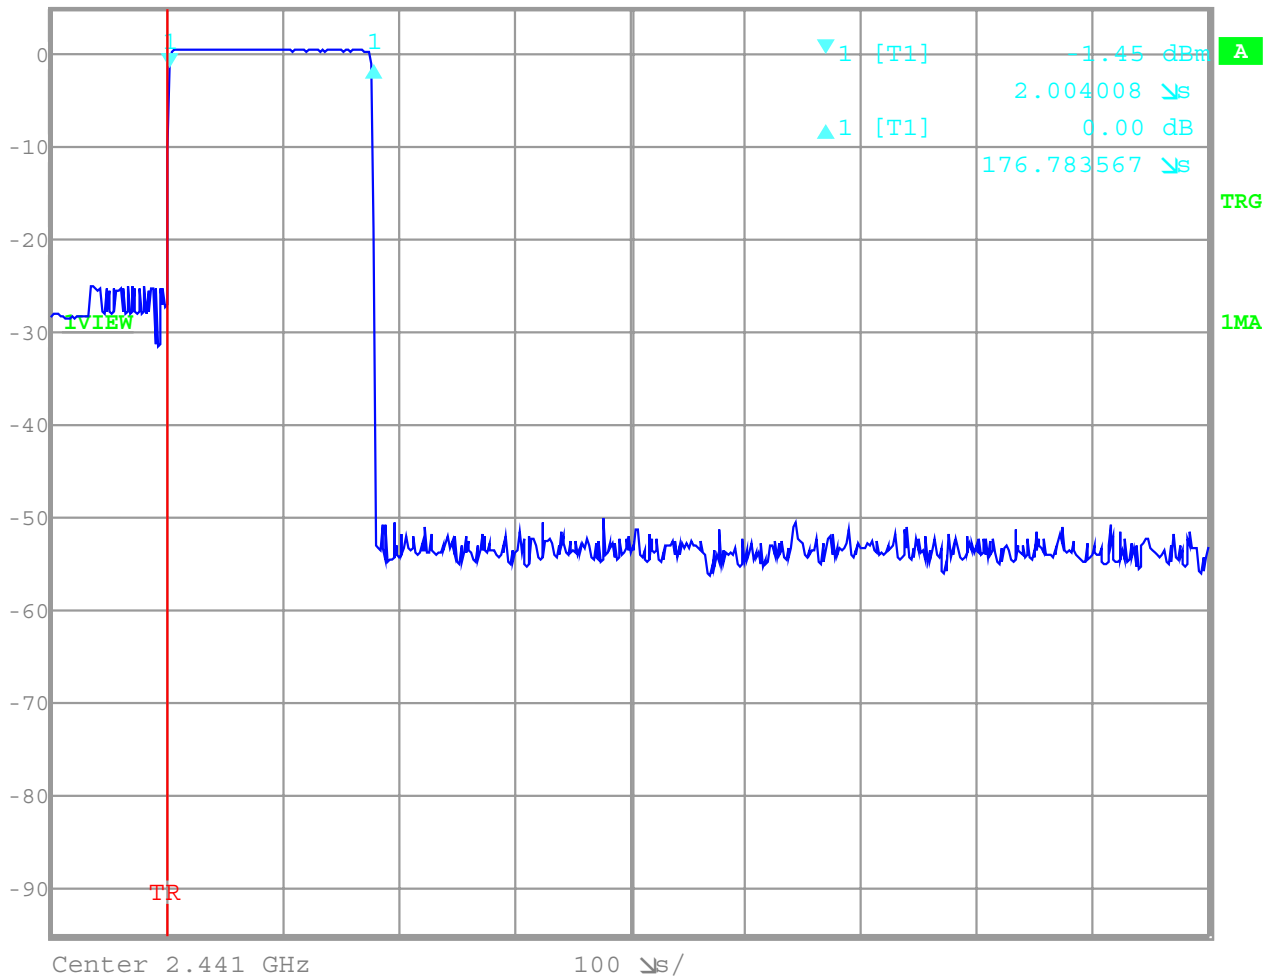

Date: 14.NOV.2001 11:48:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Page mode (complete sequence) / Inquiry mode (complete sequence)

	Delta 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	0.00 dB	VBW	1 MHz	
	5 dBm	10.036503 ms	SWT	20 ms	Unit dBm

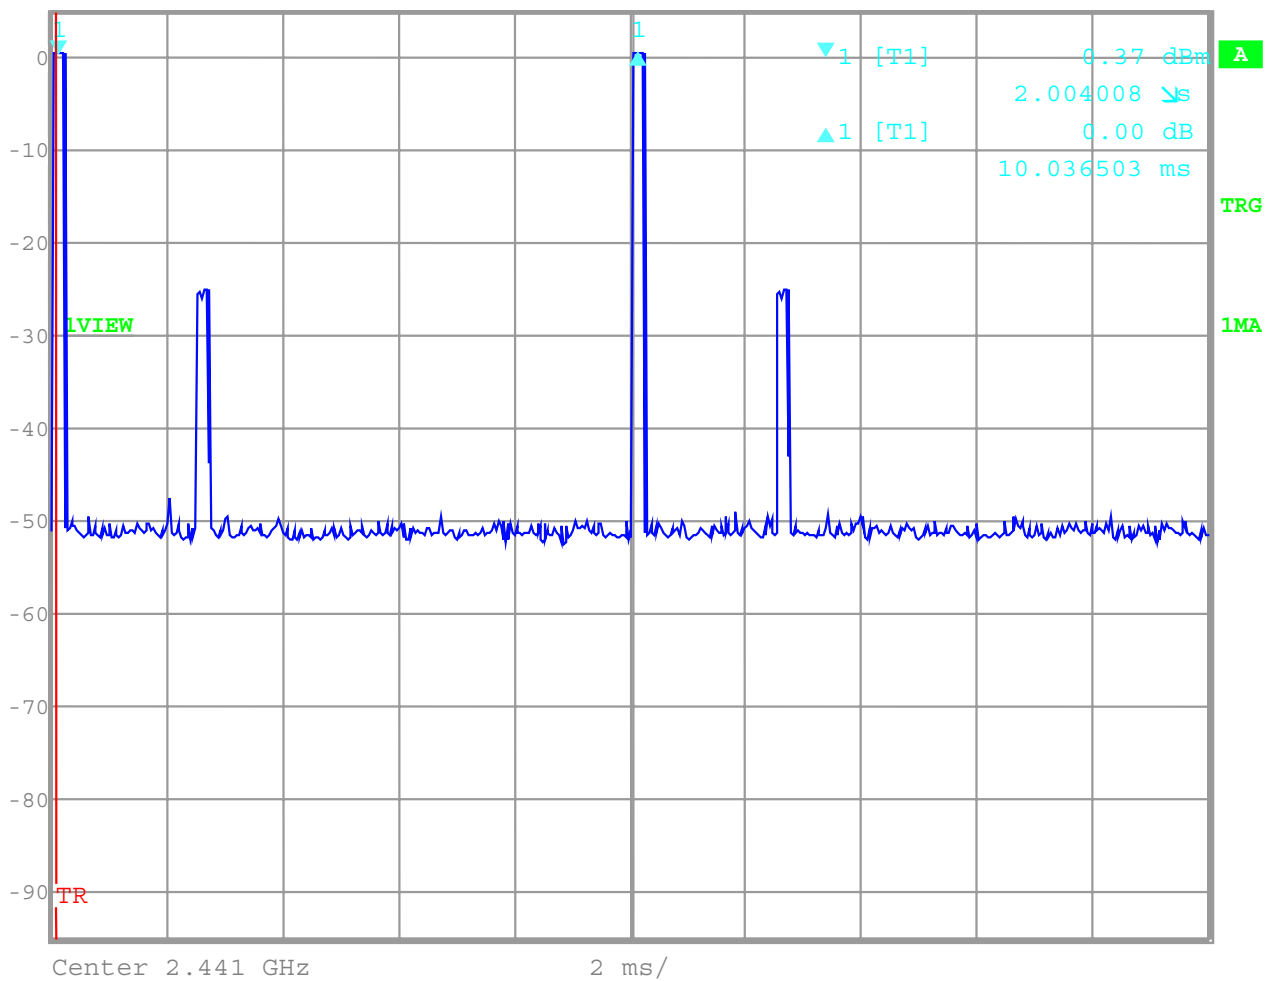

Date: 14.NOV.2001 11:41:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005


Ambient temperature : 23,6°C

Relative humidity : 27%

Power Spectral density (Hybrid system in Inquiry mode / Page scan)

§15.247(d)

	Ref Lvl	Marker 1 [T1 NOI]	RBW	3 kHz	RF Att	30 dB
	5 dBm	-51.87 dBm/Hz	VBW	3 kHz		
		2.44099248 GHz	SWT	420 ms	Unit	dBm

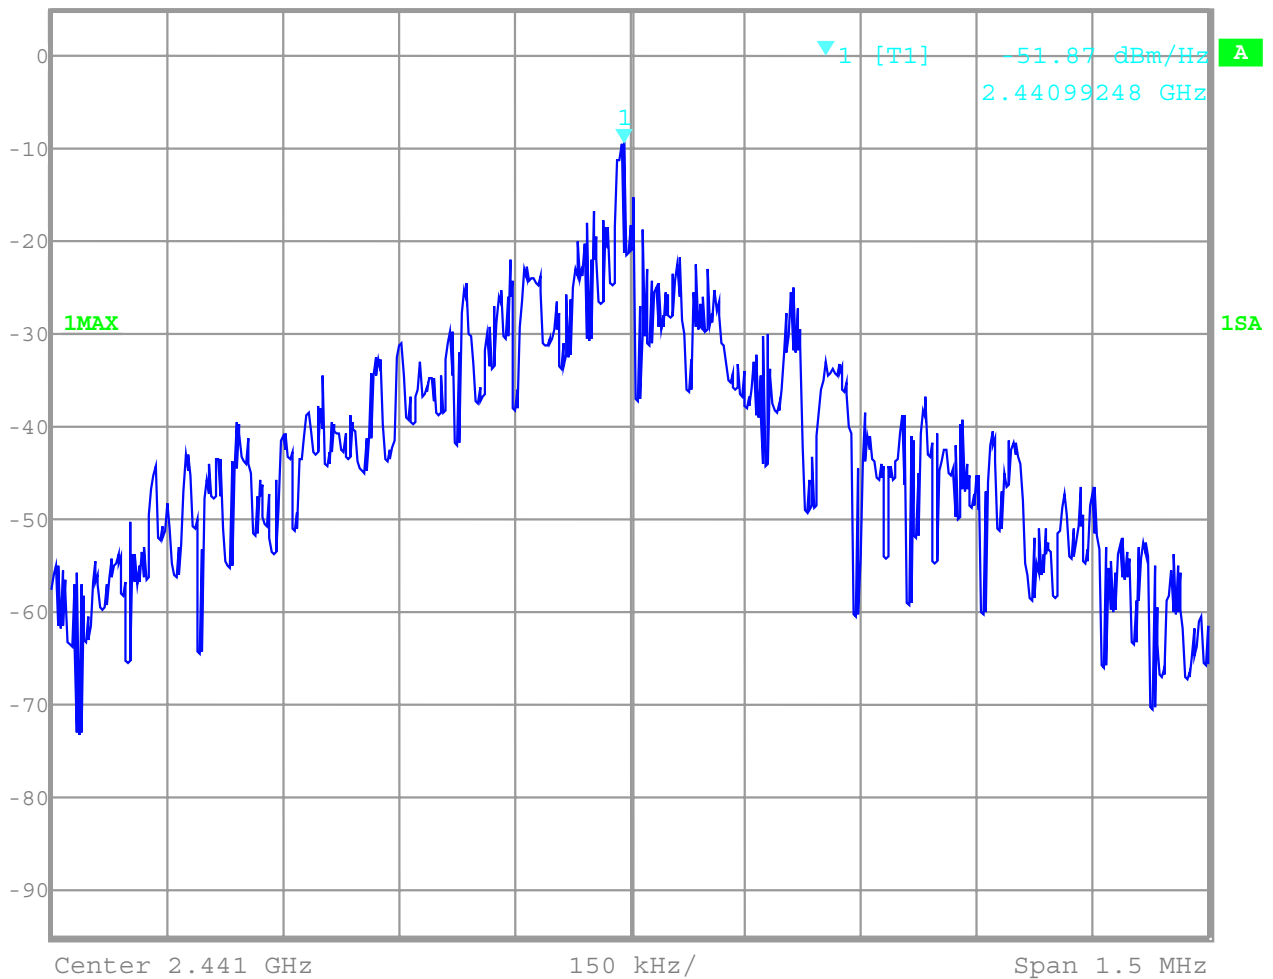

Date: 14.NoV.2001 12:54:05

Power density : -51.87 dBm/Hz = -17.07 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

Spectrum Bandwidth of a FHSS System

§15.247(a)

20 dB bandwidth

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
		2402	2441	2480
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} (3,6)V	673.34	729.459	741.483
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

LIMIT

SUBCLAUSE §15.247(a) (1)

The maximum 20dB bandwidth shall be at maximum 1000 KHz


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

Spectrum Bandwith of a FHSS System
20 dB bandwidth

§15.247(a)

Channel 1

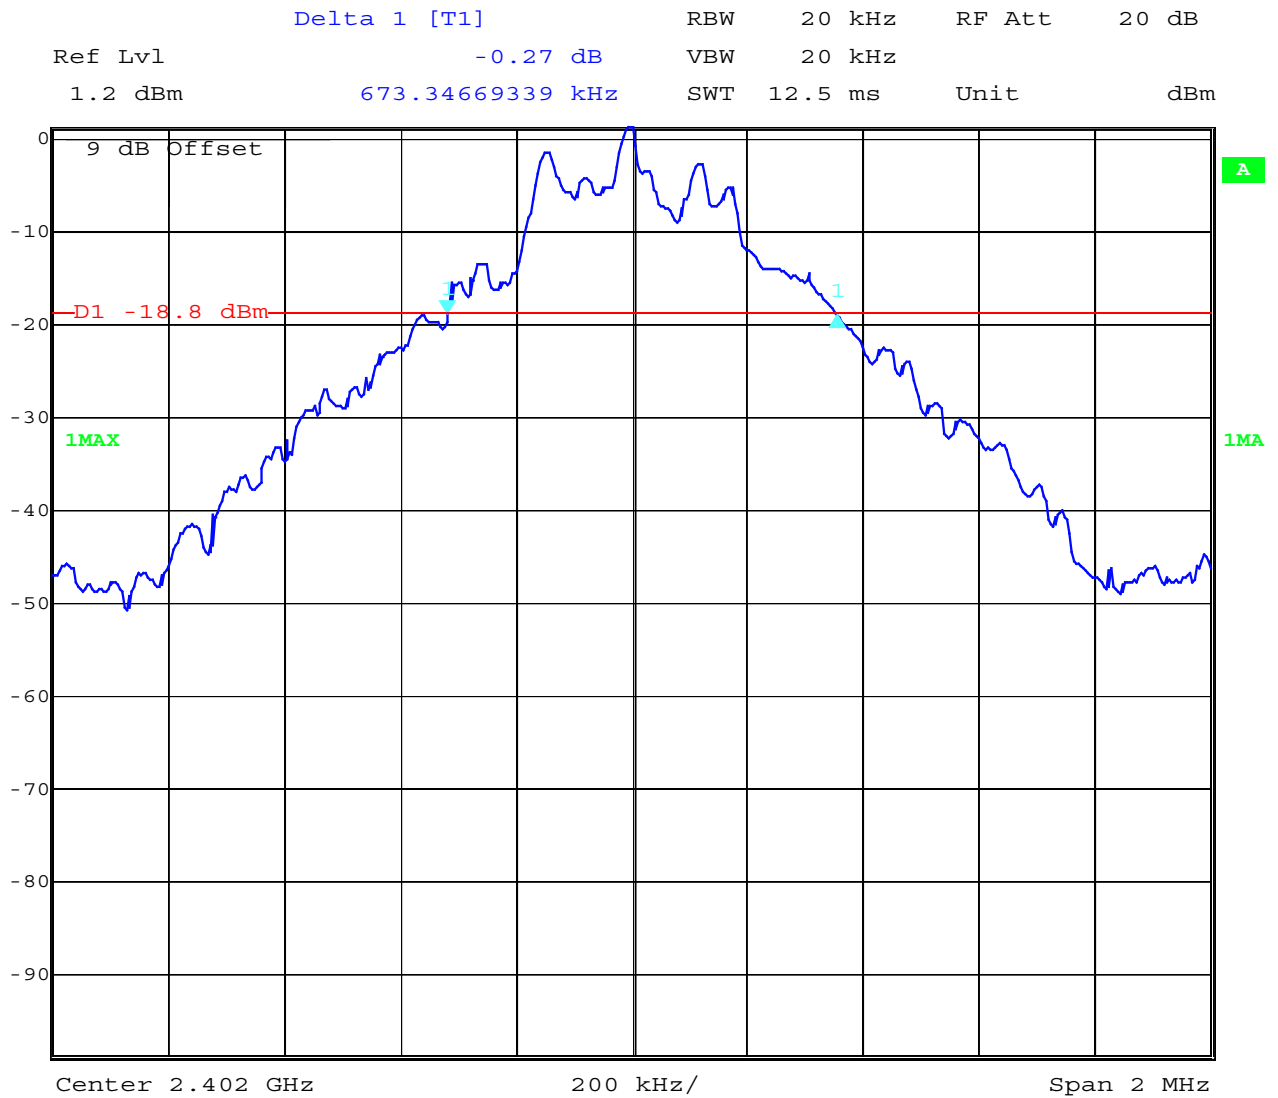

Date: 13.NOV.2001 08:08:59


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

**Spectrum Bandwidth of a FHSS System
 20 dB bandwidth**

§15.247(a)

Channel 2

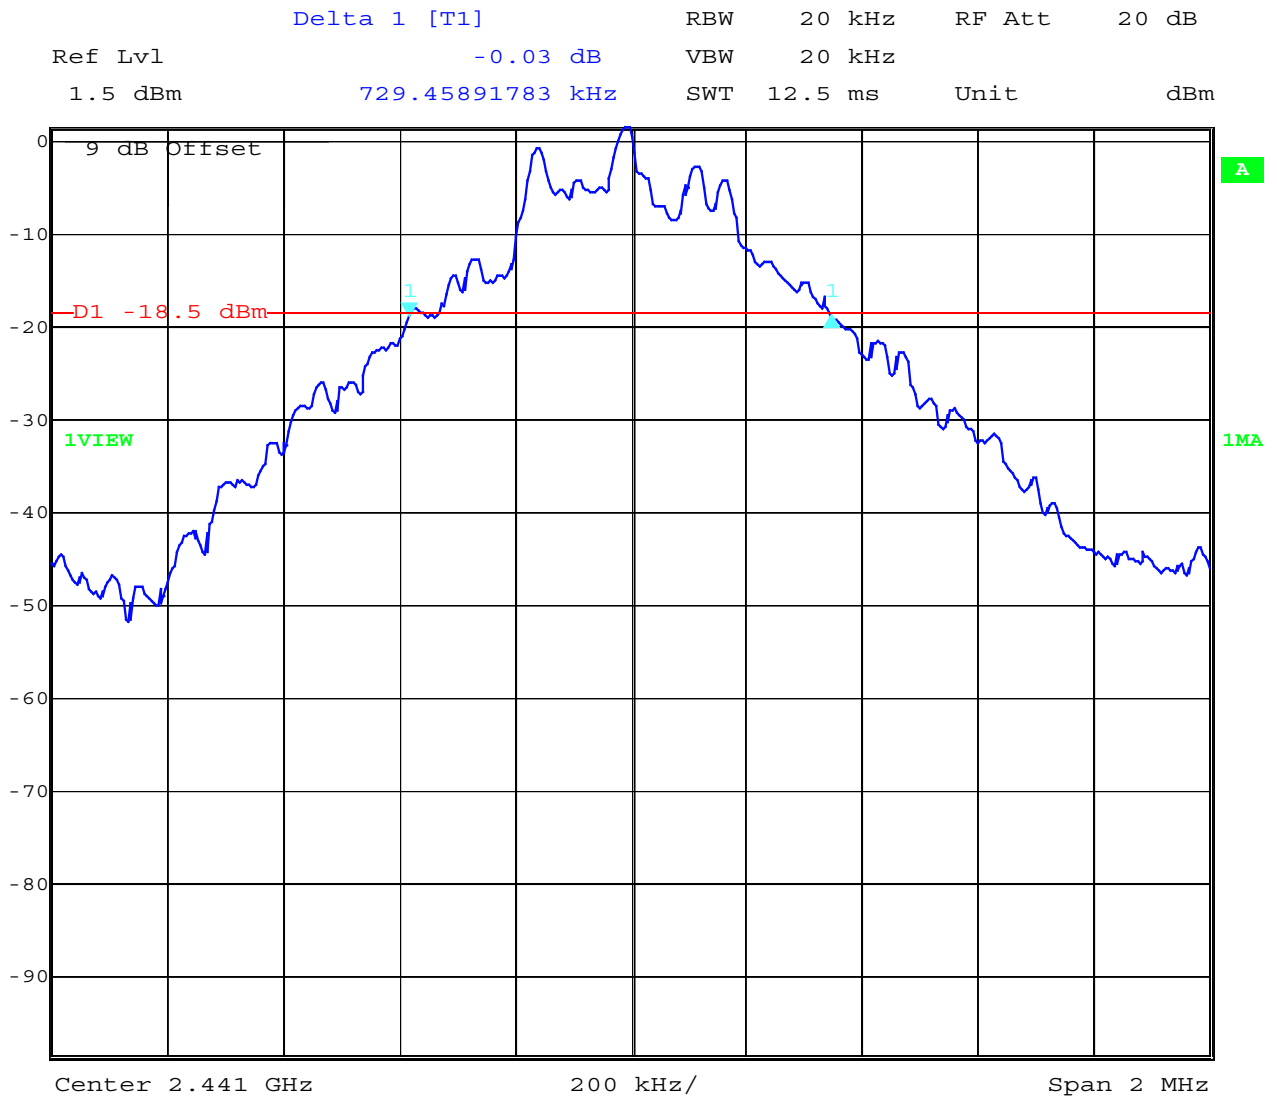

Date: 13.NOV.2001 08:11:18

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005


Ambient temperature : 23,6°C

Relative humidity : 27%

Spectrum Bandwidth of a FHSS System
20 dB bandwidth

§15.247(a)

Channel 3:

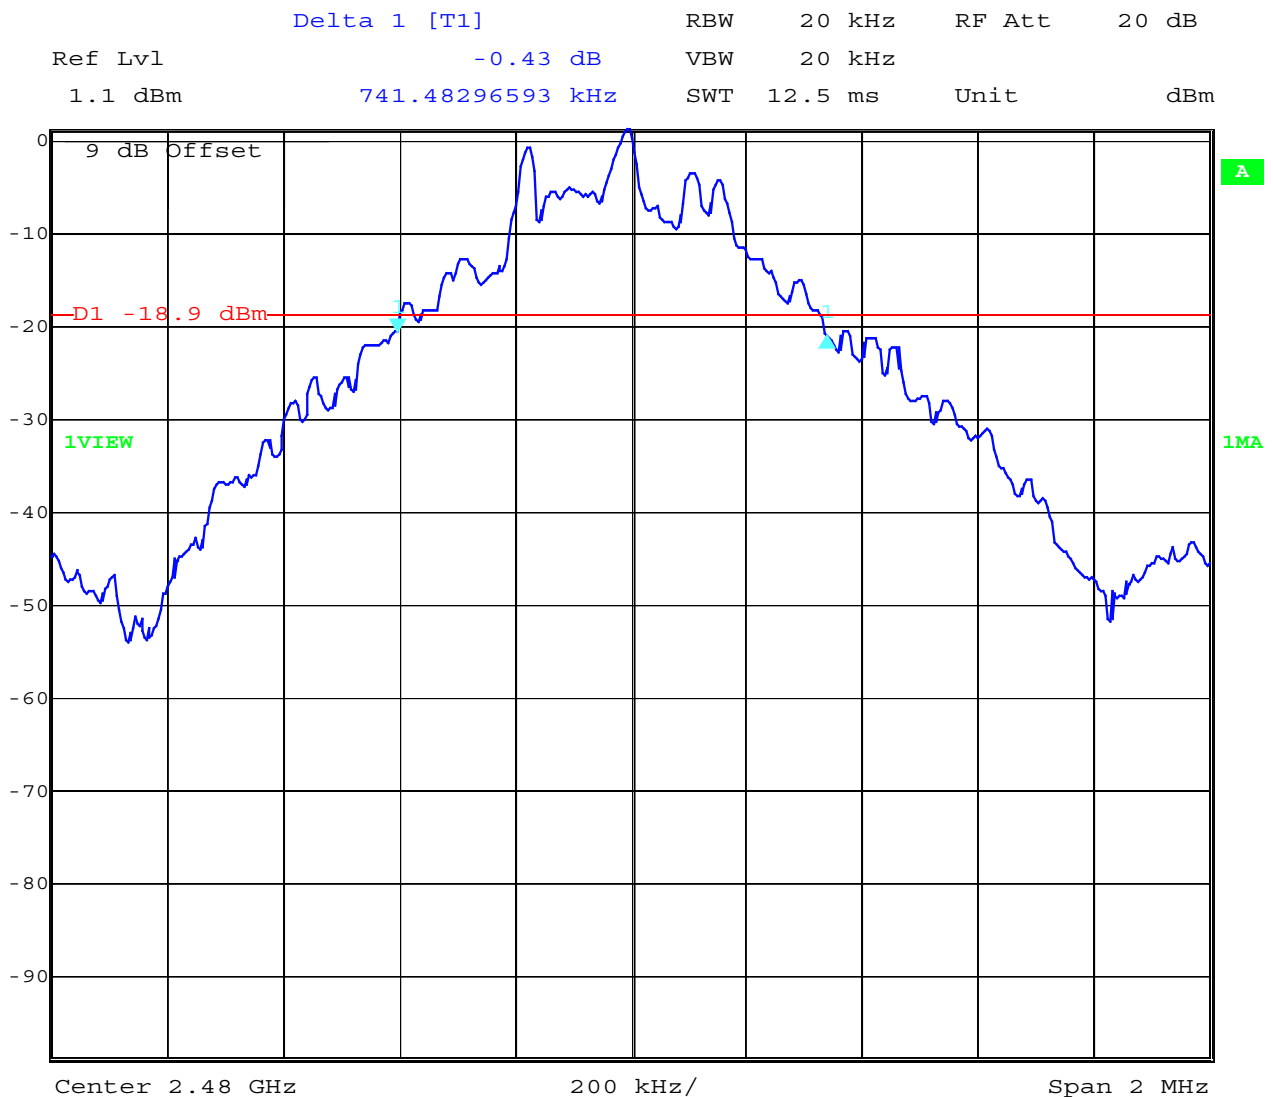

Date: 13.NOV.2001 08:13:24

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

**MAXIMUM PEAK OUTPUT POWER
 (conducted)**

SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)			
		2402	2442	2480	
Frequency (MHz)					
T _{nom} (25)°C	V _{nom} (3,6)V	PK	1.466	1.556	1.426
		AV	0.553	0.587	0.538
Maximum deviation from output power under extreme test conditions (dBc)		not applicable	not applicable	not applicable	
Measurement uncertainty		±3dB			

RBW / VBW : 3 MHz

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)**

SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)		
		2402	2441	2480
Frequency (MHz)				
T _{nom} (25)°C	V _{nom} (3,6)V	0.537	0.447	0.437
Maximum deviation from output power under extreme test conditions (dBc)		not applicable	not applicable	not applicable
Measurement uncertainty		±3dB		

RBW/VBW : 3 MHz

Measured at a distance of 3m

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

Band-edge compliance of conducted emissions

§15.247 (c)

Low frequency section (hopping off)

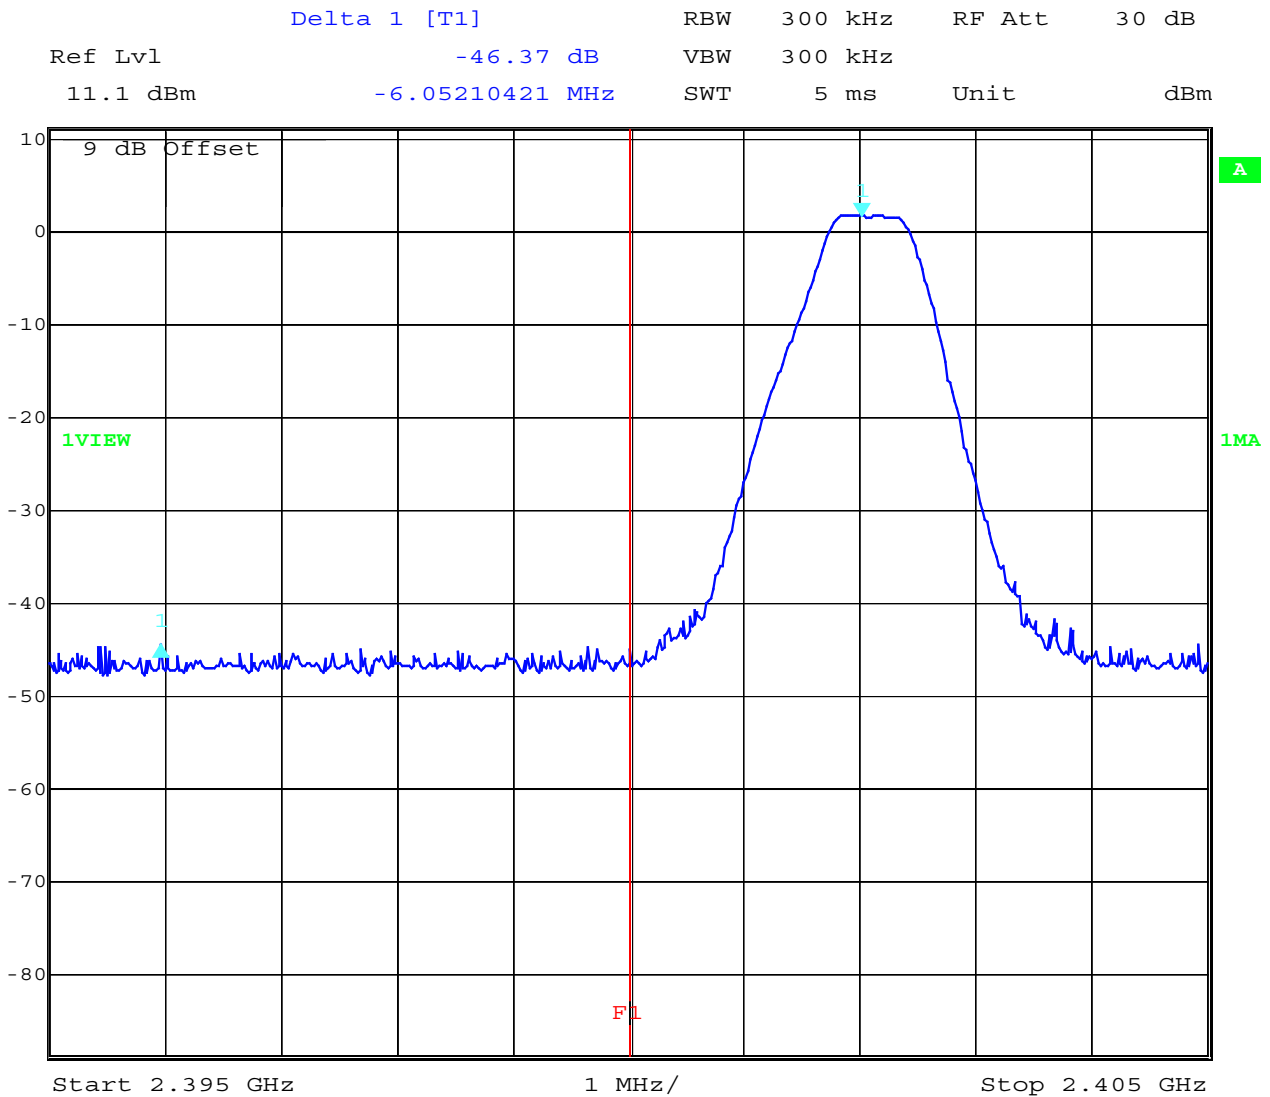

Date: 13.NOV.2001 08:48:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

Band-edge compliance of conducted emissions

§15.247 (c)

Low frequency section (hopping on)

	Delta 1 [T1]	RBW	300 kHz	RF Att	30 dB
Ref Lvl	-46.71 dB	VBW	300 kHz		
11.1 dBm	-2.56513026 MHz	SWT	5 ms	Unit	dBm

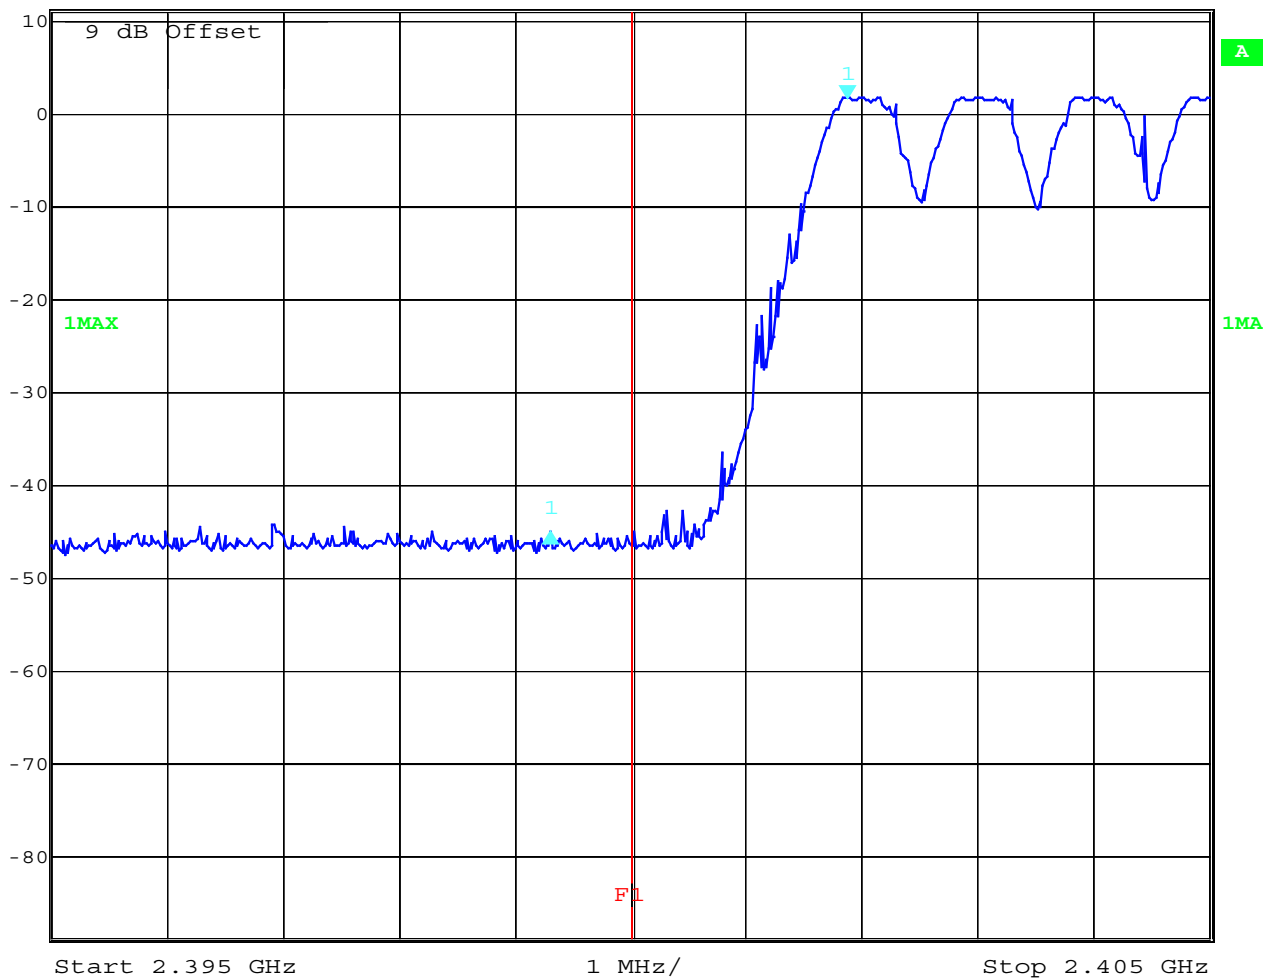

Date: 13.NOV.2001 08:47:23

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005


Ambient temperature : 23,6°C

Relative humidity : 27%

Band-edge compliance of conducted emissions

§15.247 (c)

high frequency section (hopping off)

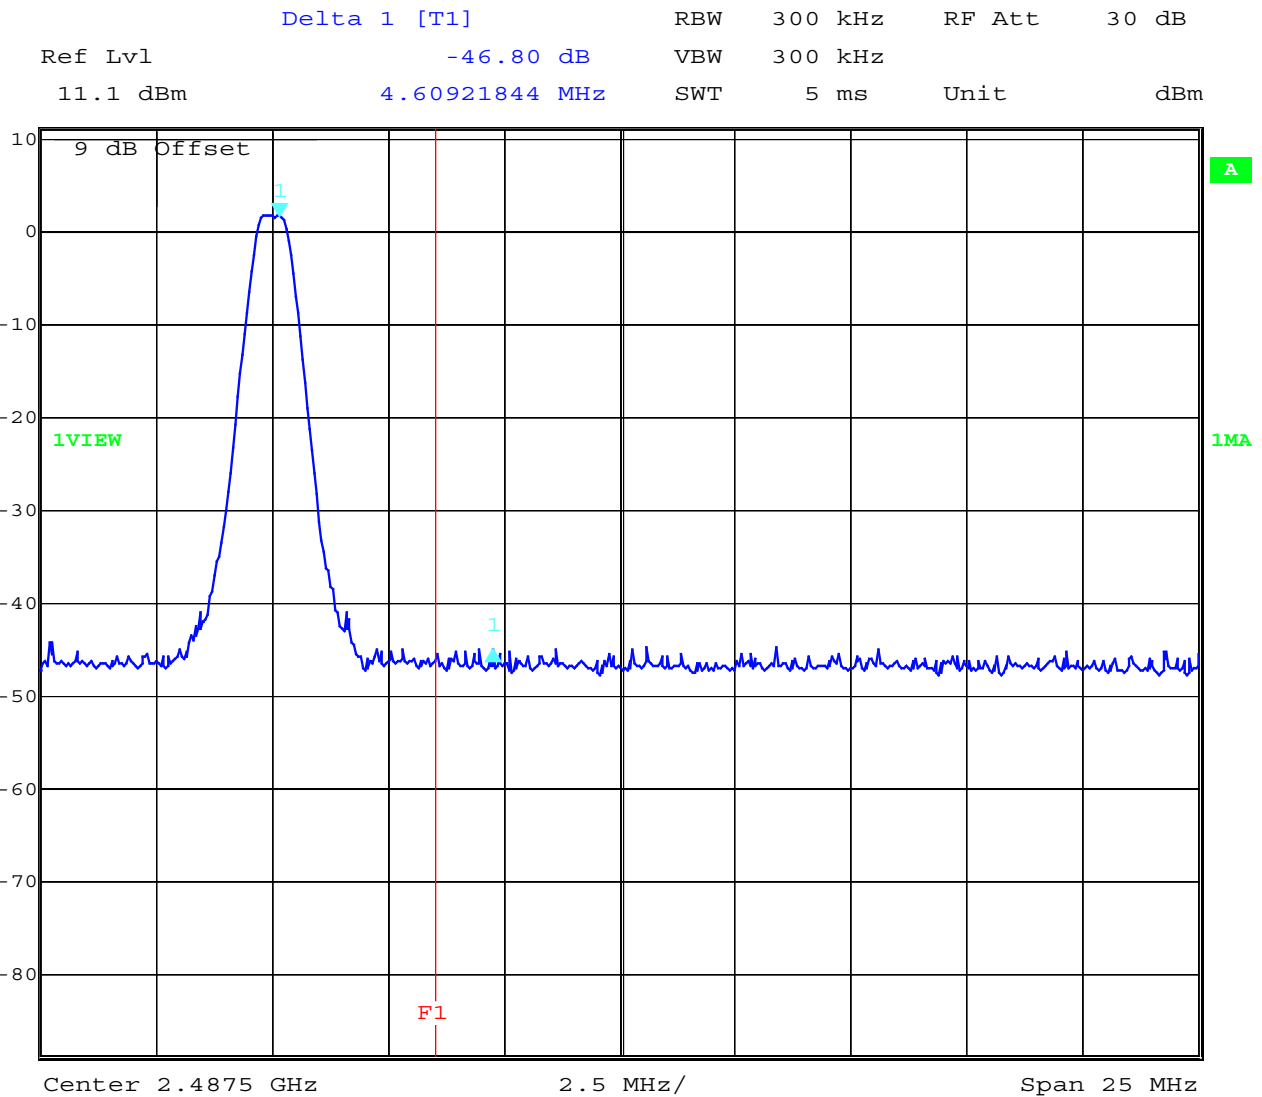

Date: 13.NOV.2001 08:44:45

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005


Ambient temperature : 23,6°C

Relative humidity : 27%

Band-edge compliance of conducted emissions

§15.247 (c)

high frequency section (hopping on)

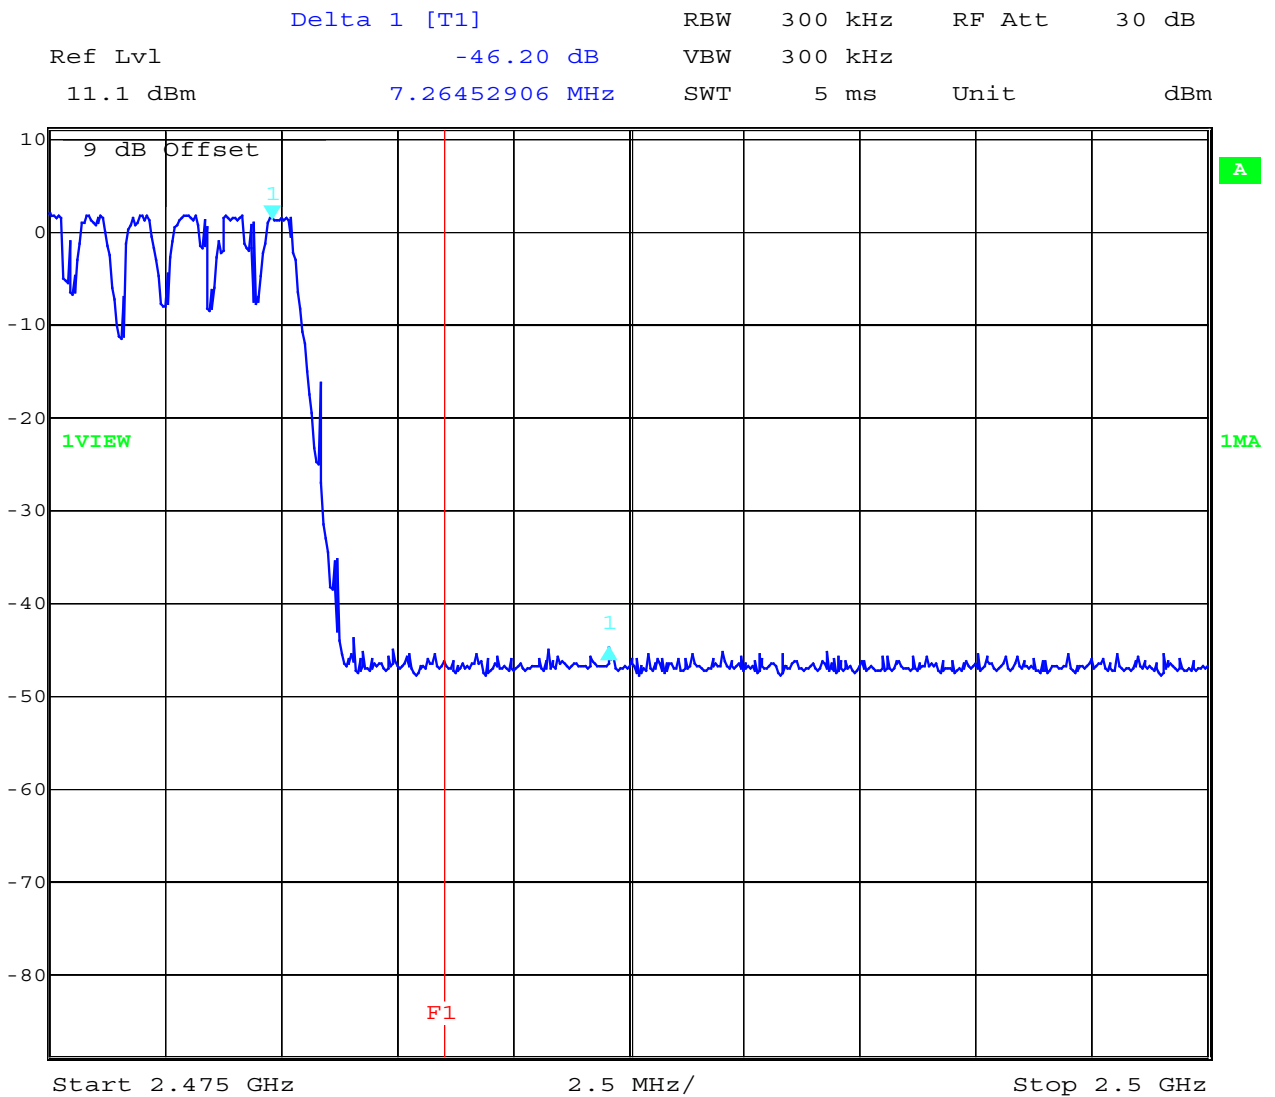

Date: 13.NOV.2001 08:45:58


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Band-edge compliance radiated

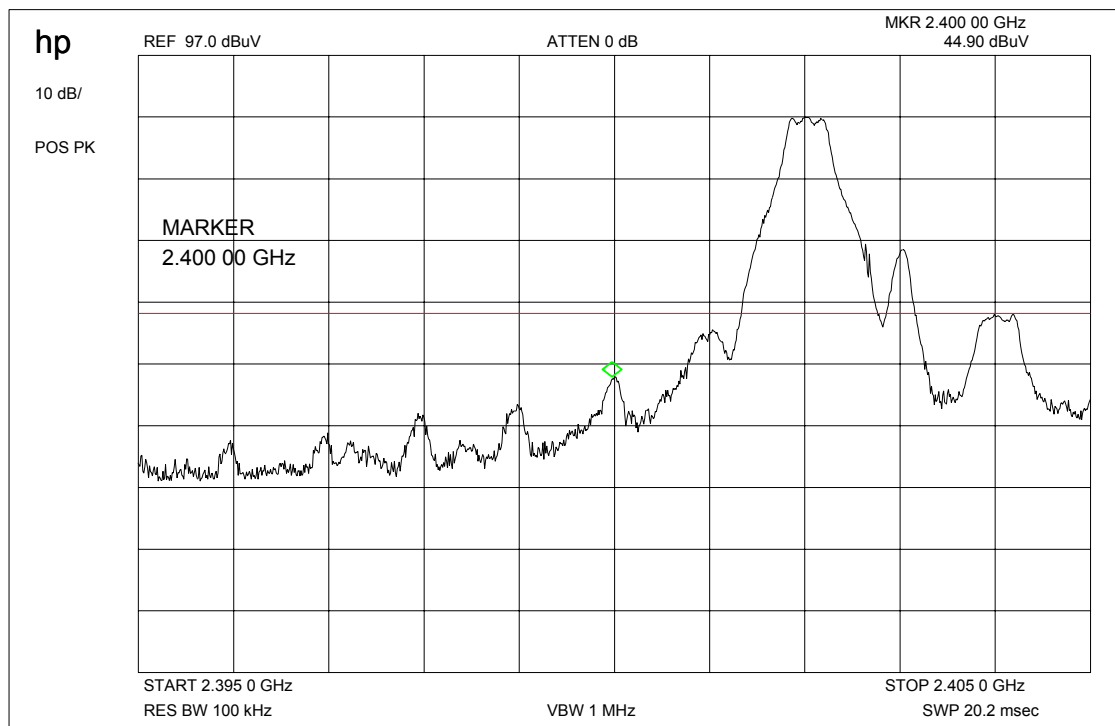


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Band-edge compliance radiated

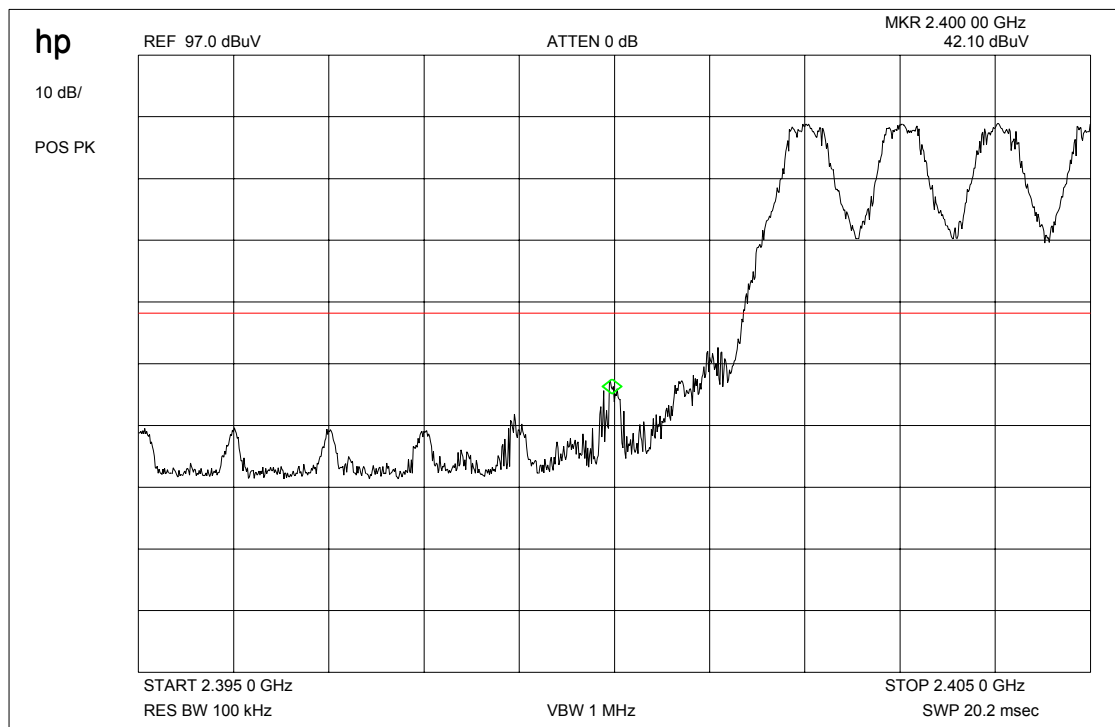

This measurement was made to show that the behavior of the system is conform to

FCC 15.205 (restricted bands)


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Band-edge compliance radiated

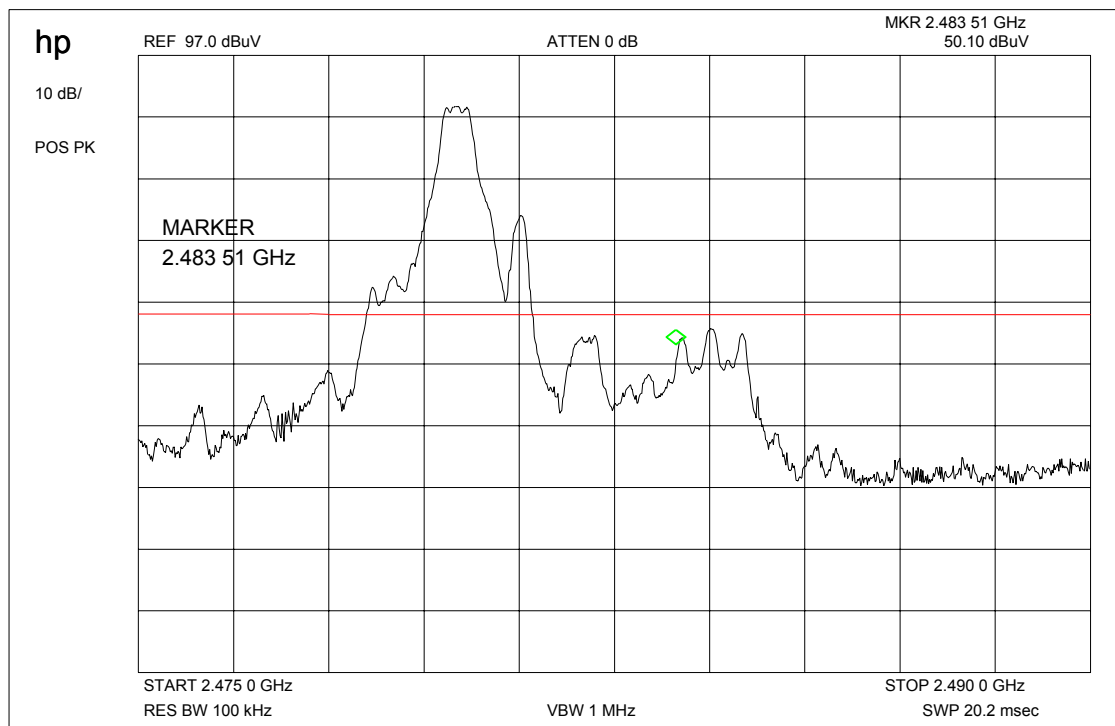

This measurement was made to show that the behavior of the system is conform to

FCC 15.205 (restricted bands)


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

Band-edge compliance radiated

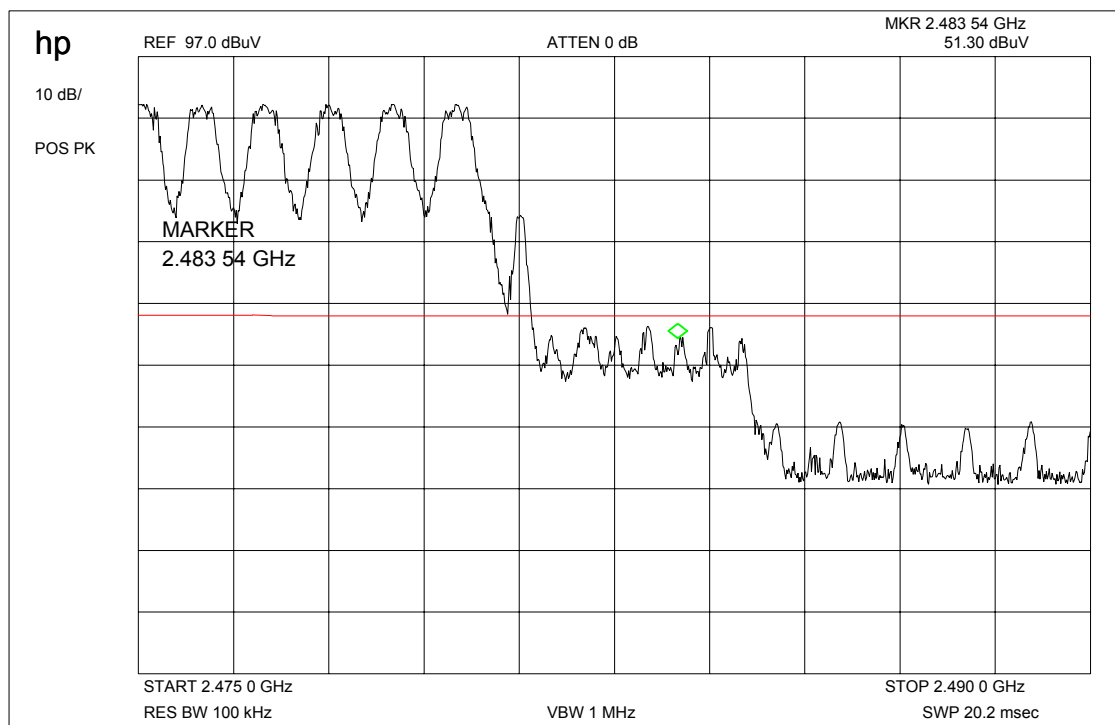

This measurement was made to show that the behavior of the system is conform to

FCC 15.205 (restricted bands)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power	actual attenuation below frequency of operation (dB)	results
2402		1.66	30 dBm	-	Operating frequency
all peaks <<limit			-20 dBc	see plot	complies
2441		1.92	30 dBm	-	Operating frequency
all peaks <<limit			-20 dBc	see plot	complies
2480		1.54	30 dBm		Operating frequency
all peaks <<limit			-20 dBc	see plot	complies
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 1 MHz

For emissions that fall into restricted bands you find the radiated emissions later in the report.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C


Relative humidity : 27%

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

Channel 1: 30 MHz - 25 GHz

Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
11.1 dBm	1.53 dBm	VBW	100 kHz		
	2.40193988 GHz	SWT	6.4 s	Unit	dBm

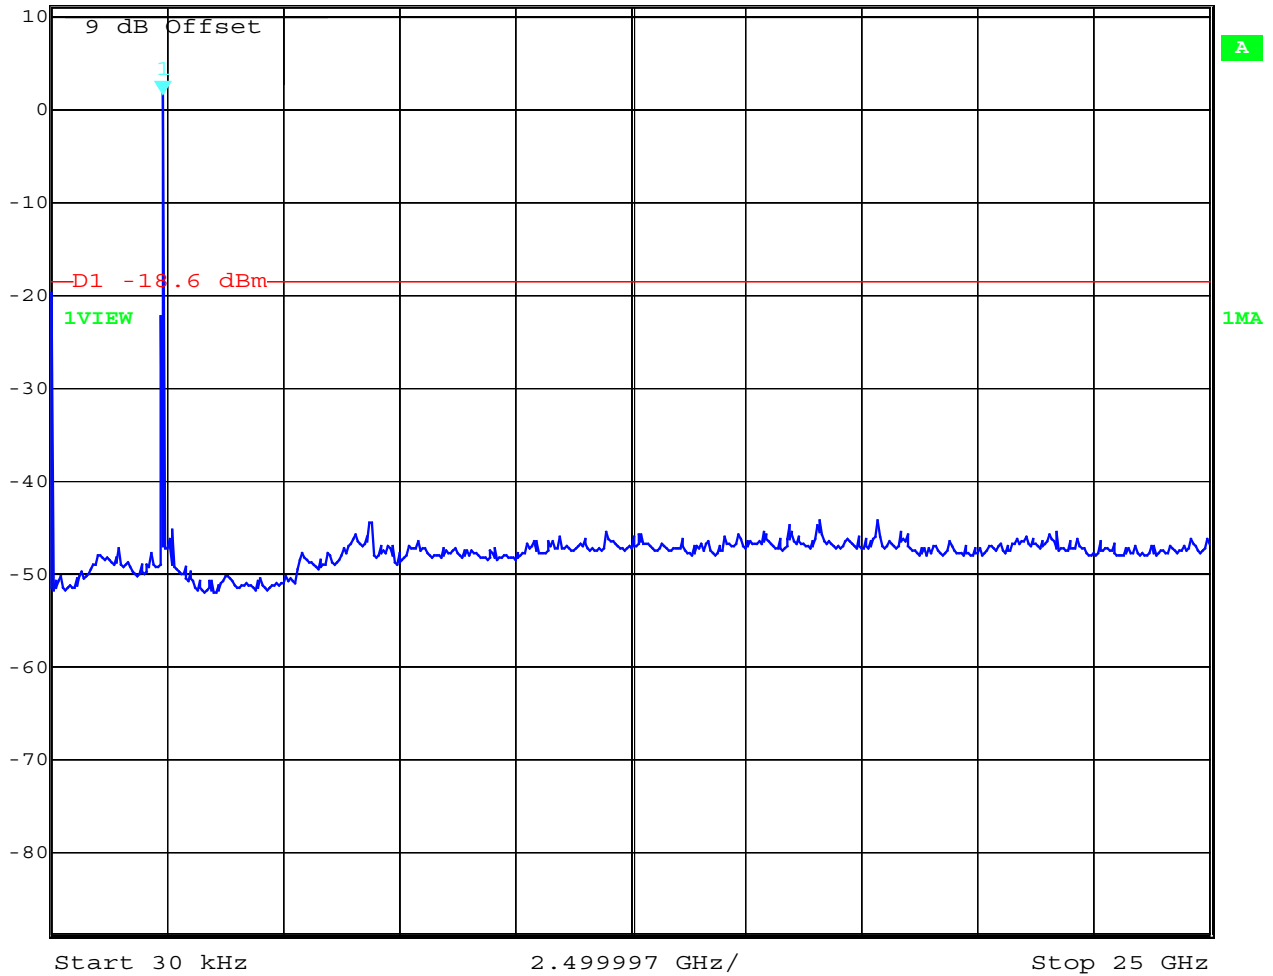

Date: 13.NOV.2001 08:25:57

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005


Ambient temperature : 23,6°C

Relative humidity : 27%

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 2: 30 MHz – 25 GHz

§ 15.247 (c) (1)

	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	1.49 dBm	VBW	100 kHz		
11.1 dBm	2.39089986 GHz	SWT	6.4 s	Unit	dBm

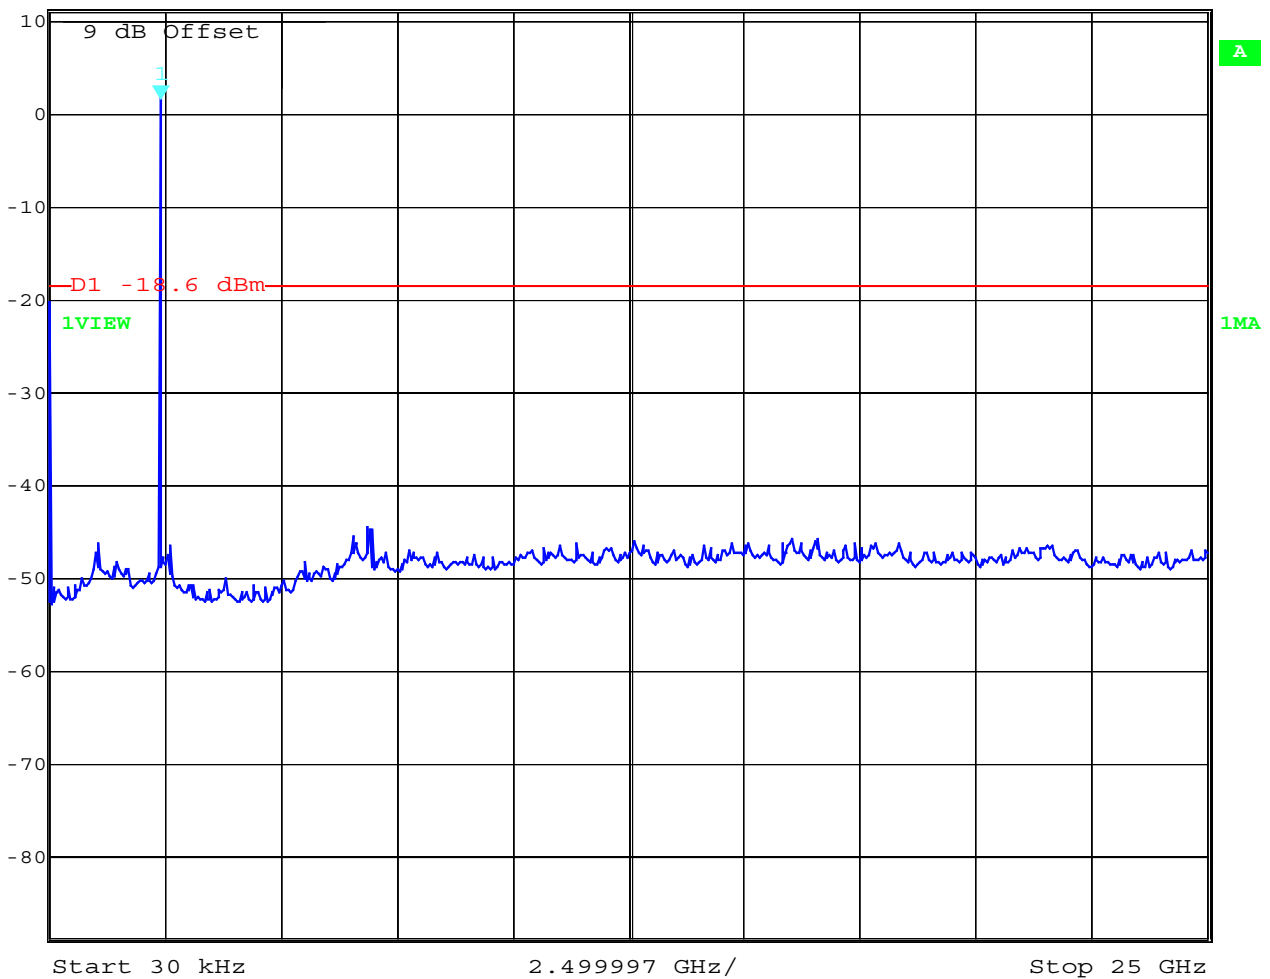

Date: 13.NOV.2001 08:28:05

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

Channel 3: 30 MHz – 25 GHz

	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	1.50 dBm	VBW	100 kHz		
11.1 dBm	2.45493687 GHz	SWT	6.4 s	Unit	dBm

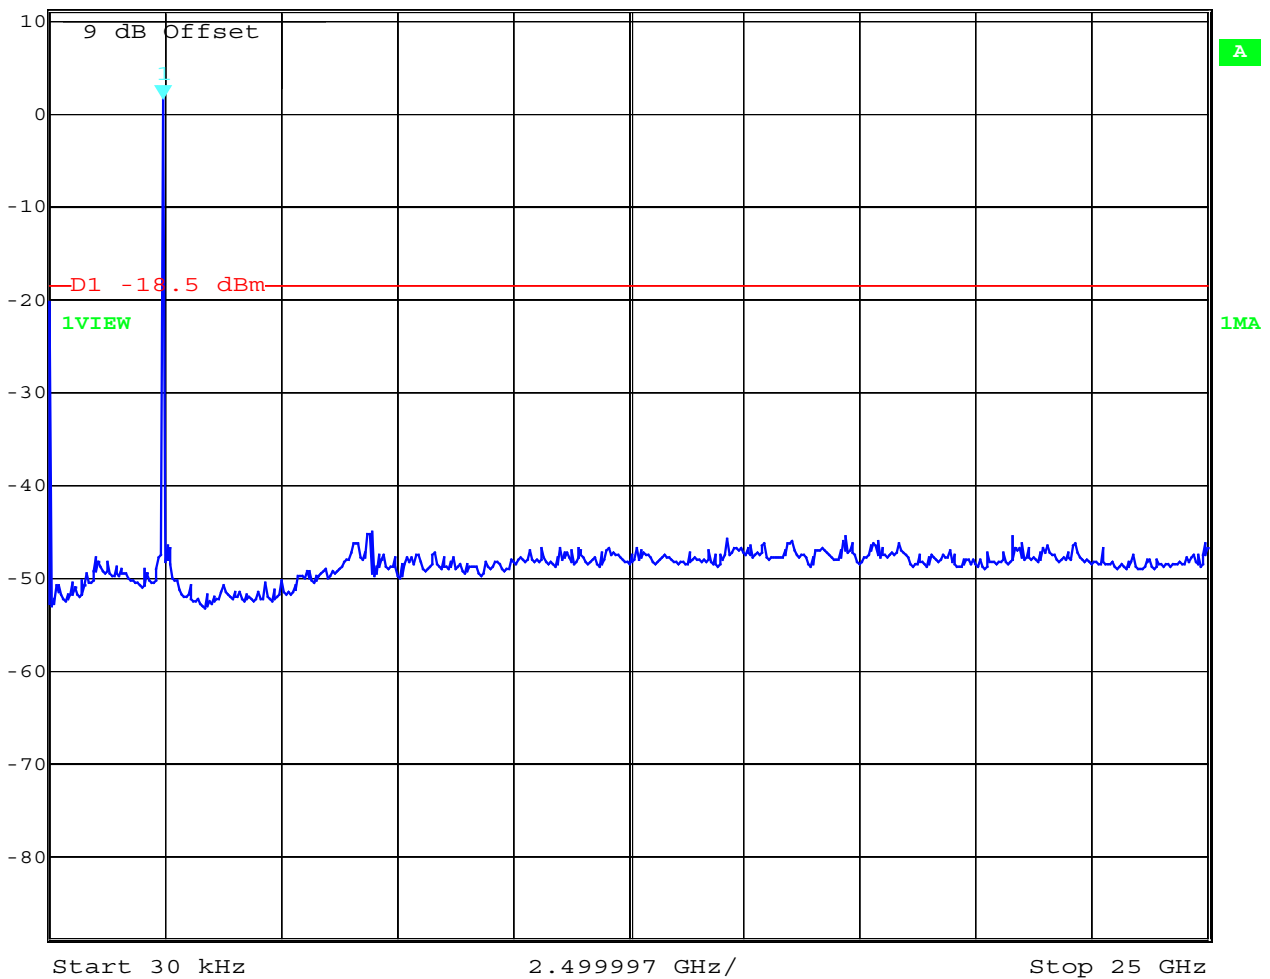

Date: 13.NOV.2001 08:41:32

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

SPURIOUS RADIATED EMISSION § 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)	polarization	amplitude of emission (dBµV/m) QUASISPEAK	amplitude of emission (dBµV/m) average	limit max. allowed emission power (dBµV/m)	results
CH 1					
all	peaks	<< limit			
CH 2					
all	peaks	<< limit			
CH 3					
all	peaks	<< limit			
Measurement uncertainty		± 3dB			


LIMITS SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2402 MHz

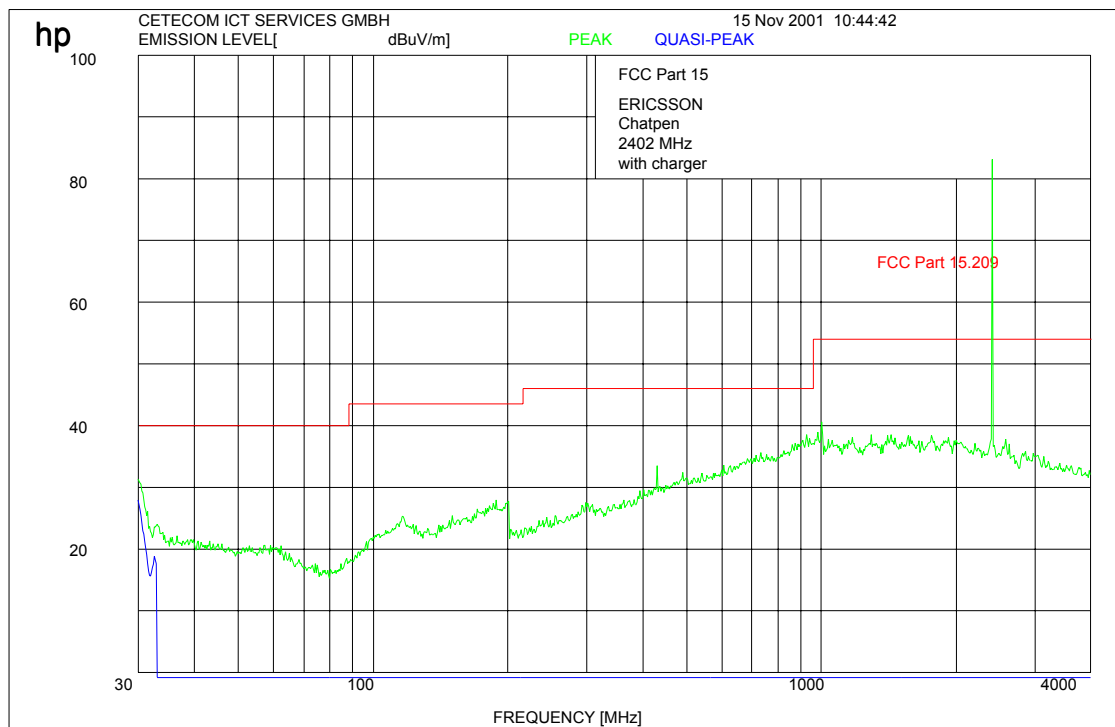

$f < 1 \text{ GHz} : \text{RBW/VBW}: 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW}: 1 \text{ MHz}$

LIMITS

SUBCLAUSE § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2441 MHz

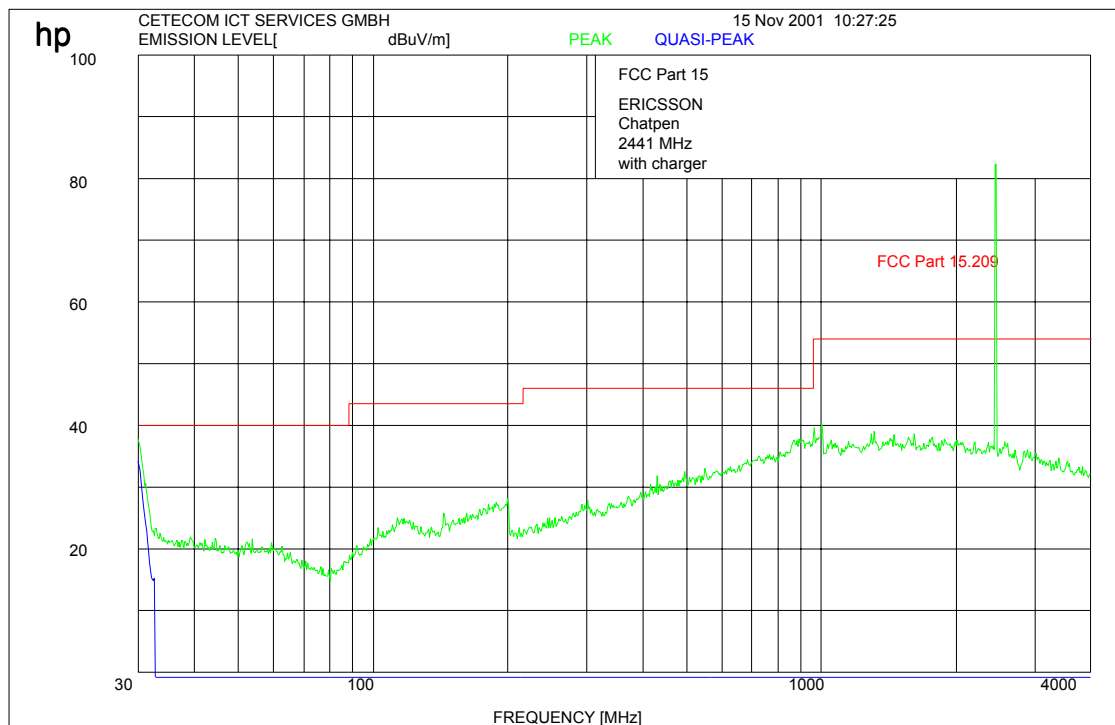

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
Ambient temperature : 23,6°C
Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2480 MHz

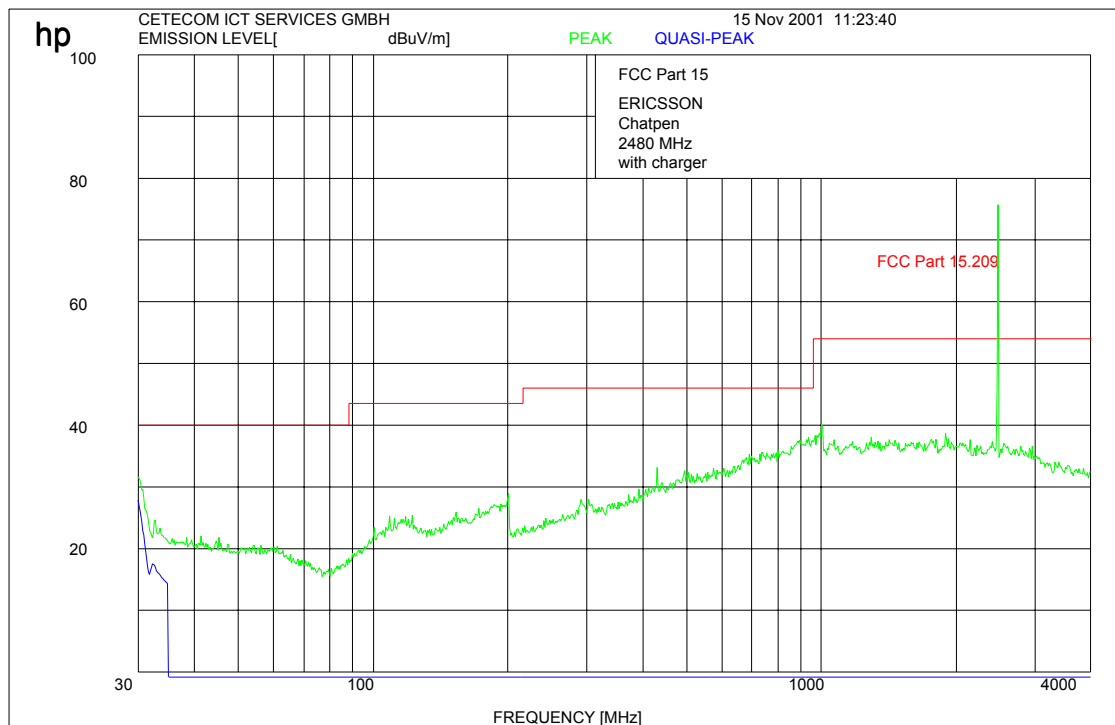

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 1

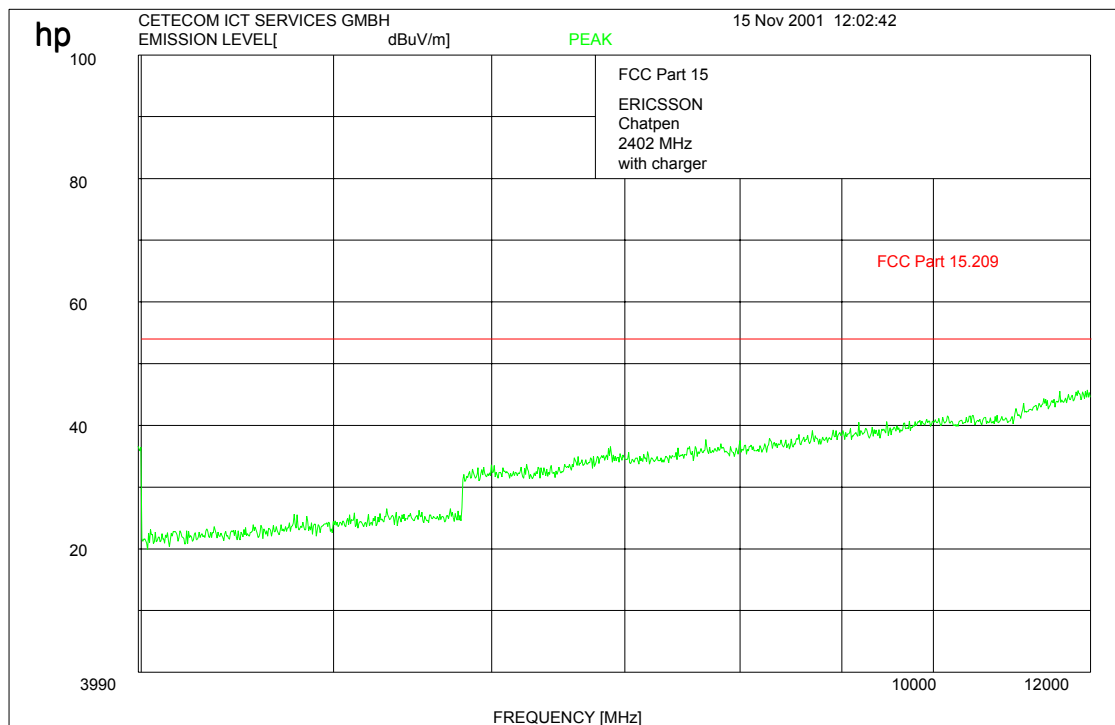

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 2

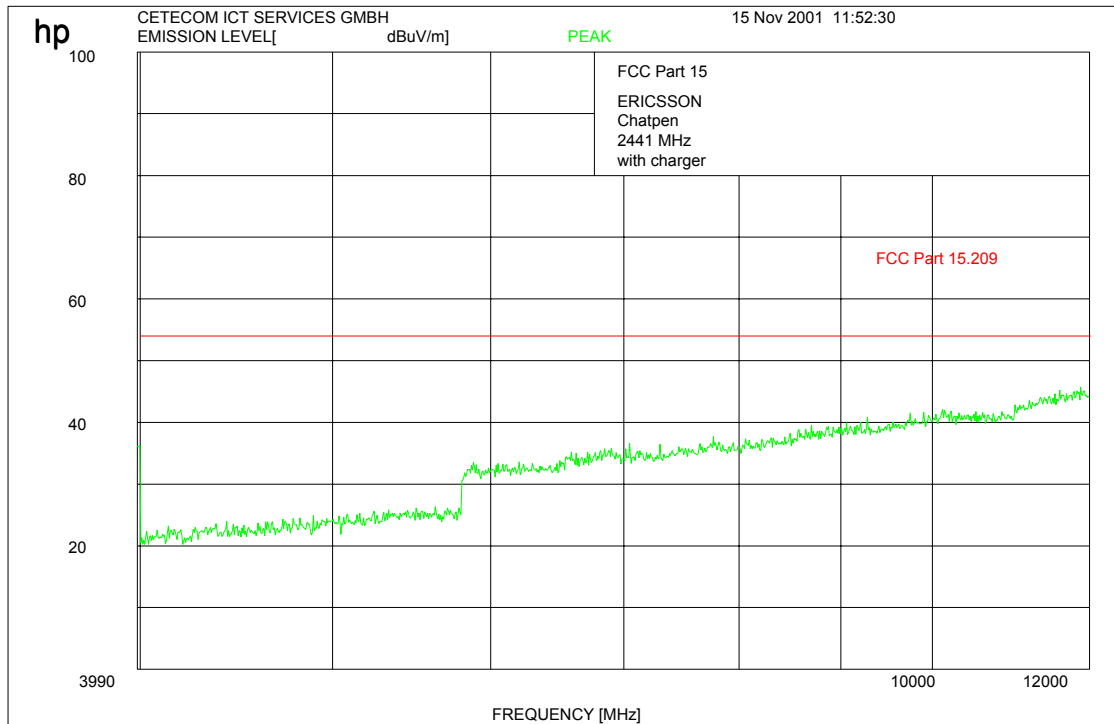

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
Ambient temperature : 23,6°C
Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 3

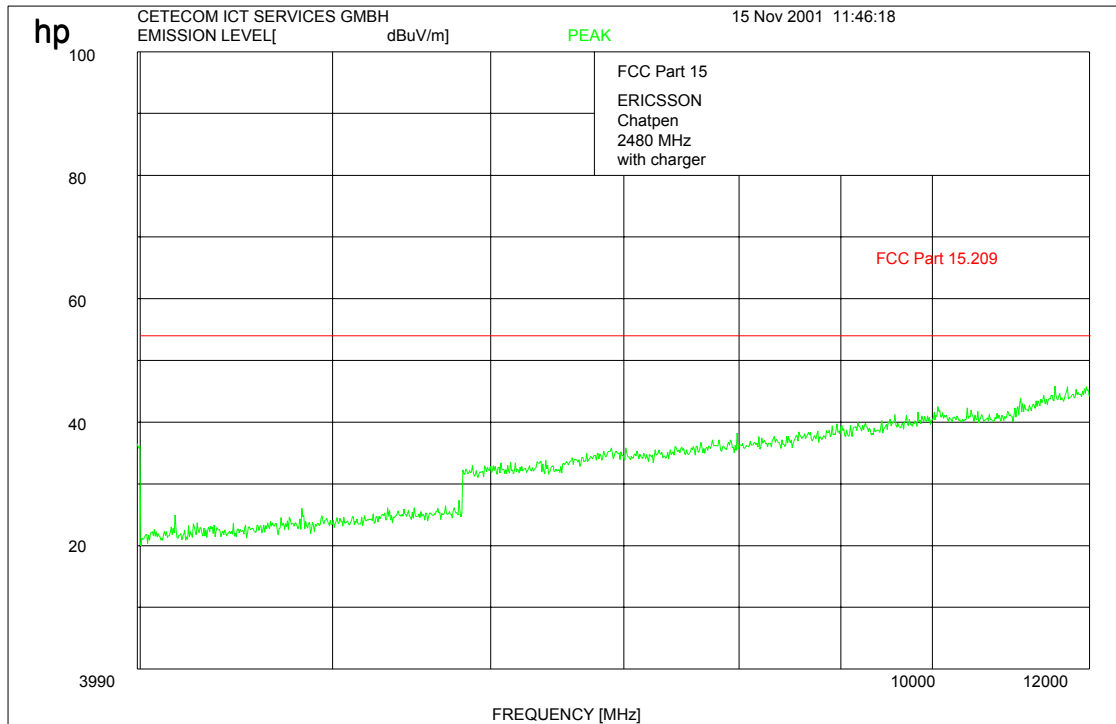

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter)
Channel 1-3 (this is valid for all 3 channels)

CLAUSE § 15.247 (c) (1)

	Marker 2 [T1]	RBW	1 MHz	RF Att	0 dB
	Ref Lvl	42.38 dB μ V	VBW	1 MHz	
	69 dB μ V	18.00000000 GHz	SWT	34 ms	Unit

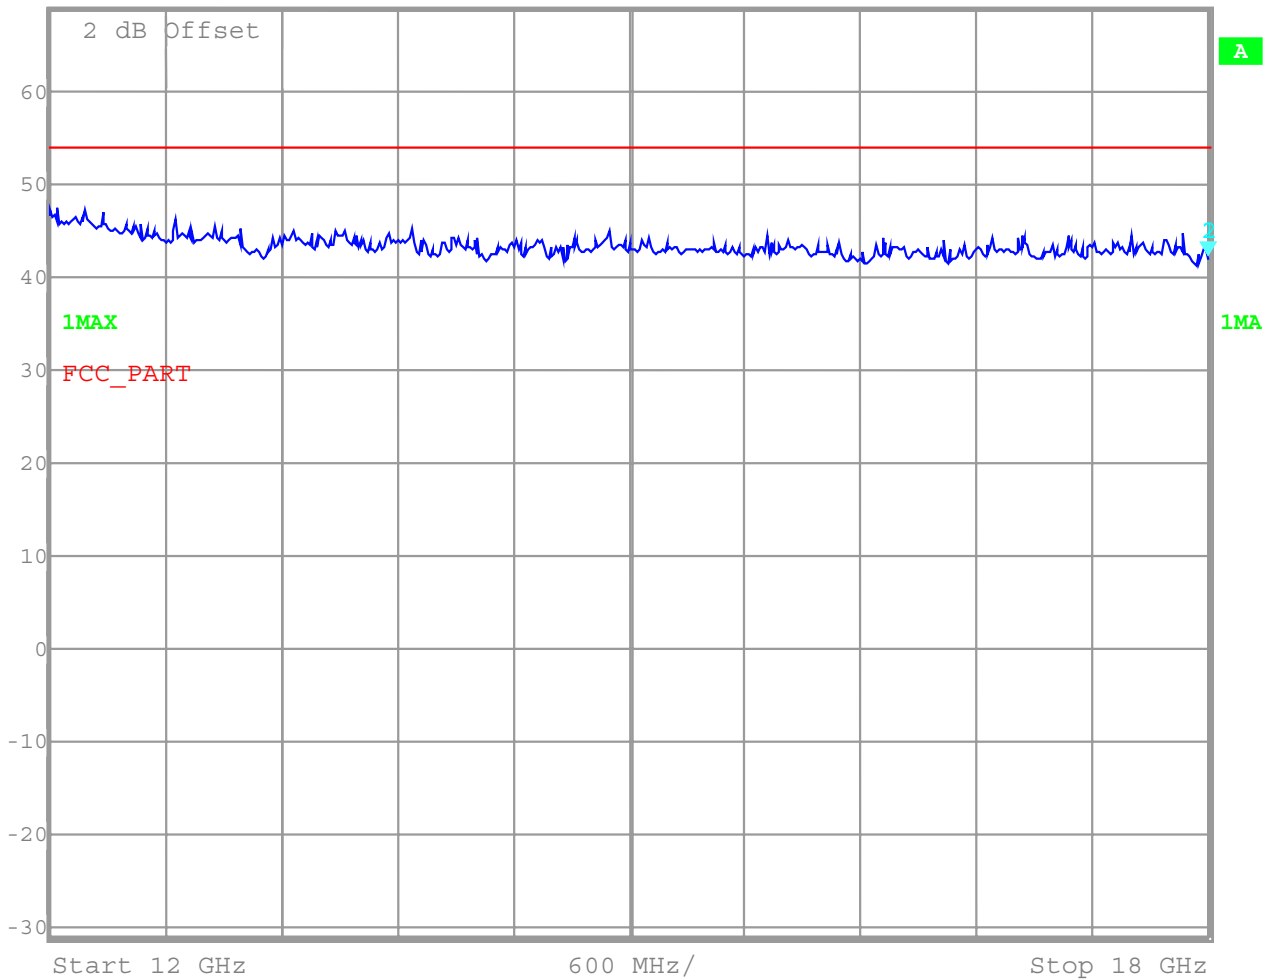

Date: 14.NOV.2001 13:11:34

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 1-3 (this is valid for all 3 channels)

	Marker 2 [T1]	RBW	1 MHz	RF Att	0 dB
	Ref Lvl	42.38 dBμV	VBW	1 MHz	
	69 dBμV	18.00000000 GHz	SWT	34 ms	Unit dBμV

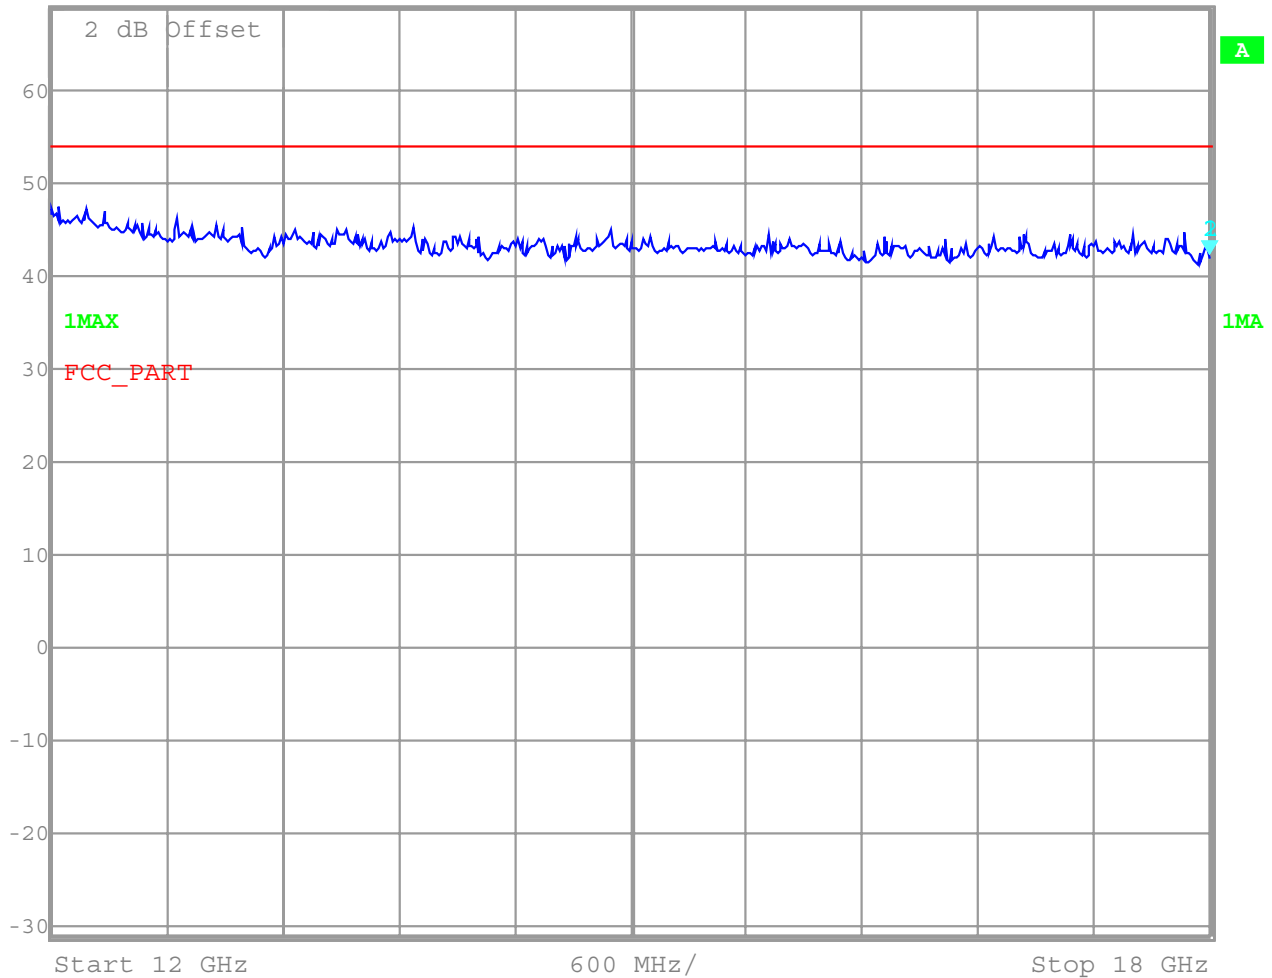

Date: 14.NOV.2001 13:31:12

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

RECEIVER SPURIOUS RADIATION
 Radiated

§ 15.209

SPURIOUS EMISSIONS LEVEL (µV/m)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
all	peaks	< limit						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz
 all peaks below 1 GHz results from the test laptop which sets the EUT in the different test-modes
 Measurement distance see table


Limits **SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

RECEIVER SPURIOUS RADIATION

§ 15.209

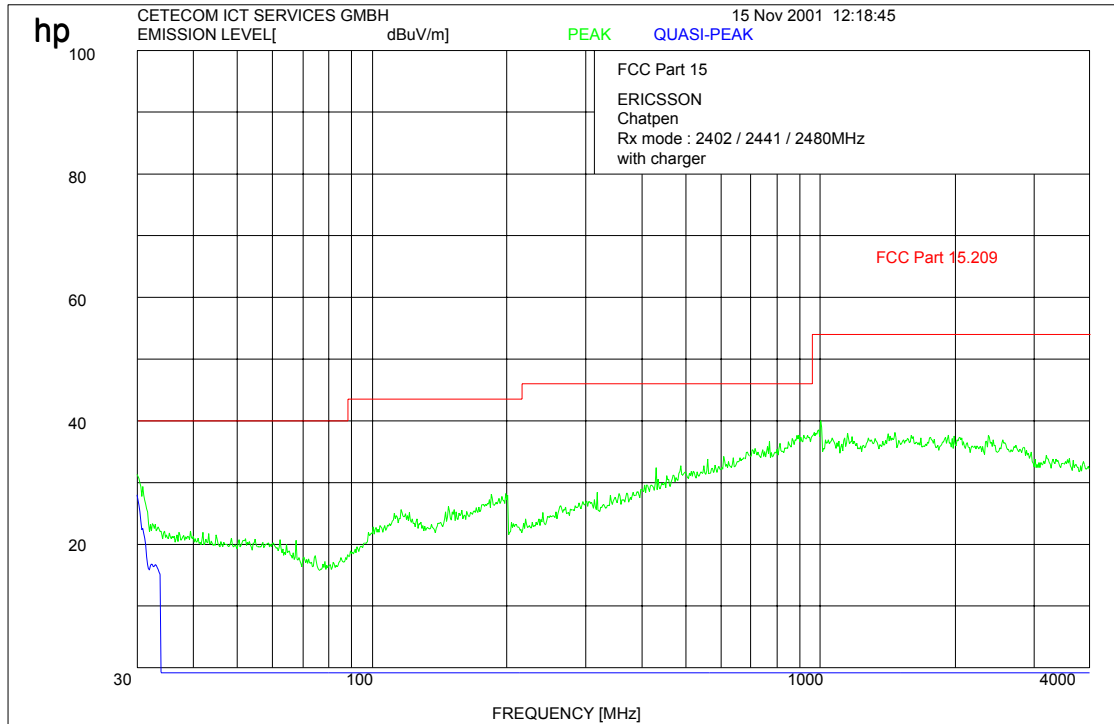

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

RECEIVER SPURIOUS RADIATION

§ 15.209

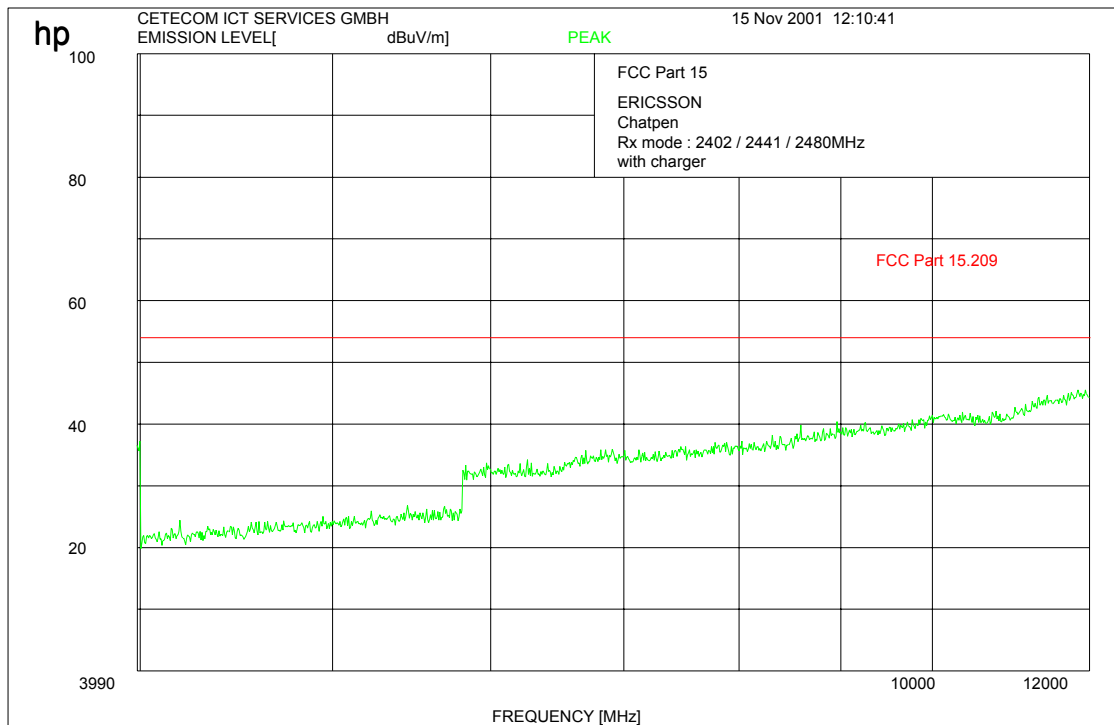

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

RECEIVER SPURIOUS RADIATION

§ 15.209

peak



Marker 1 [T1]

RBW 1 MHz RF Att 10 dB


Ref Lvl 42.12 dBµV

VBW 1 MHz

69 dBµV 16.08817635 GHz

SWT 34 ms

Unit dBµV

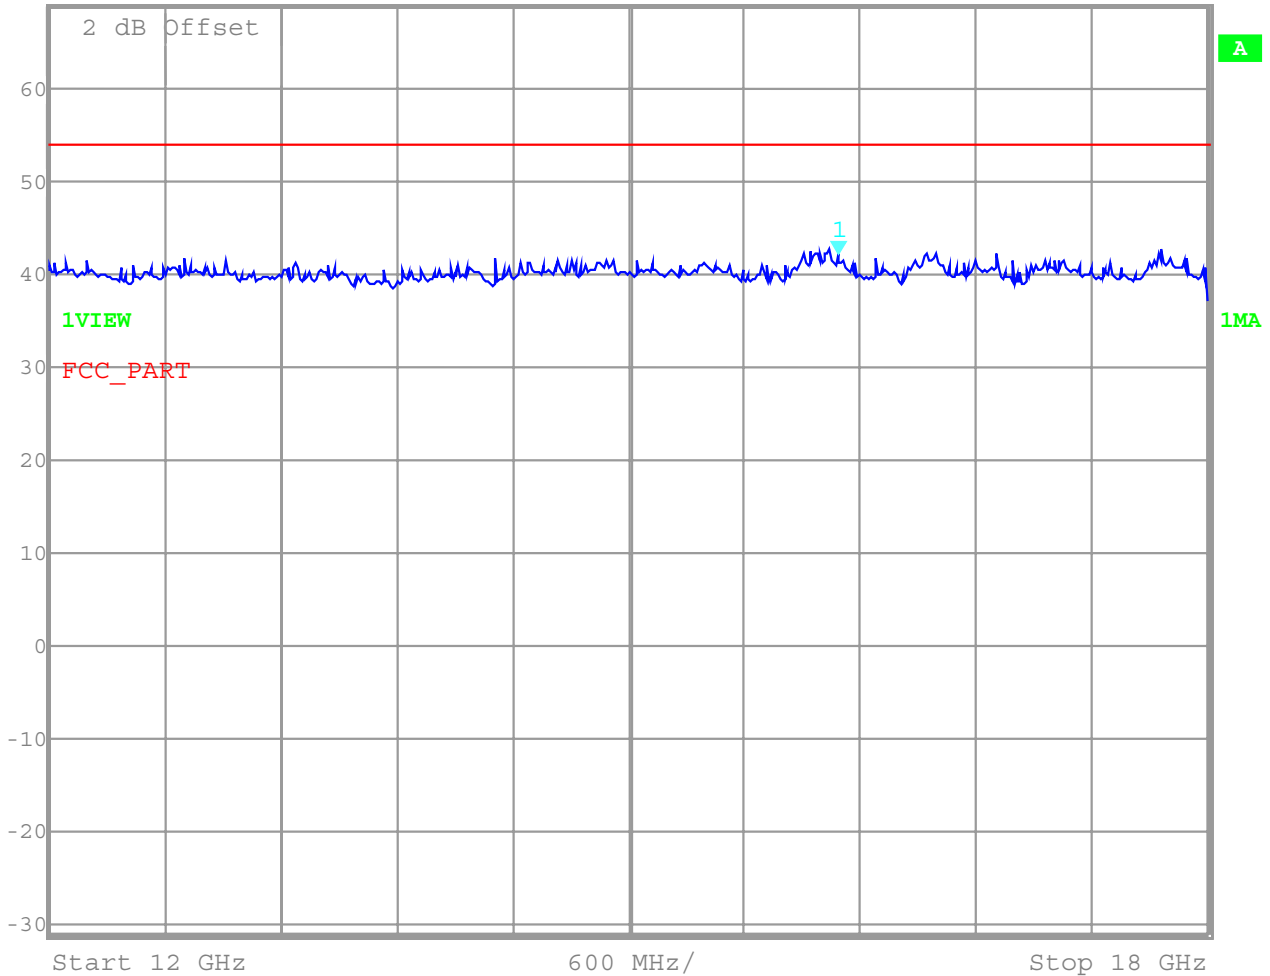

Date: 14.NOV.2001 13:33:14

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005
 Ambient temperature : 23,6°C
 Relative humidity : 27%

RECEIVER SPURIOUS RADIATION

§ 15.209

Peak

Marker 1 [T1]
RBW 1 MHz
RF Att 10 dB
Ref Lvl 42.26 dBμV
VBW 1 MHz
69 dBμV
18.58917836 GHz
SWT 40 ms
Unit dBμV

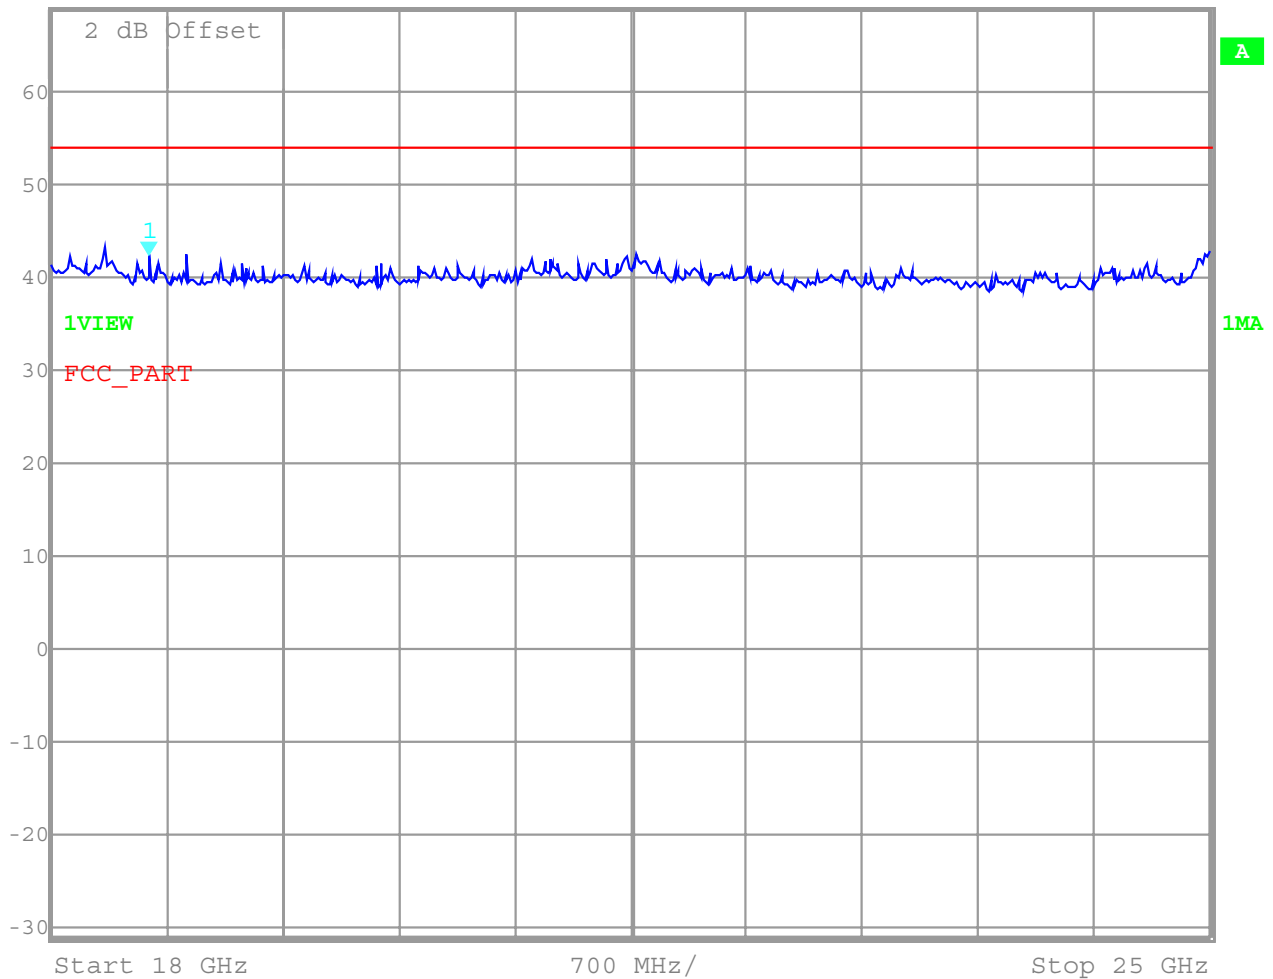

Date: 14.NOV.2001 13:37:39

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

CONDUCTED EMISSIONS

§ 15.207

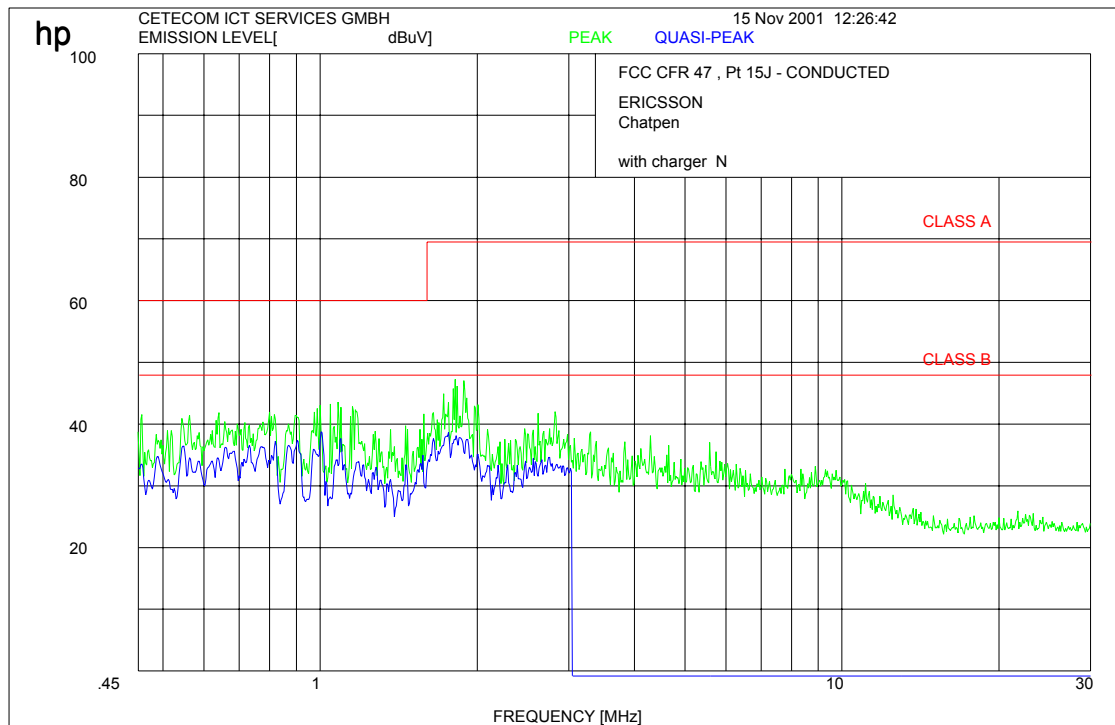

All measurements were performed with a CISPR QP-adapter.

Technical specification : 15.207

Limit

0.45 to 30 MHz	250 µV / 47.96 dBµV
----------------	---------------------

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : Bluetooth Chatpen Type 8404005

Ambient temperature : 23,6°C

Relative humidity : 27%

CONDUCTED EMISSIONS

§ 15.207

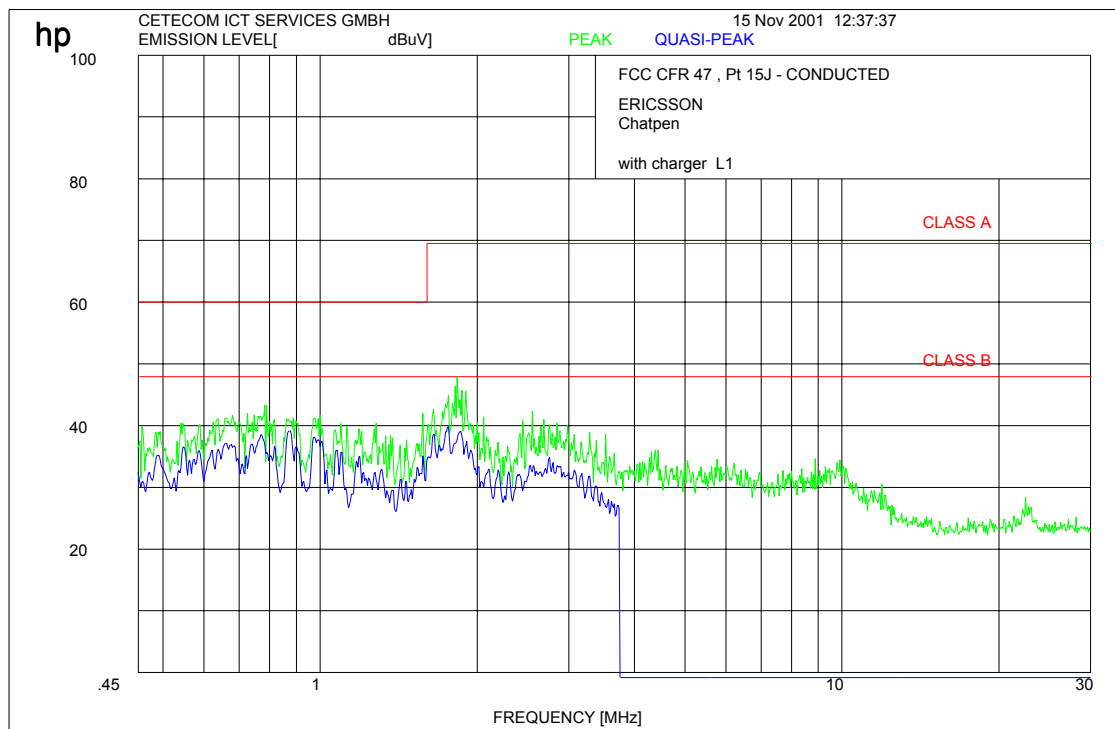

All measurements were performed with a CISPR QP-adapter.

Technical specification : 15.207

Limit

0.45 to 30 MHz	250 μ V / 47.96 dB μ V
----------------	--------------------------------

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010