

TEST REPORT

Test report no.: 1-2977-83-09/11



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited test laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025

DAkKS registration number: D-PL-12076-01-01

Area of Testing: Radio/Satellite Communications

Applicant

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonyericsson.com
Phone: +46 46 19 35 59

Manufacturer

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.


Test item

Kind of test item:	Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSDPA/HSUPA FDDI/FDDVIII; BT+EDR; WLAN; A-GPS; FM-Rx; ANT+
Model name:	AAD-3880123-BV
FCC ID:	PY7A3880123
IC:	4170B-A3880123
Frequency:	ISM band 2400 to 2483.5 MHz (lowest channel 00 – 2402 MHz; highest 78 – channel 2480 MHz)
Power supply:	3.7 V DC by power supply / Li-polymer battery CBA-0002019 and charger CAA-0002022-BV
Temperature range:	-20 °C to +55 °C

Test performed:

2011-08-25 
Marco Bertolino

Test report authorised:

2011-08-25 
Stefan Bös

1 Table of contents

1 Table of contents2

2 General information3

 2.1 Notes.....3

 2.2 Application details.....3

3 Test standard/s3

4 Test environment.....3

5 Test item4

6 Test laboratories sub-contracted4

7 Summary of measurement results5

8 RF measurements6

 8.1 Description of test setup6

 8.1.1 Radiated measurements.....6

 8.2 Additional comments7

 8.3 RSP100 test report cover sheet / performance test data8

9 Measurement results.....9

 9.1 Timing of the transmitter9

 9.2 Spectrum bandwidth – 99% bandwidth.....11

 9.3 Maximum field strength14

 9.4 Band edge compliance radiated15

 9.5 TX spurious emissions radiated18

 9.6 RX spurious emissions radiated.....31

 9.7 Spurious emissions radiated < 30 MHz.....36

 9.8 Spurious emissions conducted < 30 MHz.....39

10 Test equipment and ancillaries used for tests42

Annex A Photographs of the test setup44

Annex B External photographs of the EUT49

Annex C Internal photographs of the EUT55

Annex D Document history66

Annex E Further information.....66

2 General information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

2.2 Application details

Date of receipt of order:	2011-08-09
Date of receipt of test item:	2011-08-16
Start of test:	2011-08-16
End of test:	2011-08-23
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+29 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity:		64 %
Air pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by power supply / Li-polymer battery CBA-0002019 and charger CAA-0002022-BV
	V_{max}	4.1 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSDPA/HSUPA FDDI/FDDVIII; BT+EDR; WLAN; A-GPS; FM-Rx; ANT+
Type identification	:	AAD-3880123-BV
S/N serial number	:	Radiated units: BX902GJNT0, BX902GJNSH Conducted units: BX902GHWNX, BX902GJNSW
HW hardware status	:	AP2
SW software status	:	4.0.1.A.0.99 ATP R1A034
Frequency band [MHz]	:	ISM band 2400 to 2483.5 MHz (lowest channel 00 – 2402 MHz; highest 78 – channel 2480 MHz)
Type of modulation	:	Digital Transmission System using GFSK modulation
Number of channels	:	79
Antenna	:	Integrated antenna → for more information, please take a look at the annex – internal photos of the EUT.
Power supply	:	3.7 V DC by power supply / Li-polymer battery CBA-0002019 and charger CAA-0002022-BV
Temperature range	:	-20°C to +55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 2	Passed	2011-08-25	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Results (max.)
CFR 15.35(c) RSS Gen (Issue 3) / 4.5	Timing of the transmitter	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Not limited
RSS Gen (Issue 3) / 4.6.1	99% - Occupied Bandwidth	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Not limited
§15.249(a)(e) RSS-210 / A2.9(a)	Maximum field strength	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.249(d) RSS-210 / A2.9(a)(b)	Band edge compliance radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.249(d) RSS-210 / A2.9(a)(b)	TX spurious emissions radiated	Nominal	Nominal	TX	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	Nominal	Nominal	TX & Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) RSS-Gen	Spurious emissions conducted < 30 MHz	Nominal	Nominal	TX & Idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.10-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.10-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

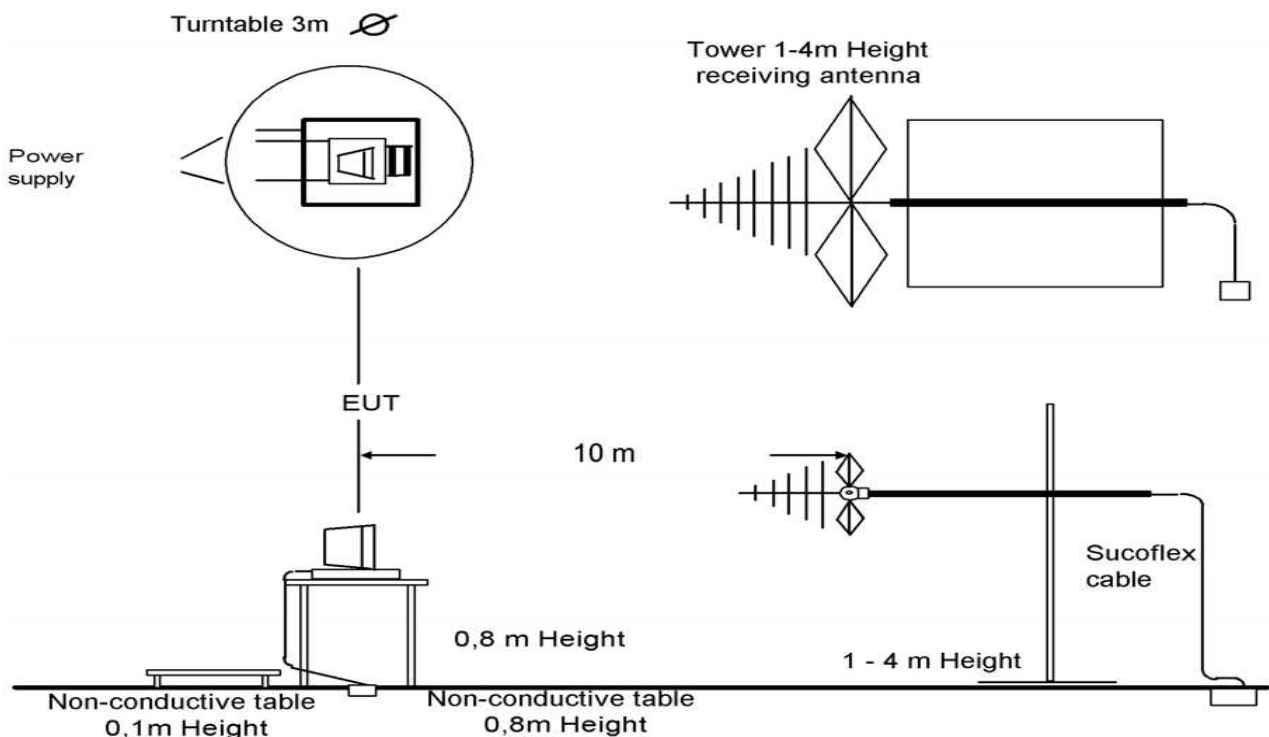

Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage or with battery.

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- No test mode available.
Iperf was used to ping another device with the largest support packet size
- Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-2977-83-09/11
Equipment model number	:	AAD-3880123-BV
Certification number	:	4170B-A3880123
Manufacturer (complete address)	:	Sony Ericsson Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 2
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2402 MHz, highest channel 2480 MHz)
RF-field strength [dB μ V/m @ 3 m] (max. AVG)	:	78.6
Occupied bandwidth (99%-BW) [kHz]	:	896
Type of modulation	:	Digital Transmission System using GFSK modulation
Emission designator (TRC-43)	:	896KF1D
Antenna information	:	Integrated antenna → for more information, please take a look at the annex – internal photos of the EUT.
Transmitter spurious (worst case) [dB μ V/m @ 3m]:		42 @ 12.6 GHz (noise floor)
Receiver spurious (worst case) [dB μ V/m @ 3m]	:	42 @ 12.6 GHz (noise floor)

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2011-08-25

Marco Bertolino

Date

Name



Signature

9 Measurement results

9.1 Timing of the transmitter

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	See plot
Resolution bandwidth:	See plot
Video bandwidth:	See plot
Span:	Zero
Trace-Mode:	Single

Limits:


FCC	IC
CFR 15.35 (c)	RSS-GEN Issue 3 Section 4.5
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

Result:

Plot 1: Transmit bursts (within 100ms)

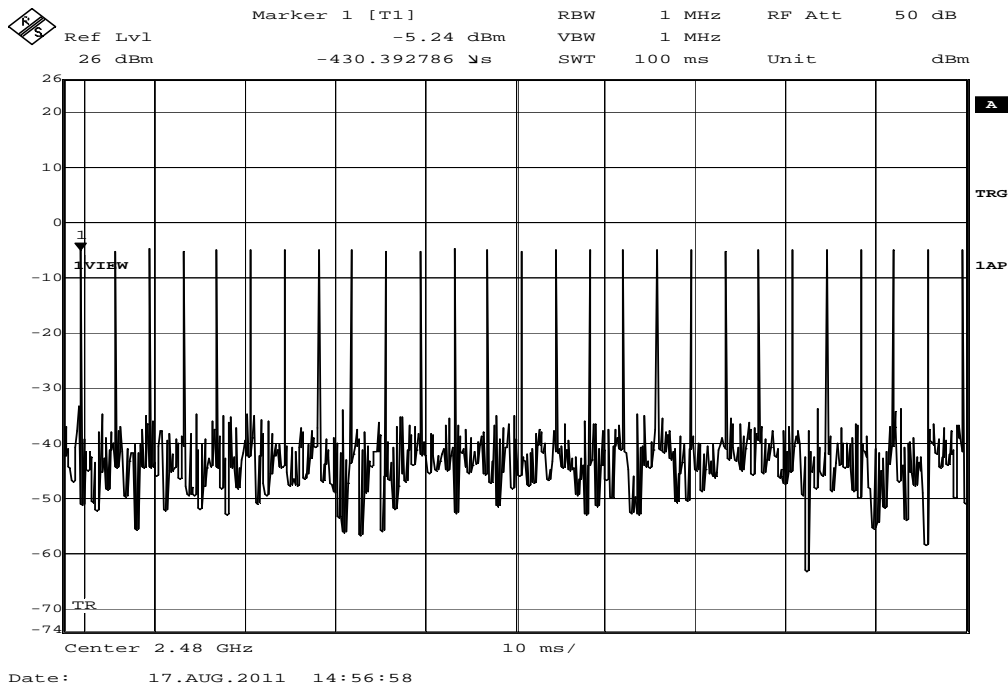

Plot 2: Transmit burst in detail

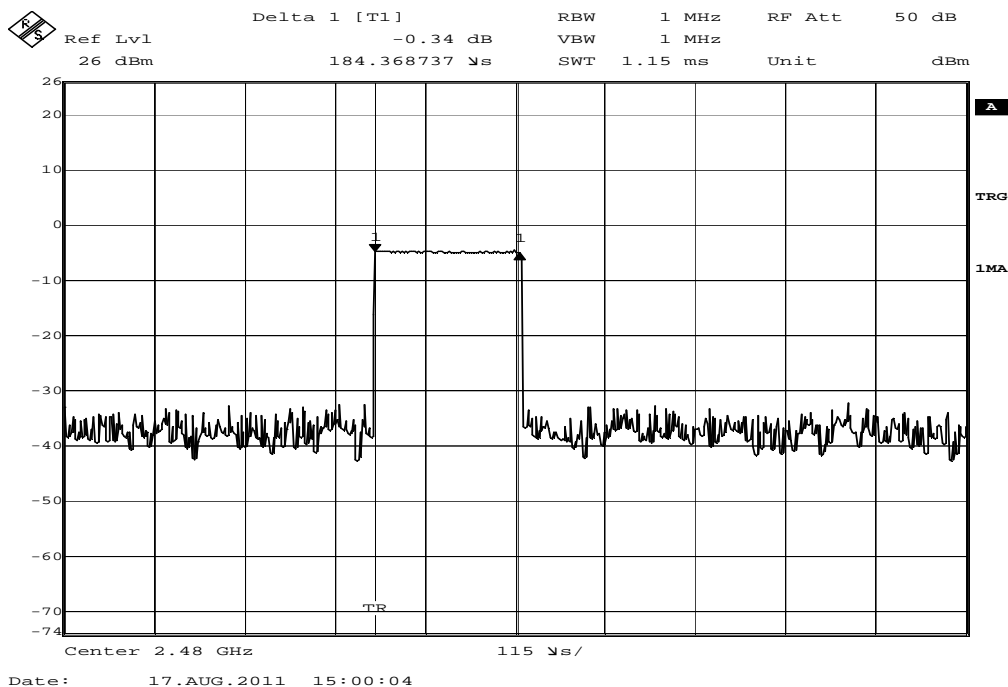

Transmit time (Tx on) within 100 ms = 27 x 184.4 μ s = 4.979 ms
 Assumed Transmit time (Tx on) within 100 ms for further calculations: 5 ms

The peak-to-average correction factor [dB] is calculated with $20\text{Log} [\text{Tx on} / 100\text{ms}]$.

Result: Peak-to-average correction factor [dB]: 26

9.2 Spectrum bandwidth – 99% bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 kHz
Video bandwidth:	10 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
-	RSS Gen, Issue 3, 4.6.1
Spectrum Bandwidth – 99% Bandwidth	
Required for emission designator	

Results:


Modulation Frequency	99% BANDWIDTH [kHz]		
	2402 MHz	2441 MHz	2480 MHz
ANT+	890	896	890
Measurement uncertainty	± 30 kHz		

Plots: ANT+


Plot 1: lowest channel



Plot 2: middle channel

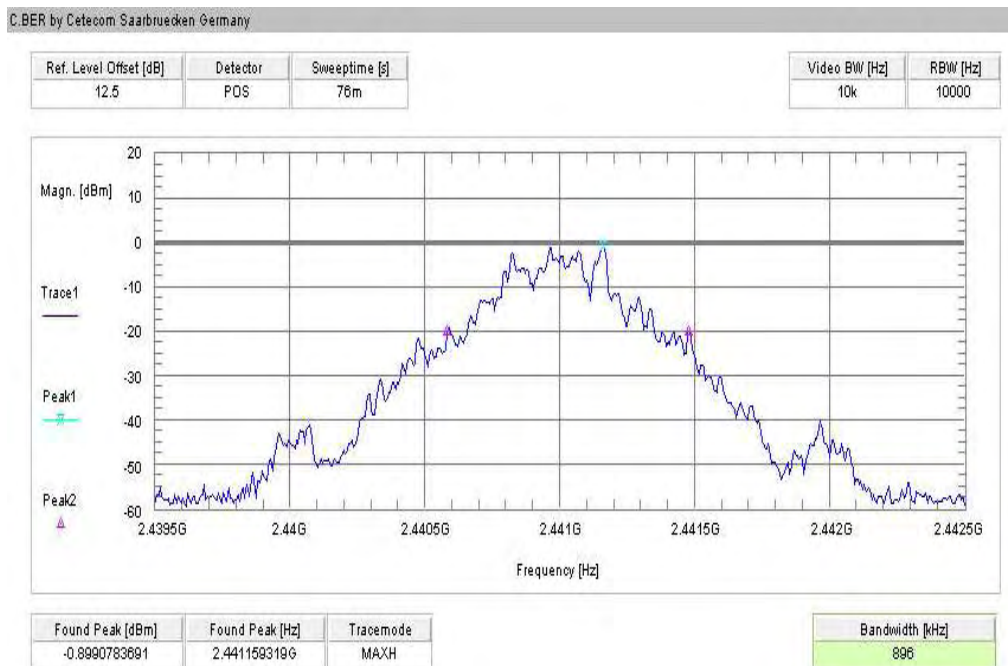

Plot 3: highest channel

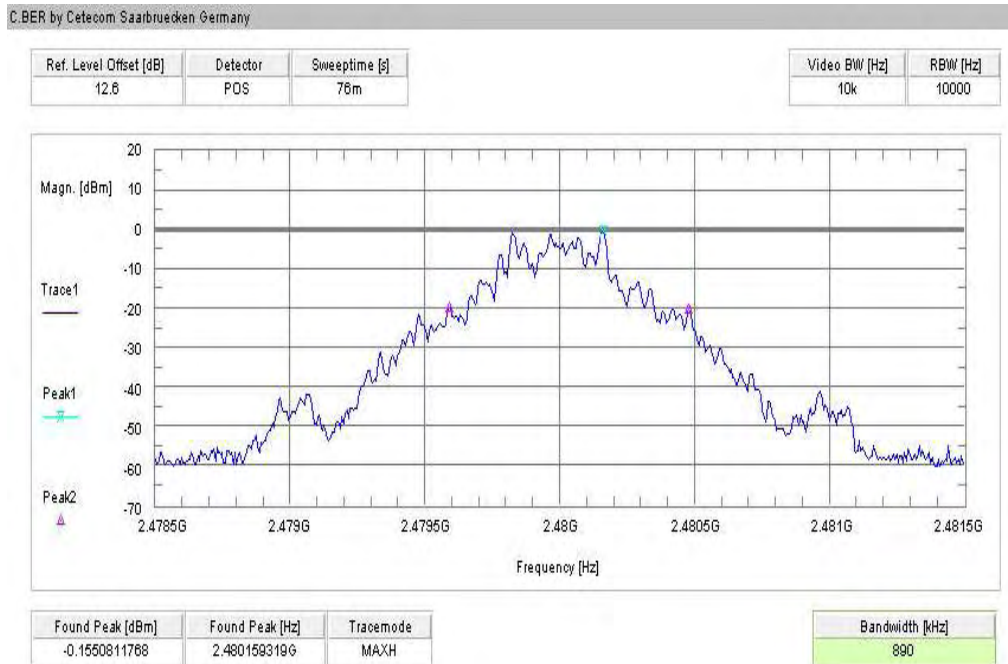

9.3 Maximum field strength

Description:

Measurement of the maximum field strength radiated.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	3 MHz
Trace-Mode:	Max Hold
Measurement distance:	3 m

Limits:

FCC	IC
CFR 15.249(a)(e)	RSS-210, Issue 8, A2.9(a)
Maximum field strength	
The field strength of emissions of intentional radiators shall comply with the following: Field strength of fundamental: 50 mV/m / (94 dB μ V/m) @ 3 m (AVG) 500 mV/m / (114 dB μ V/m) @ 3 m (Peak)	

Result:

Modulation Frequency	Maximum field strength [dB μ V/m]		
	2402 MHz	2441 MHz	2480 MHz
Peak	104.6	102.9	103.4
AVG*)	78.6	76.9	77.4
Measurement uncertainty	± 3 dB		

*) Average value calculated with duty cycle correction factor. (see chapter 9.1)

Result: The result of the measurement is passed.

9.4 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to lowest channel for the lower restricted band and to highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Span:	Lower Band: 2300 – 2400 MHz Higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.249(d)	RSS 210, Issue 8, A 2.9(a)(b)
Band Edge Compliance Radiated	
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.	
54 dBµV/m (AVG) / 74 dBµV/m (Pk)	


Result:

Modulation	Band Edge Compliance Radiated [dBµV/m]
	GFSK
Lower Band Edge – Lowest Channel	< 54 dBµV/m (see plots 1/3)
Upper Band Edge – Highest Channel	< 54 dBµV/m (see plot 2/4)
Measurement uncertainty	± 3 dB


Result: The result of the measurement is passed.

Plots:


Plot 1: lower band edge, vertical polarization

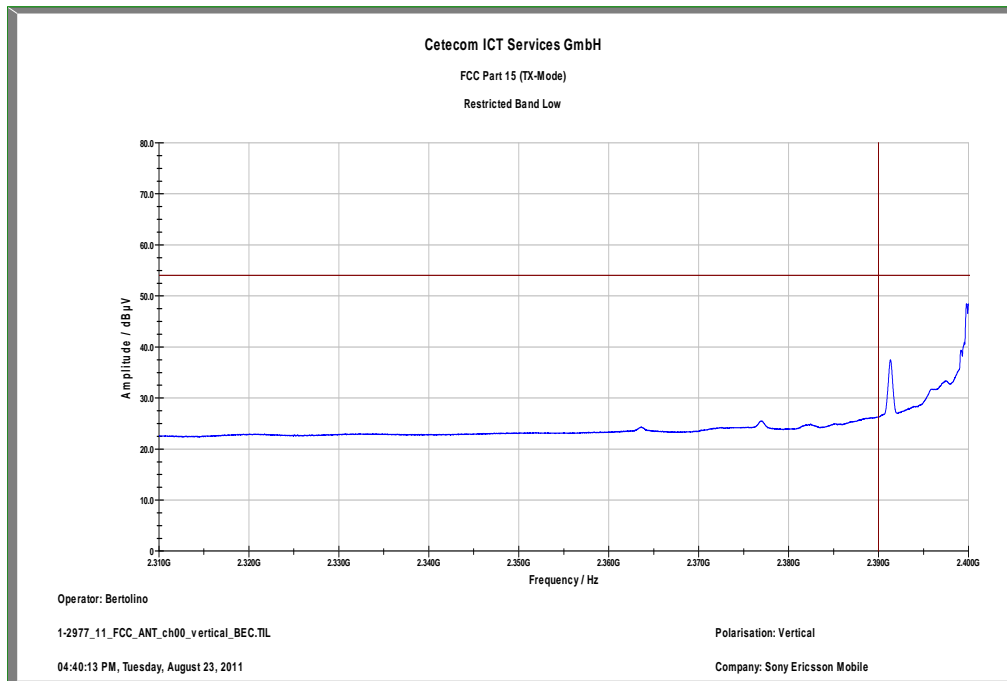


Plot 2: upper band edge, vertical polarization

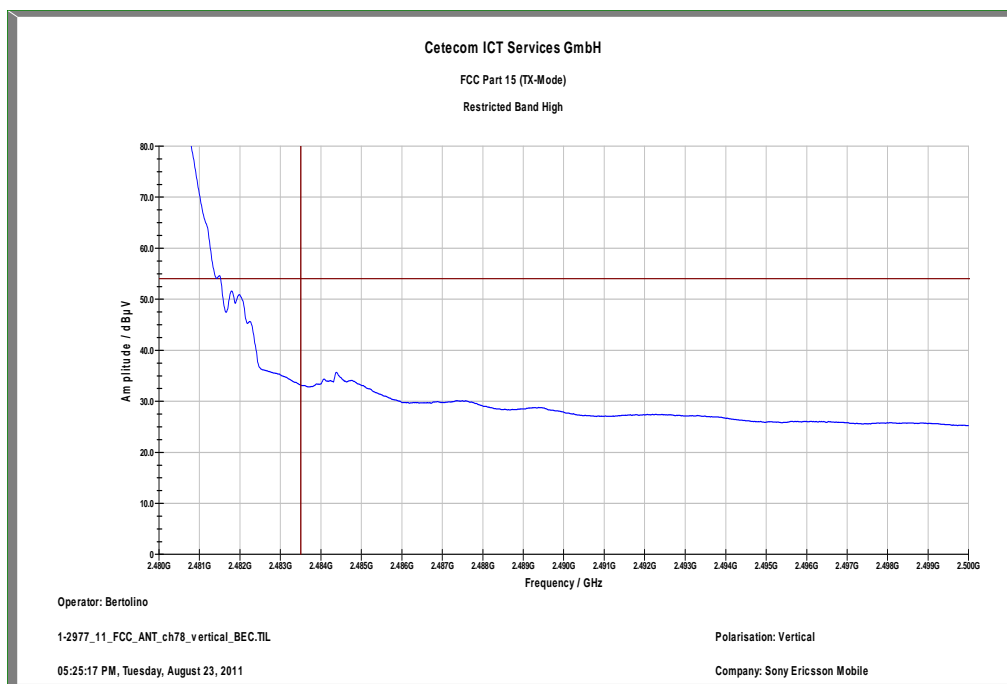

Plot 3: lower band edge, horizontal polarization

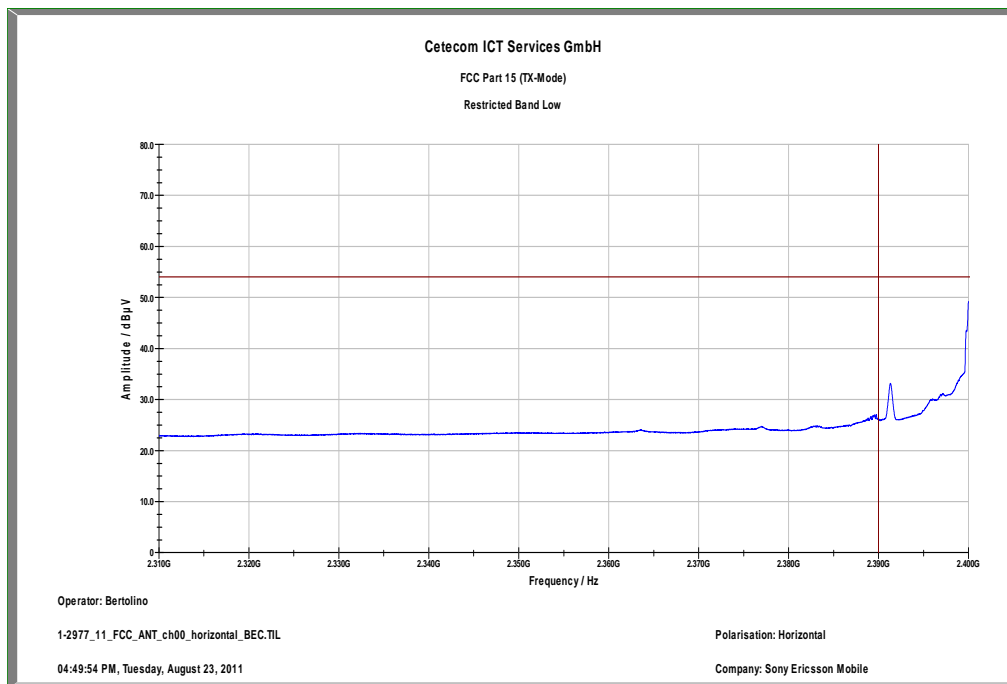

Plot 4: upper band edge, horizontal polarization

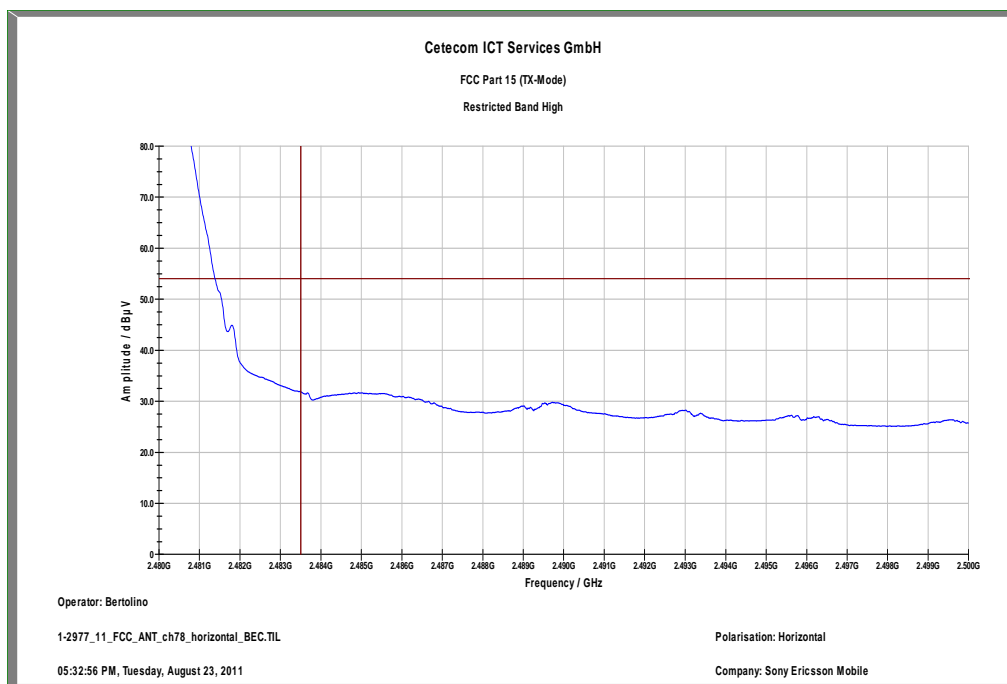

9.5 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz or Duty cycle correction
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC	
CFR Part 15.249(d)	RSS 210, Issue 8, A 2.9(a)(b)	
TX spurious emissions radiated		
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.		
§15.209		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

Results:

TX Spurious Emissions Radiated [dB μ V/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No critical peaks detected above 1 GHz. All detected emissions are more than 20 dB below the limit.			No critical peaks detected above 1 GHz. All detected emissions are more than 20 dB below the limit.			No critical peaks detected above 1 GHz. All detected emissions are more than 20 dB below the limit.		
Measurement uncertainty					± 3 dB			

Result: The result of the measurement is passed.

Plots:

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

CETECOM ICT Services GmbH


Common Information

EUT: AAD-3880123-BV
 Serial Number: BX902GJNT0 (IMEI: 00440214-308356-0)
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: ANT+ TX Ch. 0 + charging
 Operator Name: Hennemann
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB

FCC_10m(B)_3

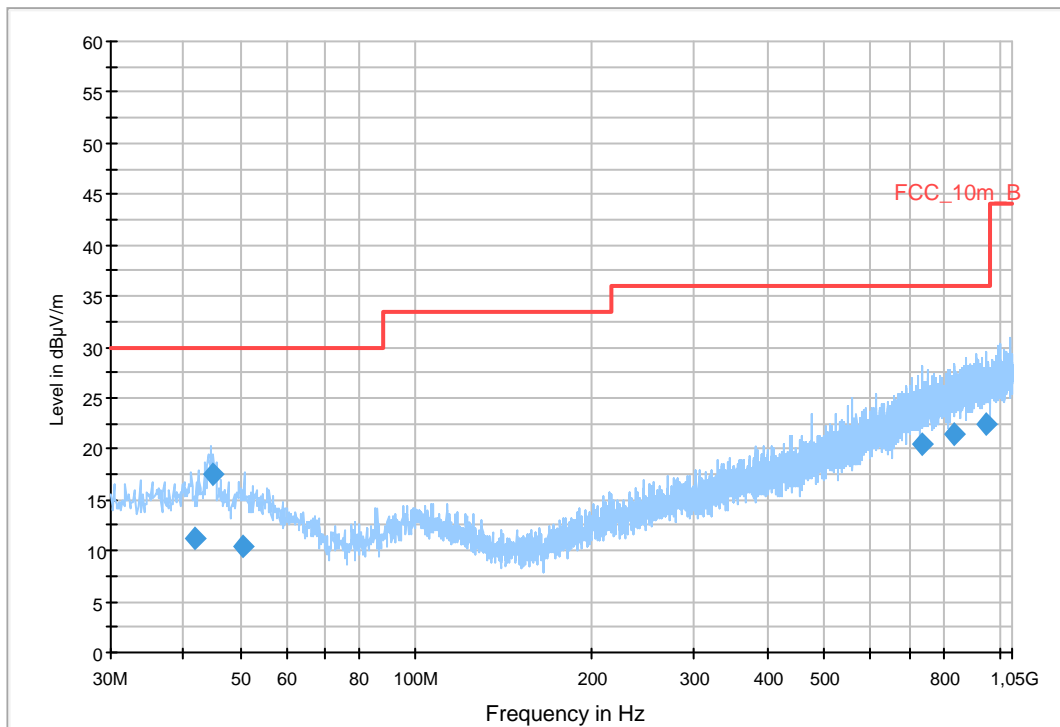

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
41.803950	11.3	1000.0	120.000	106.0	V	284.0	13.4	18.7	30.0	
44.801850	17.5	1000.0	120.000	98.0	V	271.0	13.3	12.5	30.0	
50.698200	10.4	1000.0	120.000	112.0	V	-6.0	13.3	19.6	30.0	
737.132850	20.5	1000.0	120.000	170.0	H	80.0	23.4	15.5	36.0	
833.323050	21.4	1000.0	120.000	98.0	H	185.0	24.3	14.6	36.0	
945.395550	22.3	1000.0	120.000	106.0	H	106.0	25.3	13.7	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical polarization

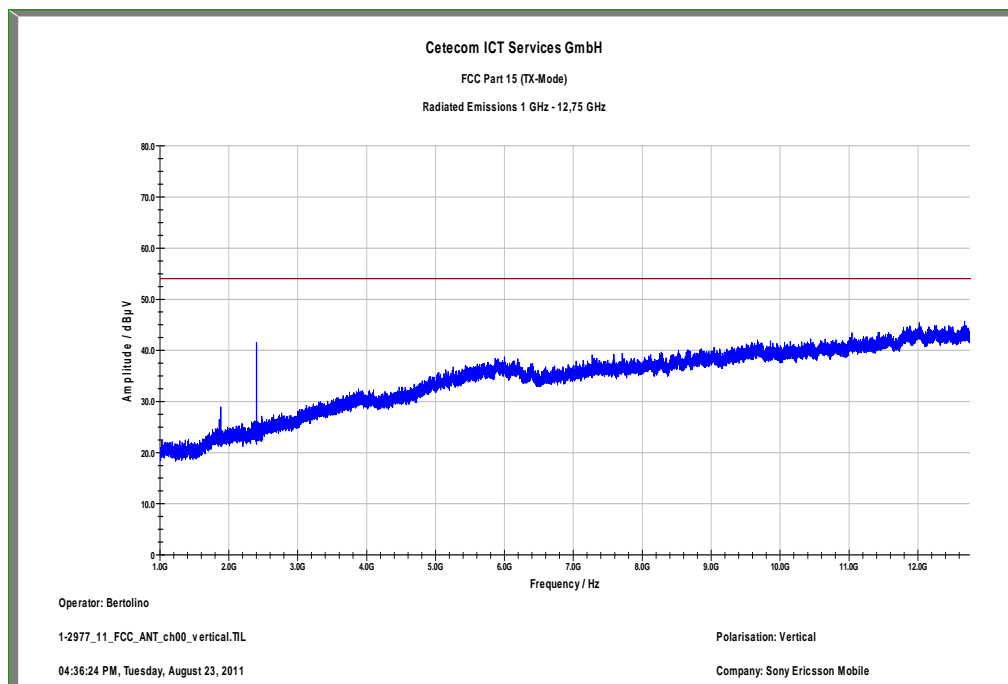


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization

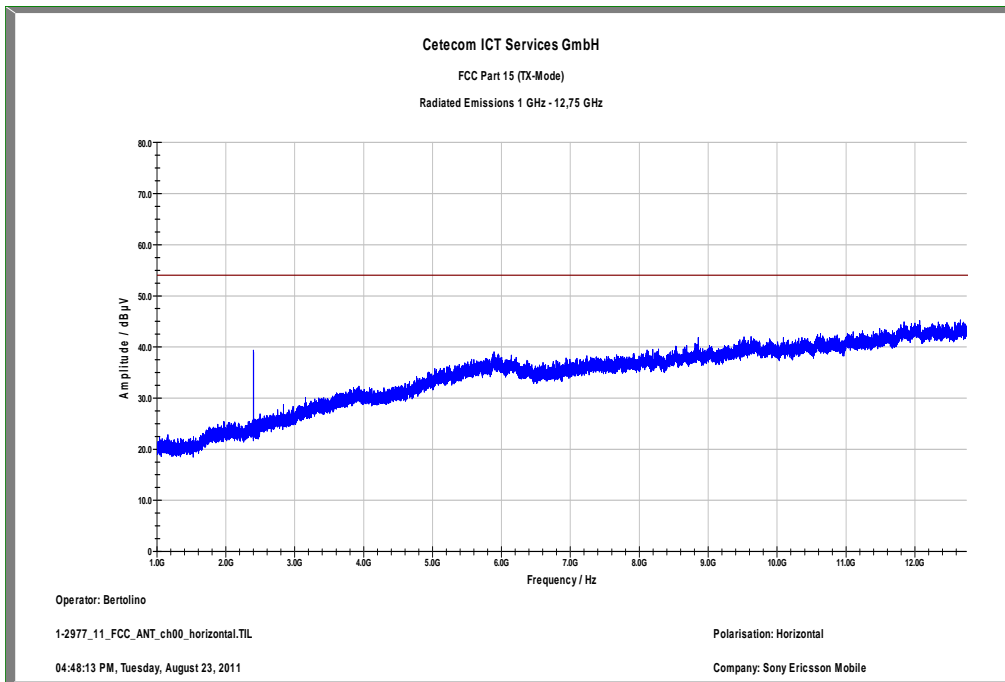


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

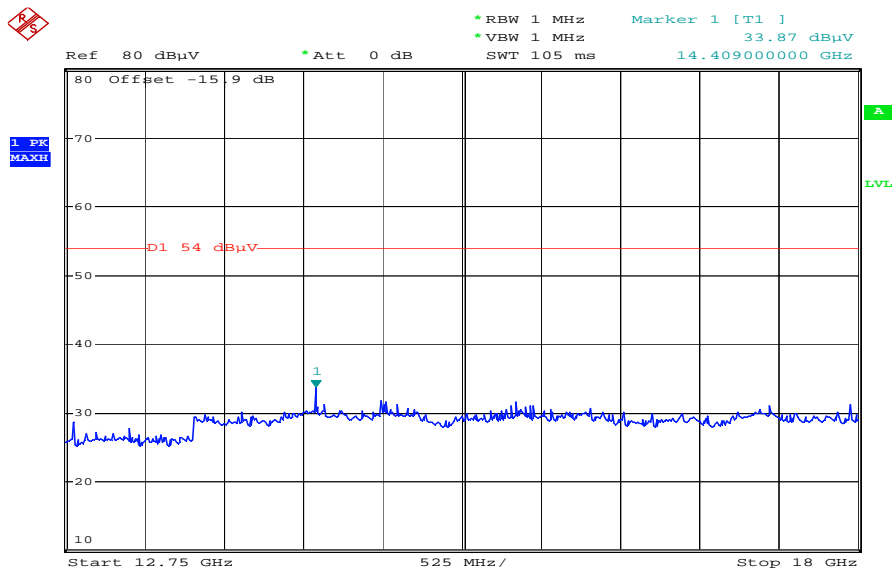

Date: 23.AUG.2011 15:36:56

Plot 5: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

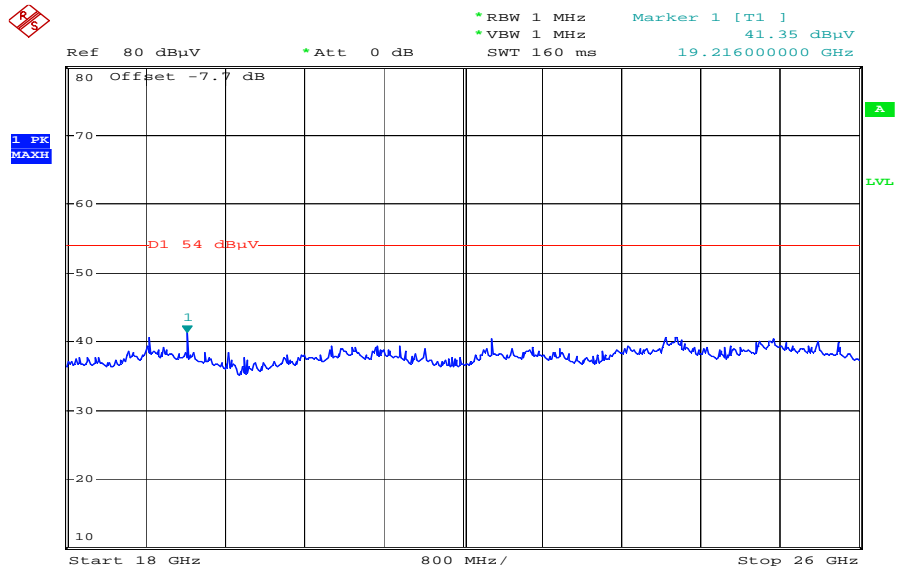

Date: 23.AUG.2011 15:45:15

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

CETECOM ICT Services GmbH


Common Information

EUT: AAD-3880123-BV
 Serial Number: BX902GJNT0 (IMEI: 00440214-308356-0)
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: ANT+ TX Ch. 39 + charging
 Operator Name: Hennemann
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB

FCC_10m(B)_3

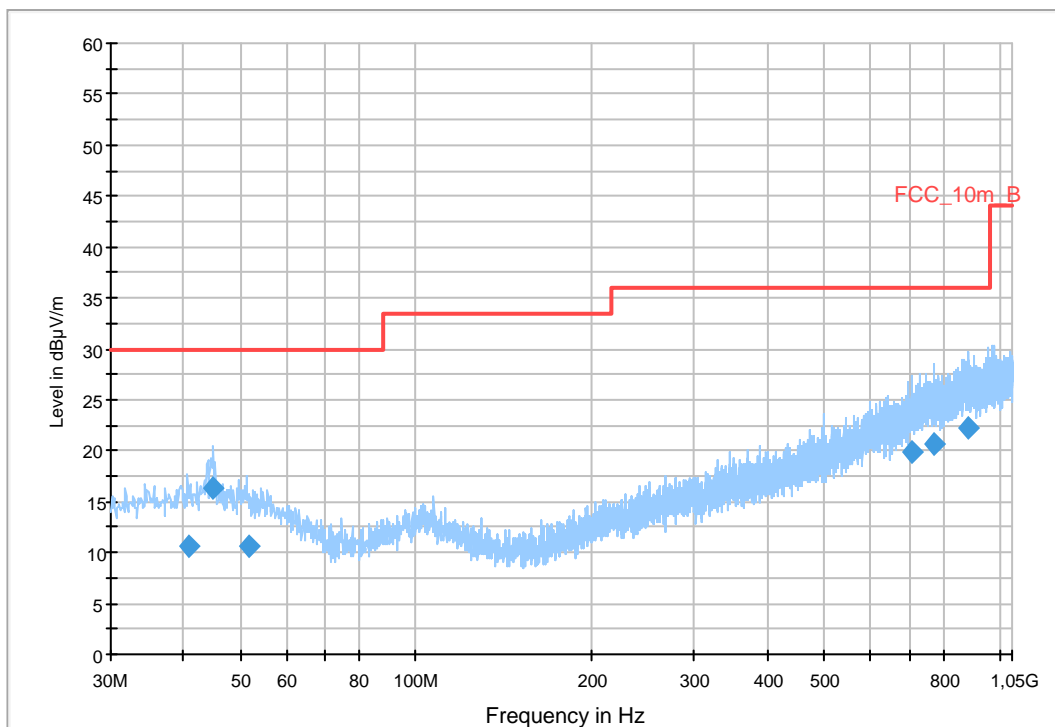

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
40.937400	10.6	1000.0	120.000	98.0	V	264.0	13.4	19.4	30.0	
44.745000	16.3	1000.0	120.000	98.0	V	259.0	13.3	13.7	30.0	
51.591300	10.6	1000.0	120.000	98.0	V	102.0	13.2	19.4	30.0	
707.205300	19.9	1000.0	120.000	170.0	V	91.0	22.7	16.1	36.0	
774.059250	20.7	1000.0	120.000	170.0	H	273.0	23.7	15.3	36.0	
882.891300	22.2	1000.0	120.000	170.0	V	175.0	25.0	13.8	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

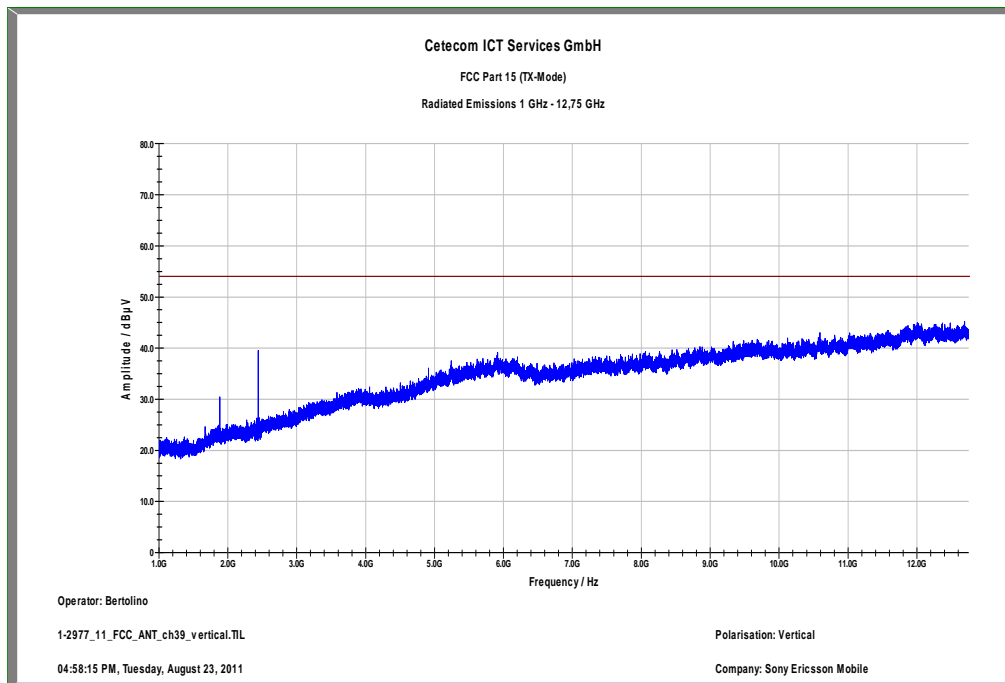


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Middle channel, 1 GHz to 12.75 GHz, horizontal polarization

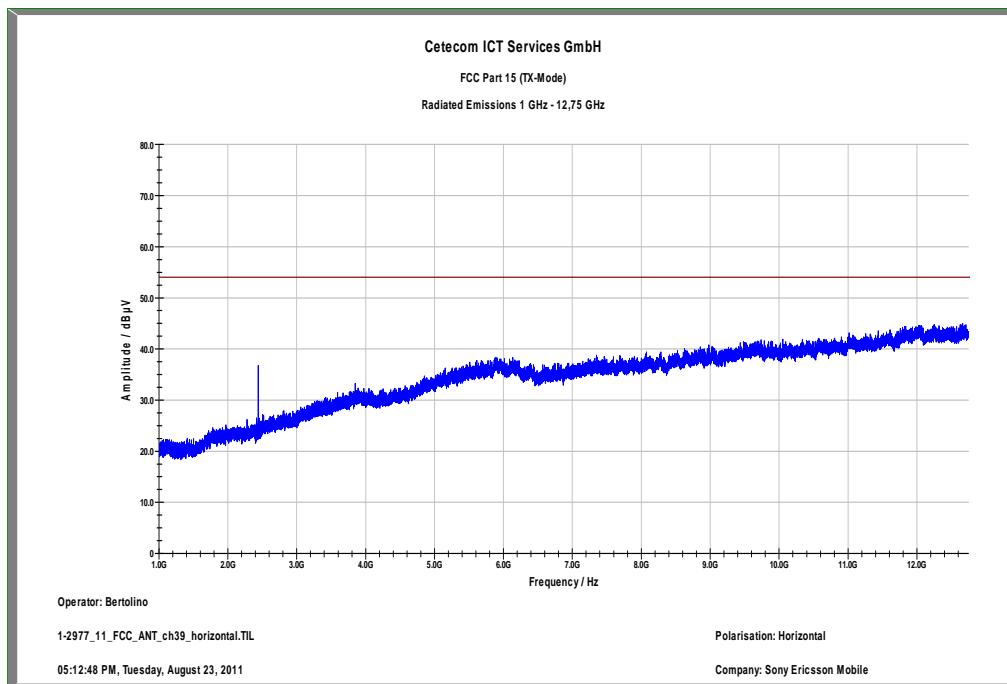


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 9: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization

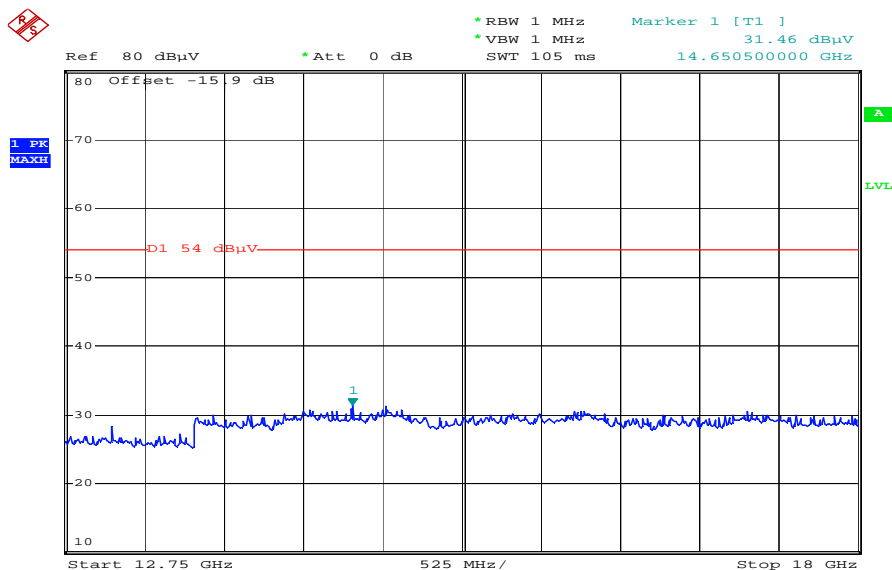

Date: 23.AUG.2011 15:38:55

Plot 10: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

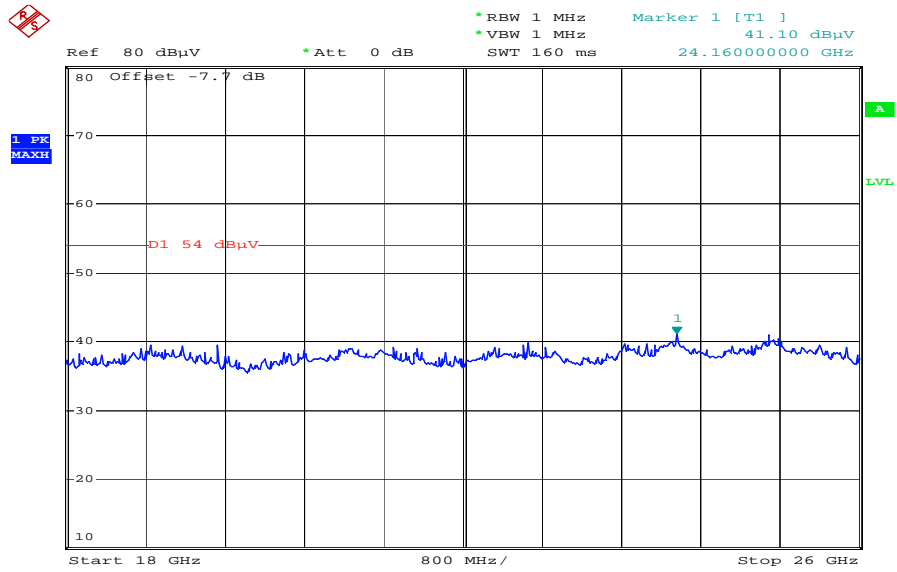

Date: 23.AUG.2011 15:46:53

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

CETECOM ICT Services GmbH


Common Information

EUT: AAD-3880123-BV
 Serial Number: BX902GJNT0 (IMEI: 00440214-308356-0)
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: ANT+ TX: Ch 78 + charging
 Operator Name: Hennemann
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB

FCC_10m(B)_3

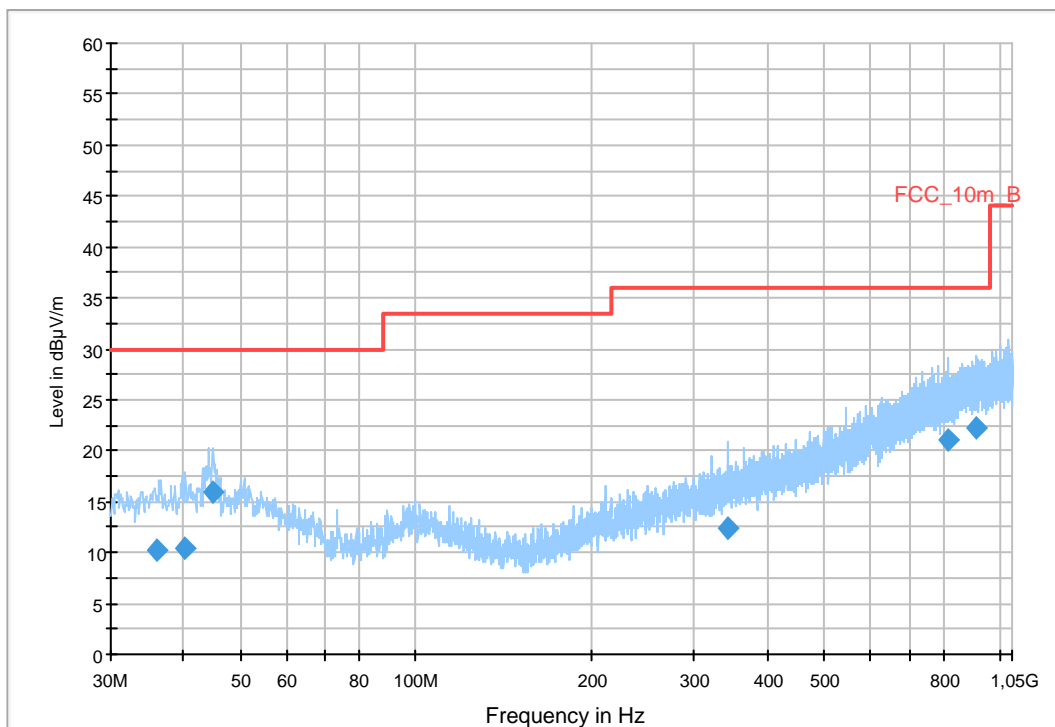

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
36.098400	10.3	1000.0	120.000	170.0	V	8.0	13.1	19.7	30.0	
40.162800	10.4	1000.0	120.000	170.0	H	82.0	13.4	19.6	30.0	
44.927550	15.9	1000.0	120.000	98.0	V	178.0	13.3	14.1	30.0	
343.284150	12.3	1000.0	120.000	170.0	V	106.0	15.9	23.7	36.0	
814.480050	21.1	1000.0	120.000	163.0	V	106.0	24.0	15.0	36.0	
909.319200	22.2	1000.0	120.000	124.0	H	97.0	25.2	13.8	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

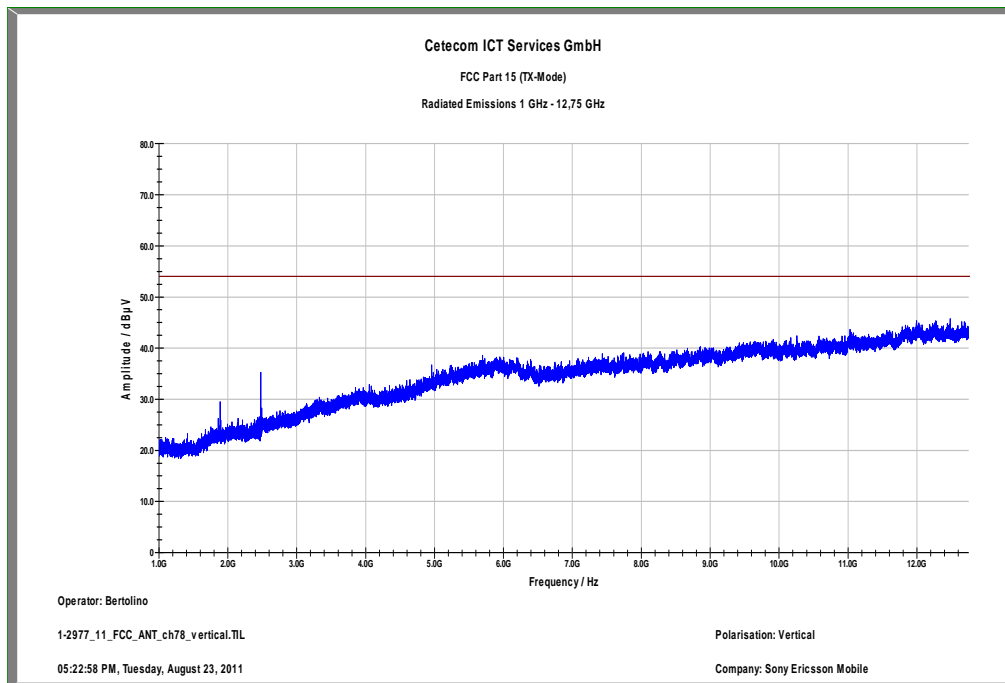


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 13: Highest channel, 1 GHz to 12.75 GHz, horizontal polarization

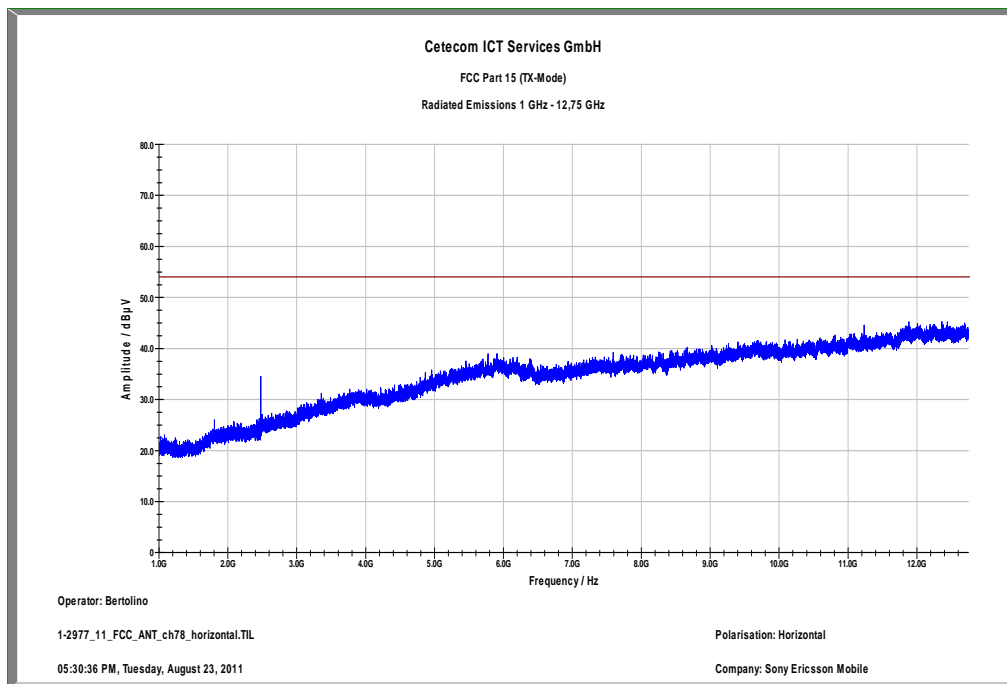


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 14: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

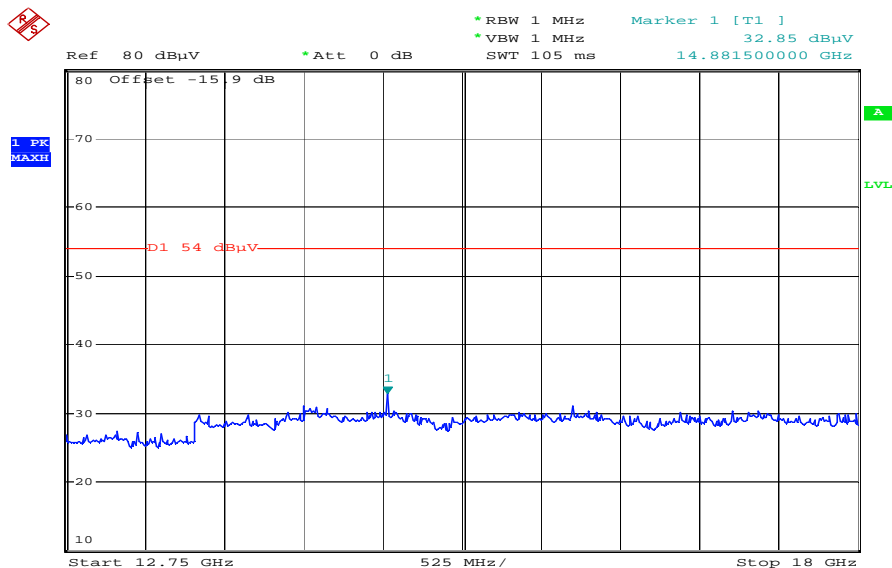

Date: 23.AUG.2011 15:40:15

Plot 15: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

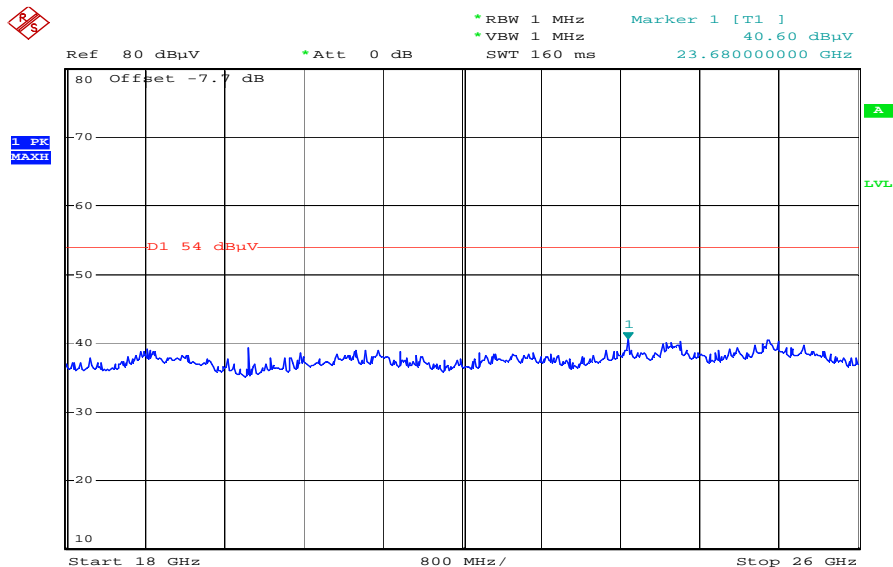

Date: 23.AUG.2011 15:47:40

9.6 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
CFR Part 15.109		RSS Gen, Issue 3, 4.10
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No critical peaks detected above 1 GHz. All detected emissions are more than 20 dB below the limit.		
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.

Plots:

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

CETECOM ICT Services GmbH


Common Information

EUT: AAD-3880123-BV
 Serial Number: BX902GJNT0 (IMEI: 00440214-308356-0)
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: ANT+ RX + charging
 Operator Name: Hennemann
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m
Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB

FCC_10m(B)_3

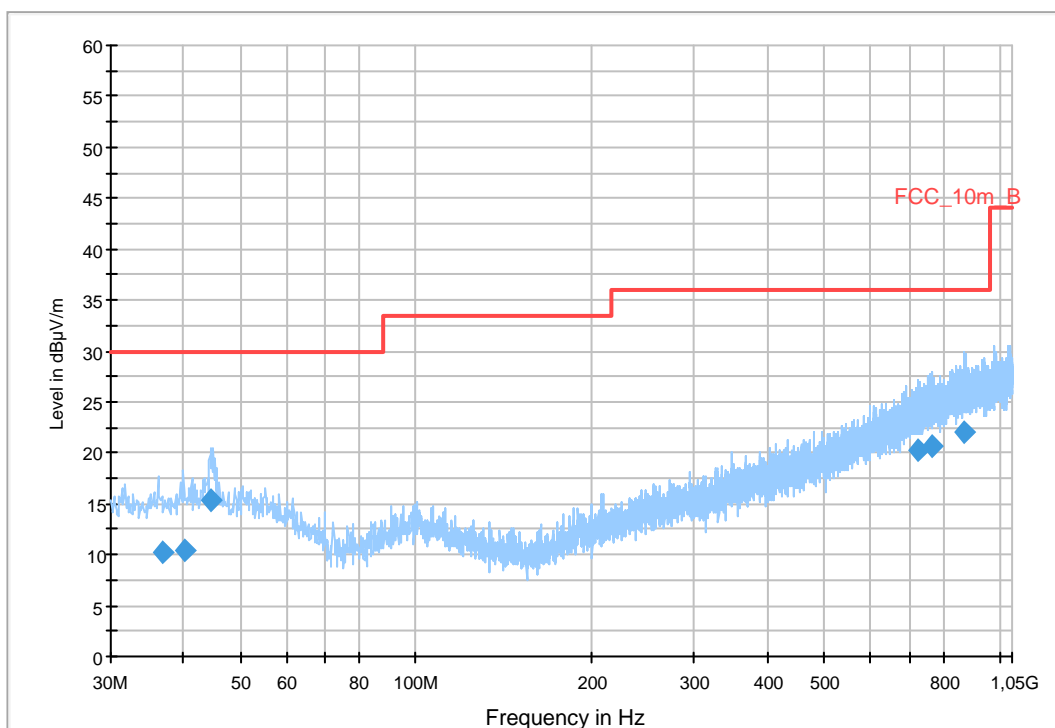

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
36.720000	10.2	1000.0	120.000	136.0	V	196.0	13.2	19.8	30.0	
40.079250	10.4	1000.0	120.000	98.0	V	91.0	13.4	19.6	30.0	
44.471700	15.4	1000.0	120.000	98.0	V	284.0	13.3	14.6	30.0	
725.024100	20.2	1000.0	120.000	170.0	V	8.0	23.1	15.8	36.0	
766.572900	20.8	1000.0	120.000	170.0	H	284.0	23.7	15.2	36.0	
867.267300	22.0	1000.0	120.000	170.0	H	-6.0	24.8	14.0	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


Plot 2: 1 GHz to 12.75 GHz, vertical polarization

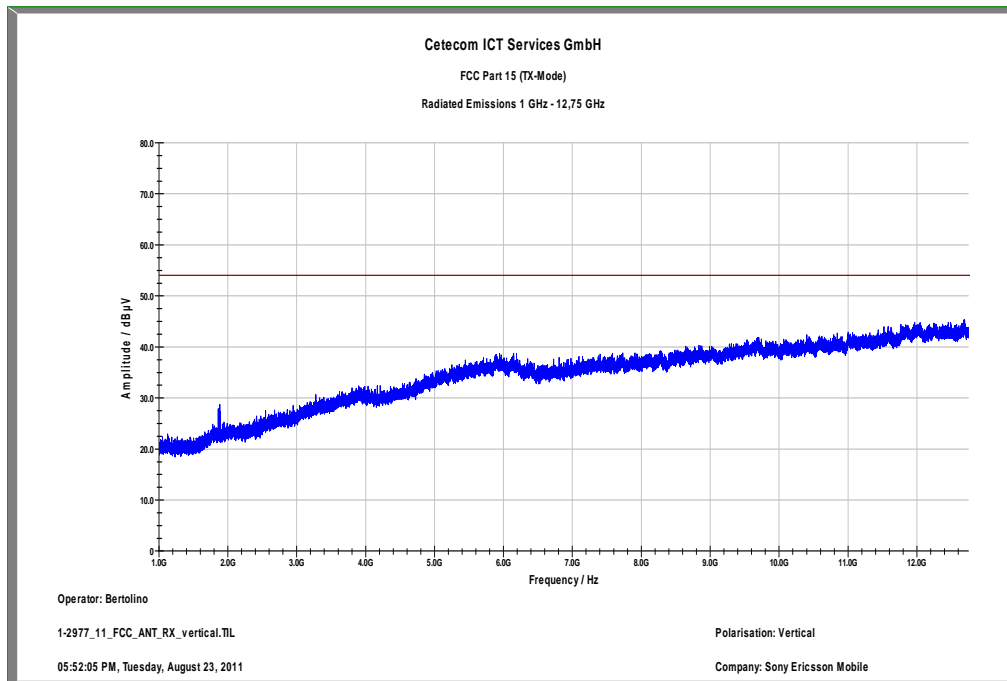

Plot 3: 1 GHz to 12.75 GHz, horizontal polarization

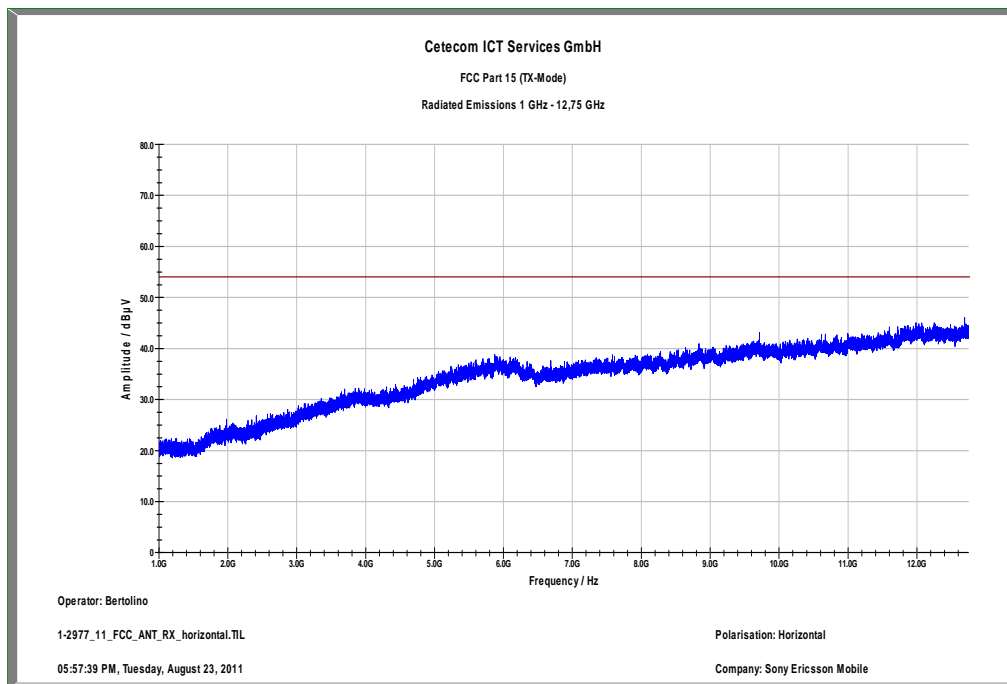


Plot 4: 12 GHz to 18 GHz, vertical & horizontal polarization

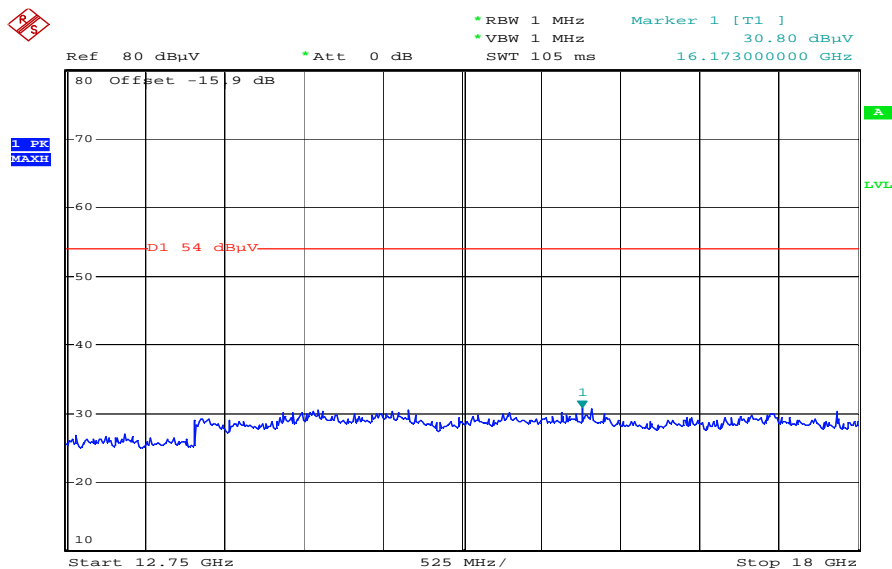

Date: 23.AUG.2011 15:41:16

Plot 5: 18 GHz to 26 GHz, vertical & horizontal polarization

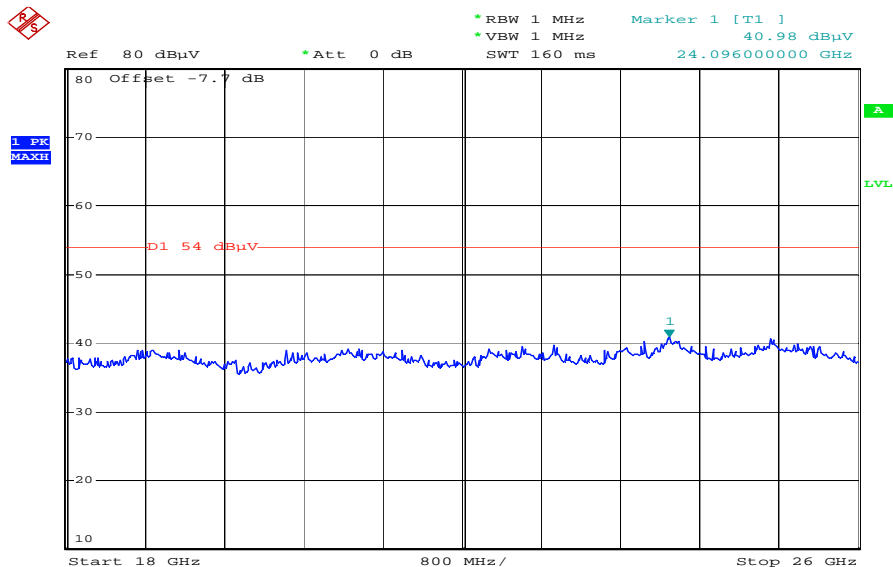

Date: 23.AUG.2011 15:43:10

9.7 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to lowest, middle and highest channel. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.209(a)		RSS -Gen	
Spurious Emissions Radiated < 30 MHz			
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	


Results:

Spurious Emissions Radiated < 30 MHz [dB μ V/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
No critical peaks found			No critical peaks found			No critical peaks found		
Measurement uncertainty			± 3 dB					


Result: The result of the measurement is passed.

Plots:


Plot 1: 9 kHz to 30 MHz / lowest channel

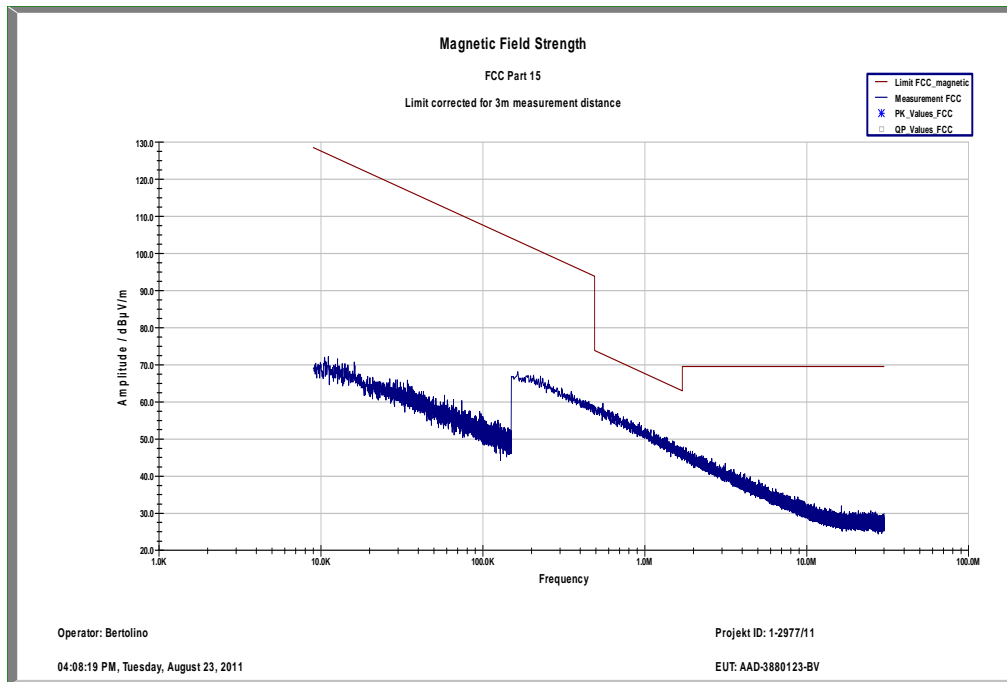


Plot 2: 9 kHz to 30 MHz / middle channel

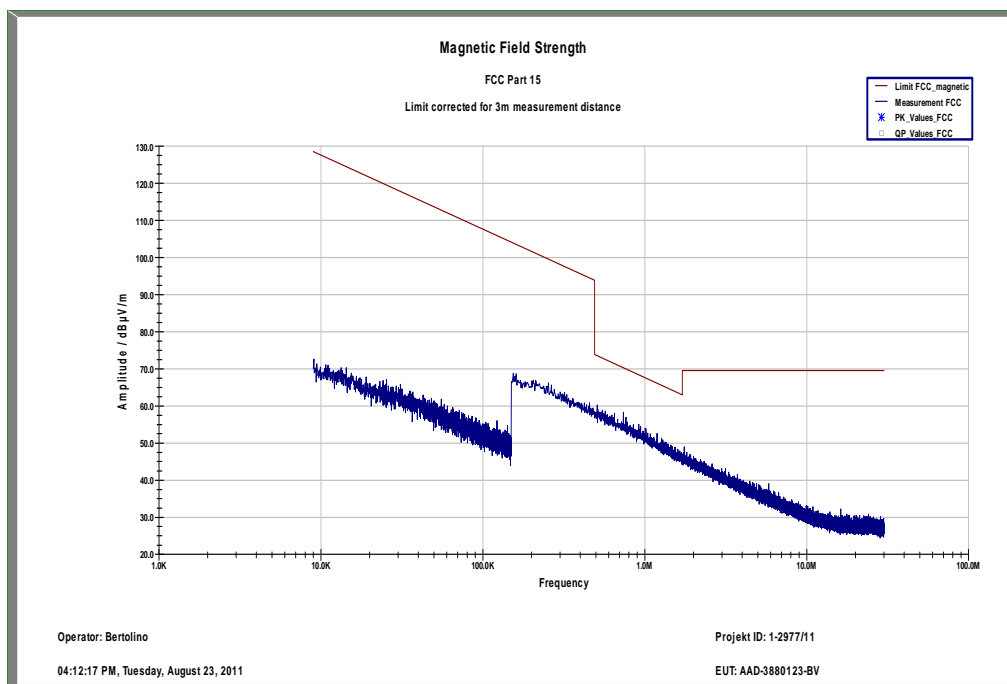

Plot 3: 9 kHz to 30 MHz / highest channel

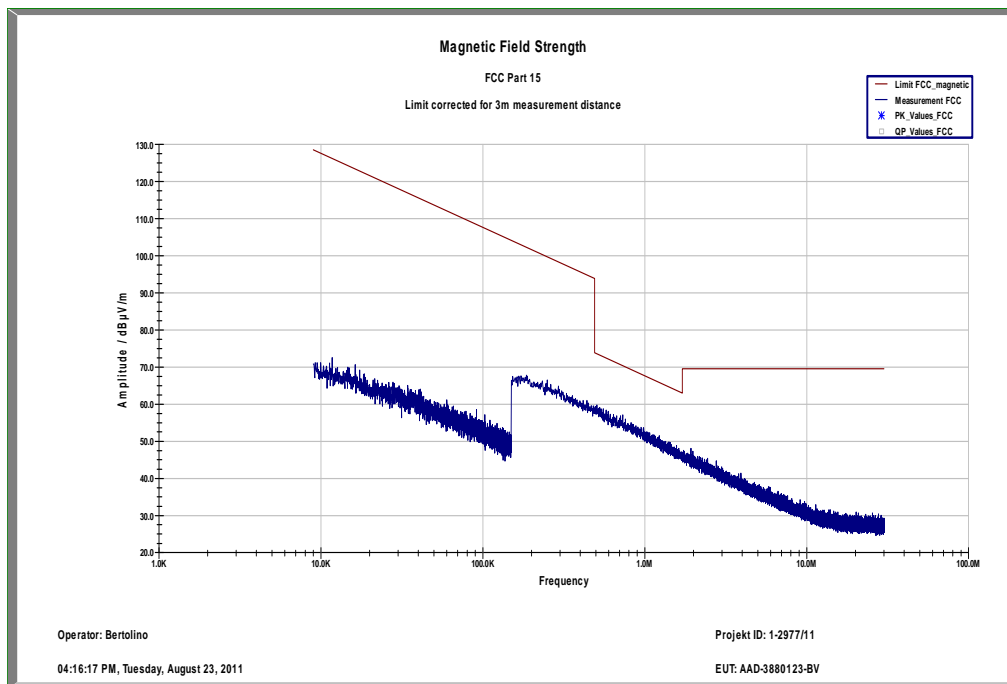

Plot 4: 9 kHz to 30 MHz / Idle mode

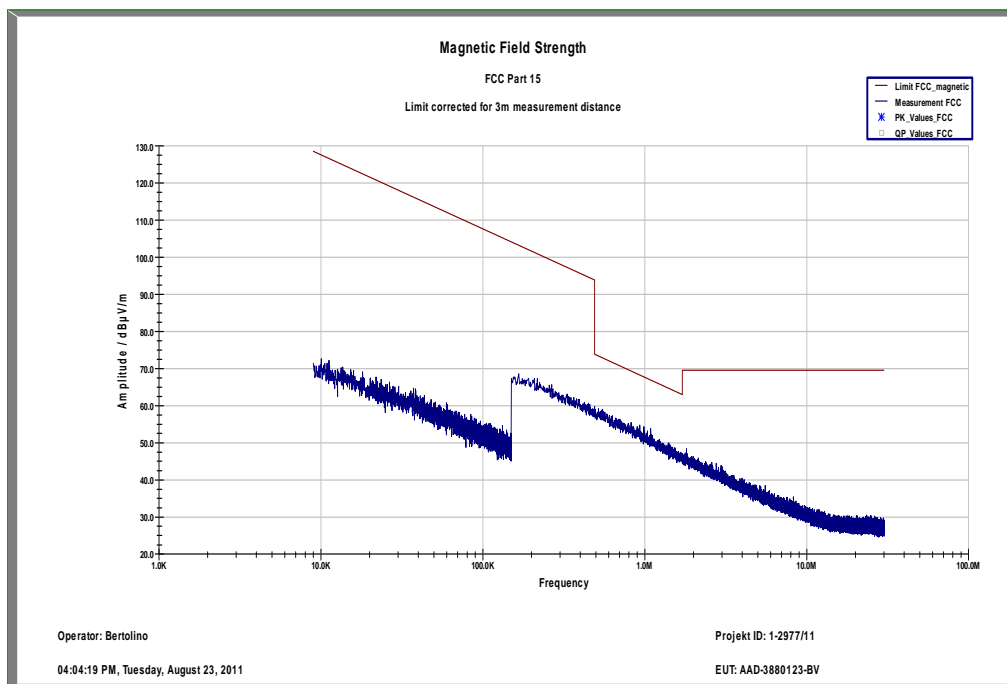

9.8 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel and Idle mode. If critical peaks are found the lowest and highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	

*Decreases with the logarithm of the frequency


Results:

Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	


Result: The result of the measurement is passed.

Plots:


Plot 1: 9 kHz to 30 MHz / phase Line, TX mode

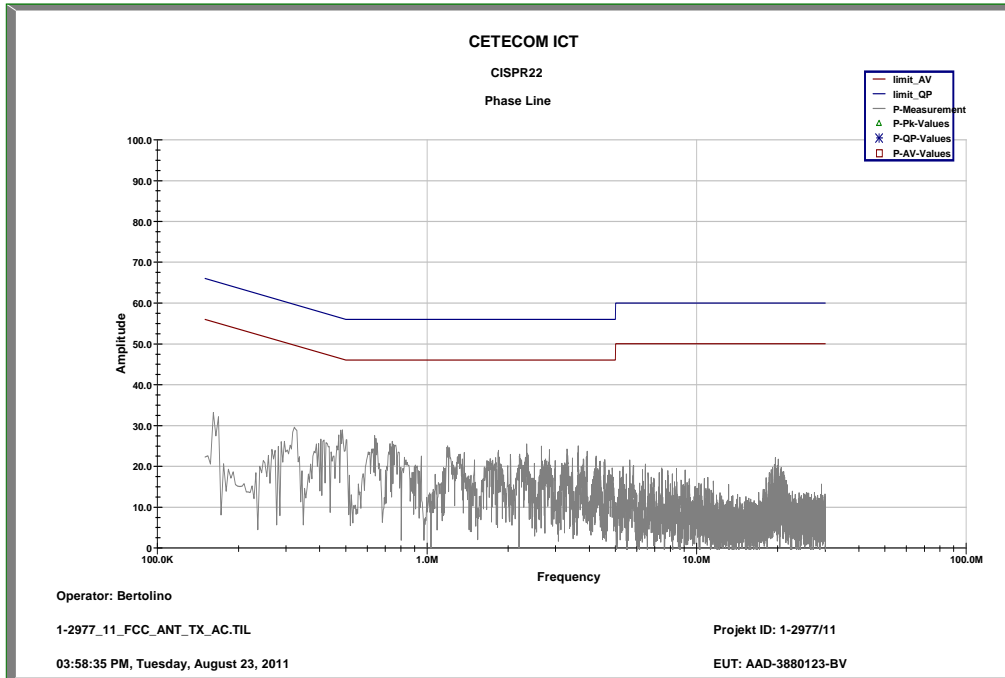


Plot 2: 9 kHz to 30 MHz / neutral Line, TX mode

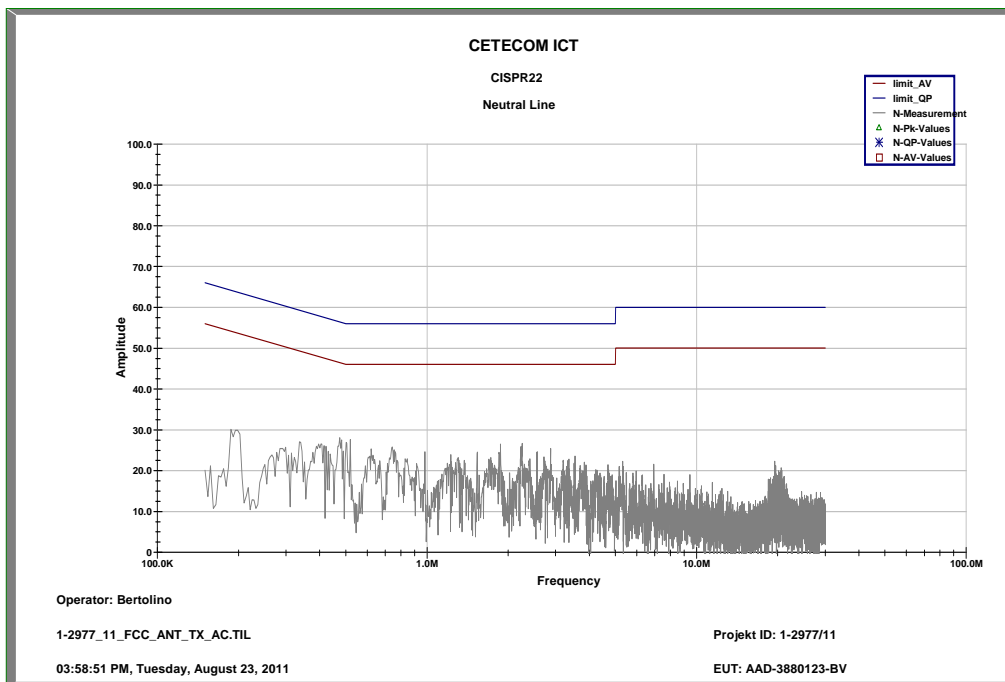

Plot 3: 9 kHz to 30 MHz / phase Line, Idle mode

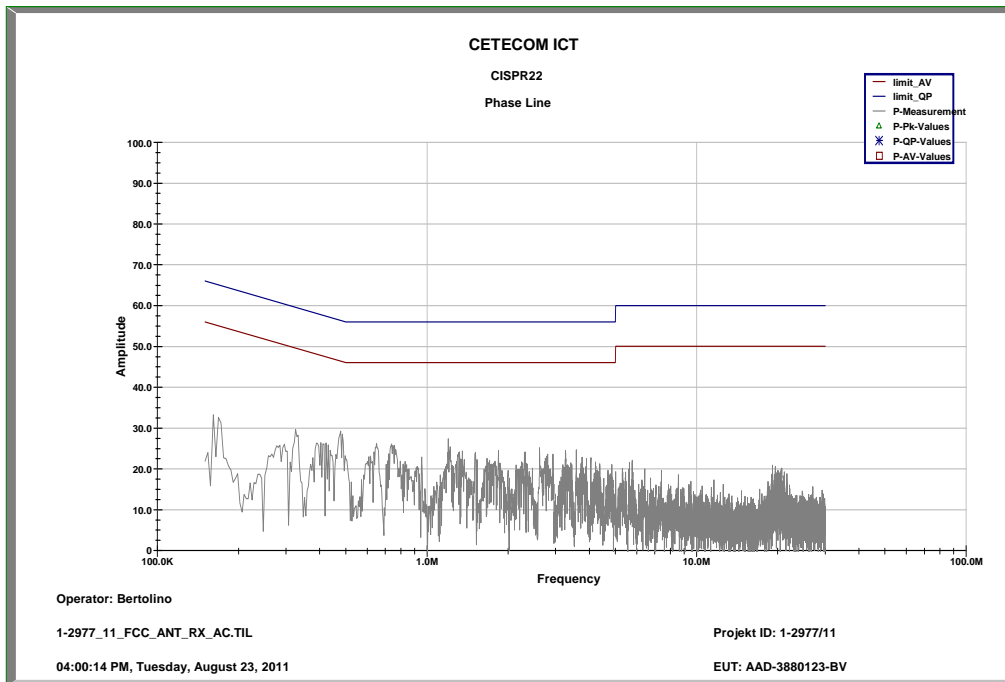

Plot 4: 9 kHz to 30 MHz / neutral Line, Idle mode

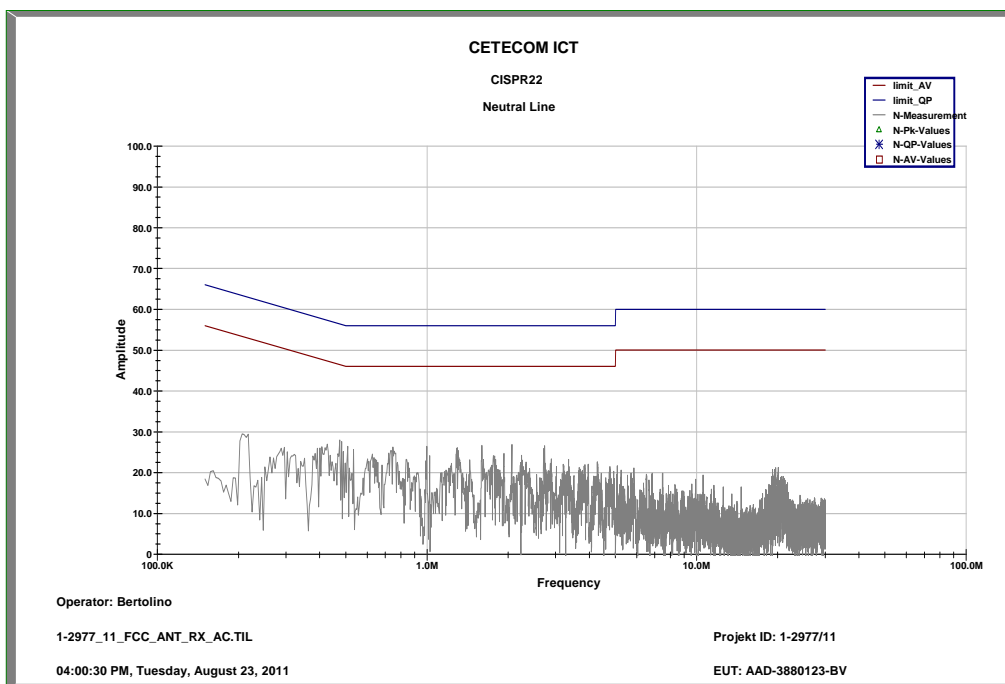

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne		
2	n. a.	Hygro-Thermometer	-/, 5-45°C, 20-100%rF	Thies Clima	-/-	400000080	k	04.08.2011	04.08.2012
3	n. a.	Signal Generator 0.01/2 - 20 GHz, Frequ. Resol. 0.1Hz	SMP02	R&S	835133/011	300002681-0003	k	26.08.2008	26.08.2011
4	n. a.	Switch / Control Unit	SSCU	R&S	338864/003	300002681-0006	ne		
5	n. a.	Precision Step Attenuator 50 Ohms, 0 - 2700MHz	RSP	R&S	834500/010	300002681-0007	NK!	26.08.2008	
6	n. a.	Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009	Ve	13.09.2010	13.09.2012
7	n. a.	Directional Coupler	101020010	Krytar	70215	300002840	ev		
8	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
9	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev		
10	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	07.09.2010	07.09.2012
11	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000787	ne		
12	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002442	ne		
13	11b	Microwave System Amplifier, 0.5-26.5 GHz; 25 dB gain	83017A	HP Meßtechnik	00419	300002268	ev	10.03.2011	
14	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
15	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIK!	11.05.2011	11.05.2013
16	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
17	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
18	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
19	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
20	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
21	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
22	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
23	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		

24	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
25	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
26	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
27	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vIKI!	08.09.2010	08.09.2012
28	n. a.	TRIOLOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	17.12.2008	17.12.2011
29	11b	Microwave System Amplifier, 0.5-26.5 GHz; 25 dB gain	83017A	HP Meßtechnik	00419	300002268	ev	10.03.2011	
30	n. a.	DC Power Supply 0 – 32V	1108-32	Heiden	001802	300001383	Ve	23.06.2010	23.06.2013
31	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
32	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
33	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spiß	B5981; 5D1081;B5979	300000210	ne		
34	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
35	n. a.	Analyser-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
36	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
37	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
38	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
39	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
40	n. a.	TRIOLOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
41	n. a.	Spectrum-Analyser	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vIKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress